



Report No.: RZA1012-2033SAR01R1



OET 65

TEST REPORT

| | |
|---------------------|--------------------|
| Product Name | DC HSPA+ USB Modem |
| Model | 004Z |
| FCC ID | Q78-004Z |
| Client | ZTE CORPORATION |

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

| | | | |
|------------------------------|---|--------------|------|
| Product Name | DC HSPA+ USB Modem | Model | 004Z |
| FCC ID | Q78-004Z | | |
| Report No. | RZA1012-2033SAR01R1 | | |
| Client | ZTE CORPORATION | | |
| Manufacturer | ZTE CORPORATION | | |
| Reference Standard(s) | <p>IEEE Std C95.1, 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002: Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio frequency Emissions.</p> <p>KDB 447498 D02 SAR Procedures for Dongle Xmtr v02: SAR Measurement Procedures for USB Dongle Transmitters.</p> | | |
| Conclusion | <p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: January 10th, 2011</p> | | |
| Comment | The test result only responds to the measured sample. | | |

Approved by 杨伟中
Yang Weizhong

Revised by 凌敏宝
Ling Minbao

Performed by 沈辰
Shen Chen

TABLE OF CONTENT

| | |
|--|----|
| 1. General Information | 5 |
| 1.1. Notes of the Test Report..... | 5 |
| 1.2. Testing Laboratory | 5 |
| 1.3. Applicant Information | 6 |
| 1.4. Manufacturer Information..... | 6 |
| 1.5. Information of EUT..... | 7 |
| 1.6. The Maximum SAR _{1g} Values and Conducted Power of Each Tested Band..... | 8 |
| 1.7. Test Date | 8 |
| 2. Operational Conditions during Test | 9 |
| 2.1. General Description of Test Procedures | 9 |
| 2.2. GSM Test Configuration..... | 9 |
| 2.3. Position of Module in Portable Devices..... | 10 |
| 2.4. Picture of Host Product..... | 11 |
| 3. SAR Measurements System Configuration..... | 13 |
| 3.1. SAR Measurement Set-up..... | 13 |
| 3.2. DASY5 E-field Probe System | 14 |
| 3.2.1. EX3DV4 Probe Specification | 14 |
| 3.2.2. E-field Probe Calibration..... | 15 |
| 3.3. Other Test Equipment | 15 |
| 3.3.1. Device Holder for Transmitters | 15 |
| 3.3.2. Phantom | 16 |
| 3.4. Scanning Procedure | 16 |
| 3.5. Data Storage and Evaluation | 18 |
| 3.5.1. Data Storage..... | 18 |
| 3.5.2. Data Evaluation by SEMCAD | 18 |
| 3.6. System Check..... | 21 |
| 3.7. Equivalent Tissues..... | 22 |
| 4. Laboratory Environment..... | 22 |
| 5. Characteristics of the Test..... | 23 |
| 5.1. Applicable Limit Regulations..... | 23 |
| 5.2. Applicable Measurement Standards | 23 |
| 6. Conducted Output Power Measurement..... | 24 |
| 6.1. Summary | 24 |
| 6.2. Conducted Power Results | 24 |
| 7. Test Results | 26 |
| 7.1. Dielectric Performance..... | 26 |
| 7.2. System Check..... | 26 |
| 7.3. Summary of Measurement Results..... | 27 |
| 7.3.1. GSM 850 (GPRS/EGPRS)..... | 27 |
| 7.3.2. GSM 1900 (GPRS/EGPRS)..... | 28 |
| 8. Measurement Uncertainty | 29 |
| 9. Main Test Instruments | 30 |

TA Technology (Shanghai) Co., Ltd.
Test Report

| | |
|--|----|
| ANNEX A: Test Layout | 31 |
| ANNEX B: System Check Results | 33 |
| ANNEX C: Graph Results | 35 |
| ANNEX D: Probe Calibration Certificate | 65 |
| ANNEX E: D835V2 Dipole Calibration Certificate | 76 |
| ANNEX F: D1900V2 Dipole Calibration Certificate | 85 |
| ANNEX G: DAE4 Calibration Certificate..... | 94 |
| ANNEX H: The EUT Appearances and Test Configuration..... | 99 |

1. General Information

1.1. Notes of the Test Report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

1.2. Testing Laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA1012-2033SAR01R1

Page 6 of 102

1.3. Applicant Information

Company: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
City: Shenzhen
Postal Code: 518057
Country: P.R. China
Contact: Zhang Min
Telephone: 021-68897541
Fax: 021-50801070

1.4. Manufacturer Information

Company: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
City: Shenzhen
Postal Code: 518057
Country: P.R. China
Telephone: 021-68897541
Fax: 021-50801070

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA1012-2033SAR01R1

Page 7 of 102

1.5. Information of EUT

General Information

| | | | |
|--|---|---------------------|-----------------|
| Device Type: | Portable Device | | |
| Exposure Category: | Uncontrolled Environment / General Population | | |
| Name of EUT: | DC HSPA+ USB Modem | | |
| IMEI: | 864998000000086 | | |
| Hardware Version: | di9A | | |
| Software Version: | EN_ZTE_MF682V0.0.0B02 | | |
| Antenna Type: | Internal Antenna | | |
| Device Operating Configurations: | | | |
| Supporting Mode(s): | GSM 850/ GSM 1900; (tested) GSM 900/ GSM 1800; WCDMA Band I/ WCDMA Band XI; | | |
| Test Modulation: | (GSM)GMSK | | |
| Device Class: | B | | |
| GPRS Multislot Class(10): | Max Number of Timeslots in Uplink | 2 | |
| | Max Number of Timeslots in Downlink | 4 | |
| | Max Total Timeslot | 5 | |
| EGPRS Multislot Class(12): | Max Number of Timeslots in Uplink | 4 | |
| | Max Number of Timeslots in Downlink | 4 | |
| | Max Total Timeslot | 5 | |
| Operating Frequency Range(s): | Band | Tx (MHz) | Rx (MHz) |
| | GSM 850 | 824.2 ~ 848.8 | 869.2 ~ 893.8 |
| | GSM 1900 | 1850.2 ~ 1909.8 | 1930.2 ~ 1989.8 |
| Power Class: | GSM 850: 4, tested with power level 5 | | |
| | GSM 1900: 1, tested with power level 0 | | |
| Test Channel: (Low - Middle - High) | 128 -190 - 251 | (GSM 850) (tested) | |
| | 512 - 661 - 810 | (GSM 1900) (tested) | |
| Used Host Product: | IBM T61 | | |
| | Lenovo Y-450 | | |

Equipment Under Test (EUT) is a DC HSPA+ USB Modem. The USB plug can be rotated from 0 degree to 270 degree. The EUT has a GSM antenna that is used for Tx/Rx. During SAR test of the EUT, it was connected to a portable computer. SAR is tested for the EUT respectively for GSM 850 and GSM 1900 in this report.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA1012-2033SAR01R1

Page 8 of 102

1.6. The Maximum SAR_{1g} Values and Conducted Power of Each Tested Band

| Mode | Channel | Position | Separation distance | SAR _{1g} (W/kg) |
|--------------------|------------|-----------|---------------------|--------------------------|
| GPRS 850, 2 slots | Middle/190 | Back Side | 5mm | 1.180 |
| GPRS 1900, 2 slots | Low/512 | Back Side | 5mm | 1.120 |

The Maximum Power

| Mode | | Maximum Conducted Power (dBm) | Maximum Average Power (dBm) |
|----------|----------------------|-------------------------------|-----------------------------|
| GSM 850 | GPRS(GMSK), 2 slots | 30.21 | 24.19 |
| | EGPRS(GMSK), 3 slots | 28.64 | 24.38 |
| GSM 1900 | GPRS(GMSK), 2 slots | 27.50 | 21.48 |
| | EGPRS(GMSK), 4 slots | 25.02 | 22.01 |

1.7. Test Date

The test is performed from December 23, 2010 to December 25, 2010.

2. Operational Conditions during Test

2.1. General Description of Test Procedures

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. Using E5515C the power level is set to “5” in SAR of GSM 850, set to “0” in SAR of GSM 1900. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS. The measurements were performed in combination with two host products (IBM T61 and Lenovo Y-450). IBM T61 laptop has horizontal USB slot, Lenovo Y-450 laptop has vertical USB slot.

2.2. GSM Test Configuration

For the body SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The EUT is commanded to operate at maximum transmitting power. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS. Since the GPRS class is 10 for this EUT, it has at most 2 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. Since the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Table 1: The allowed power reduction in the multi-slot configuration

| Number of timeslots in uplink assignment | Permissible nominal reduction of maximum output power,(dB) |
|---|---|
| 1 | 0 |
| 2 | 0 to 3,0 |
| 3 | 1,8 to 4,8 |
| 4 | 3,0 to 6,0 |

2.3. Position of Module in Portable Devices

The measurements were performed in combination with two host products (IBM T61 and Lenovo Y-450). IBM T61 laptop has horizontal USB slot, Lenovo Y-450 laptop has vertical USB slot.

A test distance of 5mm or less, according to KDB 447498 D02, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 5 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the EUT and the back side of the portable computer towards to the bottom of the flat phantom. The distance from back side of the EUT to the bottom of the flat phantom is 5mm. (ANNEX H Picture 6)
- Test Position 2: The EUT is connected to the portable computer through a 19 cm USB cable. The front side of the EUT towards the bottom of the flat phantom. The distance from front side of the EUT to the bottom of the flat phantom is 5mm. (ANNEX H Picture 7)
- Test Position 3: The EUT is connected to the portable computer with horizontal USB slot. The top side of the EUT towards the bottom of the flat phantom. The distance from front side of the EUT to the bottom of the flat phantom is 5mm. (ANNEX H Picture 8)
- Test Position 4: The EUT is connected to the portable computer through a 19 cm USB cable. The left side of the EUT towards the bottom of the flat phantom. The distance from left side of the EUT to the bottom of the flat phantom is 5mm. (ANNEX H Picture 9)
- Test Position 5: The EUT is connected to the portable computer with vertical USB slot. The right side of the EUT towards the bottom of the flat phantom. The distance from right side of the EUT to the bottom of the flat phantom is 5mm. (ANNEX H Picture 10)

2.4. Picture of Host Product

During the test, IBM T61 and Lenovo Y-450 laptop were used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: IBM T61 Close



Picture 1-b: IBM T61 Open



Picture 1-c: Lenovo Y-450 Close



Picture 1-d: Lenovo Y-450 Open



Picture 1-e: IBM T61 with horizontal USB slot



Picture 1-f: Lenovo Y-450 with Vertical USB slot

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA1012-2033SAR01R1

Page 12 of 102



Picture 1-g: a 19 cm USB cable

Picture 1: Computer as a test assistant

3. SAR Measurements System Configuration

3.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

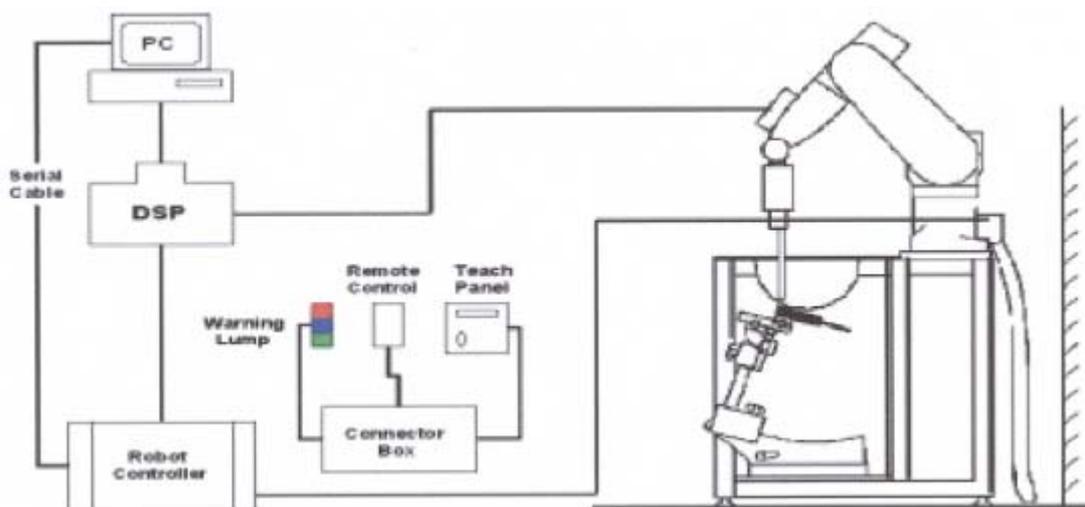


Figure 1. SAR Lab Test Measurement Set-up

3.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1. EX3DV4 Probe Specification

| | |
|---------------|--|
| Construction | Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration | ISO/IEC 17025 calibration service available |
| Frequency | 10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz) |
| Directivity | ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis) |
| Dynamic Range | 10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) |
| Dimensions | Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm |
| Application | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

3.3. Other Test Equipment

3.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

| | |
|-----------------|---------------------------------|
| Shell Thickness | 2±0.1 mm |
| Filling Volume | Approx. 20 liters |
| Dimensions | 810 x 1000 x 500 mm (H x L x W) |
| Available | Special |



Figure 4. Generic Twin Phantom

3.4. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. ± 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)

- **Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 10 mm x 10 mm is set. During the scan the distance of the probe to the phantom remains

unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.5. Data Storage and Evaluation

3.5.1. Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

| | | |
|--------------------|---------------------------|--|
| Probe parameters: | - Sensitivity | Normi, a _{i0} , a _{i1} , a _{i2} |
| | - Conversion factor | ConvF _i |
| | - Diode compression point | Dcp _i |
| Device parameters: | - Frequency | f |
| | - Crest factor | cf |
| Media parameters: | - Conductivity | |
| | - Density | |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.
Test Report

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \dots) / (\dots \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA1012-2033SAR01R1

Page 20 of 102

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3.6. System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the Table 6.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

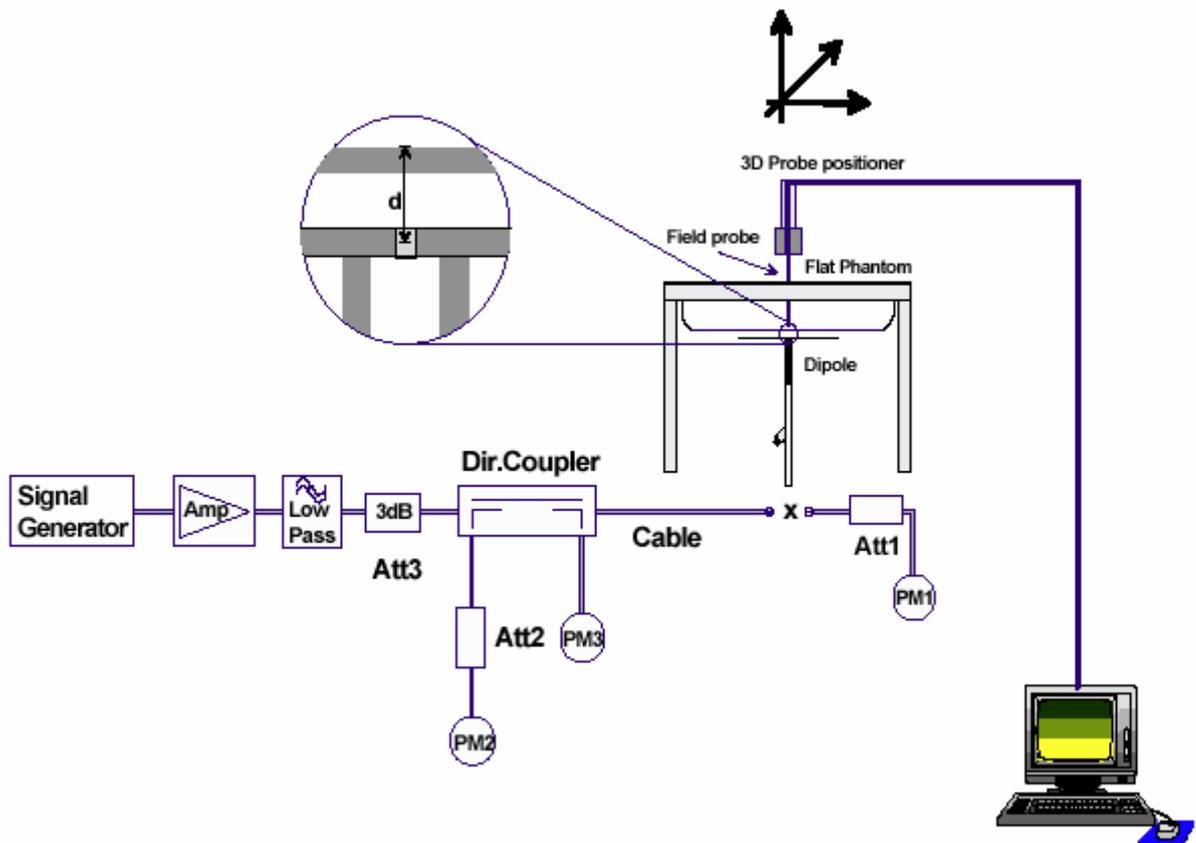


Figure 5. System Check Set-up

TA Technology (Shanghai) Co., Ltd.

Test Report

3.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol monobutyl, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by OET 65.

Table 2: Composition of the Body Tissue Equivalent Matter

| MIXTURE% | FREQUENCY(Body) 835MHz | | |
|---|------------------------|---------------|---------------|
| Water | 52.5 | | |
| Sugar | 45 | | |
| Salt | 1.4 | | |
| Preventol | 0.1 | | |
| Cellulose | 1.0 | | |
| Dielectric Parameters Target Value | f=835MHz | ε=55.2 | σ=0.97 |

| MIXTURE% | FREQUENCY (Body) 1900MHz | | |
|---|--------------------------|---------------|---------------|
| Water | 69.91 | | |
| Glycol monobutyl | 29.96 | | |
| Salt | 0.13 | | |
| Dielectric Parameters Target Value | f=1900MHz | ε=53.3 | σ=1.52 |

4. Laboratory Environment

Table 3: The Ambient Conditions during Test

| | |
|---|---------------------------|
| Temperature | Min. = 20°C, Max. = 25 °C |
| Relative humidity | Min. = 30%, Max. = 70% |
| Ground system resistance | < 0.5 Ω |
| Ambient noise is checked and found very low and in compliance with requirement of standards. | |
| Reflection of surrounding objects is minimized and in compliance with requirement of standards. | |

5. Characteristics of the Test

5.1. Applicable Limit Regulations

IEEE Std C95.1, 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

5.2. Applicable Measurement Standards

SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002: Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio frequency Emissions.

KDB 447498 D02 SAR Procedures for Dongle Xmtr v02: SAR Measurement Procedures for USB Dongle Transmitters.

6. Conducted Output Power Measurement

6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

6.2. Conducted Power Results

Table 4: Conducted Power Measurement Results

| GSM 850 | | | Conducted Power(dBm) | | | | Average power(dBm) | | |
|--------------|----------|--------|----------------------|-------------|-------------|---------|--------------------|-------------|-------------|
| | | | Channel 128 | Channel 190 | Channel 251 | | Channel 128 | Channel 190 | Channel 251 |
| GPRS (GMSK) | 1TXslot | Before | 32.80 | 32.76 | 33.00 | -9.03dB | 23.77 | 23.73 | 23.97 |
| | | After | 32.78 | 32.75 | 33.01 | -9.03dB | 23.75 | 23.72 | 23.98 |
| | 2TXslots | Before | 30.01 | 30.15 | 30.20 | -6.02dB | 23.99 | 24.13 | 24.18 |
| | | After | 30.02 | 30.13 | 30.21 | -6.02dB | 24.00 | 24.11 | 24.19 |
| EGPRS (GMSK) | 1TXslot | Before | 32.85 | 32.75 | 33.01 | -9.03dB | 23.82 | 23.72 | 23.98 |
| | | After | 32.84 | 32.74 | 33.02 | -9.03dB | 23.81 | 23.71 | 23.99 |
| | 2TXslots | Before | 30.01 | 30.22 | 30.21 | -6.02dB | 23.99 | 24.20 | 24.19 |
| | | After | 30.00 | 30.21 | 30.20 | -6.02dB | 23.98 | 24.19 | 24.18 |
| | 3TXslots | Before | 28.52 | 28.54 | 28.64 | -4.26dB | 24.26 | 24.28 | 24.38 |
| | | After | 28.54 | 28.55 | 28.63 | -4.26dB | 24.28 | 24.29 | 24.37 |
| | 4TXslots | Before | 27.10 | 27.25 | 27.28 | -3.01dB | 24.09 | 24.24 | 24.27 |
| | | After | 27.09 | 27.24 | 27.25 | -3.01dB | 24.08 | 24.23 | 24.24 |
| GSM 1900 | | | Conducted Power(dBm) | | | | Average power(dBm) | | |
| | | | Channel 512 | Channel 661 | Channel 810 | | Channel 512 | Channel 661 | Channel 810 |
| GPRS (GMSK) | 1TXslot | Before | 29.33 | 29.42 | 29.75 | -9.03dB | 20.30 | 20.39 | 20.72 |
| | | After | 29.32 | 29.41 | 29.74 | -9.03dB | 20.29 | 20.38 | 20.71 |
| | 2TXslots | Before | 27.50 | 27.41 | 27.17 | -6.02dB | 21.48 | 21.39 | 21.15 |
| | | After | 27.49 | 27.40 | 27.15 | -6.02dB | 21.47 | 21.38 | 21.13 |
| EGPRS (GMSK) | 1TXslot | Before | 29.37 | 29.32 | 29.82 | -9.03dB | 20.34 | 20.29 | 20.79 |
| | | After | 29.35 | 29.31 | 29.80 | -9.03dB | 20.32 | 20.28 | 20.77 |
| | 2TXslots | Before | 27.44 | 27.22 | 27.30 | -6.02dB | 21.42 | 21.20 | 21.28 |
| | | After | 27.43 | 27.21 | 27.28 | -6.02dB | 21.41 | 21.19 | 21.26 |
| | 3TXslots | Before | 25.88 | 26.02 | 26.10 | -4.26dB | 21.62 | 21.76 | 21.84 |
| | | After | 25.85 | 26.01 | 26.10 | -4.26dB | 21.59 | 21.75 | 21.84 |
| | 4TXslots | Before | 24.67 | 24.92 | 25.01 | -3.01dB | 21.66 | 21.91 | 22.00 |
| | | Before | 24.66 | 24.90 | 25.02 | -3.01dB | 21.65 | 21.89 | 22.01 |

TA Technology (Shanghai) Co., Ltd.

Test Report

Note:

1) Division Factors

To average the power, the division factor is as follows:

1 TX- slot = 1 transmit time slot out of 8 time slots

=> conducted power divided by (8/1) => -9.03 dB

2 TX- slot = 2 transmit time slots out of 8 time slots

=> conducted power divided by (8/2) => -6.02 dB

3TX- slot = 3 transmit time slots out of 8 time slots

=> conducted power divided by (8/3) => -4.26 dB

4 TX- slot = 4 transmit time slots out of 8 time slots

=> conducted power divided by (8/4) => -3.01 dB

7. Test Results

7.1. Dielectric Performance

Table 5: Dielectric Performance of Body Tissue Simulating Liquid

| Frequency | Description | Dielectric Parameters | | Temp °C |
|-------------------|---------------------------------|------------------------|---------------------|------------|
| | | ϵ_r | σ (s/m) | |
| 835MHz (body) | Target value ±5% window | 55.20 52.44 — 57.96 | 0.97 0.92 — 1.02 | / |
| | Measurement value 2010-12-25 | 56.24 | 0.96 | 21.5 |
| 1900MHz (body) | Target value ±5% window | 53.30 50.64 — 55.97 | 1.52 1.44 — 1.60 | / |
| | Measurement value 2010-12-23 | 52.98 | 1.52 | 21.7 |

7.2. System Check

Table 6: System Check for Body Tissue Simulating Liquid

| Frequency | Description | SAR(W/kg) | | Dielectric Parameters | | Temp °C |
|-----------|-----------------------------------|---------------------|----------------------|-----------------------|----------------|------------|
| | | 10g | 1g | ϵ_r | σ (s/m) | |
| 835MHz | Recommended result ±10% window | 1.63 1.47 — 1.79 | 2.49 2.24 — 2.74 | 54.6 | 0.98 | / |
| | Measurement value 2010-12-25 | 1.68 | 2.56 | 56.24 | 0.96 | 21.5 |
| 1900 MHz | Recommended result ±10% window | 5.52 4.97 — 6.07 | 10.3 9.27 — 11.33 | 53.5 | 1.54 | / |
| | Measurement value 2010-12-23 | 5.50 | 10.28 | 52.98 | 1.52 | 21.7 |

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

TA Technology (Shanghai) Co., Ltd.

Test Report

7.3. Summary of Measurement Results

7.3.1. GSM 850 (GPRS/EGPRS)

Table 7: SAR Values [GSM 850 (GPRS/EGPRS)]

| Limit of SAR | | | 10 g Average | 1g Average | Power Drift | Graph Results |
|--|-------------|------------|-----------------|-----------------|------------------|---------------|
| Test Case Of Body | | | 2.0 W/kg | 1.6 W/kg | ± 0.21 dB | |
| Test Position | Timeslots | Channel | 10 g Average | 1 g Average | Power Drift (dB) | |
| IBM T61 | | | | | | |
| Test Position 1 | 1 timeslot | High/251 | 0.651 | 0.995 | 0.047 | Figure 8 |
| | | Middle/190 | 0.651 | 0.993 | 0.054 | Figure 9 |
| | | Low/128 | 0.620 | 0.939 | 0.094 | Figure 10 |
| | 2 timeslots | High/251 | 0.688 | 1.100 | -0.087 | Figure 11 |
| | | Middle/190 | 0.776 | 1.180 | 0.011 | Figure 12 |
| | | Low/128 | 0.677 | 1.030 | -0.004 | Figure 13 |
| Test Position 2 | 2 timeslots | High/251 | 0.470 | 0.757 | -0.146 | Figure 14 |
| | | Middle/190 | 0.524 | 0.842 | -0.010 | Figure 15 |
| | | Low/128 | 0.572 | 0.918 | 0.073 | Figure 16 |
| Test Position 3 | 2 timeslots | Middle/190 | 0.028 | 0.056 | -0.027 | Figure 17 |
| Lenovo Y-450 | | | | | | |
| Test Position 4 | 2 timeslots | Middle/190 | 0.365 | 0.582 | -0.049 | Figure 18 |
| Test Position 5 | 2 timeslots | Middle/190 | 0.406 | 0.614 | -0.080 | Figure 19 |
| Worst Case Position of GPRS with EGPRS (GMSK) | | | | | | |
| Test Position 1 | 1 timeslot | Middle/190 | 0.594 | 0.906 | 0.021 | Figure 20 |
| | 2 timeslots | Middle/190 | 0.743(max.cube) | 1.140(max.cube) | 0.069 | Figure 21 |
| | 3 timeslots | Middle/190 | 0.678 | 1.050 | 0.107 | Figure 22 |
| | 4 timeslots | Middle/190 | 0.695 | 1.050 | -0.035 | Figure 23 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above.
5. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

TA Technology (Shanghai) Co., Ltd.
Test Report

7.3.2. GSM 1900 (GPRS/EGPRS)

Table 8: SAR Values [GSM 1900 (GPRS/EGPRS)]

| Limit of SAR | | | 10 g Average | 1g Average | Power Drift | Graph Results |
|--|-------------|------------|---------------------------|-------------|------------------|---------------|
| | | | 2.0 W/kg | 1.6 W/kg | ± 0.21 dB | |
| Test Case Of Body | | | Measurement Result (W/kg) | | Power Drift (dB) | |
| Test Position | Timeslots | Channel | 10 g Average | 1 g Average | | |
| IBM T61 | | | | | | |
| Test Position 1 | 1 timeslot | Middle/661 | 0.409 | 0.718 | -0.090 | Figure 24 |
| | 2 timeslots | High/810 | 0.498 | 0.878 | 0.163 | Figure 25 |
| | | Middle/661 | 0.504 | 0.900 | 0.041 | Figure 26 |
| | | Low/512 | 0.638 | 1.120 | 0.050 | Figure 27 |
| Test Position 2 | 2 timeslots | Middle/661 | 0.447 | 0.796 | -0.038 | Figure 28 |
| Test Position 3 | 2 timeslots | Middle/661 | 0.042 | 0.068 | -0.086 | Figure 29 |
| Lenovo Y-450 | | | | | | |
| Test Position 4 | 2 timeslots | Middle/661 | 0.309 | 0.561 | -0.183 | Figure 30 |
| Test Position 5 | 2 timeslots | Middle/661 | 0.424 | 0.781 | 0.017 | Figure 31 |
| Worst Case Position of GPRS with EGPRS (GMSK) | | | | | | |
| Test Position 1 | 1 timeslot | Low/512 | 0.495 | 0.868 | 0.093 | Figure 32 |
| | 2 timeslots | Low/512 | 0.567 | 1.060 | 0.158 | Figure 33 |
| | 3 timeslots | Low/512 | 0.603 | 1.090 | -0.194 | Figure 34 |
| | 4 timeslots | Low/512 | 0.606 | 1.060 | -0.047 | Figure 35 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA1012-2033SAR01R1

Page 29 of 102

8. Measurement Uncertainty

| No. | source | Type | Uncertainty Value (%) | Probability Distribution | k | c _i | Standard uncertainty u _i (%) | Degree of freedom V _{eff} or v _i |
|---------------------|---|------|-----------------------|--------------------------|------------|----------------|---|--|
| 1 | System repetivity | A | 0.5 | N | 1 | 1 | 0.5 | 9 |
| Measurement system | | | | | | | | |
| 2 | probe calibration | B | 5.9 | N | 1 | 1 | 5.9 | ∞ |
| 3 | axial isotropy of the probe | B | 4.7 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | 1.9 | ∞ |
| 4 | Hemispherical isotropy of the probe | B | 9.4 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | 3.9 | ∞ |
| 6 | boundary effect | B | 1.9 | R | $\sqrt{3}$ | 1 | 1.1 | ∞ |
| 7 | probe linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| 8 | System detection limits | B | 1.0 | R | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| 9 | readout Electronics | B | 1.0 | N | 1 | 1 | 1.0 | ∞ |
| 10 | response time | B | 0 | R | $\sqrt{3}$ | 1 | 0 | ∞ |
| 11 | integration time | B | 4.32 | R | $\sqrt{3}$ | 1 | 2.5 | ∞ |
| 12 | noise | B | 0 | R | $\sqrt{3}$ | 1 | 0 | ∞ |
| 13 | RF Ambient Conditions | B | 3 | R | $\sqrt{3}$ | 1 | 1.73 | ∞ |
| 14 | Probe Positioner Mechanical Tolerance | B | 0.4 | R | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| 15 | Probe Positioning with respect to Phantom Shell | B | 2.9 | R | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| 16 | Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | B | 3.9 | R | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Test sample Related | | | | | | | | |
| 17 | -Test Sample Positioning | A | 2.9 | N | 1 | 1 | 2.9 | 5 |
| 18 | -Device Holder Uncertainty | A | 4.1 | N | 1 | 1 | 4.1 | 5 |
| 19 | -Output Power Variation - SAR drift measurement | B | 5.0 | R | $\sqrt{3}$ | 1 | 2.9 | ∞ |
| Physical parameter | | | | | | | | |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA1012-2033SAR01R1

Page 30 of 102

| | | | | | | | | |
|--|--|--|-----|---|------------|------|-----|----------|
| 20 | -phantom | B | 4.0 | R | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| 21 | -liquid conductivity (deviation from target) | B | 5.0 | R | $\sqrt{3}$ | 0.64 | 1.8 | ∞ |
| 22 | -liquid conductivity (measurement uncertainty) | B | 5.0 | N | 1 | 0.64 | 3.2 | ∞ |
| 23 | -liquid permittivity (deviation from target) | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| 24 | -liquid permittivity (measurement uncertainty) | B | 5.0 | N | 1 | 0.6 | 3.0 | ∞ |
| Combined standard uncertainty | | $u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ | | | | 12.0 | | |
| Expanded uncertainty (confidence interval of 95 %) | | $u_e = 2u_c$ | | N | k=2 | 24.0 | | |

9. Main Test Instruments

Table 9: List of Main Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|------------------------|----------------|---------------|--------------------------|--------------|
| 01 | Network analyzer | Agilent 8753E | US37390326 | September 13, 2010 | One year |
| 02 | Dielectric Probe Kit | Agilent 85070E | US44020115 | No Calibration Requested | |
| 03 | Power meter | Agilent E4417A | GB41291714 | March 13, 2010 | One year |
| 04 | Power sensor | Agilent N8481H | MY50350004 | September 26, 2010 | One year |
| 05 | Signal Generator | HP 8341B | 2730A00804 | September 13, 2010 | One year |
| 06 | Amplifier | IXA-020 | 0401 | No Calibration Requested | |
| 07 | Validation Kit 835MHz | D835V2 | 4d092 | January 14, 2010 | One year |
| 08 | Validation Kit 1900MHz | D1900V2 | 5d018 | June 15, 2010 | One year |
| 09 | BTS | E5515C | MY48360988 | December 3, 2010 | One year |
| 10 | E-field Probe | EX3DV4 | 3677 | November 24, 2010 | One year |
| 11 | DAE | DAE4 | 871 | November 18, 2010 | One year |

END OF REPORT BODY


ANNEX A: Test Layout



Picture 2: Specific Absorption Rate Test Layout



Picture 3: Liquid depth in the Flat Phantom (835 MHz, 15.4cm depth)

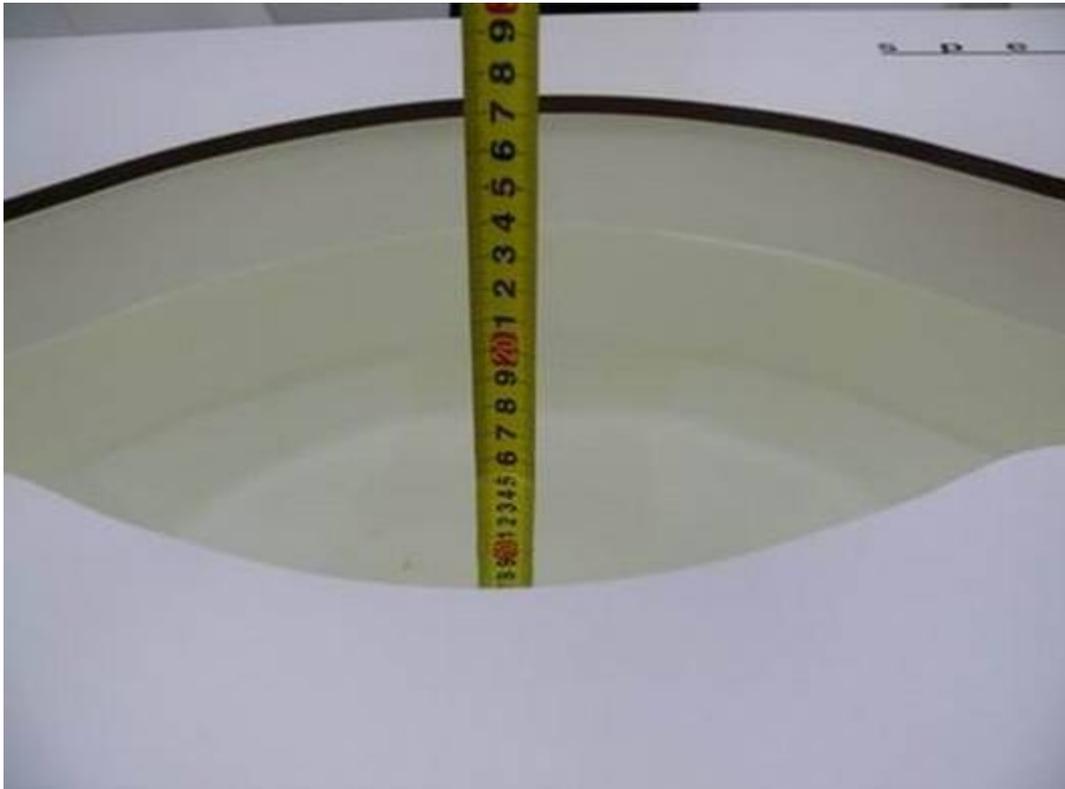

Picture 4: Liquid depth in the Flat Phantom (1900 MHz, 15.2cm depth)

ANNEX B: System Check Results

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d092

Date/Time: 12/25/2010 9:20:20 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 56.24$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.77 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.77 mW/g

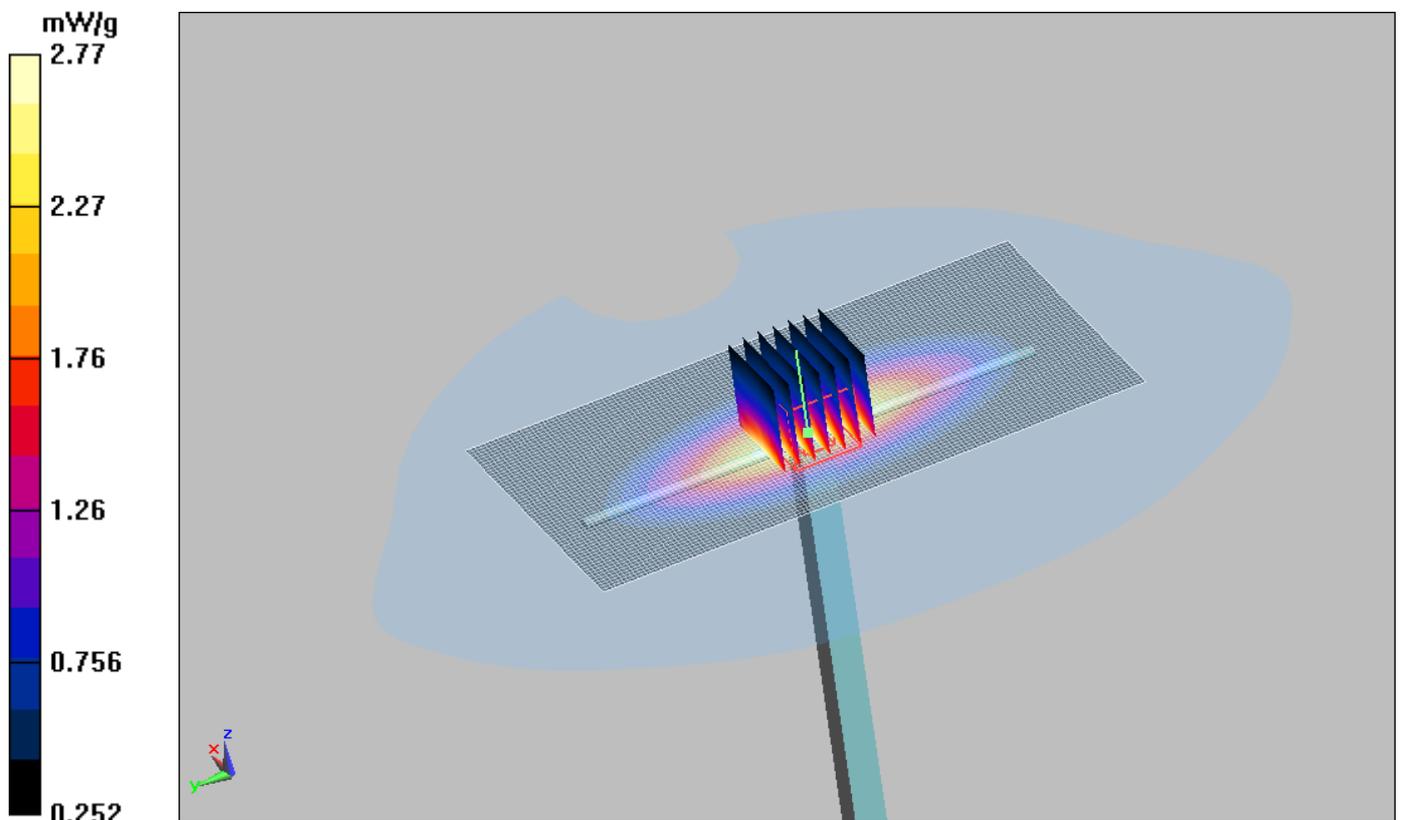


Figure 6 System Performance Check 835MHz 250mW

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Date/Time: 12/23/2010 7:01:19 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.7 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 75.9 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 10.28 mW/g; SAR(10 g) = 5.50 mW/g

Maximum value of SAR (measured) = 11 mW/g

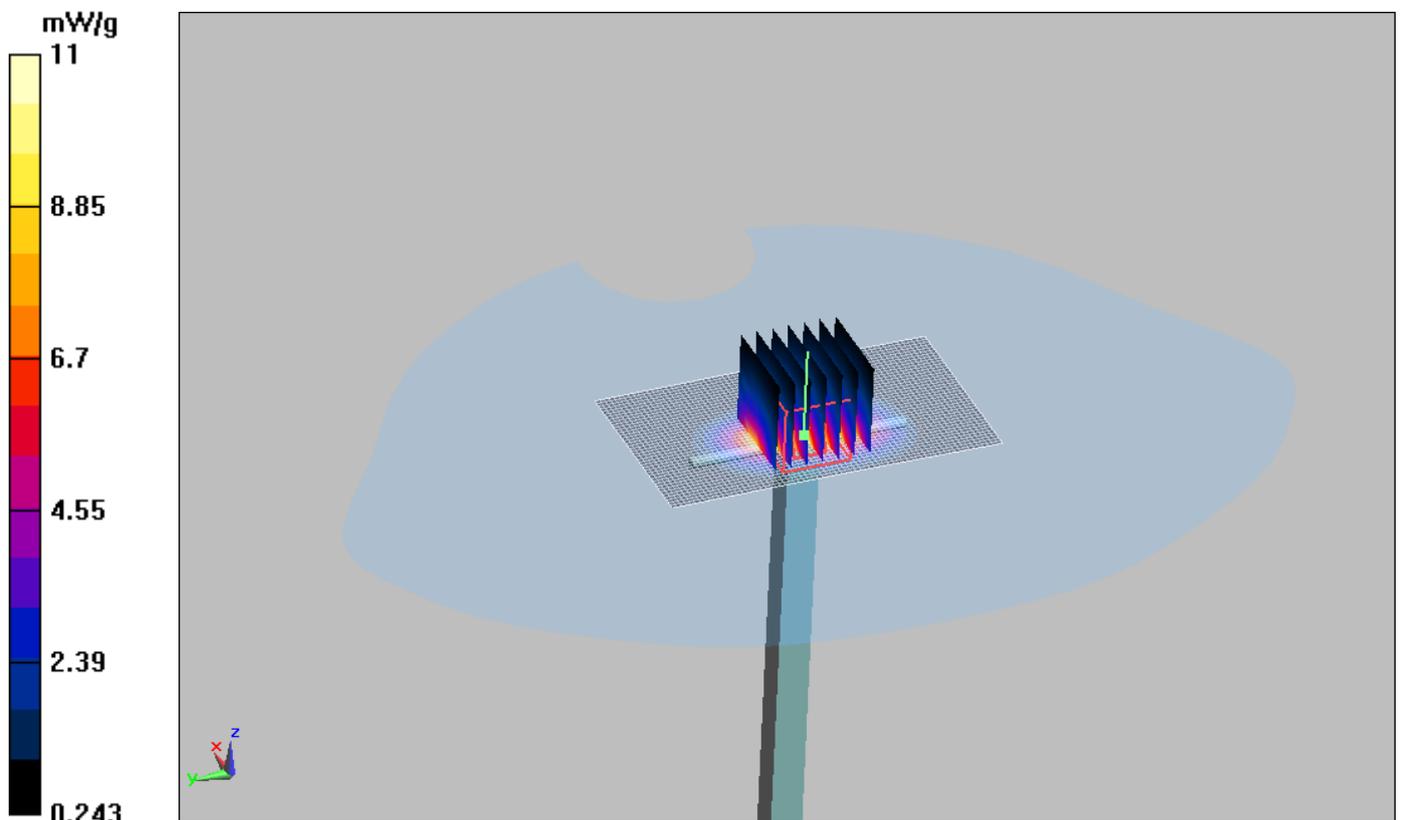


Figure 7 System Performance Check 1900MHz 250mW

ANNEX C: Graph Results

GSM 850 GPRS (1Up) with IBM T61 Test Position 1 High

Date/Time: 12/25/2010 1:07:14 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 High/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.1 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.995 mW/g; SAR(10 g) = 0.651 mW/g

Maximum value of SAR (measured) = 1.1 mW/g

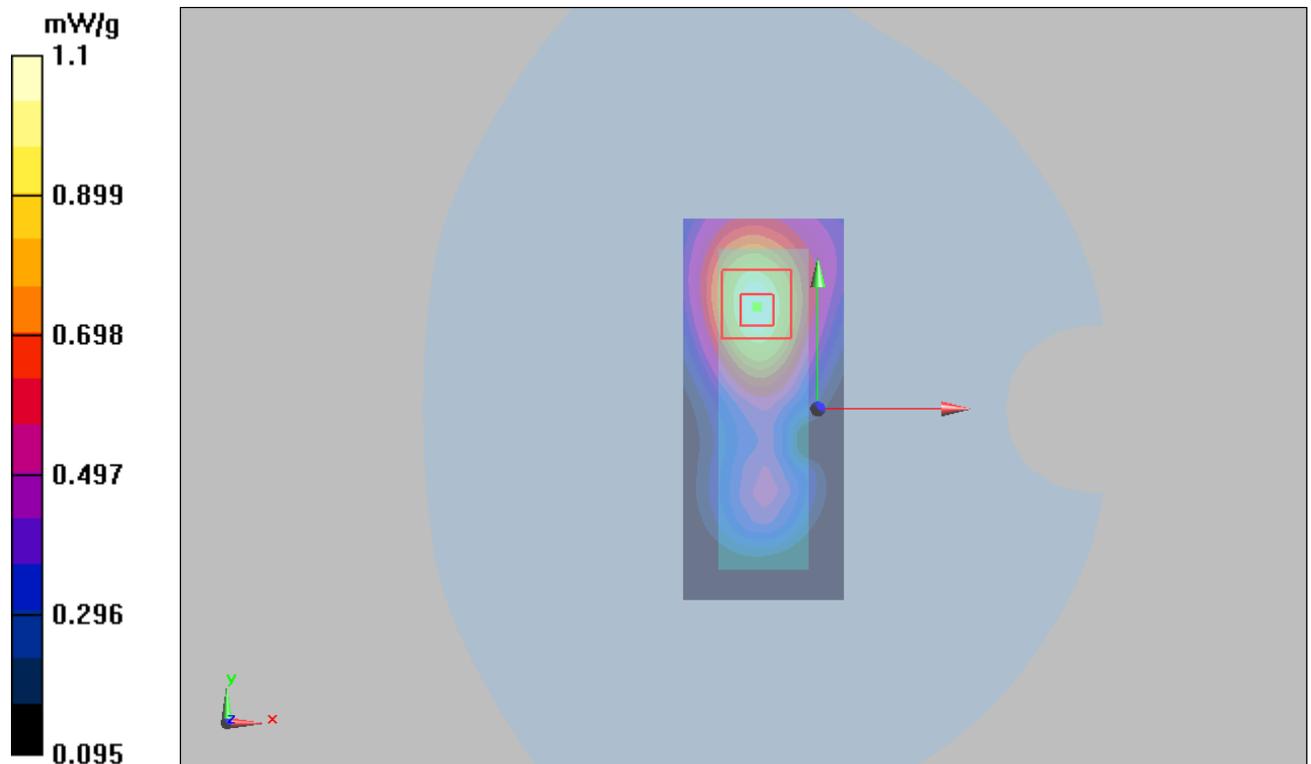


Figure 8 GSM 850 GPRS (1Up) with IBM T61 Test Position 1 Channel 251

GSM 850 GPRS (1Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/25/2010 12:42:43 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.06 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.7 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.993 mW/g; SAR(10 g) = 0.651 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

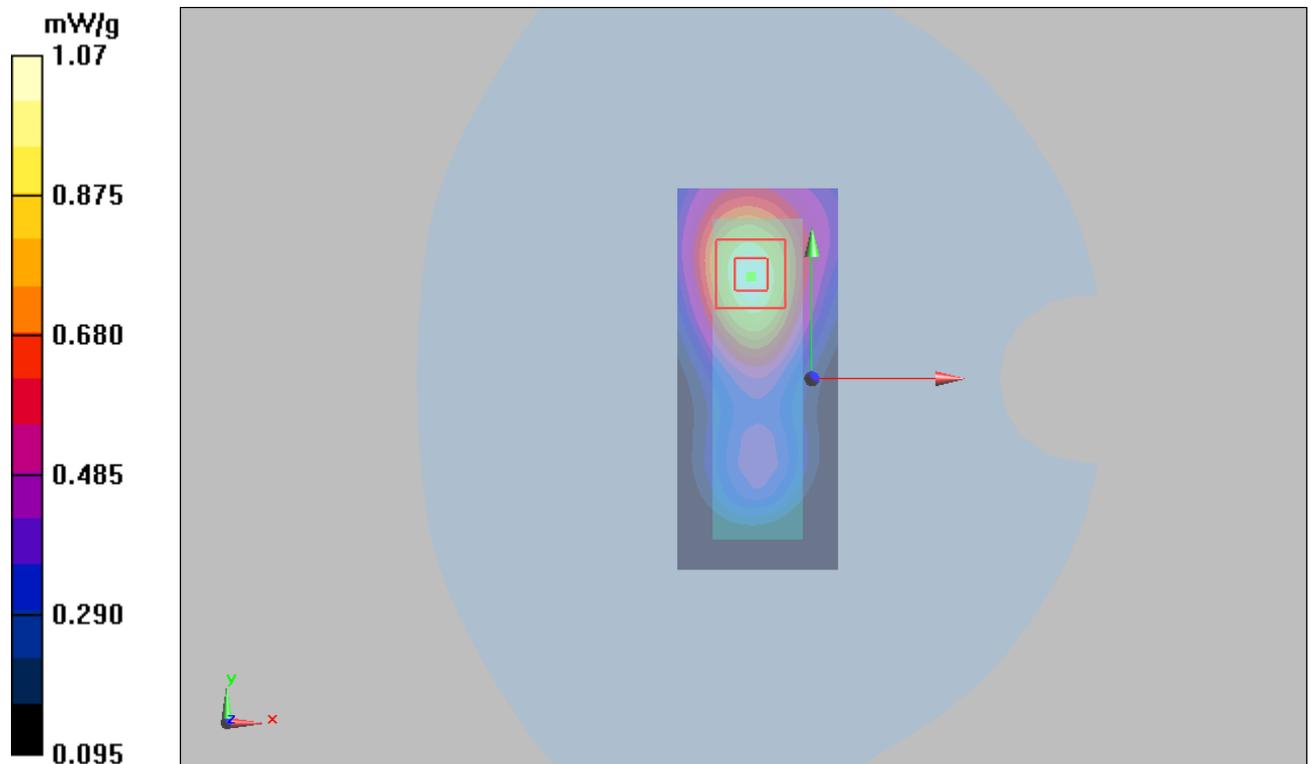


Figure 9 GSM 850 GPRS (1Up) with IBM T61 Test Position 1 Channel 190

GSM 850 GPRS (1Up) with IBM T61 Test Position 1 Low

Date/Time: 12/25/2010 5:58:08 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.963 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.620 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

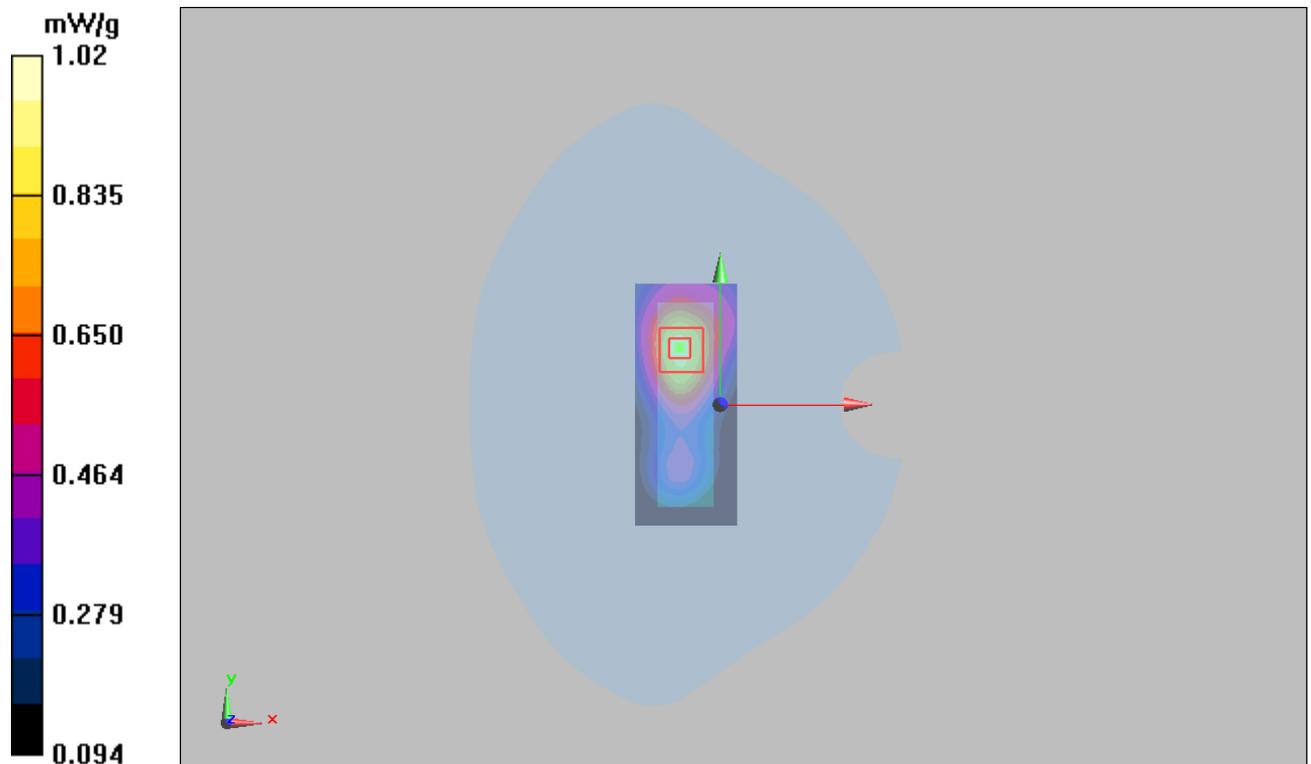


Figure 10 GSM 850 GPRS (1Up) with IBM T61 Test Position 1 Channel 128

GSM 850 GPRS (2Up) with IBM T61 Test Position 1 High

Date/Time: 12/25/2010 3:56:57 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 High/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.24 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.688 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

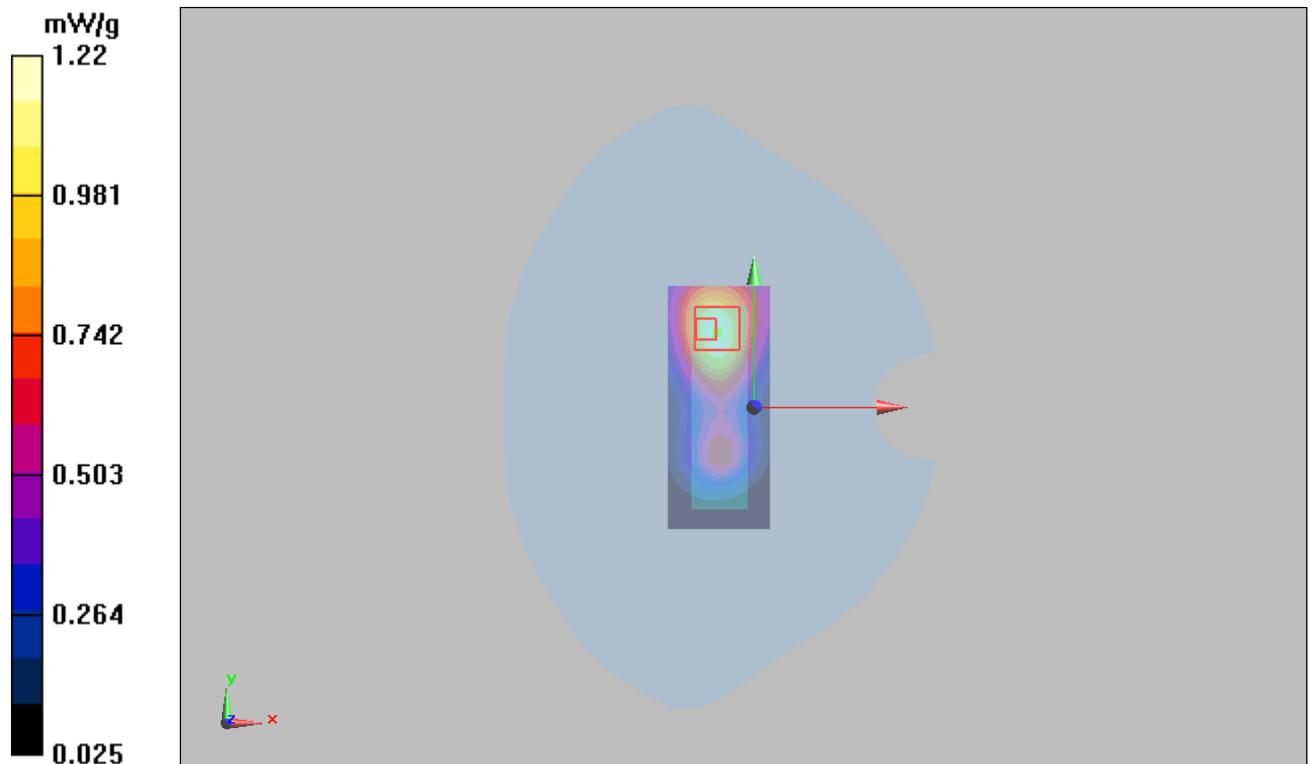


Figure 11 GSM 850 GPRS (2Up) with IBM T61 Test Position 1 Channel 251

GSM 850 GPRS (2Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/25/2010 3:30:40 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.27 mW/g


Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.776 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

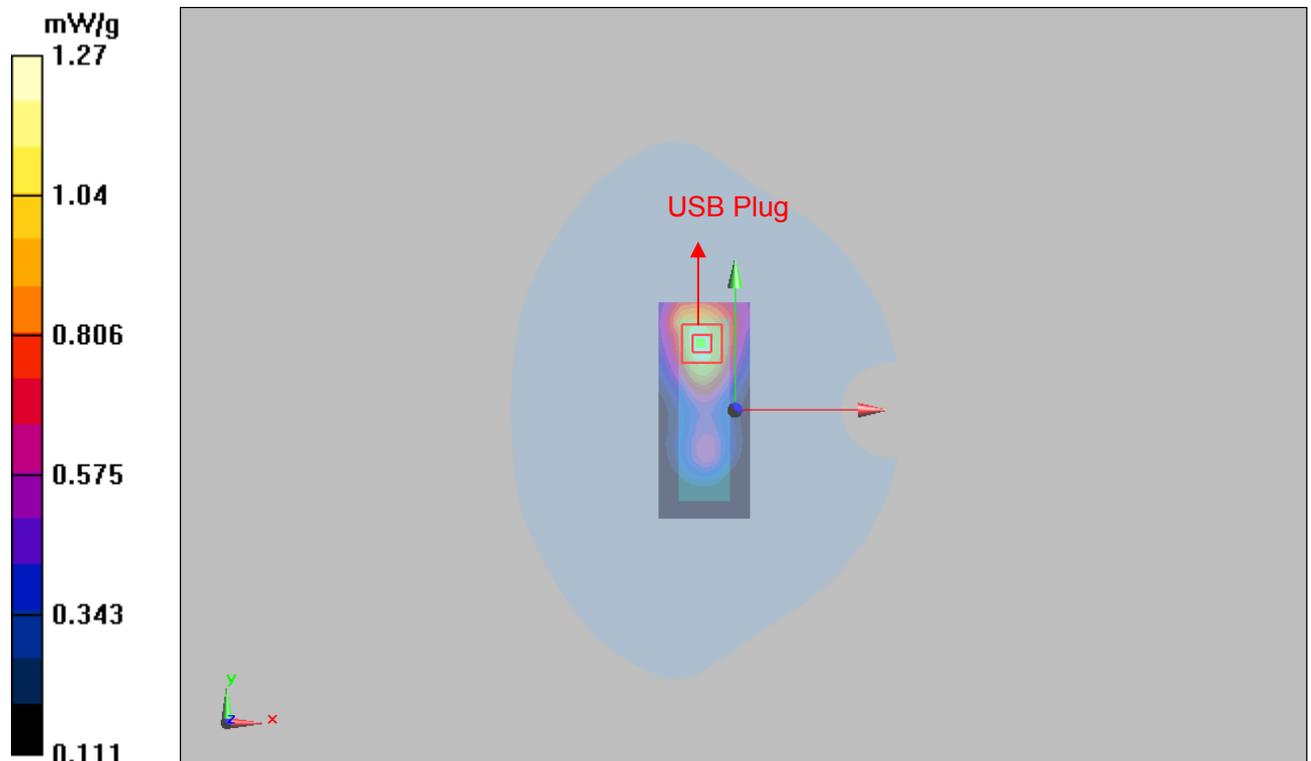

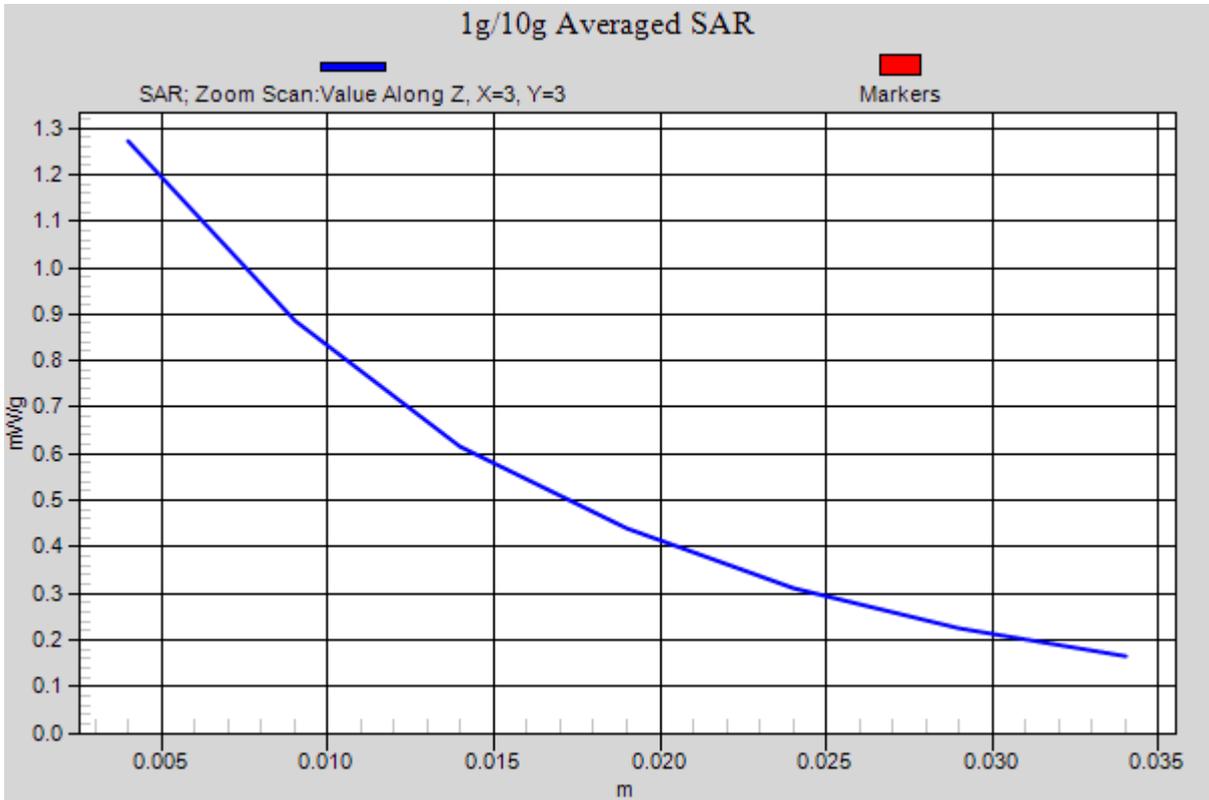


Figure 12 GSM 850 GPRS (2Up) with IBM T61 Test Position 1 Channel 190

GSM 850 GPRS (2Up) with IBM T61 Test Position 1 Low

Date/Time: 12/25/2010 7:28:37 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.29 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.3 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.677 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

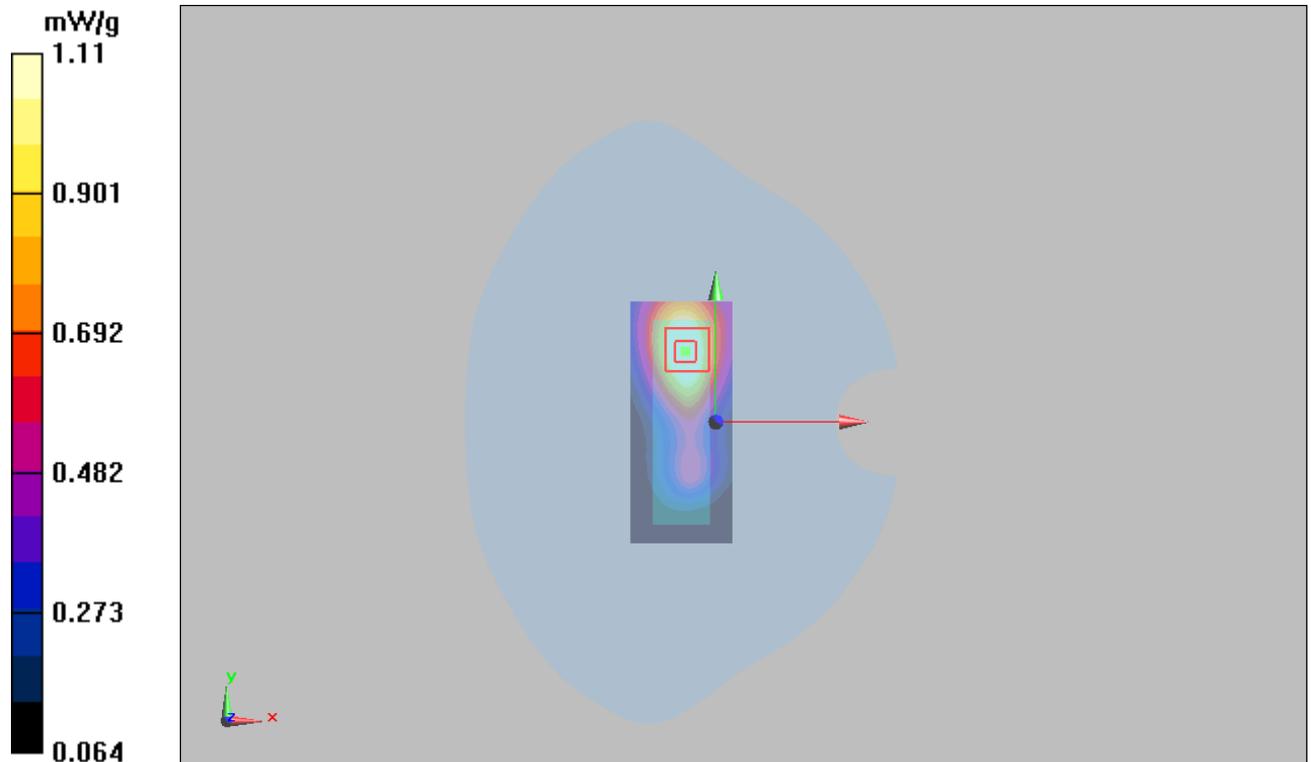


Figure 13 GSM 850 GPRS (2Up) with IBM T61 Test Position 1 Channel 128

GSM 850 GPRS (2Up) with IBM T61 Test Position 2 High

Date/Time: 12/25/2010 11:16:30 AM

Communication System: GSM850 +GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 2 High/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.841 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.146 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.470 mW/g

Maximum value of SAR (measured) = 0.824 mW/g

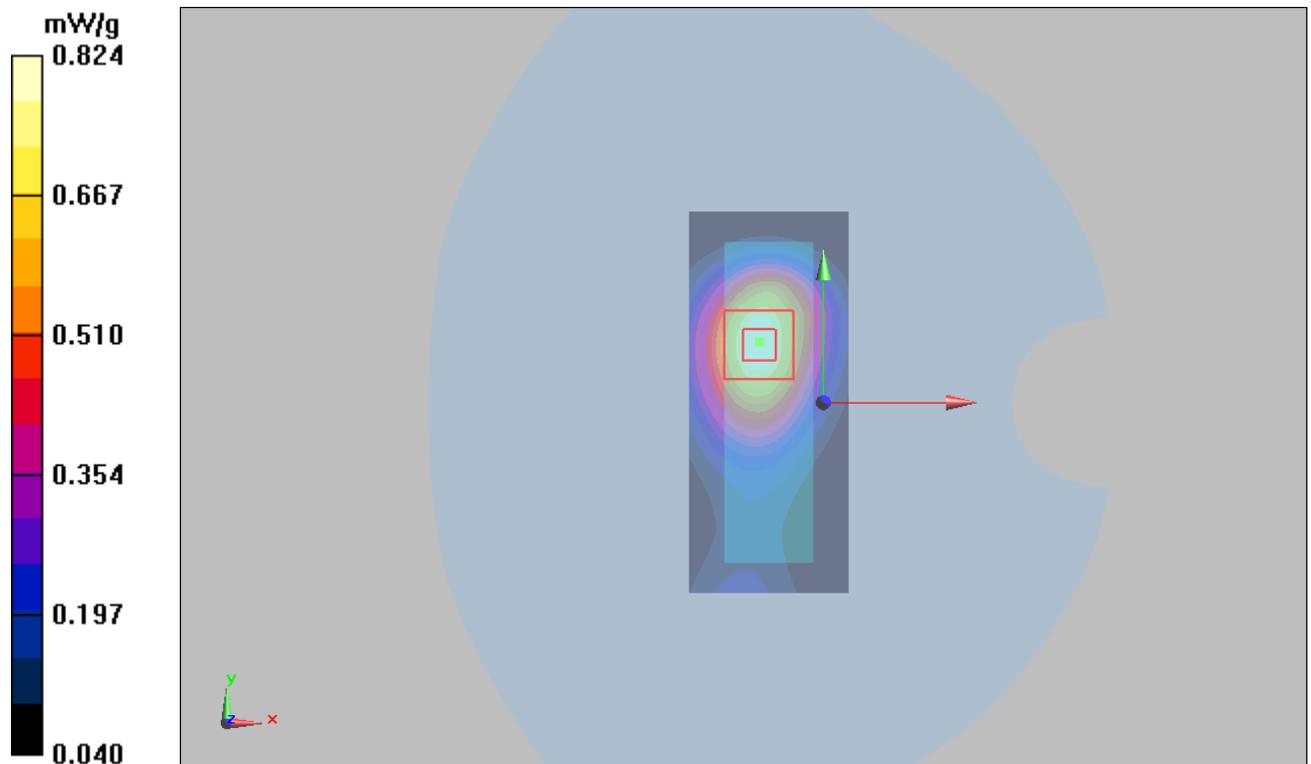


Figure 14 GSM 850 GPRS (2Up) with IBM T61 Test Position 2 Channel 251

GSM 850 GPRS (2Up) with IBM T61 Test Position 2 Middle

Date/Time: 12/25/2010 10:51:25 AM

Communication System: GSM850 +GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 2 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.03 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.842 mW/g; SAR(10 g) = 0.524 mW/g

Maximum value of SAR (measured) = 0.917 mW/g

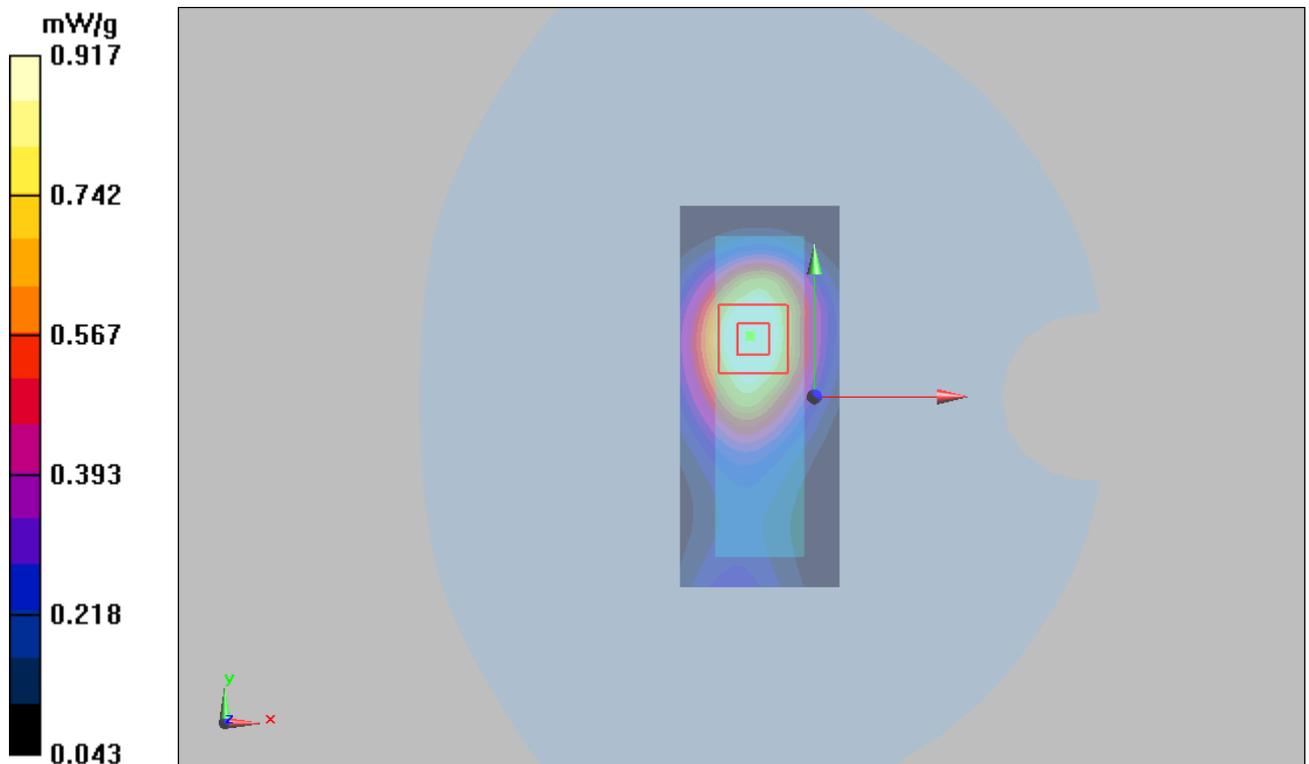


Figure 15 GSM 850 GPRS (2Up) with IBM T61 Test Position 2 Channel 190

GSM 850 GPRS (2Up) with IBM T61 Test Position 2 Low

Date/Time: 12/25/2010 11:41:02 AM

Communication System: GSM850 +GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 2 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.995 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.6 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.572 mW/g

Maximum value of SAR (measured) = 0.995 mW/g

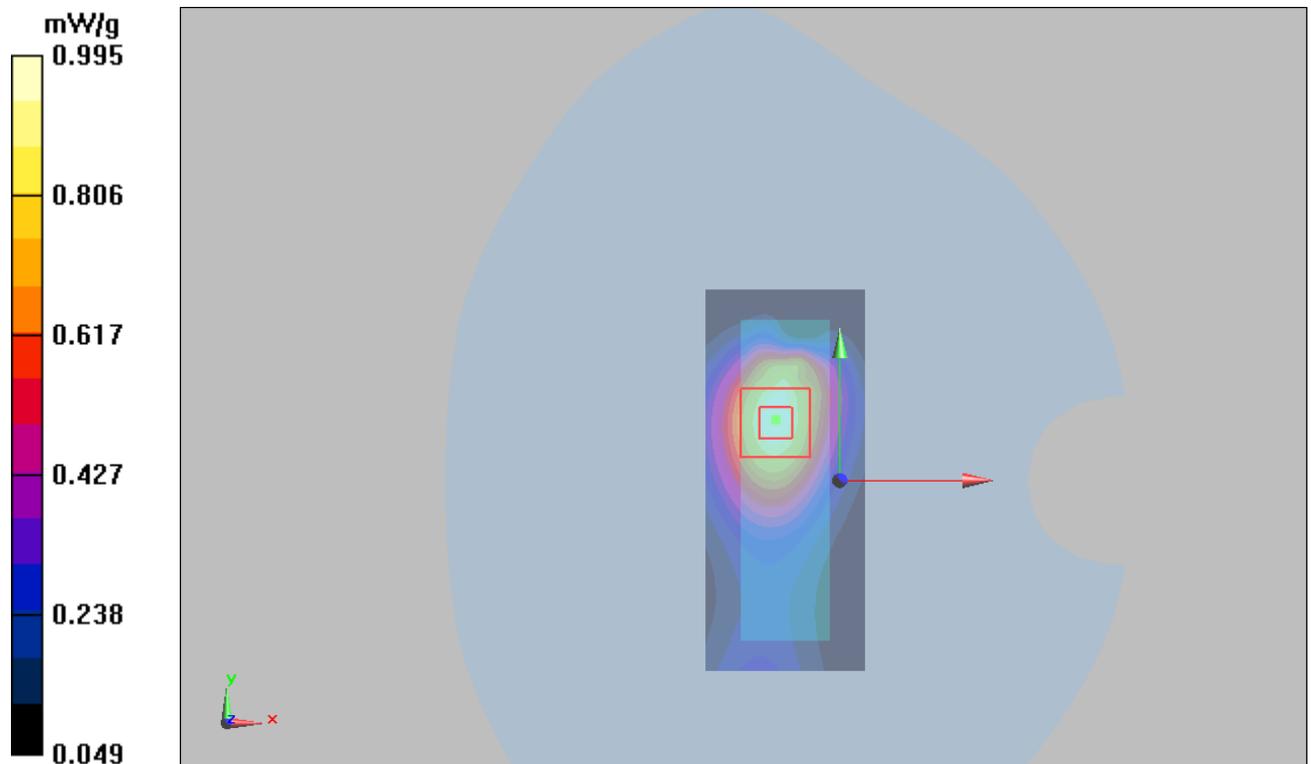


Figure 16 GSM 850 GPRS (2Up) with IBM T61 Test Position 2 Channel 128

GSM 850 GPRS (2Up) with IBM T61 Test Position 3 Middle

Date/Time: 12/25/2010 12:16:49 PM

Communication System: GSM850 +GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 3 Middle/Area Scan (41x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.064 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.36 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.062 mW/g

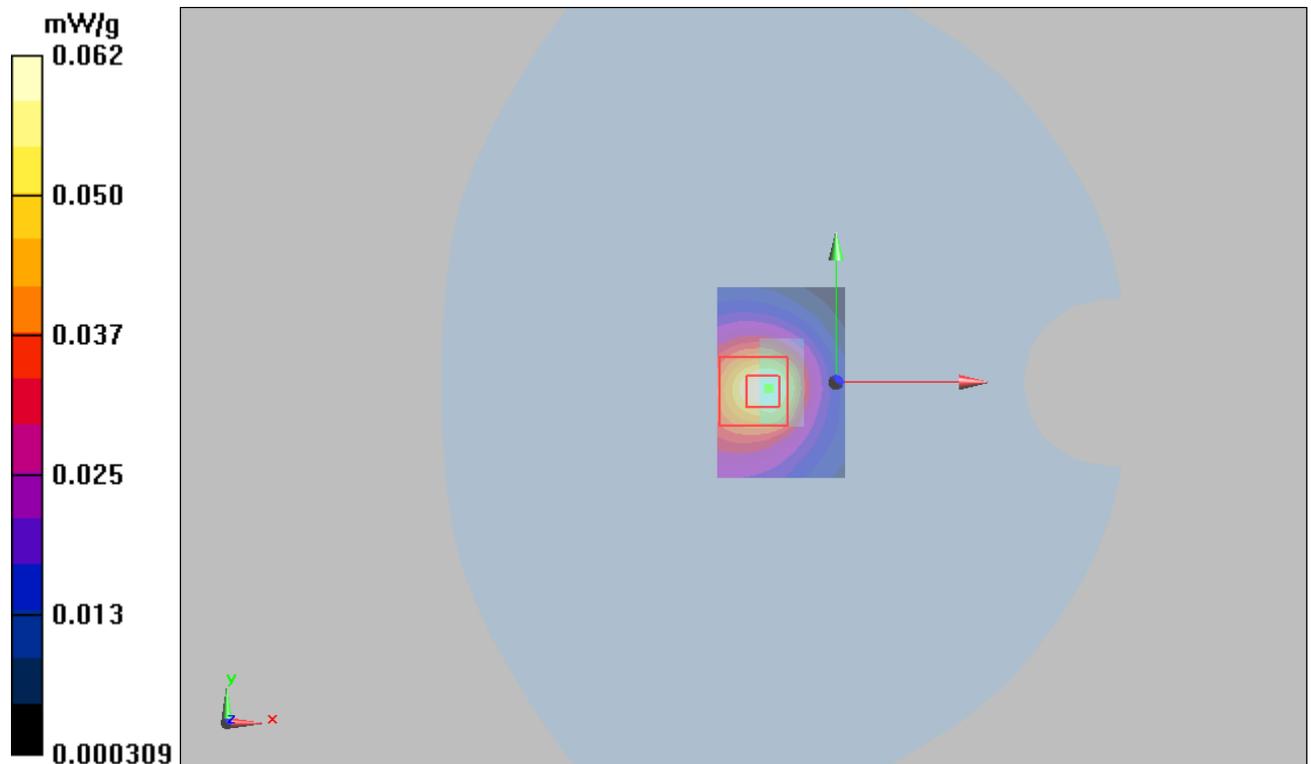


Figure 17 GSM 850 GPRS (2Up) with IBM T61 Test Position 3 Channel 190

GSM 850 GPRS (2Up) with Lenovo Y-450 Test Position 4 Middle

Date/Time: 12/25/2010 10:10:04 PM

Communication System: GSM850 +GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 4 Middle/Area Scan (41x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.675 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.966 W/kg

SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.365 mW/g

Maximum value of SAR (measured) = 0.621 mW/g

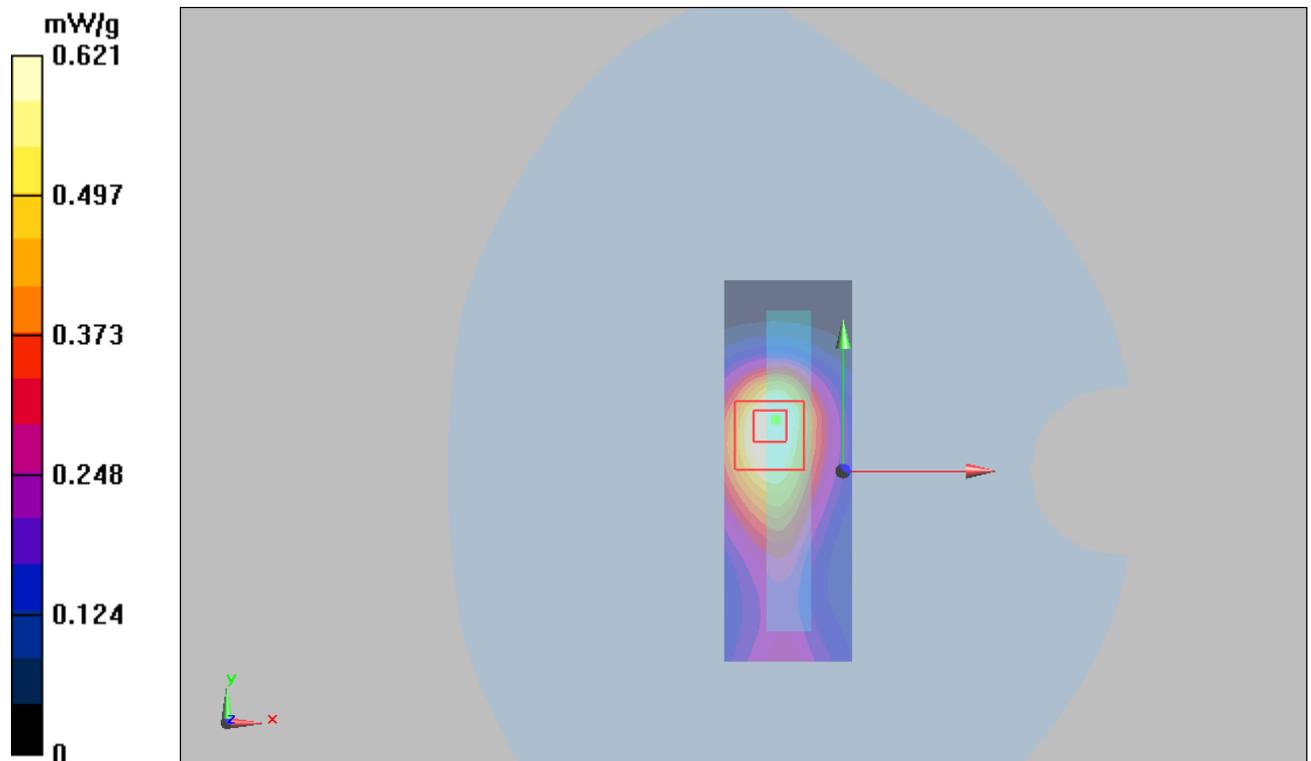


Figure 18 GSM 850 GPRS (2Up) with Lenovo Y-450 Test Position 4 Channel 190

GSM 850 GPRS (2Up) with Lenovo Y-450 Test Position 5 Middle

Date/Time: 12/25/2010 9:40:54 PM

Communication System: GSM850 +GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 5 Middle/Area Scan (41x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.682 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.406 mW/g

Maximum value of SAR (measured) = 0.659 mW/g

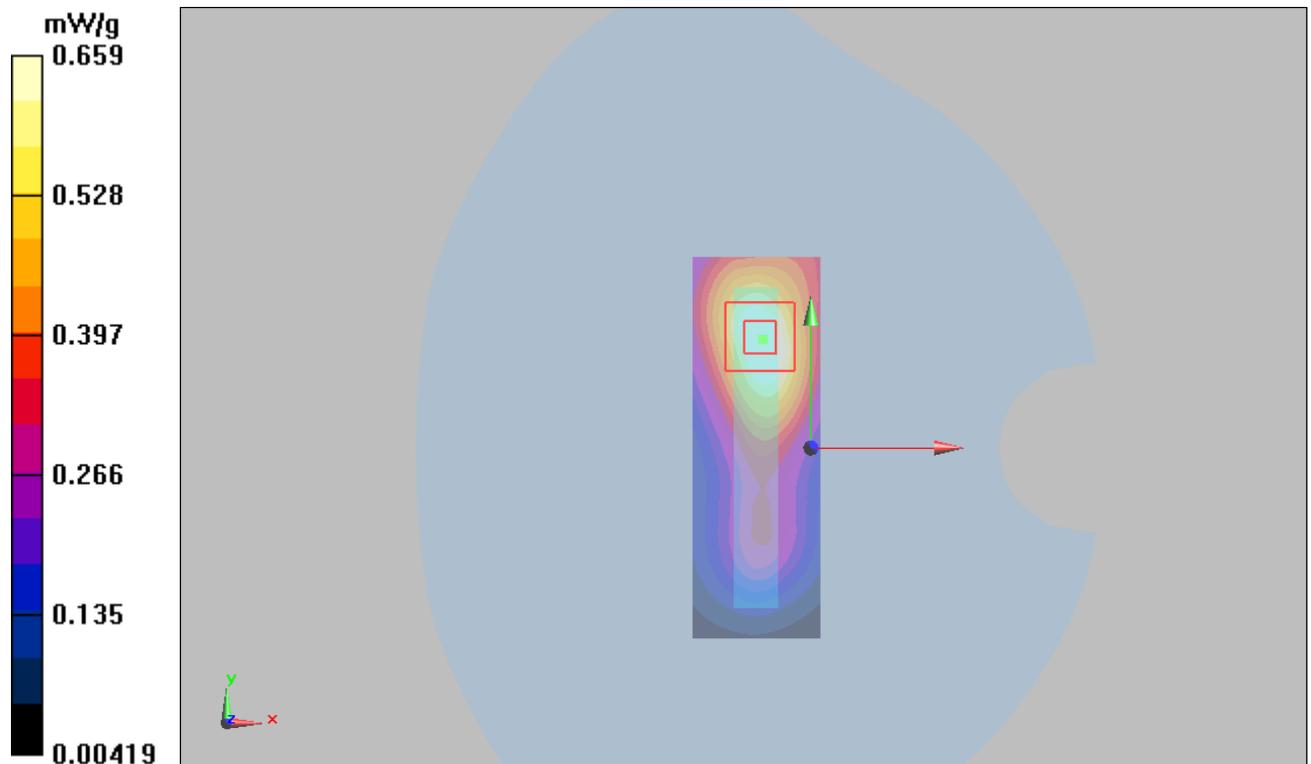


Figure 19 GSM 850 GPRS (2Up) with Lenovo Y-450 Test Position 5 Channel 190

GSM 850 EGPRS (1Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/25/2010 2:37:12 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.07 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.906 mW/g; SAR(10 g) = 0.594 mW/g

Maximum value of SAR (measured) = 0.989 mW/g

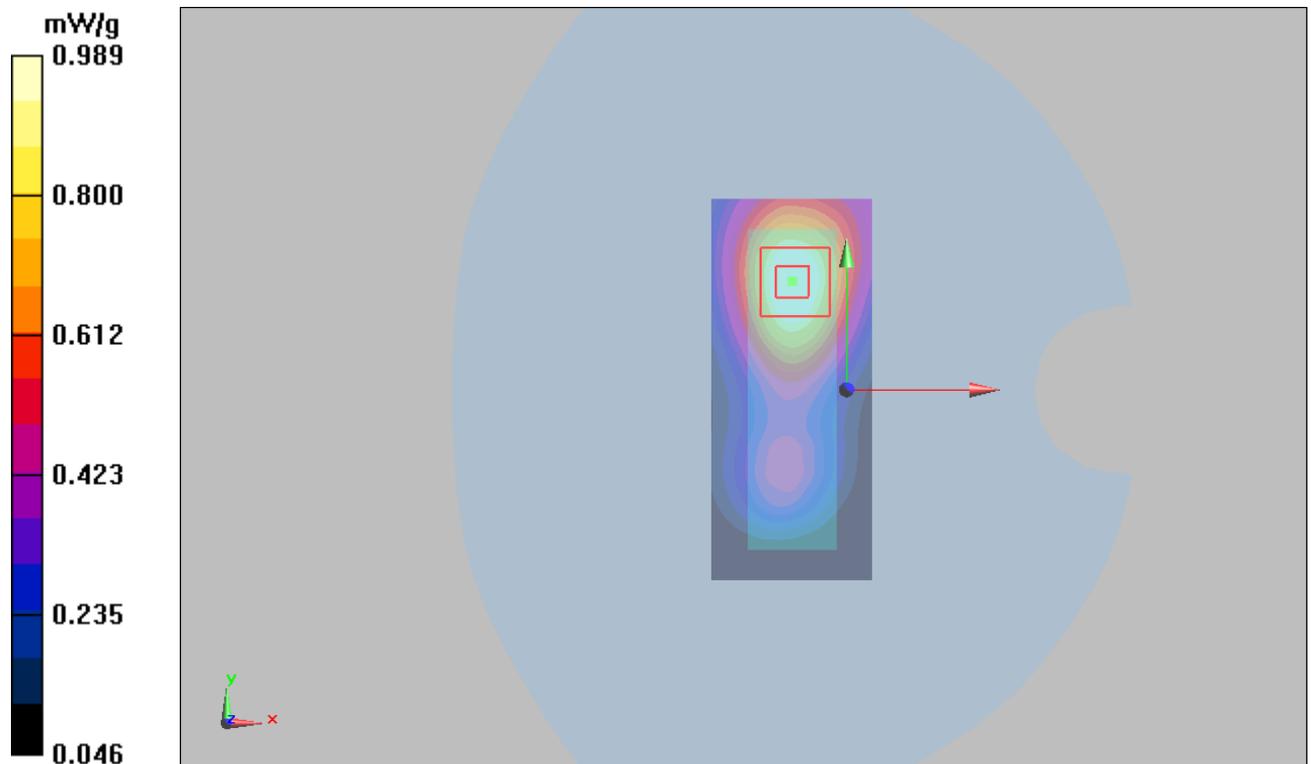


Figure 20 GSM 850 EGPRS (1Up) with IBM T61 Test Position 1 Channel 190

GSM 850 EGPRS (2Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/25/2010 11:09:38 AM

Communication System: GSM850 +EGPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle /Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.2 mW/g

Test Position 1 Middle /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.743 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

Test Position 1 Middle /Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.413 mW/g

Maximum value of SAR (measured) = 0.770 mW/g

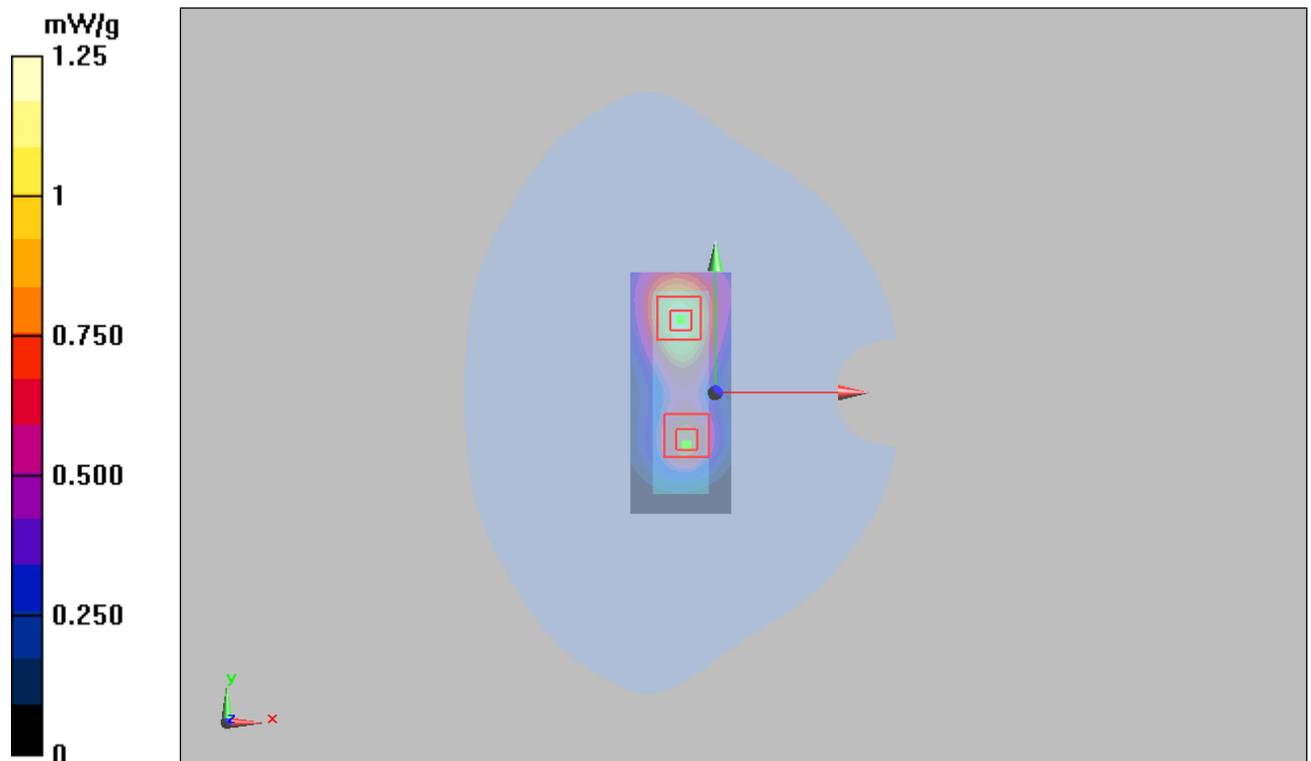


Figure 21 GSM 850 EGPRS (2Up) with IBM T61 Test Position 1 Channel 190

GSM 850 EGPRS (3Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/25/2010 7:03:16 PM

Communication System: GSM850 + EGPRS(3Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.767

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.19 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.678 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

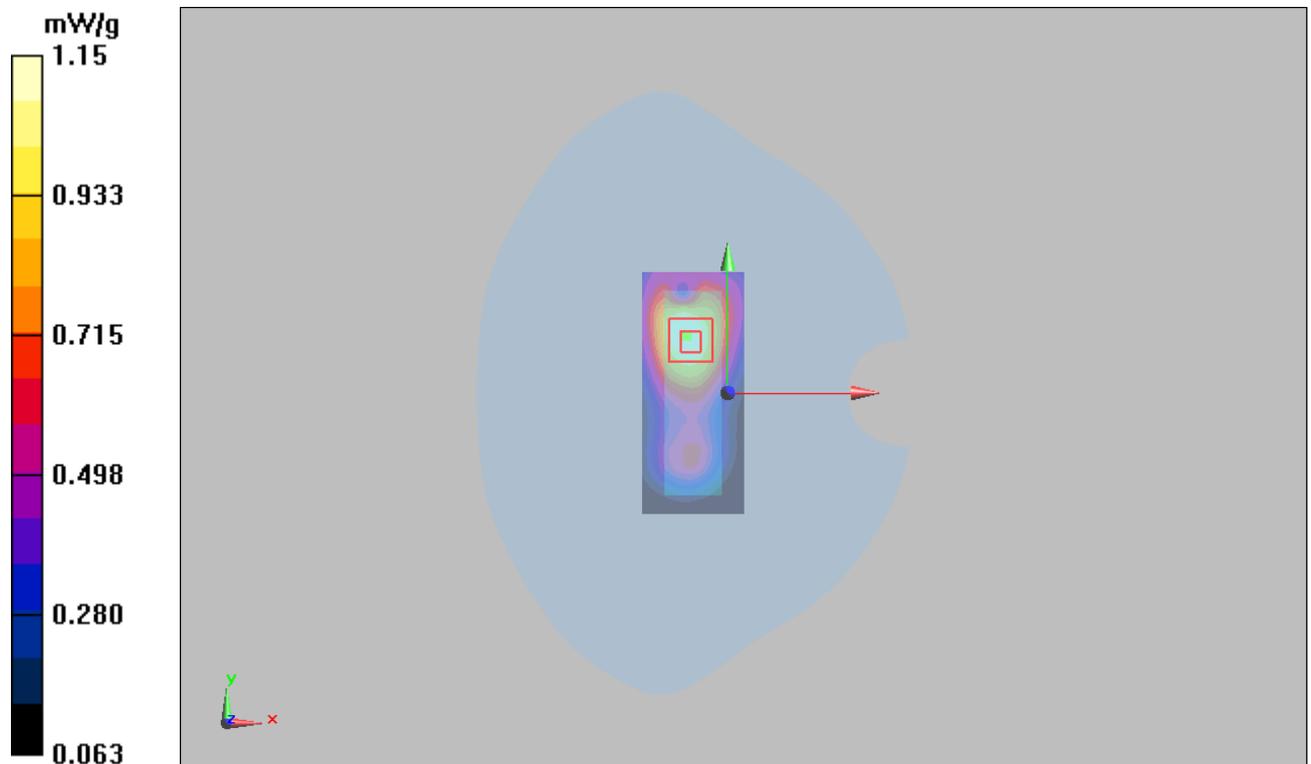


Figure 22 GSM 850 EGPRS (3Up) with IBM T61 Test Position 1 Channel 190

GSM 850 EGPRS (4Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/25/2010 6:25:06 PM

Communication System: GSM 850+EGPRS(4Up); Frequency: 836.6 MHz;Duty Cycle: 1:2.075

Medium parameters used: $f = 837$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liqjud Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle /Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.31 mW/g

Test Position 1 Middle /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.695 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

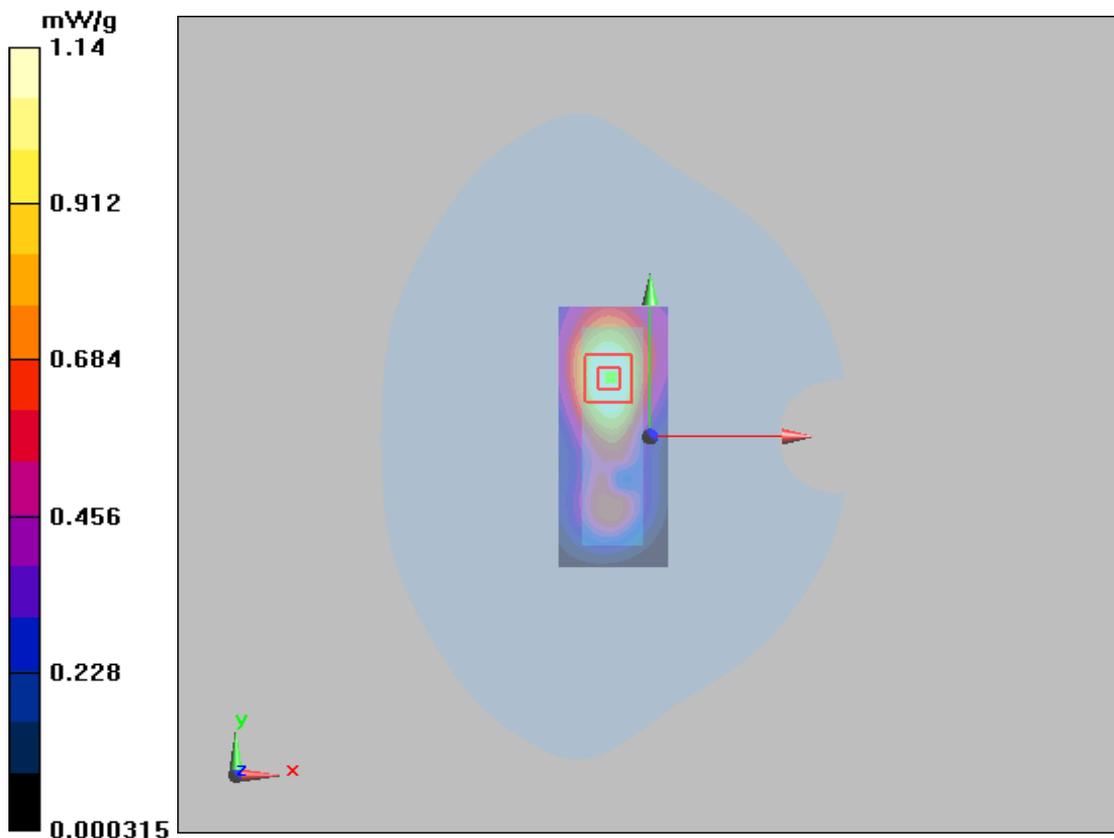


Figure 23 GSM 850 EGPRS (4Up) with IBM T61 Test Position 1 Channel 190

GSM 1900 GPRS (1Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/23/2010 9:16:52 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.837 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.9 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.409 mW/g

Maximum value of SAR (measured) = 0.792 mW/g

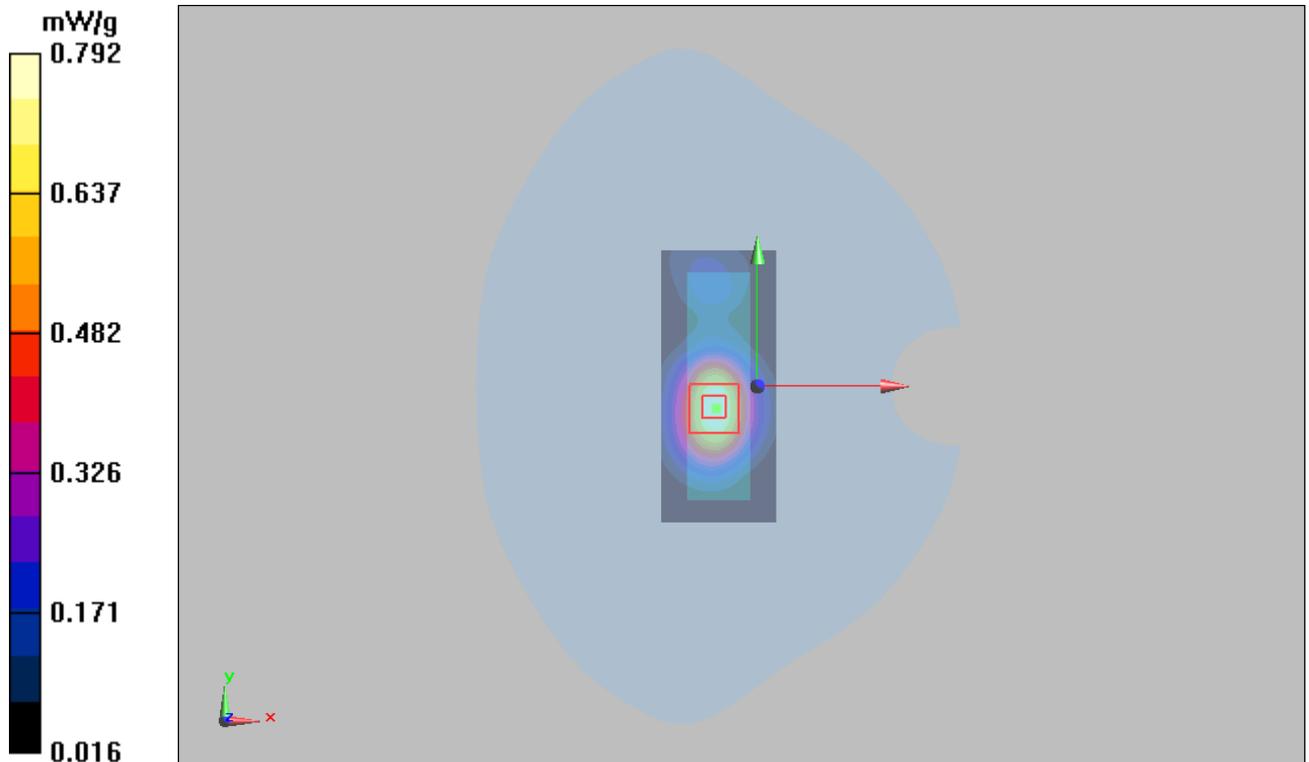


Figure 24 GSM 1900 GPRS (1Up) with IBM T61 Test Position 1 Channel 661

GSM 1900 GPRS (2Up) with IBM T61 Test Position 1 High

Date/Time: 12/23/2010 10:56:07 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 High/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.8 V/m; Power Drift = 0.163 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.878 mW/g; SAR(10 g) = 0.498 mW/g

Maximum value of SAR (measured) = 0.965 mW/g

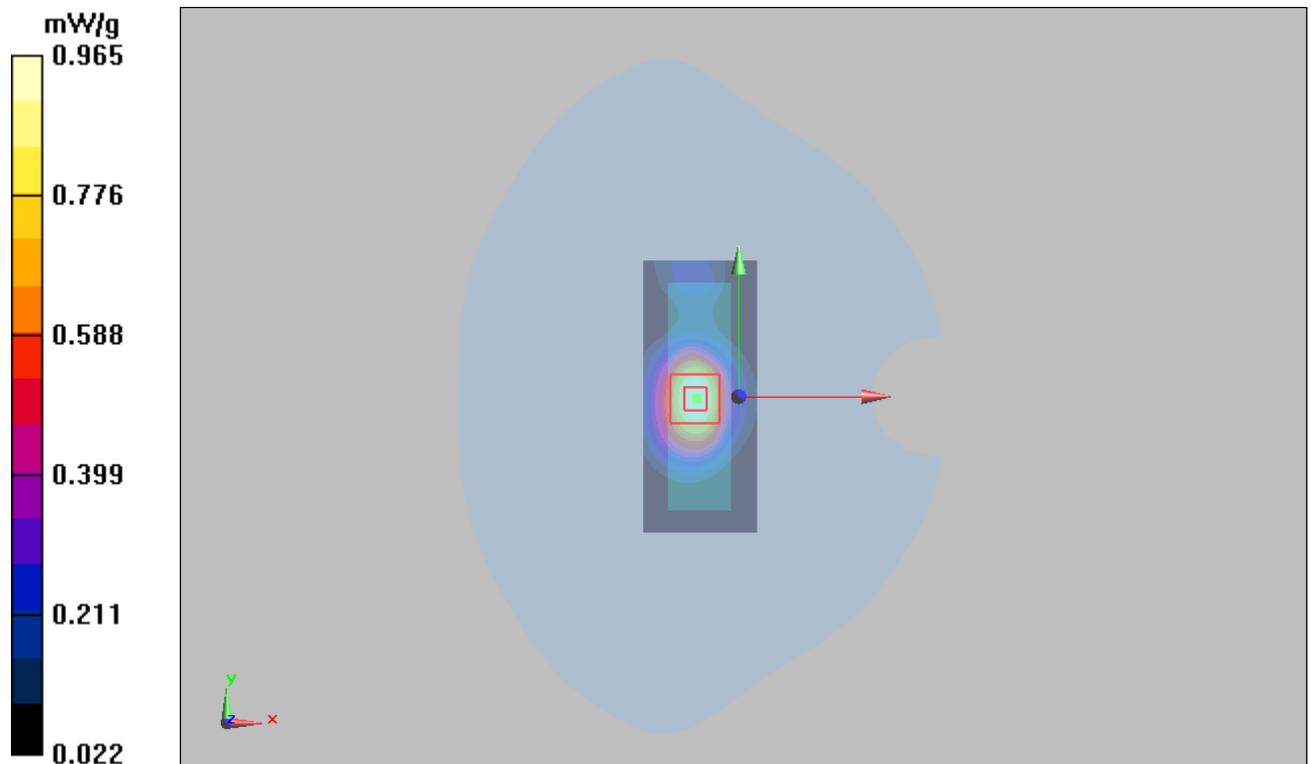


Figure 25 GSM 1900 GPRS (2Up) with IBM T61 Test Position 1 Channel 810

GSM 1900 GPRS (2Up) with IBM T61 Test Position 1 Middle

Date/Time: 12/23/2010 9:42:19 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.504 mW/g

Maximum value of SAR (measured) = 0.995 mW/g

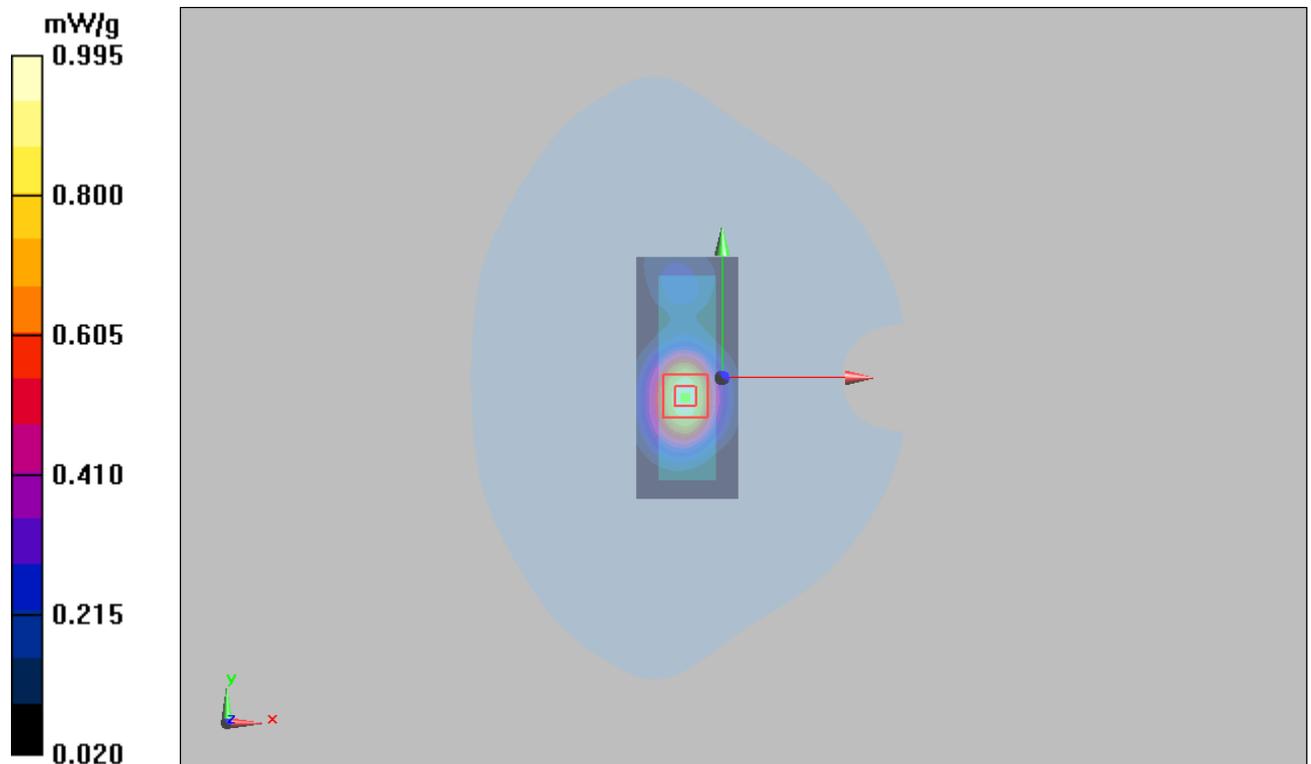


Figure 26 GSM 1900 GPRS (2Up) with IBM T61 Test Position 1 Channel 661

GSM 1900 GPRS (2Up) with IBM T61 Test Position 1 low

Date/Time: 12/23/2010 11:20:17 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.21 mW/g


Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.638 mW/g

Maximum value of SAR (measured) = 1.23 mW/g

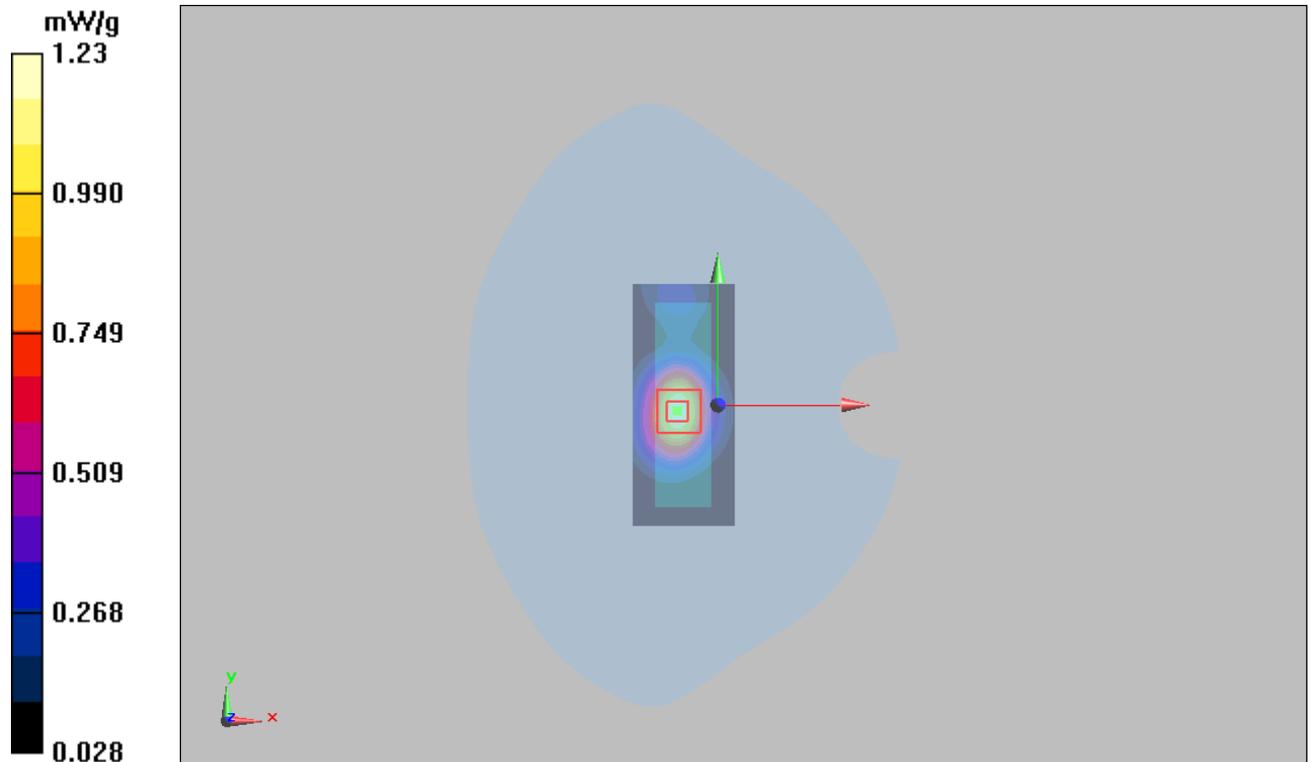

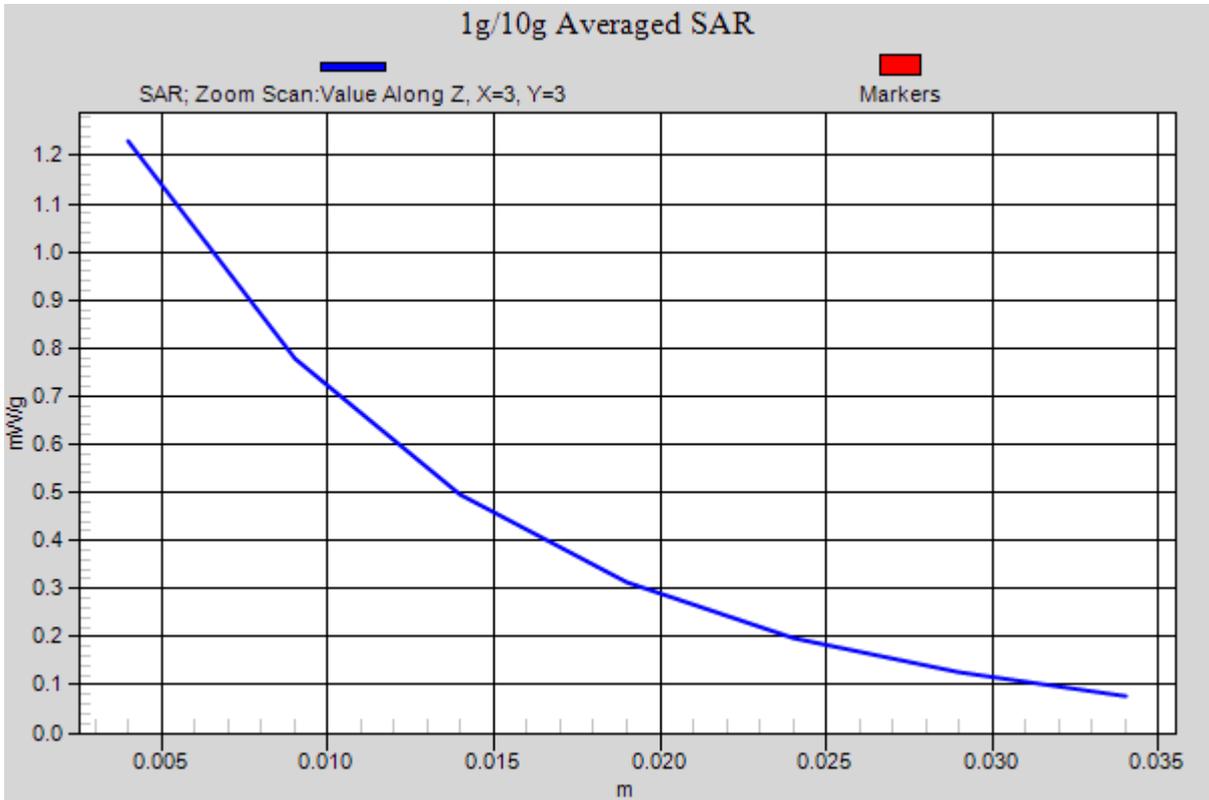


Figure 27 GSM 1900 GPRS (2Up) with IBM T61 Test Position 1 Channel 512

GSM 1900 GPRS (2Up) with IBM T61 Test Position 2 Middle

Date/Time: 12/23/2010 10:22:07 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 2 Middle/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.871 mW/g

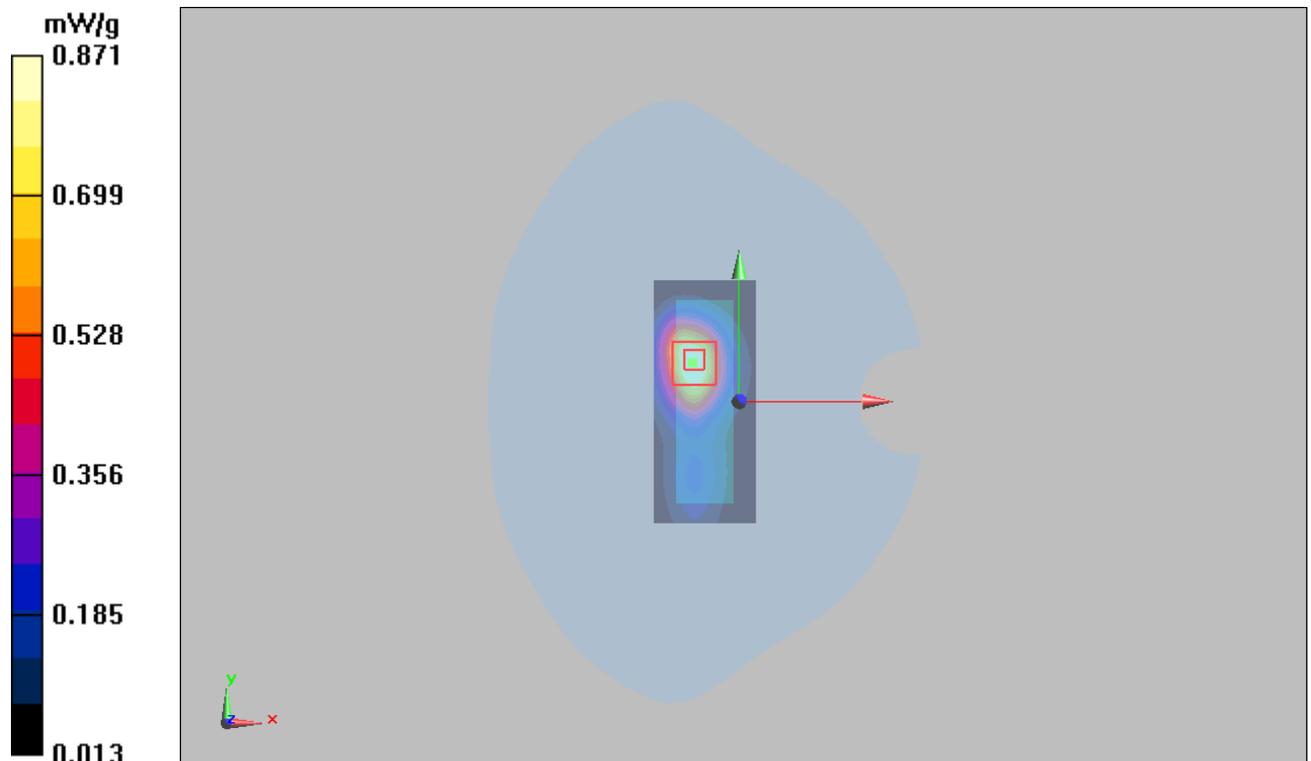


Figure 28 GSM 1900 GPRS (2Up) with IBM T61 Test Position 2 Channel 661

GSM 1900 GPRS (2Up) with IBM T61 Test Position 3 Middle

Date/Time: 12/24/2010 10:06:53 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 3 Middle/Area Scan (51x51x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.074 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.02 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.074 mW/g

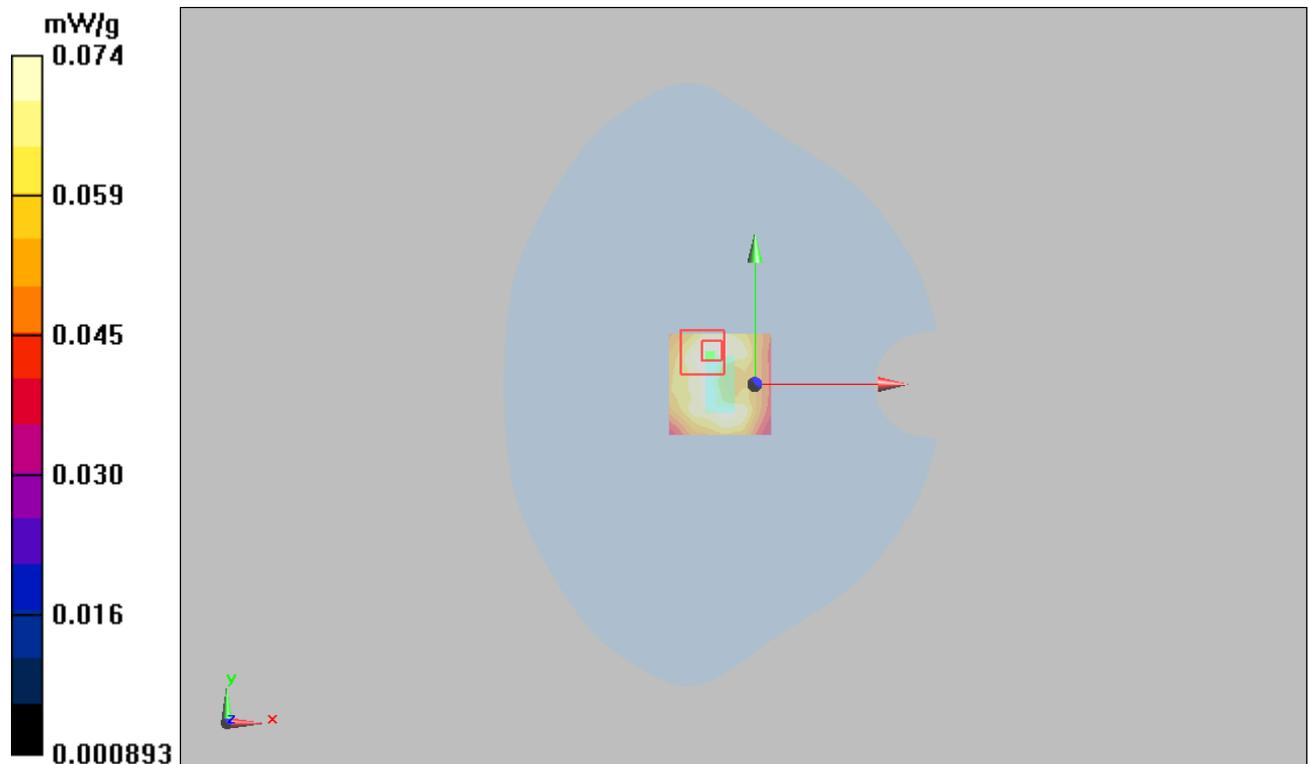


Figure 29 GSM 1900 GPRS (2Up) with IBM T61 Test Position 3 Channel 661

GSM 1900 GPRS (2Up) with Lenovo Y-450 Test Position 4 Middle

Date/Time: 12/24/2010 11:08:15 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 4 Middle/Area Scan (41x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.590 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 1 W/kg

SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.616 mW/g

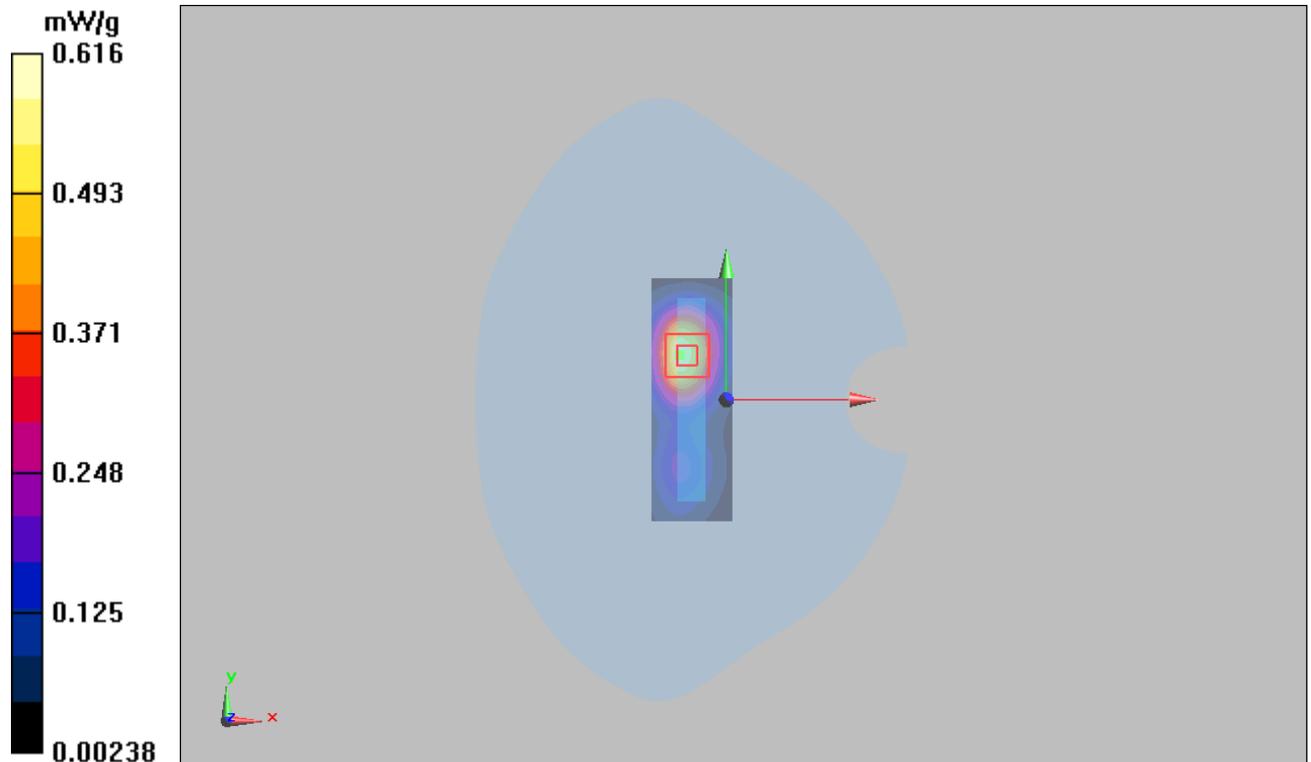


Figure 30 GSM 1900 GPRS (2Up) with Lenovo Y-450 Test Position 4 Channel 661

GSM 1900 GPRS (2Up) with Lenovo Y-450 Test Position 5 Middle

Date/Time: 12/24/2010 10:37:10 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 5 Middle/Area Scan (41x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.924 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.424 mW/g

Maximum value of SAR (measured) = 0.881 mW/g

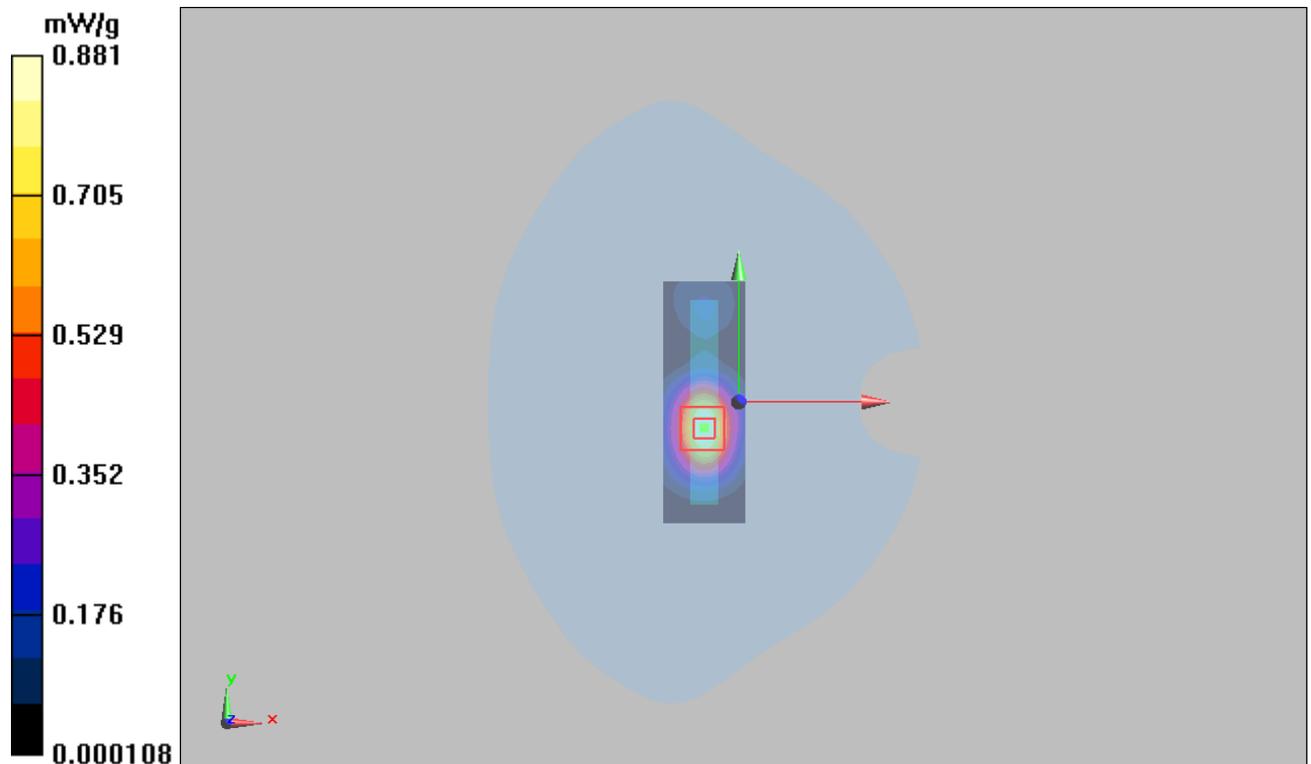


Figure 31 GSM 1900 GPRS (2Up) with Lenovo Y-450 Test Position 5 Channel 661

GSM 1900 EGPRS (1Up) with IBM T61 Test Position 1 Low

Date/Time: 12/24/2010 12:18:12 PM

Communication System: PCS 1900+EGPRS(1Up); Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.961 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = 0.093 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 0.957 mW/g

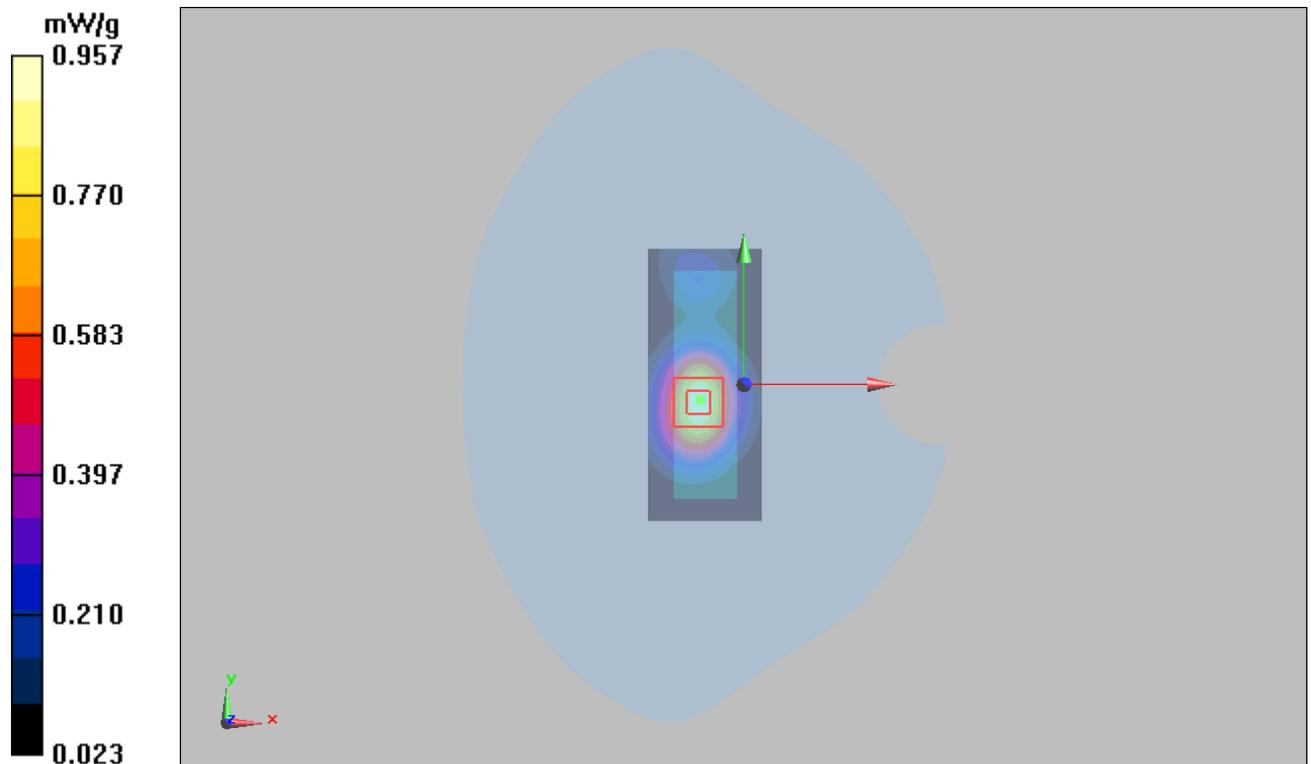


Figure 32 GSM 1900 EGPRS (1Up) with IBM T61 Test Position 1 Channel 512

GSM 1900 EGPRS (2Up) with IBM T61 Test Position 1 Low

Date/Time: 12/24/2010 12:36:45 PM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.17 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.2 V/m; Power Drift = 0.158 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.567 mW/g

Maximum value of SAR (measured) = 1.3 mW/g

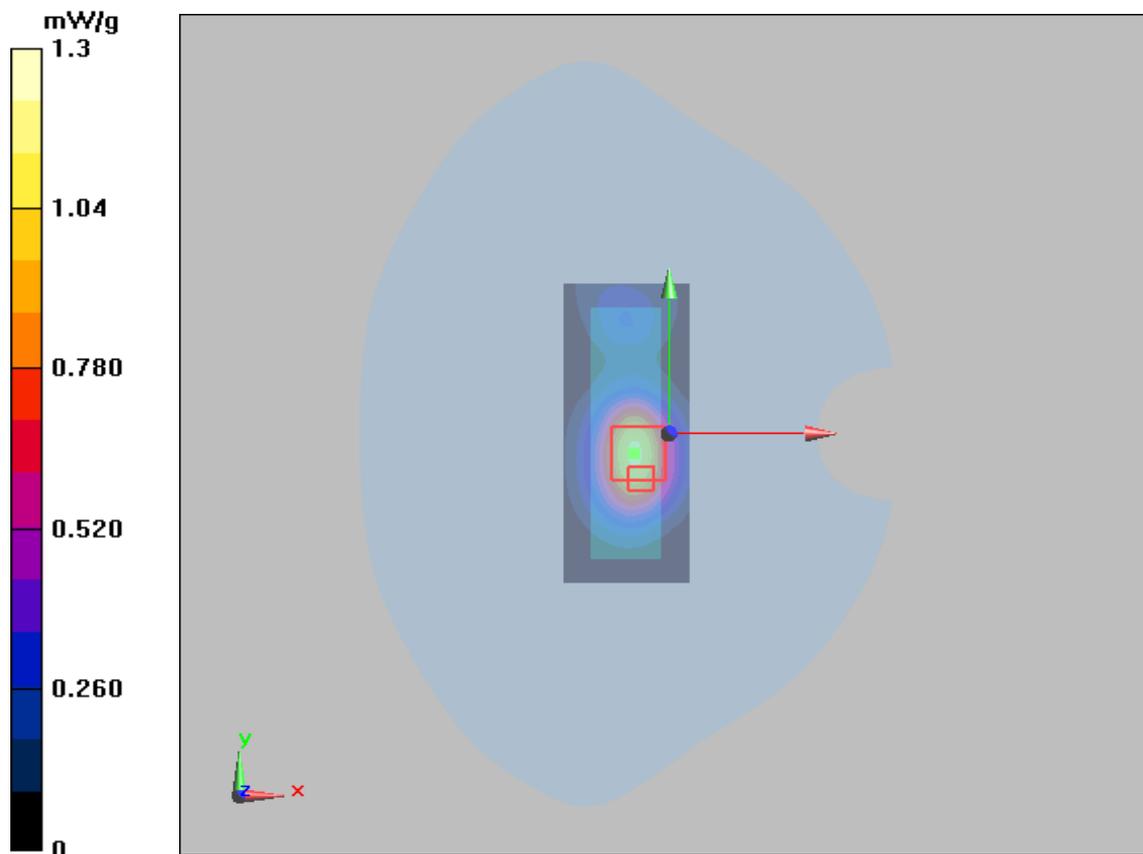


Figure 33 GSM 1900 EGPRS (2Up) with IBM T61 Test Position 1 Channel 512

GSM 1900 EGPRS (3Up) with IBM T61 Test Position 1 Low

Date/Time: 12/24/2010 12:54:35 PM

Communication System: PCS 1900+EGPRS(3Up); Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.21 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = -0.194 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.603 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

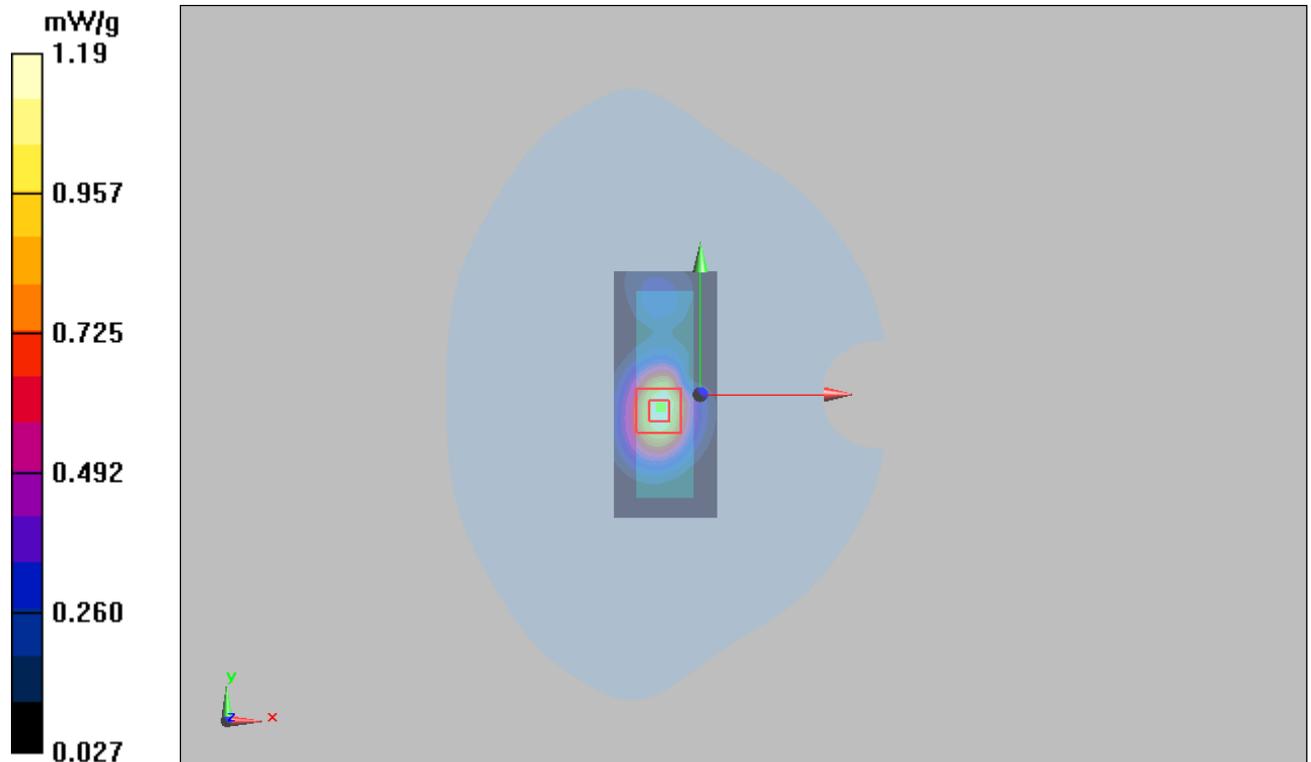


Figure 34 GSM 1900 EGPRS (3Up) with IBM T61 Test Position 1 Channel 512

GSM 1900 EGPRS (4Up) with IBM T61 Test Position 1 Low

Date/Time: 12/23/2010 8:29:57 PM

Communication System: PCS 1900+EGPRS(4Up); Frequency: 1850.2 MHz; Duty Cycle: 1:2.075

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Test Position 1 Low/Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.29 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.606 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

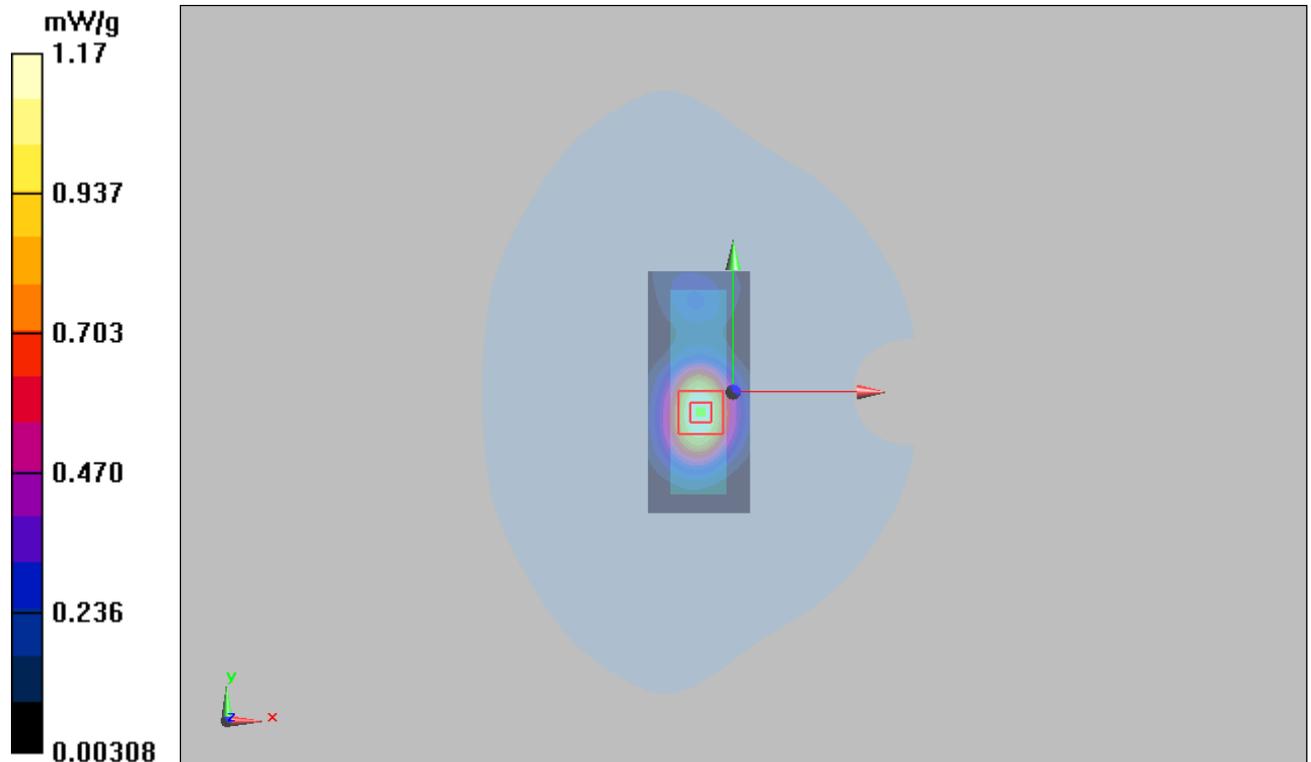


Figure 35 GSM 1900 EGPRS (4Up) with IBM T61 Test Position 1 Channel 512

ANNEX D: Probe Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA-SH (Auden)**

Certificate No: **EX3-3677_Nov10**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3677**

Calibration procedure(s): **QA CAL-01.v6, QA CAL-14.v3, QA CAL-23.v3 and QA CAL-25.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 24, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 1-Apr-10 (No. 217-01136) | Apr-11 |
| Power sensor E4412A | MY41495277 | 1-Apr-10 (No. 217-01136) | Apr-11 |
| Power sensor E4412A | MY41498087 | 1-Apr-10 (No. 217-01136) | Apr-11 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 30-Mar-10 (No. 217-01159) | Mar-11 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 30-Mar-10 (No. 217-01161) | Mar-11 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 30-Mar-10 (No. 217-01160) | Mar-11 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-09 (No. ES3-3013_Dec09) | Dec-10 |
| DAE4 | SN: 660 | 20-Apr-10 (No. DAE4-660_Apr10) | Apr-11 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

| | | | | | |
|----------------|----------------------|----------|--------------------------|-----------|--|
| Calibrated by: | Katja Pokovic | Function | Technical Manager | Signature | |
| Approved by: | Niels Kuster | Function | Quality Manager | Signature | |

Issued: November 25, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C | modulation dependent linearization parameters |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 SN:3677

November 24, 2010

Probe EX3DV4

SN:3677

| | |
|------------------|--------------------|
| Manufactured: | September 9, 2008 |
| Last calibrated: | September 23, 2009 |
| Recalibrated: | November 24, 2010 |

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

TA Technology (Shanghai) Co., Ltd. Test Report

EX3DV4 SN:3677

November 24, 2010

DASY/EASY - Parameters of Probe: EX3DV4 SN:3677

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-----------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.41 | 0.47 | 0.39 | ± 10.1% |
| DCP (mV) ^B | 96.8 | 98.9 | 98.8 | |

Modulation Calibration Parameters

| UID | Communication System Name | PAR | | A dB | B dBuV | C | VR mV | Unc ^C (k=2) |
|-------|---------------------------|------|---|---------|-----------|------|----------|---------------------------|
| 10000 | CW | 0.00 | X | 0.00 | 0.00 | 1.00 | 143.2 | ± 2.4 % |
| | | | Y | 0.00 | 0.00 | 1.00 | 140.9 | |
| | | | Z | 0.00 | 0.00 | 1.00 | 135.8 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX, Y, Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 SN:3677

November 24, 2010

DASY/EASY - Parameters of Probe: EX3DV4 SN:3677

Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] | Validity [MHz] ^c | Permittivity | Conductivity | ConvF X | ConvF Y | ConvF Z | Alpha | Depth Unc (k=2) |
|---------|-----------------------------|--------------|--------------|---------|---------|---------|-------|-----------------|
| 450 | ± 50 / ± 100 | 43.5 ± 5% | 0.87 ± 5% | 10.04 | 10.04 | 10.04 | 0.09 | 1.00 ± 13.3% |
| 835 | ± 50 / ± 100 | 41.5 ± 5% | 0.90 ± 5% | 9.50 | 9.50 | 9.50 | 0.72 | 0.64 ± 11.0% |
| 1750 | ± 50 / ± 100 | 40.1 ± 5% | 1.37 ± 5% | 8.22 | 8.22 | 8.22 | 0.72 | 0.59 ± 11.0% |
| 1900 | ± 50 / ± 100 | 40.0 ± 5% | 1.40 ± 5% | 7.94 | 7.94 | 7.94 | 0.81 | 0.57 ± 11.0% |
| 2450 | ± 50 / ± 100 | 39.2 ± 5% | 1.80 ± 5% | 7.32 | 7.32 | 7.32 | 0.47 | 0.75 ± 11.0% |

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3677

November 24, 2010

DASY/EASY - Parameters of Probe: EX3DV4 SN:3677

Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] | Validity [MHz] ^c | Permittivity | Conductivity | ConvF X | ConvF Y | ConvF Z | Alpha | Depth Unc (k=2) |
|---------|-----------------------------|--------------|--------------|---------|---------|---------|-------|-----------------|
| 450 | ± 50 / ± 100 | 56.7 ± 5% | 0.94 ± 5% | 10.62 | 10.62 | 10.62 | 0.02 | 1.00 ± 13.3% |
| 750 | ± 50 / ± 100 | 55.5 ± 5% | 0.96 ± 5% | 10.14 | 10.14 | 10.14 | 0.59 | 0.72 ± 11.0% |
| 835 | ± 50 / ± 100 | 55.2 ± 5% | 0.97 ± 5% | 10.33 | 10.33 | 10.33 | 0.20 | 2.06 ± 11.0% |
| 1450 | ± 50 / ± 100 | 54.0 ± 5% | 1.30 ± 5% | 8.47 | 8.47 | 8.47 | 0.99 | 0.53 ± 11.0% |
| 1750 | ± 50 / ± 100 | 53.4 ± 5% | 1.49 ± 5% | 8.02 | 8.02 | 8.02 | 0.63 | 0.67 ± 11.0% |
| 1900 | ± 50 / ± 100 | 53.3 ± 5% | 1.52 ± 5% | 7.77 | 7.77 | 7.77 | 0.69 | 0.67 ± 11.0% |
| 2100 | ± 50 / ± 100 | 53.2 ± 5% | 1.62 ± 5% | 8.04 | 8.04 | 8.04 | 0.16 | 1.44 ± 11.0% |
| 2450 | ± 50 / ± 100 | 52.7 ± 5% | 1.95 ± 5% | 7.46 | 7.46 | 7.46 | 0.99 | 0.49 ± 11.0% |
| 3500 | ± 50 / ± 100 | 51.3 ± 5% | 3.31 ± 5% | 6.61 | 6.61 | 6.61 | 0.28 | 1.40 ± 13.1% |


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3677

November 24, 2010

Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)


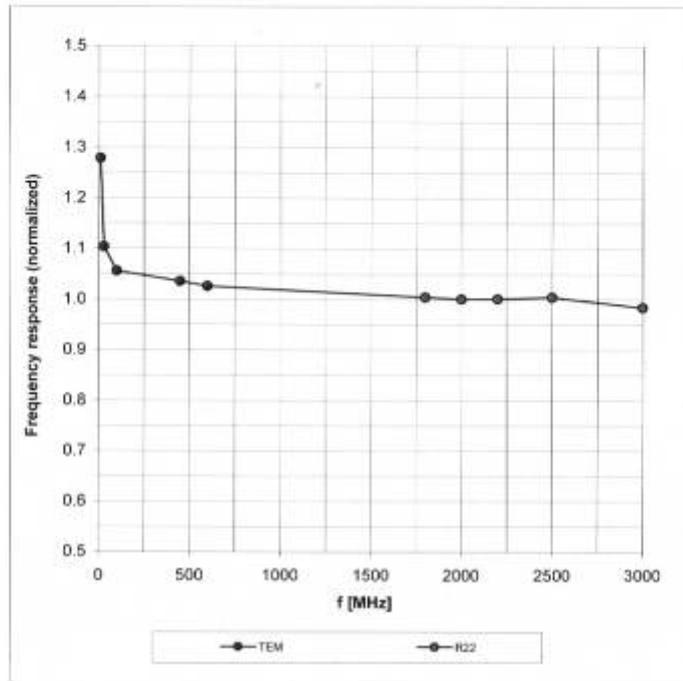


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4 SN:3677

November 24, 2010

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

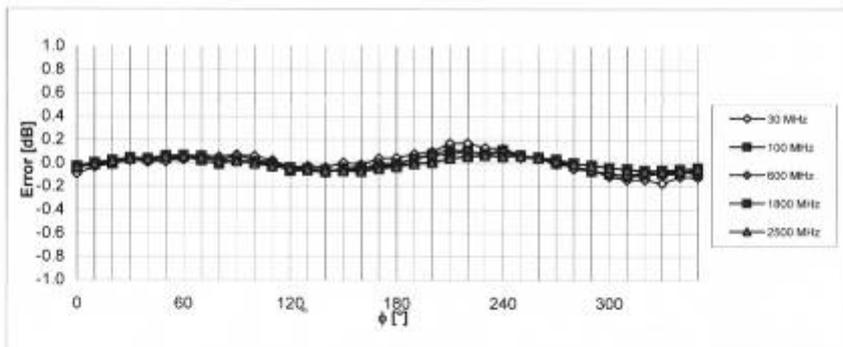
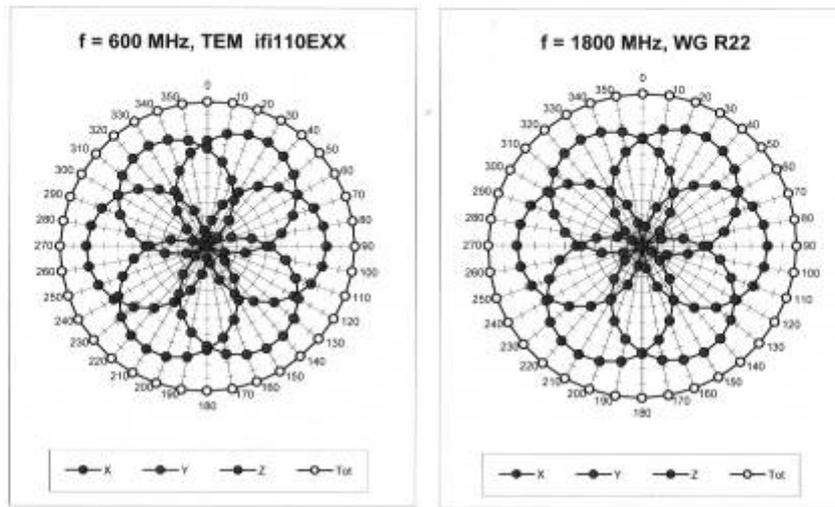


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4 SN:3677

November 24, 2010

Dynamic Range f(SAR_{head})
(TEM cell, f = 900 MHz)

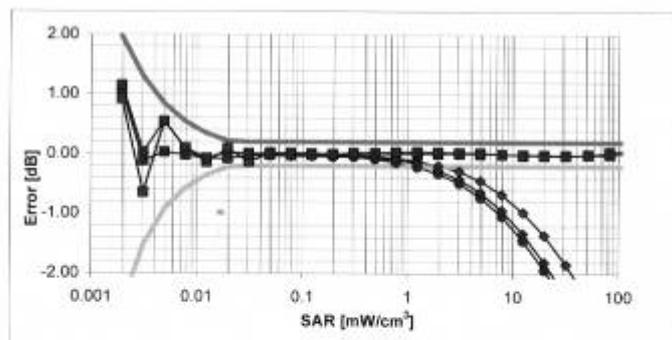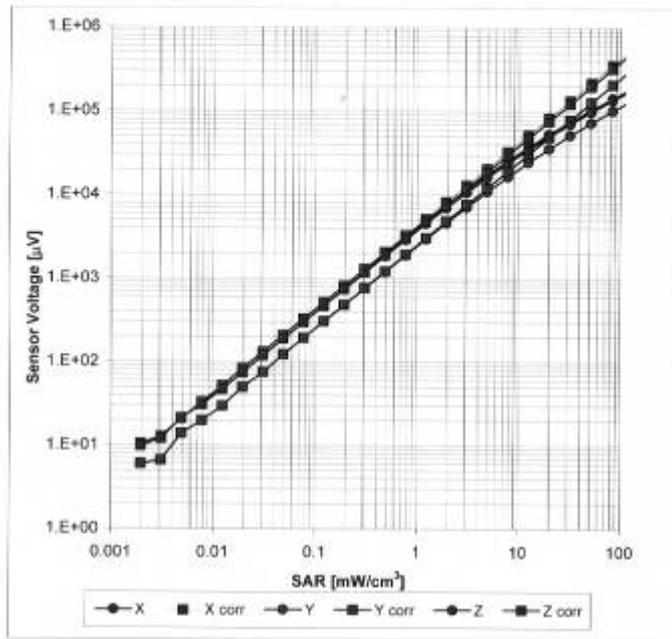


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4 SN:3677


November 24, 2010

Conversion Factor Assessment

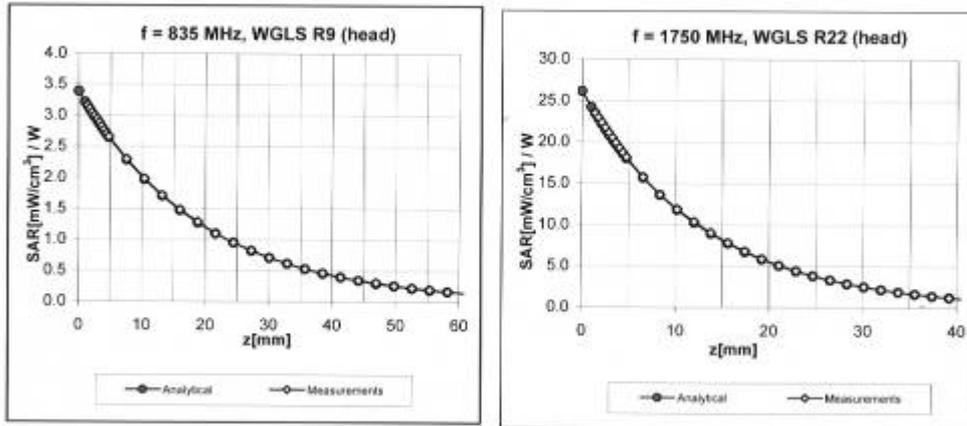

Deviation from Isotropy in HSL

Error (ϕ, θ), f = 900 MHz

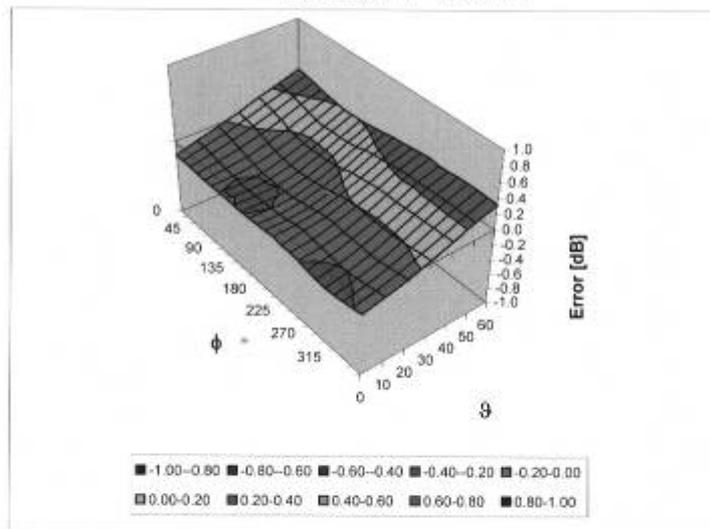

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

TA Technology (Shanghai) Co., Ltd.
Test Report

EX3DV4 SN:3677

November 24, 2010

Other Probe Parameters

| | |
|---|----------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | Not applicable |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 2 mm |

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA1012-2033SAR01R1

Page 76 of 102

ANNEX E: D835V2 Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D835V2-4d092_Jan10**

| CALIBRATION CERTIFICATE | | | |
|--|--|-----------------------------------|------------------------|
| Object | D835V2 - SN: 4d092 | | |
| Calibration procedure(s) | QA CAL-05.v7 Calibration procedure for dipole validation kits | | |
| Calibration date: | January 14, 2010 | | |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> | | | |
| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
| Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 |
| Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 31-Mar-09 (No. 217-01025) | Mar-10 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 31-Mar-09 (No. 217-01029) | Mar-10 |
| Reference Probe ES3DV3 | SN: 3205 | 26-Jun-09 (No. ES3-3205_Jun09) | Jun-10 |
| DAE4 | SN: 601 | 07-Mar-09 (No. DAE4-601_Mar09) | Mar-10 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | in house check: Oct-11 |
| RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | in house check: Oct-11 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |
| Calibrated by: | Name Jeton Kastrioti | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature |
| Issued: January 18, 2010 | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA1012-2033SAR01R1

Page 77 of 102

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd. Test Report

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|---------------------------|-------------|
| DASY Version | DASY5 | V5.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V4.9 | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.2 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 41.4 \pm 6 % | 0.89 mho/m \pm 6 % |
| Head TSL temperature during test | (21.5 \pm 0.2) °C | --- | --- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.39 mW / g |
| SAR normalized | normalized to 1W | 9.56 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.63 mW / g \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.56 mW / g |
| SAR normalized | normalized to 1W | 6.24 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 6.27 mW / g \pm 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 54.8 ± 6 % | 0.98 mho/m ± 6 % |
| Body TSL temperature during test | (22.0 ± 0.2) °C | --- | --- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 2.49 mW / g |
| SAR normalized | normalized to 1W | 10.0 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.86 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 1.63 mW / g |
| SAR normalized | normalized to 1W | 6.52 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.47 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.2 Ω - 2.8 j Ω |
| Return Loss | - 30.3 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.6 Ω - 4.5 j Ω |
| Return Loss | - 25.6 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.392 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|--------------------|
| Manufactured by | SPEAG |
| Manufactured on | September 15, 2009 |

DASY5 Validation Report for Head TSL

Date/Time: 11.01.2010 12:00:00

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d092

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.5 V/m; Power Drift = -0.00176 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.56 mW/g


Maximum value of SAR (measured) = 2.77 mW/g

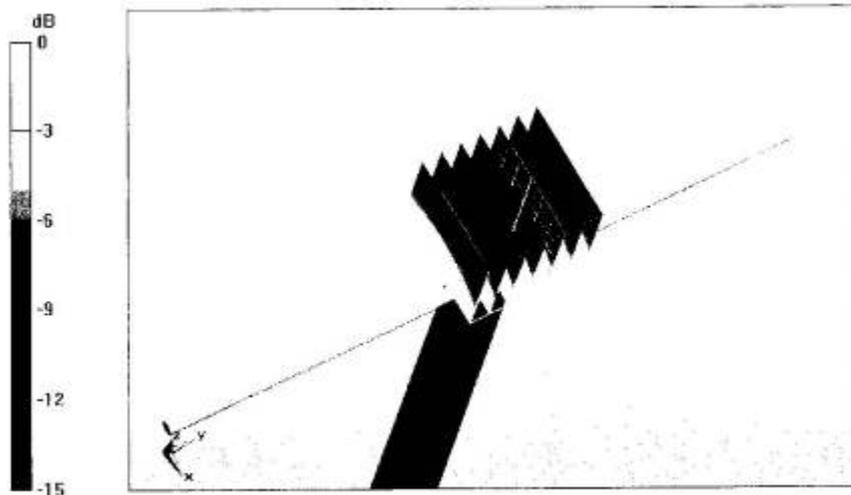

0 dB = 2.77mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Impedance Measurement Plot for Head TSL

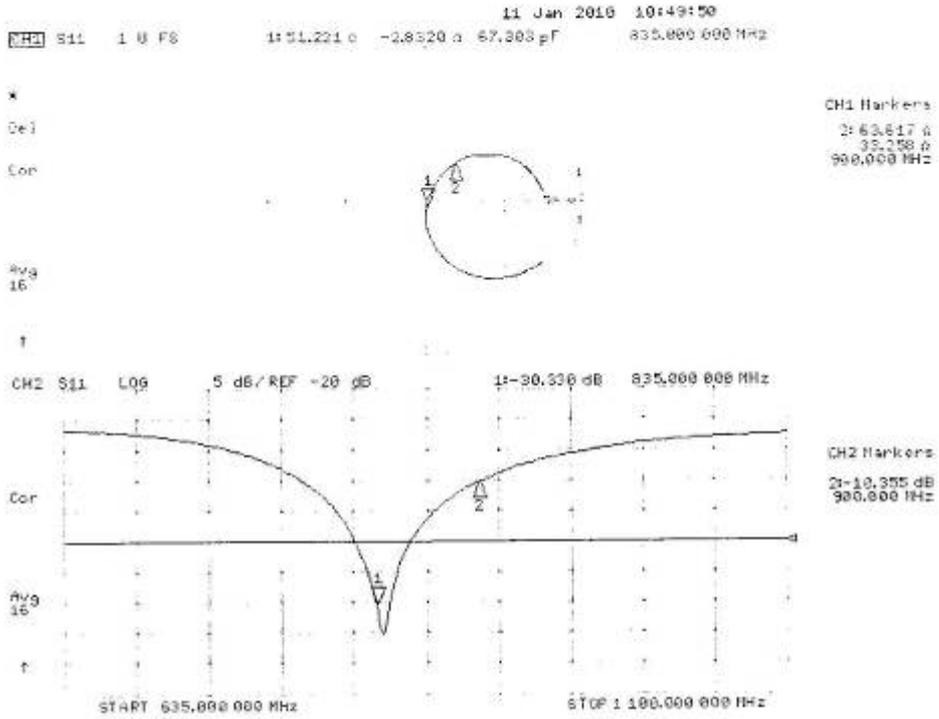

DASY5 Validation Report for Body

Date/Time: 14.01.2010 15:40:17

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d092

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.97, 5.97, 5.97); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.9 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.63 mW/g

Maximum value of SAR (measured) = 2.89 mW/g

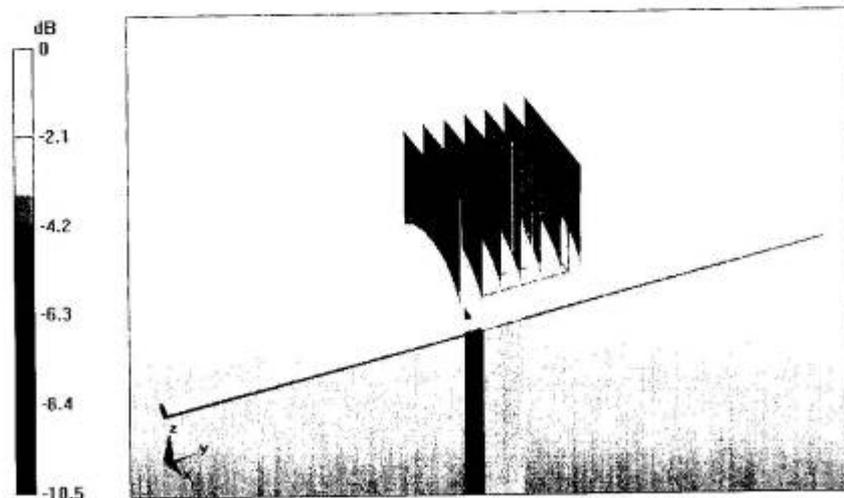


0 dB = 2.89mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA1012-2033SAR01R1

Page 84 of 102

Impedance Measurement Plot for Body TSL

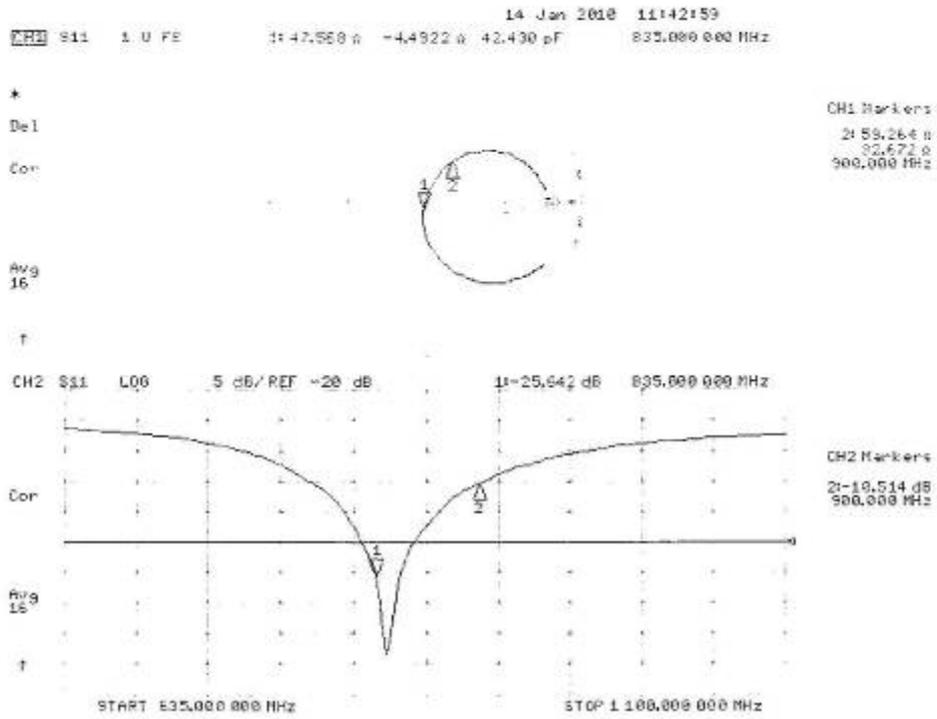

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA1012-2033SAR01R1

Page 85 of 102

ANNEX F: D1900V2 Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **Audem**

Certificate No.: **D1900V2-5d018_Jun10**

| CALIBRATION CERTIFICATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|-----------------------------------|------------------------|-------------------|------|----------------------------|-----------------------|----------------------|------------|---------------------------|--------|-----------------------|------------|---------------------------|--------|----------------------------|----------------|---------------------------|--------|-----------------------------|--------------------|---------------------------|--------|------------------------|----------|--------------------------------|--------|------|---------|--------------------------------|--------|---------------------|------|-----------------------|-----------------|-----------------------|------------|-----------------------------------|------------------------|-------------------------|--------|----------------------------------|------------------------|---------------------------|------------------|-----------------------------------|------------------------|
| Object | D1900V2 - SN: 5d018 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration procedure(s) | QA CAL-05.v7 Calibration procedure for dipole validation kits | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration date: | June 15, 2010 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Cal Date (Certificate No.)</th> <th style="width: 25%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20g)</td> <td>30-Mar-10 (No. 217-01158)</td> <td>Mar-11</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.2 / 06327</td> <td>30-Mar-10 (No. 217-01162)</td> <td>Mar-11</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>30-Apr-10 (No. ES3-3205_Apr10)</td> <td>Apr-11</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>10-Jun-10 (No. DAE4-601_Jun10)</td> <td>Jun-11</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Secondary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Check Date (in house)</th> <th style="width: 25%;">Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-09)</td> <td>In house check: Oct-10</td> </tr> </tbody> </table> | | | | Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 | Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 | Reference 20 dB Attenuator | SN: 5086 (20g) | 30-Mar-10 (No. 217-01158) | Mar-11 | Type-N mismatch combination | SN: 5047.2 / 06327 | 30-Mar-10 (No. 217-01162) | Mar-11 | Reference Probe ES3DV3 | SN: 3205 | 30-Apr-10 (No. ES3-3205_Apr10) | Apr-11 | DAE4 | SN: 601 | 10-Jun-10 (No. DAE4-601_Jun10) | Jun-11 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 | RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 | Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |
| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 30-Mar-10 (No. 217-01158) | Mar-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 30-Mar-10 (No. 217-01162) | Mar-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference Probe ES3DV3 | SN: 3205 | 30-Apr-10 (No. ES3-3205_Apr10) | Apr-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DAE4 | SN: 601 | 10-Jun-10 (No. DAE4-601_Jun10) | Jun-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibrated by: | Name Dimitar Iliev | Function Laboratory Technician | Signature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Issued: June 17, 2010 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA1012-2033SAR01R1

Page 86 of 102

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd. Test Report

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|---------------------------|-------------|
| DASY Version | DASY5 | V52.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V5.0 | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 39.6 ± 6 % | 1.44 mho/m ± 6 % |
| Head TSL temperature during test | (22.5 ± 0.2) °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 10.0 mW / g |
| SAR normalized | normalized to 1W | 40.0 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 39.2 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 5.22 mW / g |
| SAR normalized | normalized to 1W | 20.9 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 20.7 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd. Test Report

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 53.4 ± 6 % | 1.54 mho/m ± 6 % |
| Body TSL temperature during test | (21.7 ± 0.2) °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 10.3 mW / g |
| SAR normalized | normalized to 1W | 41.2 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 40.9 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 5.52 mW / g |
| SAR normalized | normalized to 1W | 22.1 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 22.0 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd. Test Report

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.1 Ω + 2.6 j Ω |
| Return Loss | - 29.7 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.4 Ω + 3.2 j Ω |
| Return Loss | - 27.6 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.194 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | June 04, 2002 |

DASY5 Validation Report for Head TSL

Date/Time: 15.06.2010 10:40:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.2 Build 0, Version 52.2.0 (163)
- Postprocessing SW: SEMCAD X, V14.2 Build 2, Version 14.2.2 (1685)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.7 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.22 mW/g

Maximum value of SAR (measured) = 12.6 mW/g




0 dB = 12.6mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA1012-2033SAR01R1

Page 91 of 102

Impedance Measurement Plot for Head TSL

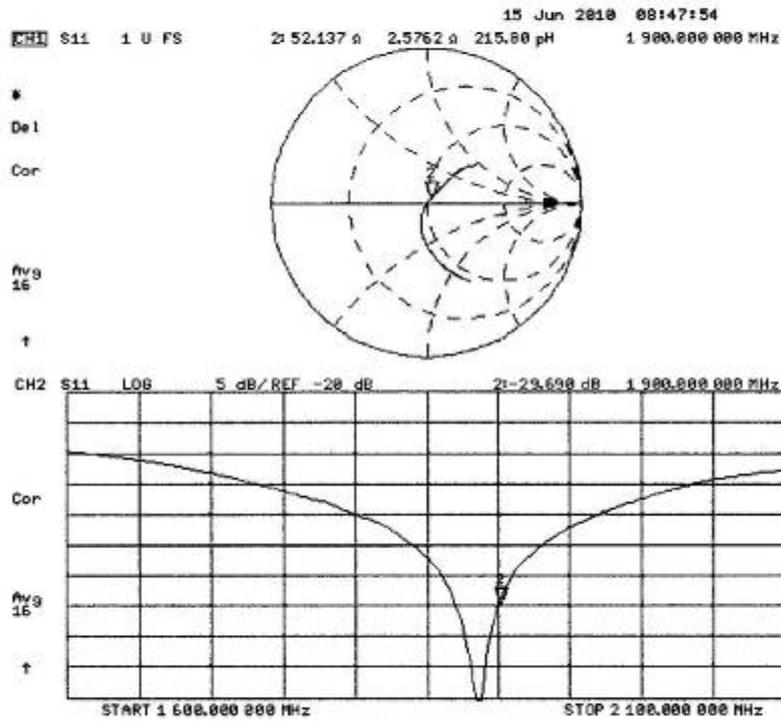

DASY5 Validation Report for Body

Date/Time: 15.06.2010 14:14:27

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.2 Build 0, Version 52.2.0 (163)
- Postprocessing SW: SEMCAD X, V14.2 Build 2, Version 14.2.2 (1685)


Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.1 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.52 mW/g

Maximum value of SAR (measured) = 12.8 mW/g

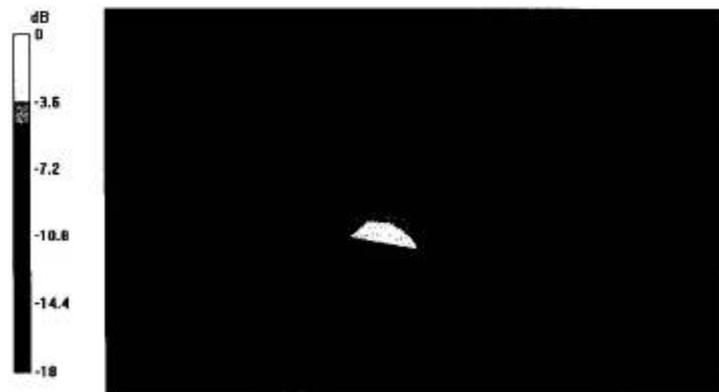


TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA1012-2033SAR01R1

Page 93 of 102

Impedance Measurement Plot for Body TSL

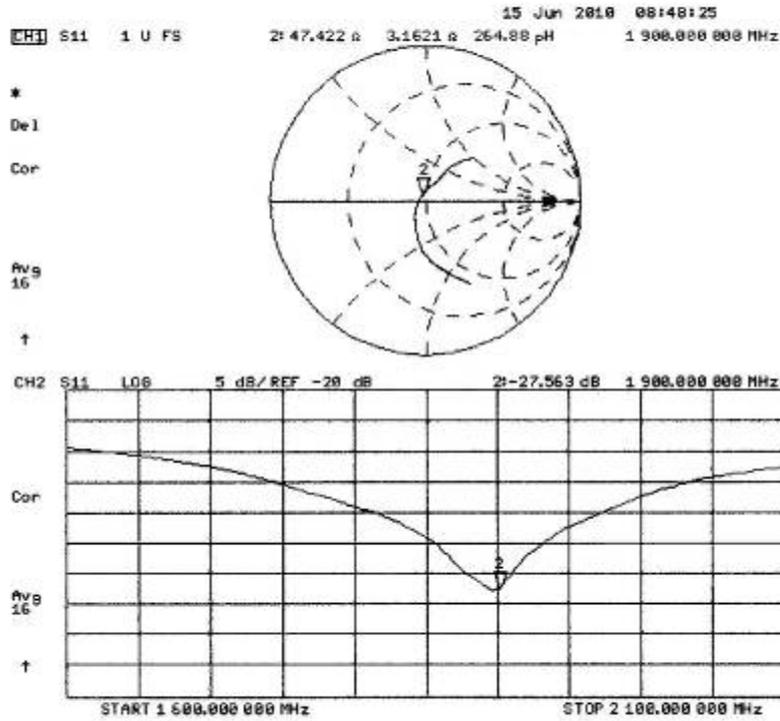

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA1012-2033SAR01R1

Page 94 of 102

ANNEX G: DAE4 Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA - SH (Auden)**

Certificate No: **DAE4-871_Nov10**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 871**

Calibration procedure(s) **QA CAL-06.v22
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **November 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278 | 28-Sep-10 (No:10376) | Sep-11 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Calibrator Box V1.1 | SE UMS 006 AB 1004 | 07-Jun-10 (in house check) | In house check: Jun-11 |

| | | | |
|----------------|---------------|--------------|-----------|
| | Name | Function | Signature |
| Calibrated by: | Andrea Guntli | Technician | |
| Approved by: | Fin Bornholt | R&D Director | |

Issued: November 18, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

TA Technology (Shanghai) Co., Ltd.
Test Report

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV
Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|--------------------------|--------------------------|--------------------------|
| High Range | 404.757 \pm 0.1% (k=2) | 404.740 \pm 0.1% (k=2) | 405.181 \pm 0.1% (k=2) |
| Low Range | 3.98219 \pm 0.7% (k=2) | 3.93489 \pm 0.7% (k=2) | 3.96831 \pm 0.7% (k=2) |

Connector Angle

| | |
|---|------------------------------------|
| Connector Angle to be used in DASY system | 90.0 $^{\circ}$ \pm 1 $^{\circ}$ |
|---|------------------------------------|

TA Technology (Shanghai) Co., Ltd. Test Report

Appendix

1. DC Voltage Linearity

| High Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 200001.2 | -1.56 | -0.00 |
| Channel X + Input | 20000.71 | 0.71 | 0.00 |
| Channel X - Input | -19997.87 | 1.63 | -0.01 |
| Channel Y + Input | 199994.3 | 1.99 | 0.00 |
| Channel Y + Input | 19998.92 | -1.08 | -0.01 |
| Channel Y - Input | -20000.26 | -0.76 | 0.00 |
| Channel Z + Input | 200009.2 | -1.04 | -0.00 |
| Channel Z + Input | 19998.70 | -1.10 | -0.01 |
| Channel Z - Input | -20000.16 | -0.76 | 0.00 |

| Low Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2000.1 | 0.16 | 0.01 |
| Channel X + Input | 199.58 | -0.52 | -0.26 |
| Channel X - Input | -200.79 | -0.89 | 0.45 |
| Channel Y + Input | 1999.9 | -0.03 | -0.00 |
| Channel Y + Input | 199.45 | -0.55 | -0.27 |
| Channel Y - Input | -200.31 | -0.41 | 0.21 |
| Channel Z + Input | 2000.1 | 0.33 | 0.02 |
| Channel Z + Input | 199.13 | -0.77 | -0.38 |
| Channel Z - Input | -201.47 | -1.37 | 0.69 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|--|---|
| Channel X | 200 | 14.25 | 12.86 |
| | -200 | -12.68 | -14.21 |
| Channel Y | 200 | -10.04 | -10.39 |
| | -200 | 9.20 | 9.17 |
| Channel Z | 200 | -0.85 | -1.40 |
| | -200 | -0.34 | -0.31 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200 | - | 2.85 | 0.69 |
| Channel Y | 200 | 2.41 | - | 2.73 |
| Channel Z | 200 | 2.54 | 0.73 | - |

TA Technology (Shanghai) Co., Ltd.

Test Report

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15920 | 15517 |
| Channel Y | 16171 | 16732 |
| Channel Z | 15803 | 16474 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

| | Average (μ V) | min. Offset (μ V) | max. Offset (μ V) | Std. Deviation (μ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.03 | -2.35 | 0.86 | 0.43 |
| Channel Y | -0.50 | -1.49 | -0.49 | 0.38 |
| Channel Z | -0.92 | -2.21 | 0.14 | 0.44 |

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

| | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200 | 200 |
| Channel Y | 200 | 200 |
| Channel Z | 200 | 200 |

8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01 | +6 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -9 |