



Report No.: RZA2009-1061



OET 65

TEST REPORT

Product Name	GSM Tri-band GPRS Digital Mobile Phone
Model	ZTE-G A661
FCC ID	Q78-GA661
Client	ZTE Corporation

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

Product Name	GSM Tri-band GPRS Digital Mobile Phone	Model	ZTE-G A661
FCC ID	Q78-GA661	Report No.	RZA2009-1061
Client	ZTE Corporation		
Manufacturer	ZTE Corporation		
Reference Standard(s)	<p>ANSI/IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-1: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear. (frequency range of 300 MHz to 3 GHz).</p> <p>IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body. (frequency rang of 30MHz to 6GHz)</p>		
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: September 16th, 2009</p>		
Comment	The test result only responds to the measured sample.		

Approved by 杨伟中
Yang Weizhong

Revised by 凌敏宝
Ling Minbao

Performed by 王路
Wang Lu

TABLE OF CONTENT

1. General Information	5
1.1. Notes of the test report	5
1.2. Testing laboratory	5
1.3. Applicant Information	6
1.4. Manufacturer Information	6
1.5. Information of EUT	7
1.6. Test Date	8
2. Operational Conditions during Test	9
2.1. General description of test procedures	9
2.2. GSM Test Configuration	9
3. SAR Measurements System Configuration	10
3.1. SAR Measurement Set-up	10
3.2. DASY4 E-field Probe System	11
3.2.1. ET3DV6 Probe Specification	11
3.2.2. E-field Probe Calibration	12
3.3. Other Test Equipment	12
3.3.1. Device Holder for Transmitters	12
3.3.2. Phantom	13
3.4. Scanning procedure	13
3.5. Data Storage and Evaluation	15
3.5.1. Data Storage	15
3.5.2. Data Evaluation by SEMCAD	15
3.6. System check	18
3.7. Equivalent Tissues	19
4. Laboratory Environment	20
5. Characteristics of the Test	20
5.1. Applicable Limit Regulations	20
5.2. Applicable Measurement Standards	20
6. Conducted Output Power Measurement	21
6.1. Summary	21
6.2. Conducted Power Results	22
7. Test Results	23
7.1. Dielectric Performance	23
7.2. System Check Results	24
7.3. Test Results	25
7.3.1. Summary of Measurement Results (GSM850/GPRS)	25
7.3.2. Summary of Measurement Results (GSM1900/GPRS)	26
7.3.3. Summary of Measurement Results (Bluetooth function)	27
7.4. Conclusion	27
8. Measurement Uncertainty	28
9. Main Test Instruments	29

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2009-1061

Page 4 of 133

ANNEX A: Test Layout	30
ANNEX B: System Check Results	33
ANNEX C: Graph Results	41
ANNEX D: Probe Calibration Certificate	97
ANNEX E: D835V2 Dipole Calibration Certificate	106
ANNEX F: D1900V2 Dipole Calibration Certificate	115
ANNEX G: DAE4 Calibration Certificate.....	124
ANNEX H: The EUT Appearances and Test Configuration.....	129

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai,China
City: Shanghai
Post code: 201210
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2009-1061

Page 6 of 133

1.3. Applicant Information

Company: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: P.R.China
Contact: Zhang Min
Telephone: 021-68897541
Fax: 021-50801070

1.4. Manufacturer Information

Company: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: P.R.China
Telephone: 021-68897541
Fax: 021-50801070

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2009-1061

Page 7 of 133

1.5. Information of EUT

General information

Device type :	portable device		
Exposure category:	uncontrolled environment / general population		
Product Name:	GSM Tri-band GPRS Digital Mobile Phone		
IMEI or SN:	354803030021546		
Device operating configurations :			
Operating mode(s):	GSM850; (tested) GSM1900; (tested)		
Test Modulation:	(GSM) GMSK		
GPRS mobile station class :	A		
GPRS multislots class :	12		
Maximum no. of timeslots in uplink:	4		
Operating frequency range(s):	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM 1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
Power class	GSM 850: 4, tested with power level 5		
	GSM 1900: 1, tested with power level 0		
Test channel (Low –Middle –High)	128 -190 -251	(GSM850)	(tested)
	512 - 661-810	(GSM1900)	(tested)
Hardware version:	g6qA		
Software version:	CE-CN-ZTE8-P103E1LV1.0.0		
Antenna type:	Internal antenna		

Auxiliary equipment details

AE1: Battery

Model: Li3707T42P3h463848
Manufacture: ZTE Corporation
IMEI or SN: 30030907160438598

AE2: Travel Adaptor

Model: STC-A22O50U8-C
Manufacture: ZTE Corporation
IMEI or SN: 100712071565421

Equipment Under Test (EUT) is a model of GSM Tri-band GPRS Digital Mobile Phone with internal antenna. It consists of mobile phone, battery and adaptor and the detail about these is in chapter 1.5 in this report. SAR is tested for GSM850 and GSM 1900. The Mobile Phone implements such functions as RF signal receiving /Transmitting and GSM/GPRS protocol processing, voice and MMS service etc. Externally it provides micro SD card interface and earphone port (to provide voice service). It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test is performed from September 10, 2009 to September 11, 2009.

2. Operational Conditions during Test

2.1. General description of test procedures

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 in the case of GSM 850, allocated to 512, 661 and 810 in the case of GSM 1900. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

2.2. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to "5" in SAR of GSM850, set to "0" in SAR of GSM1900. The test in the band of GSM850 and GSM1900 are performed in the mode of speech transfer function and GPRS function. Since the GPRS class is 12 or this EUT, it has at most 4 timeslots in uplink. According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Table 1: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

For this EUT, the tests for GSM 850 GPRS and GSM 1900 GPRS band will be performed under the following 4 setups at one same test position:

- 1) using 1 timeslot in uplink with the power of maximum power
- 2) using 2 timeslots in uplink with the power reduced 2dB
- 3) using 3 timeslots in uplink with the power reduced 4dB
- 4) using 4 timeslots in uplink with the power reduced 6dB

3. SAR Measurements System Configuration

3.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

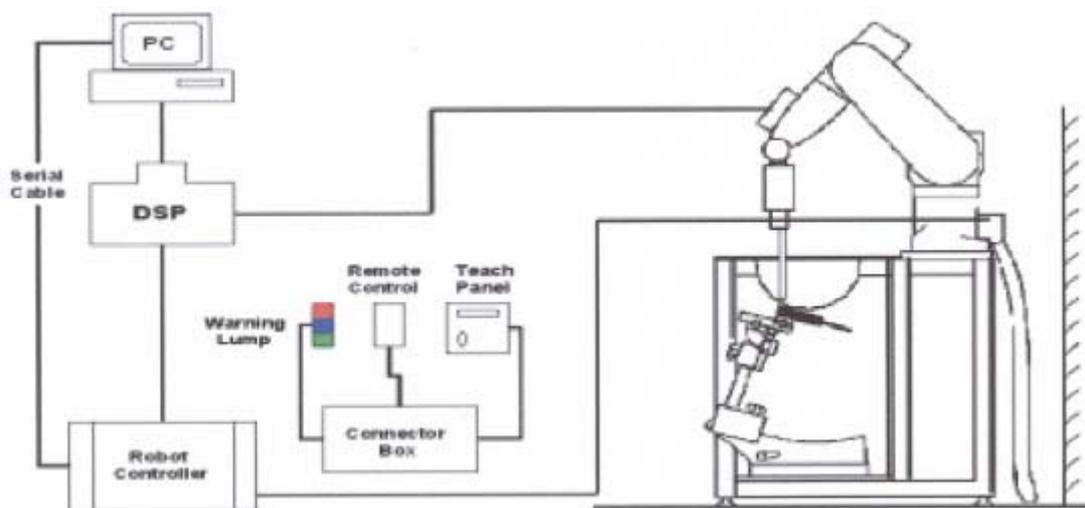


Figure 1. SAR Lab Test Measurement Set-up

3.2. DASY4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1. ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System (ET3DV6 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 3 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz, 1750 MHz, 1950MHz and 2450 MHz. (accuracy±8%) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to 2.5 GHz; Linearity: ±0.2 dB (30 MHz to 2.5 GHz)
Directivity	±0.2 dB in brain tissue (rotation around probe axis) ±0.4 dB in brain tissue (rotation around probe axis)
Dynamic Range	5u W/g to > 100mW/g; Linearity: ±0.2dB
Surface Detection	±0.2 mm repeatability in air and clear liquids over diffuse reflecting surface (ET3DV6 only)
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 2.5GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

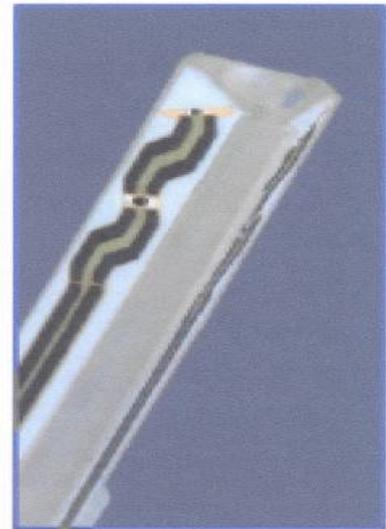


Figure 2 ET3DV6 E-field Probe

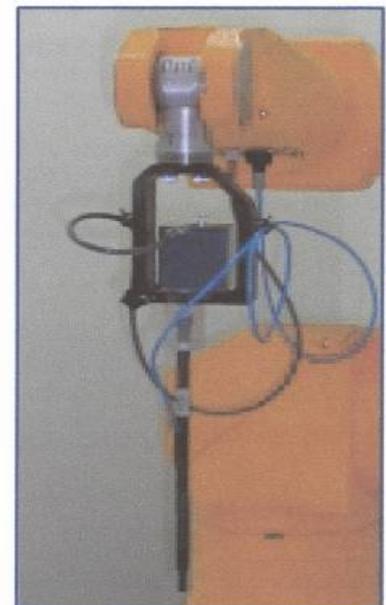


Figure 3 ET3DV6 E-field probe

3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

3.3. Other Test Equipment

3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.



Figure 4. Device Holder

3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5. Generic Twin Phantom

3.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.5. Data Storage and Evaluation

3.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2009-1061

Page 16 of 133

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \rho) / (4 \pi \cdot 1000)$$

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2009-1061

Page 17 of 133

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 8 and table 9.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.



Figure 6. System Check Set-up

TA Technology (Shanghai) Co., Ltd.
Test Report

3.7. Equivalent Tissues

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 2 and Table 3 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

Table 2: Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain)1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

Table 3: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

4. Laboratory Environment

Table 4: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

5. Characteristics of the Test

5.1. Applicable Limit Regulations

ANSI/IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2. Applicable Measurement Standards

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-1: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear. (frequency range of 300 MHz to 3 GHz).

IEC 62209-2:2008(106/162/CDV):: Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body. (frequency rang of 30MHz to 6GHz)

6. Conducted Output Power Measurement

6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

TA Technology (Shanghai) Co., Ltd.

Test Report

6.2. Conducted Power Results

Table 5: Conducted Power Measurement Results

GSM 850	Conducted Power		
	Channel 128	Channel 190	Channel 251
	(824.2MHz)	(836.6MHz)	(848.8MHz)
Results (dBm)	31.30	31.41	31.42
GSM 1900	Conducted Power		
	Channel 512	Channel 661	Channel 810
	(1850.2MHz)	(1880MHz)	(1909.8MHz)
Results (dBm)	28.62	28.48	28.13

Average Power

GSM850 + GPRS	Conducted Power(dBm)						
	Ch128	Ch 190	Ch 251		Ch128	Ch 190	Ch 251
1TXslot	31.38	31.47	31.46	-9.03dB	22.35	22.44	22.43
2TXslots	30.43	30.52	30.55	-6.02dB	24.41	24.50	24.53
3TXslots	29.40	29.51	29.49	-4.26dB	25.14	25.25	25.23
4TXslots	28.14	28.28	28.29	-3.01dB	25.13	25.27	25.28
GSM1900 + GPRS	Conducted Power(dBm)						
	Ch512	Ch 661	Ch 810		Ch512	Ch 661	Ch 810
1TXslot	28.74	28.62	28.31	-9.03dB	19.71	19.59	19.28
2TXslots	28.15	28.02	27.73	-6.02dB	22.13	22.00	21.71
3TXslots	27.03	26.92	26.61	-4.26dB	22.77	22.66	22.35
4TXslots	25.56	25.47	25.17	-3.01dB	22.55	22.46	22.16

Note:

1. Division Factor

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots

=>conducted power divided by (8/1) =>-9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots

=>conducted power divided by (8/2) =>-6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots

=>conducted power divided by (8/3) =>-4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots

=>conducted power divided by (8/4) =>-3.01dB

7. Test Results

7.1. Dielectric Performance

Table 6: Dielectric Performance of Head Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp °C
		ϵ_r	σ (s/m)	
835MHz (head)	Target value ± 5% window	41.50 39.43 — 43.58	0.90 0.86 — 0.95	/
	Measurement value 2009-9-10	41.86	0.92	21.8
1900MHz (head)	Target value ±5% window	40.00 38.00 — 42.00	1.40 1.33 — 1.47	/
	Measurement value 2009-9-11	39.50	1.41	21.9

Table 7: Dielectric Performance of Body Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp °C
		ϵ_r	σ (s/m)	
835MHz (body)	Target value ±5% window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2009-9-10	55.07	1.02	21.8
1900MHz (body)	Target value ±5% window	53.30 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2009-9-11	52.65	1.53	21.9

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2009-1061

Page 24 of 133

7.2. System Check Results

Table 8: System Check for Head tissue simulation liquid

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	ϵ_r	σ (s/m)	°C
835MHz	Recommended result ±10% window	1.55 1.40 — 1.71	2.40 2.16 — 2.64	41.20	0.91	/
	Measurement value 2009-9-10	1.50	2.30	41.86	0.92	21.9
1900MHz	Recommended result ±10% window	5.00 4.50 — 5.50	9.88 8.89 — 10.87	39.60	1.40	/
	Measurement value 2009-9-11	5.09	9.74	39.50	1.41	22.1

Note: 1. the graph results see ANNEX B.

2. Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

Table 9: System Check for Body tissue simulation liquid

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	ϵ_r	σ (s/m)	°C
835MHz	Recommended result ±10% window	1.58 1.42 — 1.74	2.41 2.17 — 2.65	54.60	0.99	/
	Measurement value 2009-9-10	1.58	2.40	55.07	1.02	21.9
1900 MHz	Recommended result ±10% window	5.18 4.66 — 5.70	10.20 9.18 — 11.22	52.90	1.55	/
	Measurement value 2009-9-11	5.14	10.00	52.65	1.53	21.7

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2009-1061

Page 25 of 133

7.3. Test Results

7.3.1. Summary of Measurement Results (GSM850/GPRS)

Table 10: SAR Values (GSM850/GPRS)

Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average	Power Drift(dB)	
Test position of Head (Open)					
Left hand, Touch cheek	High	0.505	0.830	0.022	Figure 15
	Middle	0.471	0.775	0.045	Figure 17
	Low	0.435	0.708	-0.046	Figure 19
Left hand, Tilt 15 Degree	Middle	0.109	0.145	0.025	Figure 21
Right hand, Touch cheek	Middle	0.442	0.695	0.112	Figure 23
Right hand, Tilt 15 Degree	Middle	0.100(MAX)	0.134(MAX)	0.046	Figure 25
Test position of Body (Close) (Distance 15mm)					
Towards Ground	Middle	0.435	0.671	-0.140	Figure 27
Towards phantom	Middle	0.147	0.218	-0.016	Figure 29
Test position of Body (Open) (Distance 15mm)					
Towards Ground	High	0.572	0.871	-0.066	Figure 31
	Middle	0.597	0.906	-0.085	Figure 33
	Low	0.548	0.828	-0.040	Figure 35
Worst case position of Body with Earphone(Open) (Distance 15mm)					
Towards Ground	Middle	0.616	0.933	-0.110	Figure 37
Worst case position of Body with GPRS(4UP) (Open) (Distance 15mm)					
Towards Ground	Middle	0.985	1.470	-0.098	Figure 39

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2009-1061

Page 26 of 133

7.3.2. Summary of Measurement Results (GSM1900/GPRS)

Table 11: SAR Values (GSM1900/GPRS)

Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average	Power Drift(dB)	
Test position of Head (Open)					
Left hand, Touch cheek	High	0.557	1.030	0.094	Figure 41
	Middle	0.713	1.320	-0.068	Figure 43
	Low	0.757	1.390	0.050	Figure 45
Left hand, Tilt 15 Degree	Middle	0.199	0.340	-0.004	Figure 47
Right hand, Touch cheek	High	0.448	0.808	0.011	Figure 49
	Middle	0.558	0.997	0.013	Figure 51
	Low	0.613	1.090	0.023	Figure 53
Right hand, Tilt 15 Degree	Middle	0.203	0.344	0.011	Figure 55
Test position of Body (Close) (Distance 15mm)					
Towards Ground	Middle	0.128	0.220	-0.032	Figure 57
Towards phantom	Middle	0.062	0.101	-0.012	Figure 59
Test position of Body (Open) (Distance 15mm)					
Towards Ground	High	0.160(MAX)	0.290(MAX)	-0.033	Figure 61
	Middle	0.139(MAX)	0.253(MAX)	-0.007	Figure 63
	Low	0.164(MAX)	0.260(MAX)	0.035	Figure 65
Worst case position of Body with Earphone (Open) (Distance 15mm)					
Towards Ground	High	0.185(MAX)	0.335(MAX)	-0.026	Figure 67
Worst case position of Body with GPRS(3UP) (Open) (Distance 15mm)					
Towards Ground	High	0.320(MAX)	0.576(MAX)	-0.154	Figure 69

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.


2. Upper and lower frequencies were measured at the worst position.

3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.

4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

7.3.3. Summary of Measurement Results (Bluetooth function)

The distance between BT antenna and GSM antenna is <2.2cm. The location of the antennas inside mobile phone is shown below:

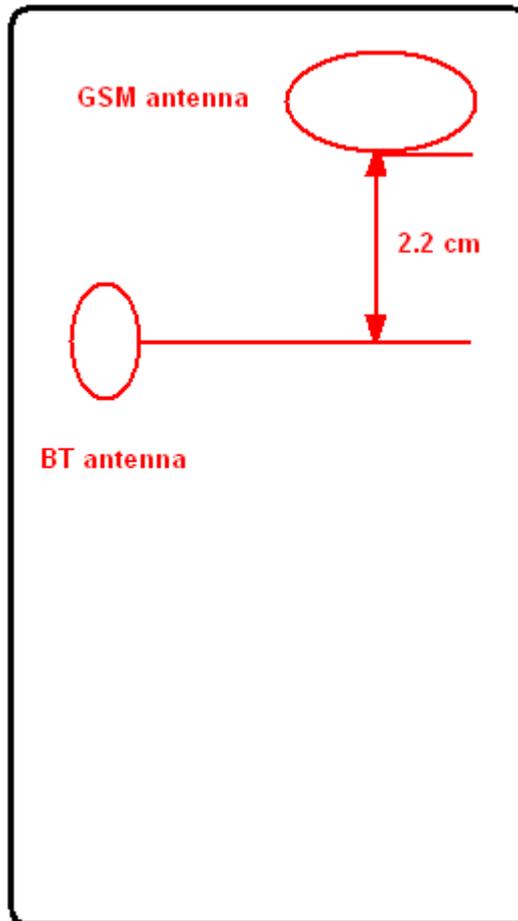

The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 Mhz	Ch 78 2480 MHz
Peak Conducted Output Power(dBm)	-4.49	-5.58	-5.85

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR and simultaneous transmission SAR are not required for BT transmitter, because the output power of BT transmitter is $\leq P_{Ref}$ and its antenna is $\leq 2.2\text{cm}$ from other antenna.

7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR_{1g} are 1.39 W/kg (head) and 1.47 W/kg (body) that are below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2009-1061

Page 28 of 133

8. Measurement Uncertainty

No.	source	Type	Uncertainty Value (%)	Probability Distribution	k	c_i	Standard uncertainty u_i (%)	Degree of freedom V_{eff} or v_i
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	probe calibration	B	5.9	N	1	1	5.9	∞
3	axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
4	Hemispherical isotropy of the probe	B	9.4	R	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
6	boundary effect	B	1.9	R	$\sqrt{3}$	1	1.1	∞
7	probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
8	System detection limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
9	readout Electronics	B	1.0	N	1	1	1.0	∞
10	response time	B	0	R	$\sqrt{3}$	1	0	∞
11	integration time	B	4.32	R	$\sqrt{3}$	1	2.5	∞
12	noise	B	0	R	$\sqrt{3}$	1	0	∞
13	RF Ambient Conditions	B	3	R	$\sqrt{3}$	1	1.73	∞
14	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
15	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
16	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test sample Related								
17	-Test Sample Positioning	A	2.9	N	1	1	2.9	5
18	-Device Holder Uncertainty	A	4.1	N	1	1	4.1	5
19	-Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Physical parameter								

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA2009-1061

Page 29 of 133

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	∞	
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	$\frac{0.6}{4}$	1.8	∞	
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	$\frac{0.6}{4}$	3.2	∞	
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞	
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	∞	
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0		

9. Main Test Instruments

Table 12: List of Main Instruments


No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2009	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2009	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	MY48360988	December 16, 2008	One year
08	E-field Probe	ET3DV6	1737	November 25, 2008	One year
09	DAE	DAE4	452	November 18, 2008	One year
10	Validation Kit 835MHz	D835V2	4d020	July 15, 2009	One year
11	Validation Kit 1900MHz	D1900V2	5d060	July 15, 2009	One year

*****END OF REPORT BODY*****


ANNEX A: Test Layout




Picture 1: Specific Absorption Rate Test Layout

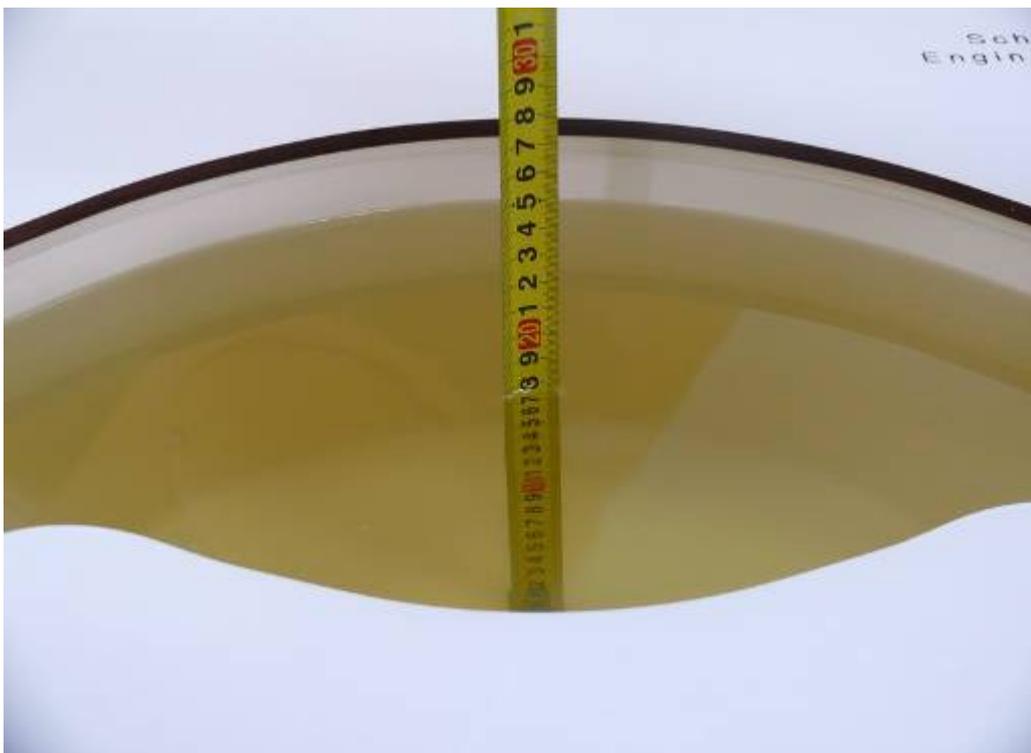

Picture 2: Liquid depth in the flat Phantom (835MHz)

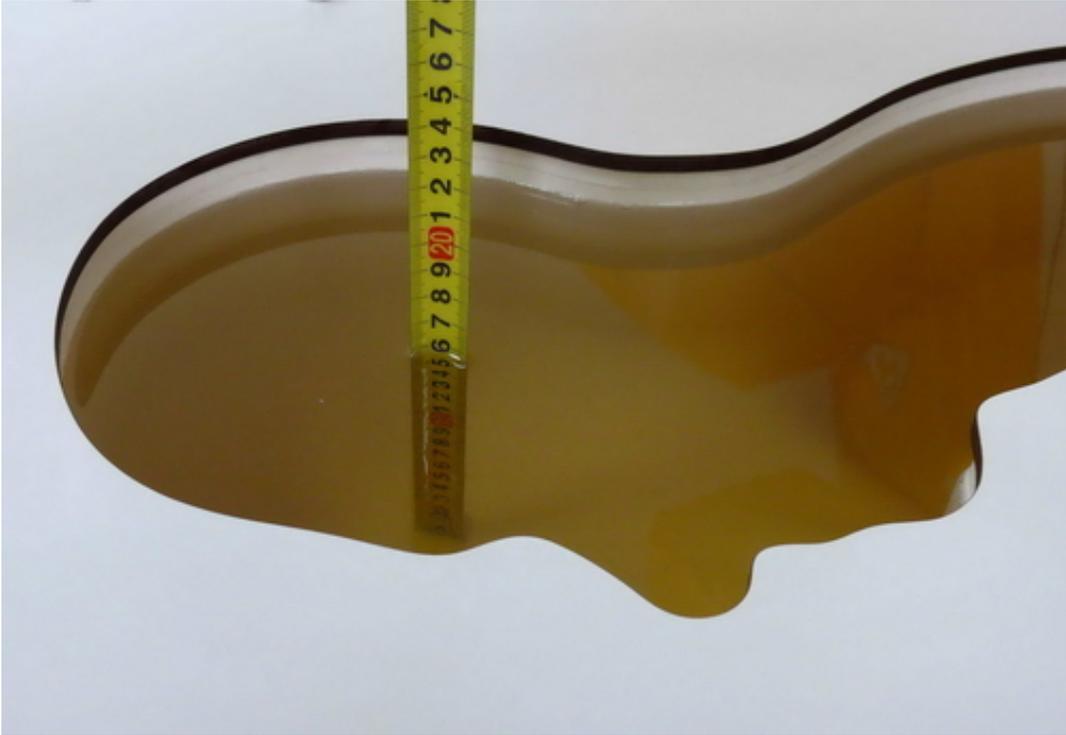

Picture 3: Liquid depth in the head Phantom (835MHz)

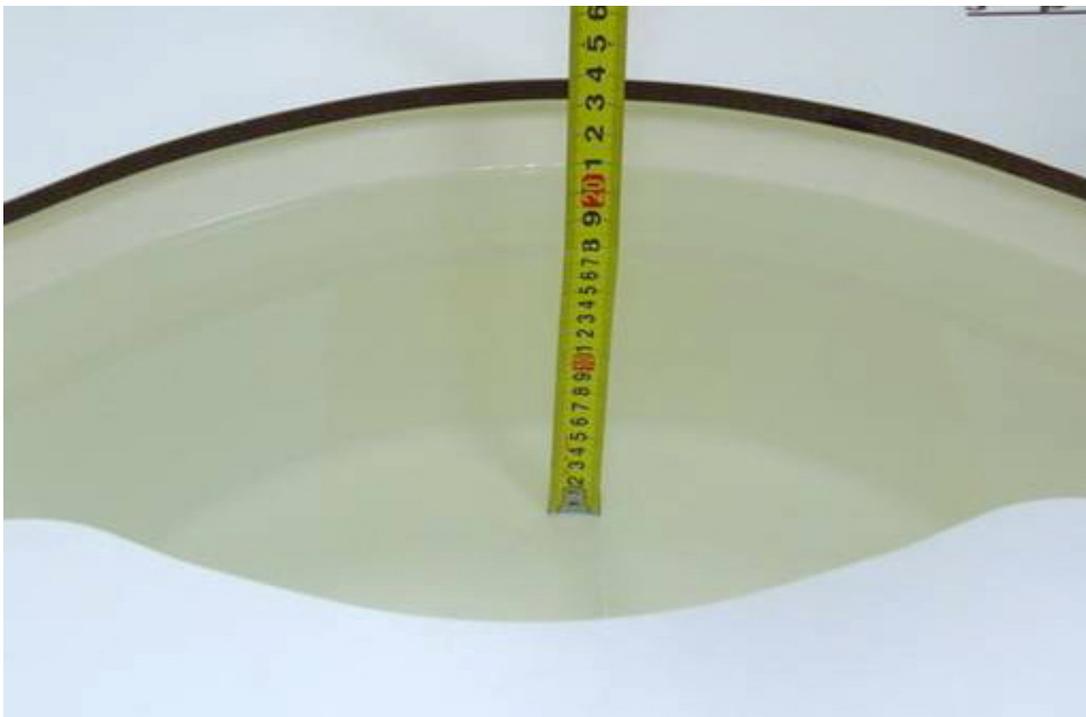

Picture 4: Liquid depth in the flat Phantom (1900 MHz)



Picture 5: liquid depth in the head Phantom (1900 MHz)

ANNEX B: System Check Results

System Performance Check at 835 MHz Head TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020

Date/Time: 9/10/2009 8:06:58 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.33, 6.33, 6.33); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.81 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.8 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.3 mW/g; SAR(10 g) = 1.5 mW/g

Maximum value of SAR (measured) = 2.83 mW/g

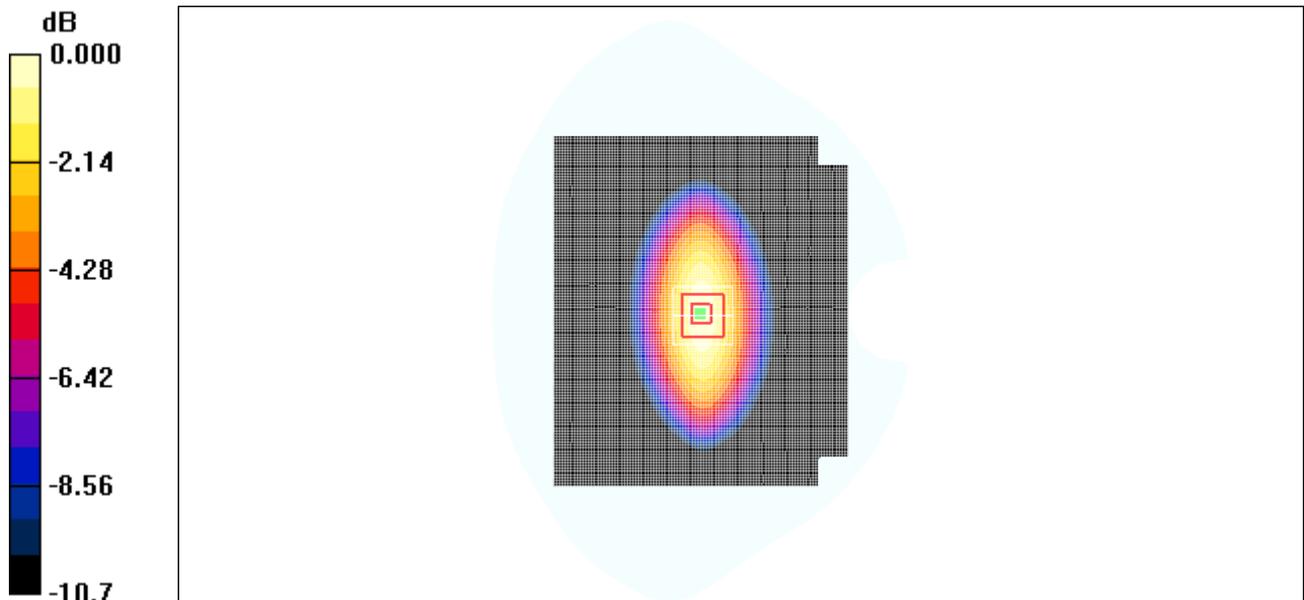


Figure 7 System Performance Check 835MHz 250mW

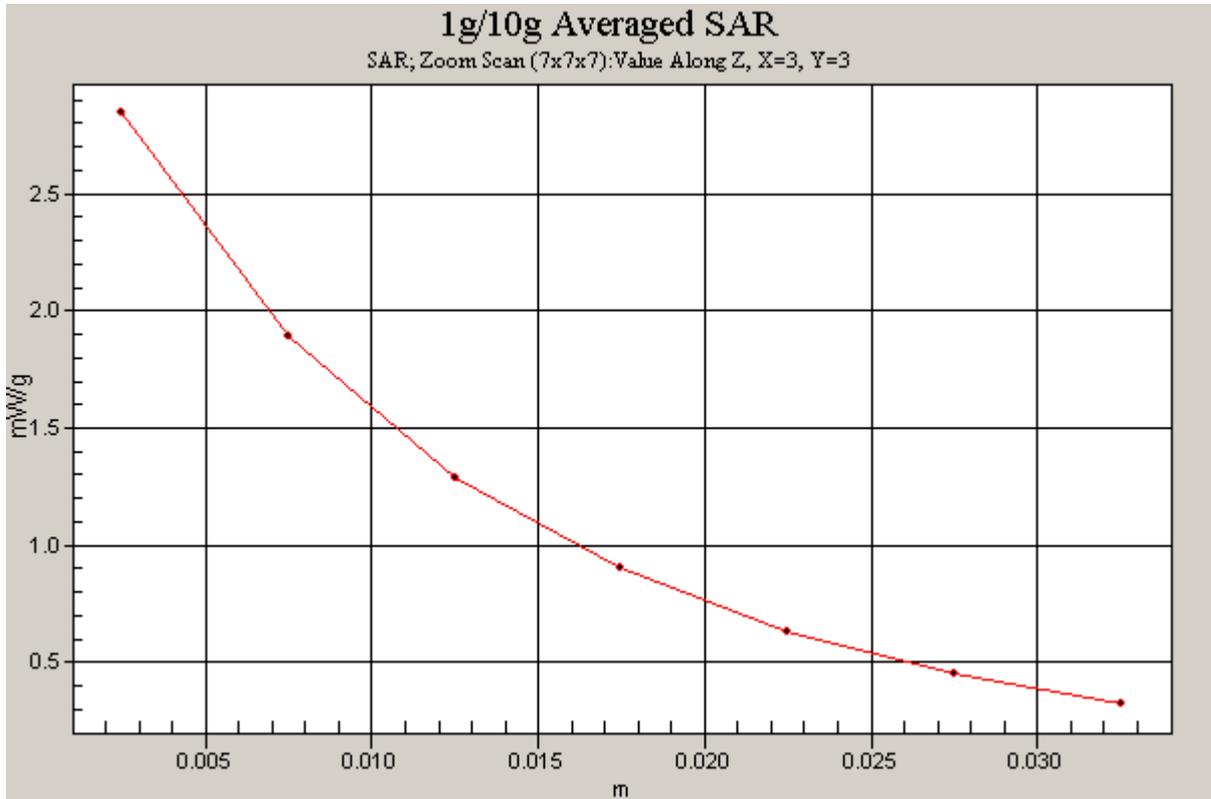


Figure 8 Z-Scan at power reference point (system check at 835 MHz dipole)

System Performance Check at 835 MHz Body TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020

Date/Time: 9/10/2009 7:15:49 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.02 \text{ mho/m}$; $\epsilon_r = 55.07$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.93 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

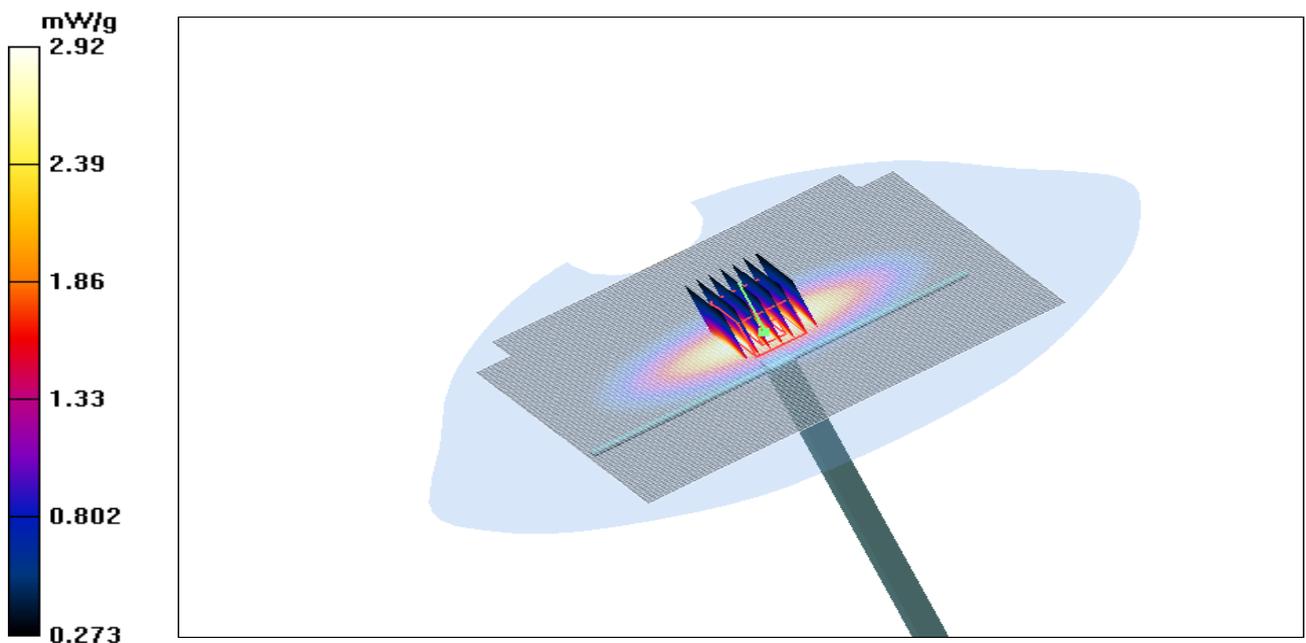


Figure 9 System Performance Check 835MHz 250mW

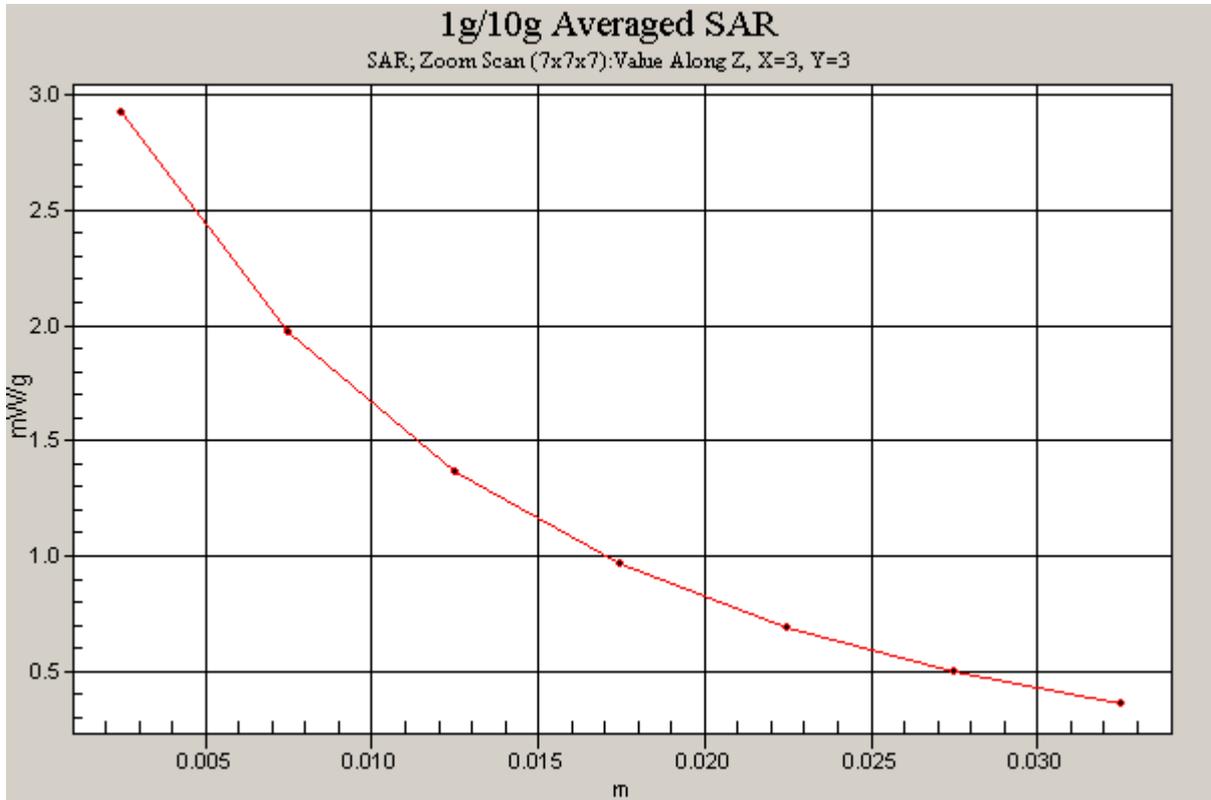


Figure 10 Z-Scan at power reference point (system Check at 835 MHz dipole)

System Performance Check at 1900 MHz Head TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d060

Date/Time: 9/11/2009 3:15:58 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.1 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.74 mW/g; SAR(10 g) = 5.09 mW/g

Maximum value of SAR (measured) = 11.1 mW/g

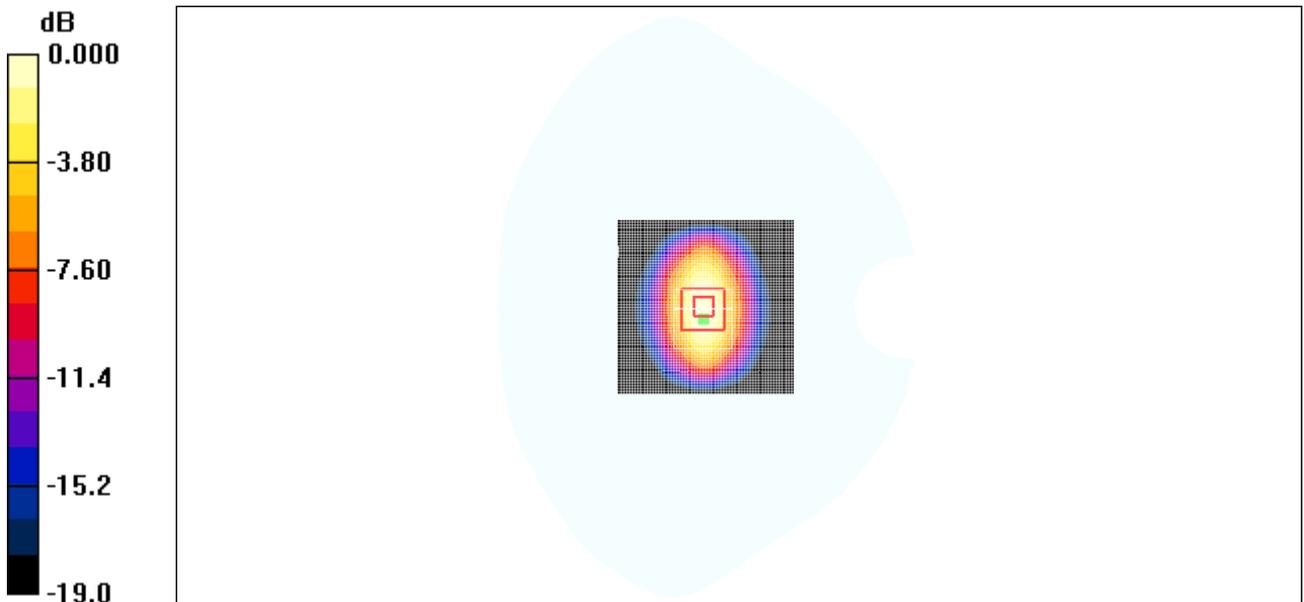


Figure 11 System Performance Check 1900MHz 250mW

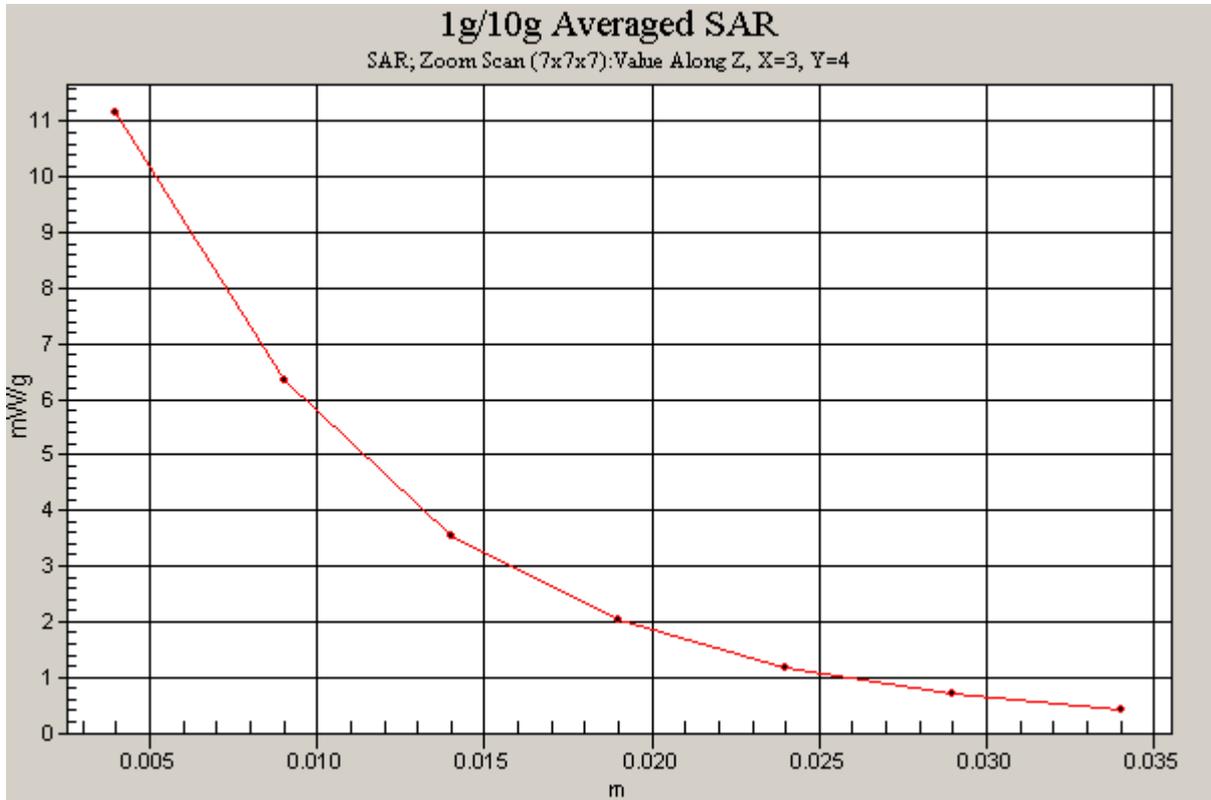


Figure 12 Z-Scan at power reference point (system check at 1900 MHz dipole)

System Performance Check at 1900 MHz Body TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d060

Date/Time: 9/11/2009 3:15:49 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.65$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.14 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

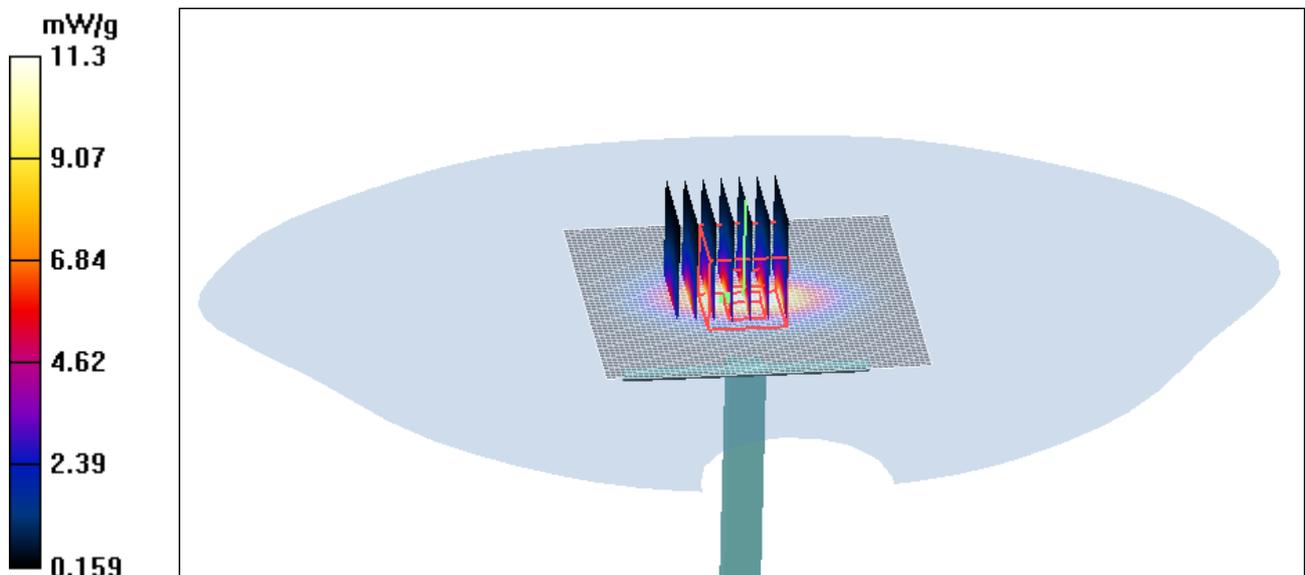


Figure 13 System Performance Check 1900MHz 250mW

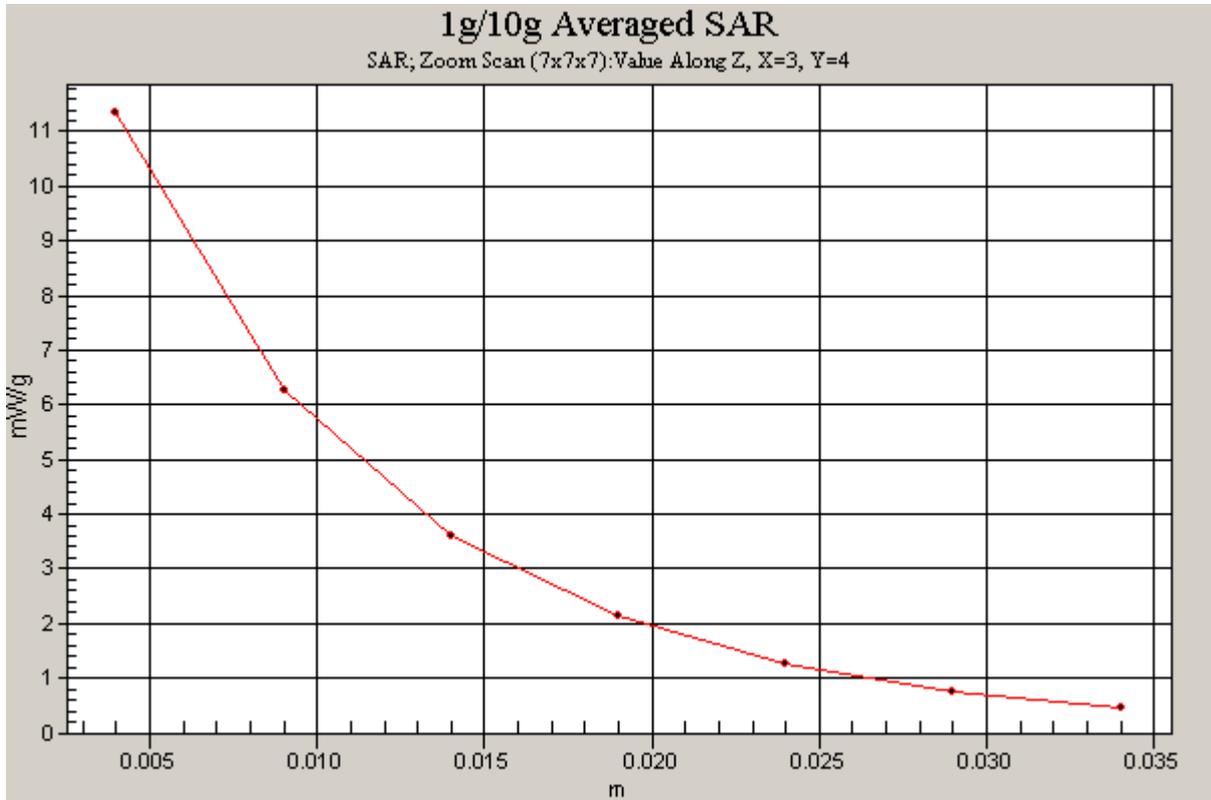


Figure 14 Z-Scan at power reference point (system Check at 1900 MHz dipole)

ANNEX C: Graph Results

GSM 850 Left Cheek High Open

Date/Time: 9/10/2009 10:45:58 PM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.936$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.33, 6.33, 6.33); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek High/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.900 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.505 mW/g

Maximum value of SAR (measured) = 0.905 mW/g

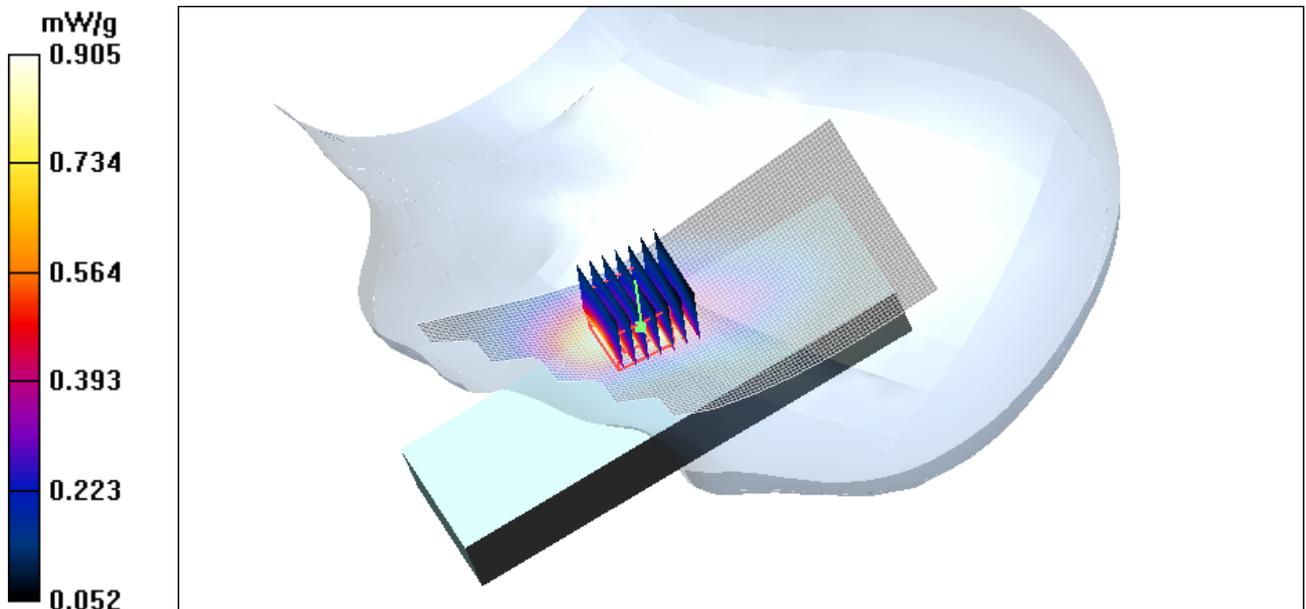


Figure 15 Left Hand Touch Cheek Open GSM 850 Channel 251

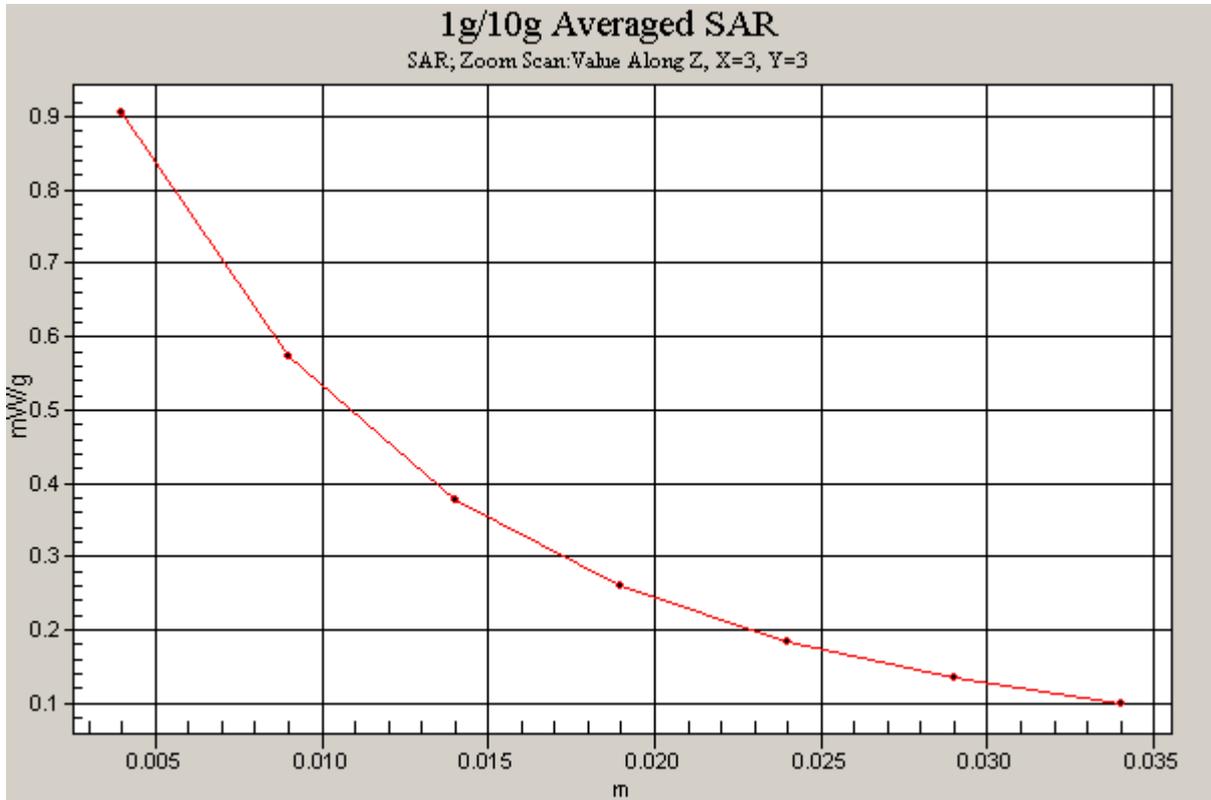


Figure 16 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 850 Channel 251)

GSM 850 Left Cheek Middle Open

Date/Time: 9/10/2009 10:20:18 PM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.924$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.33, 6.33, 6.33); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.844 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.64 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.471 mW/g

Maximum value of SAR (measured) = 0.846 mW/g

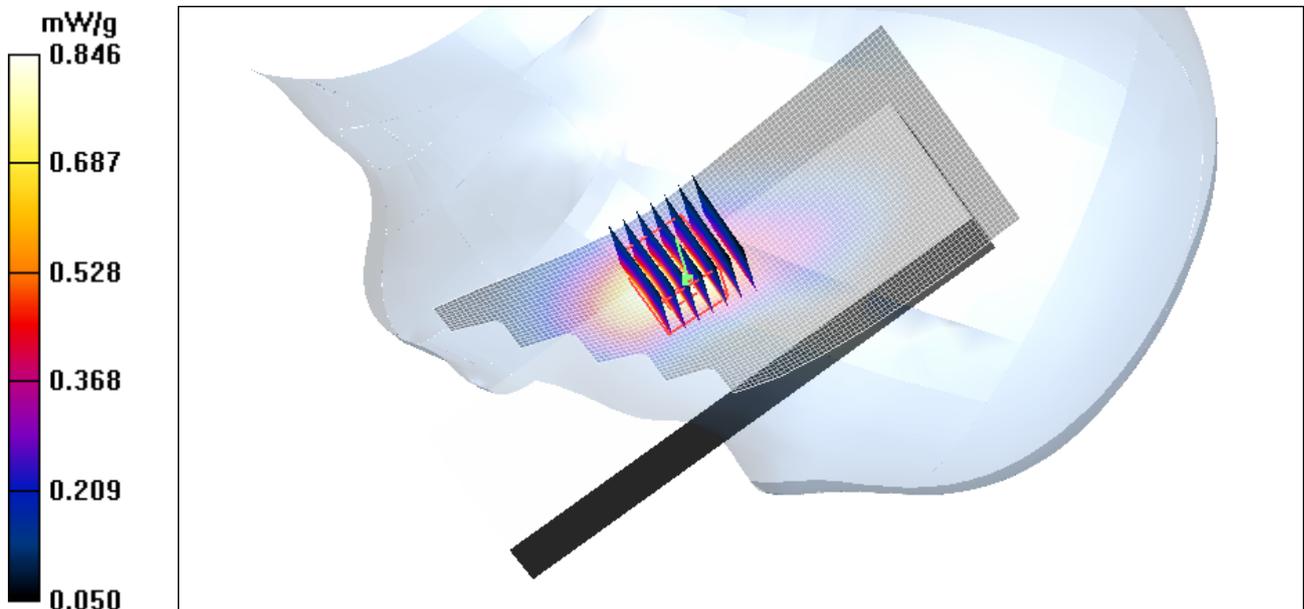


Figure 17 Left Hand Touch Cheek Open GSM 850 Channel 190

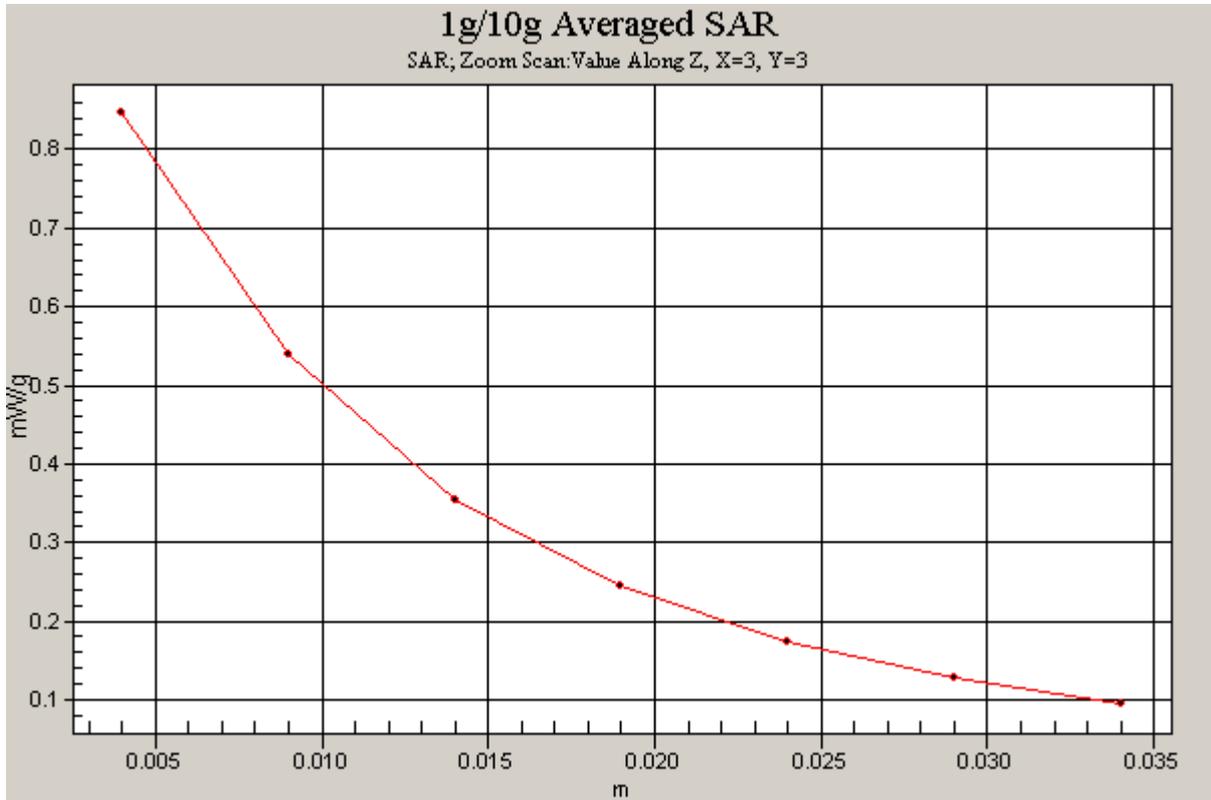


Figure 18 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 850 Channel 190)

GSM 850 Left Cheek Low Open

Date/Time: 9/10/2009 11:09:04 PM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.33, 6.33, 6.33); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Low/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.770 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.41 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 0.773 mW/g

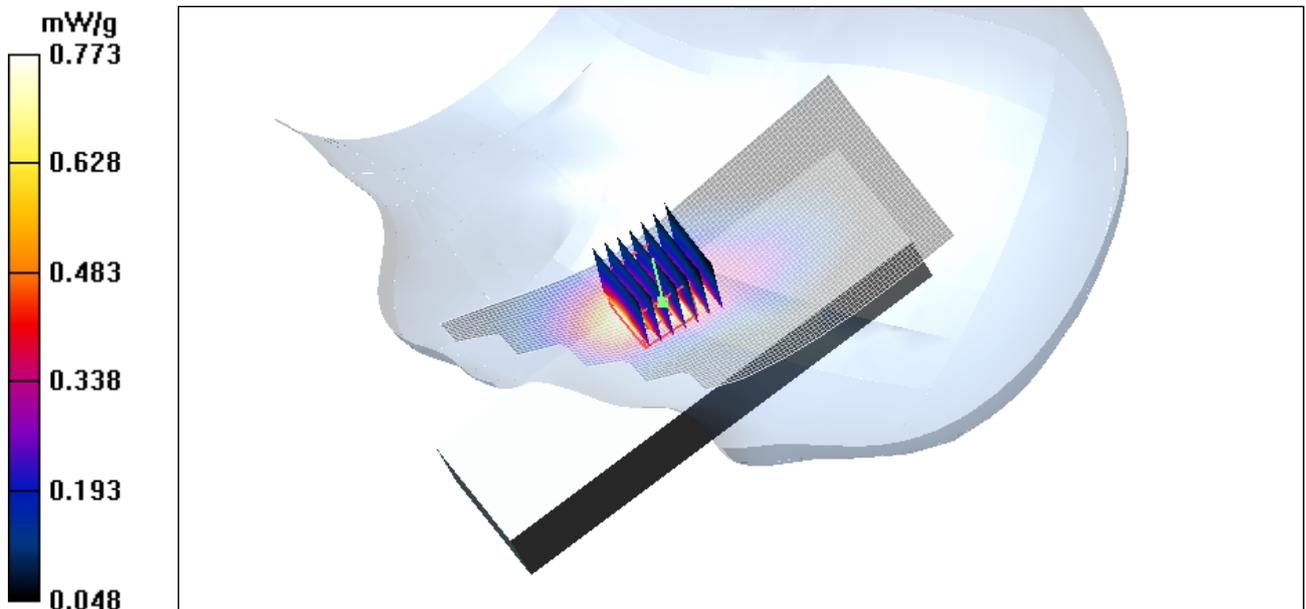


Figure 19 Left Hand Touch Cheek Open GSM 850 Channel 128

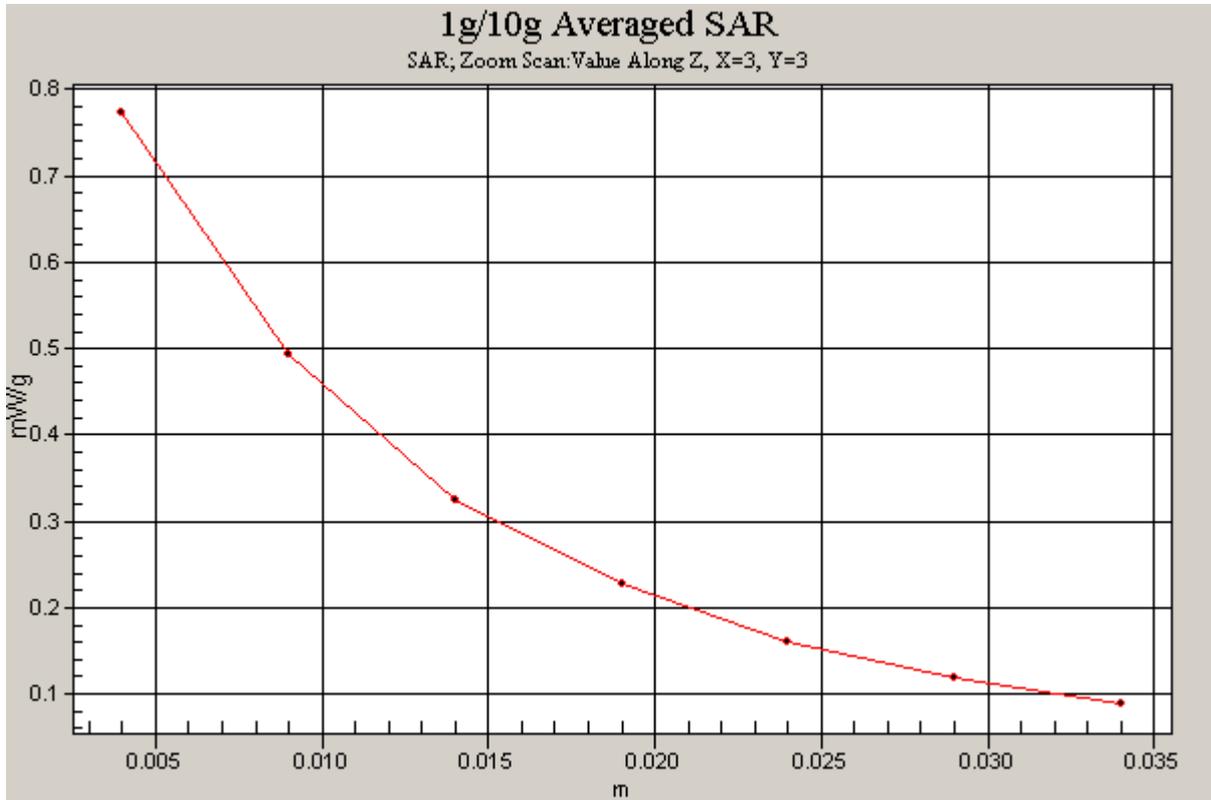


Figure 20 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 850 Channel 128)

GSM 850 Left Tilt Middle Open

Date/Time: 9/10/2009 11:40:14 PM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.924$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.33, 6.33, 6.33); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.154 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.48 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.153 mW/g

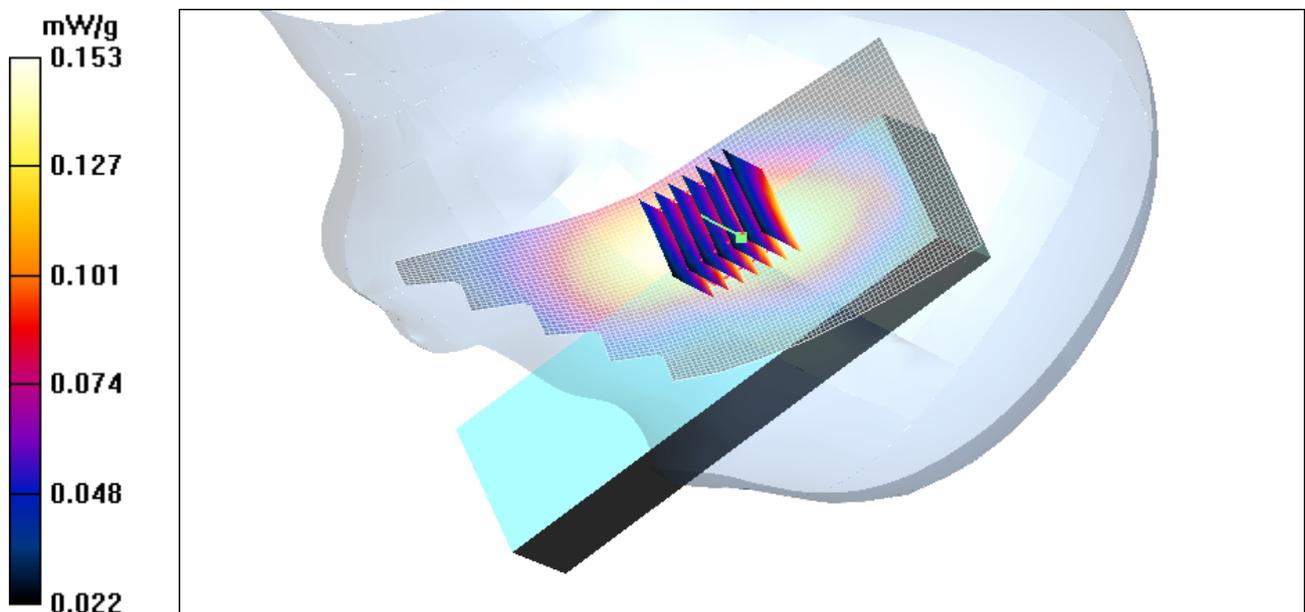


Figure 21 Left Hand Tilt 15° Open GSM 850 Channel 190

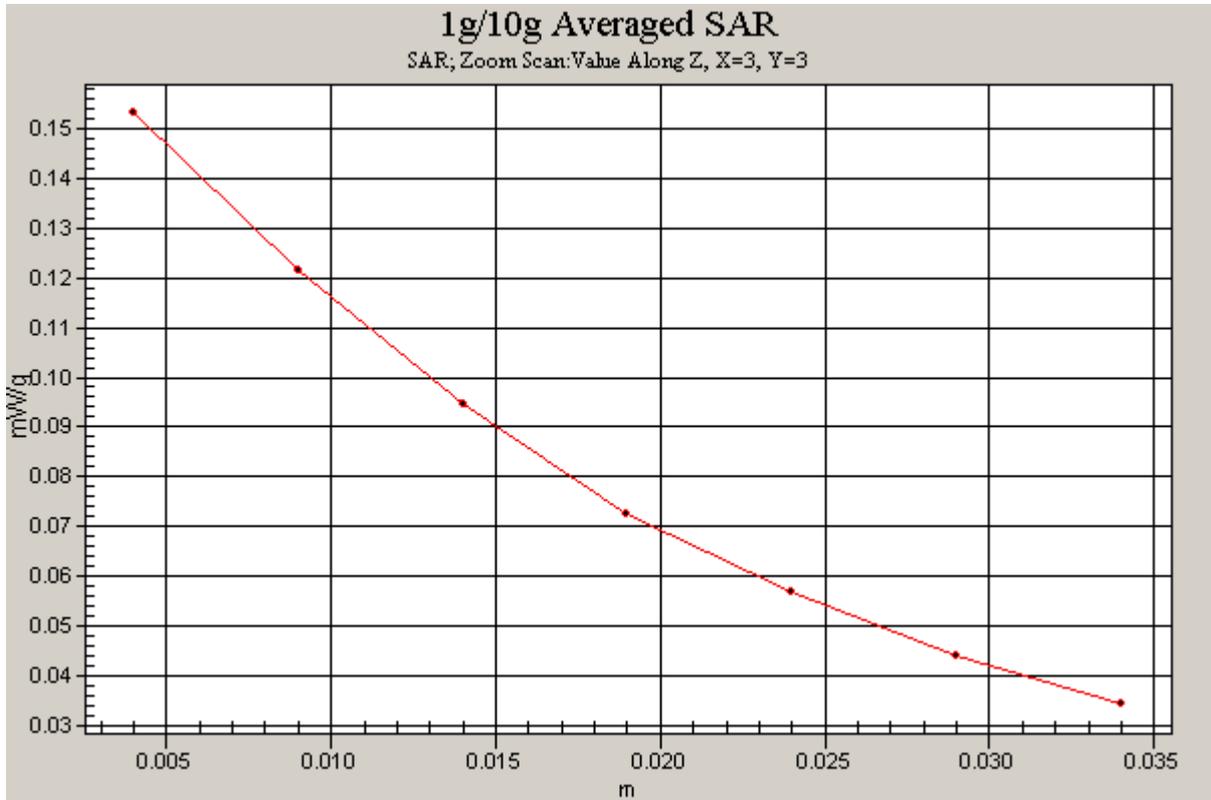


Figure 22 Z-Scan at power reference point (Left Hand Tilt 15° Open GSM 850 Channel 190)

GSM 850 Right Cheek Middle Open

Date/Time: 9/11/2009 12:09:07 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.924$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.33, 6.33, 6.33); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.732 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.28 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.442 mW/g

Maximum value of SAR (measured) = 0.756 mW/g

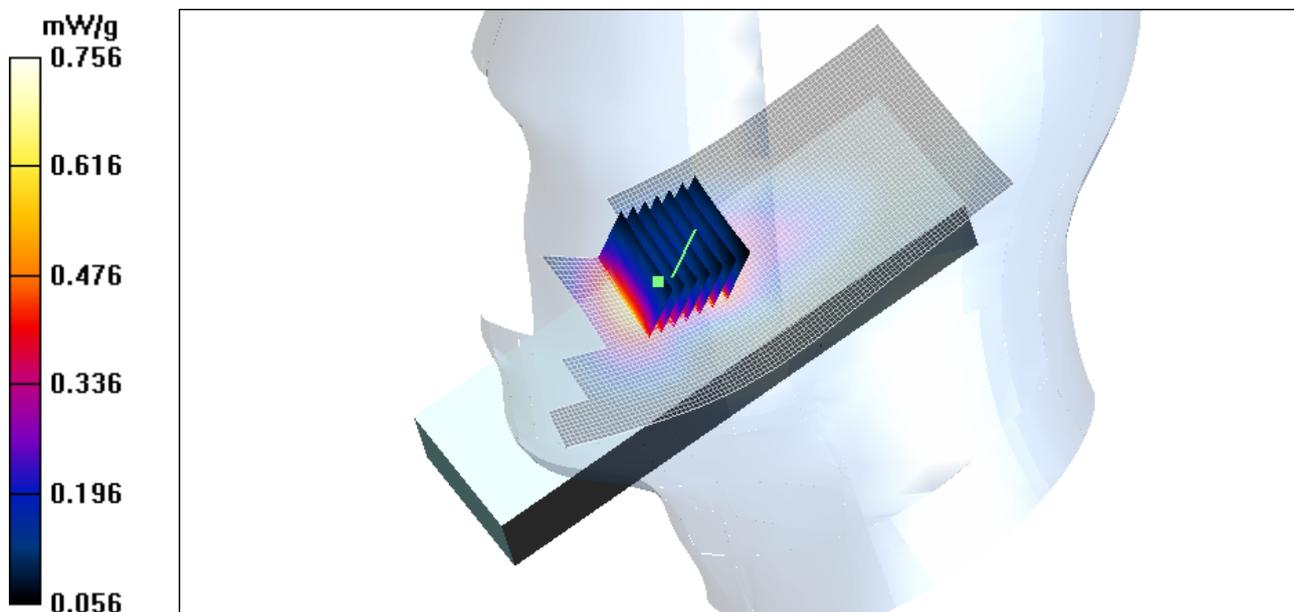


Figure 23 Right Hand Touch Cheek Open GSM 850 Channel 190

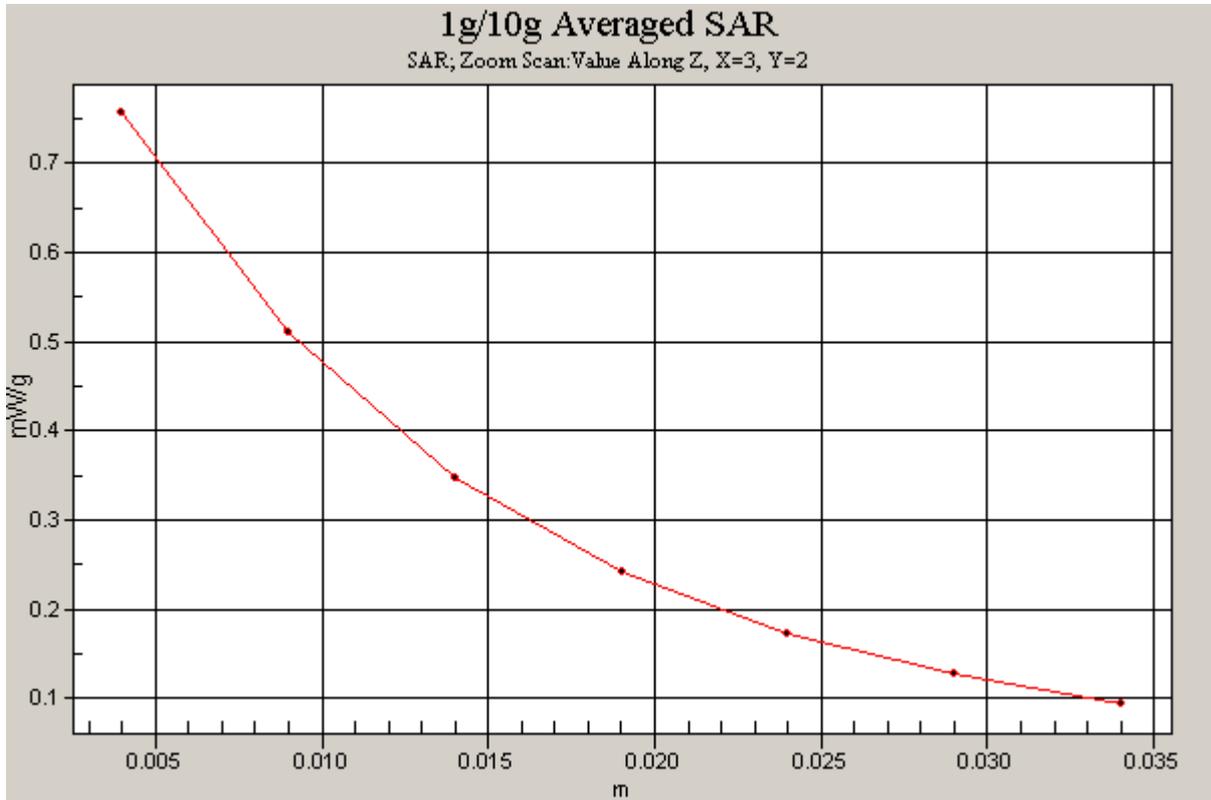


Figure 24 Z-Scan at power reference point (Right Hand Touch Cheek Open GSM 850 Channel 190)

GSM 850 Right Tilt Middle Open

Date/Time: 9/11/2009 12:54:39 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.924$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.33, 6.33, 6.33); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.142 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.98 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.98 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.140 mW/g

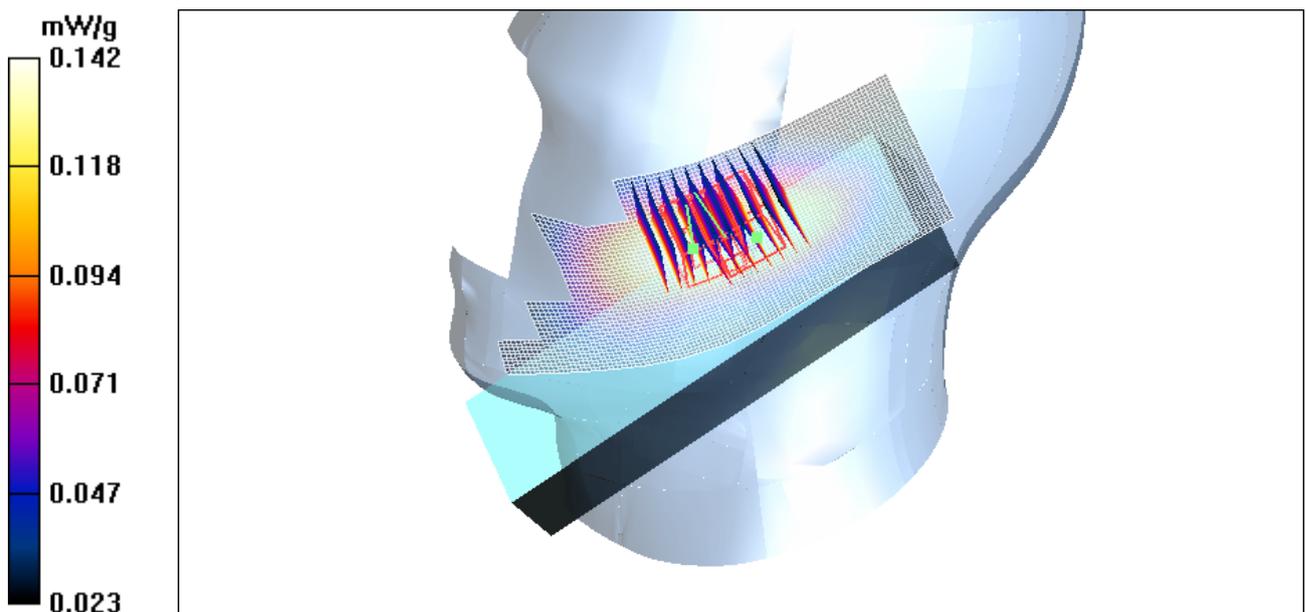


Figure 25 Right Hand Tilt 15° Open GSM 850 Channel 190

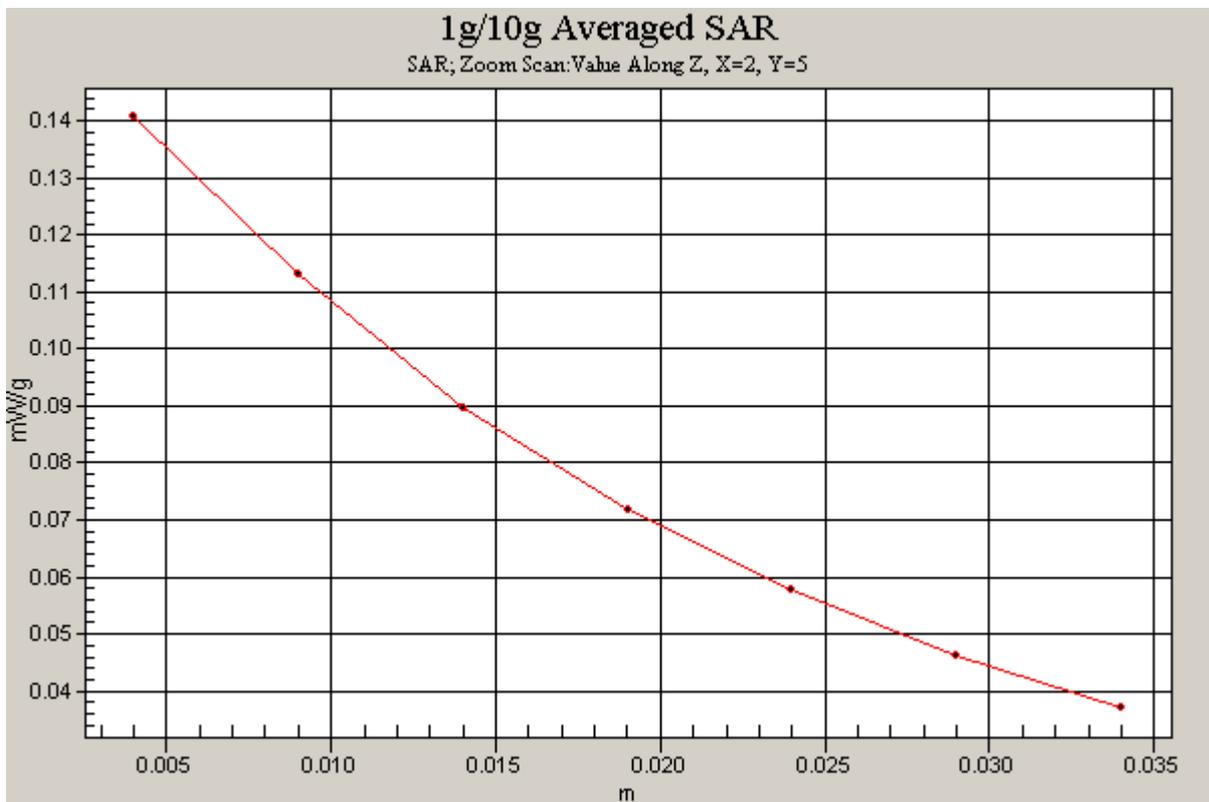
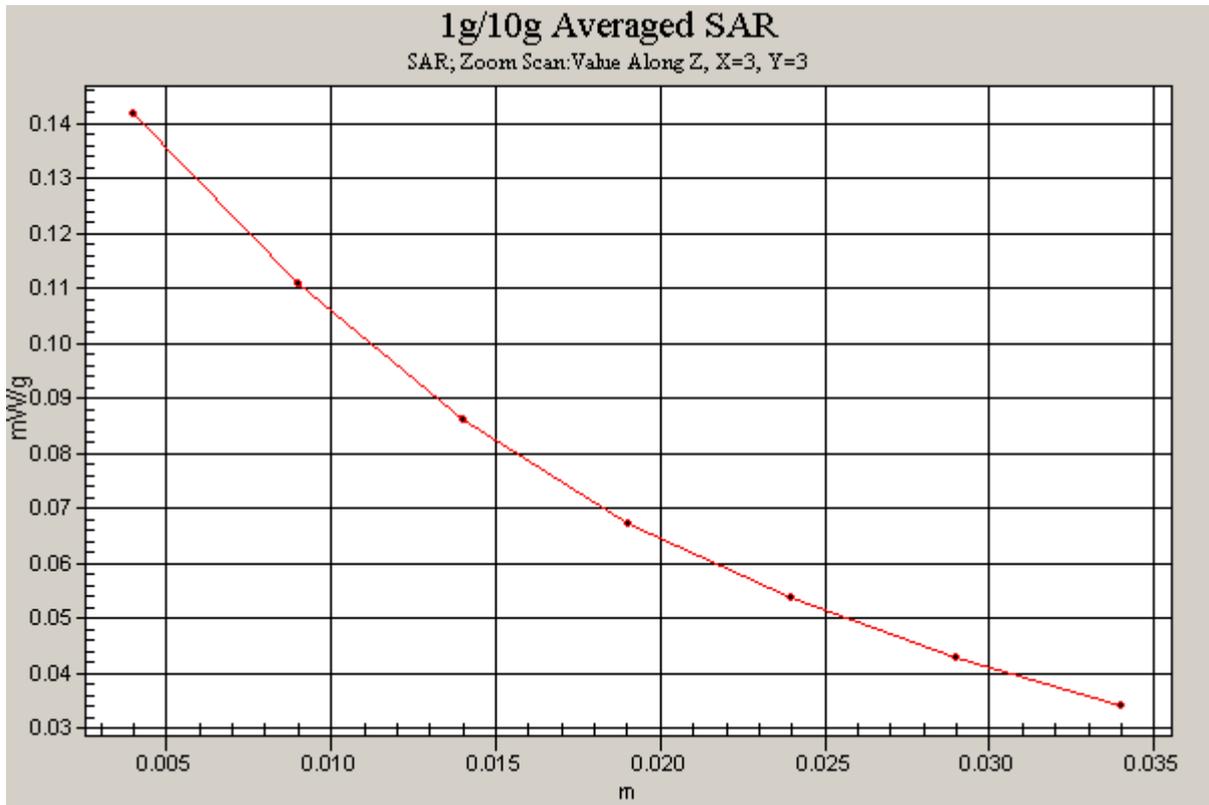


Figure 26 Z-Scan at power reference point (Right Hand Tilt 15° Open GSM 850 Channel 190)

GSM 850 Towards Ground Middle Close

Date/Time: 9/10/2009 9:57:31 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.721 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 0.721 mW/g

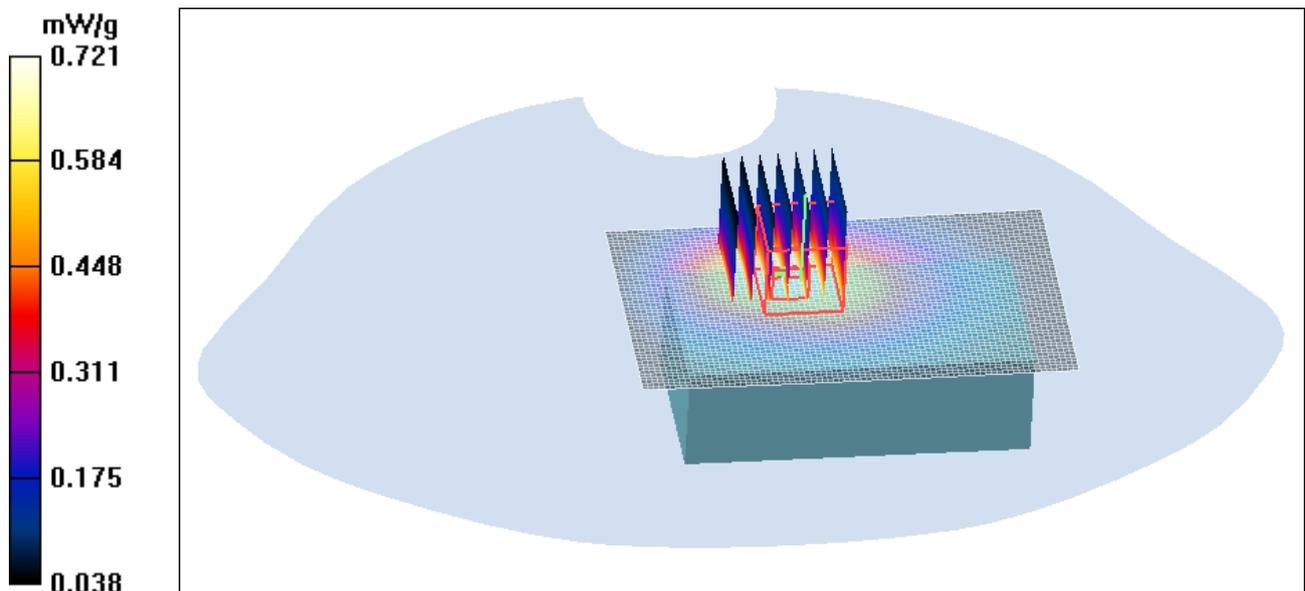


Figure 27 Body, Towards Ground, Close GSM 850 Channel 190

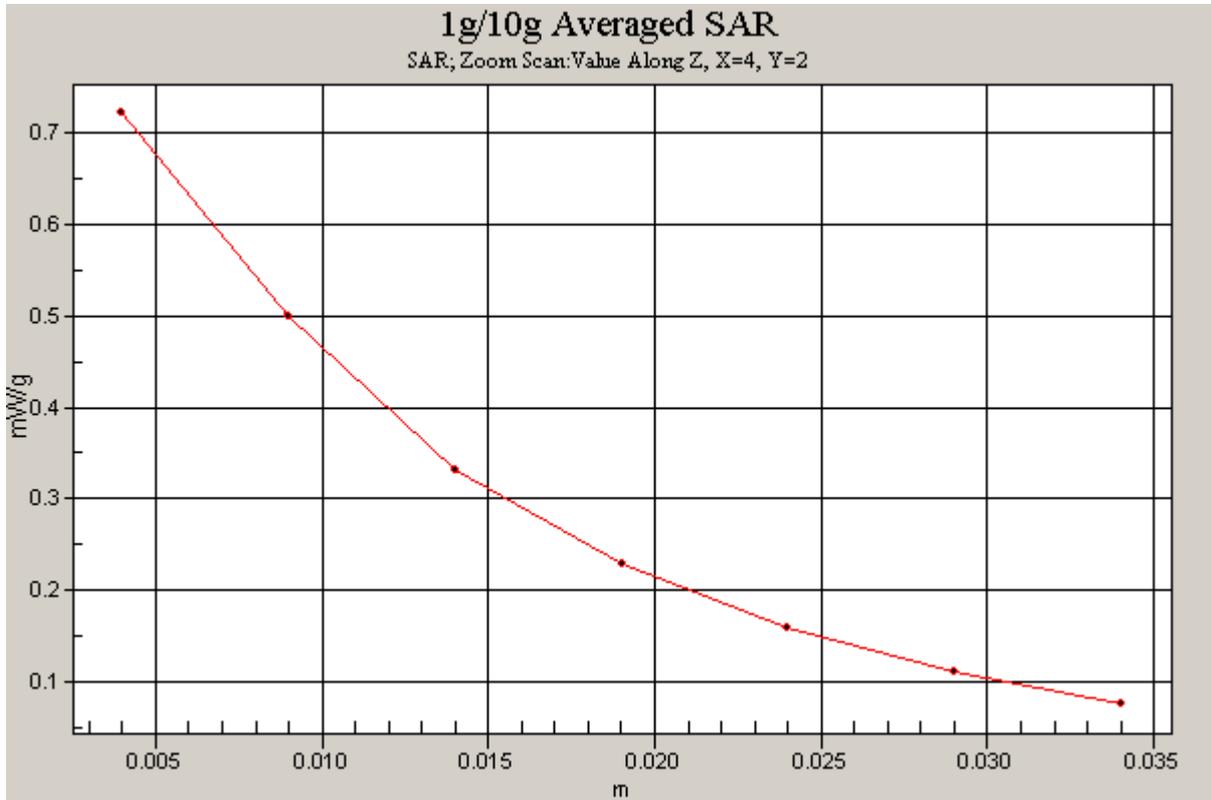


Figure 28 Z-Scan at power reference point (Body, Towards Ground, Close GSM 850 Channel 190)

GSM 850 Towards Phantom Middle Close

Date/Time: 9/10/2009 10:15:21 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Phantom Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.232 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.147 mW/g

Maximum value of SAR (measured) = 0.235 mW/g

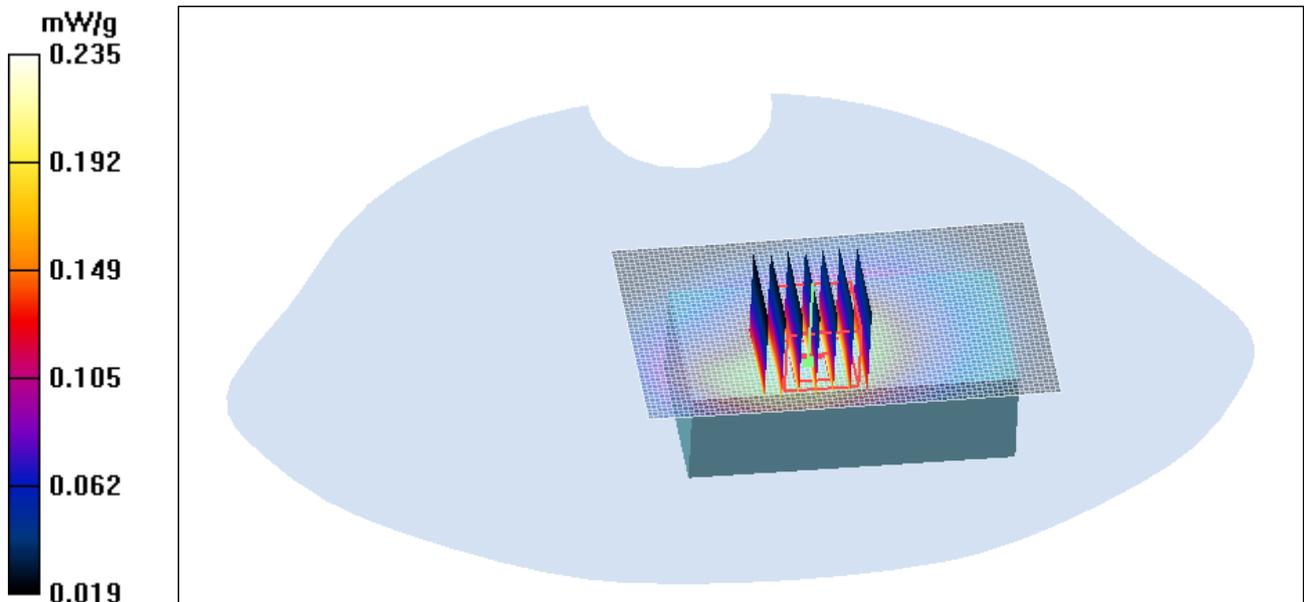


Figure 29 Body, Towards Phantom, Close GSM 850 Channel190

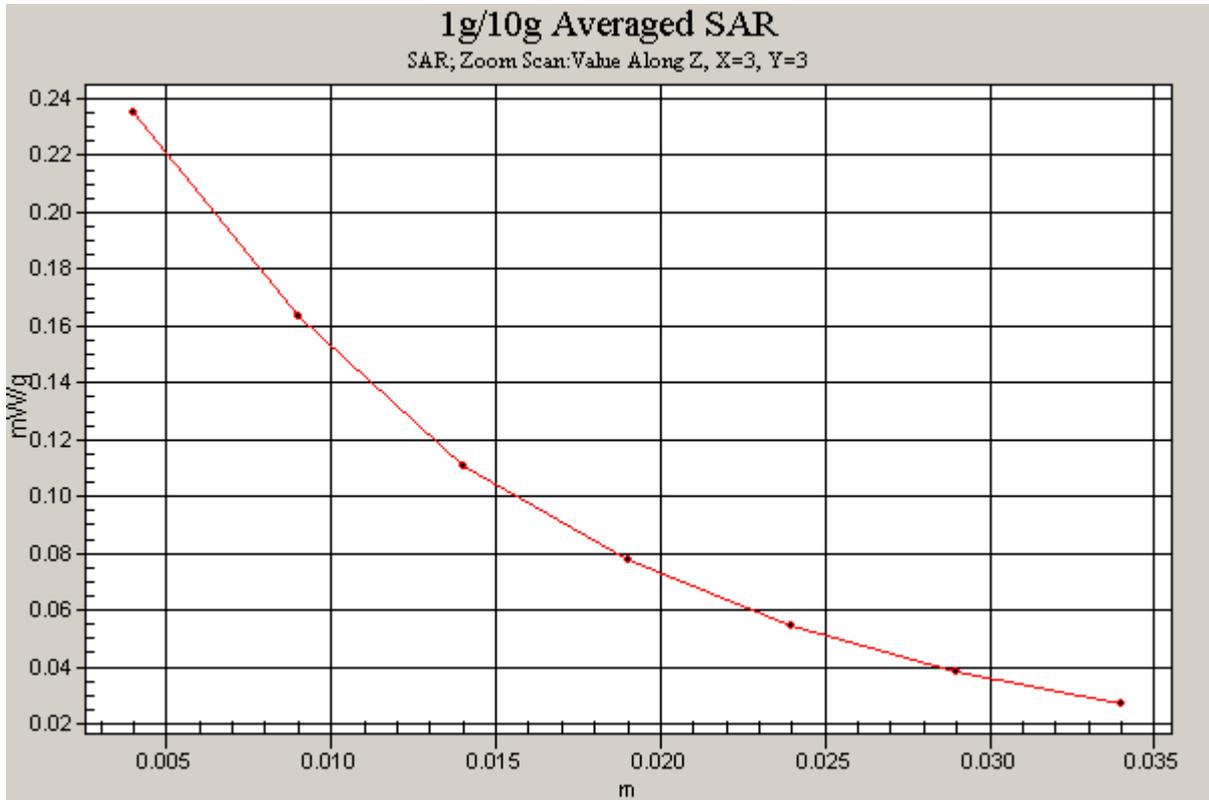


Figure 30 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 850 Channel190)

GSM 850 Towards Ground High Open

Date/Time: 9/10/2009 10:55:13 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 1.03$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground High/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.936 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.871 mW/g; SAR(10 g) = 0.572 mW/g

Maximum value of SAR (measured) = 0.936 mW/g

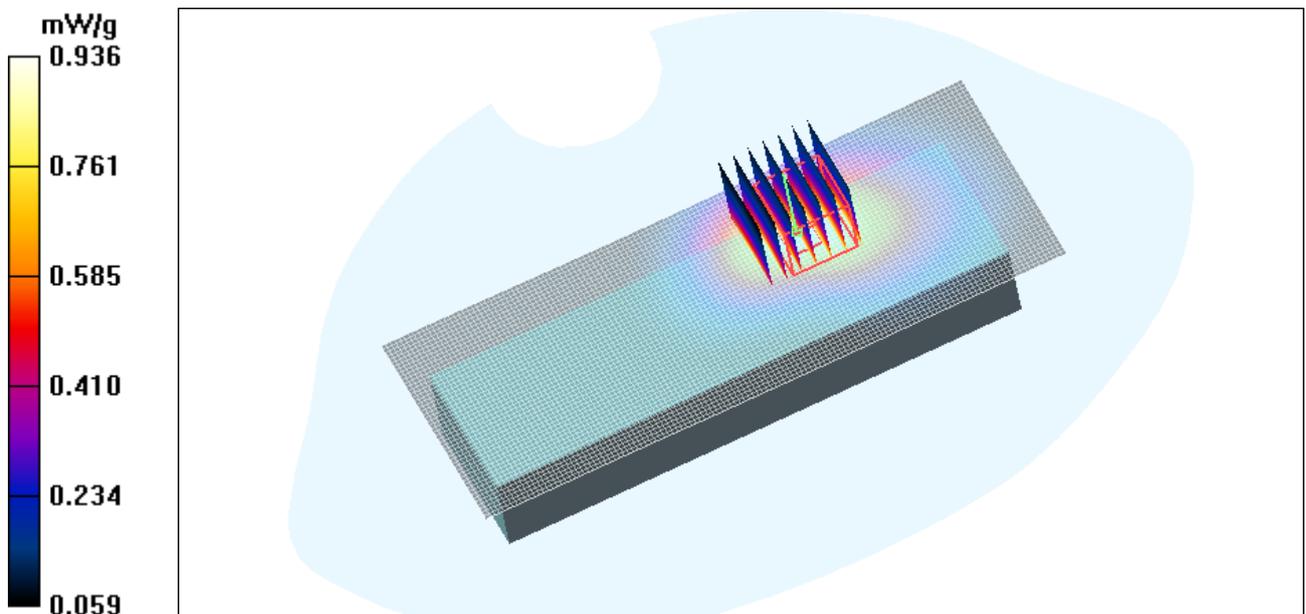


Figure 31 Body, Towards Ground, Open GSM 850 Channel 251

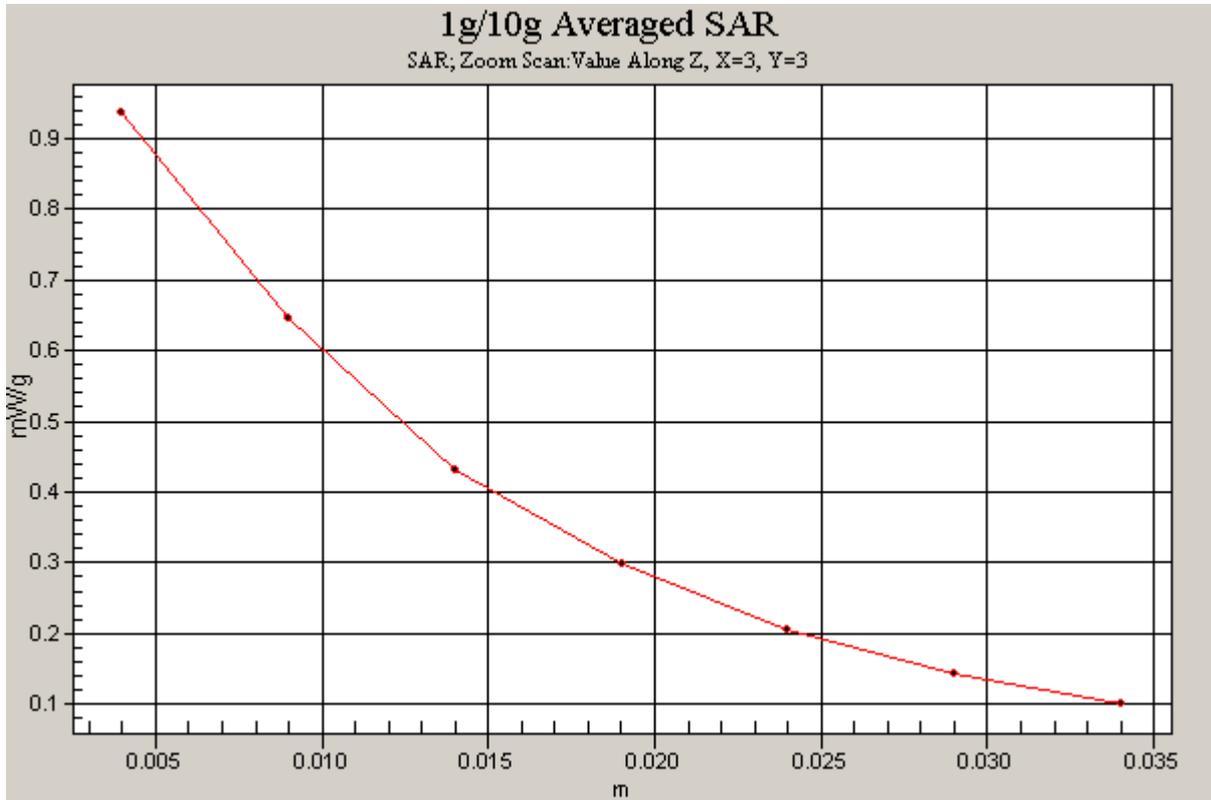


Figure 32 Z-Scan at power reference point (Body, Towards Ground, Open GSM 850 Channel 251)

GSM 850 Towards Ground Middle Open

Date/Time: 9/10/2009 10:35:21 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.986 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.906 mW/g; SAR(10 g) = 0.597 mW/g

Maximum value of SAR (measured) = 0.981 mW/g

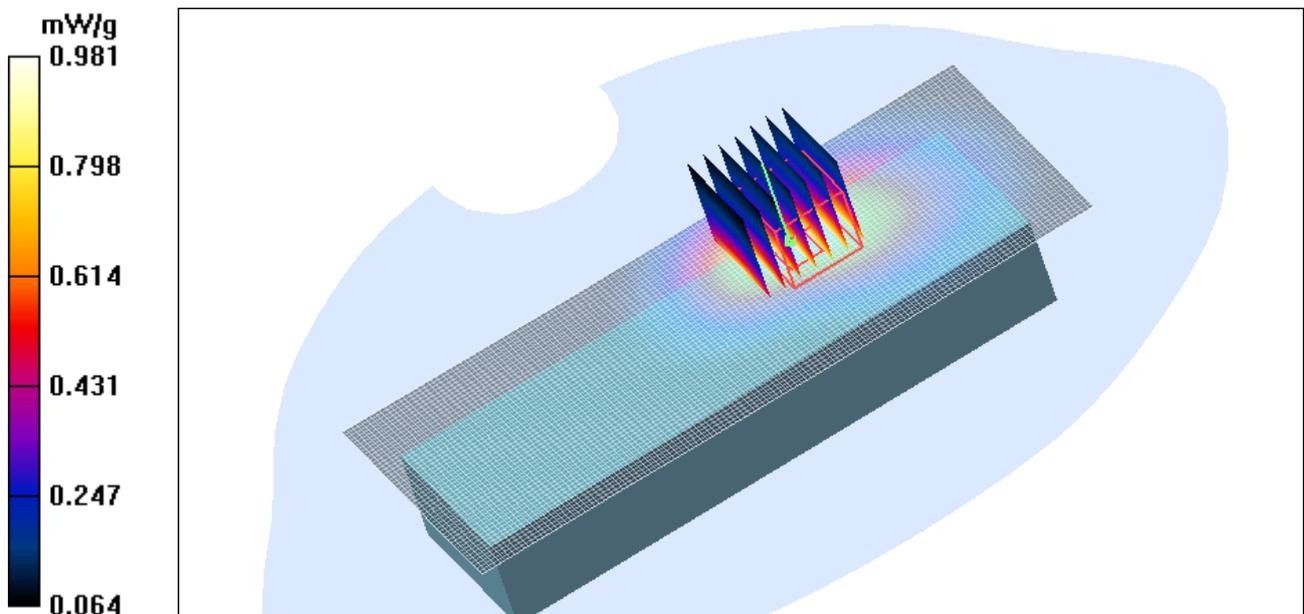


Figure 33 Body, Towards Ground, Open GSM 850 Channel 190

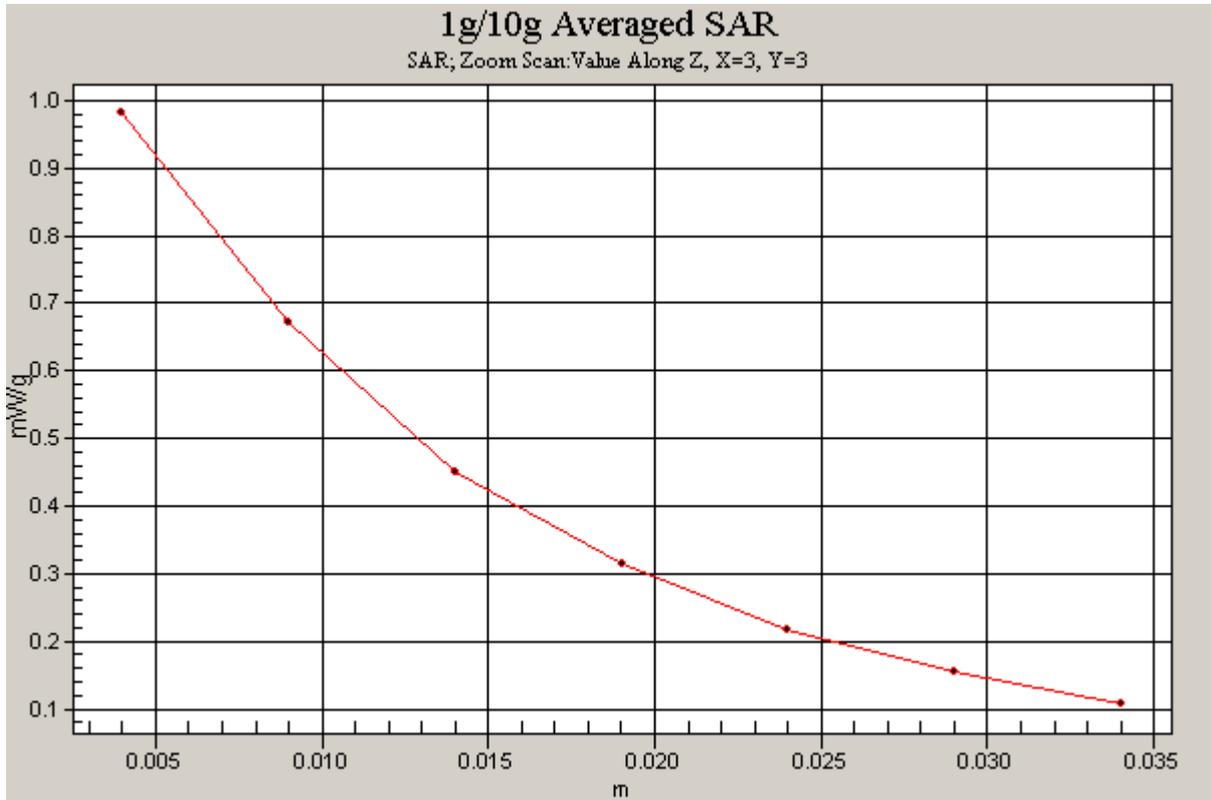


Figure 34 Z-Scan at power reference point (Body, Towards Ground, Open GSM 850 Channel 190)

GSM 850 Towards Ground Low Open

Date/Time: 9/10/2009 11:15:05 AM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Low/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.895 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.548 mW/g

Maximum value of SAR (measured) = 0.894 mW/g

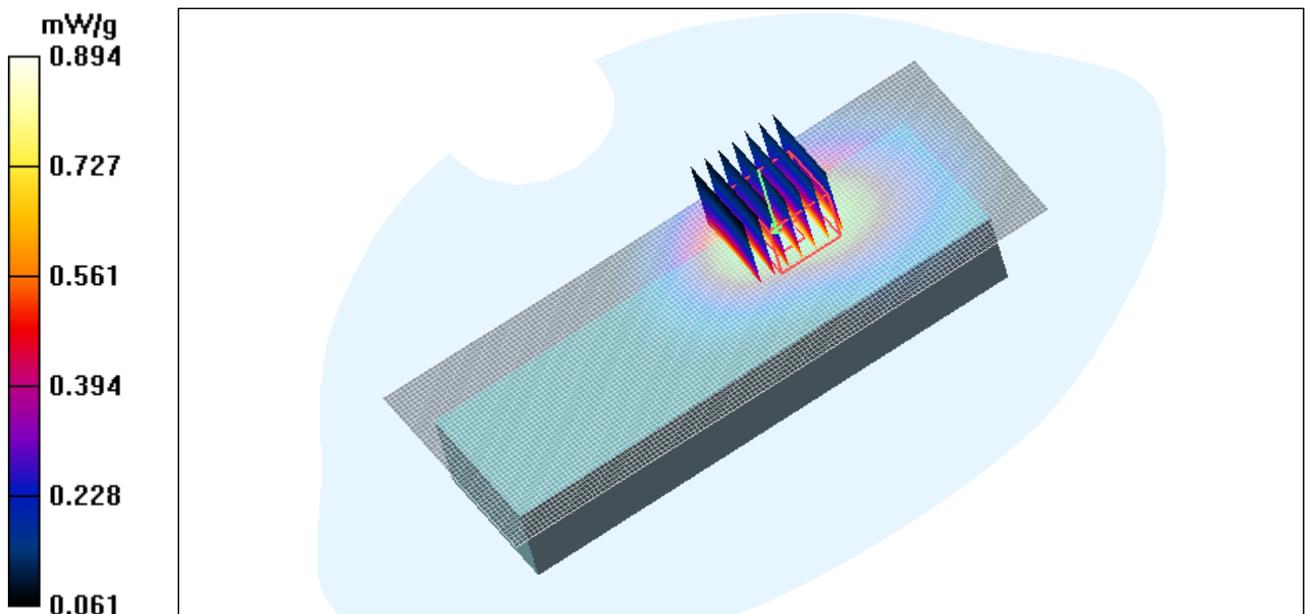


Figure 35 Body, Towards Ground, Open GSM 850 Channel 128

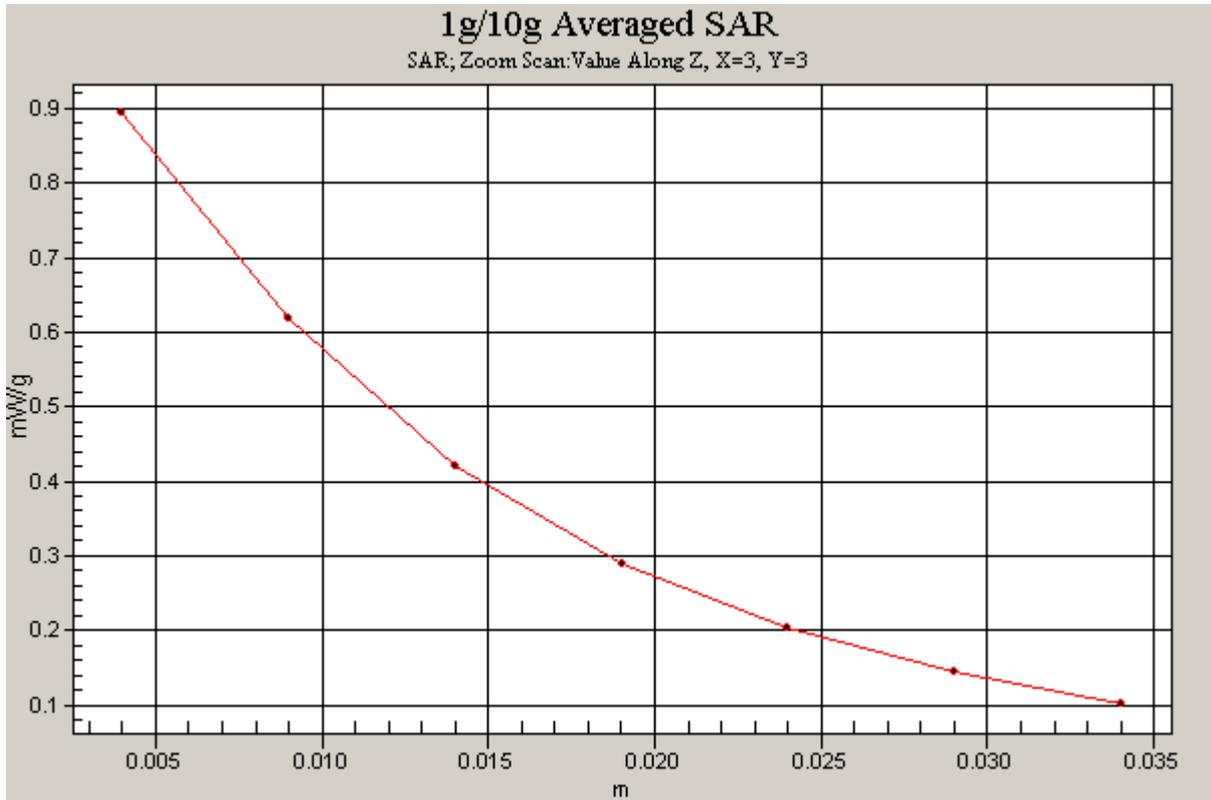


Figure 36 Z-Scan at power reference point (Body, Towards Ground, Open GSM 850 Channel 128)

GSM 850 Towards Ground with Earphone Middle Open

Date/Time: 9/10/2009 11:42:29 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.01 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.616 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

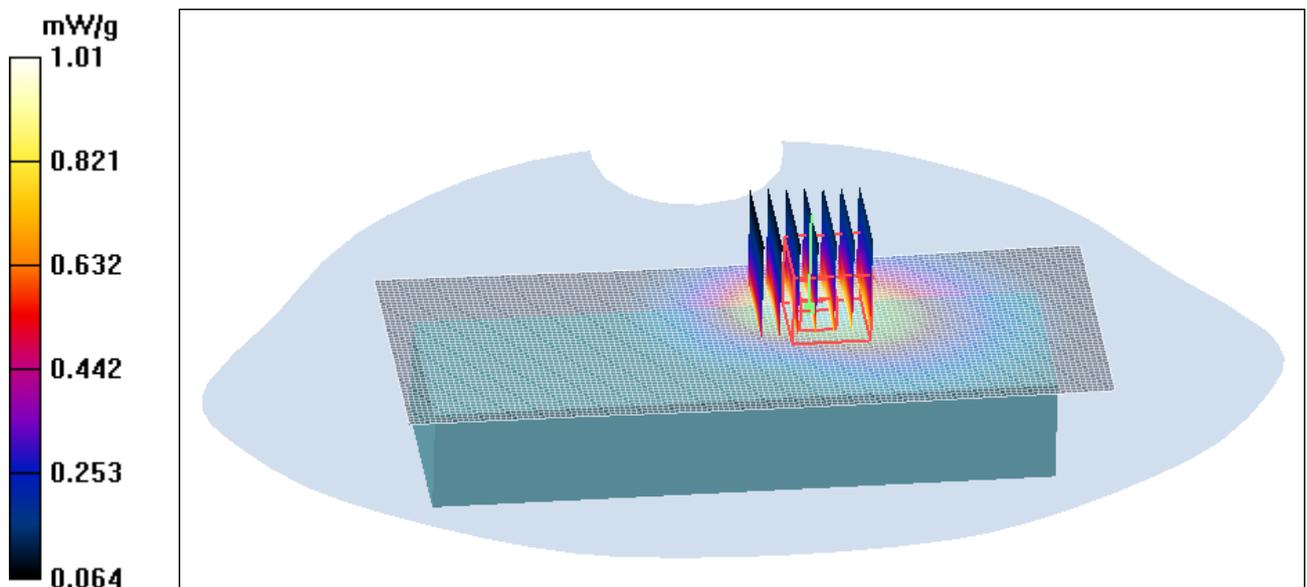


Figure 37 Body with Earphone, Towards Ground, Open GSM 850 Channel 190

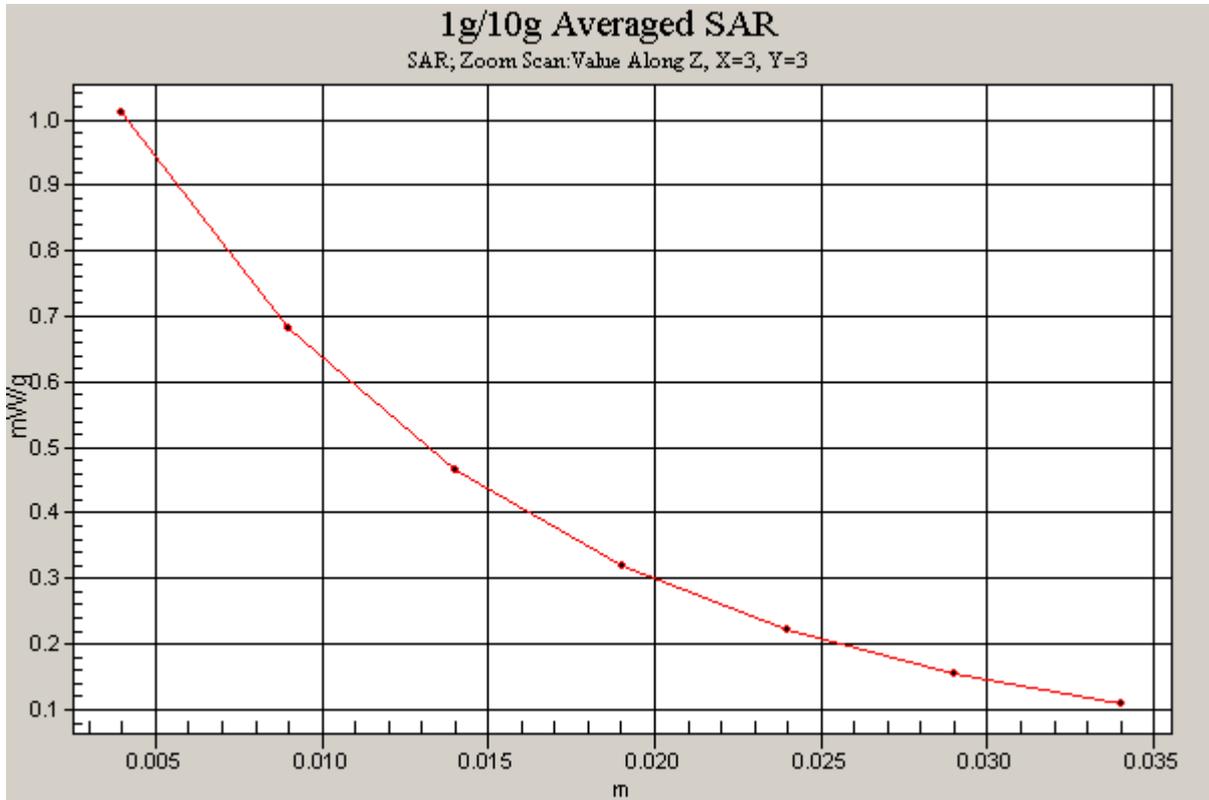


Figure 38 Z-Scan at power reference point (Body with Earphone, Towards Ground, Open GSM 850 Channel 190)

GSM 850+GPRS(4Up) Towards Ground Middle Open

Date/Time: 9/10/2009 12:05:30 PM

Communication System: GSM 850+GPRS(4Up); Frequency: 836.6 MHz;Duty Cycle: 1:2

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.80 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,
dz=5mm

Reference Value = 28.8 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.47 mW/g; SAR(10 g) = 0.985 mW/g

Maximum value of SAR (measured) = 1.58 mW/g

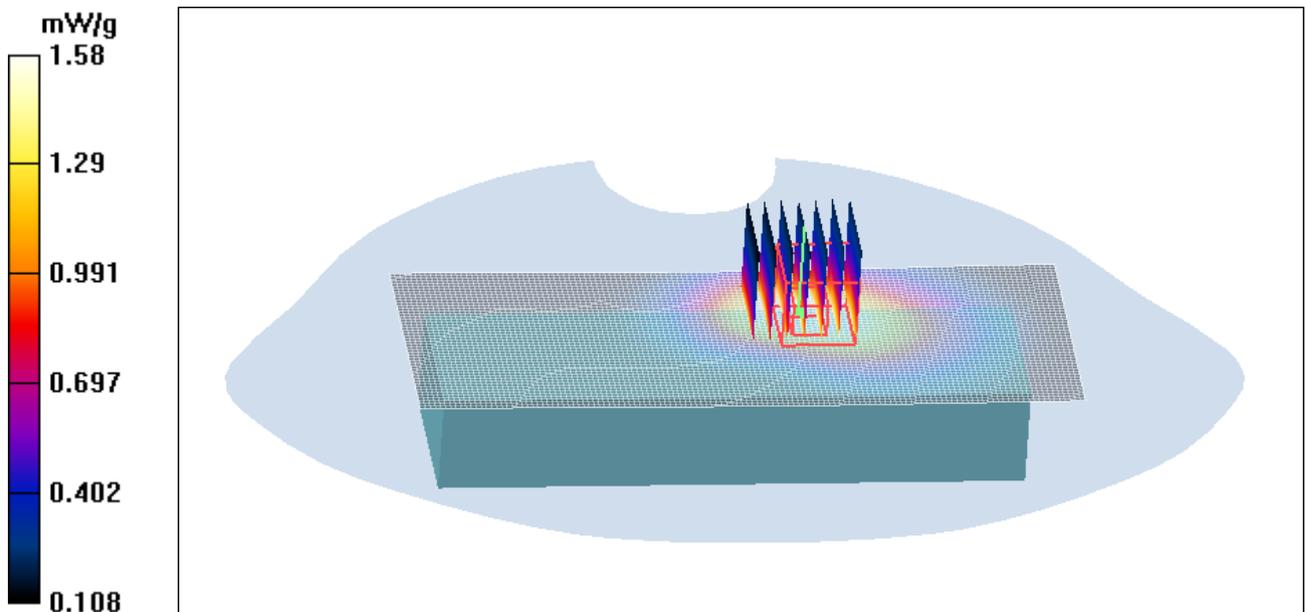


Figure 39 Body, Towards Ground, Open GSM 850 GPRS (4Up) Channel 190

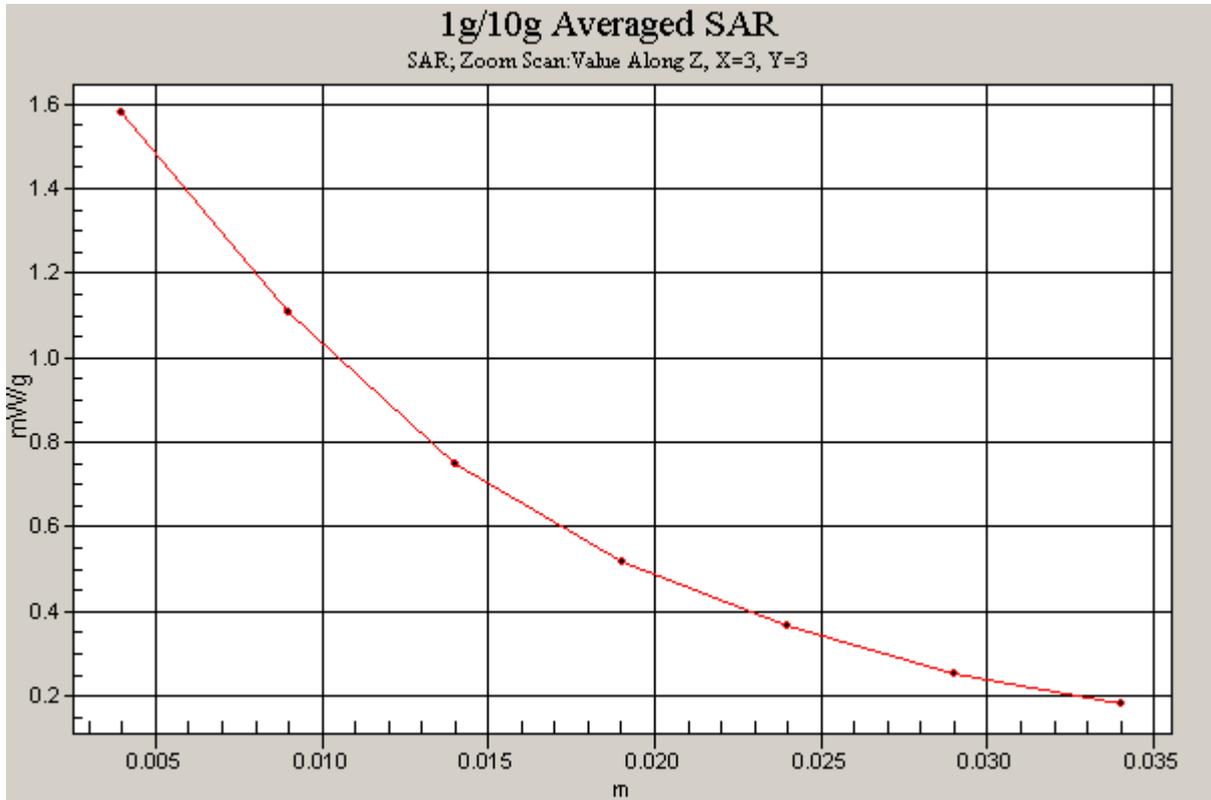


Figure 40 Z-Scan at power reference point (Body, Towards Ground, Open GSM 850 GPRS (4Up) Channel 190)

GSM 1900 Left Cheek High Open

Date/Time: 9/11/2009 7:01:49 AM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek High/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.979 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.96 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.557 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

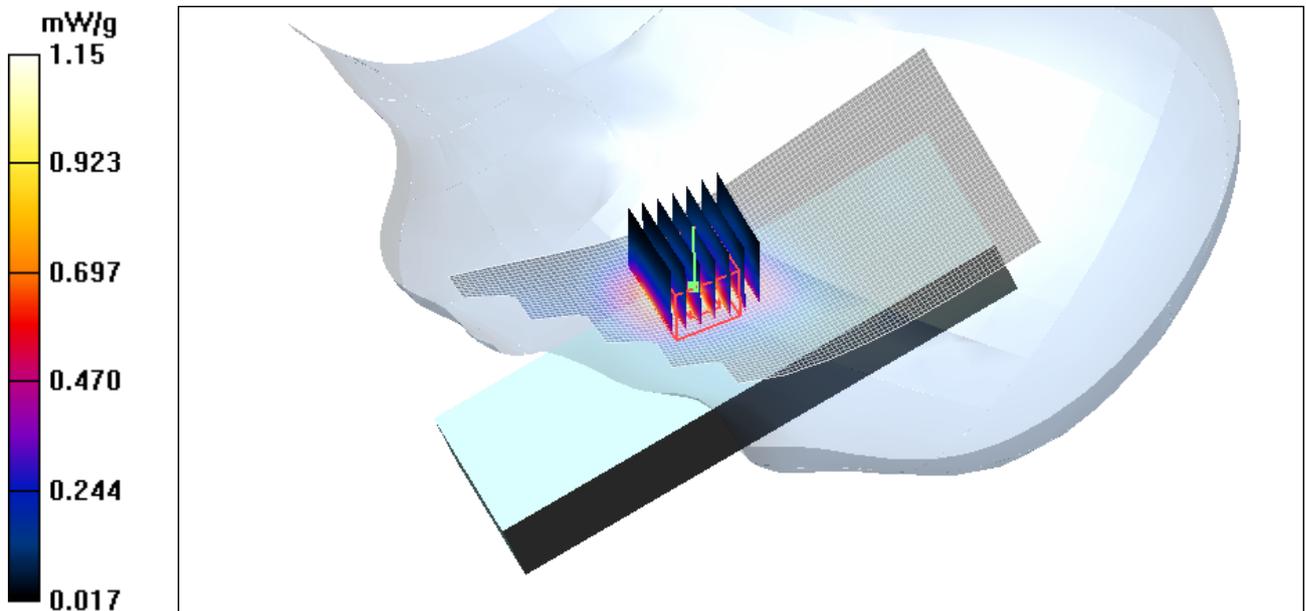


Figure 41 Left Hand Touch Cheek Open GSM 1900 Channel 810

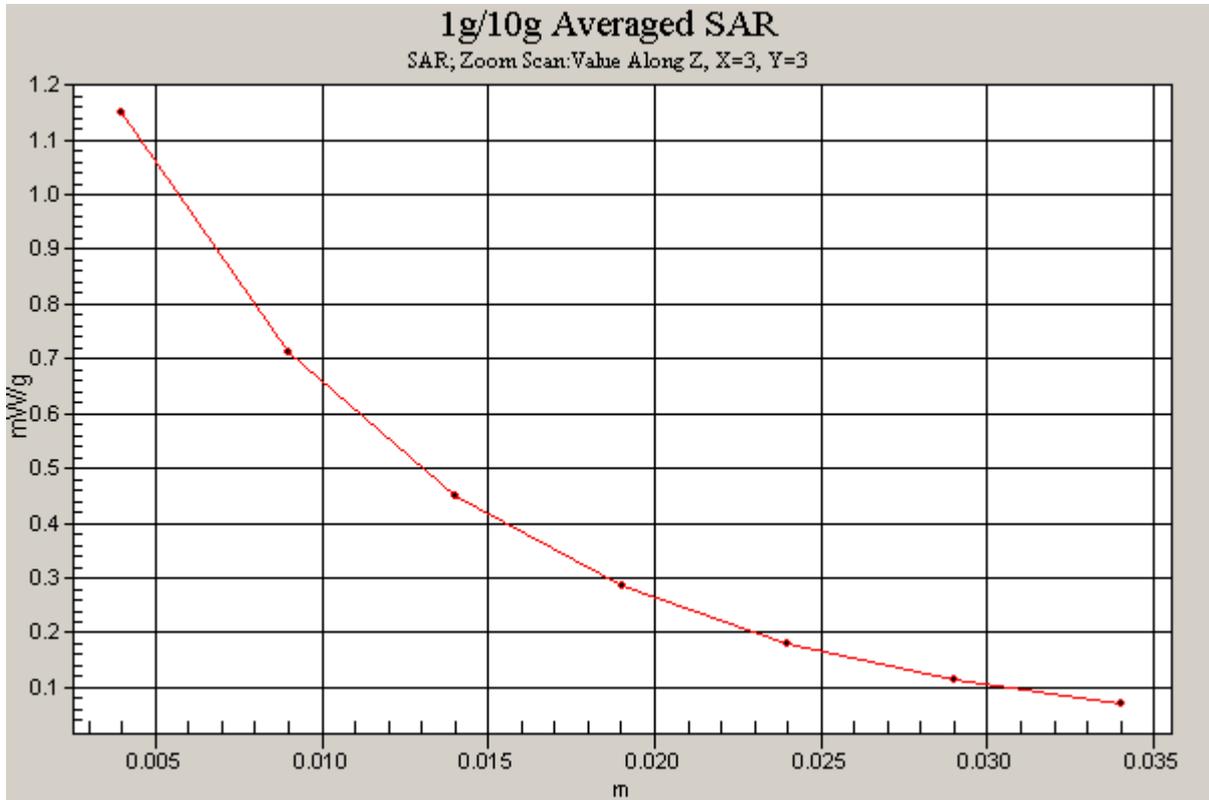


Figure 42 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 1900 Channel 810)

GSM 1900 Left Cheek Middle Open

Date/Time: 9/11/2009 5:58:48 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.25 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.58 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 1.32 mW/g; SAR(10 g) = 0.713 mW/g

Maximum value of SAR (measured) = 1.44 mW/g

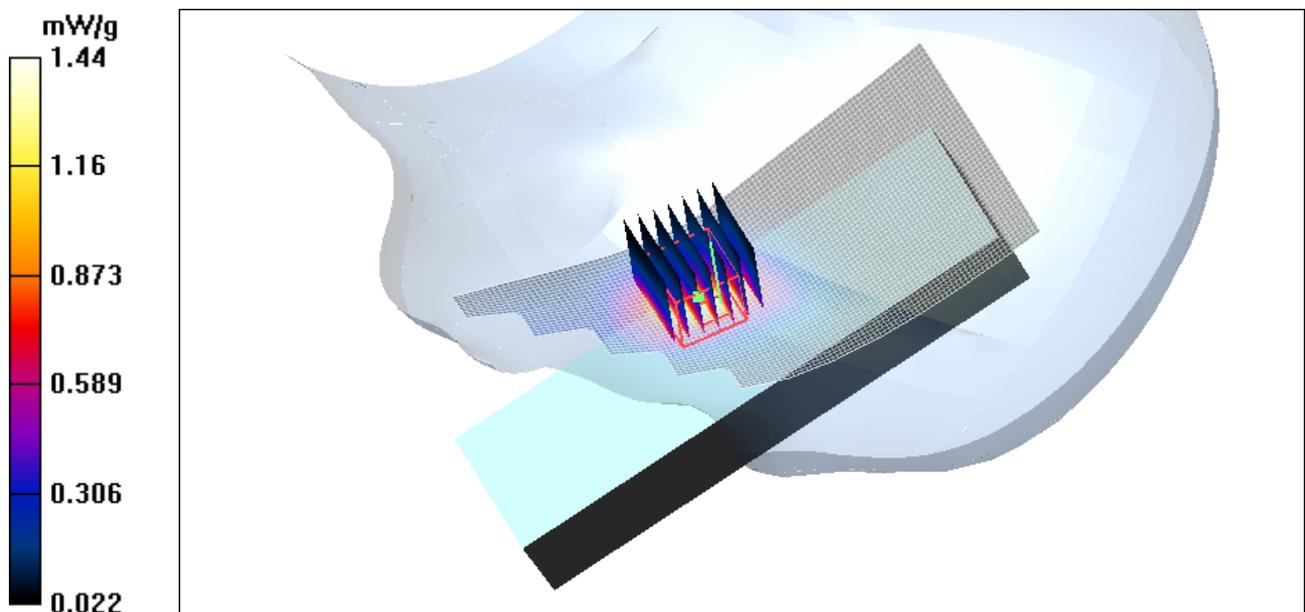


Figure 43 Left Hand Touch Cheek Open GSM 1900 Channel 661

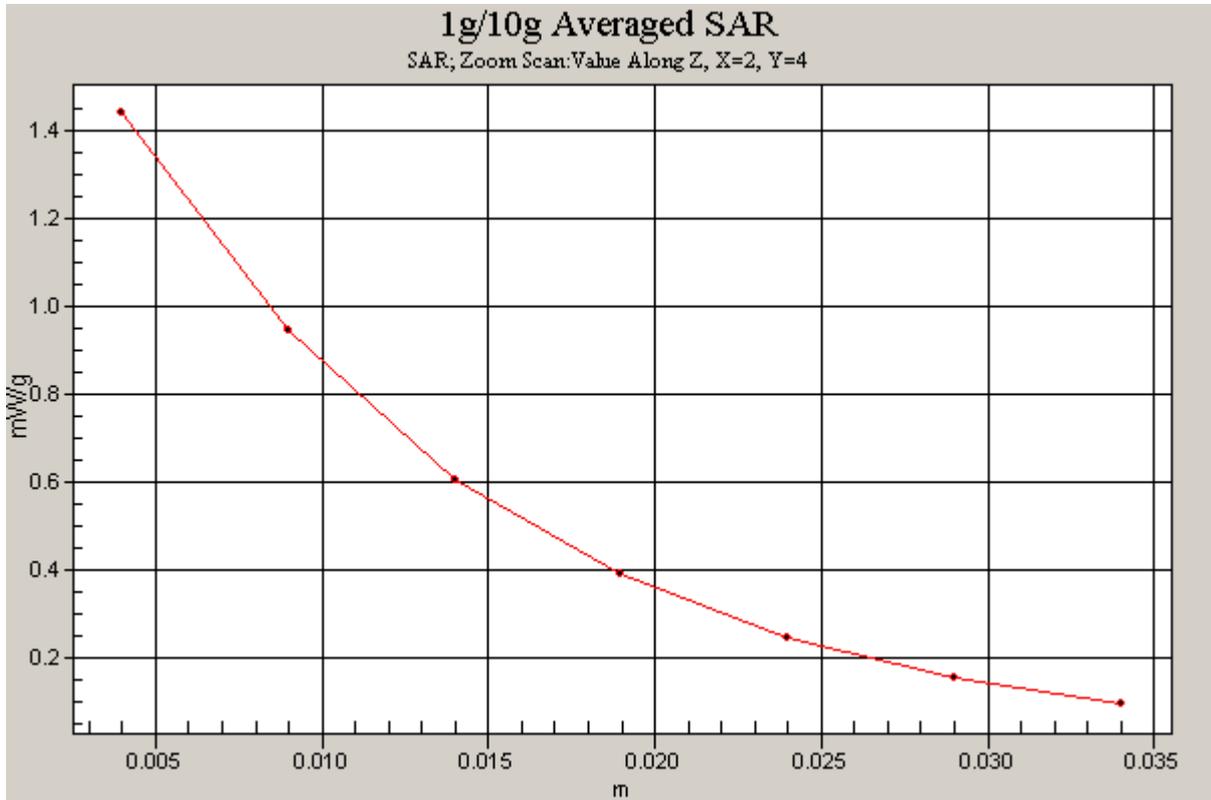


Figure 44 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 1900 Channel 661)

GSM 1900 Left Cheek Low Open

Date/Time: 9/11/2009 6:38:34 AM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Low/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.33 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.68 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.757 mW/g

Maximum value of SAR (measured) = 1.54 mW/g

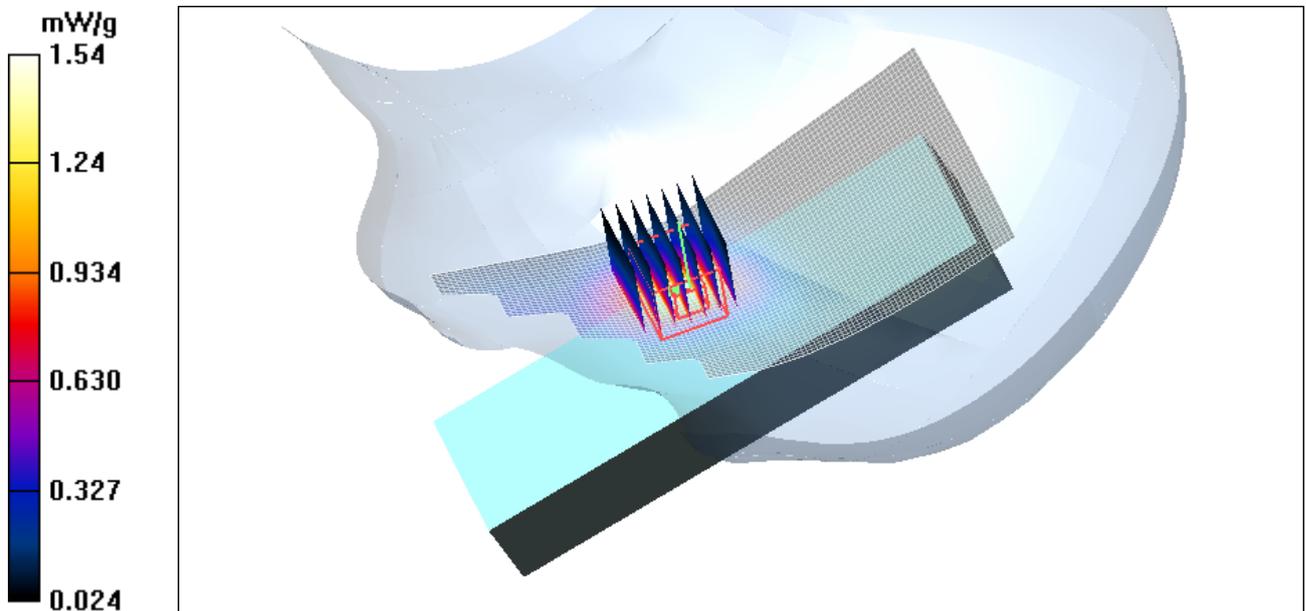


Figure 45 Left Hand Touch Cheek Open GSM 1900 Channel 512

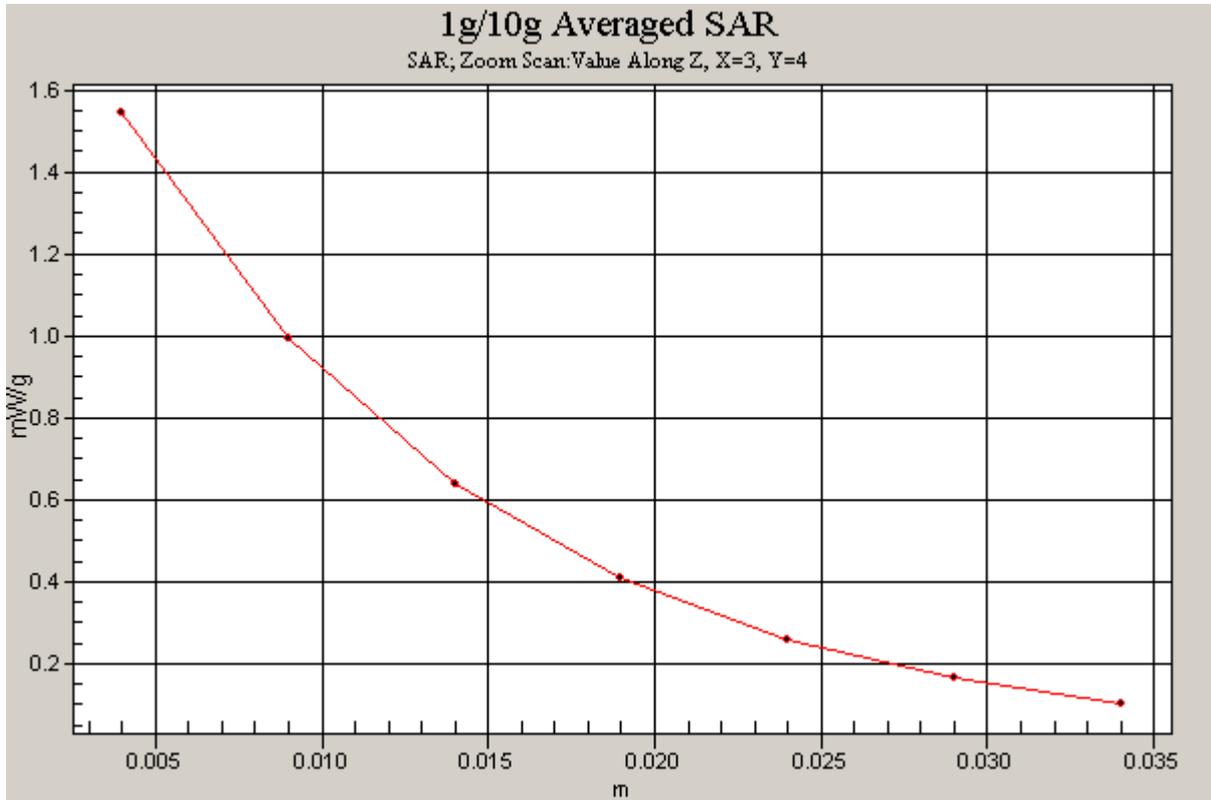


Figure 46 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 1900 Channel 512)

GSM 1900 Left Tilt Middle Open

Date/Time: 9/11/2009 7:25:11 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.398 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.370 mW/g

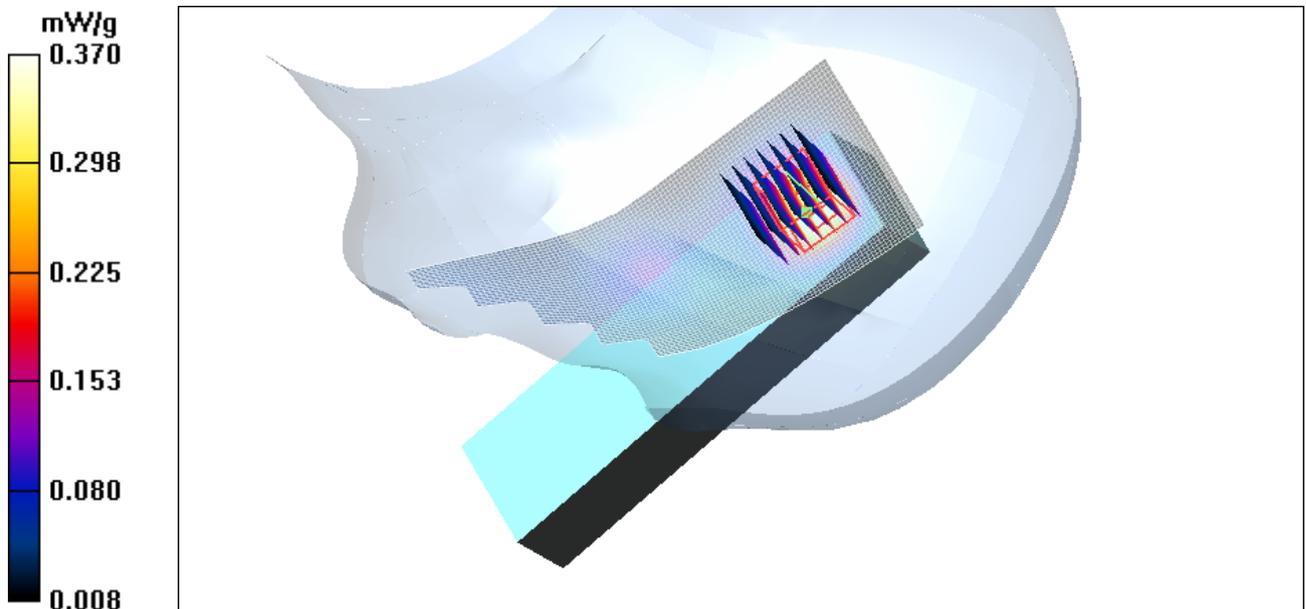


Figure 47 Left Hand Tilt 15° Open GSM 1900 Channel 661

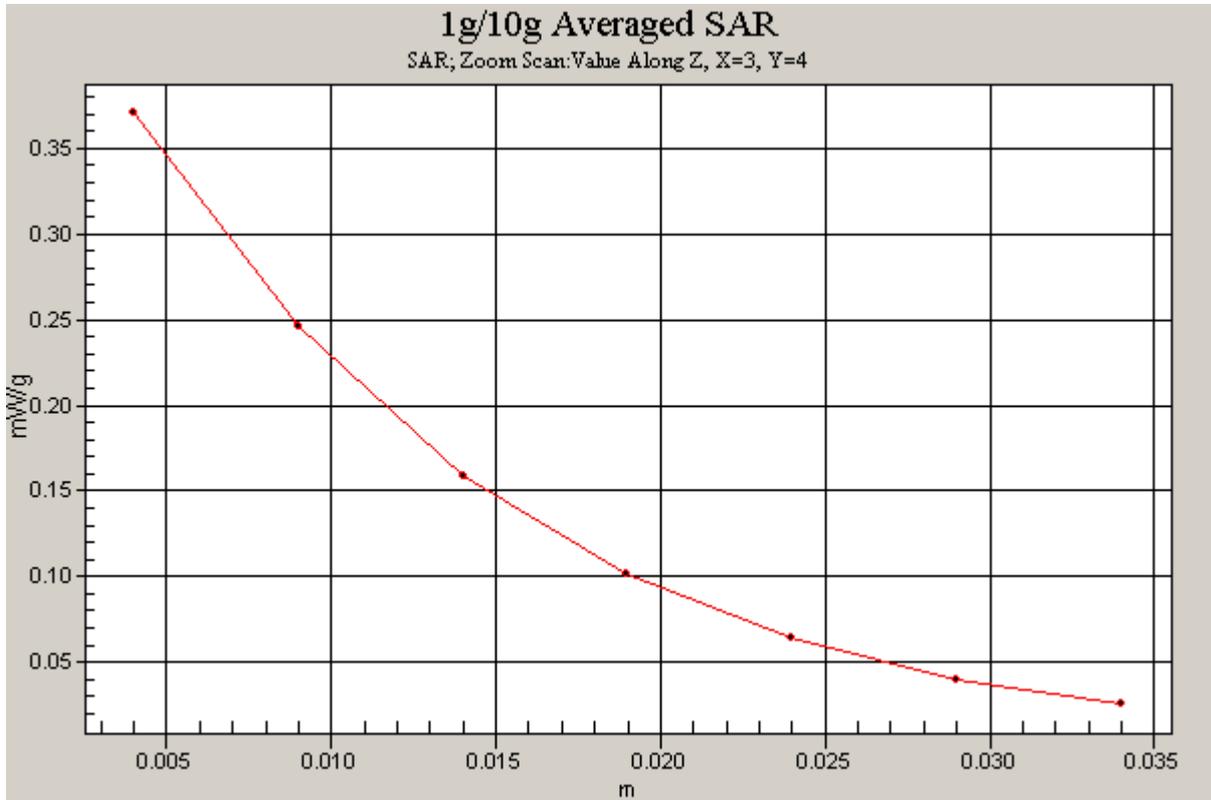


Figure 48 Z-Scan at power reference point (Left Hand Tilt 15° Open GSM 1900 Channel 661)

GSM 1900 Right Cheek High Open

Date/Time: 9/11/2009 8:23:40 AM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek High/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.797 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.29 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 0.910 mW/g

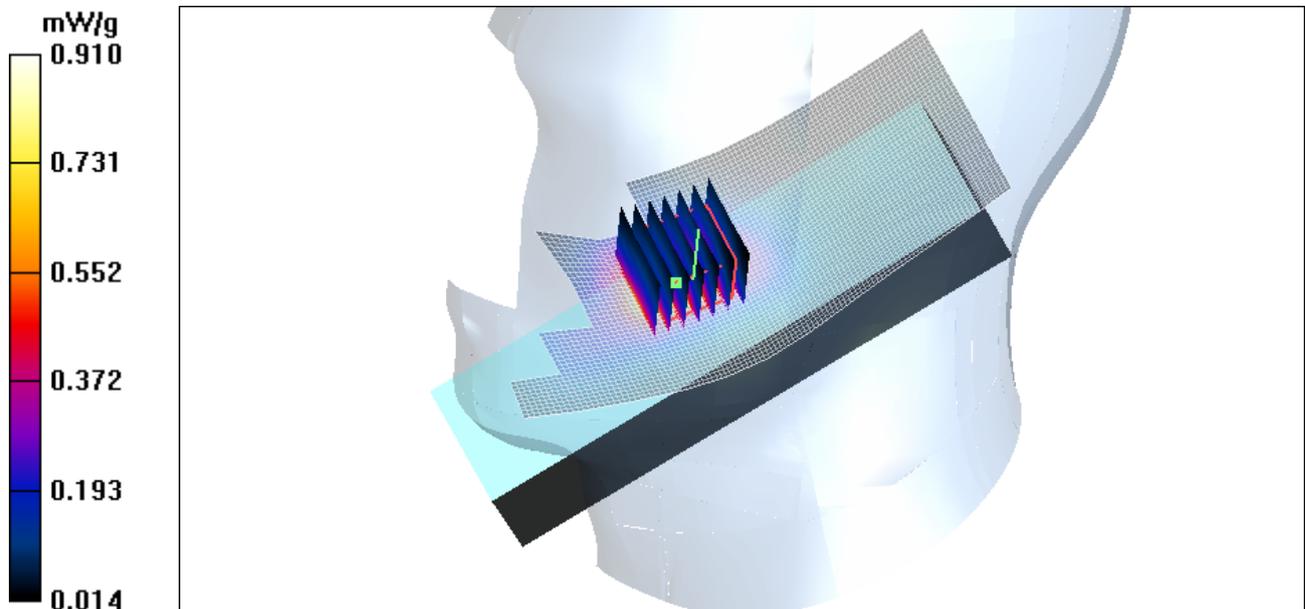


Figure 49 Right Hand Touch Cheek Open GSM 1900 Channel 810

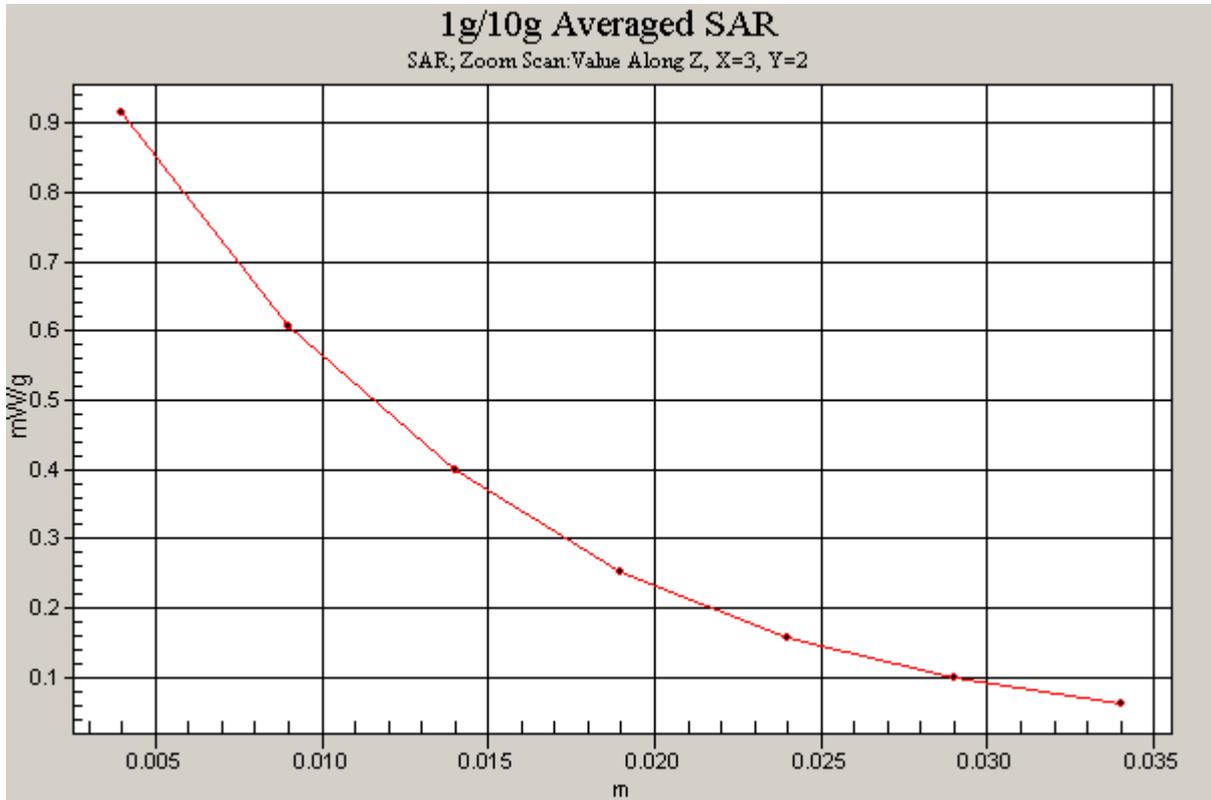


Figure 50 Z-Scan at power reference point (Right Hand Touch Cheek Open GSM 1900 Channel 810)

GSM 1900 Right Cheek Middle Open

Date/Time: 9/11/2009 8:00:27 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.81 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.997 mW/g; SAR(10 g) = 0.558 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

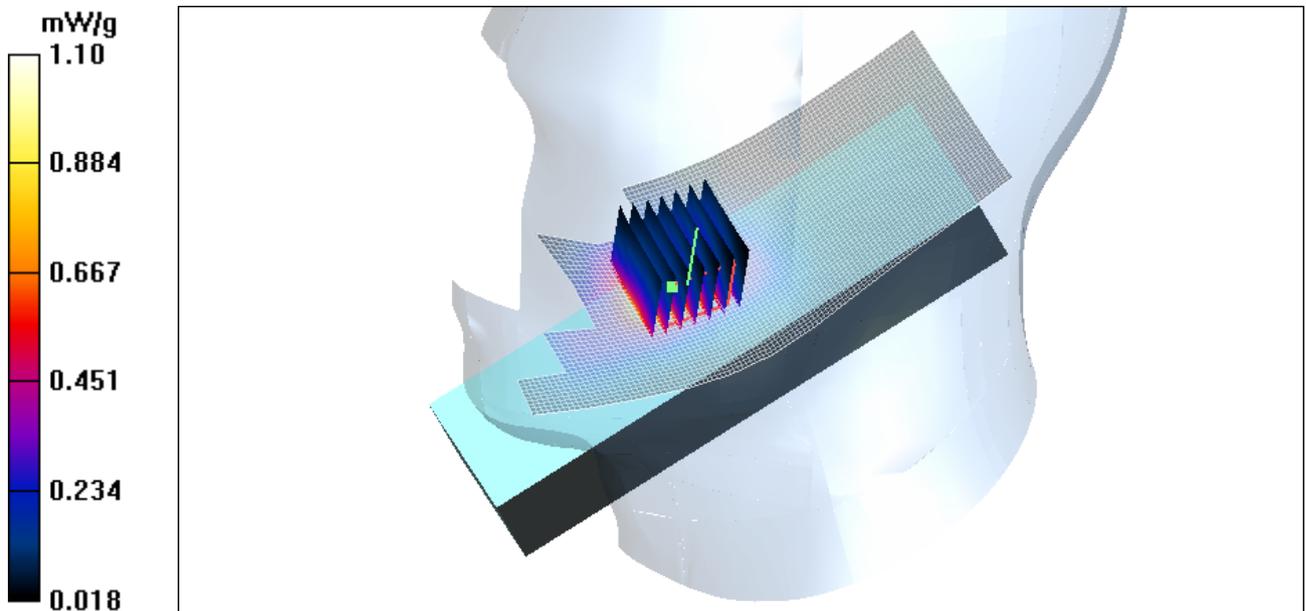


Figure 51 Right Hand Touch Cheek Open GSM 1900 Channel 661

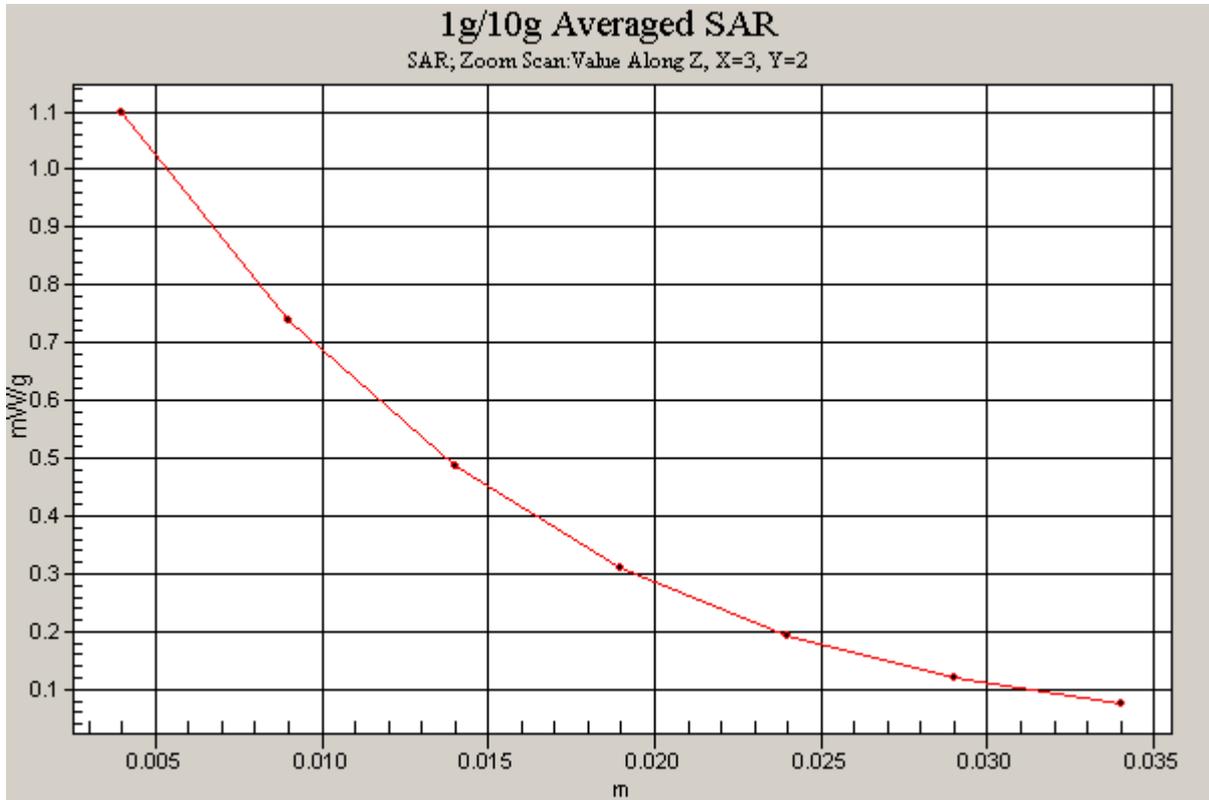


Figure 52 Z-Scan at power reference point (Right Hand Touch Cheek Open GSM 1900 Channel 661)

GSM 1900 Right Cheek Low Open

Date/Time: 9/11/2009 8:46:23 AM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Low/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.01 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.613 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

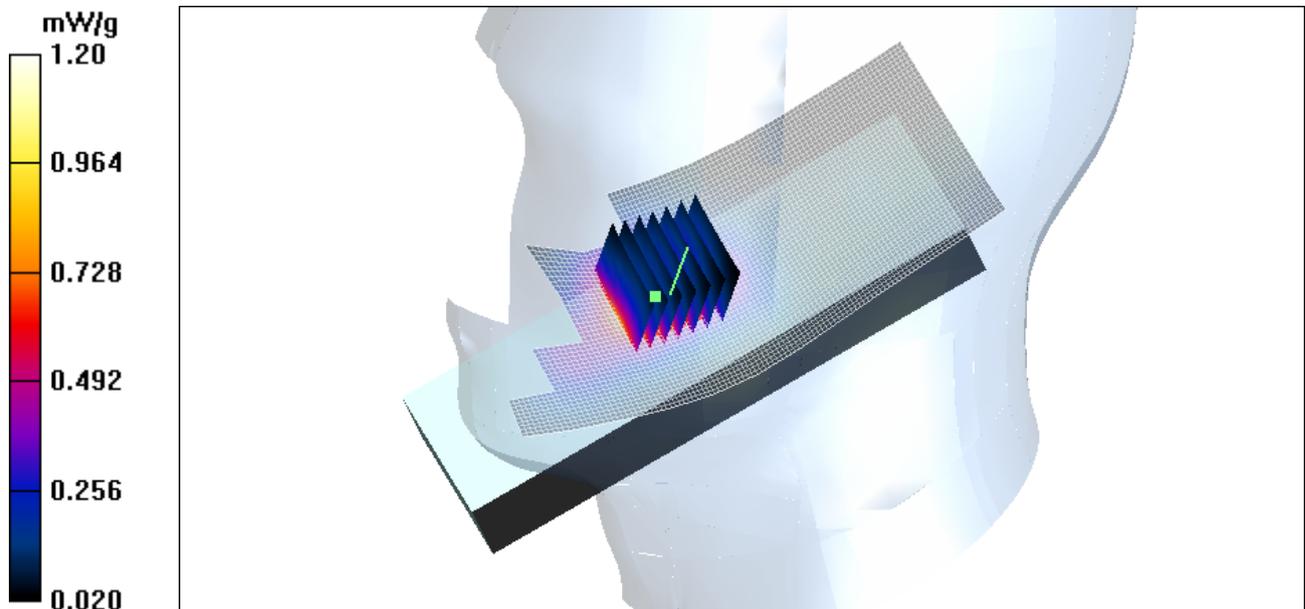


Figure 53 Right Hand Touch Cheek Open GSM 1900 Channel 512

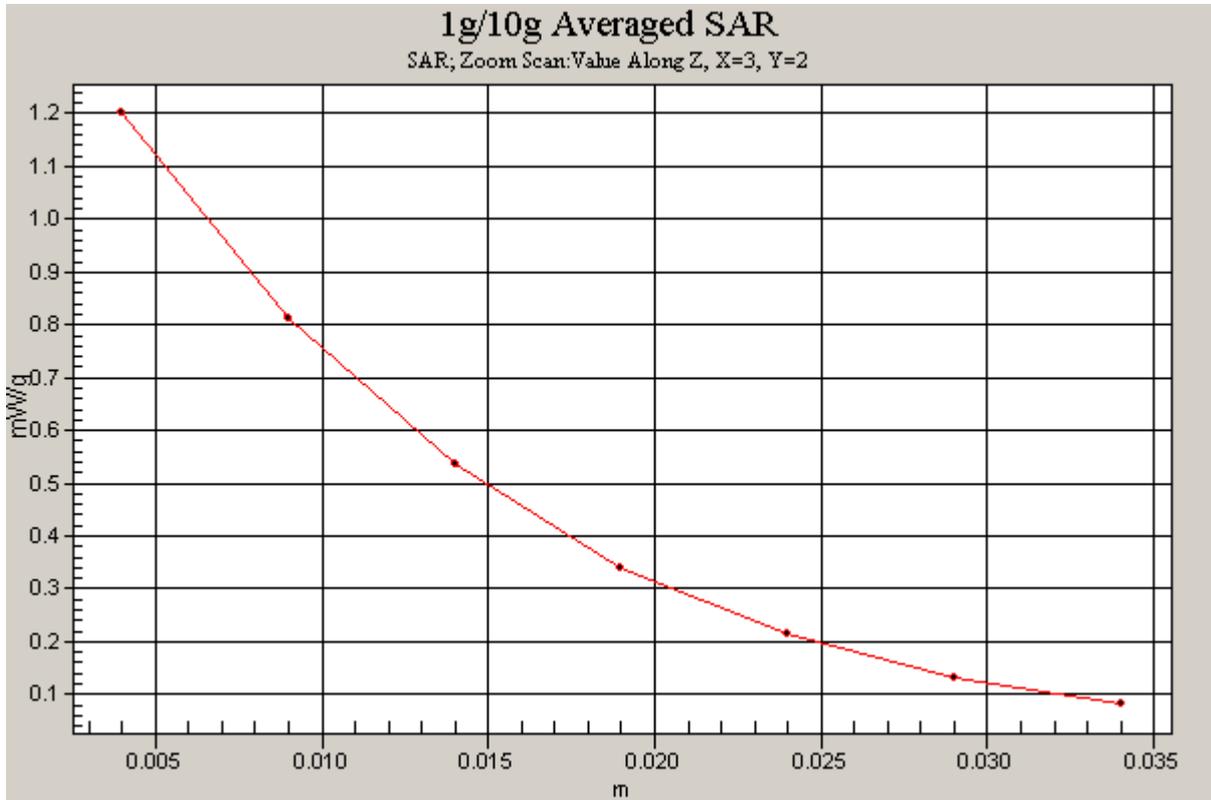


Figure 54 Z-Scan at power reference point (Right Hand Touch Cheek Open GSM 1900 Channel 512)

GSM 1900 Right Tilt Middle Open

Date/Time: 9/11/2009 9:12:05 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(4.89, 4.89, 4.89); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.424 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.203 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

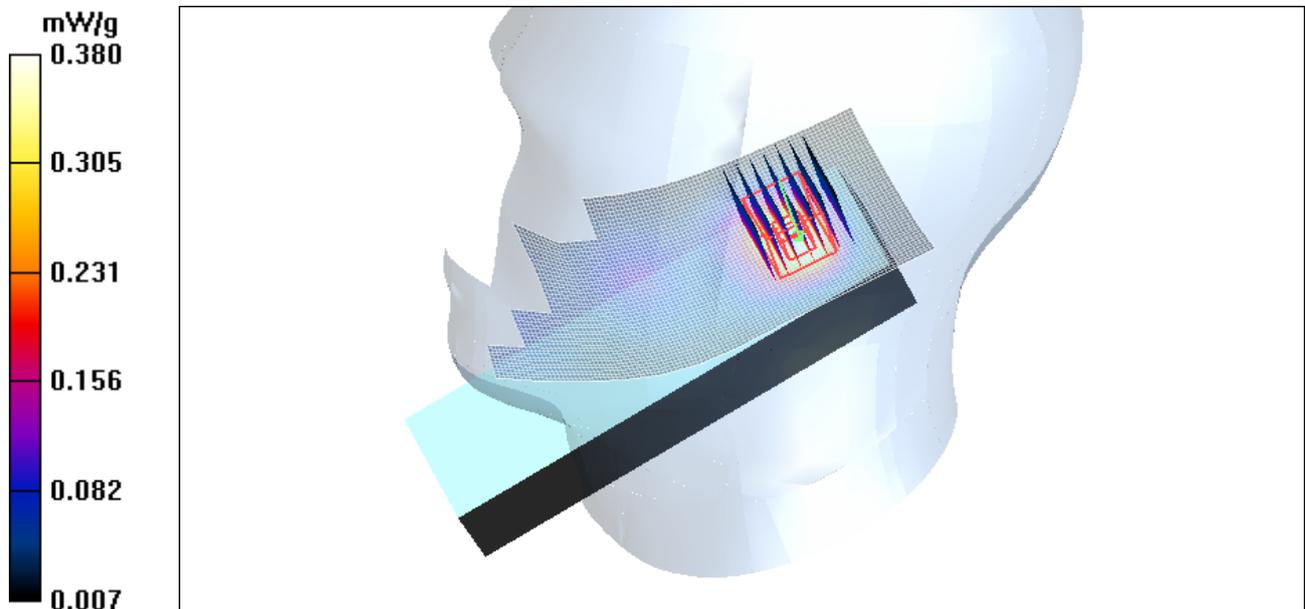


Figure 55 Right Hand Tilt 15° Open GSM 1900 Channel 661

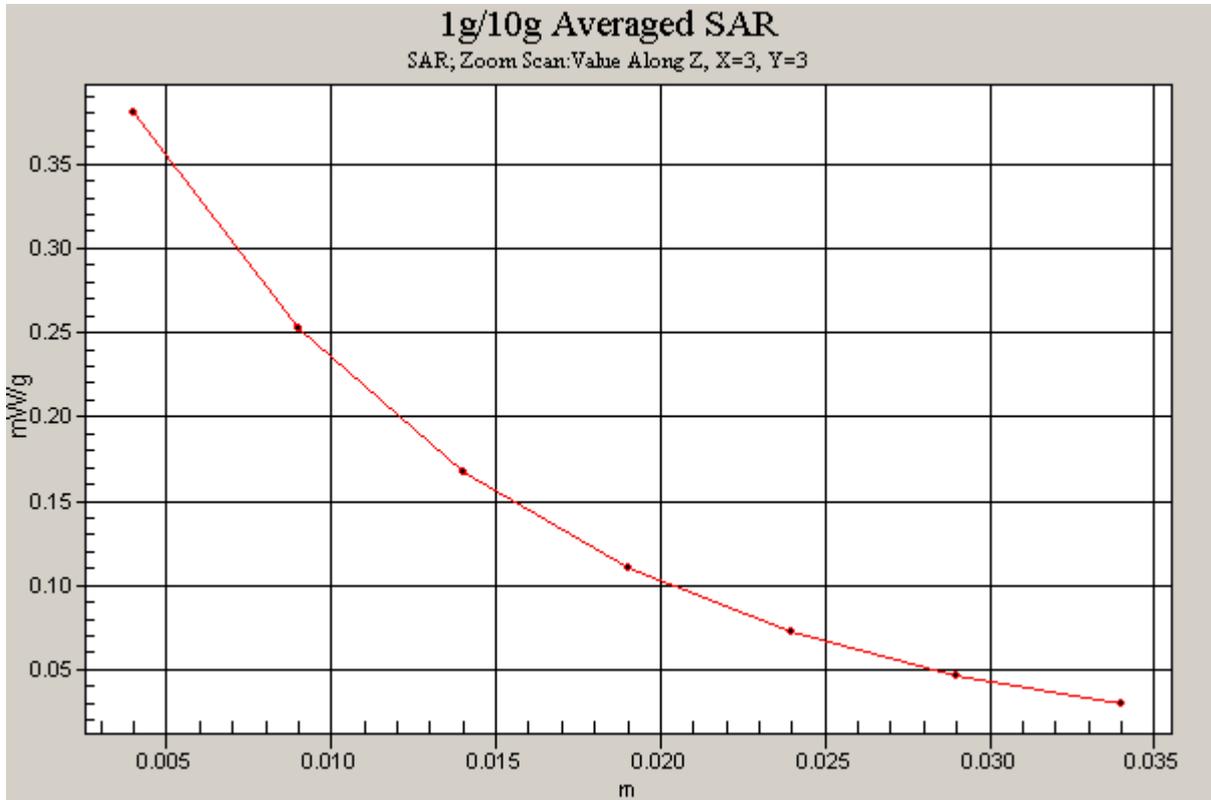


Figure 56 Z-Scan at power reference point (Right Hand Tilt 15° Open GSM 1900 Channel 661)

GSM 1900 Towards Ground Middle Close

Date/Time: 9/11/2009 7:04:10 PM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.246 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.55 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

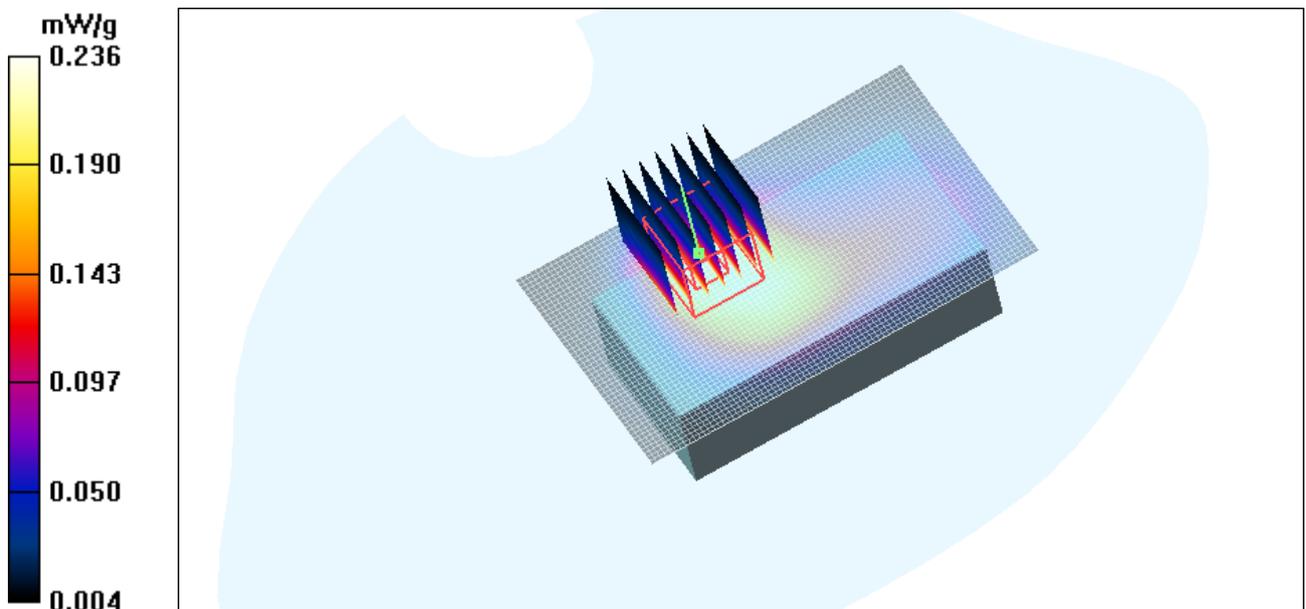


Figure 57 Body, Towards Ground, Close GSM 1900 Channel 661

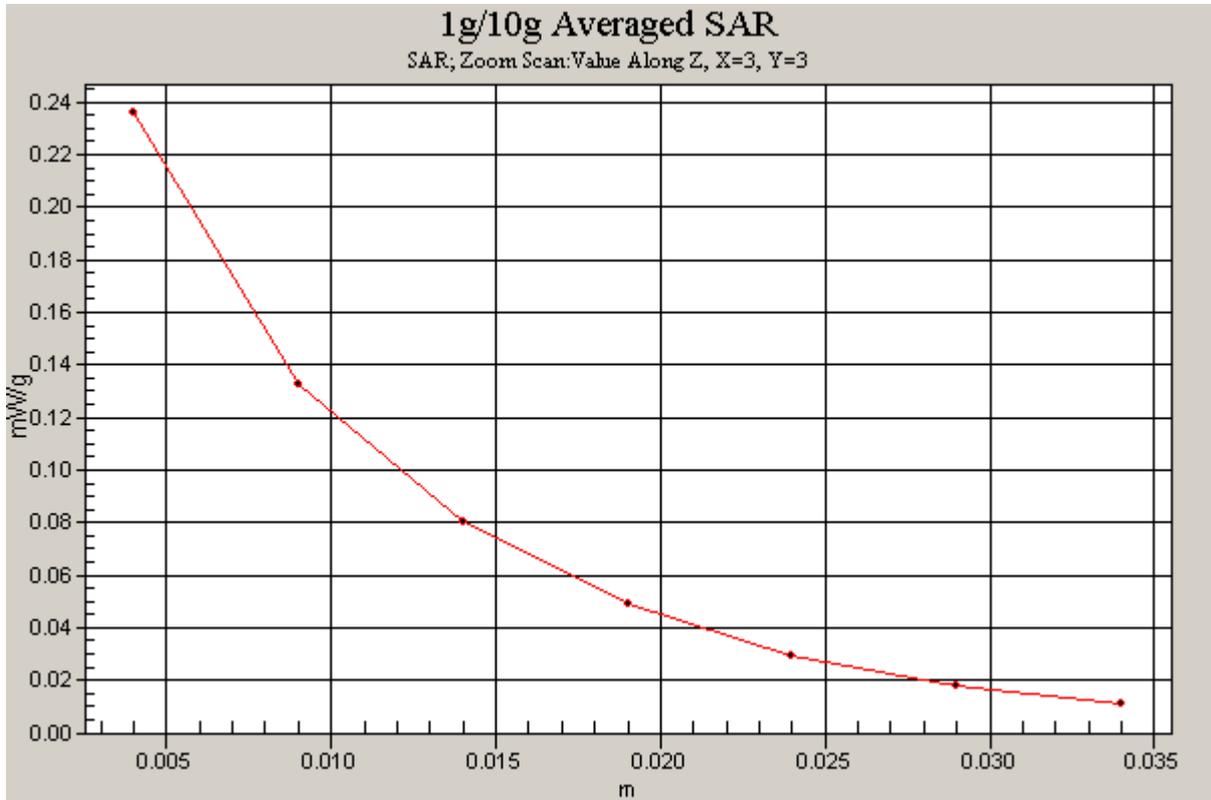


Figure 58 Z-Scan at power reference point (Body, Towards Ground, Close GSM 1900 Channel 661)

GSM 1900 Towards Phantom Middle Close

Date/Time: 9/11/2009 6:45:36 PM

Communication System: PCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liqid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Phantom Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.115 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.03 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.108 mW/g

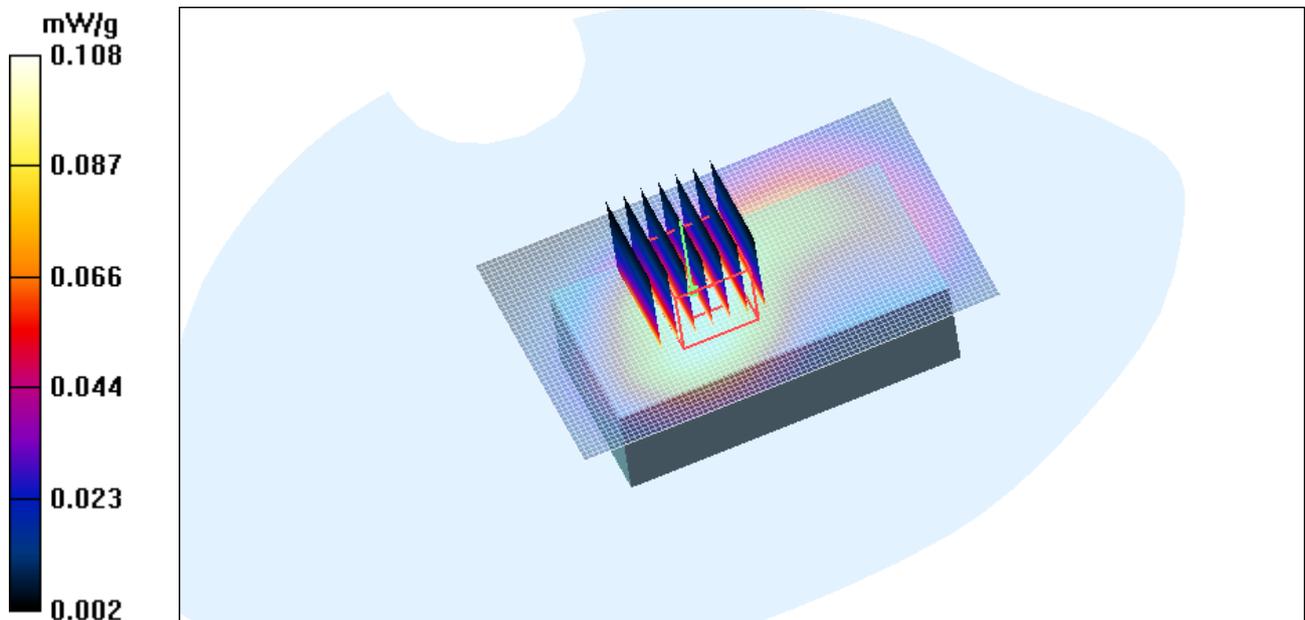


Figure 59 Body, Towards Phantom, Close GSM 1900 Channel661

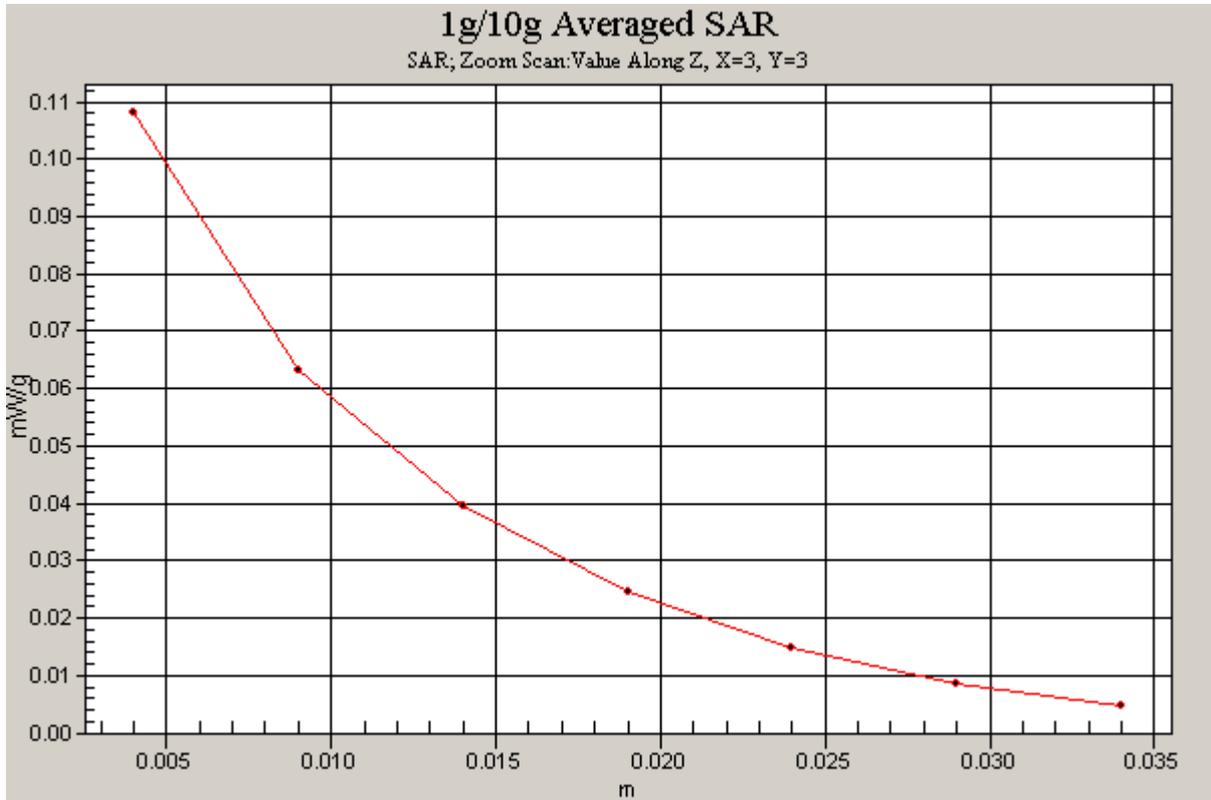


Figure 60 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 1900 Channel661)

GSM 1900 Towards Ground High Open

Date/Time: 9/11/2009 7:28:34 PM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground High/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.320 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.10 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.542 W/kg

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.10 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

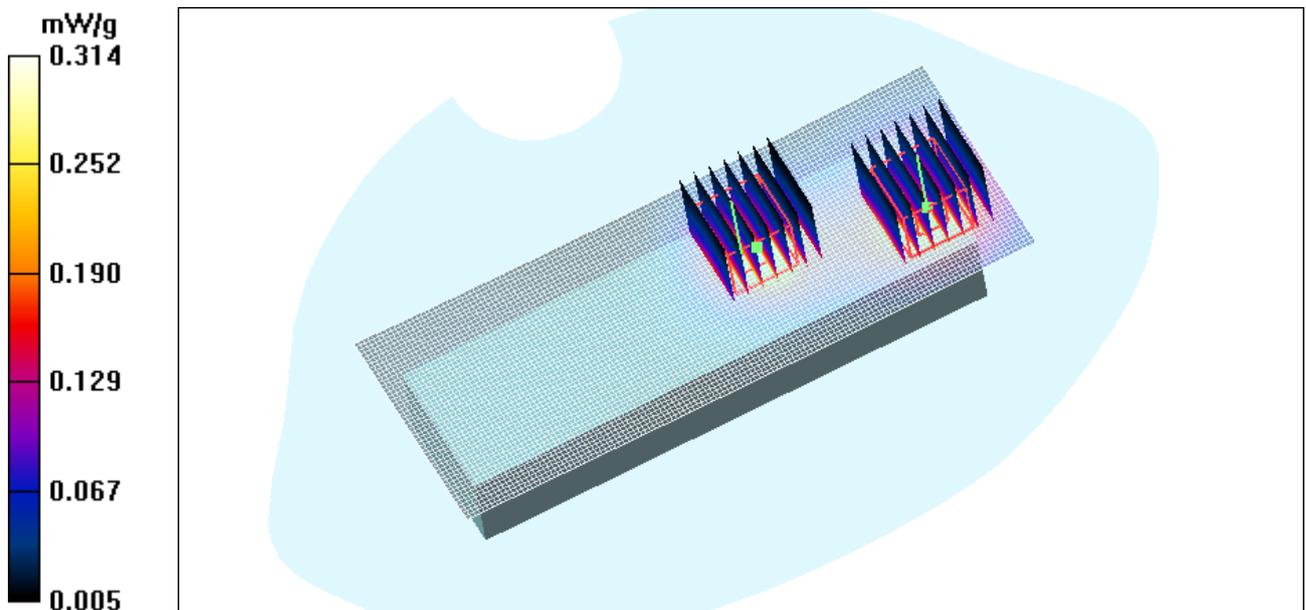


Figure 61 Body, Towards Ground, Open GSM 1900 Channel 810

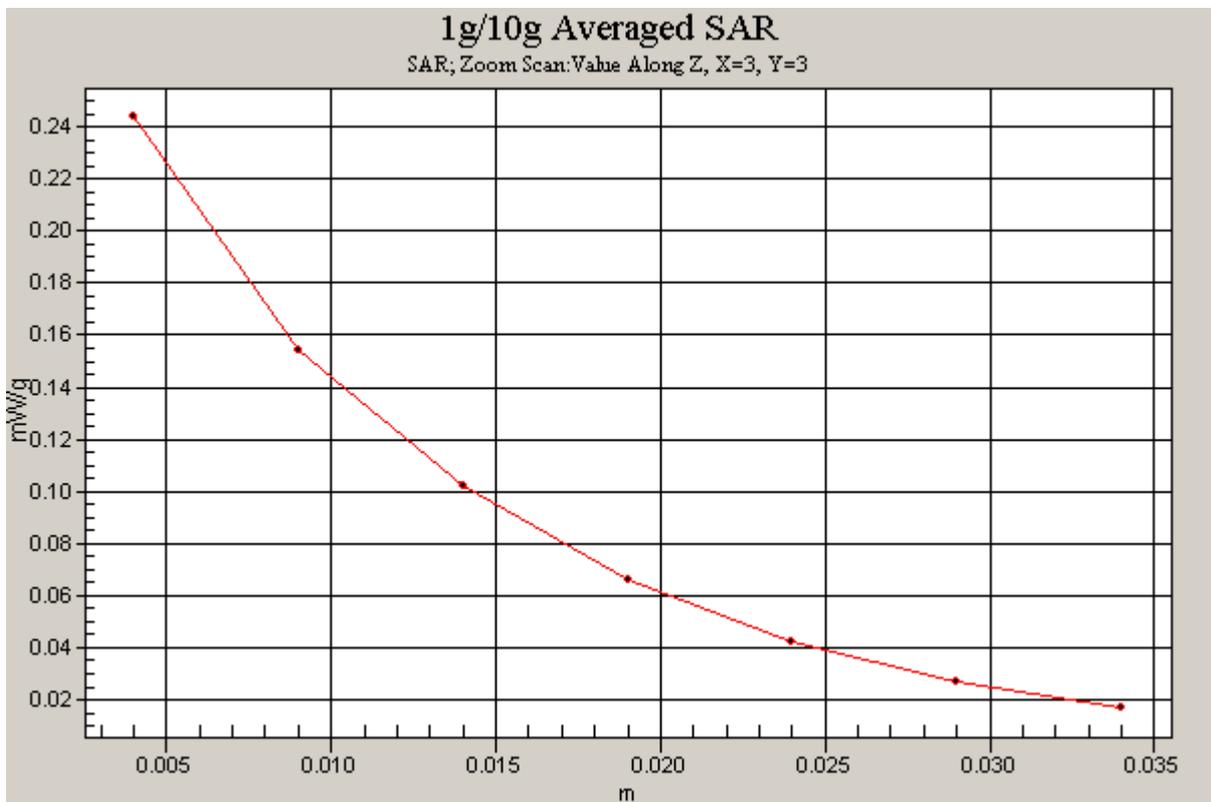
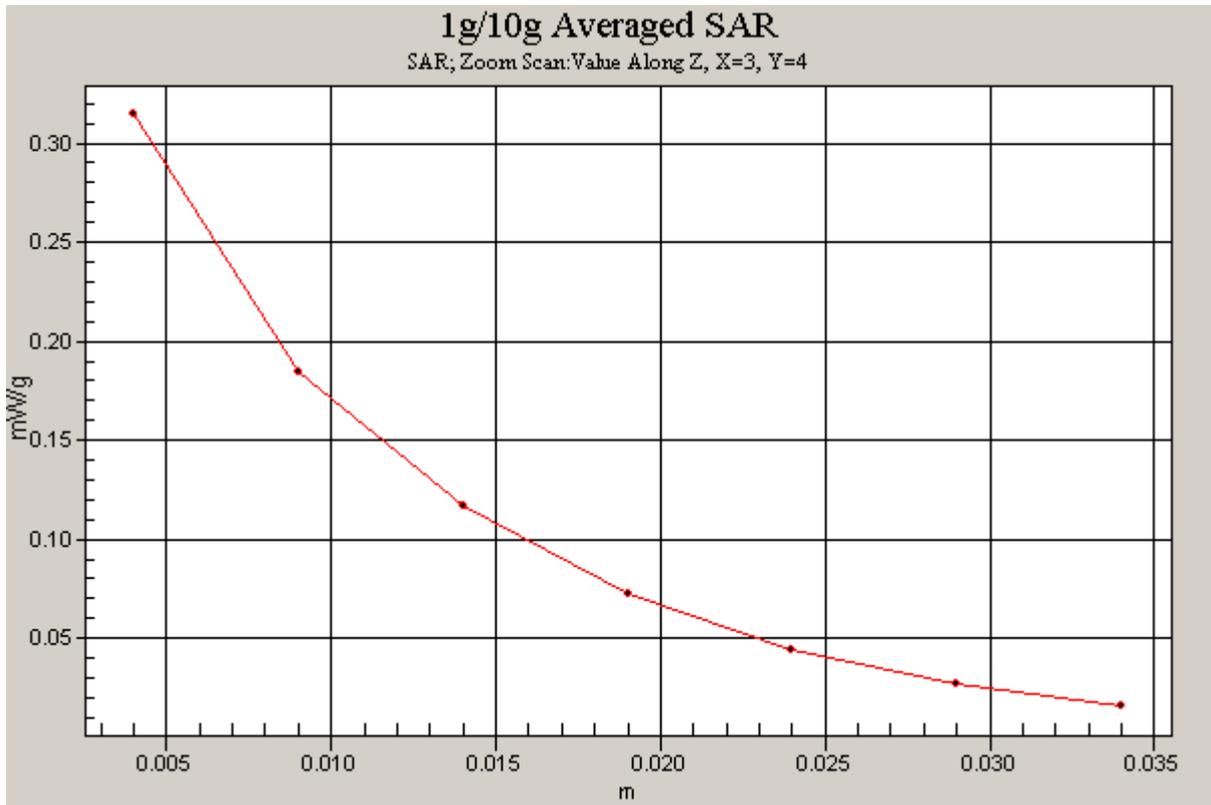


Figure 62 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 Channel 810)

GSM 1900 Towards Ground Middle Open

Date/Time: 9/11/2009 6:10:23 PM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Middle/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.44 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.276 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.44 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.376 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

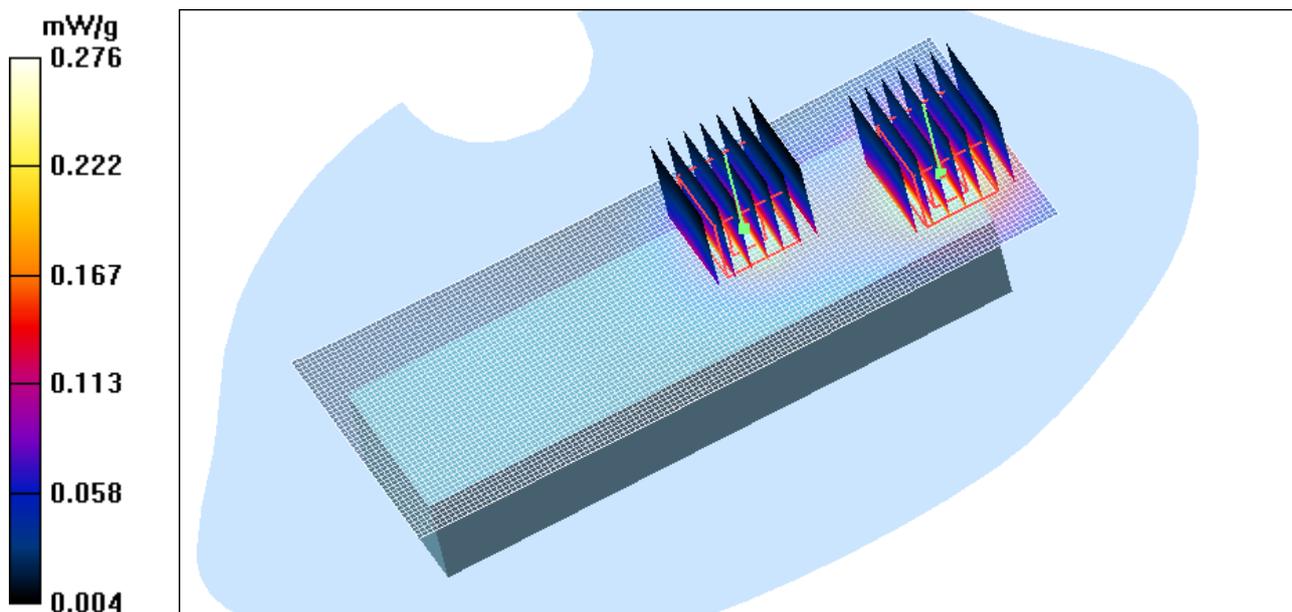


Figure 63 Body, Towards Ground, Open GSM 1900 Channel 661

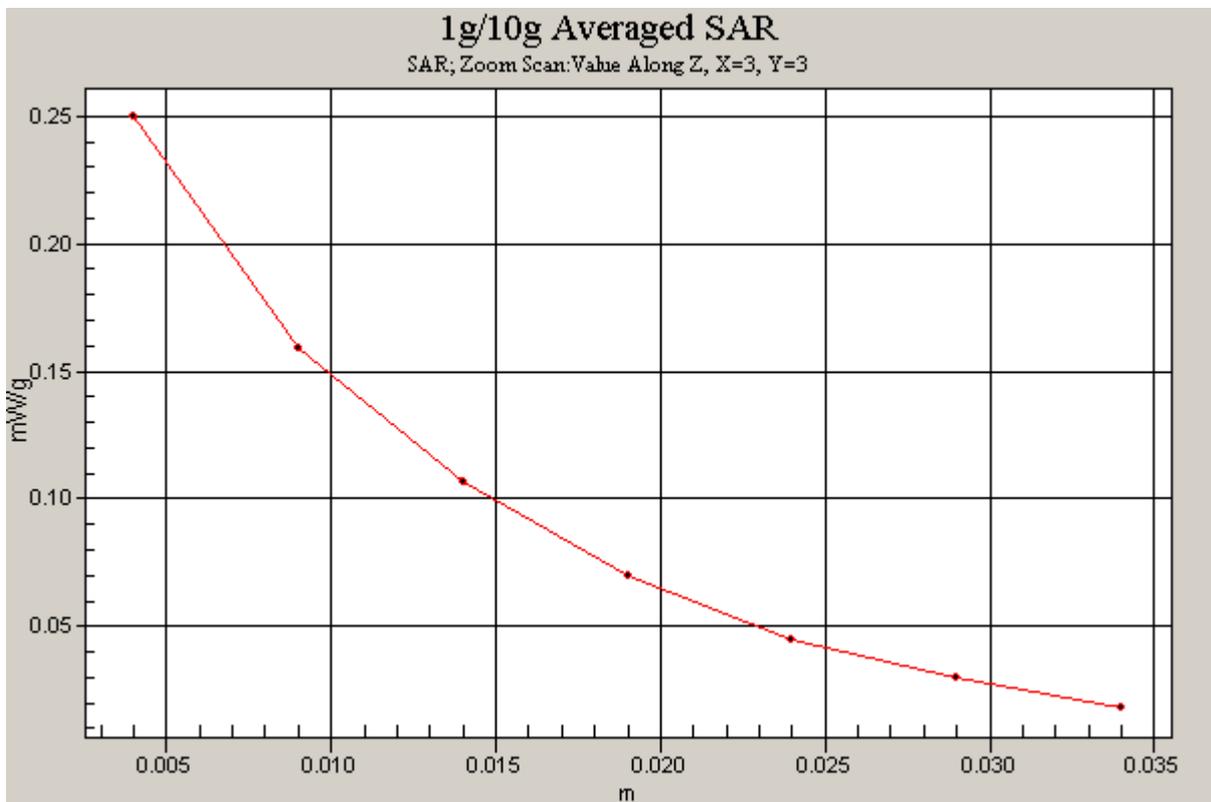
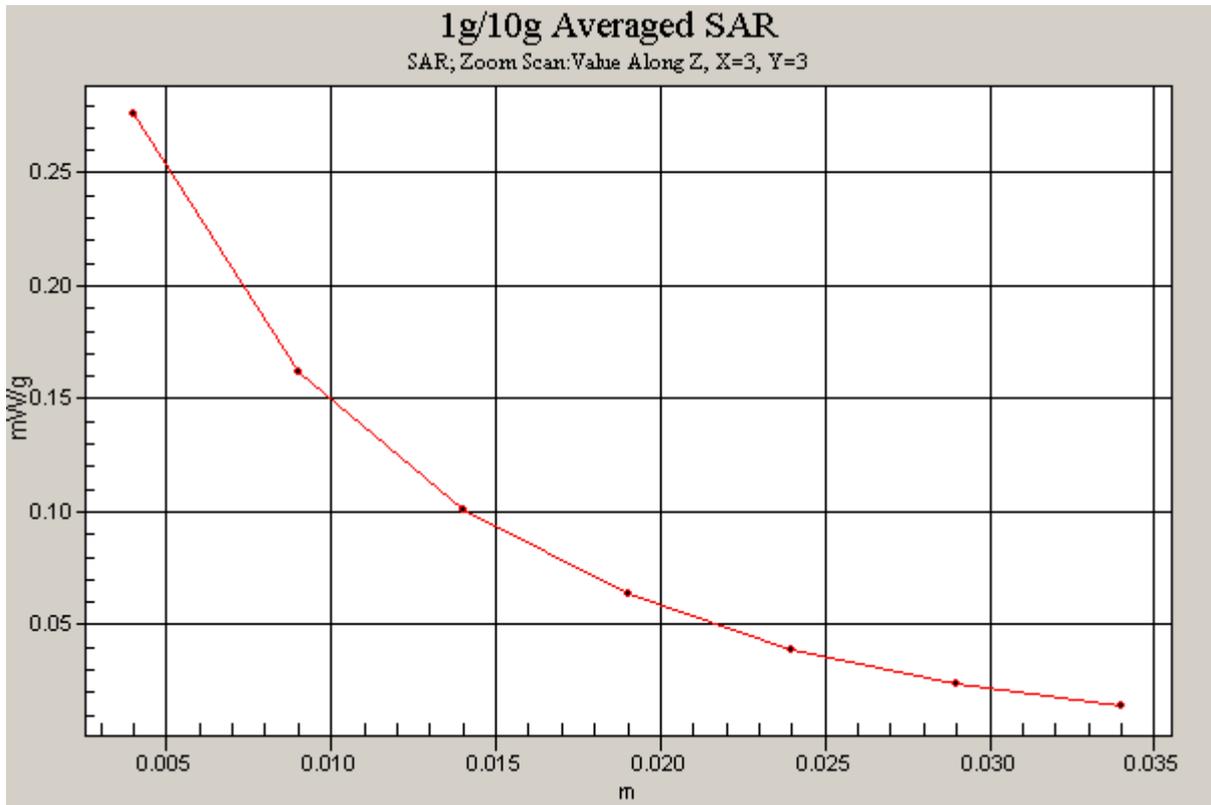


Figure 64 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 Channel 661)

GSM 1900 Towards Ground Low Open

Date/Time: 9/11/2009 7:59:51 PM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground Low/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.281 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.74 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.74 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.248 mW/g

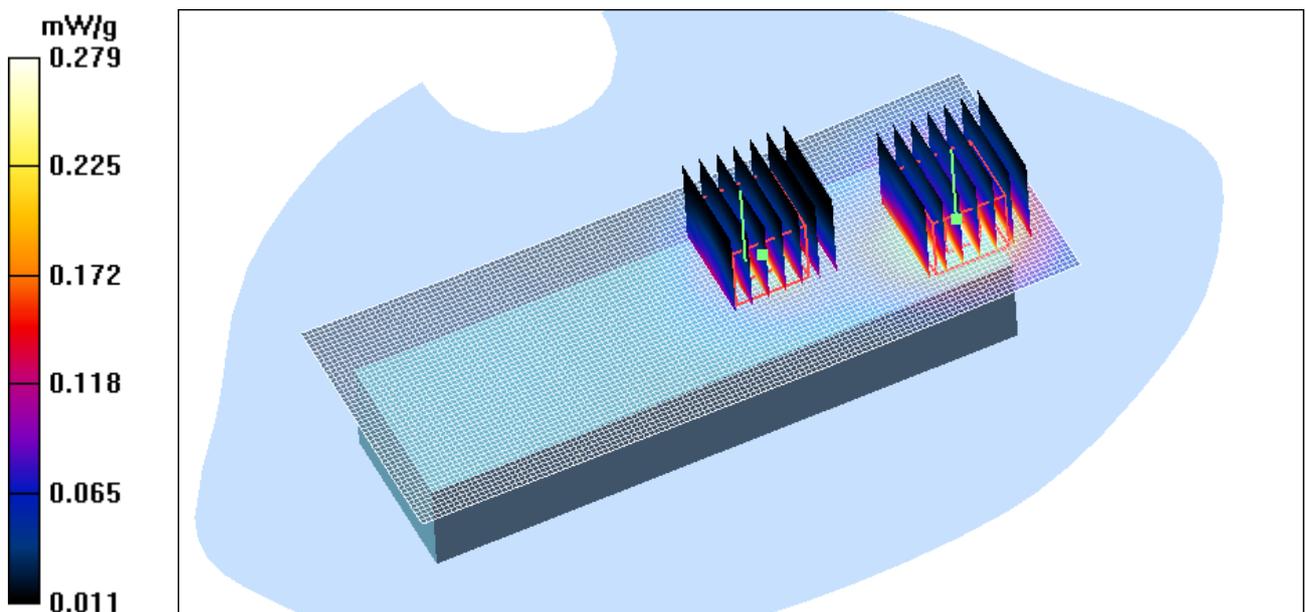


Figure 65 Body, Towards Ground, Open GSM 1900 Channel 512

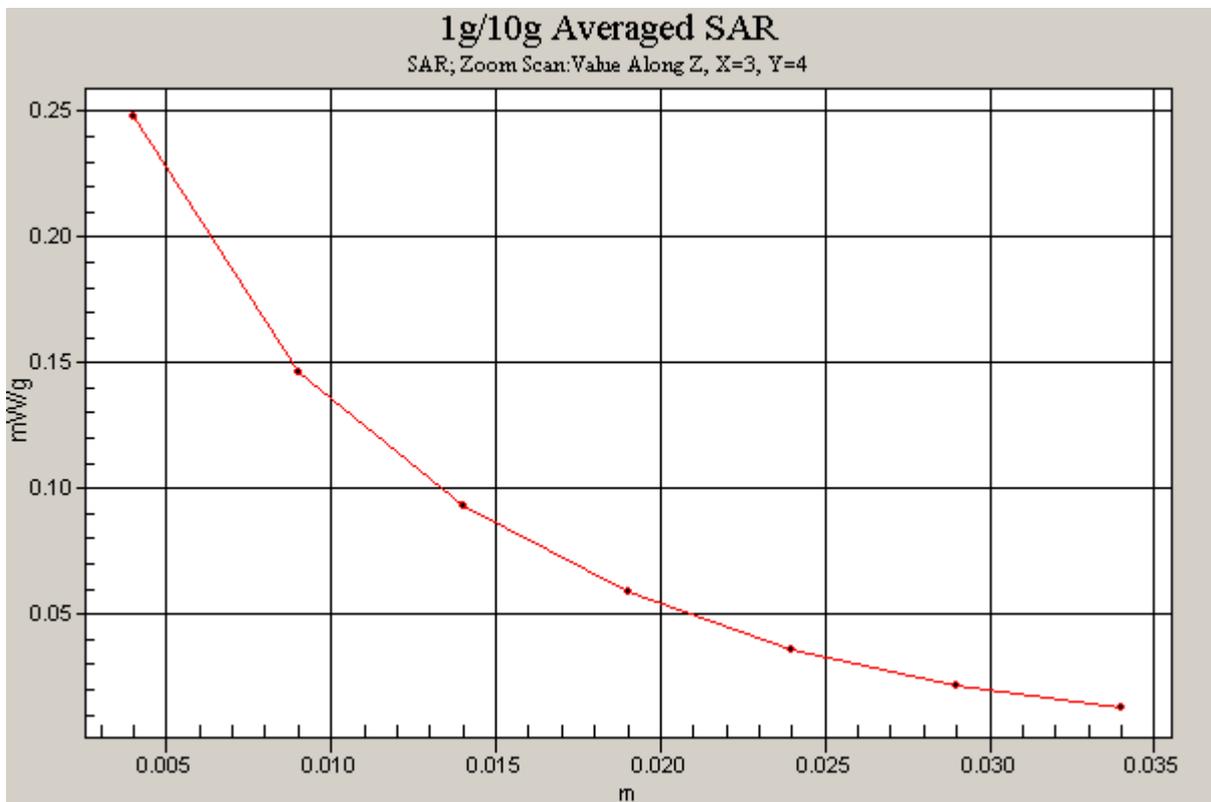
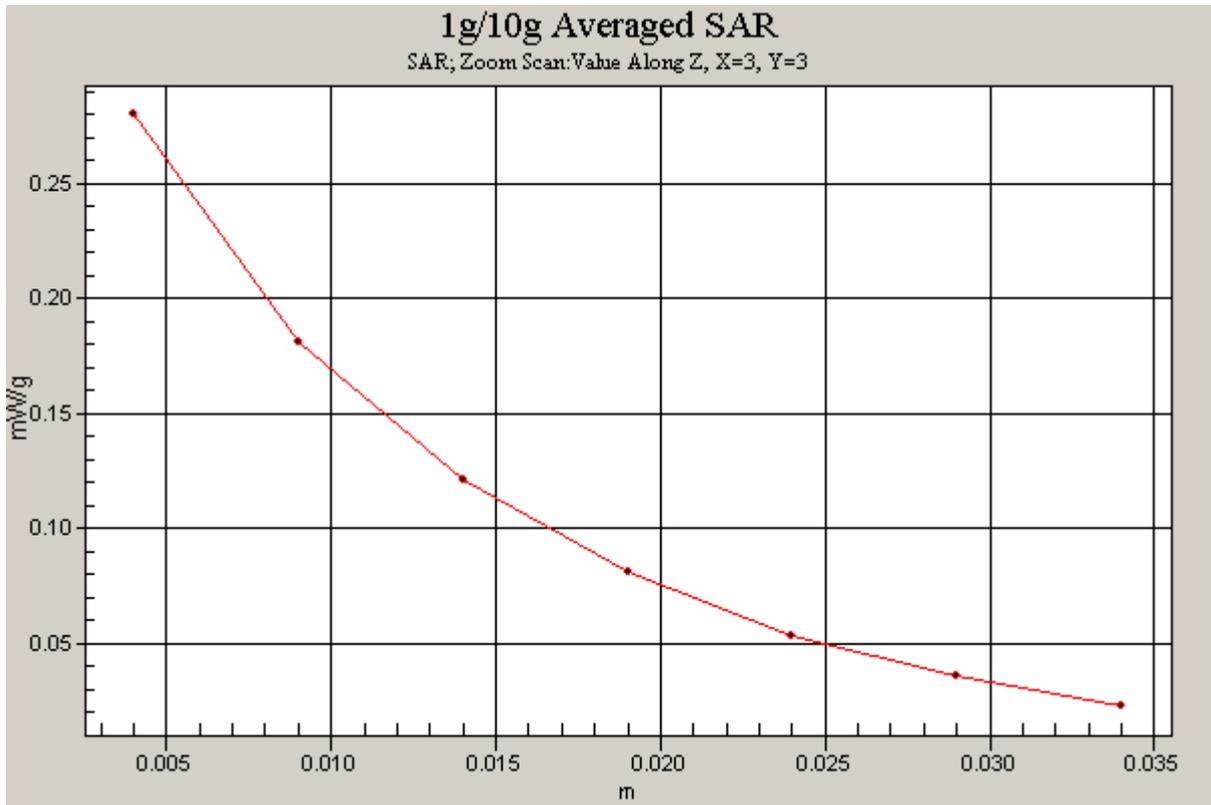


Figure 66 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 Channel 512)

GSM 1900 Towards Ground with Earphone High Open

Date/Time: 9/11/2009 8:44:27 PM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground High/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.354 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.12 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.359 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.12 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.255 mW/g

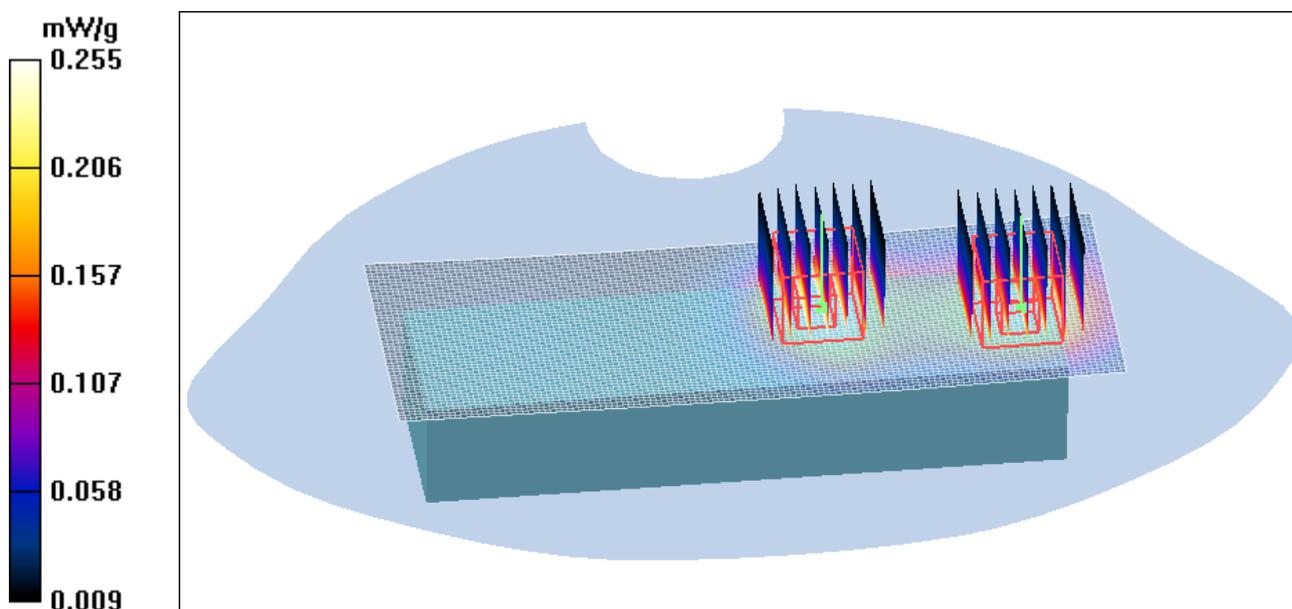


Figure 67 Body with Earphone, Towards Ground, Open GSM 1900 Channel 810

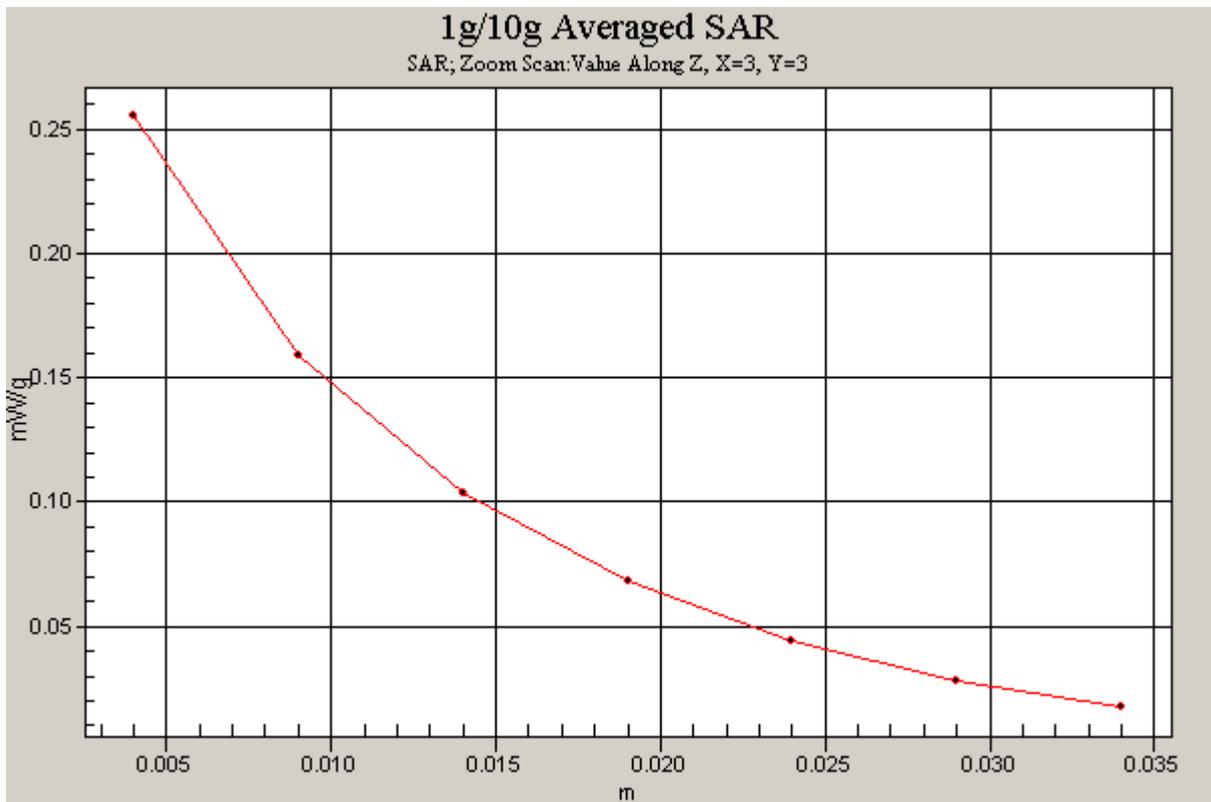
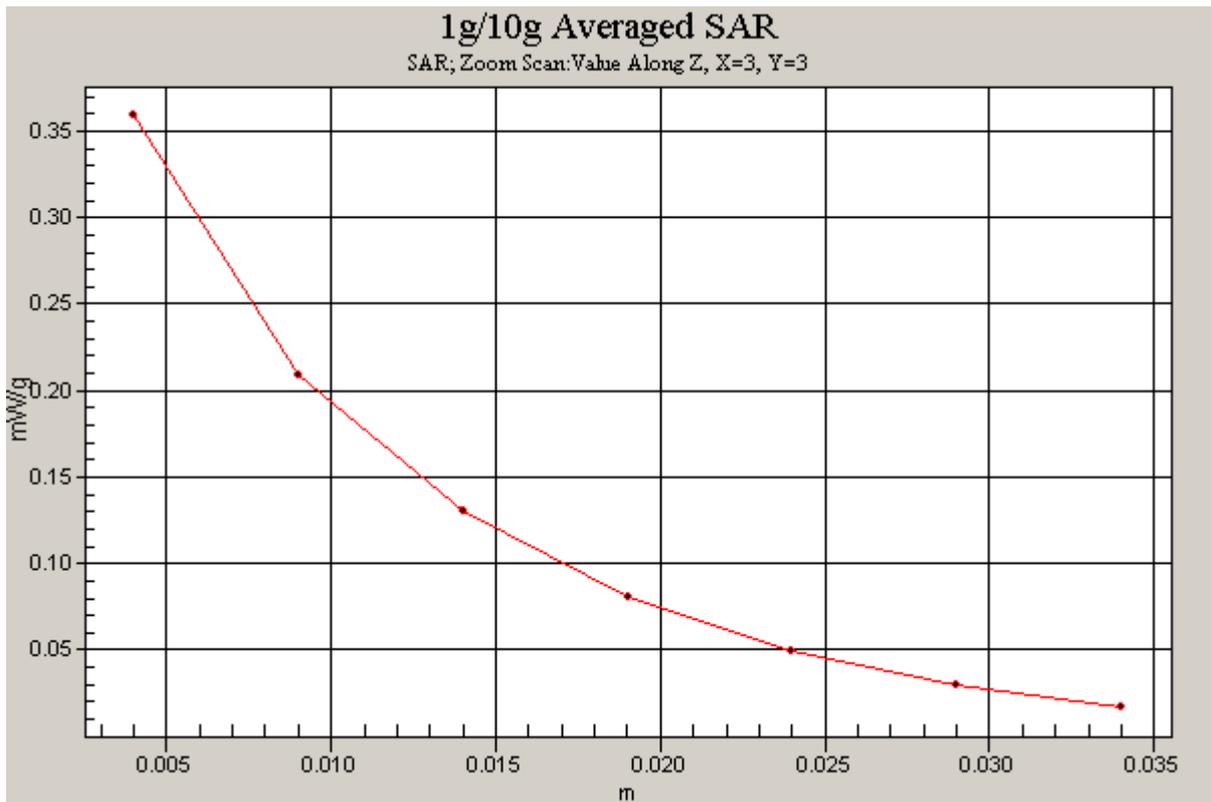


Figure 68 Z-Scan at power reference point (Body with Earphone, Towards Ground, Open GSM 1900 Channel 810)

GSM 1900+GPRS(3Up) Towards Ground High Open

Date/Time: 9/11/2009 9:18:06 PM

Communication System: PCS 1900+GPRS(3Up); Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(4.60, 4.60, 4.60); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Towards Ground High/Area Scan (51x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.614 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.53 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.626 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.53 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

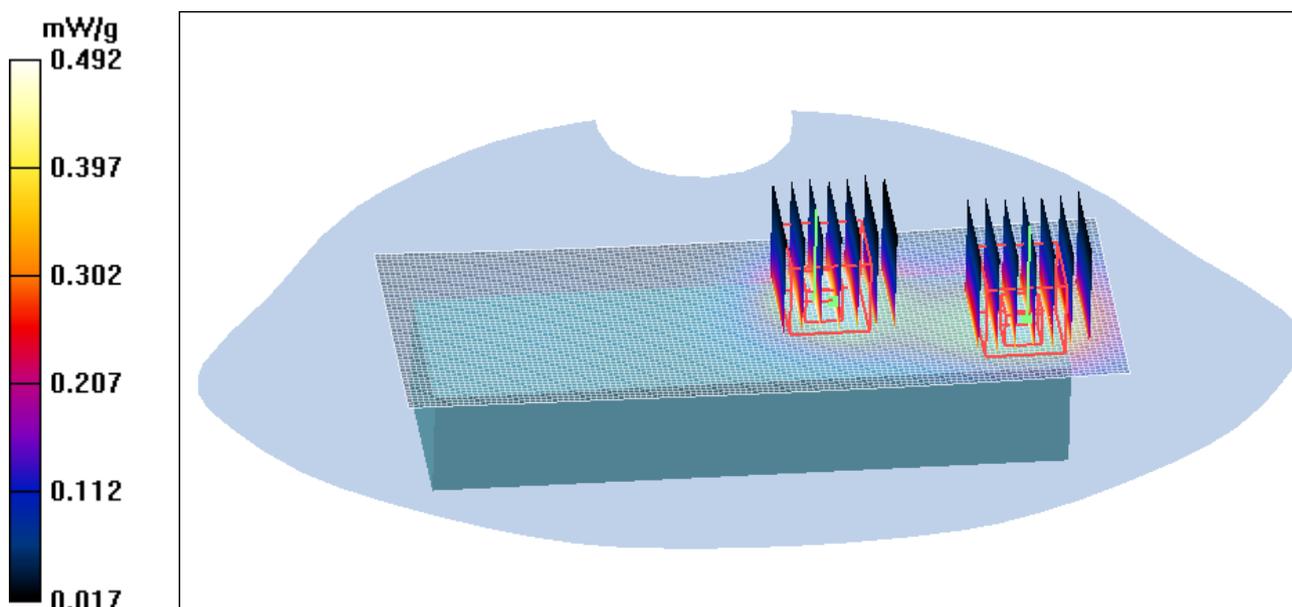


Figure 69 Body, Towards Ground, Open GSM 1900 GPRS(3up) Channel 810

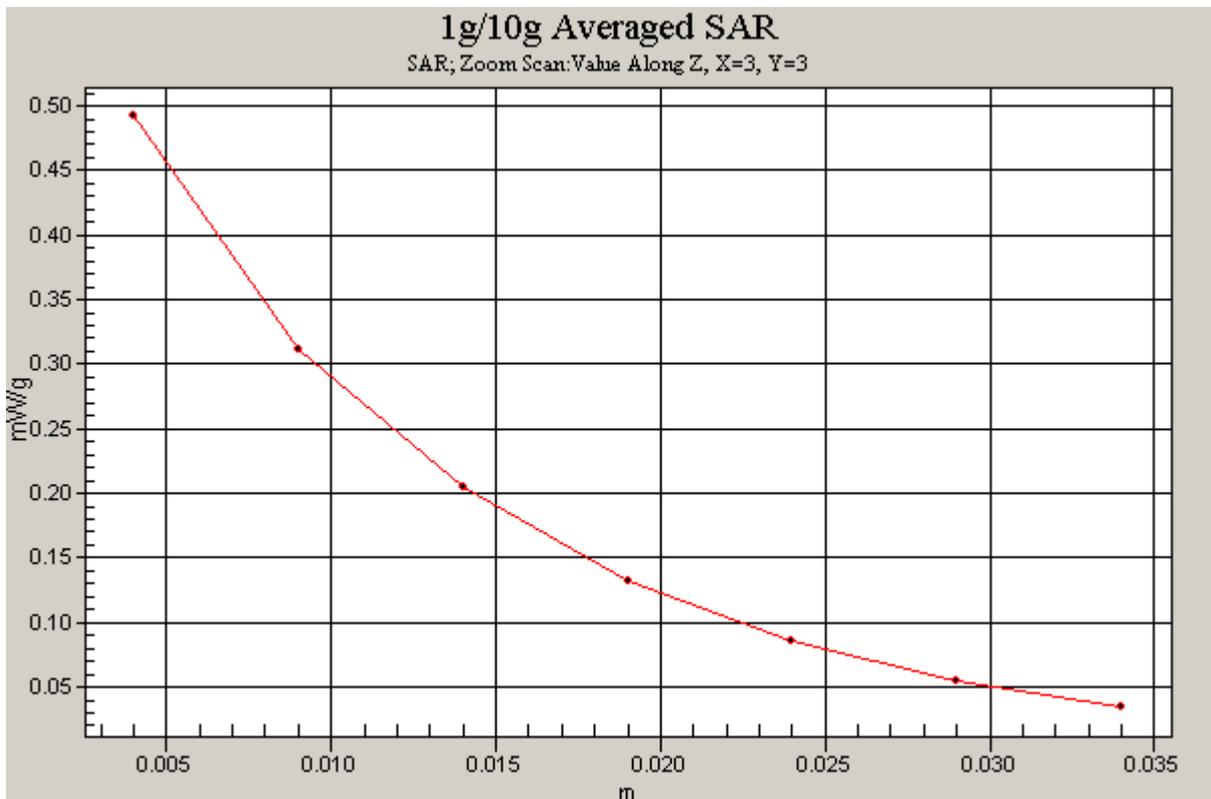
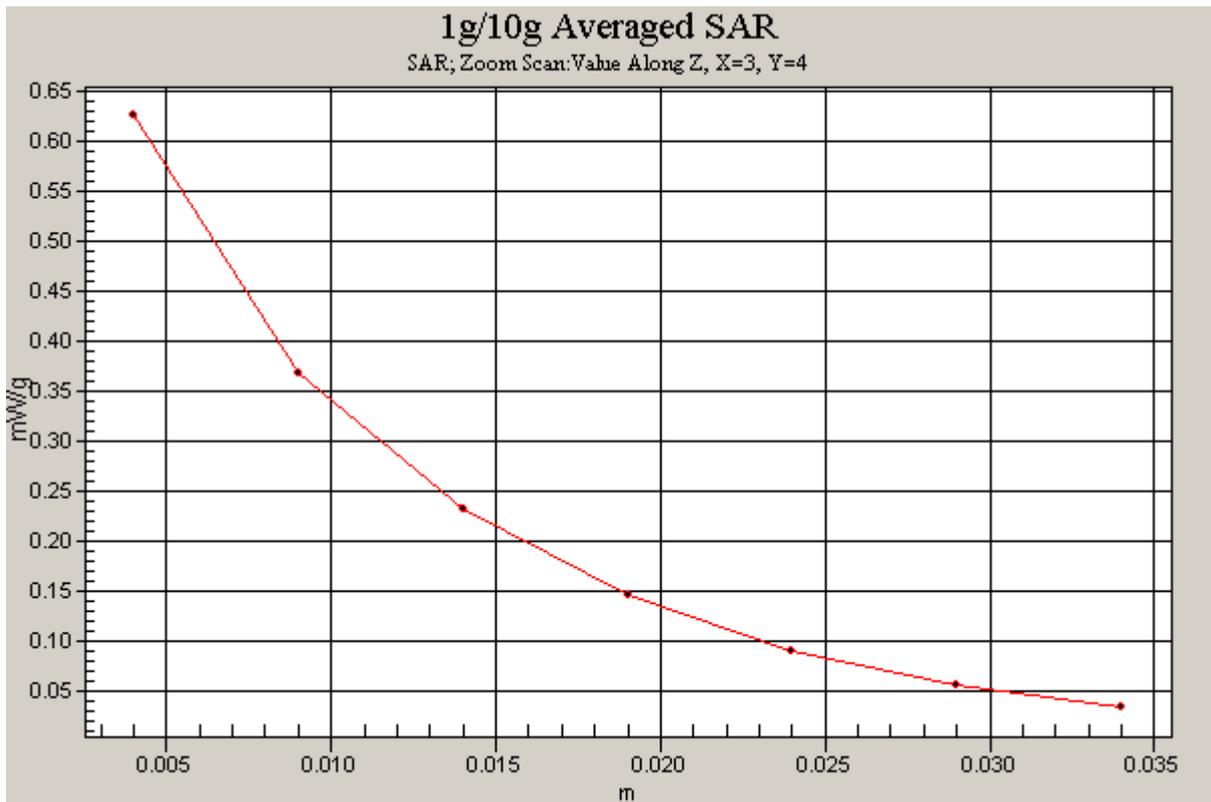


Figure 70 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 GPRS(3up) Channel 810)

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA2009-1061

Page 97 of 133

ANNEX D: Probe Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA Shanghai (Auden)**

Certificate No: **ET3-1737_Nov08**

CALIBRATION CERTIFICATE																																																			
Object	ET3DV6 - SN:1737																																																		
Calibration procedure(s)	QA CAL-01.v6, QA CAL-12.v5 and QA CAL-23.v3 Calibration procedure for dosimetric E-field probes																																																		
Calibration date:	November 25, 2008																																																		
Condition of the calibrated item	In Tolerance																																																		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Cal Date (Certificate No.)</th> <th style="width: 25%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>1-Apr-08 (No. 217-00788)</td> <td>Apr-09</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>1-Apr-08 (No. 217-00788)</td> <td>Apr-09</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41498087</td> <td>1-Apr-08 (No. 217-00788)</td> <td>Apr-09</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>1-Jul-08 (No. 217-00865)</td> <td>Jul-09</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>31-Mar-08 (No. 217-00787)</td> <td>Apr-09</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>1-Jul-08 (No. 217-00866)</td> <td>Jul-09</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>2-Jan-08 (No. ES3-3013_Jan08)</td> <td>Jan-09</td> </tr> <tr> <td>DAE4</td> <td>SN: 660</td> <td>9-Sep-08 (No. DAE4-660_Sep08)</td> <td>Sep-09</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Secondary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Check Date (in house)</th> <th style="width: 25%;">Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8648C</td> <td>US3642UD1700</td> <td>4-Aug-99 (in house check Oct-07)</td> <td>In house check: Oct-09</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (in house check Oct-08)</td> <td>In house check: Oct-09</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09	Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09	Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09	Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09	Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09	Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09	Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09	DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	RF generator HP 8648C	US3642UD1700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09	Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09																																																
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09																																																
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09																																																
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09																																																
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09																																																
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09																																																
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09																																																
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09																																																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																
RF generator HP 8648C	US3642UD1700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09																																																
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09																																																
Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature 																																																
Approved by:	Name Niels Kuster	Function Quality Manager	Signature 																																																
			Issued: November 25, 2008																																																
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																			

Certificate No: ET3-1737_Nov08

Page 1 of 9

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1737

November 25, 2008

Probe ET3DV6

SN:1737

Manufactured:	September 27, 2002
Last calibrated:	February 19, 2007
Repaired:	November 18, 2008
Recalibrated:	November 25, 2008

Calibrated for DASY Systems


(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1737

November 25, 2008

Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)



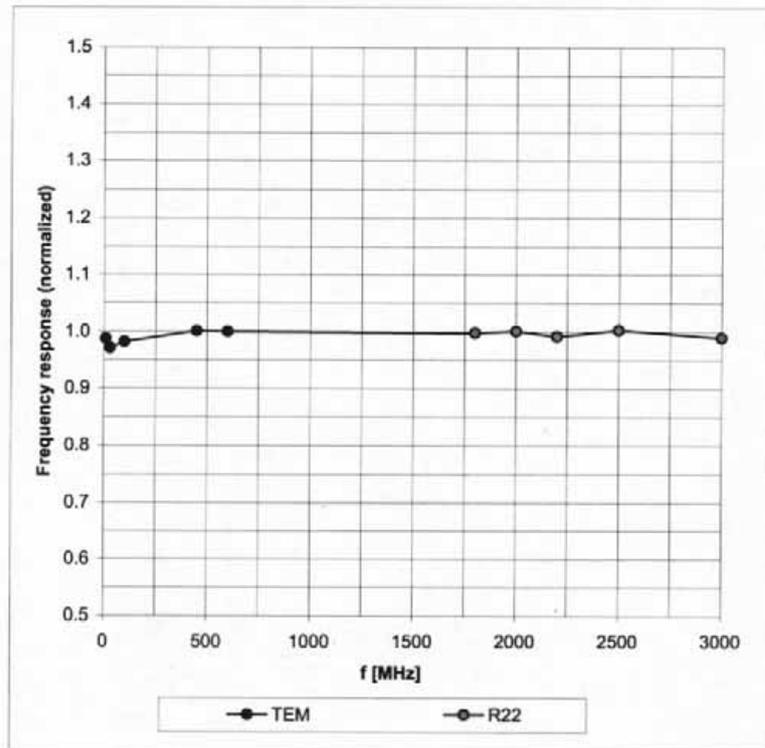


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1737

November 25, 2008

Receiving Pattern (ϕ), $\theta = 0^\circ$

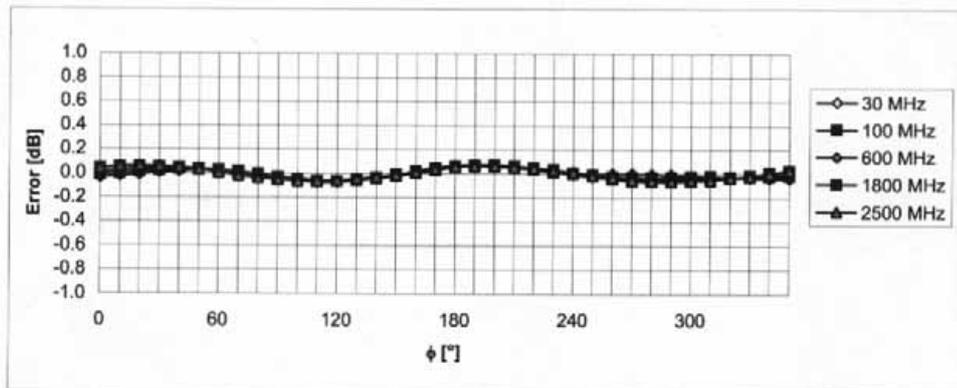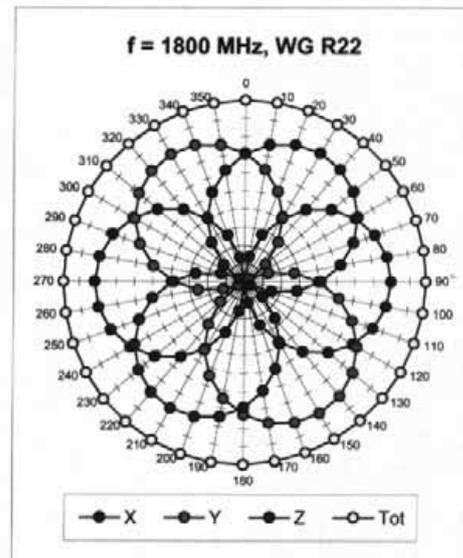
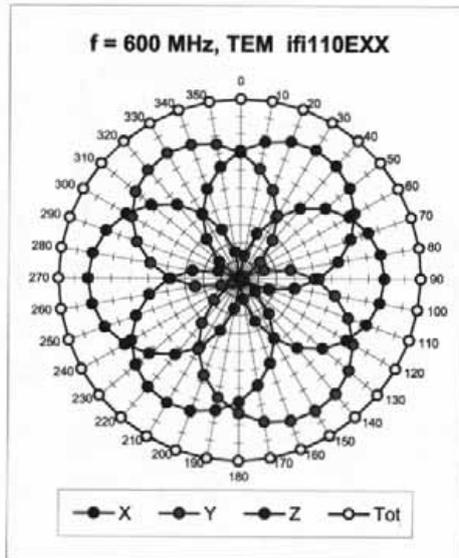


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6 SN:1737

November 25, 2008

Dynamic Range $f(SAR_{head})$
(Waveguide R22, $f = 1800$ MHz)

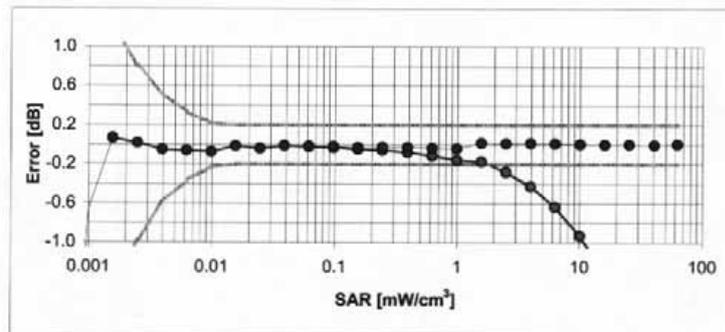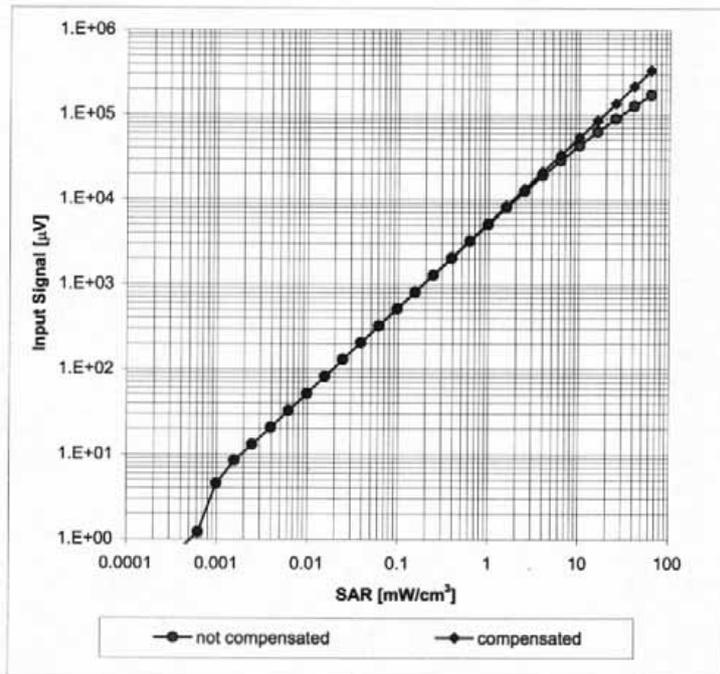


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1737

November 25, 2008

Conversion Factor Assessment

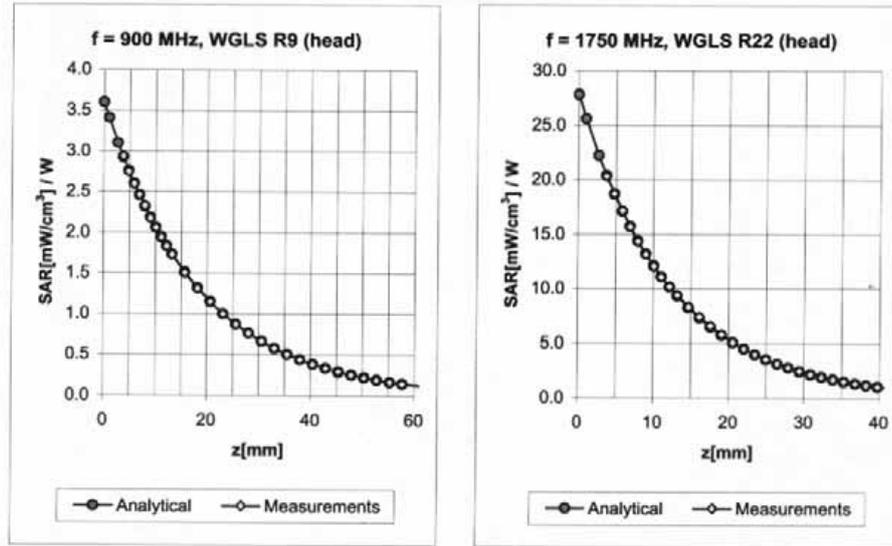


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.36	1.84	7.20 ± 13.3% (k=2)
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.25	3.53	6.33 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.27	3.53	6.14 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.56	2.77	5.35 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.57	2.72	4.89 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.51	1.60	4.39 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.27	1.80	7.52 ± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.36	2.75	6.14 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.43	2.51	5.98 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.99	1.74	4.84 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.99	1.50	4.60 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.98	1.42	3.91 ± 11.0% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1737

November 25, 2008

Deviation from Isotropy in HSL
Error (ϕ , θ), $f = 900$ MHz

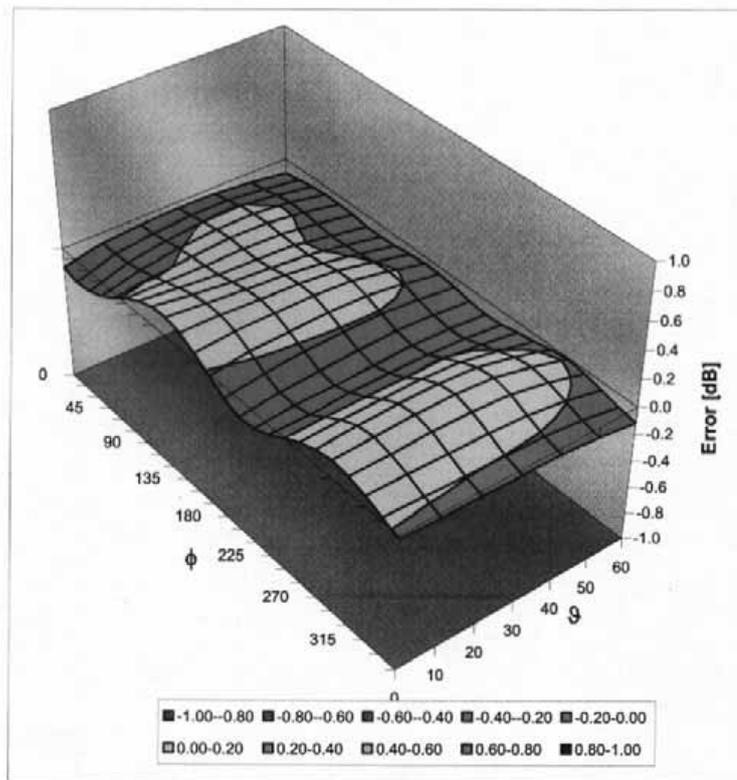

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA2009-1061

Page 106of 133

ANNEX E: D835V2 Dipole Calibration Certificate

信息产业部通信计量中心
Telecommunication Metrology Center of MII



Client

TA

Certificate No: D835V2-4d020_Jul09

检测
CNAS L0442

CALIBRATION CERTIFICATE

Object	D835V2 - SN: 4d020
Calibration Procedure(s)	TMC-XZ-01-027 Calibration procedure for dipole validation kits
Calibration date:	July 15, 2009
Condition of the calibrated item	In Tolerance

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRVD	101253	19-Jun-09 (TMC, No.JZ09-248)	Jun-10
Power sensor NRV-Z5	100333	19-Jun-09 (TMC, No. JZ09-248)	Jun-10
Reference Probe ES3DV3	SN 3149	08-Dec-08(SPEAG, No.ES3-3149_Dec08)	Dec-09
DAE4	SN 771	21-Nov-08(SPEAG, No.DAE4-771_Nov08)	Nov-09
RF generator E4438C	MY45092879	18-Jun-09(TMC, No.JZ09-302)	Jun-10
Network Analyzer 8753E	US38433212	03-Aug-08(TMC, No.JZ08-056)	Aug-09

	Name	Function	Signature
Calibrated by:	Lin Hao	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: July 15, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D835V2-4d020_Jul09

Page 1 of 9

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2009-1061

Page 107 of 133

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA2009-1061

Page 108of 133

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	2mm Oval Phantom ELI4	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.2 ± 6 %	0.91mho/m ± 6 %
Head TSL temperature during test	(21.7 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 mW / g
SAR normalized	normalized to 1W	9.60 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.2 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm^3 (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.55 mW / g
SAR normalized	normalized to 1W	6.20 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.07 mW /g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

TA Technology (Shanghai) Co., Ltd.

Test Report

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.6 ± 6%	0.99mho/m ± 6 %
Body TSL temperature during test	(21.9 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.41 mW / g
SAR normalized	normalized to 1W	9.64 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	9.28 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm^3 (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.58 mW / g
SAR normalized	normalized to 1W	6.32 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	6.19 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA2009-1061

Page 110 of 133

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.7 Ω -3.7 j Ω
Return Loss	- 25.9dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.4 Ω - 5.1 j Ω
Return Loss	-25.6dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.387 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 22, 2004

DASY5 Validation Report for Head TSL

Certificate No: D835V2-4d020_Jul09

Page 5 of 9