







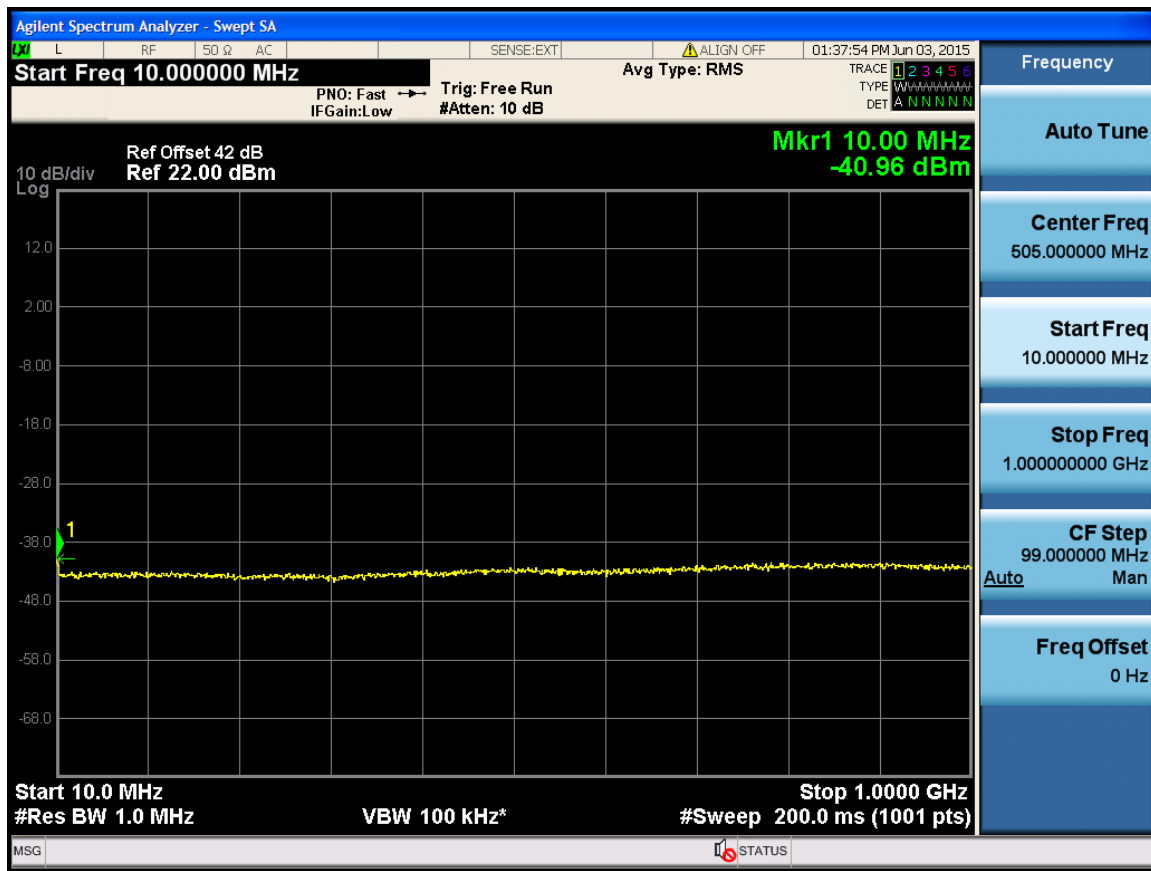


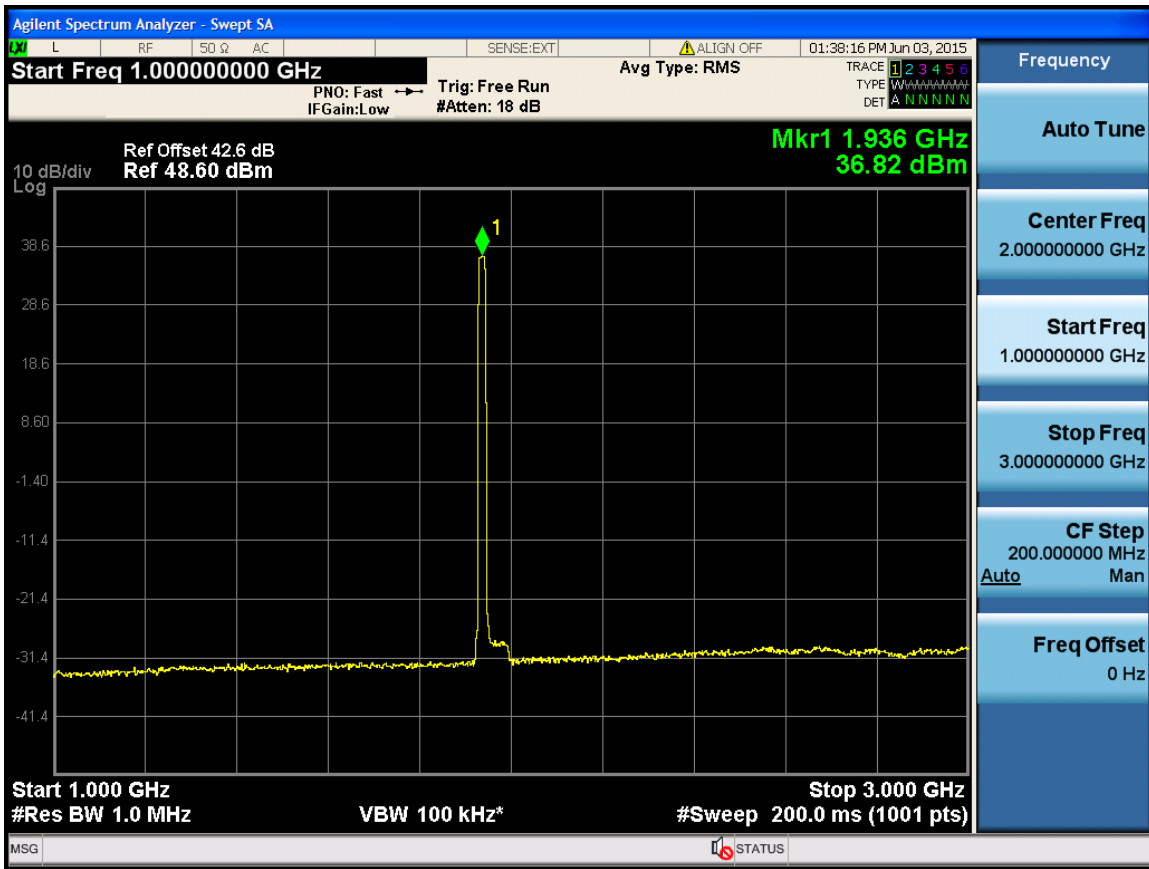

15M -Port 4 -1960MHz

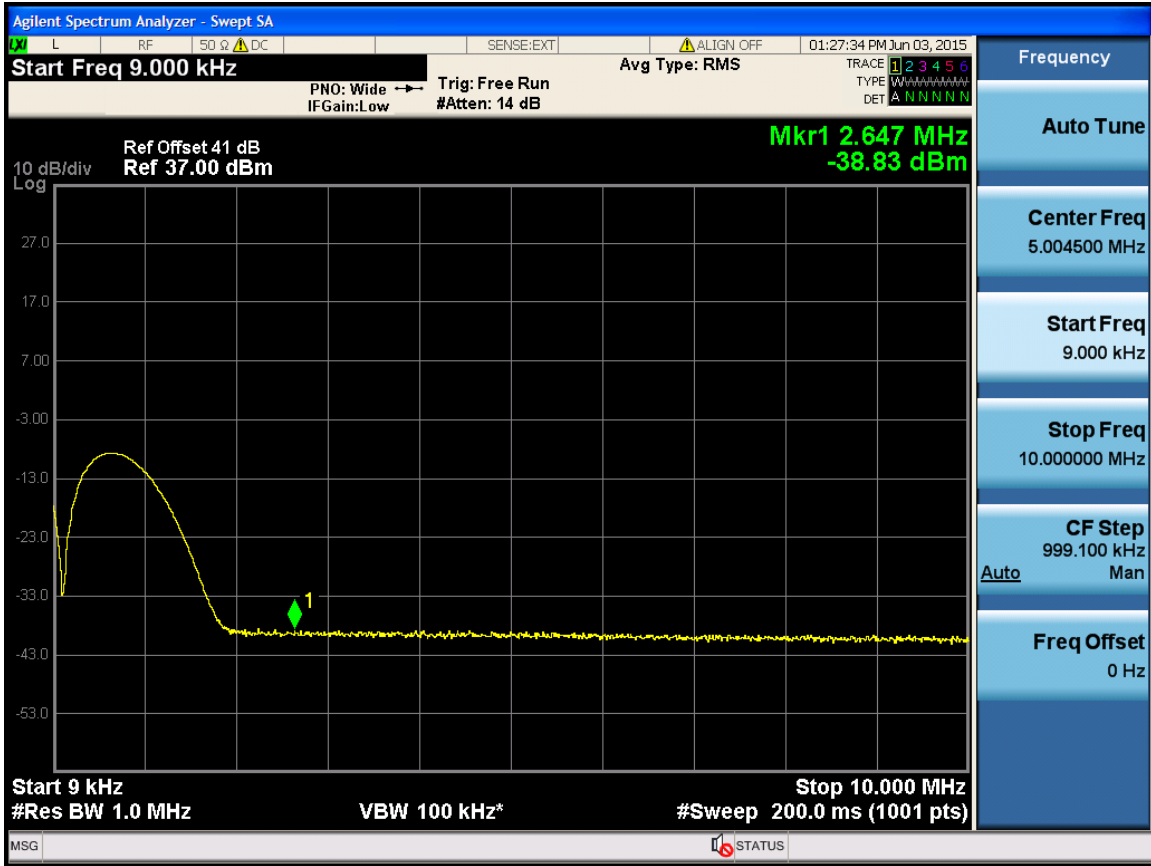


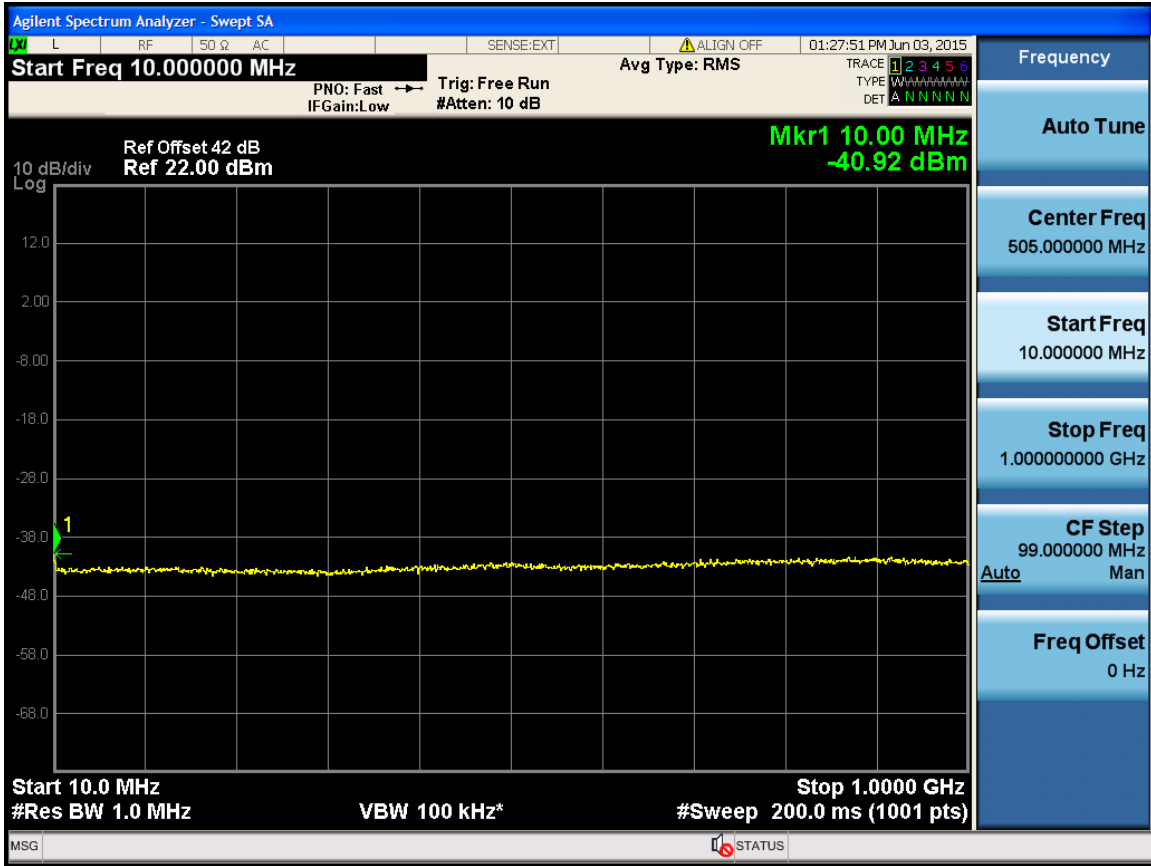


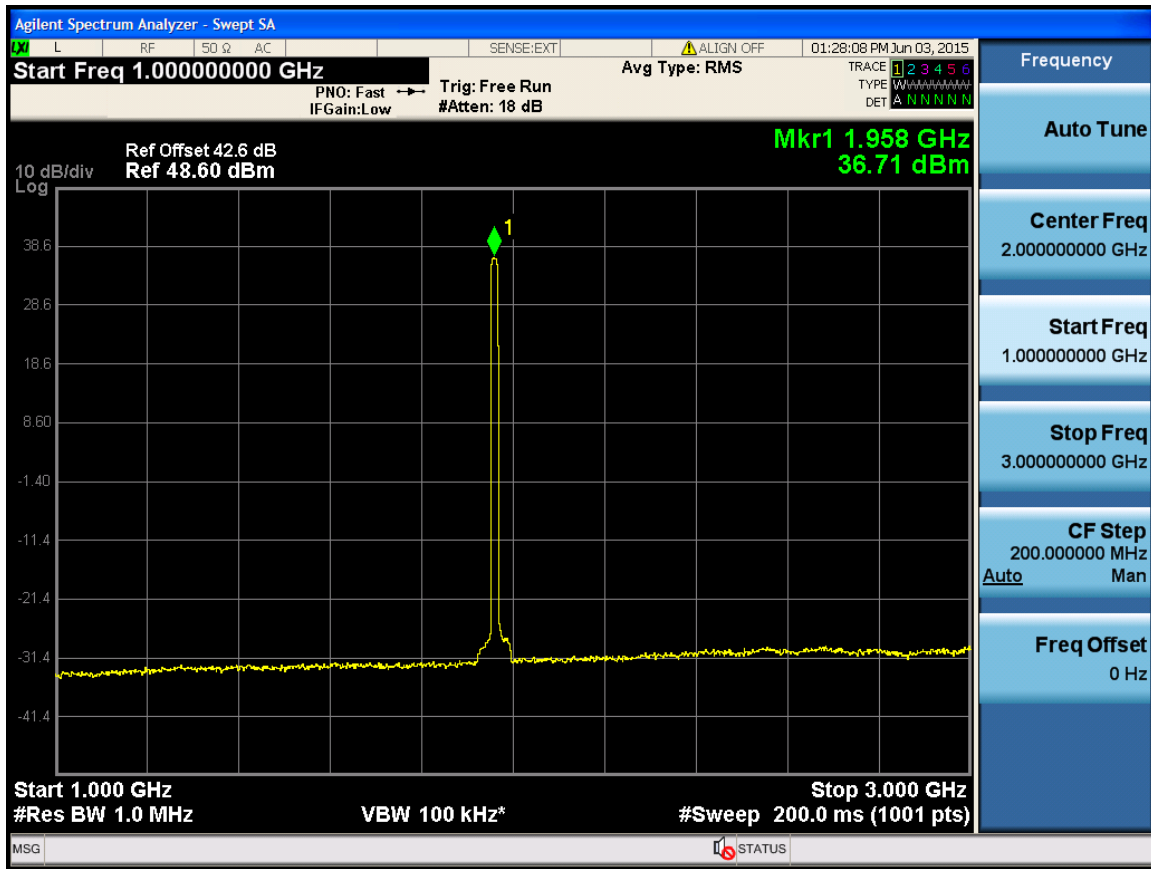




15M -Port 4 -1982.5MHz

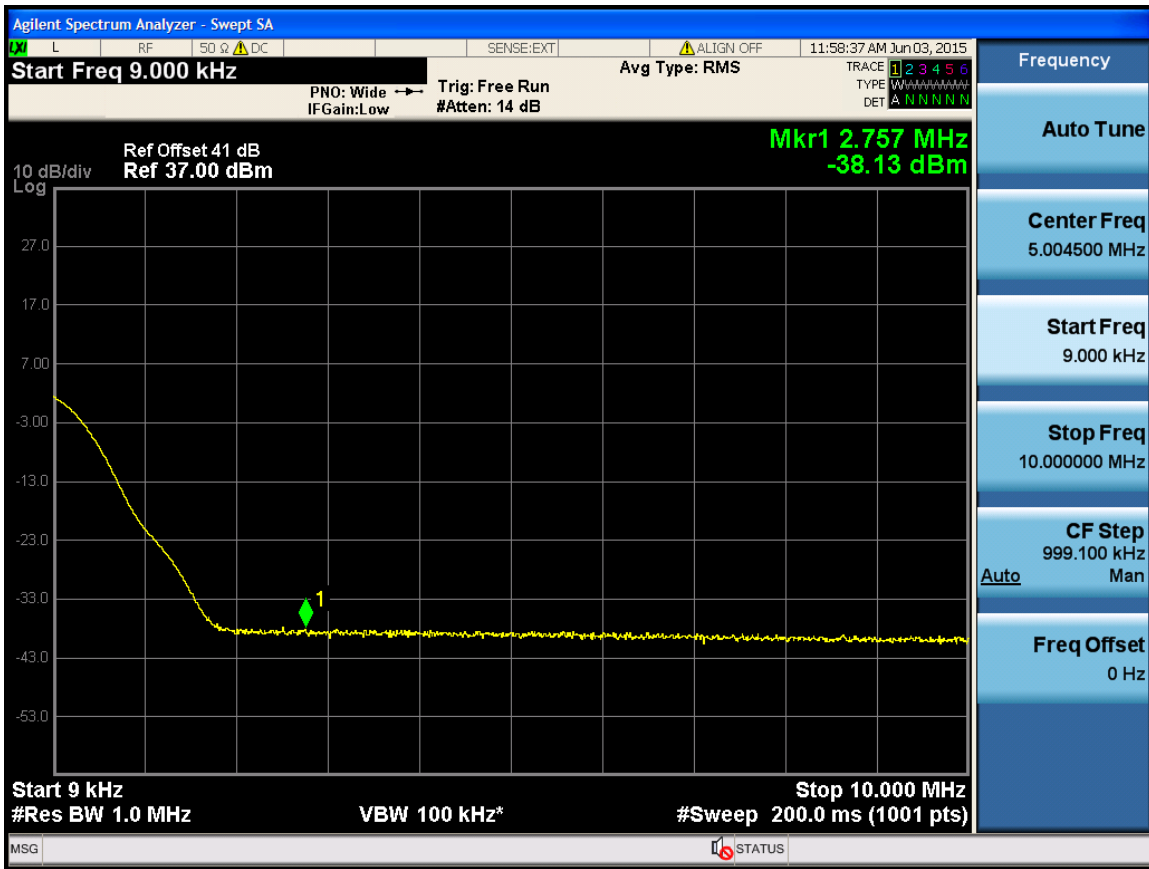


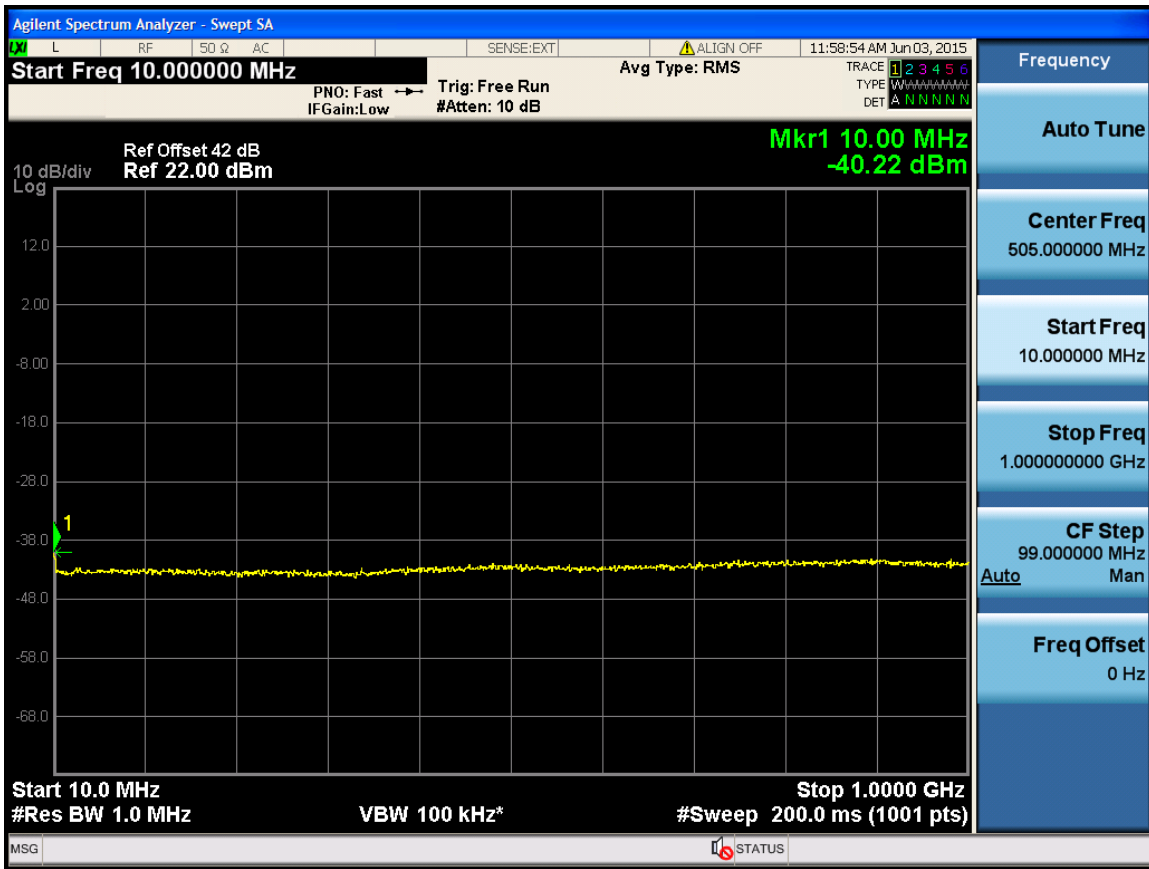


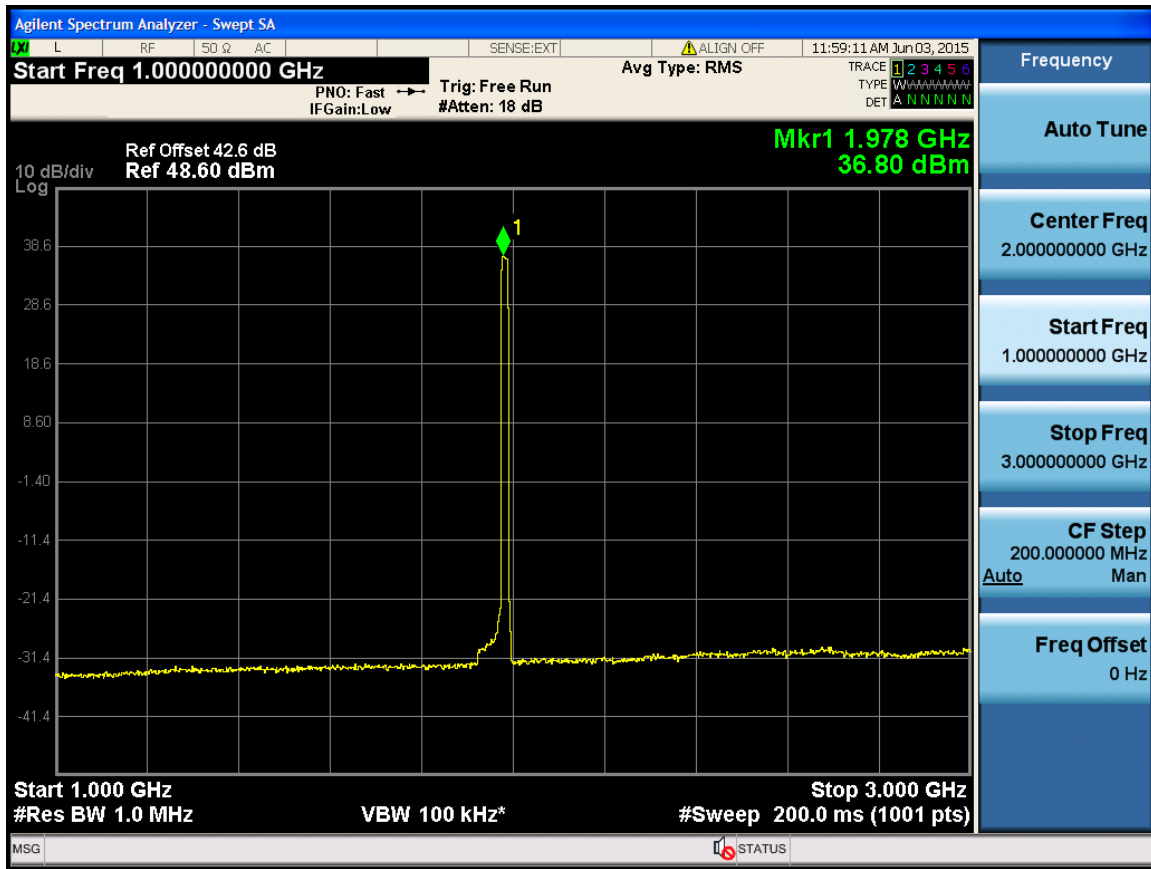




20M -Port 1 -1940MHz

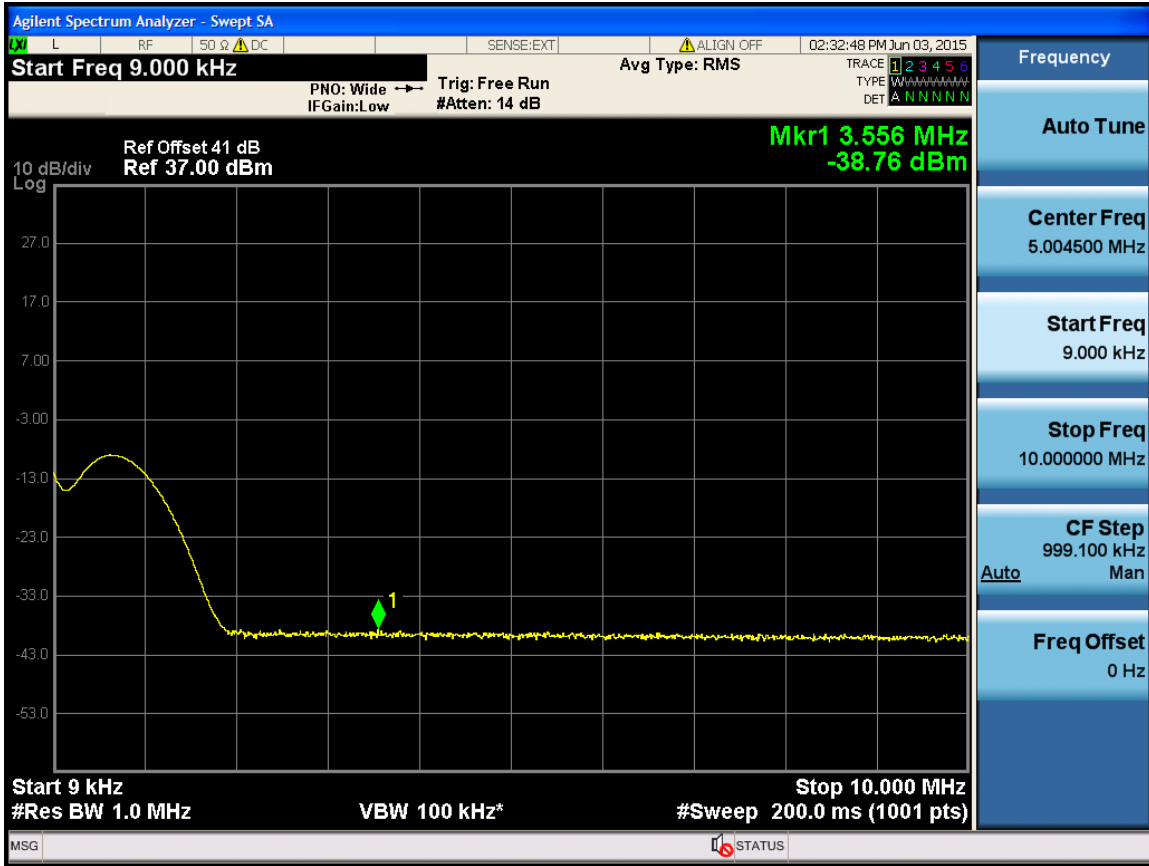


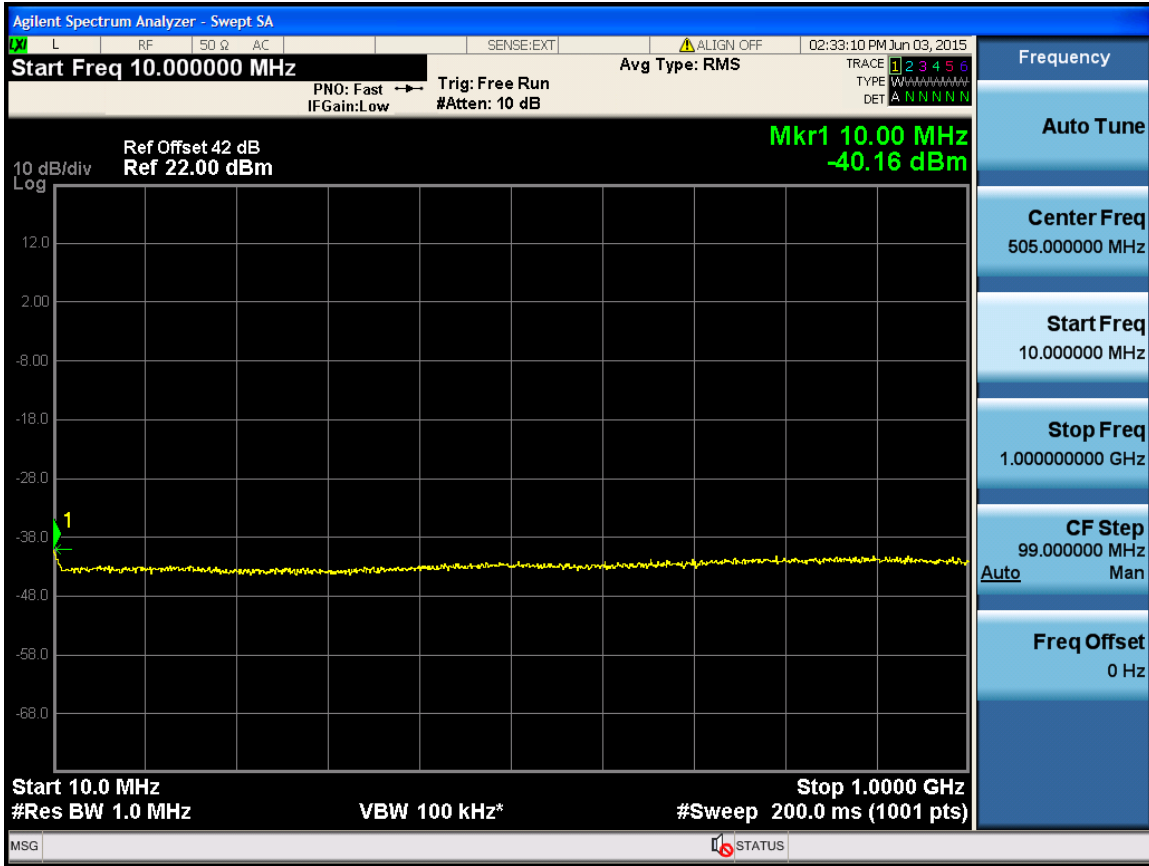


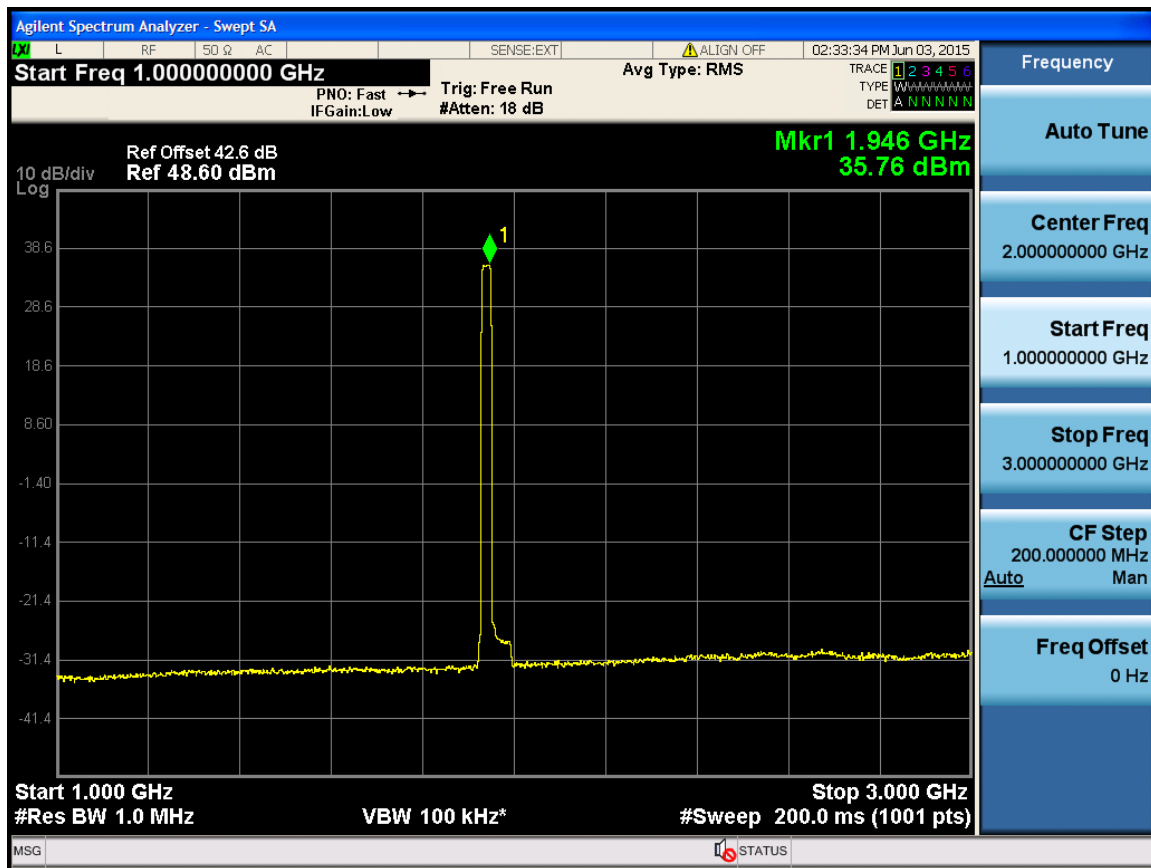




20M -Port 1 -1960MHz

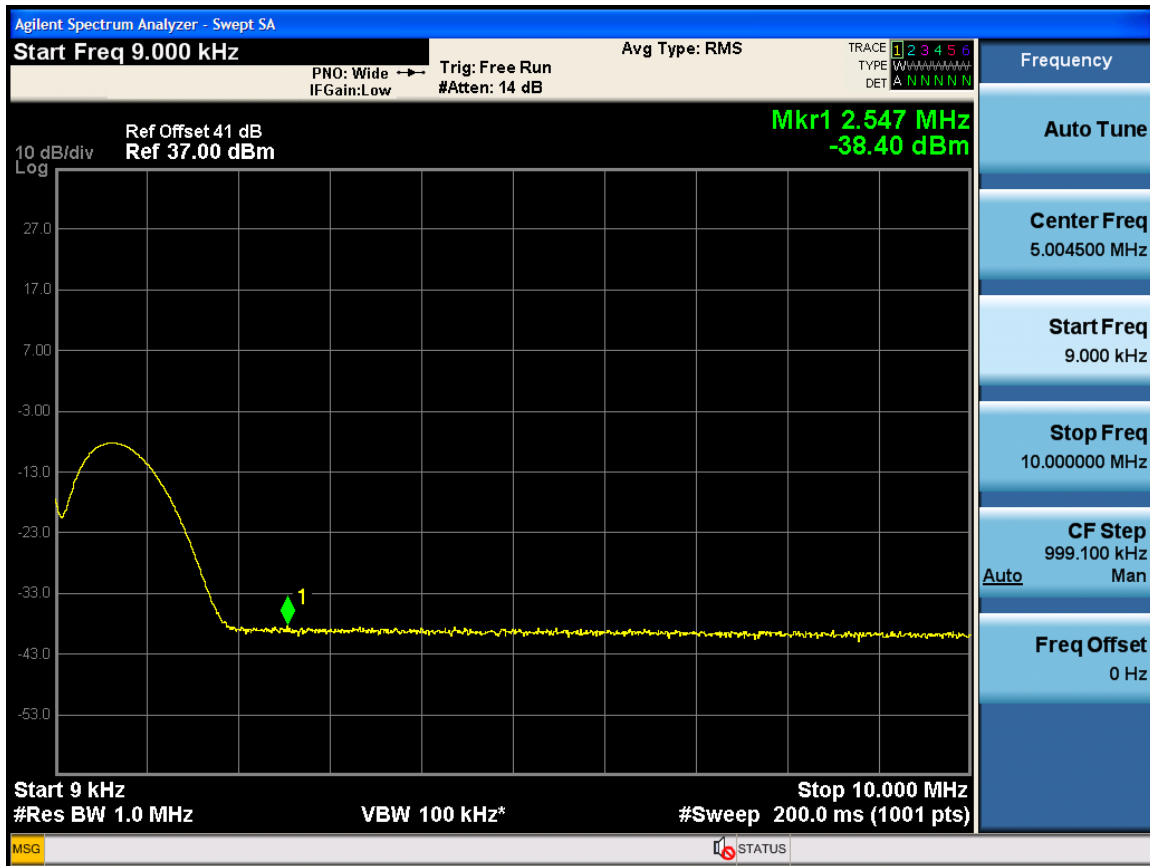


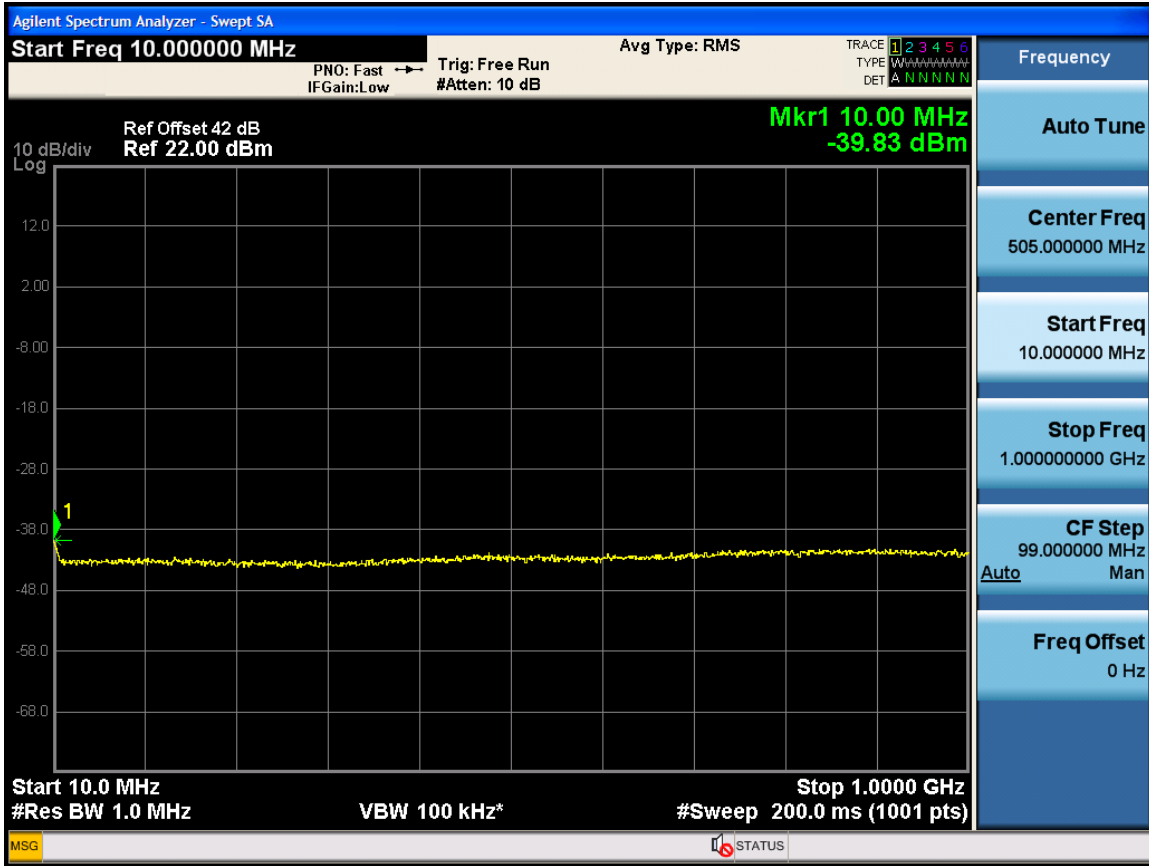


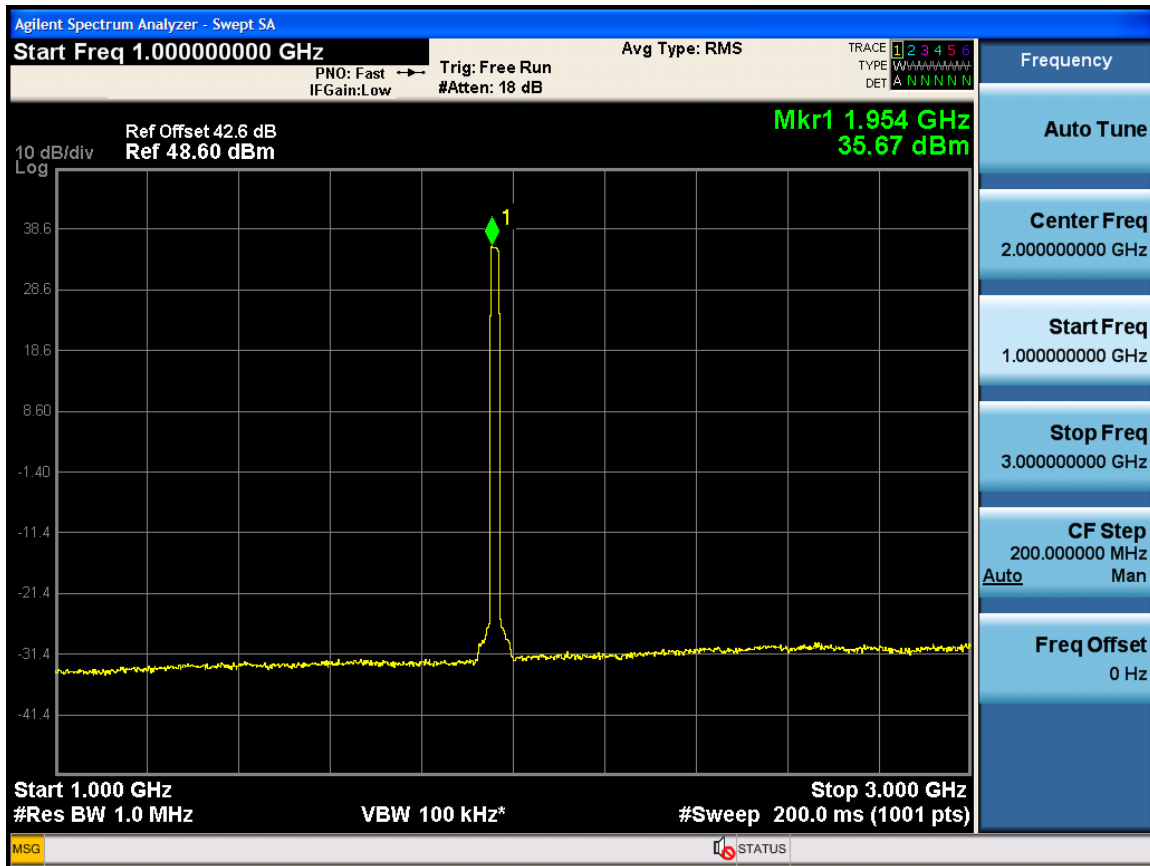




20M -Port 1 -1980MHz

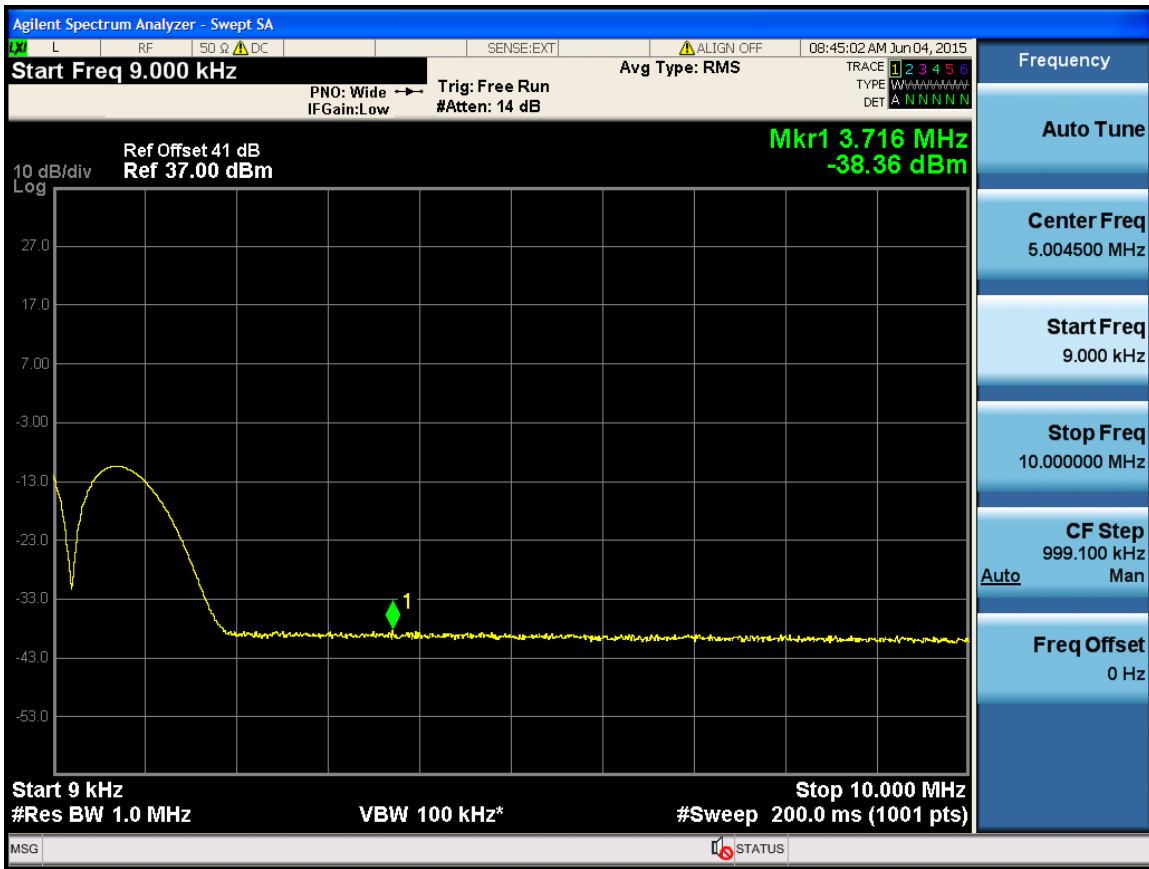


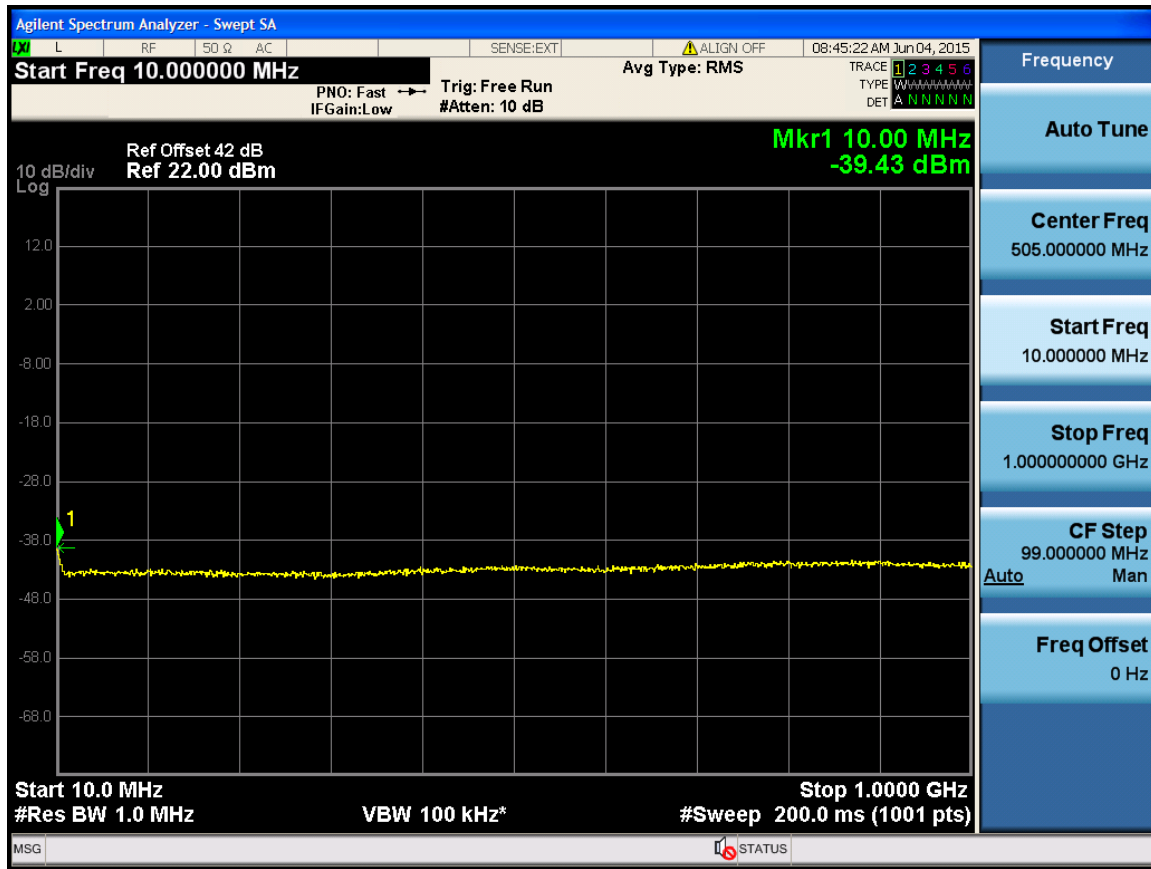


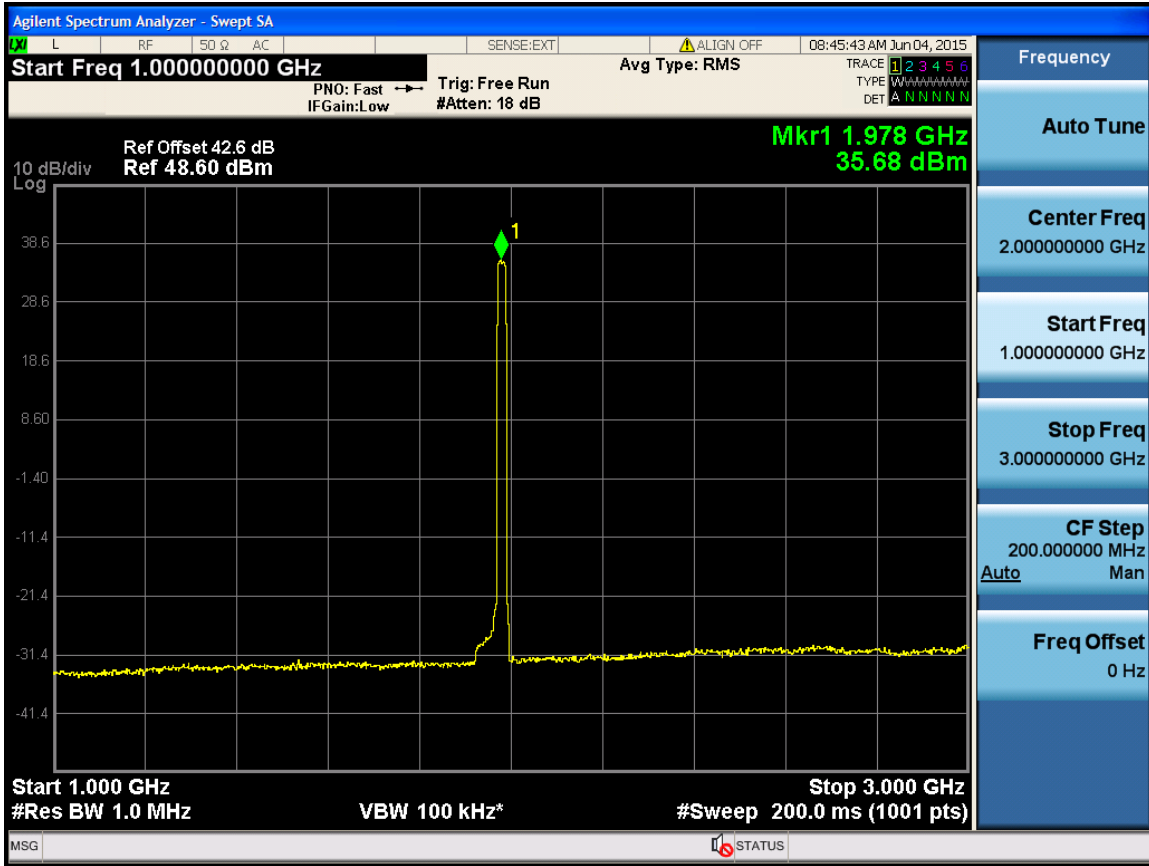




20M -Port 4 -1940MHz

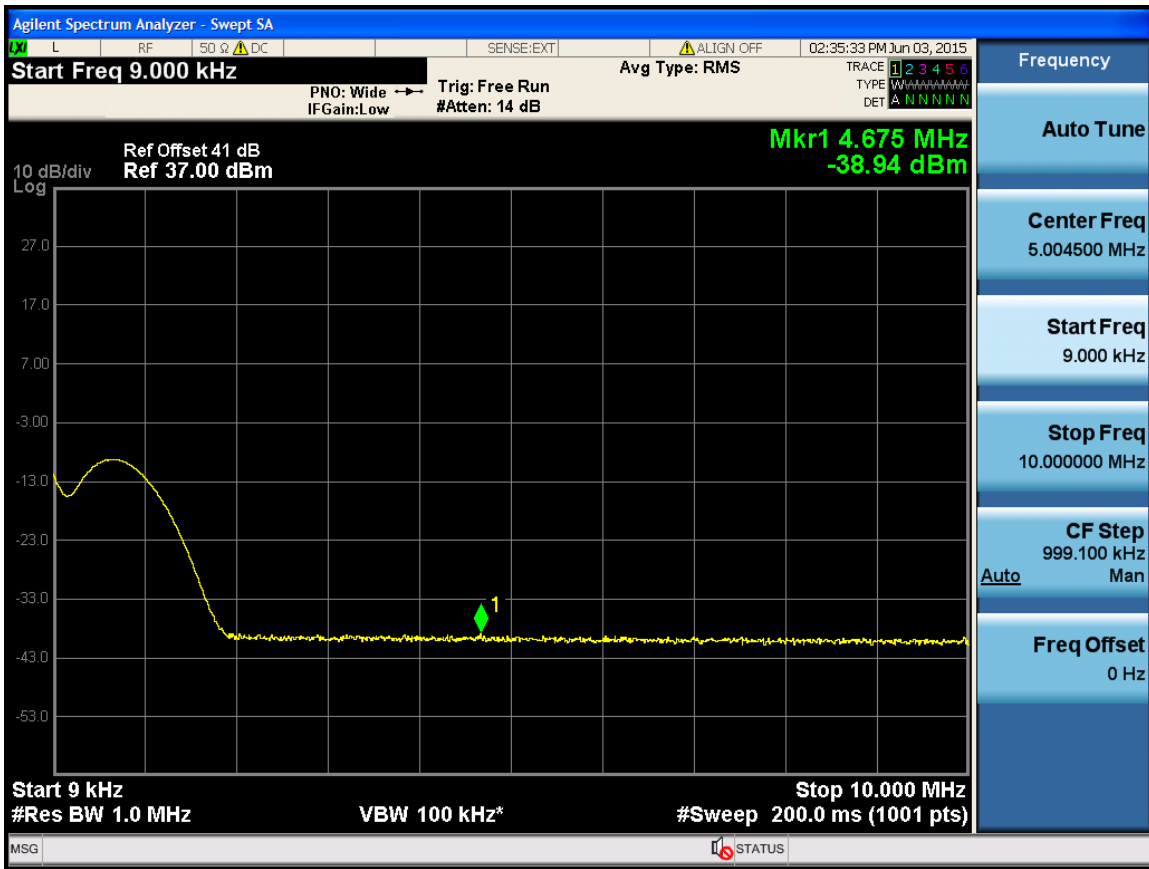


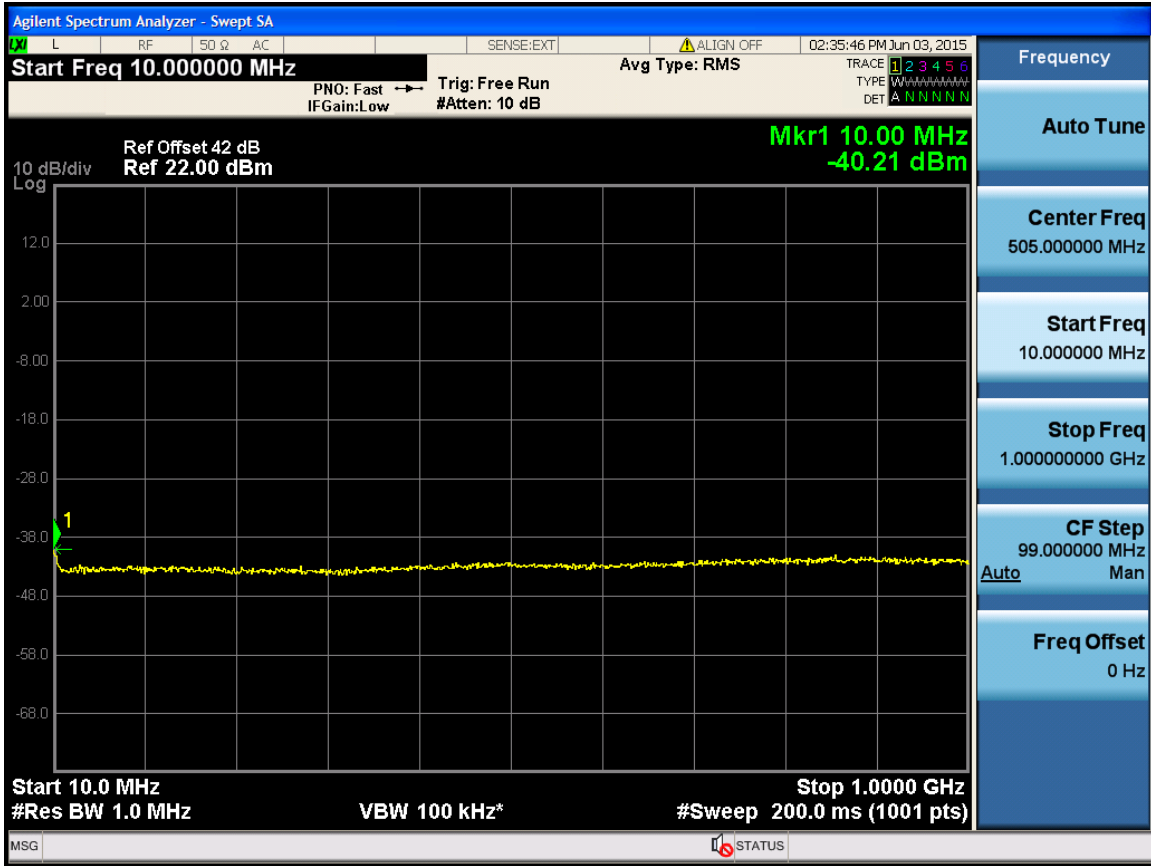


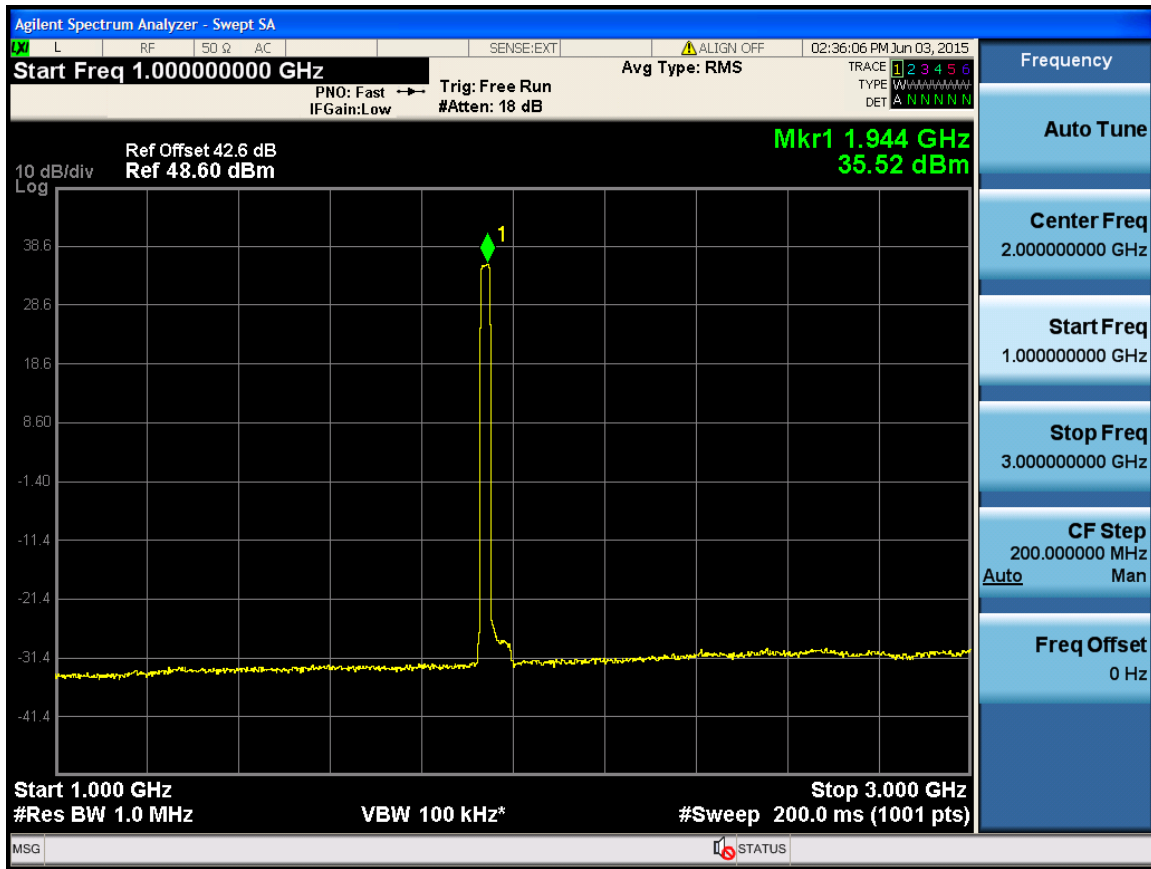




20M -Port 4 -1960MHz

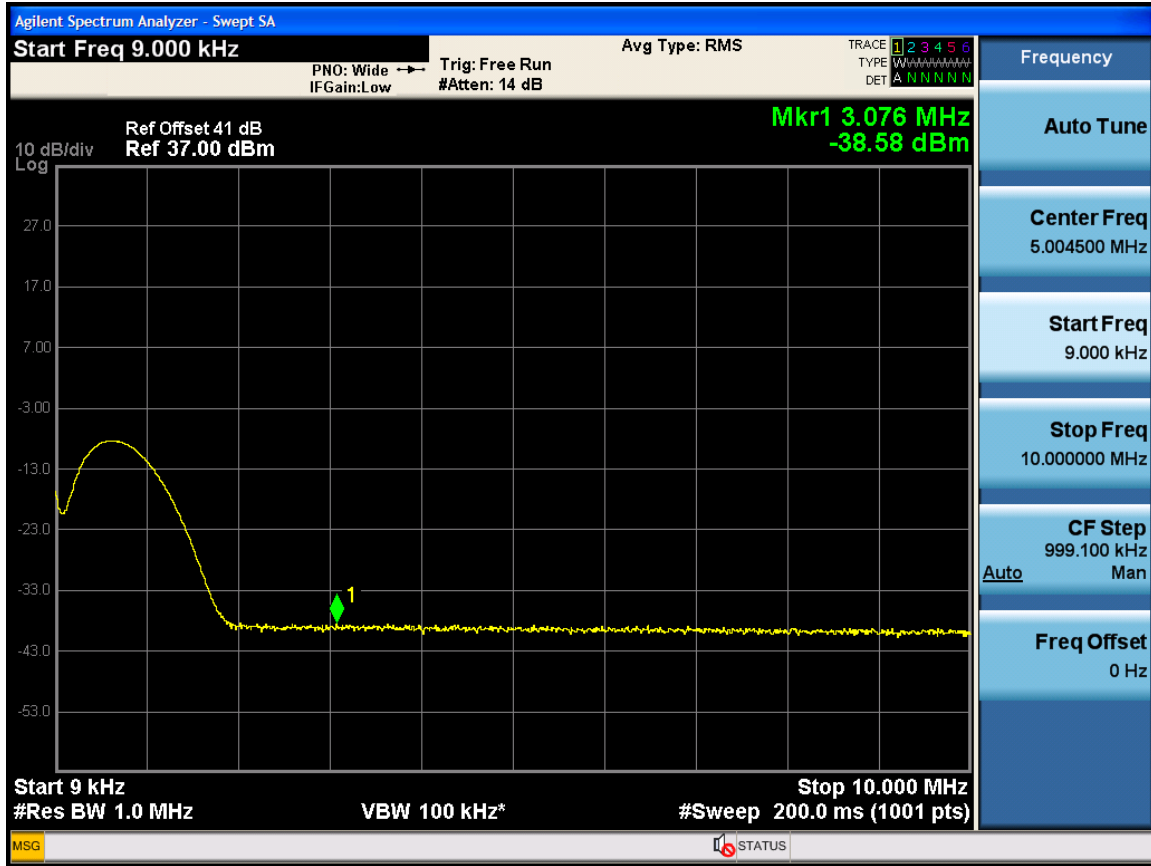


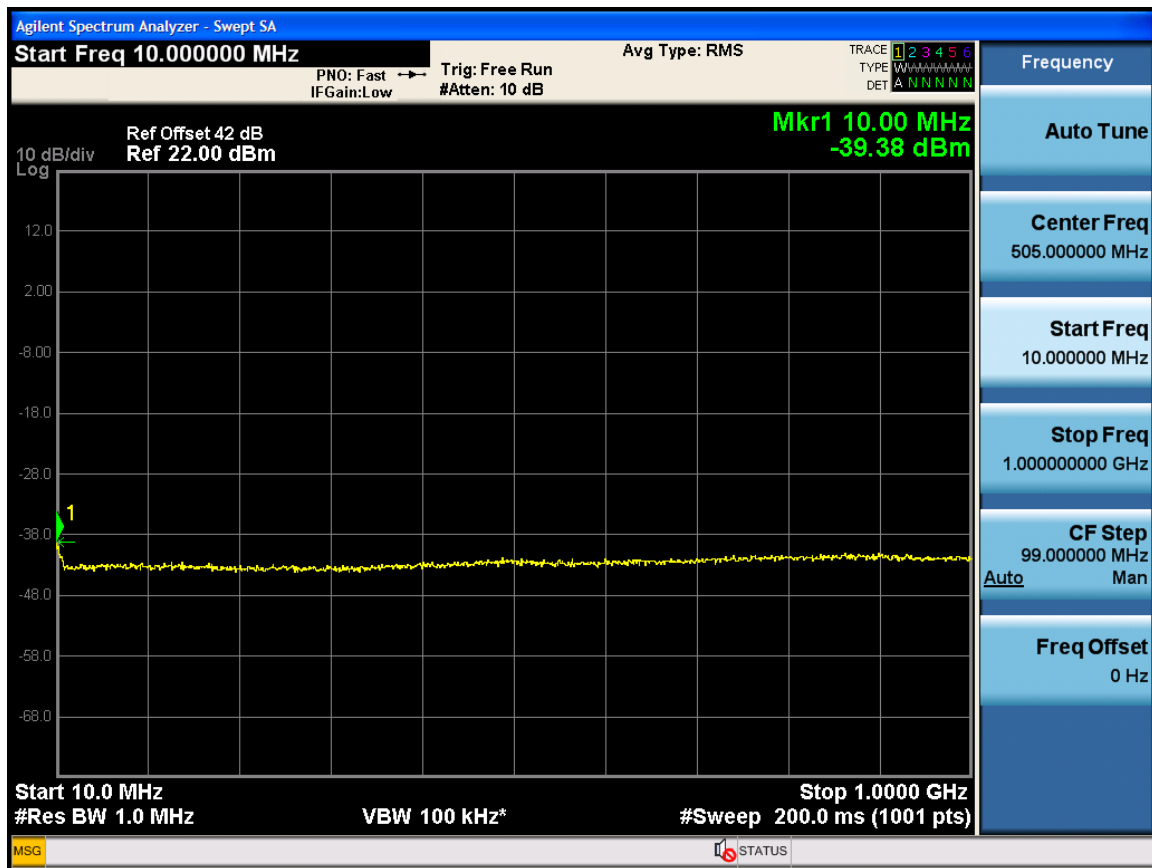


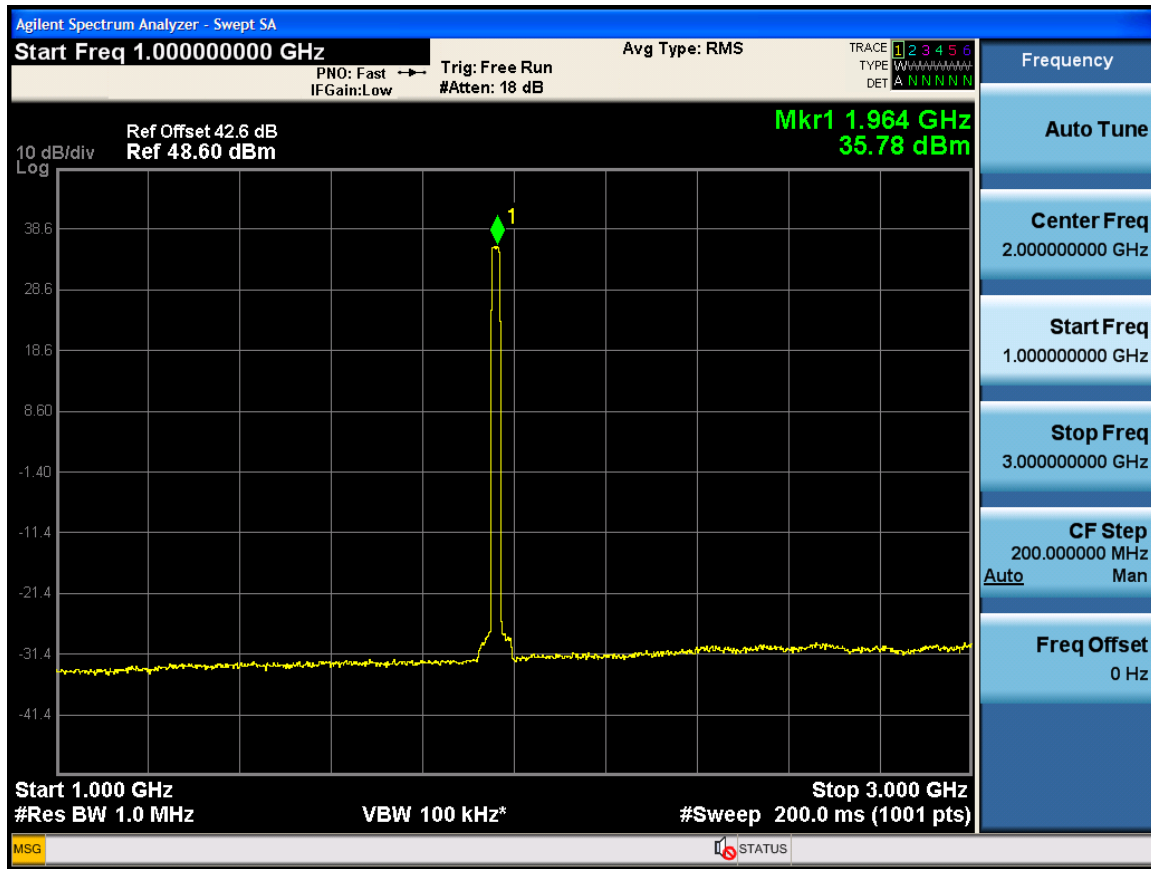




20M -Port 4 -1980MHz

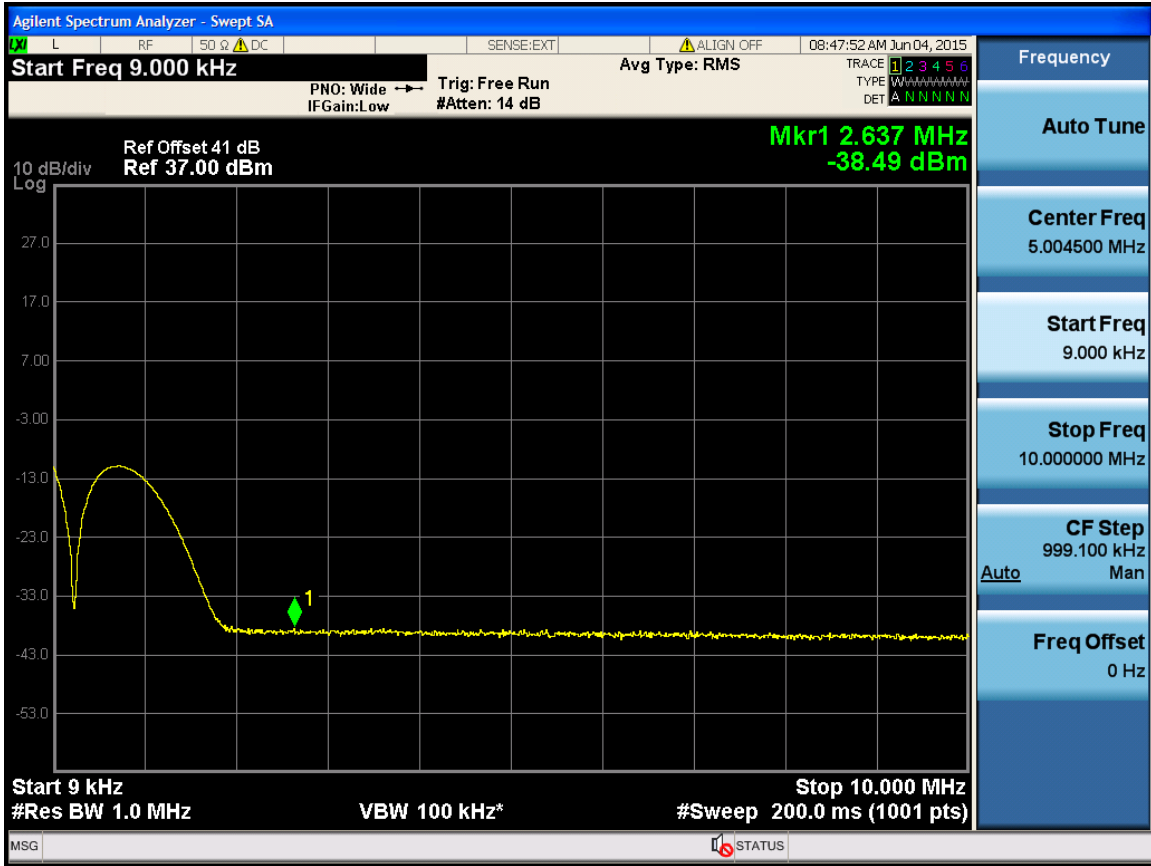

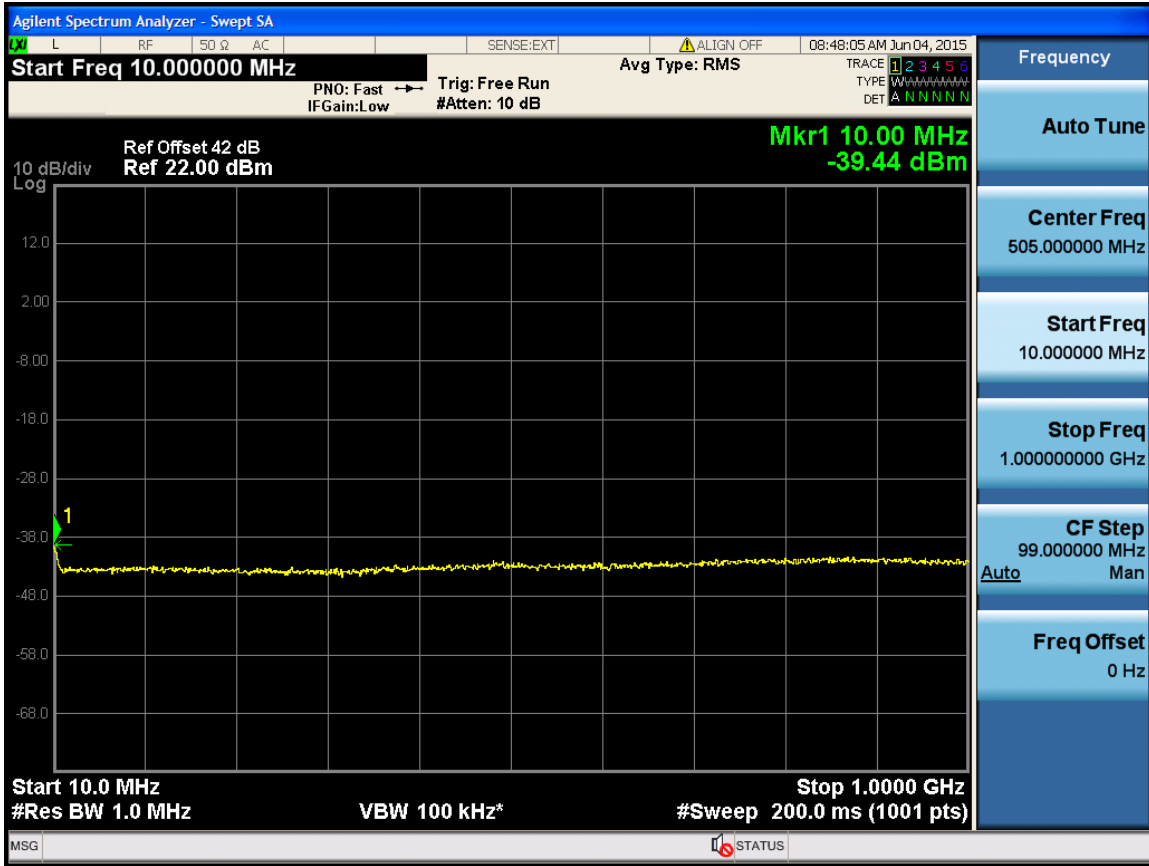

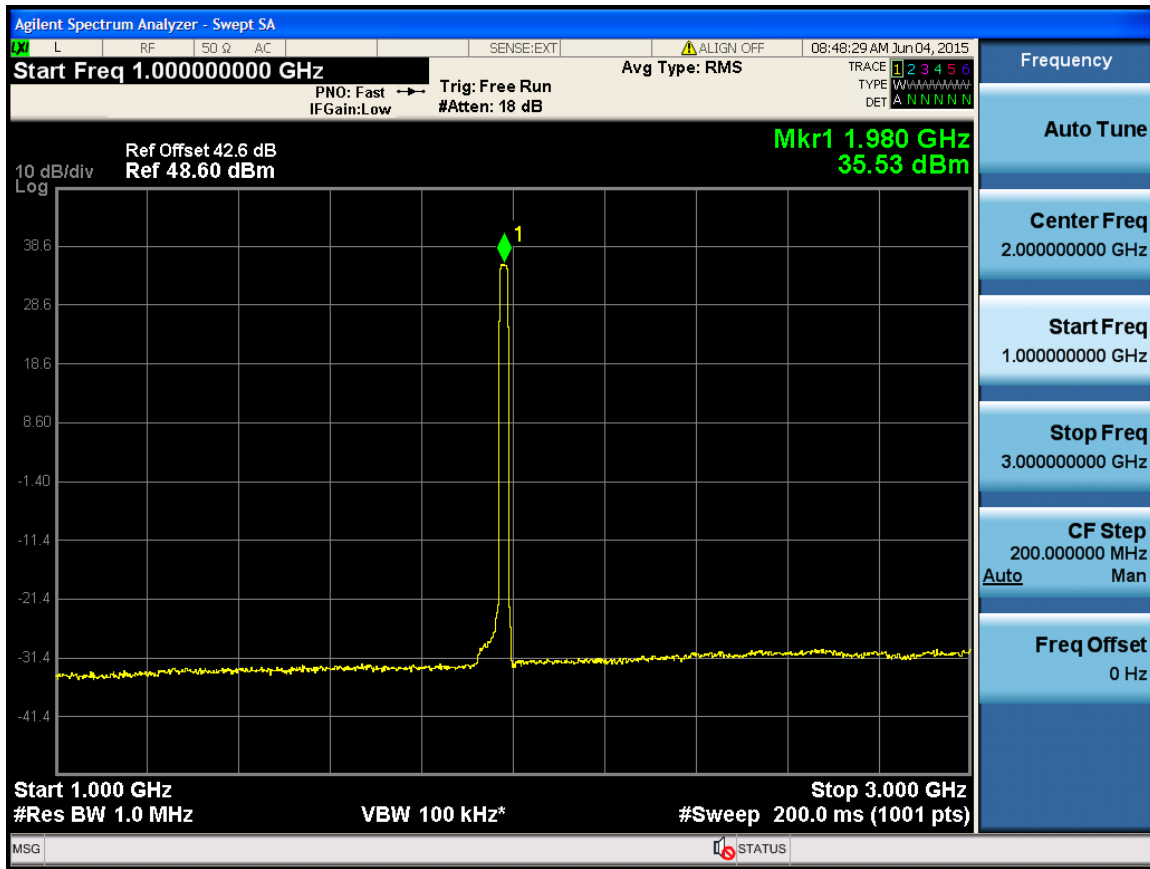



10 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2015.04.17	2016.04.17
DTS	DTS 40dB Attenuator	DTS100-40-3-1	09112005	2015.04.17	2016.04.17

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar


Test Result: Pass

Test Mode: Transmitting LTE


Test Data

Channel Bandwidth :3M			
Port	Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1	1931.5	2.6935	3M
	1960	2.6935	3M
	1988.5	2.6931	3M
4	1931.5	2.6935	3M
	1960	2.6939	3M
	1988.5	2.6938	3M


3M -Port 1 -1931.5MHz

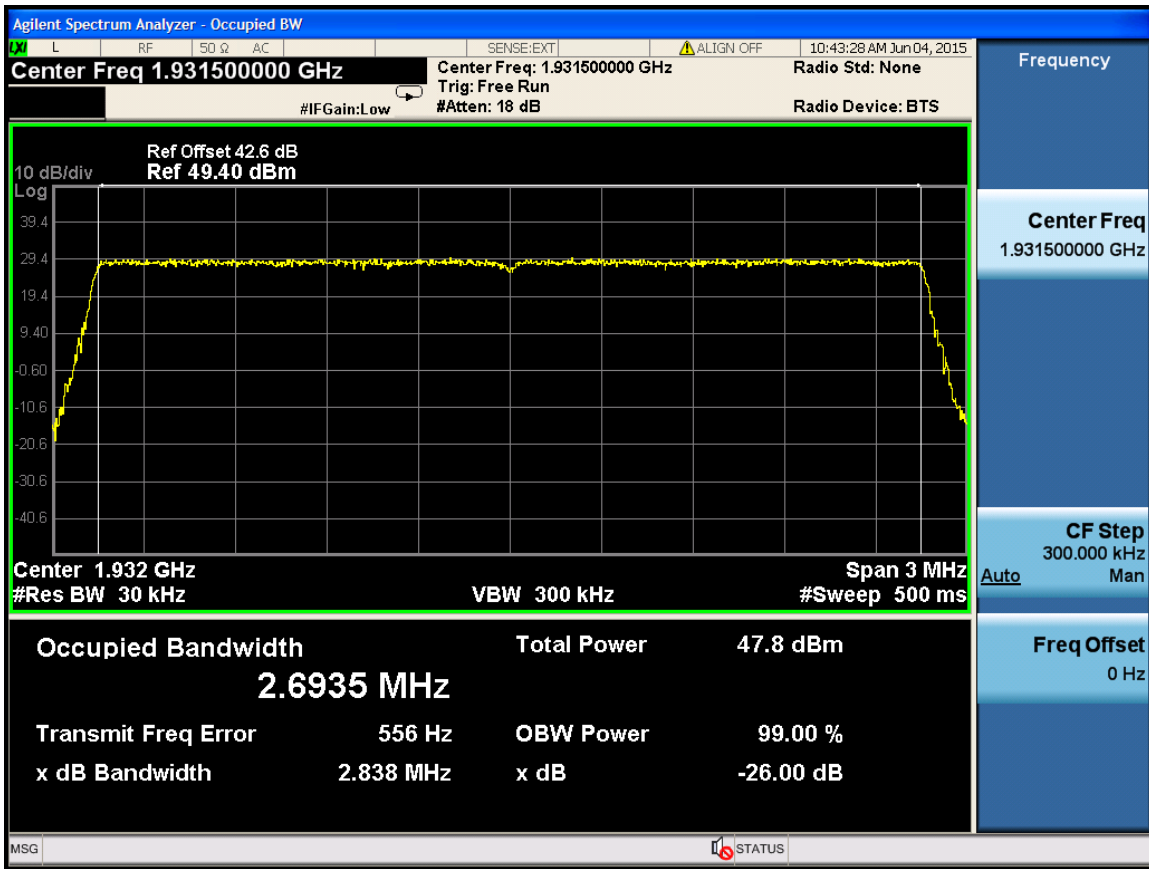


3M -Port 1 -1960MHz

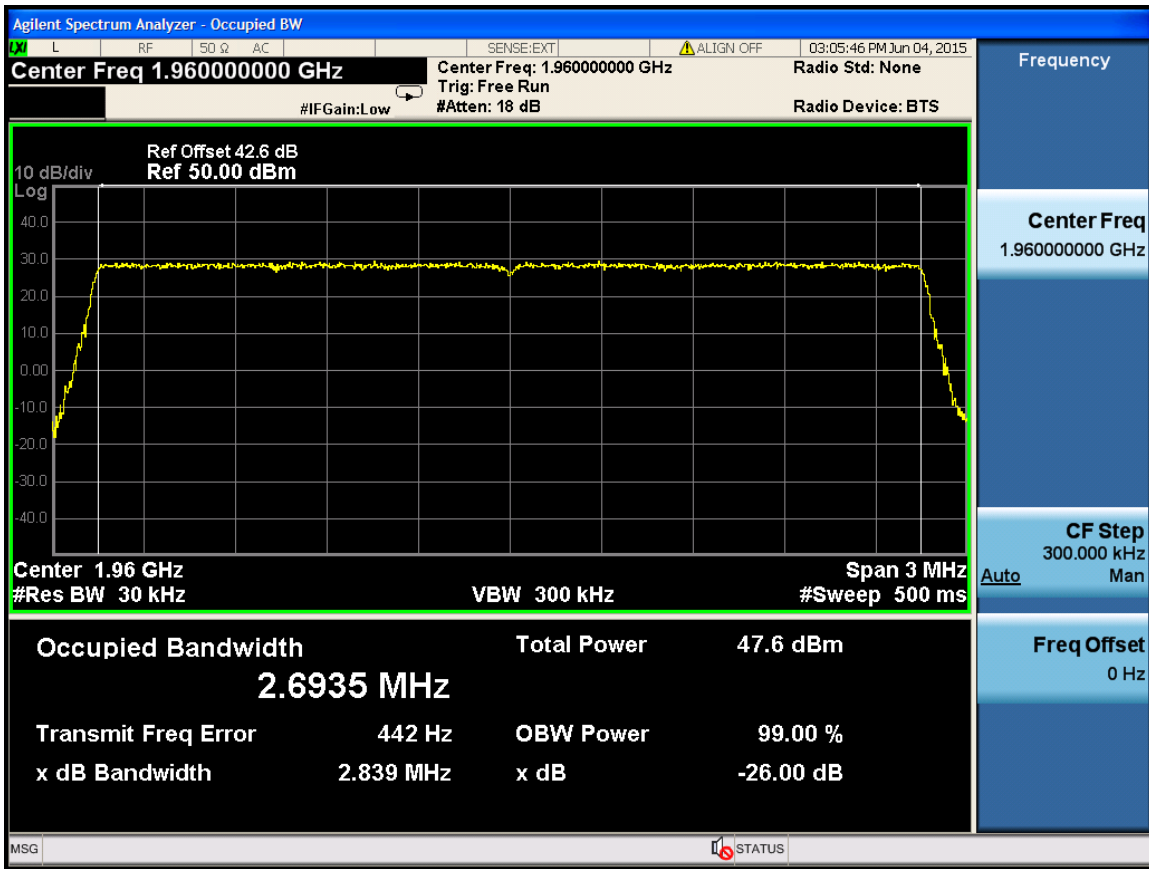


3M -Port 1 -1988.5MHz

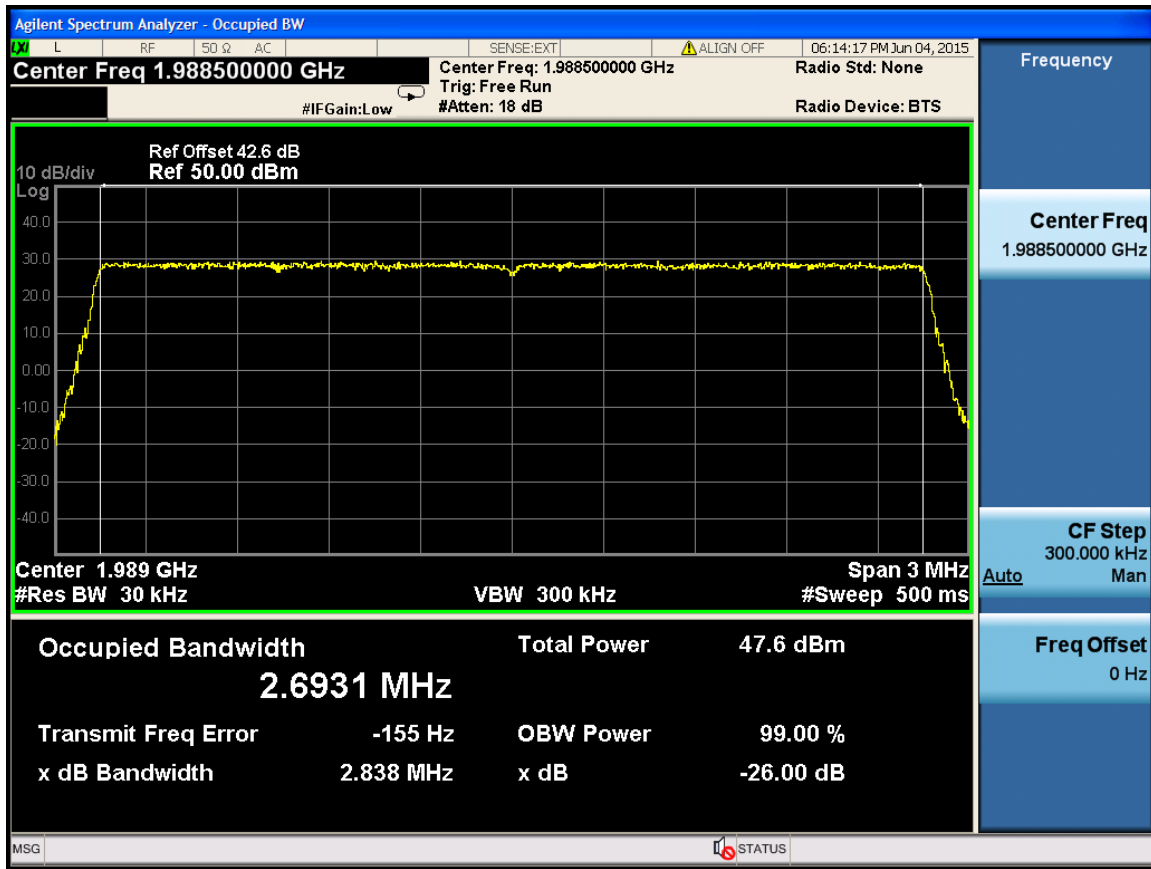


3M -Port 4-1931.5MHz

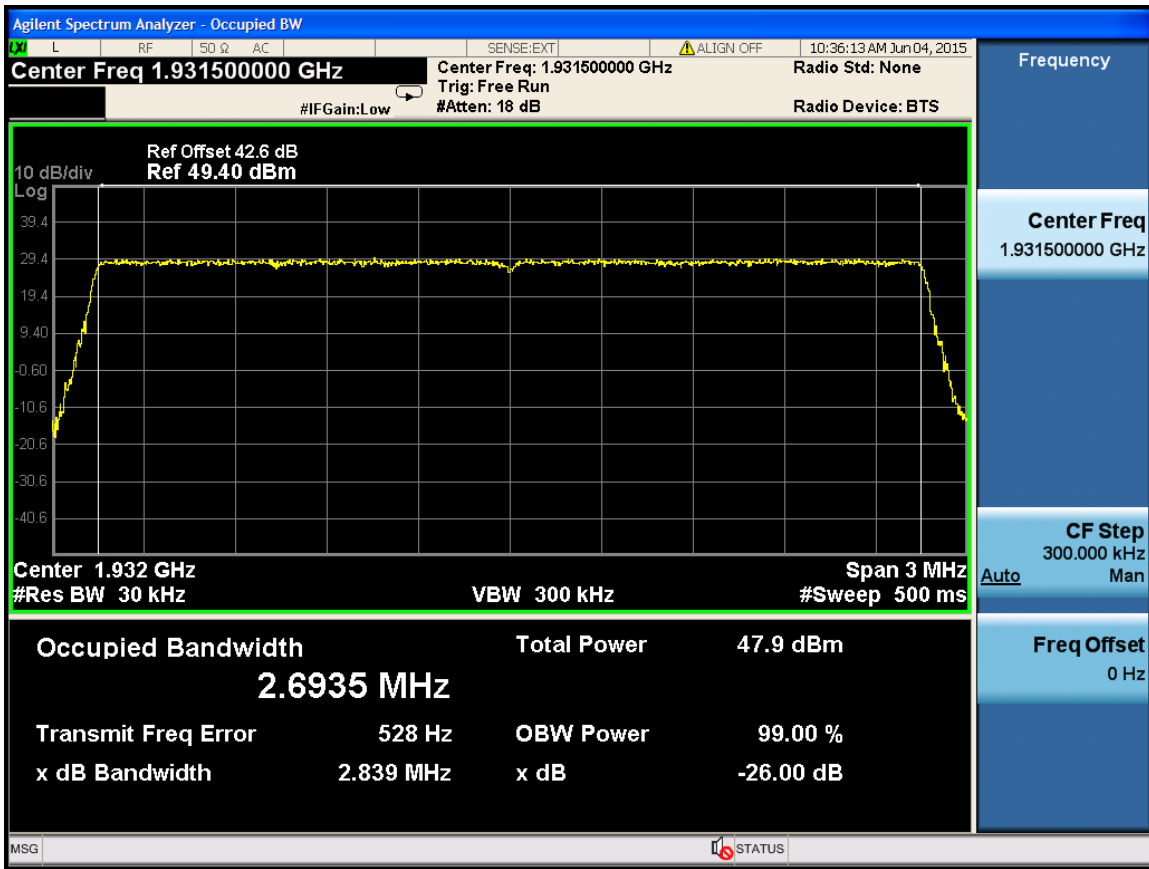

3M -Port 4 -1960MHz

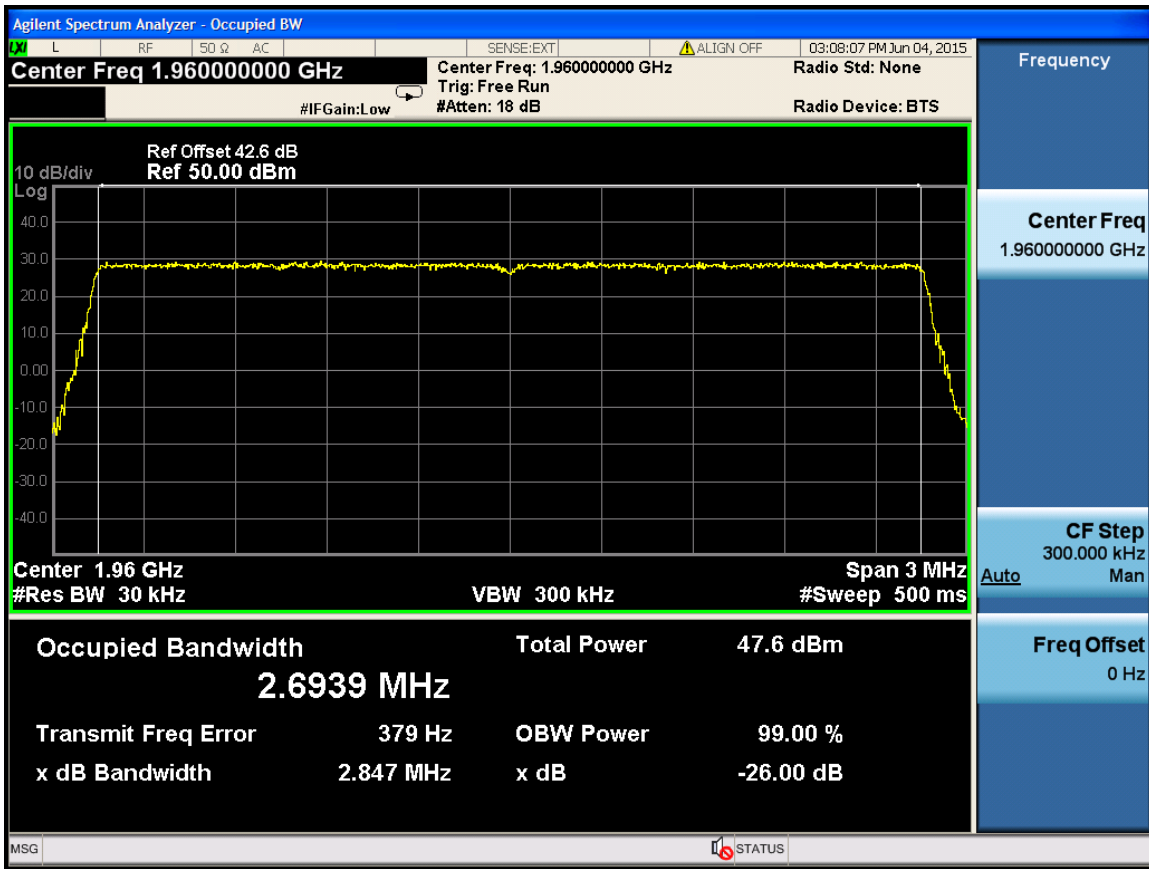


3M -Port 1 -1988.5MHz

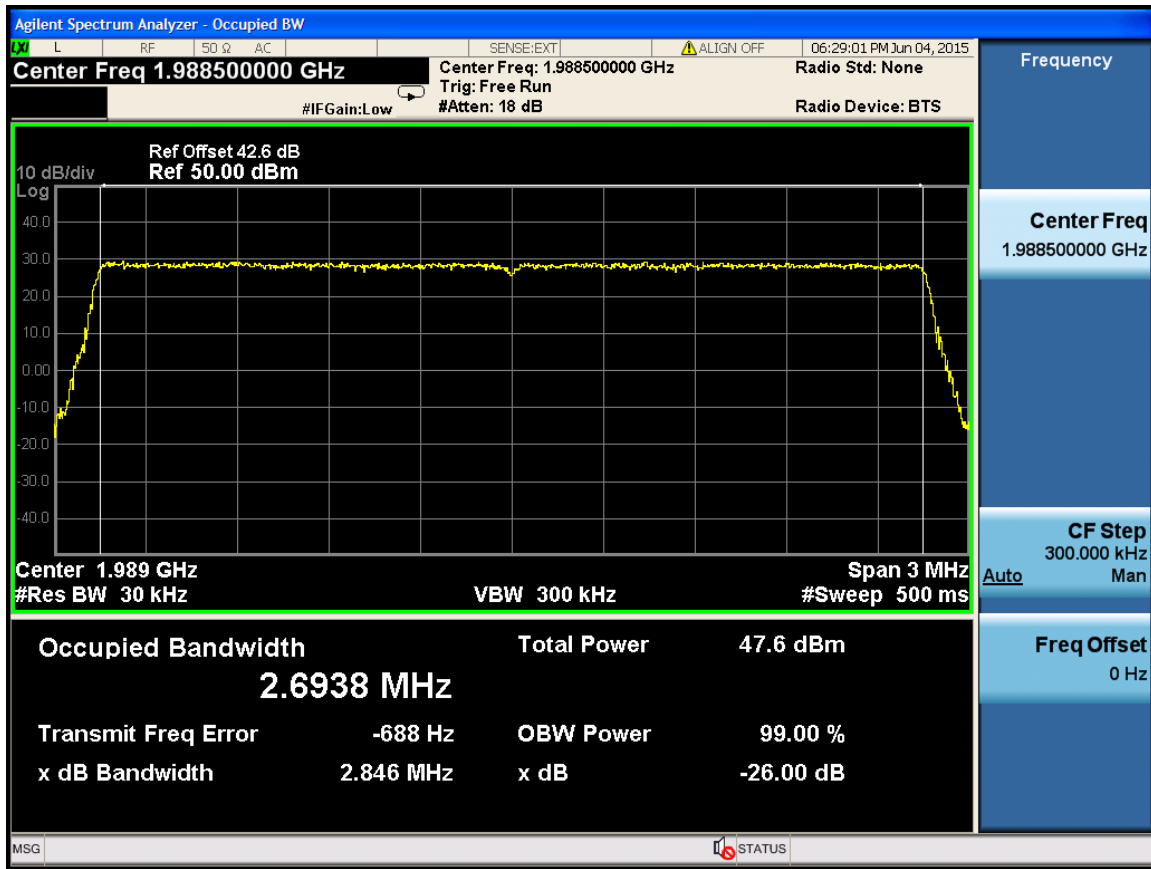


Channel Bandwidth :5M

Port	Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1	1932.5	4.4740	5M
	1960	4.4740	5M
	1987.5	4.4732	5M
4	1932.5	4.4734	5M
	1960	4.4743	5M
	1987.5	4.4732	5M


5M -Port 1 -1932.5MHz

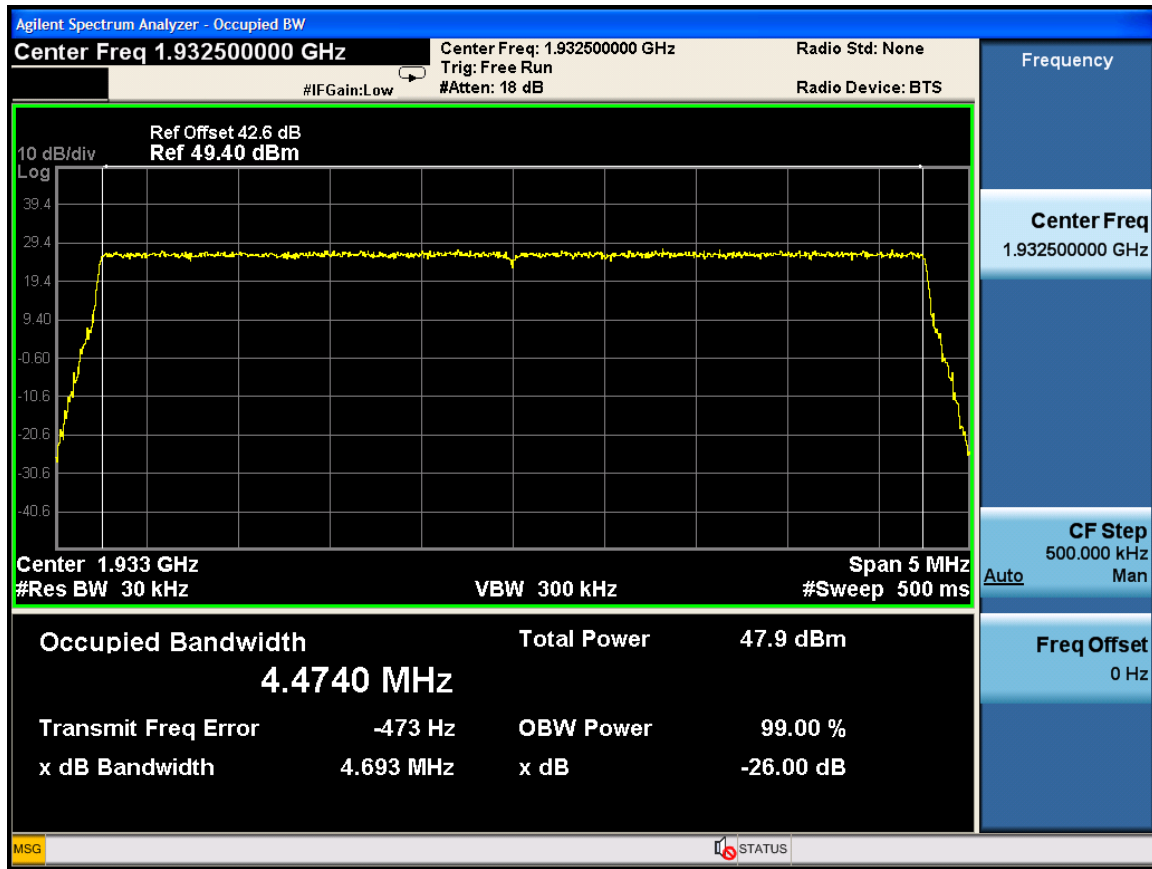


5M -Port 1 -1960MHz

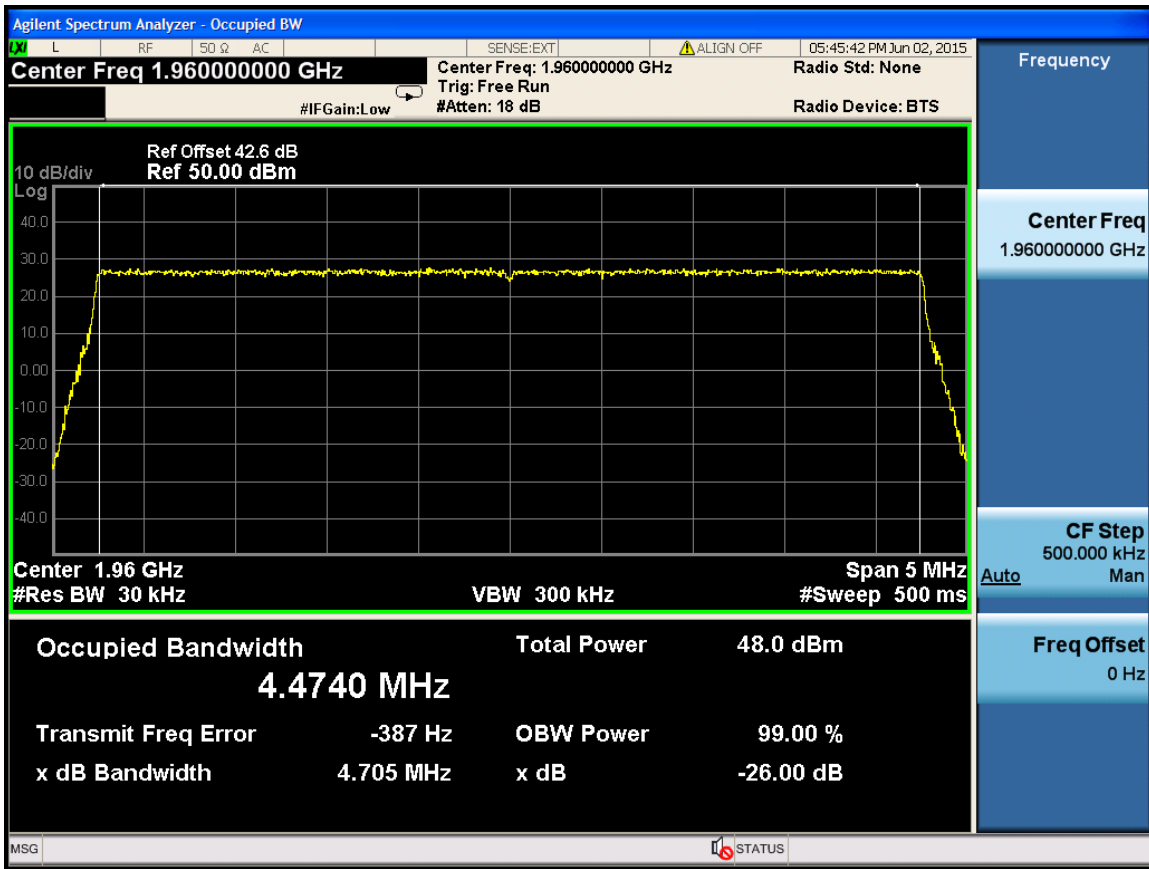


5M -Port 1 -1987.5MHz

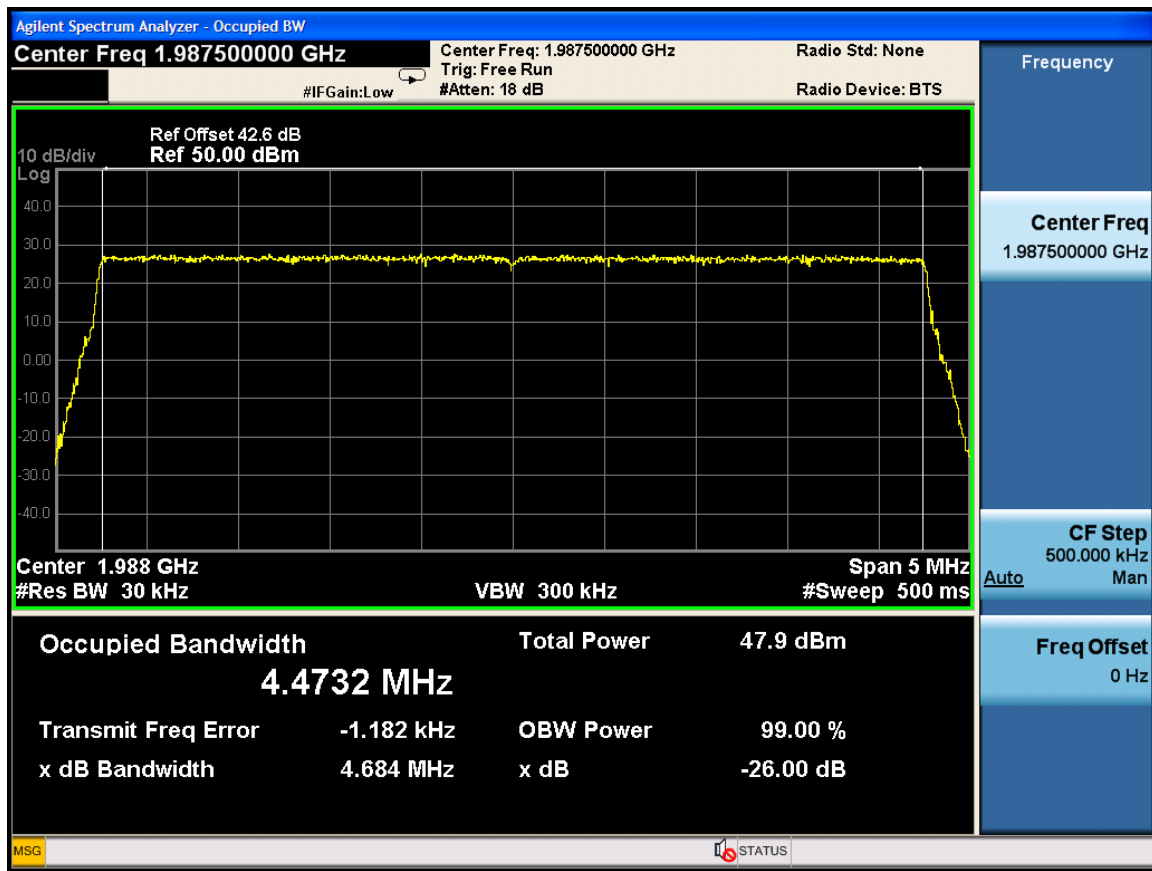


5M -Port 4-1932.5MHz

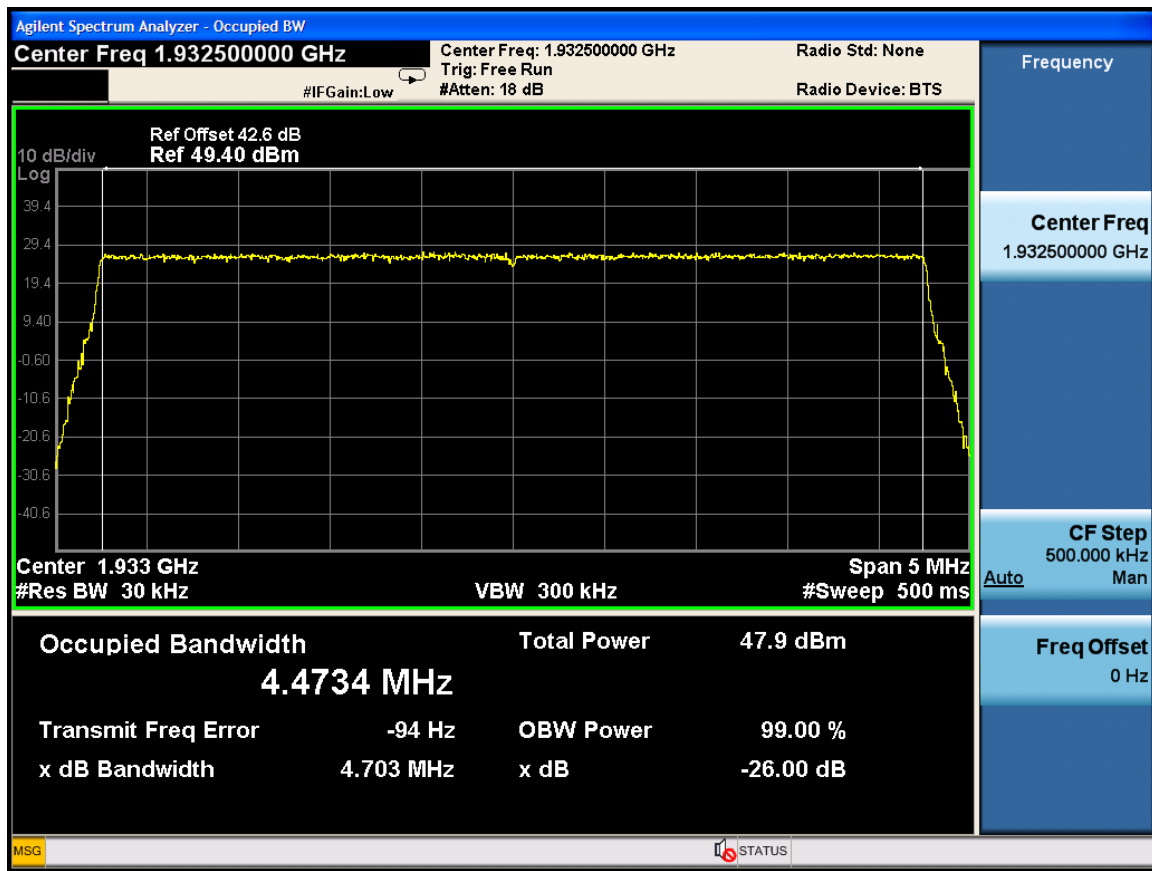

5M -Port 4 -1960MHz

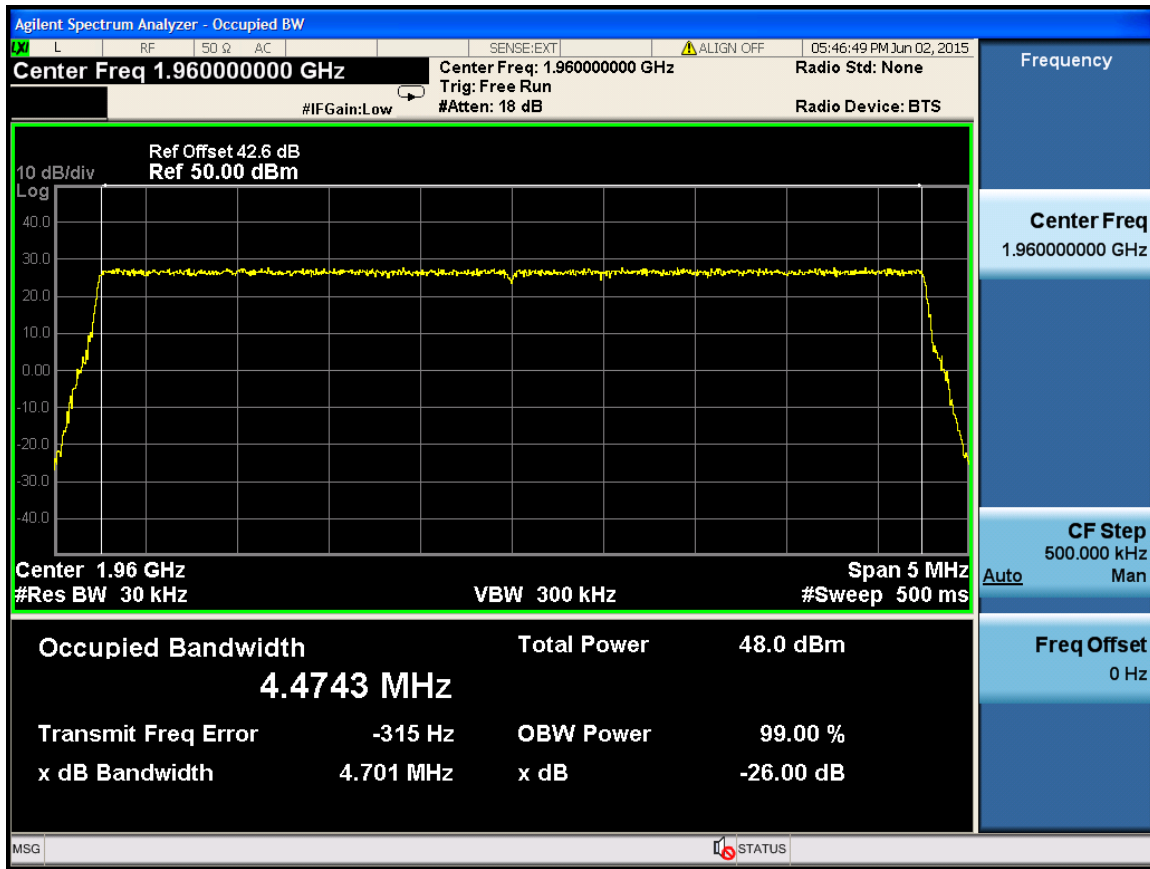


5M -Port 4 -1987.5MHz

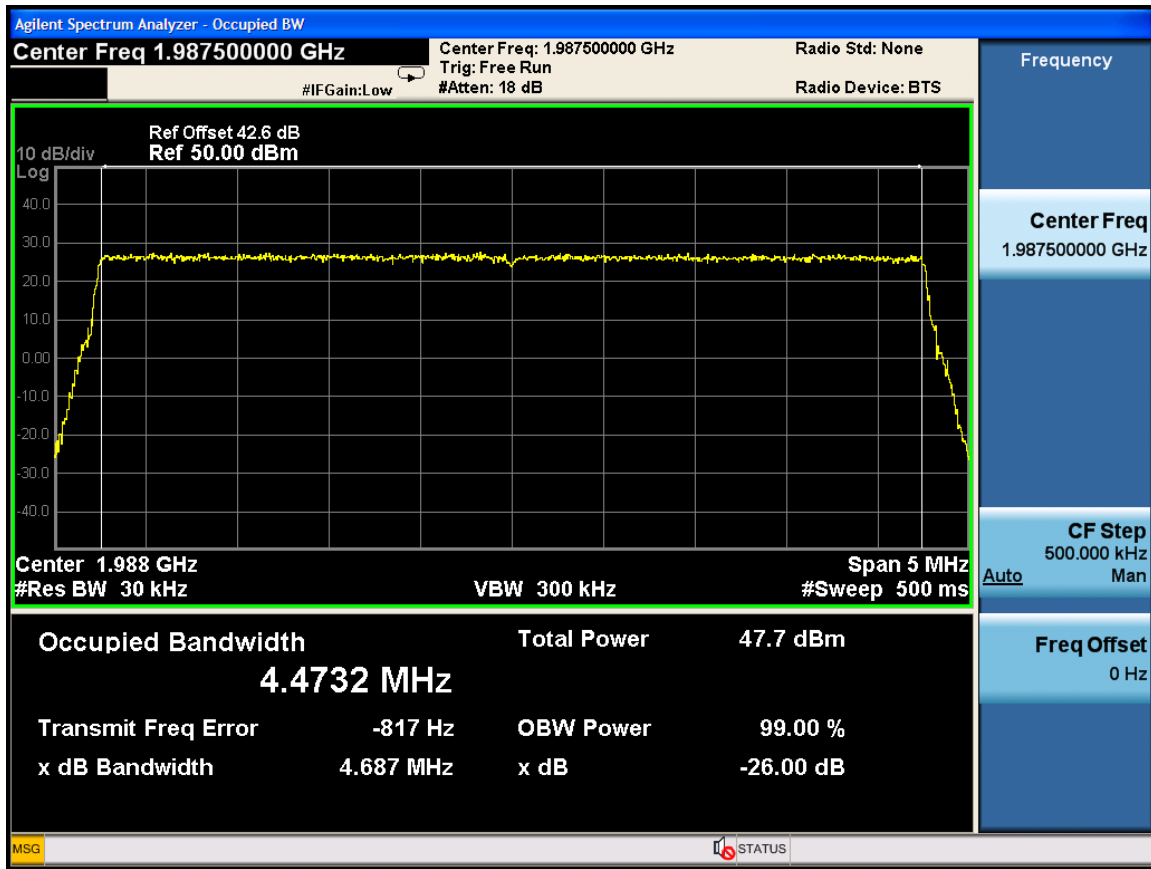


Channel Bandwidth :10M

Port	Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1	1935	8.9307	10M
	1960	8.9300	10M
	1985	8.9242	10M
4	1935	8.9279	10M
	1960	8.9277	10M
	1985	8.9231	10M

10M -Port 1 -1935MHz

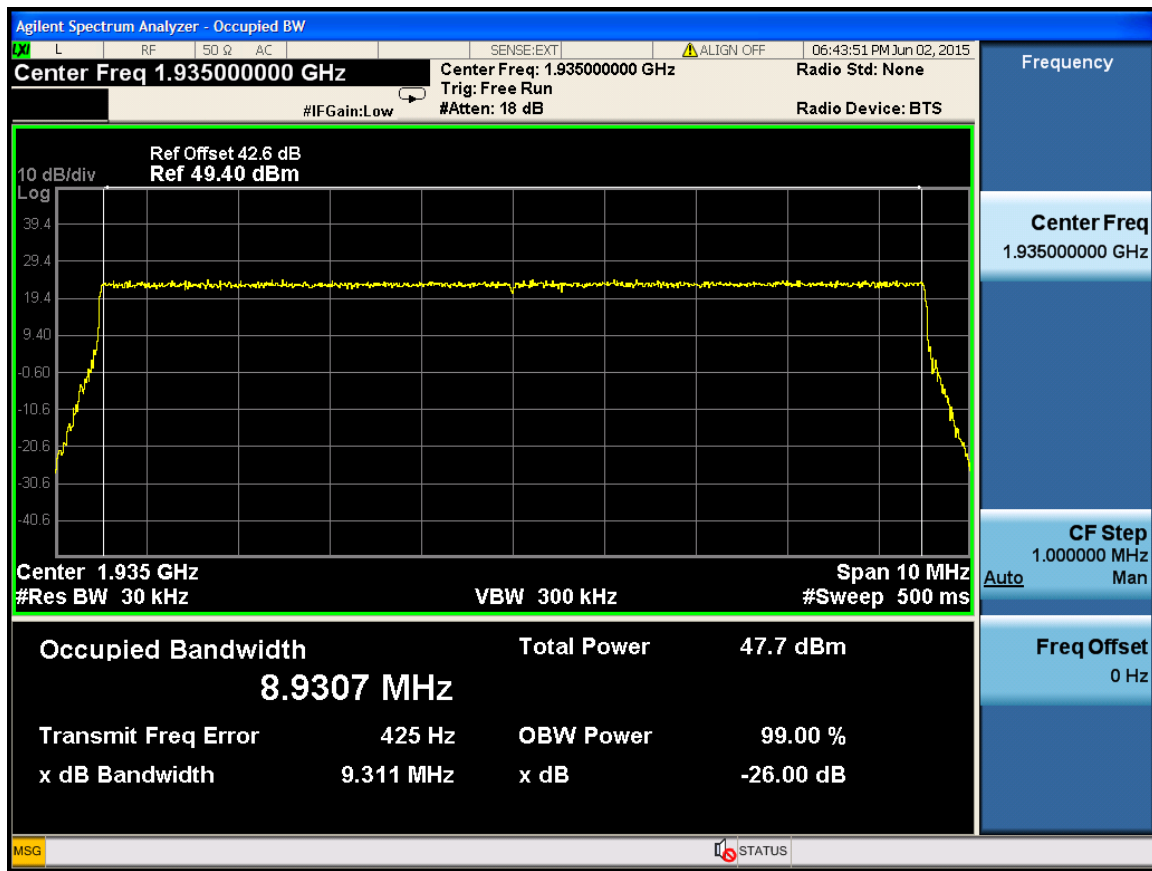

10M -Port 1 -1960MHz

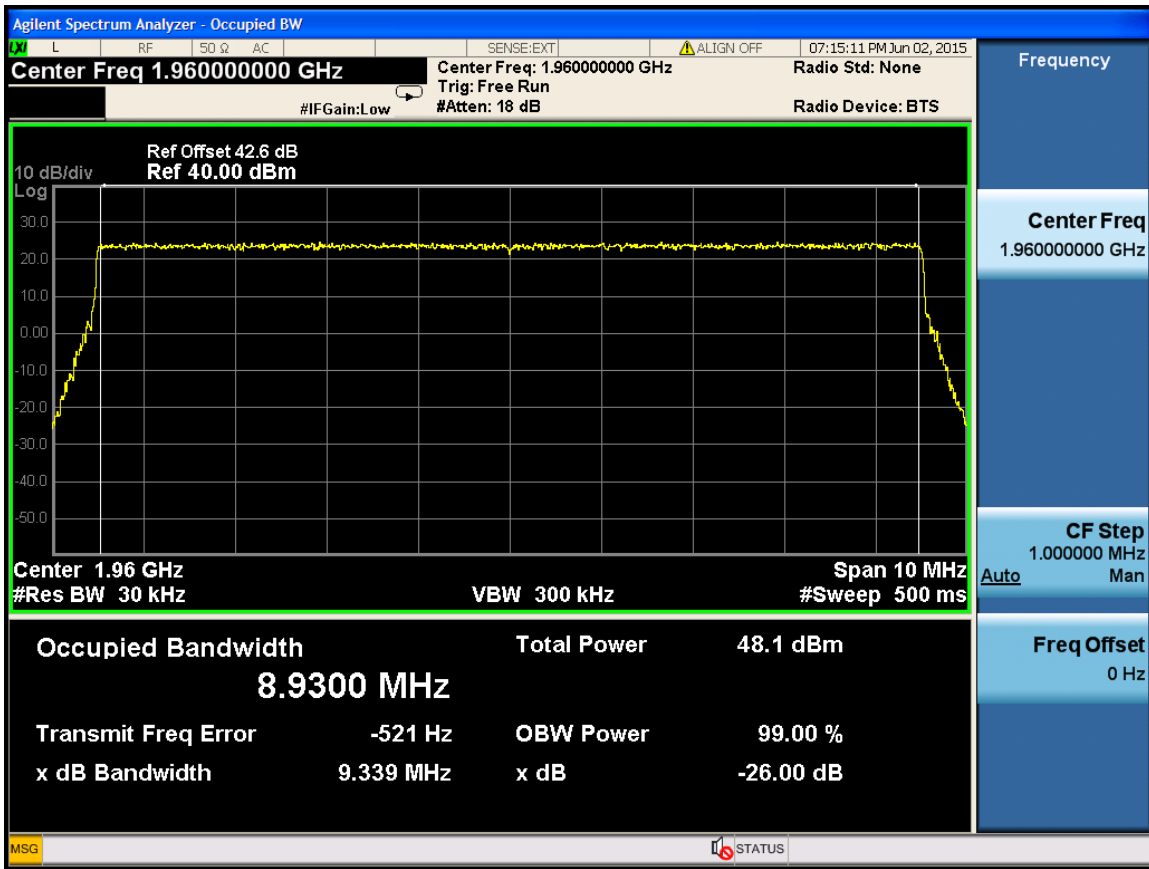

10M -Port 1 -1985MHz