

Variant FCC Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : CDMA Tablet
BRAND NAME : ZTE
MODEL NAME : V55
FCC ID : Q78-V55
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Nov. 14, 2011 and completely tested on Nov. 26, 2011. We, SPORTON INTERNATIONAL (KUNSAHN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Feature of Equipment Under Test.....	5
1.4. Test Site	6
1.5. Applied Standards	6
1.6. Ancillary Equipment List.....	6
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1. Test Mode	7
2.2. Connection Diagram of Test System	8
2.3. Test Software	9
3. TEST RESULT	10
3.2. Test of Radiated Emission Measurement	10
4. LIST OF MEASURING EQUIPMENT	14
5. UNCERTAINTY OF EVALUATION	15
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FD172707-01	Rev. 01	This is a variant report for V55. the differences can be referred to the product equality declaration.	Dec. 30, 2011



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.109	7.2.3.2	Radiated Emission	< 15.109 limits>	PASS	Under limit 2.38 dB at 911.80 MHz

1. General Description

1.1. Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2. Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3. Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA Tablet
Brand Name	ZTE
Model Name	V55
FCC ID	Q78-V55
Tx Frequency Range	CDMA2000 BC0 : 824 MHz ~ 849 MHz CDMA2000 BC1 : 1850 MHz ~ 1910 MHz Bluetooth : 2402 MHz ~ 2480 MHz WLAN : 2412 MHz ~ 2472 MHz
Rx Frequency Range	CDMA2000 BC0 : 869 ~ 894 MHz CDMA2000 BC1 : 1930 ~ 1990 MHz Bluetooth : 2402 MHz ~ 2480 MHz WLAN : 2412 MHz ~ 2472 MHz GPS : 1.57542 GHz
Antenna Type	CDMA : Fixed Internal Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna
HW Version	dq8B
SW Version	V55V1.1.0B08
Type of Modulation	CDMA2000 : QPSK Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK 802.11b : DSSS (BPSK / QPSK / CCK) 802.11g : OFDM (BPSK / QPSK / 16QAM / 64QAM) GPS : BPSK
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Test Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958
Test Site No.	Sporton Site No. 03CH01-KS

1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003

Remark:

- 1, All test items were verified and recorded according to the standards and without any deviation during the test.
- 2, This report is intention of applying for FCC 15B certification only.

1.6. Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
4.	PC	DELL	MT380	FCC DoC	N/A	Unshielded, 1.8 m
5.	Monitor	DELL	E1910Hc	FCC DoC	Shielded, 1.2 m	Unshielded, 1.8 m
6.	(USB)Mouse	DELL	MO56UC	FCC DoC	Shielded, 1.8 m	N/A
7.	(USB)Keyboard	DELL	L100	FCC DoC	Shielded, 1.8 m with Core	N/A
8.	Router	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
9.	iPod	Apple	A1199	FCC DoC	Shielded, 1.2 m	N/A
10.	Printer	HP	Laser Jet1018	FCC DoC	Shielded, 1.8 m	Unshielded, 1.8 m

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition	
		EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	Note 1
2.	Data application transferred Mode (EUT with PC)	☒	☒

Abbreviations:


- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Note 1: Testing for this mode is not required or not the worst case.


Test Items	EUT Configure Mode	Function Type
Radiated Emissions < 1GHz	1/2	Mode 1: CDMA850 Idle + Bluetooth Idle + WLAN Idle + Adapter + Camera + GPS Rx Mode 2: CDMA1900 Idle + Bluetooth Idle + WLAN Idle + Adapter + MPEG4 + GPS Rx Mode 3: CDMA850 Idle + Bluetooth Idle + WLAN Idle + GPS Rx + USB Cable (Data Link with PC)
Radiated Emissions ≥ 1GHz	2	Mode 1: CDMA850 Idle + Bluetooth Idle + WLAN Idle + GPS Rx + USB Cable (Data Link with PC)
Remark: - The worst case of RE < 1G is mode 2; only the test data of this mode was reported. - Link with PC means data application transferred mode between DUT and PC.		

2.2. Connection Diagram of Test System

<EUT with Adapter Mode>

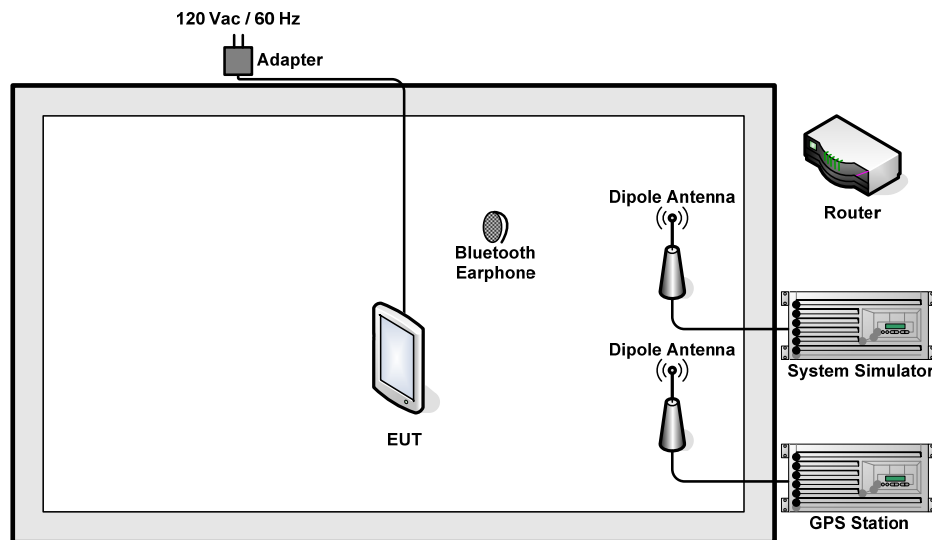

<EUT with USB Cable (Data Link with PC) Mode>

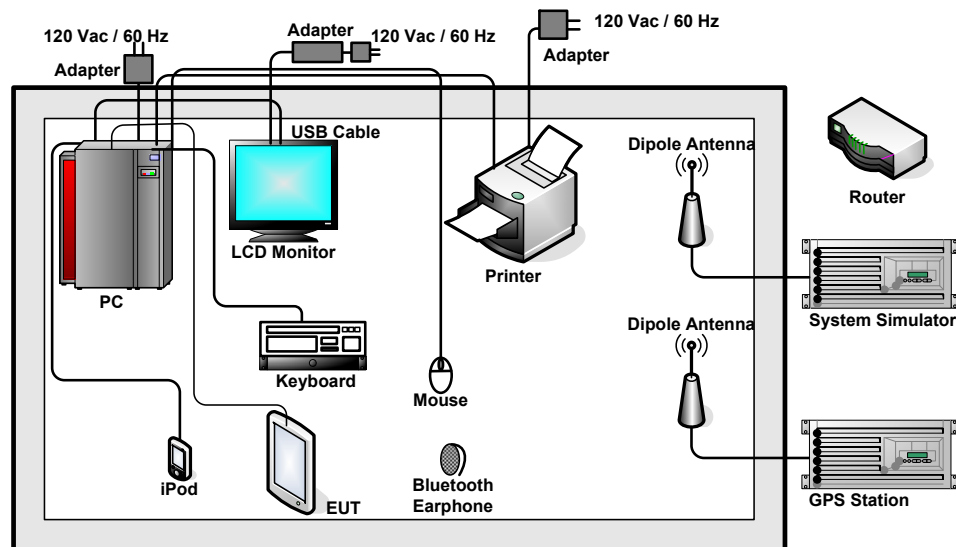

2.3. Test Software

The EUT was in CDMA2000 idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Execute the program, "copy", installed in PC for active sync files transfer with EUT via USB cable / iPod.
2. To make the EUT receive signals from GPS station continuously.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.

3. Test Result

3.1. Test of Radiated Emission Measurement

3.1.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


3.1.2. Measuring Instruments

See list of measuring instruments of this test report.

3.1.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.1.4. Test Setup of Radiated Emission

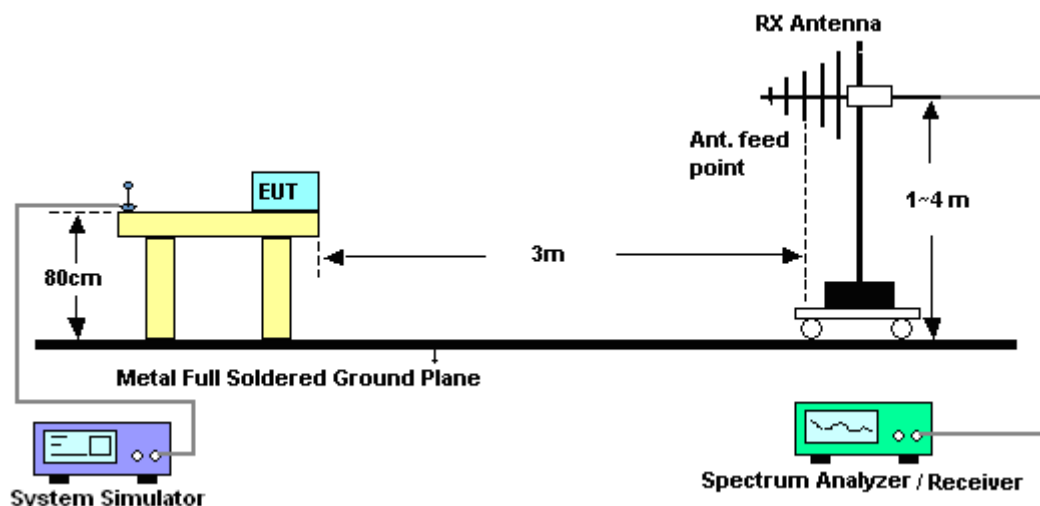

3.1.5. Test Result of Radiated Emission


Test Mode :	Mode 3	Temperature :	20~21°C
Test Engineer :	Jack Jia	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	CDMA850 Idle + Bluetooth Idle + WLAN Idle + GPS Rx + USB Cable (Data Link with PC)		

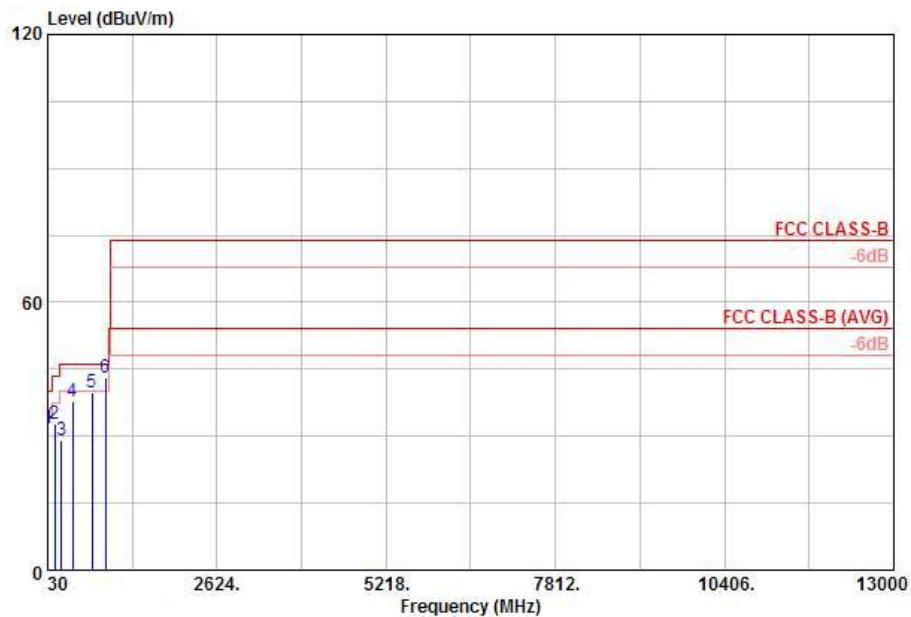

Site : 03CH01-KS
Condition: FCC CLASS-B 3m LF_ANT_100803 HORIZONTAL
Project : (FD) 172707-01
Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	32.43	31.84	-8.16	40.00	45.65	16.04	0.24	30.09	---	---	Peak
2	143.94	32.82	-10.68	43.50	51.76	10.55	0.50	29.99	---	---	Peak
3	240.06	29.00	-17.00	46.00	46.60	11.56	0.66	29.82	---	---	Peak
4	418.30	37.70	-8.30	46.00	50.56	16.10	0.86	29.82	---	---	Peak
5	708.80	39.78	-6.22	46.00	48.96	19.38	1.14	29.70	---	---	Peak
6	911.80	42.99	-3.01	46.00	50.67	20.50	1.31	29.49	200	360	Peak

Test Mode :	Mode 3	Temperature :	20~21°C
Test Engineer :	Jack Jia	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	CDMA850 Idle + Bluetooth Idle + WLAN Idle + GPS Rx + USB Cable (Data Link with PC)		

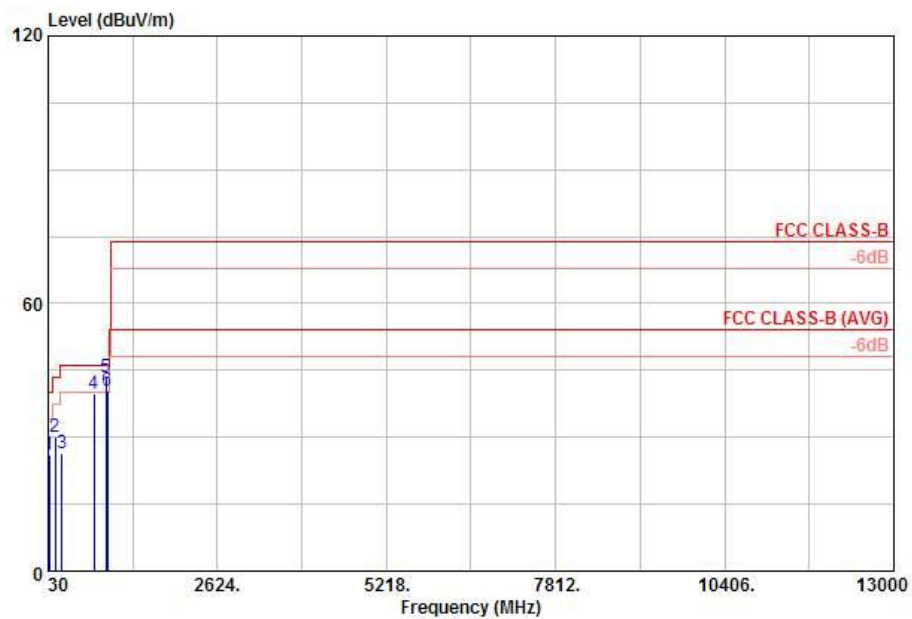

Site : 03CH01-KS
 Condition: FCC CLASS-B 3m LF_ANT_100803 VERTICAL
 Project : (FD) 172707-01
 Mode : Mode 3

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	50.79	26.22	-13.78	40.00	48.67	7.40	0.28	30.13	---	Peak
2	143.94	30.08	-13.42	43.50	49.02	10.55	0.50	29.99	---	Peak
3	240.06	26.41	-19.59	46.00	44.01	11.56	0.66	29.82	---	Peak
4	727.70	39.94	-6.06	46.00	48.75	19.65	1.16	29.62	---	Peak
5 !	911.80	43.62	-2.38	46.00	51.30	20.50	1.31	29.49	100	202 QP
6 !	939.80	40.50	-5.50	46.00	48.01	20.69	1.33	29.53	---	Peak

4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	Nov. 26, 2011	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 07, 2011	Nov. 26, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Nov. 26, 2011	Dec. 07, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00	9 kHz~30 MHz	Jul. 28, 2011	Nov. 26, 2011	Jul. 27, 2012	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 07, 2011	Nov. 26, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 08, 2011	Nov. 26, 2011	Dec. 07, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Jan. 07, 2011	Nov. 26, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2011	Nov. 26, 2011	Nov. 06, 2012	Radiation (03CH01-KS)
SHE-EHF Horn	Schwarzbeck	BBHA9170	BBHA170249	15GHz~40GHz	Oct. 11, 2011	Nov. 26, 2011	Oct. 10, 2012	Radiation (03CH01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Jan. 07, 2011	Nov. 26, 2011	Jan. 06, 2012	Radiation (03CH01-KS)

5. Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP172707-01 as below.