



# TEST REPORT

No. 2009TAR023

for

**ZTE CORPORATION**

**GSM Dual-Band Digital Mobile Phone**

**Model Name: Vodafone 136**

with

**Hardware Version: VDF-P108E5B01-Ar-EG03\\ng6cB-T2**

**Software Version: g6cB-T2**

**Issued Date: Mar 19th, 2009**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. DAT-P-114/01-01***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2105, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

## **CONTENTS**

|                                                                         |          |
|-------------------------------------------------------------------------|----------|
| <b>1. TEST LABORATORY.....</b>                                          | <b>3</b> |
| 1.1. TESTING LOCATION .....                                             | 3        |
| 1.2. TESTING ENVIRONMENT .....                                          | 3        |
| 1.3. PROJECT DATA.....                                                  | 3        |
| 1.4. SIGNATURE .....                                                    | 3        |
| <b>2. CLIENT INFORMATION.....</b>                                       | <b>4</b> |
| 2.1. APPLICANT INFORMATION.....                                         | 4        |
| 2.2. MANUFACTURER INFORMATION.....                                      | 4        |
| <b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>5</b> |
| 3.1. ABOUT EUT .....                                                    | 5        |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....          | 5        |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....            | 5        |
| 3.4. GENERAL DESCRIPTION .....                                          | 6        |
| <b>4. REFERENCE DOCUMENTS .....</b>                                     | <b>6</b> |
| 4.1. REFERENCE DOCUMENTS FOR TESTING .....                              | 6        |
| <b>5. LABORATORY ENVIRONMENT .....</b>                                  | <b>6</b> |
| <b>6. SUMMARY OF TEST RESULTS.....</b>                                  | <b>7</b> |
| <b>7. TEST EQUIPMENTS UTILIZED.....</b>                                 | <b>7</b> |
| <b>ANNEX A: MEASUREMENT RESULTS .....</b>                               | <b>9</b> |
| A.1 OUTPUT POWER (§22.913(A)/§24.232(B)) .....                          | 9        |
| A.2 EMISSION LIMIT (§2.1051/§24.238).....                               | 12       |
| A.3 CONDUCTED EMISSION.....                                             | 24       |
| A.4 FREQUENCY STABILITY (§2.1055/§24.235).....                          | 26       |
| A.5 OCCUPIED BANDWIDTH (§2.1049(H)(I)) .....                            | 28       |
| A.6 EMISSION BANDWIDTH (§22.917(B)/§24.238(B)) .....                    | 32       |
| A.7 BAND EDGE COMPLIANCE.....                                           | 36       |
| A.8 CONDUCTED SPURIOUS EMISSION (§2.1057/§22.917/§24.238).....          | 38       |

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MII  
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China  
Postal Code: 100083  
Telephone: 00861062303288  
Fax: 00861062304793


### **1.2. Testing Environment**

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### **1.3. Project data**


Testing Start Date: Mar 9,2009  
Testing End Date: Mar 15,2009

### **1.4. Signature**




---

**Zi Xiaogang**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: ZTE CORPORATION  
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, 518057, P.R.China  
City: Shenzhen  
Postal Code: 518057  
Country: China  
Telephone: 0086 21 68897541  
Fax: 0086 21 61460600

### **2.2. Manufacturer Information**

Company Name: ZTE CORPORATION  
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, 518057, P.R.China  
City: Shenzhen  
Postal Code: 518057  
Country: China  
Telephone: 0086 21 68897541  
Fax: 0086 21 61460600

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

|                         |                                           |
|-------------------------|-------------------------------------------|
| Description             | GSM Dual-Band Digital Mobile Phone        |
| Model Name              | Vodafone 136                              |
| FCC ID                  | Q78-VDF136                                |
| Frequency               | GSM 850MHz; PCS 1900MHz                   |
| Antenna                 | Internal                                  |
| Power supply            | Battery or Charger (AC Adaptor)           |
| Output power            | 27.44 dBm maximum ERP measured for GSM850 |
| Extreme vol. Limits     | 3.5VDC to 4.2VDC (nominal: 3.7VDC)        |
| Extreme temp. Tolerance | -30°C to +50°C                            |

Note: Photographs of EUT are shown in ANNEX A of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

#### 3.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI      | HW Version                      | SW Version |
|---------|-----------------|---------------------------------|------------|
| N17     | 004999010640000 | VDF-P108E5B01-Ar-EG03\\ng6cB-T2 | g6cB-T2    |

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

| AE ID* | Description    | SN                |
|--------|----------------|-------------------|
| AE1    | Battery        | 40040812200009853 |
| AE2    | Travel Adapter | 800804010301117   |

##### AE1

|                 |                    |
|-----------------|--------------------|
| Model           | Li3706T42P3h383857 |
| Manufacturer    | ZTE CORPORATION    |
| Capacitance     | 670mAh             |
| Nominal Voltage | 3.7V               |

##### AE2

|                   |                                              |
|-------------------|----------------------------------------------|
| Model             | STC-A22O50U8-C                               |
| Manufacturer      | Shenzhen Ruide Electronic Industrial Co.,Ltd |
| Length of DC line | 180cm                                        |

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. General Description

The Equipment Under Test (EUT) is a model of GSM Dual-Band Digital Mobile Phone with integrated antenna. It consists of Hand Telephone Set and normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference      | Title                                                                                                                                      | Version   |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| FCC Part 24    | PERSONAL COMMUNICATIONS SERVICES                                                                                                           | V 10.1.06 |
| FCC Part 22    | PUBLIC MOBILE SERVICES                                                                                                                     | V 10.1.06 |
| ANSI/TIA-603-C | Land Mobile FM or PM Communications Equipment<br>Measurement and Performance Standards                                                     | 2004      |
| ANSI C63.4     | Methods of Measurement of Radio-Noise Emissions from<br>Low-Voltage Electrical and Electronic Equipment in the<br>Range of 9 kHz to 40 GHz | 2003      |

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

|                                   |                                               |
|-----------------------------------|-----------------------------------------------|
| Temperature                       | Min. = 15 °C, Max. = 30 °C                    |
| Relative humidity                 | Min. = 30 %, Max. = 60 %                      |
| Shielding effectiveness           | > 110 dB                                      |
| Electrical insulation             | > 10 kΩ                                       |
| Ground system resistance          | < 0.5 Ω                                       |
| Normalised site attenuation (NSA) | < ±3.2 dB, 10 m distance, from 30 to 1000 MHz |
| Uniformity of field strength      | Between 0 and 6 dB, from 80 to 2000 MHz       |

**Control room** did not exceed following limits along the EMC testing:

|                          |                            |
|--------------------------|----------------------------|
| Temperature              | Min. = 15 °C, Max. = 35 °C |
| Relative humidity        | Min. =30 %, Max. = 60 %    |
| Shielding effectiveness  | > 110 dB                   |
| Electrical insulation    | > 10 kΩ                    |
| Ground system resistance | < 0.5 Ω                    |

**Conducted chamber** did not exceed following limits along the EMC testing:

|                          |                            |
|--------------------------|----------------------------|
| Temperature              | Min. = 15 °C, Max. = 30 °C |
| Relative humidity        | Min. = 30 %, Max. = 60 %   |
| Shielding effectiveness  | > 110 dB                   |
| Electrical insulation    | > 10 kΩ                    |
| Ground system resistance | < 0.5 Ω                    |

**Fully-anechoic chamber** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

|                              |                                         |
|------------------------------|-----------------------------------------|
| Temperature                  | Min. = 15 °C, Max. = 30 °C              |
| Relative humidity            | Min. = 30 %, Max. = 60 %                |
| Shielding effectiveness      | > 110 dB                                |
| Electrical insulation        | > 10 kΩ                                 |
| Ground system resistance     | < 0.5 Ω                                 |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 2000 MHz |

## 6. SUMMARY OF TEST RESULTS

| Items | List                        | Clause in FCC rules  | Verdict |
|-------|-----------------------------|----------------------|---------|
| 1     | Output Power                | 22.913(a)/24.232(b)  | P       |
| 2     | Emission Limit              | 2.1051/22.917/24.238 | P       |
| 3     | Conducted Emission          | 15.107/207           | P       |
| 4     | Frequency Stability         | 2.1055/24.235        | P       |
| 5     | Occupied Bandwidth          | 2.1049(h)(i)         | P       |
| 6     | Emission Bandwidth          | 22.917(b)/24.238(b)  | P       |
| 7     | Band Edge Compliance        | 22.917(b)/24.238(b)  | P       |
| 8     | Conducted Spurious Emission | 2.1057/22.917/24.238 | P       |

## 7. Test Equipments Utilized

| NO. | NAME              | TYPE    | SERIES NUMBER | PRODUCER | CAL DUE DATE |
|-----|-------------------|---------|---------------|----------|--------------|
| 1   | Test Receiver     | ESS     | 847151/015    | R&S      | 2009-10-30   |
| 2   | Test Receiver     | ESI40   | 831564/002    | R&S      | 2010-2-11    |
| 3   | BiLog Antenna     | 3142B   | 9908-1403     | EMCO     | 2010-1-16    |
| 4   | BiLog Antenna     | 3142B   | 9908-1405     | EMCO     | 2009-9-19    |
| 5   | Signal Generator  | SMT06   | 831285/005    | R&S      | 2009-12-26   |
| 6   | Signal Generator  | SMP04   | 100070        | R&S      | 2009-4-20    |
| 7   | LISN              | ESH2-Z5 | 829991/012    | R&S      | 2009-8       |
| 8   | Spectrum Analyzer | FSU26   | 200030        | R&S      | 2009-6-18    |
| 9   | Universal Radio   | CMU200  | 100680        | R&S      | 2009-8-23    |

|    |                                      |       |           |       |           |
|----|--------------------------------------|-------|-----------|-------|-----------|
|    | Communication Tester                 |       |           |       |           |
| 10 | Dual-Ridge Waveguide<br>Horn Antenna | 3115  | 9906-5827 | EMCO  | 2009-3    |
| 11 | Dual-Ridge Waveguide<br>Horn Antenna | 3115  | 9906-5831 | EMCO  | 2009-3    |
| 12 | Dual-Ridge Waveguide<br>Horn Antenna | 3116  | 2663      | EMCO  | 2009-3    |
| 13 | Dual-Ridge Waveguide<br>Horn Antenna | 3116  | 2661      | EMCO  | 2009-3    |
| 14 | Climatic chamber                     | PL-2G | 343074    | ESPEC | 2009-5-15 |

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER** (§22.913(a)/§24.232(b))

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band;824.4MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

##### **GSM850**

###### **Limit**

| Power step | Nominal Peak output power (dBm) | Tolerance (dB) |
|------------|---------------------------------|----------------|
| 5          | 33dBm(2W)                       | ± 2            |

###### **Measurement result**

###### **GSM**

| Frequency(MHz) | Power Step | Peak output power(dBm) |
|----------------|------------|------------------------|
| 824.2          | 5          | 31.66                  |
| 836.6          | 5          | 31.58                  |
| 848.8          | 5          | 31.35                  |

##### **PCS1900**

###### **Limit**

| Power step | Nominal Peak output power (dBm) | Tolerance (dB) |
|------------|---------------------------------|----------------|
| 0          | 30dBm(1W)                       | ± 2            |

###### **Measurement result**

###### **GSM**

| Frequency(MHz) | Power Step | Peak output power(dBm) |
|----------------|------------|------------------------|
| 1850.2         | 0          | 29.02                  |
| 1880.0         | 0          | 28.77                  |
| 1909.8         | 0          | 28.32                  |

### **A.1.3 Radiated**

#### **A.1.3.1 Description**

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

#### **A.1.3.2 Method of Measurement**

The measurements procedures in TIA-603C-2004 are used.

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.

2. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $A_{Rpl} = P_{in} + 2.15 - Pr$ . The  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss.

The measurement results are obtained as described below:

$$\text{Power} = P_{Mea} + A_{Rpl}$$

3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
5. The EUT is then put into continuously transmitting mode at its maximum power level.
6. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

**GSM 850-ERP 22.913(a)**

**Limits**

| Power Step | Burst Peak ERP (dBm) |
|------------|----------------------|
| 5          | ≤38.45dBm (7W)       |

**Measurement result**

**GSM**

| Frequency(MHz) | Power Step | Peak ERP(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Polarization |
|----------------|------------|---------------|------------------------|------------------------|--------------|
| 824.2          | 5          | 27.44         | 45.95                  | -18.51                 | Horizontal   |
| 836.6          | 5          | 26.98         | 45.98                  | -19.00                 | Horizontal   |
| 848.8          | 5          | 26.46         | 45.82                  | -19.36                 | Horizontal   |

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

**PCS1900-EIRP 24.232(b)**

**Limits**

| Power Step | Burst Peak EIRP (dBm) |
|------------|-----------------------|
| 0          | ≤33dBm (2W)           |

**Measurement result**

**GSM**

| Frequency(MHz) | Power Step | Peak EIRP(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Polarization |
|----------------|------------|----------------|------------------------|------------------------|--------------|
| 1850.2         | 0          | 26.02          | 47.11                  | -21.09                 | Horizontal   |
| 1880.0         | 0          | 24.46          | 47.37                  | -22.91                 | Horizontal   |
| 1909.8         | 0          | 23.24          | 47.54                  | -24.30                 | Horizontal   |

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

## **A.2 EMISSION LIMIT** (§2.1051/§24.238)

### **A.2.1 Measurement Method**

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band ,GSM850 band.


**The procedure of radiated spurious emissions is as follows:**

a) Pre-calibration

With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,


$$RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$$

The SA is calibrated using following setup.

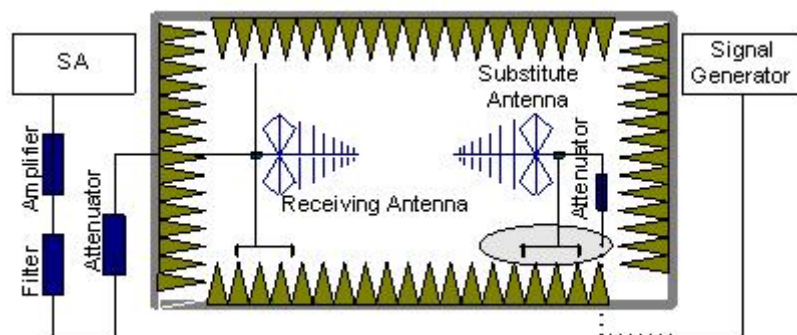

b) EUT test

EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

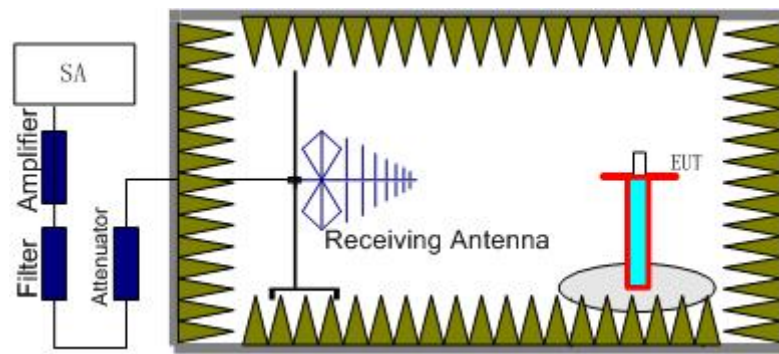

### A.2.2 Measurement Limit

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900, GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss.

The measurement results are obtained as described below:

$$\text{Power} = P_{\text{Mea}} + A_{\text{Rpl}}$$

**GSM Mode Channel 128/824.2MHz**

| Frequency(GHz) | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity   |
|----------------|------------|------------------------|------------------------|-------------|------------|
| 1.6480         | -51.66     | -2.65                  | -49.01                 | -13         | Vertical   |
| 3.2965         | -47.40     | -0.05                  | -47.35                 | -13         | Horizontal |
| 4.1210         | -46.91     | 1.25                   | -48.16                 | -13         | Vertical   |
| 4.9450         | -46.07     | 2.05                   | -48.12                 | -13         | Vertical   |

**GSM Mode Channel 190/836.6MHz**

| Frequency(GHz) | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity   |
|----------------|------------|------------------------|------------------------|-------------|------------|
| 1.6735         | -46.62     | -2.85                  | -43.77                 | -13         | Horizontal |
| 3.3470         | -48.75     | 0.55                   | -49.30                 | -13         | Vertical   |
| 5.0205         | -48.39     | 2.25                   | -50.64                 | -13         | Vertical   |

**GSM Mode Channel 251/848.8MHz**

| Frequency(GHz) | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity   |
|----------------|------------|------------------------|------------------------|-------------|------------|
| 1.6975         | -46.58     | -2.25                  | -44.33                 | -13         | Horizontal |
| 3.3950         | -49.17     | 0.15                   | -49.32                 | -13         | Vertical   |
| 5.0925         | -47.96     | 2.15                   | -50.11                 | -13         | Vertical   |

**GSM Mode Channel 512/1850.2MHz**

| Frequency(GHz) | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity |
|----------------|------------|------------------------|------------------------|-------------|----------|
| 3.7000         | -43.98     | 3.1                    | -47.08                 | -13         | Vertical |
| 5.5505         | -49.16     | 4.6                    | -53.76                 | -13         | Vertical |
| 9.2510         | -42.84     | 10.5                   | -53.34                 | -13         | Vertical |

**GSM Mode Channel 661/1880.0MHz**

| Frequency(GHz) | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity   |
|----------------|------------|------------------------|------------------------|-------------|------------|
| 3.7600         | -45.67     | 3.3                    | -48.97                 | -13         | Horizontal |
| 15.0408        | -40.39     | 14.9                   | -55.29                 | -13         | Vertical   |

**GSM Mode Channel 810/1909.8MHz**


| Frequency(GHz) | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity   |
|----------------|------------|------------------------|------------------------|-------------|------------|
| 3.8195         | -45.71     | 3.8                    | -49.51                 | -13         | Vertical   |
| 7.6395         | -46.67     | 8.4                    | -55.07                 | -13         | Horizontal |
| 11.4595        | -42.24     | 13.8                   | -56.04                 | -13         | Horizontal |

## GSM 850

### A.2.3.1 RADIATED SPURIOUS EMISSIONS-Channel 128: 30MHz –1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-128

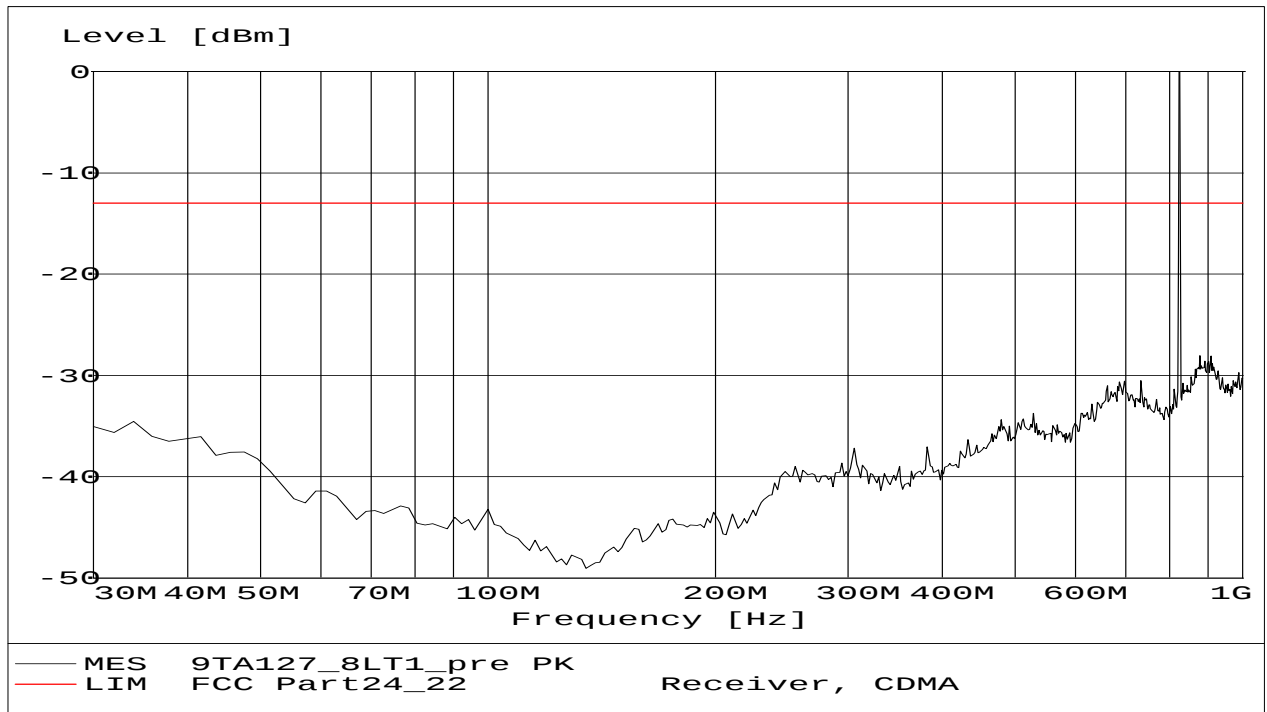

### A.2.3.2 RADIATED SPURIOUS EMISSIONS-Channel 190: 30MHz – 1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-190

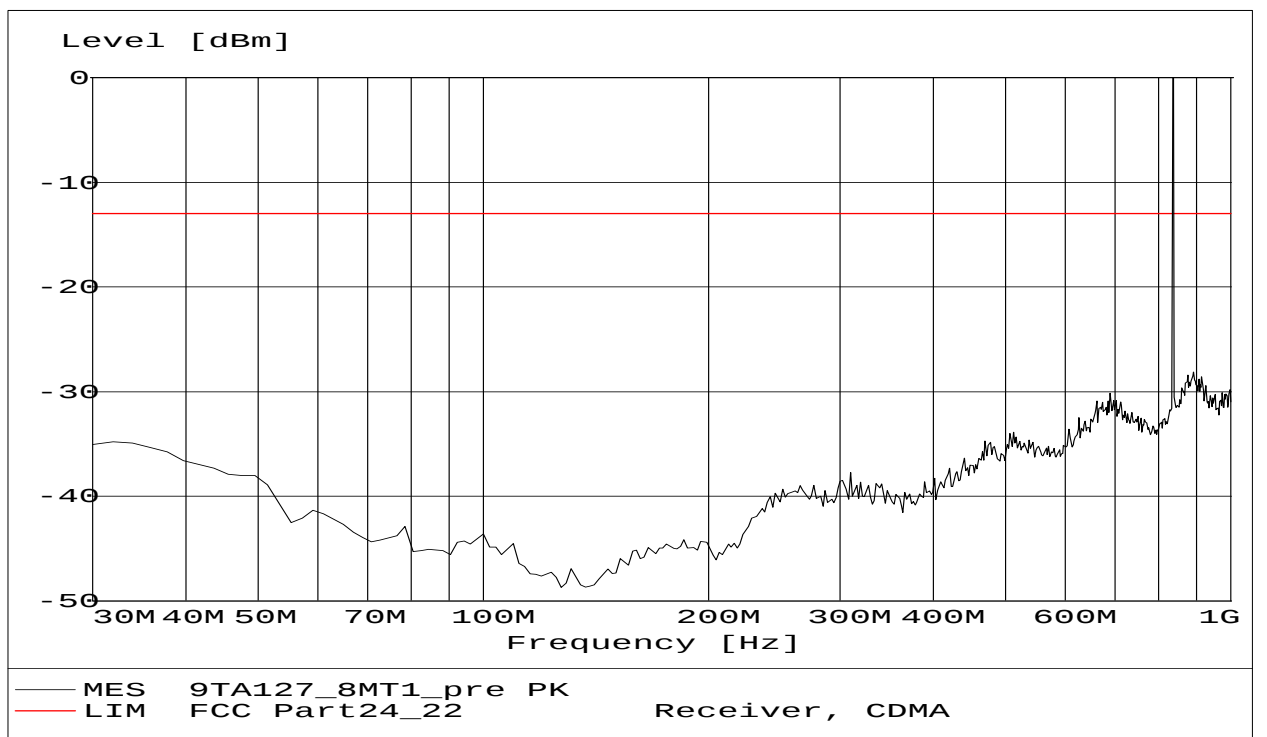

### A.2.3.3 RADIATED SPURIOUS EMISSIONS-Channel 251: 30MHz – 1GHz


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-251

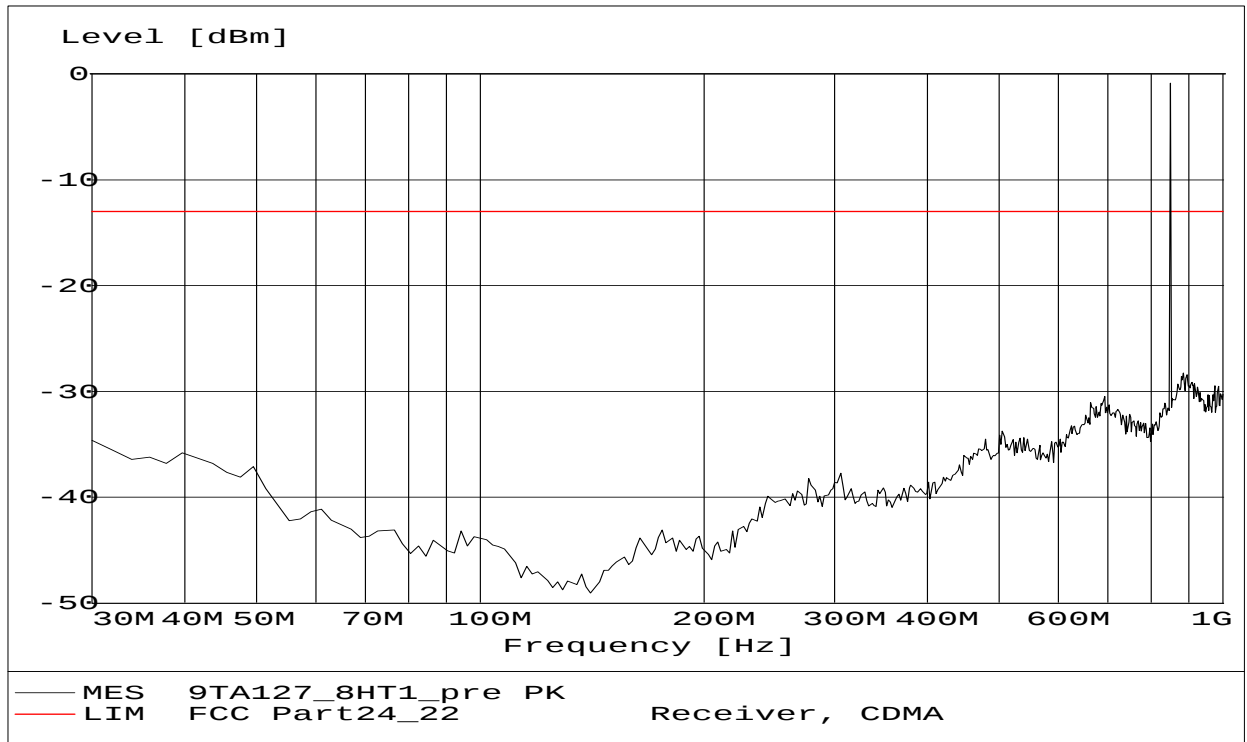


### A.2.3.4 RADIATED SPURIOUS EMISSIONS-Channel 128: 1GHz – 10GHz

Radiated spurious emission limit :-13dBm.

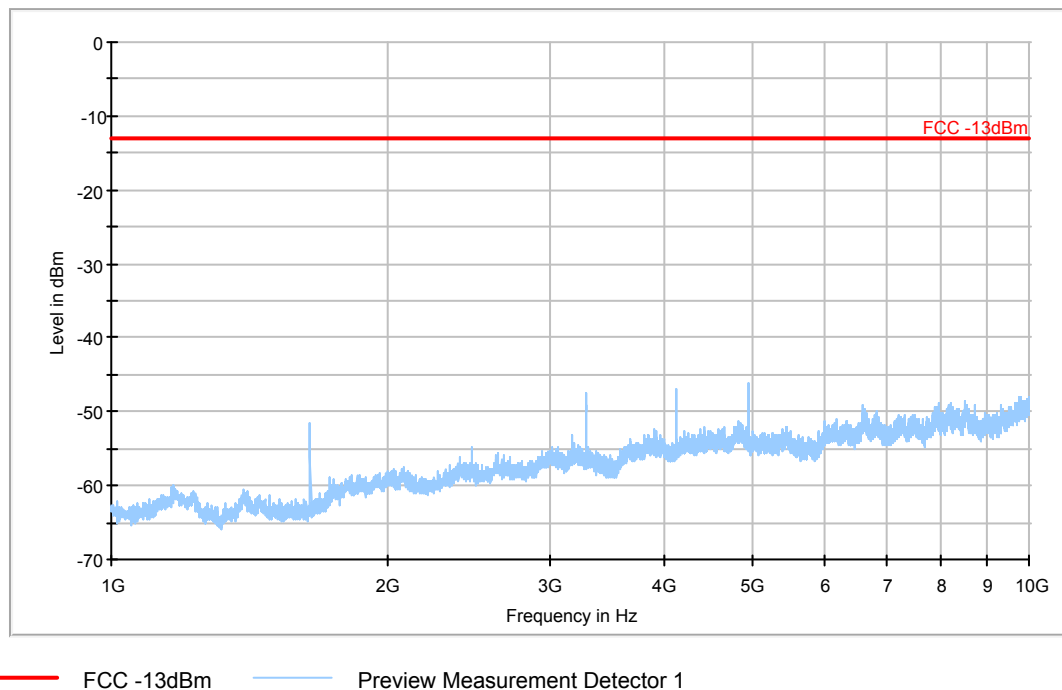


### A.2.3.5 RADIATED SPURIOUS EMISSIONS-Channel 190: 1GHz – 10GHz

Radiated spurious emission limit :-13dBm.

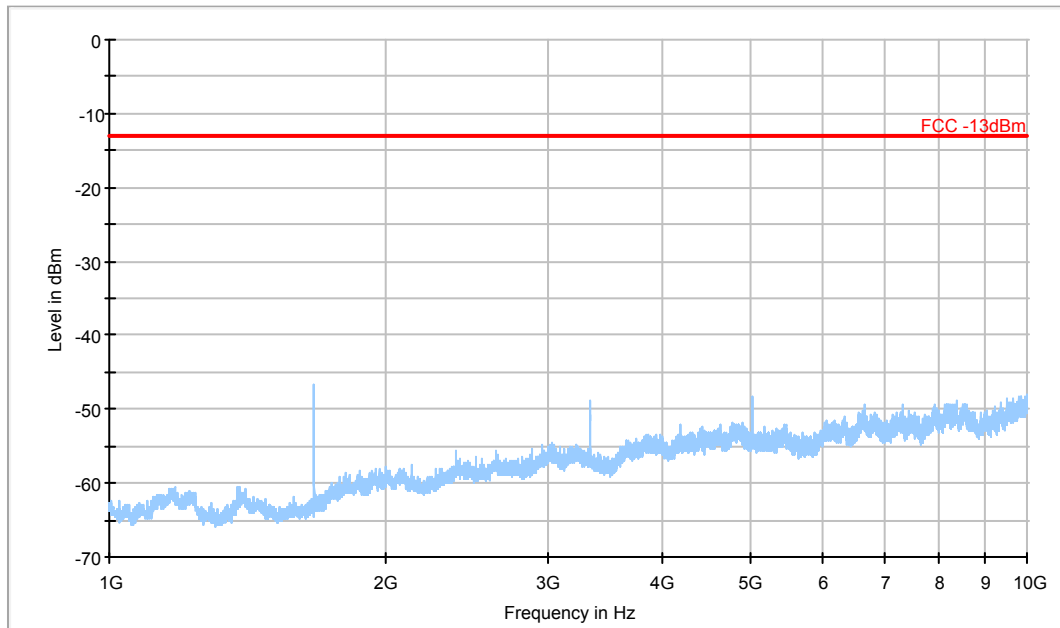


### A.2.3.6 RADIATED SPURIOUS EMISSIONS-Channel 251: 1GHz – 10GHz

Radiated spurious emission limit :-13dBm.

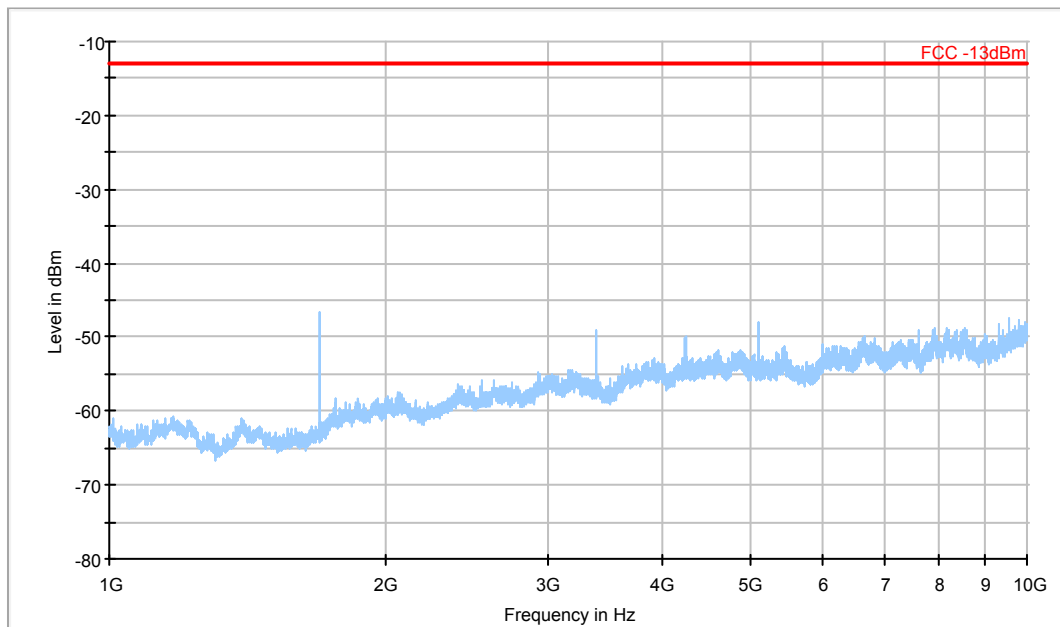


### A.2.3.7 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 1GHz

Radiated spurious emission limit :-13dBm.

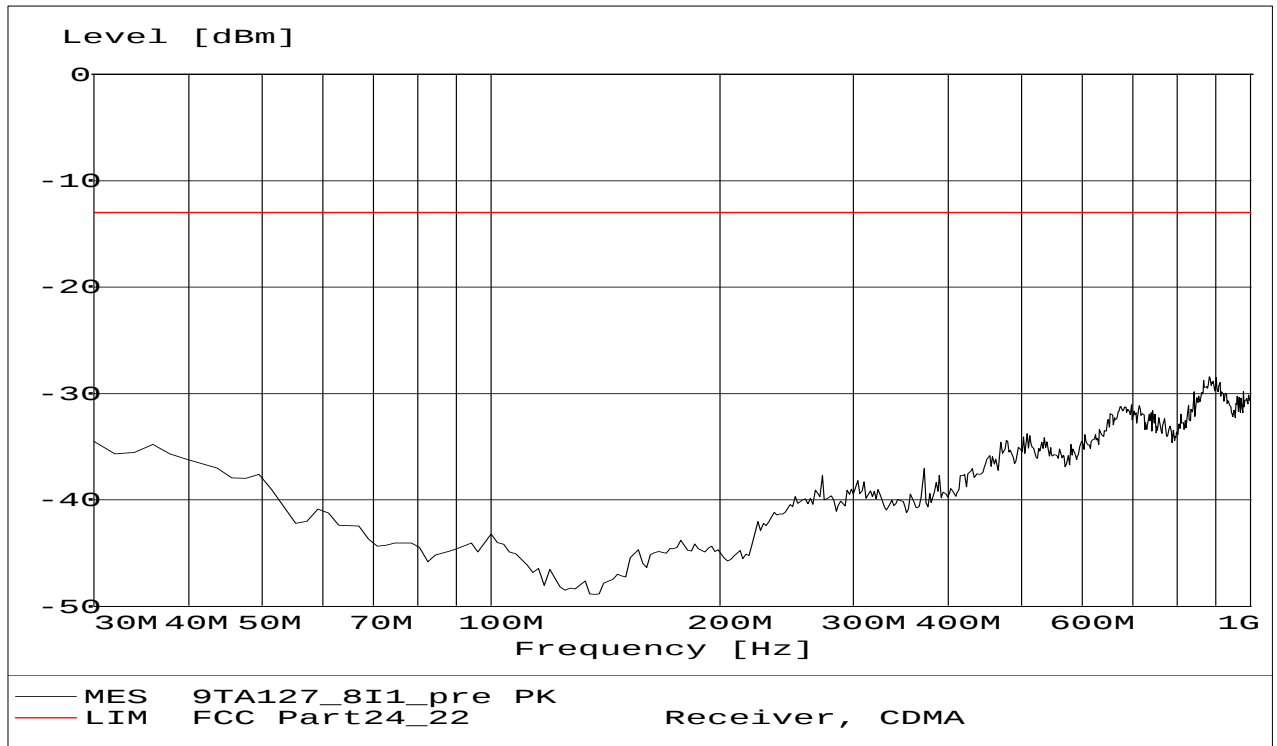

### A.2.3.8 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 1GHz – 10GHz

Radiated spurious emission limit :-13dBm.

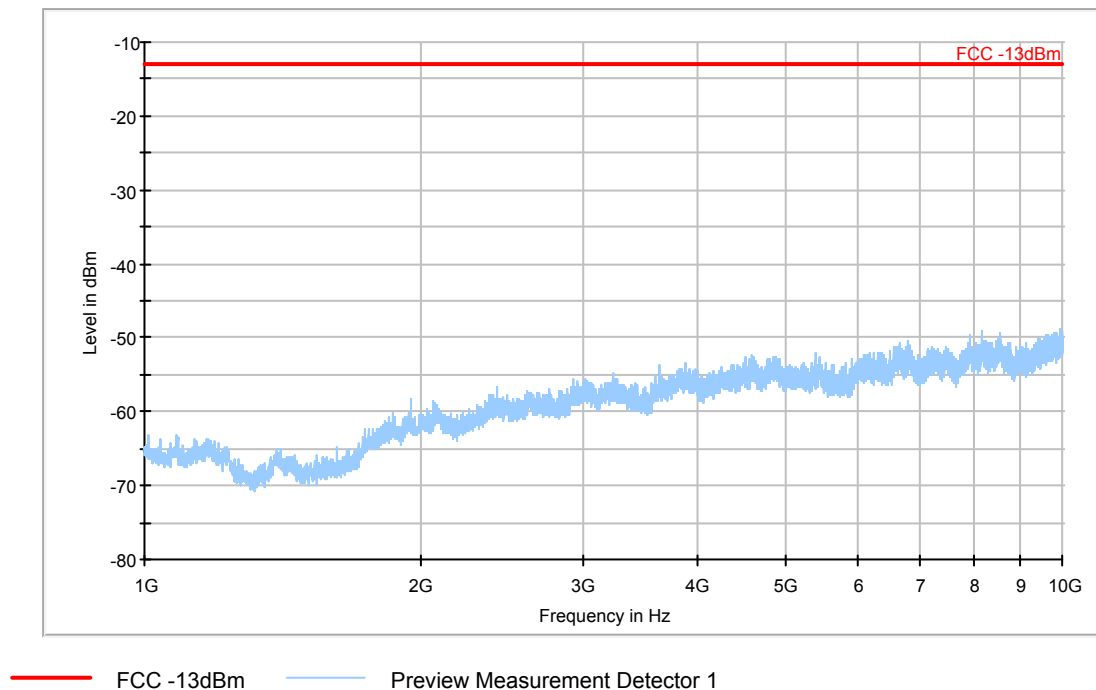


PCS 1900

A.2.3.9 RADIATED SPURIOUS EMISSIONS-Channel 512: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-512

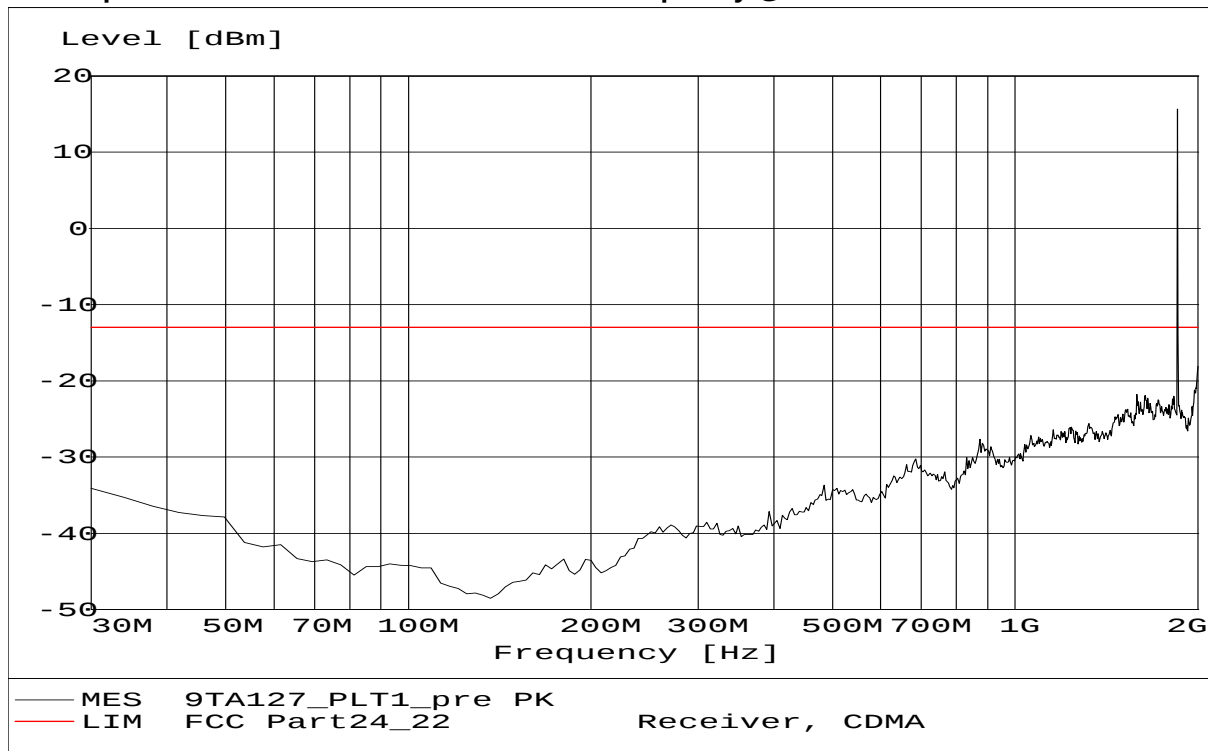

A.2.3.10 RADIATED SPURIOUS EMISSIONS-Channel 661: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-661

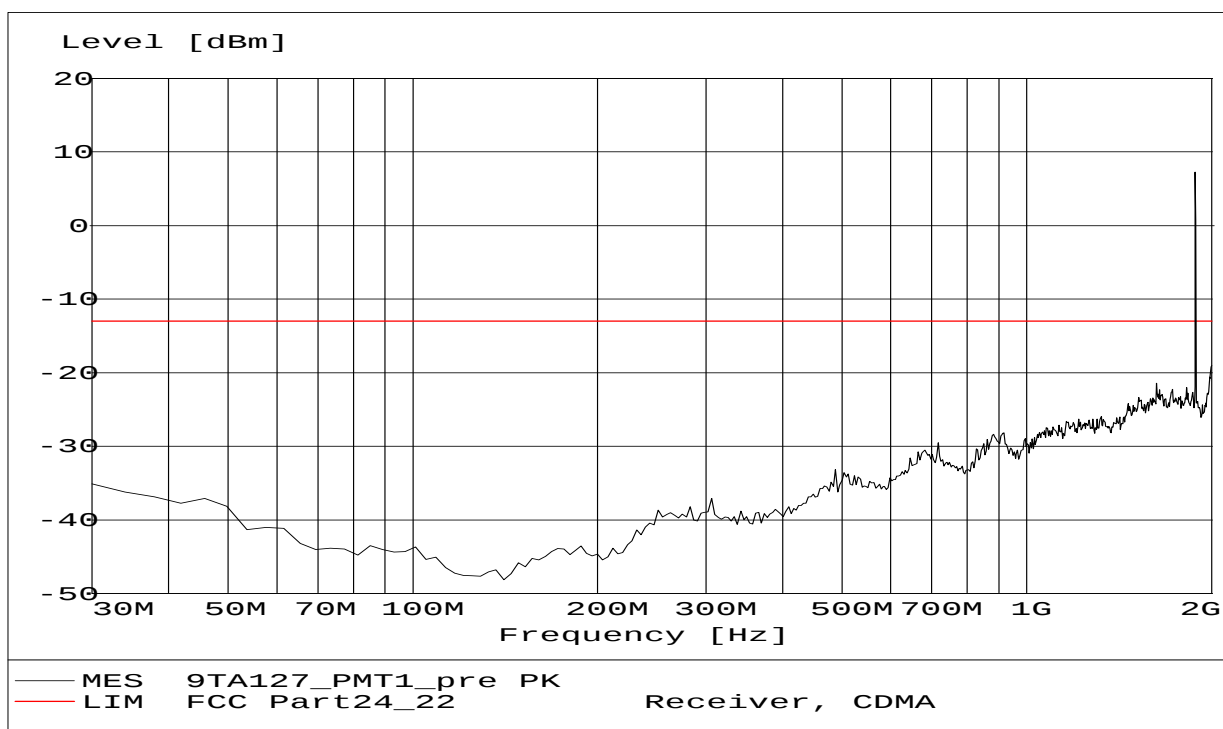

#### A.2.3.11 RADIATED SPURIOUS EMISSIONS-Channel 810: 30MHz – 2GHz


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-810

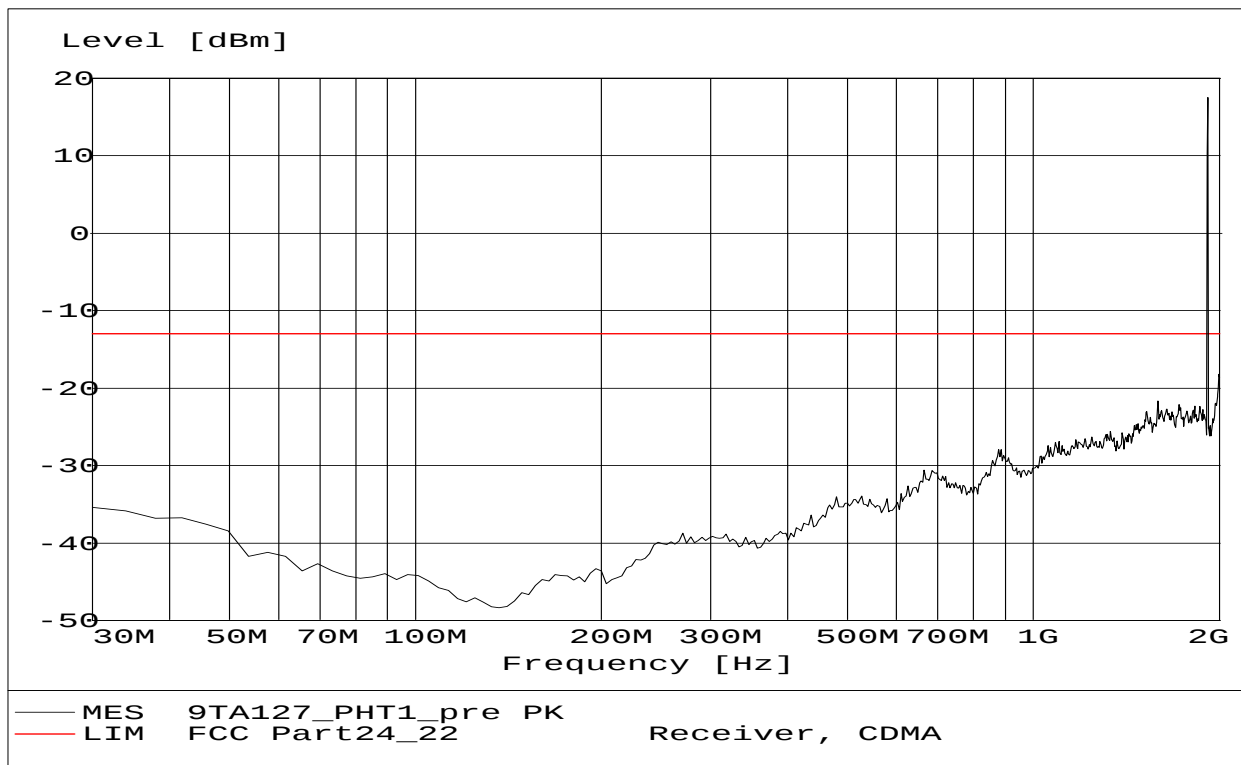


#### A.2.3.12 RADIATED SPURIOUS EMISSIONS-Channel 512: 2GHz – 18GHz

Radiated spurious emission limit :-13dBm.

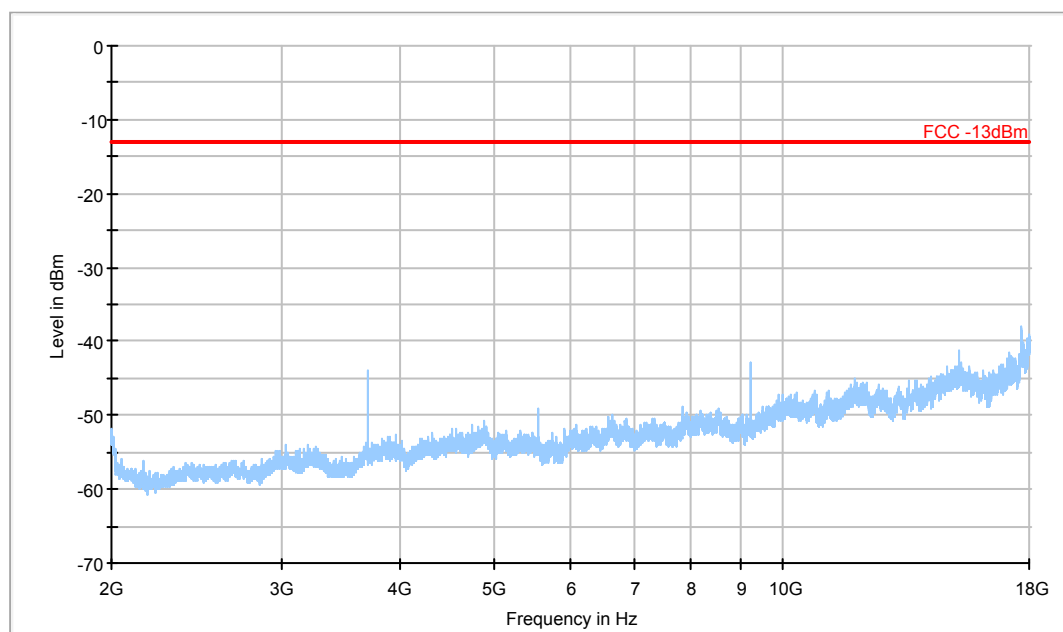

### A.2.3.13 RADIATED SPURIOUS EMISSIONS-Channel 661: 2GHz – 18GHz


Radiated spurious emission limit :-13dBm.

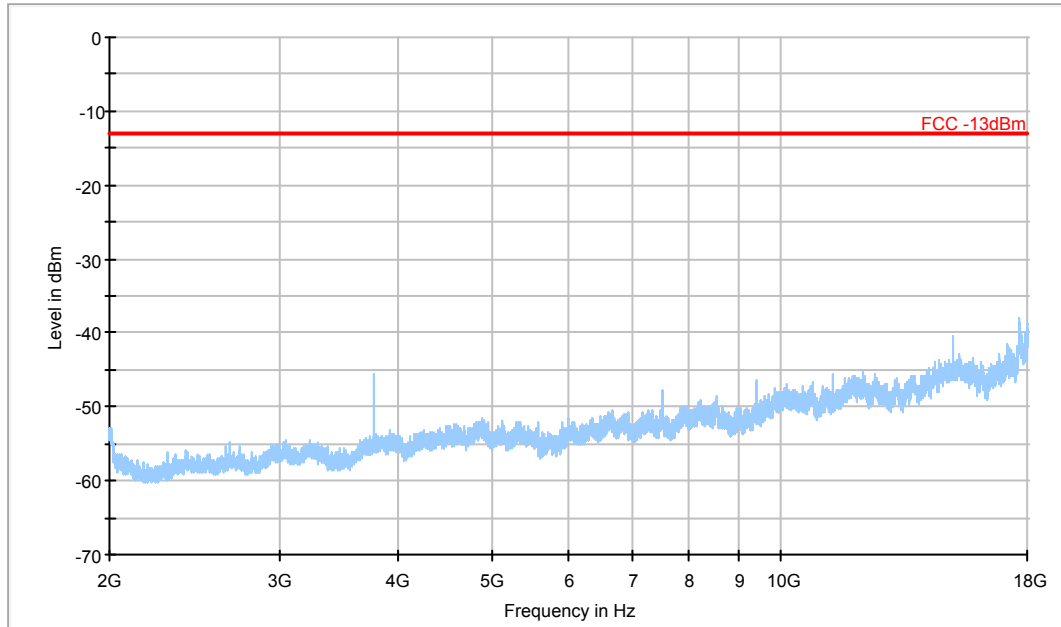

— FCC -13dBm      — Preview Measurement Detector 1

### A.2.3.14 RADIATED SPURIOUS EMISSIONS-Channel 810: 2GHz – 18GHz

Radiated spurious emission limit :-13dBm.

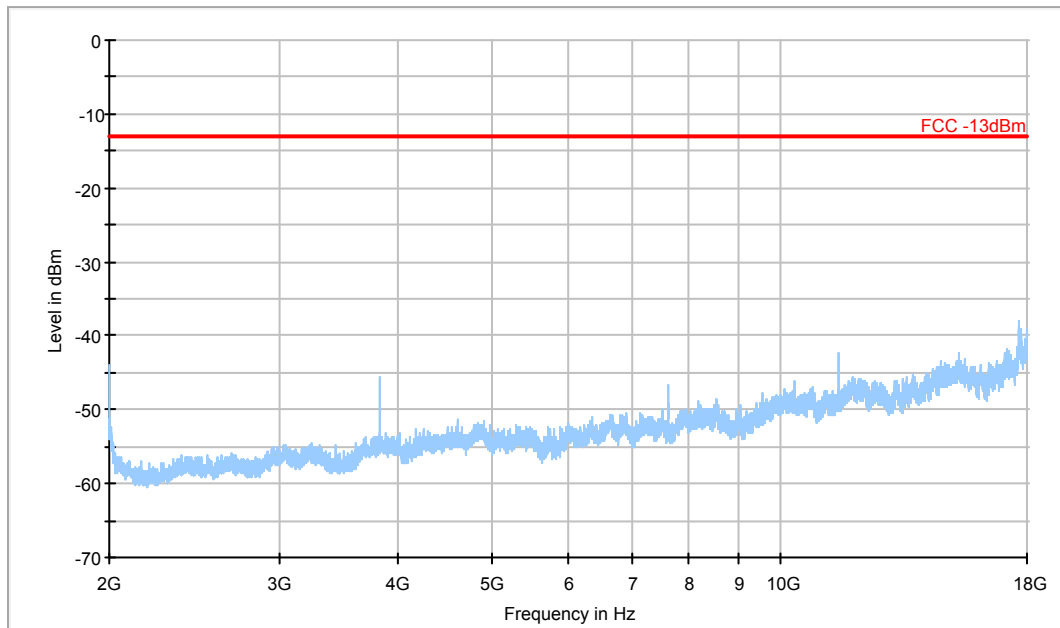


— FCC -13dBm      — Preview Measurement Detector 1

### A.2.3.15 Radiated spurious emission (18GHz-20GHz)


Radiated spurious emission limit :-13dBm.

Note: This plot is valid for low, mid & high channels. It is same as the floor noise.

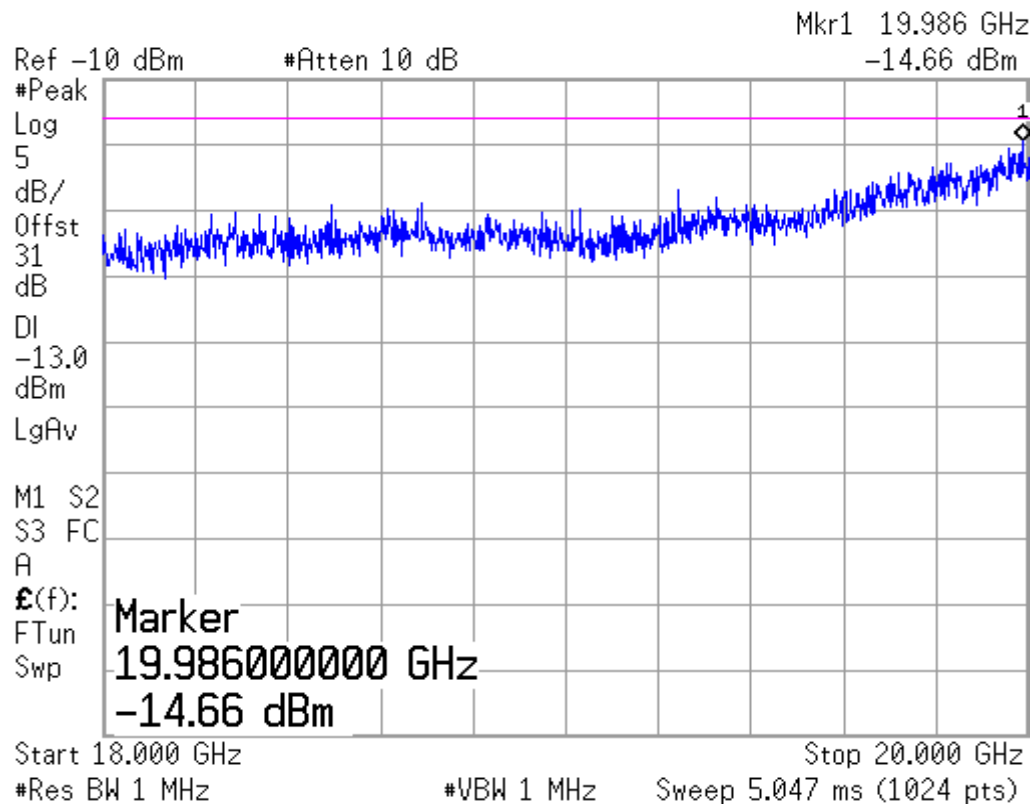


### A.2.3.16 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.

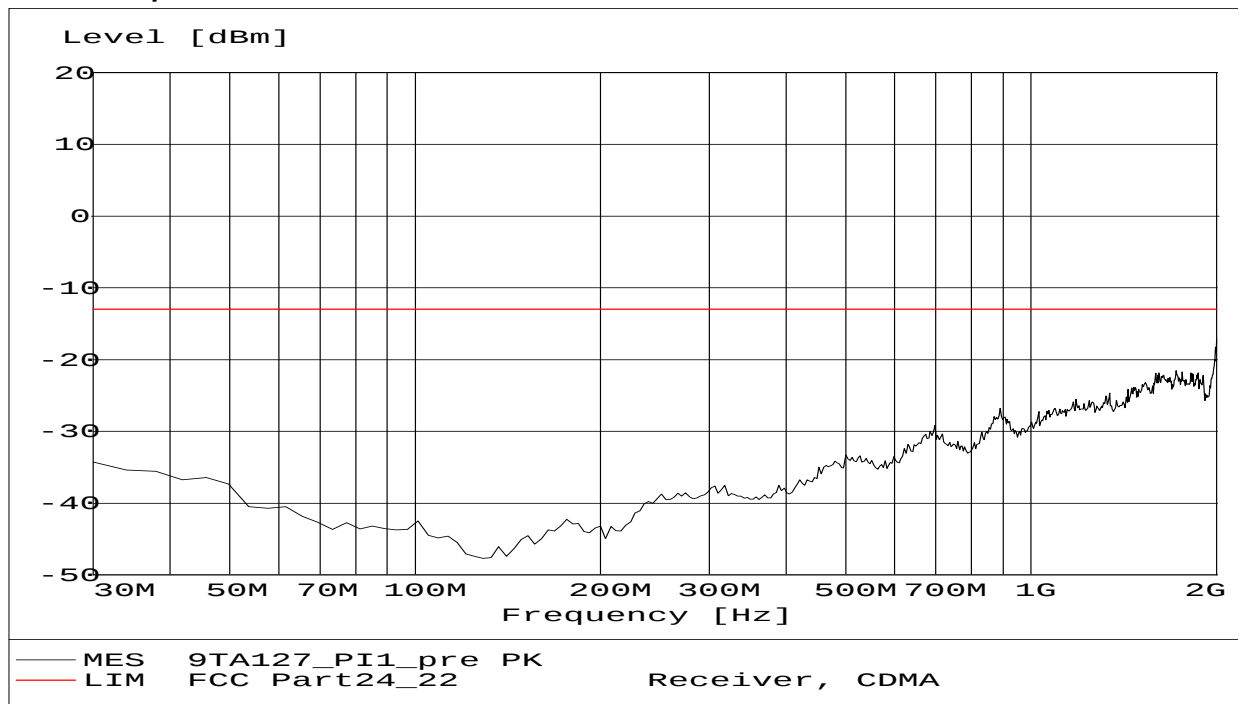

### A.2.3.17 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 2GHz – 18GHz

Radiated spurious emission limit :-13dBm.

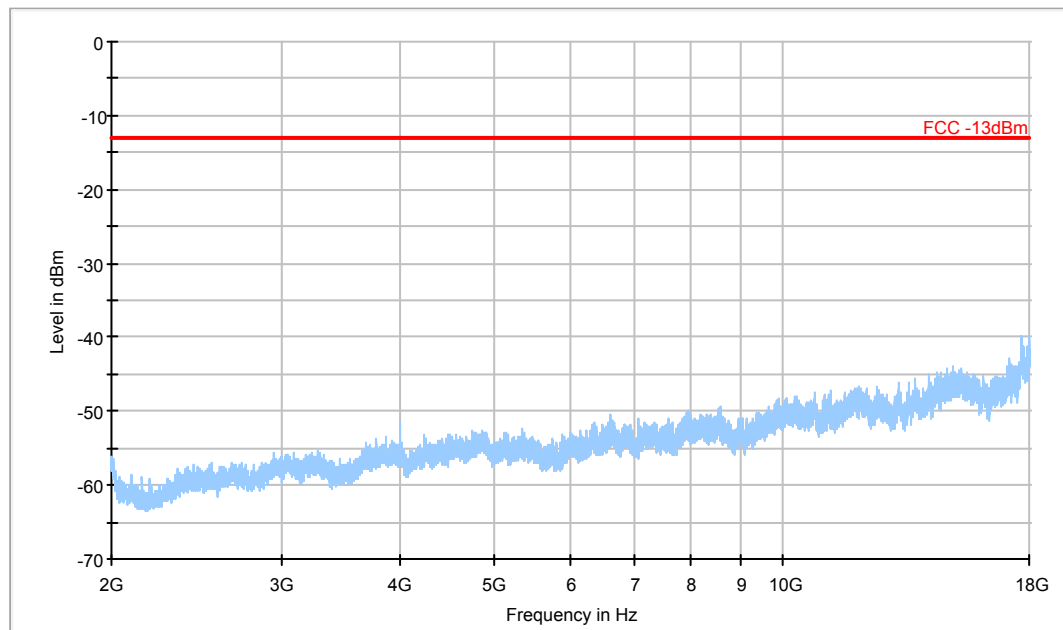


— FCC -13dBm      — Preview Measurement Detector 1

### A.2.3.18 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 18GHz – 20GHz

Radiated spurious emission limit :-13dBm.

Note: It is same as the floor noise.

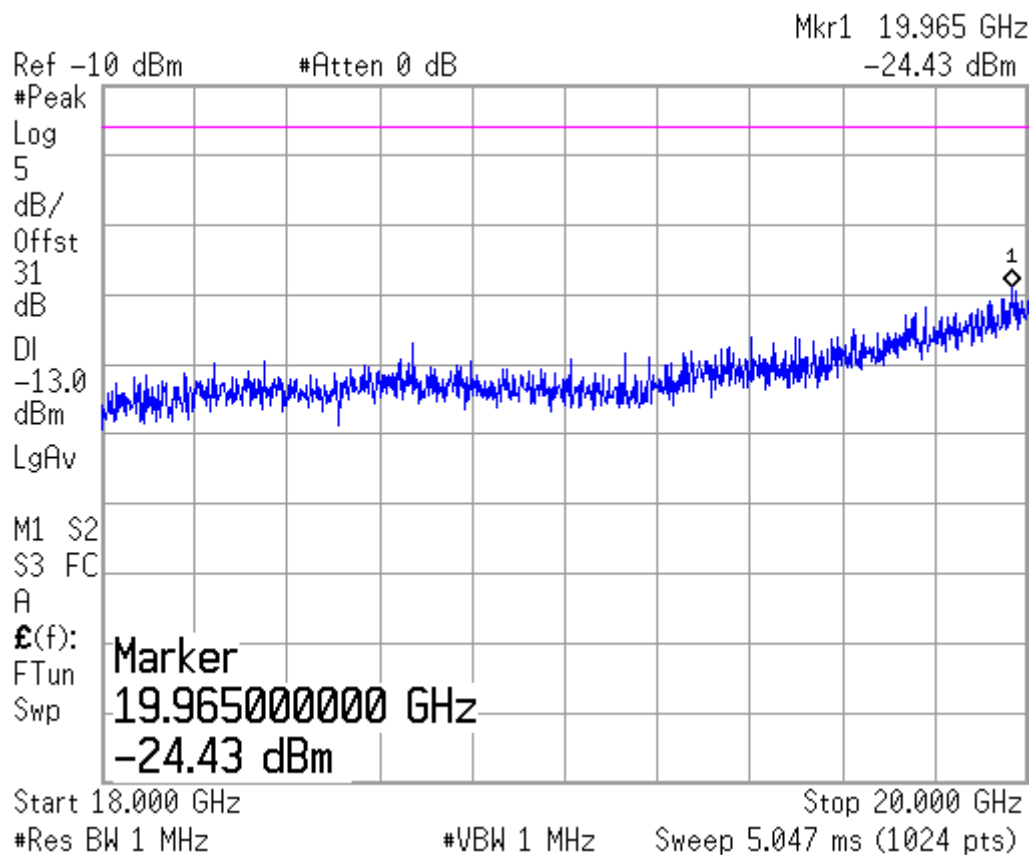

### A.3 CONDUCTED EMISSION (§15.107§15.207)

The measurement procedure in ANSI C63.4-1003 is used. Conducted Emission is measured with travel charger.


#### A.3.1 Limit

| Frequency of Emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi -Peak            | Average   |
| 0.15 – 0.5                  | 66 to 56*              | 56 to 46* |
| 0.5 – 5                     | 56                     | 46        |
| 5 – 30                      | 60                     | 50        |

\* Decreases with logarithm of the frequency

#### A.3.2 Measurement result


##### GSM850MHz

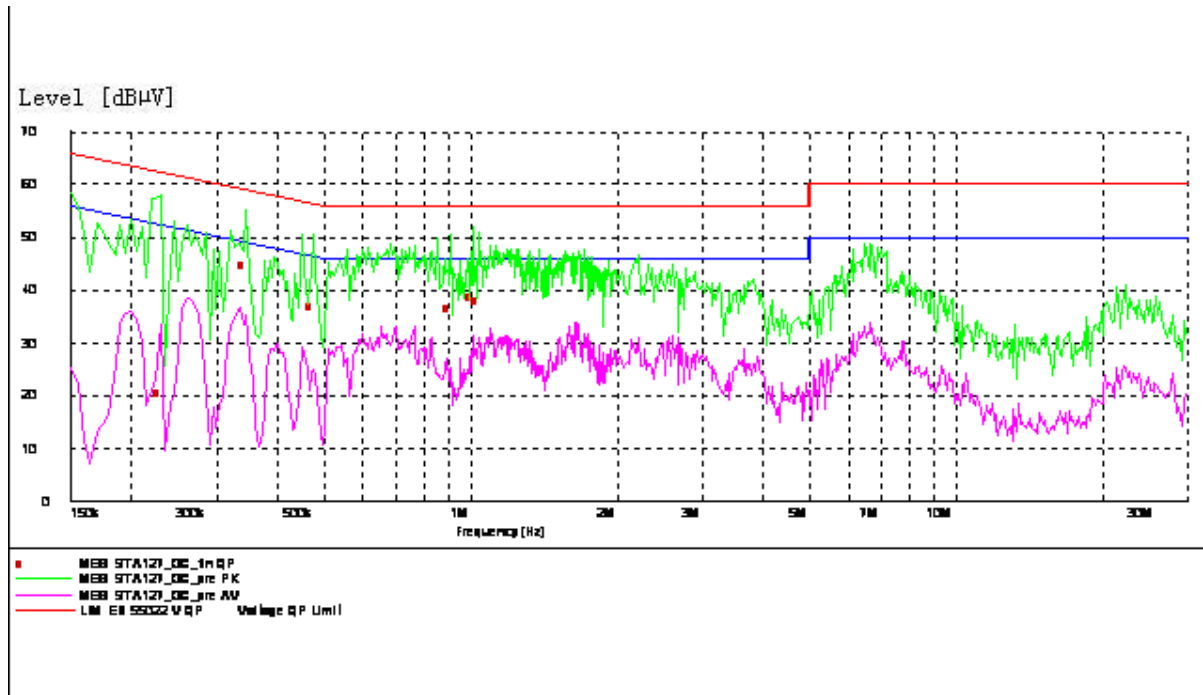

#### MEASUREMENT RESULT: "9TA127\_GC\_fin QP"

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.230000      | 20.40      | 10.1      | 62         | 42.1      | L1   | FLO |
| 0.345000      | 44.80      | 10.1      | 59         | 14.3      | N    | GND |
| 0.475000      | 36.90      | 10.1      | 56         | 19.5      | L1   | FLO |
| 0.910000      | 36.50      | 10.1      | 56         | 19.5      | N    | GND |
| 1.010000      | 38.80      | 10.1      | 56         | 17.2      | N    | FLO |
| 1.040000      | 38.20      | 10.1      | 56         | 17.8      | N    | GND |

PCS 1900MHz

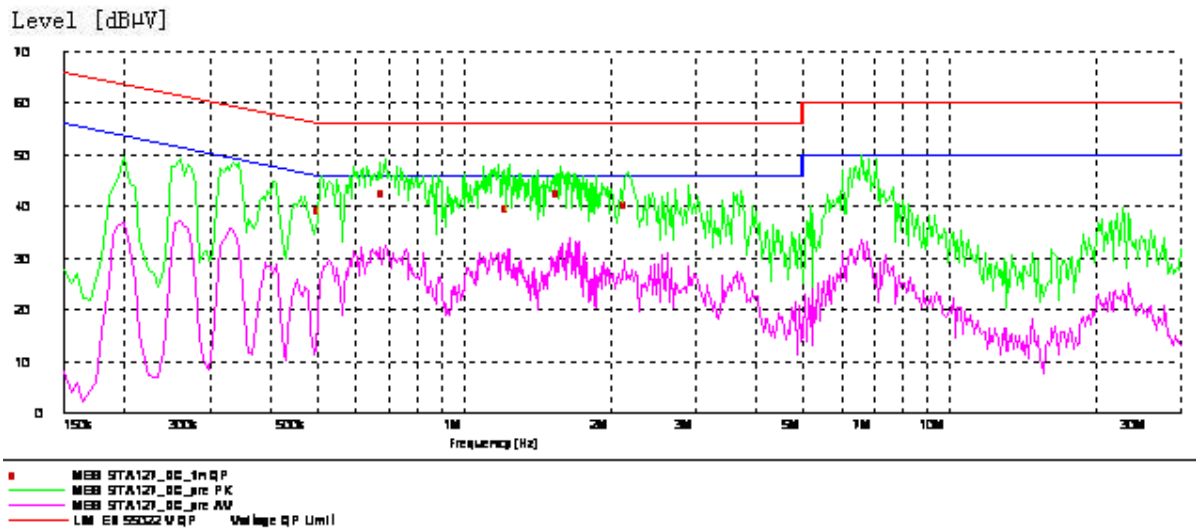

MEASUREMENT RESULT: "9TA127\_DC\_fin QP"

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.510000         | 39.40         | 10.1         | 56            | 16.6         | L1   | GND |
| 0.690000         | 42.80         | 10.1         | 56            | 13.3         | N    | GND |
| 1.245000         | 39.80         | 10.1         | 56            | 16.2         | L1   | GND |
| 1.585000         | 42.70         | 10.1         | 56            | 13.3         | N    | FLO |
| 2.183212         | 40.50         | 10.1         | 56            | 15.5         | N    | FLO |

## **A.4 FREQUENCY STABILITY** (§2.1055/§24.235)

### **A.4.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 , channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.4.2 Measurement Limit**

#### **A.4.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **A.4.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

#### A.4.3 Measurement results

##### GSM 850

##### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.5        | 19                  | 0.022                |
| 3.8        | 16                  | 0.019                |
| 4.2        | 17                  | 0.020                |

##### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | 36                  | 0.043                |
| -20             | 33                  | 0.039                |
| -10             | 30                  | 0.036                |
| 0               | 20                  | 0.024                |
| 10              | 18                  | 0.021                |
| 20              | 17                  | 0.020                |
| 30              | 19                  | 0.022                |
| 40              | 25                  | 0.030                |
| 50              | 34                  | 0.040                |

##### PCS 1900

##### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.5        | 31                  | 0.016                |
| 3.8        | 25                  | 0.013                |
| 4.2        | 28                  | 0.015                |

##### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | 48                  | 0.026                |
| -20             | 45                  | 0.024                |
| -10             | 41                  | 0.022                |
| 0               | 38                  | 0.020                |
| 10              | 34                  | 0.018                |
| 20              | 26                  | 0.014                |
| 30              | 26                  | 0.014                |
| 40              | 32                  | 0.017                |
| 50              | 44                  | 0.023                |

## A.5 OCCUPIED BANDWIDTH (§2.1049(h)(i))

### A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. The table below lists the measured -20dBc BW (99%). Spectrum analyzer plots are included on the following pages.

#### GSM 850(99%)

| Frequency(MHz) | Occupied Bandwidth (99%)( kHz) |
|----------------|--------------------------------|
| 824.2          | 246.795                        |
| 836.6          | 245.192                        |
| 848.8          | 243.590                        |


#### GSM 850

#### Channel 128-Occupied Bandwidth (99%)

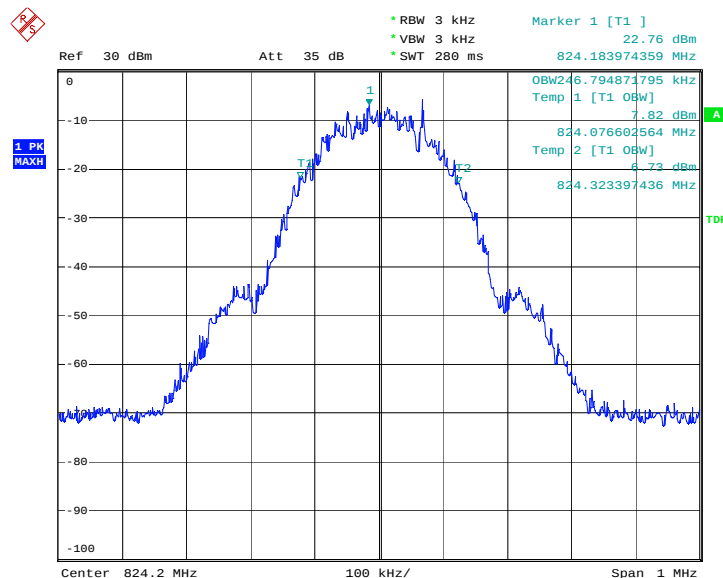


Date: 11.MAR.2009 05:52:43

### Channel 190-Occupied Bandwidth (99%)

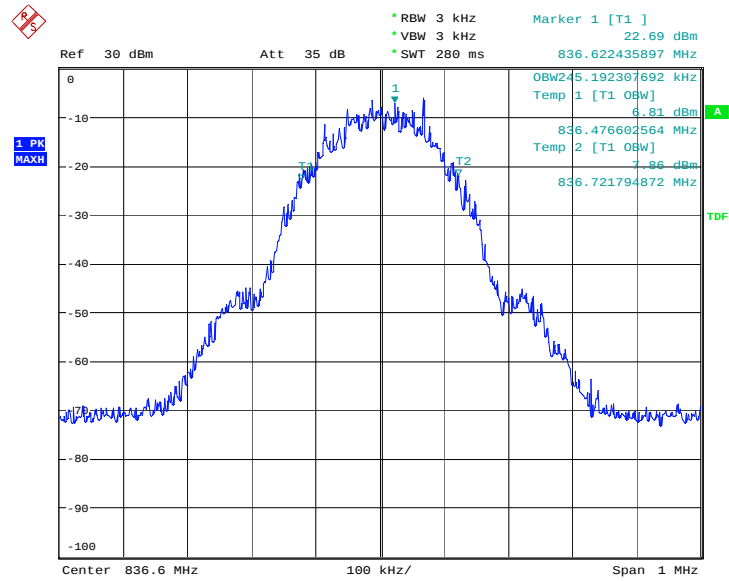

Date: 11.MAR.2009 05:53:06

### Channel 251-Occupied Bandwidth (99%)

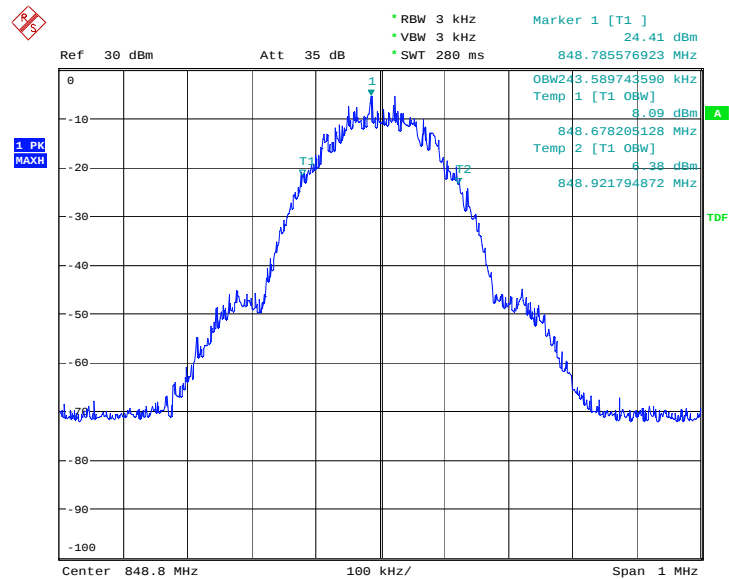


Date: 11.MAR.2009 05:53:39

### PCS 1900(99%)

| Frequency(MHz) | Occupied Bandwidth (99%)( kHz) |
|----------------|--------------------------------|
| 1850.2         | 246.795                        |
| 1880.0         | 245.192                        |
| 1909.8         | 243.590                        |


### PCS 1900

#### Channel 512-Occupied Bandwidth (99%)

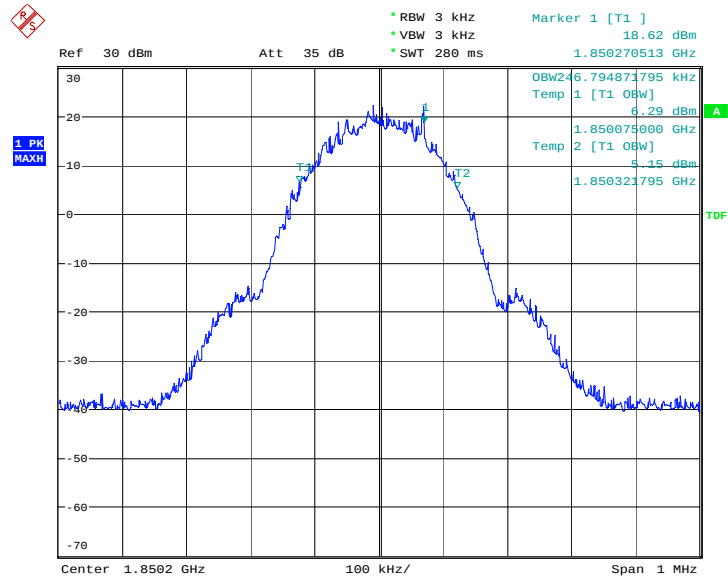


Date: 11.MAR.2009 05:25:46

### Channel 661-Occupied Bandwidth (99%)

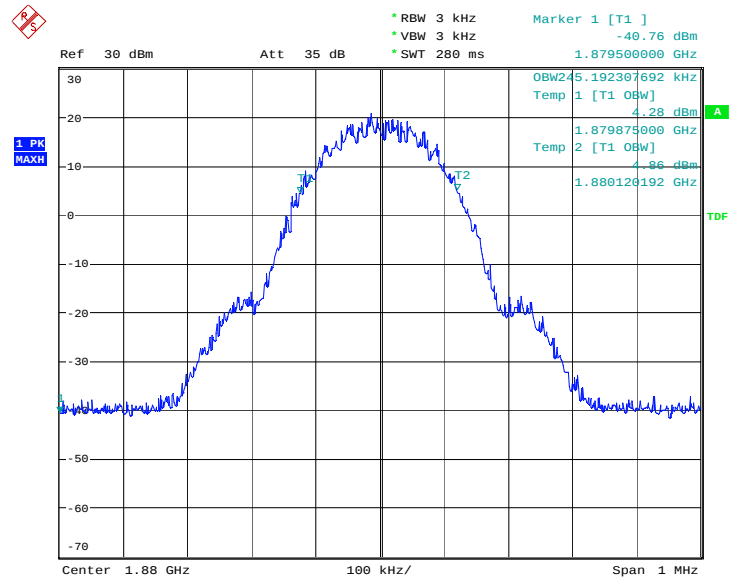

Date: 11.MAR.2009 05:26:34

### Channel 810-Occupied Bandwidth (99%)

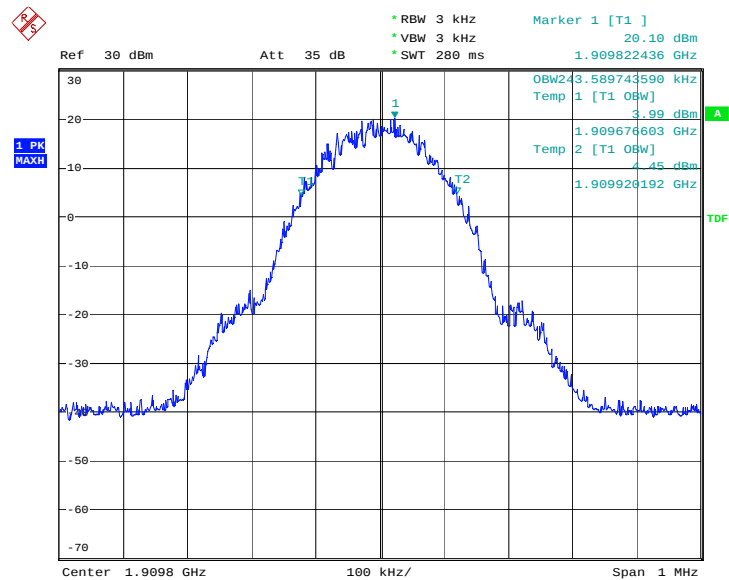

Date: 11.MAR.2009 05:28:08

## **A.6 EMISSION BANDWIDTH** (§22.917(b)/§24.238(b))

### **A.6.1 Emission Bandwidth Results**


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the PCS1900 band and GSM850 band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

#### **GSM 850(-26dBc)**

| Frequency(MHz) | Occupied Bandwidth (-26dBc BW)( kHz) |
|----------------|--------------------------------------|
| 824.2          | 304.487                              |
| 836.6          | 306.090                              |
| 848.8          | 302.885                              |


#### **GSM 850**

#### **Channel 128-Occupied Bandwidth (-26dBc BW)**

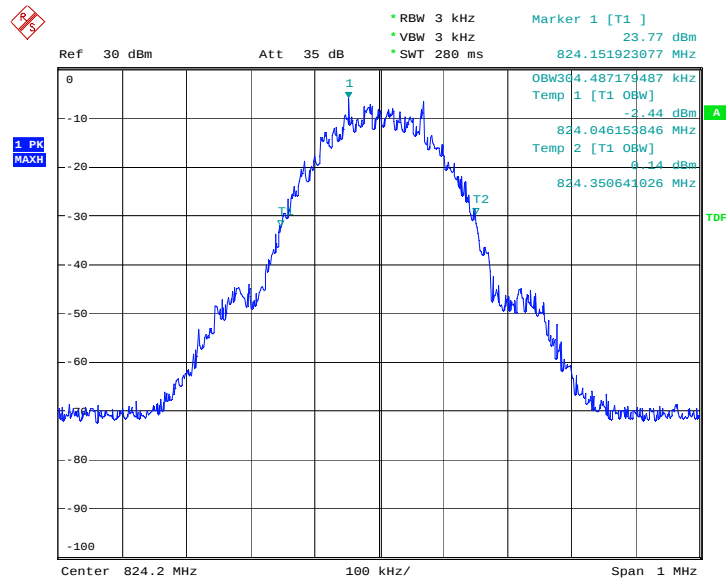


Date: 11.MAR.2009 05:55:19

### Channel 190-Occupied Bandwidth (-26dBc BW)

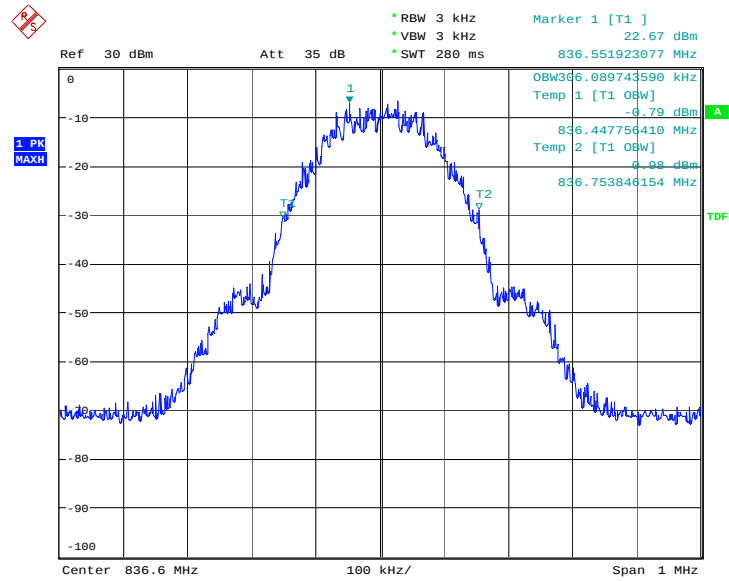

Date: 11.MAR.2009 05:54:46

### Channel 251-Occupied Bandwidth (-26dBc BW)

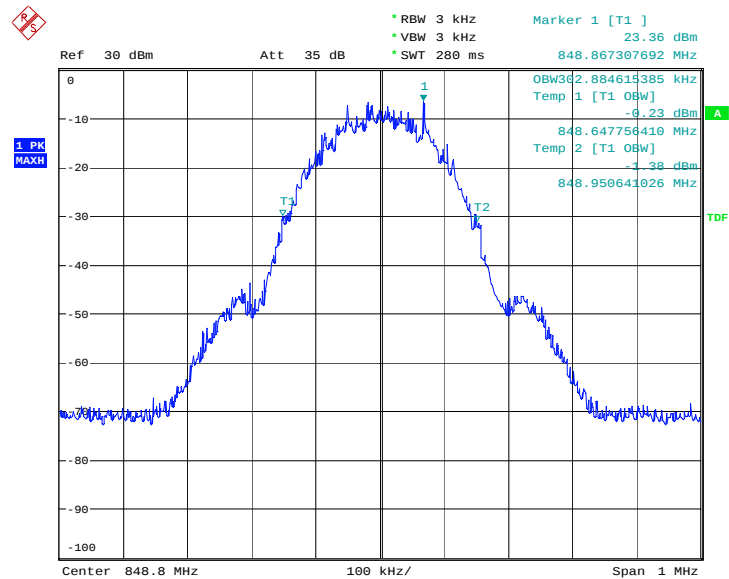


Date: 11.MAR.2009 05:54:15

### PCS 1900(-26dBc)

| Frequency(MHz) | Occupied Bandwidth (-26dBc BW)( kHz) |
|----------------|--------------------------------------|
| 1850.2         | 307.692                              |
| 1880.0         | 306.090                              |
| 1909.8         | 307.692                              |


### PCS 1900

#### Channel 512-Occupied Bandwidth (-26dBc BW)

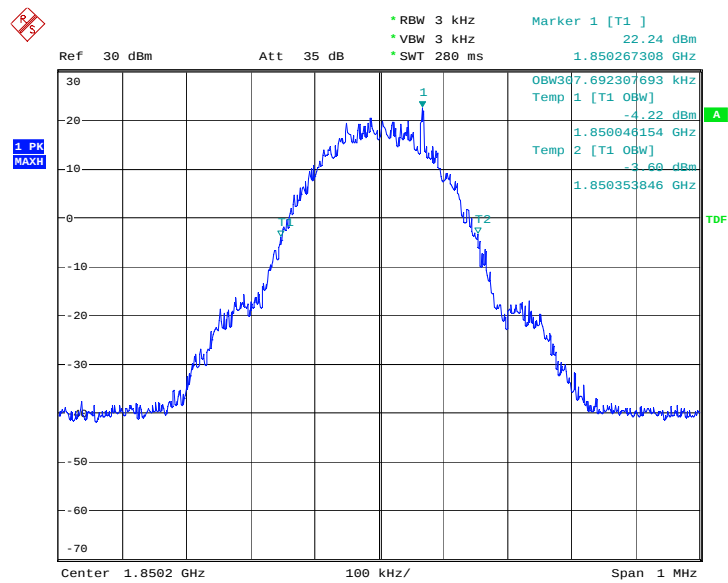


Date: 11.MAR.2009 05:29:53

### Channel 661-Occupied Bandwidth (-26dBc BW)

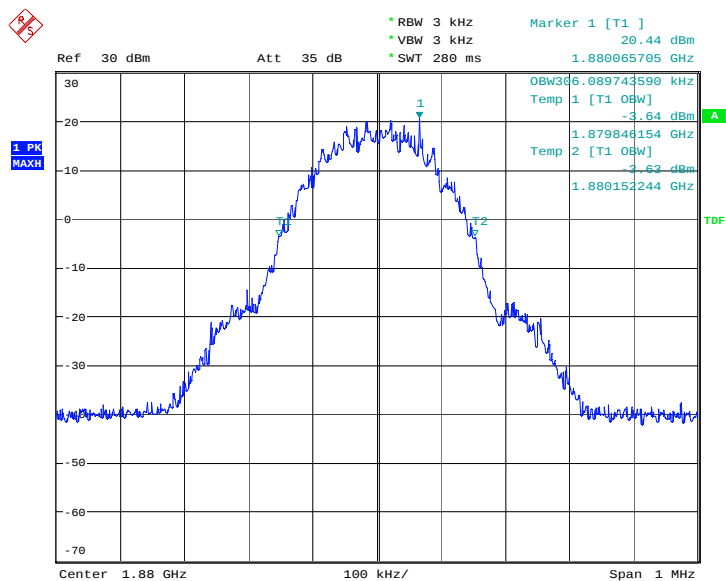

Date: 11.MAR.2009 05:29:19

### Channel 810-Occupied Bandwidth (-26dBc BW)

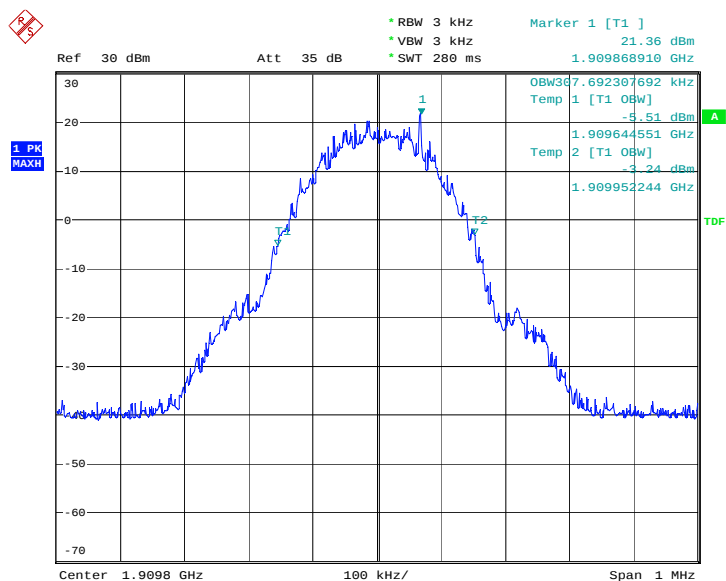


Date: 11.MAR.2009 05:28:50

## A.7 BAND EDGE COMPLIANCE (§22.917(b)/§24.238(b))


### GSM850

#### LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

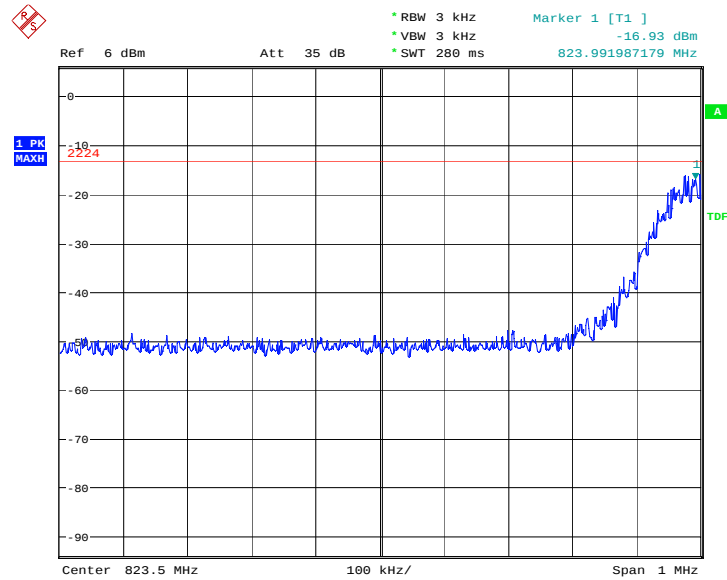

Date: 11.MAR.2009 06:16:58


#### HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

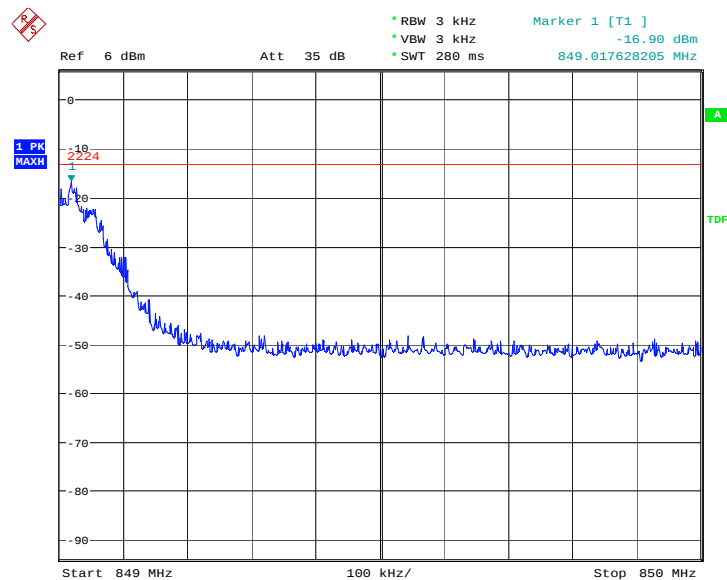

Date: 11.MAR.2009 06:17:28


## PCS 1900

### LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

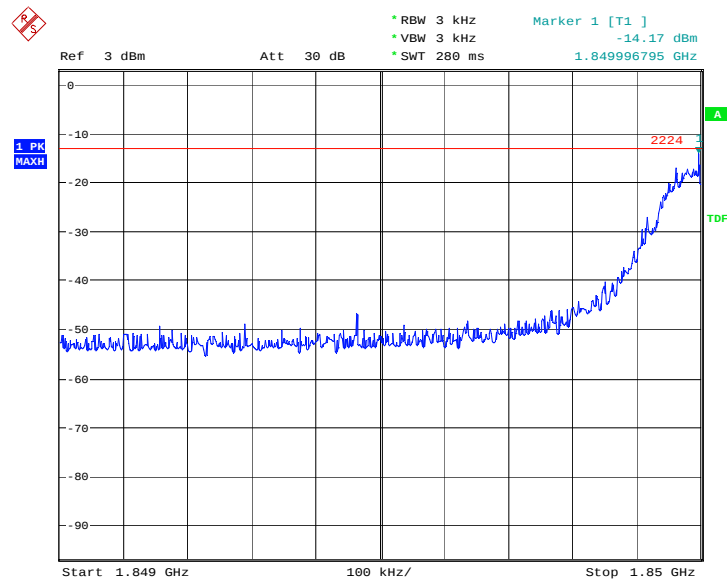

Date: 11.MAR.2009 05:46:09

### HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

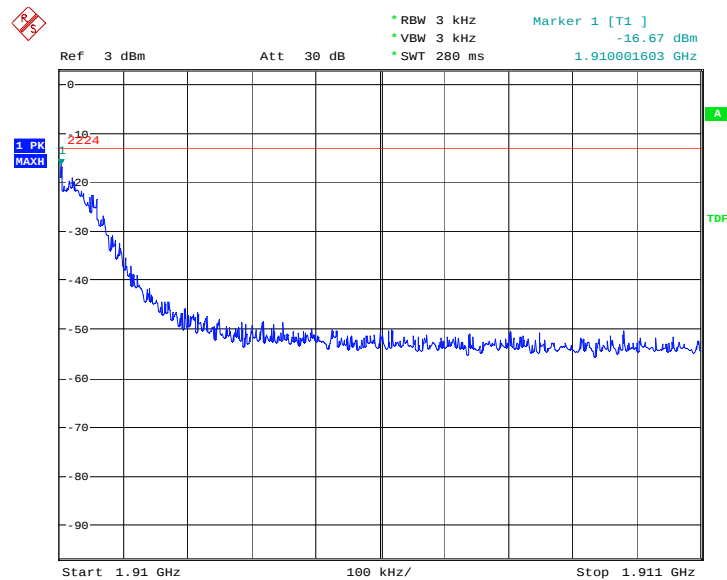

Date: 11.MAR.2009 05:46:44

## **A.8 CONDUCTED SPURIOUS EMISSION** (§2.1057/§22.917/§24.238)

### **A.8.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **GSM850 Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 128     | 824.2           |
| 190     | 836.6           |
| 251     | 848.8           |

#### **PCS1900 Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 512     | 1850.2          |
| 661     | 1880.0          |
| 810     | 1909.8          |

### **A. 8.2 Measurement Limit**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### A. 8.3 Measurement result


#### GSM850

| Harmonic        | Tx ch. 128<br>Freq.<br>(MHz) | Level<br>(dBm) | Tx ch. 190<br>Freq.<br>(MHz) | Level<br>(dBm) | Tx ch.<br>Freq.<br>(MHz) 251 | Level<br>(dBm) |
|-----------------|------------------------------|----------------|------------------------------|----------------|------------------------------|----------------|
| 2               | 1648.4                       | nf             | 1673.2                       | nf             | 1697.6                       | nf             |
| 3               | 2472.6                       | nf             | 2509.8                       | nf             | 2546.4                       | nf             |
| 4               | 3296.8                       | nf             | 3346.4                       | nf             | 3395.2                       | nf             |
| 5               | 4121                         | nf             | 4183                         | nf             | 4244                         | nf             |
| 6               | 4945.2                       | nf             | 5019.6                       | nf             | 5092.8                       | nf             |
| 7               | 5769.4                       | nf             | 5856.2                       | nf             | 5941.6                       | nf             |
| 8               | 6593.6                       | nf             | 6692.8                       | nf             | 6790.4                       | nf             |
| 9               | 7417.8                       | nf             | 7529.4                       | nf             | 7639.2                       | nf             |
| 10              | 8242                         | nf             | 8366                         | nf             | 8488                         | nf             |
| nf: Noise floor |                              |                |                              |                |                              |                |

#### A.8.3.1 Channel 128: 30MHz – 4GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

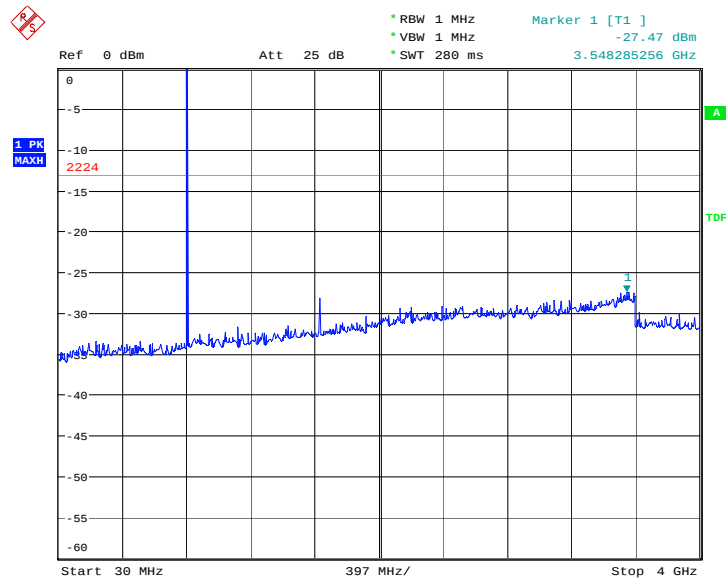

Date: 11.MAR.2009 06:08:40

### A.8.3.2 Channel 128: 4GHz – 10GHz

Spurious emission limit –13dBm.

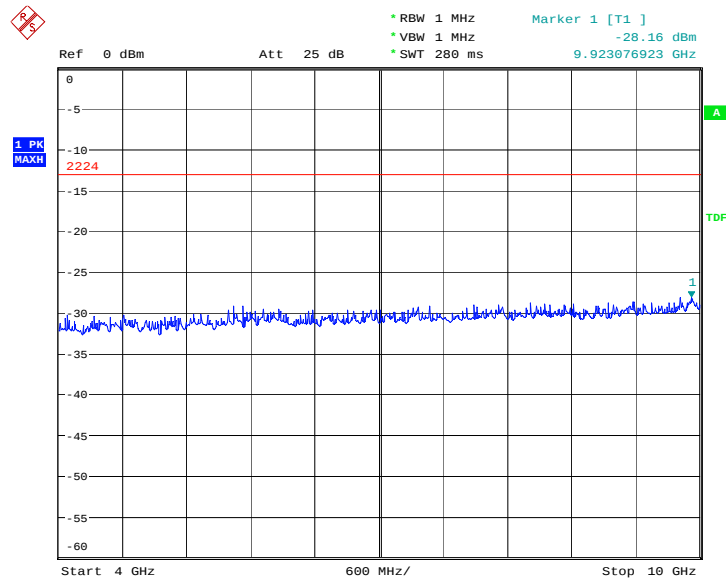


Date: 11.MAR.2009 06:08:58

### A.8.3.3 Channel 190: 30MHz – 4GHz

Spurious emission limit –13dBm


**NOTE: peak above the limit line is the carrier frequency.**

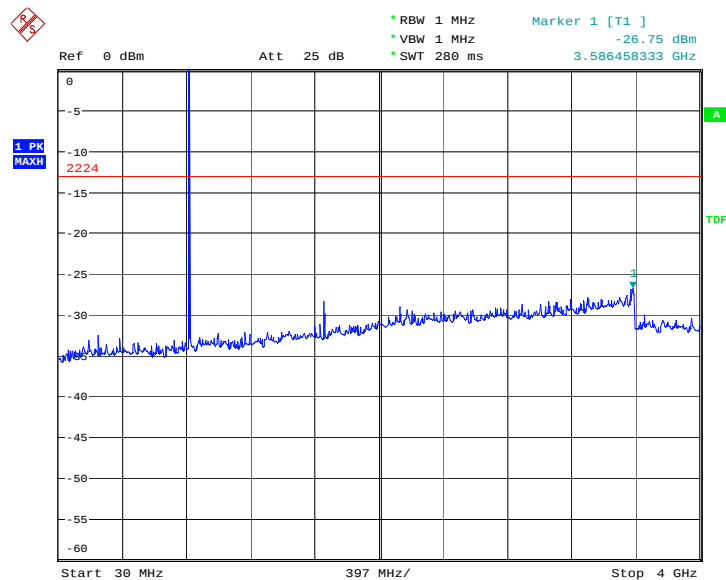

Date: 11.MAR.2009 06:09:34

#### A.8.3.4 Channel 190: 4GHz –10GHz

Spurious emission limit –13dBm

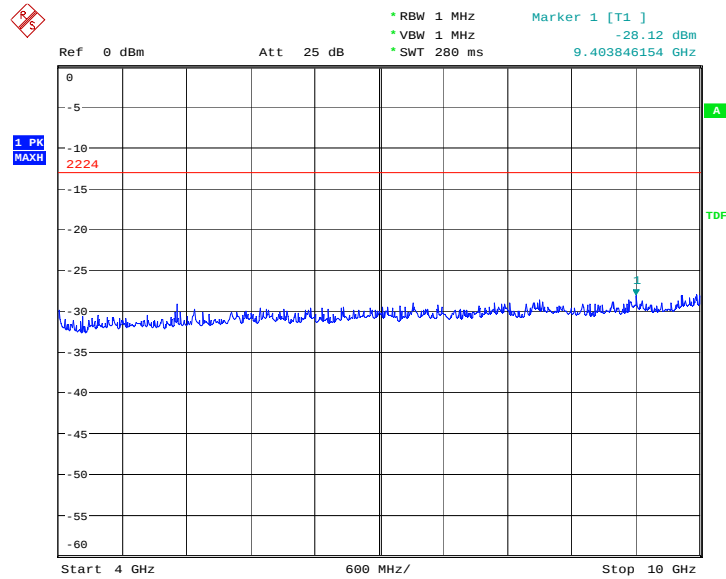


Date: 11.MAR.2009 06:09:58

#### A.8.3.5 Channel 251: 30MHz – 4GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

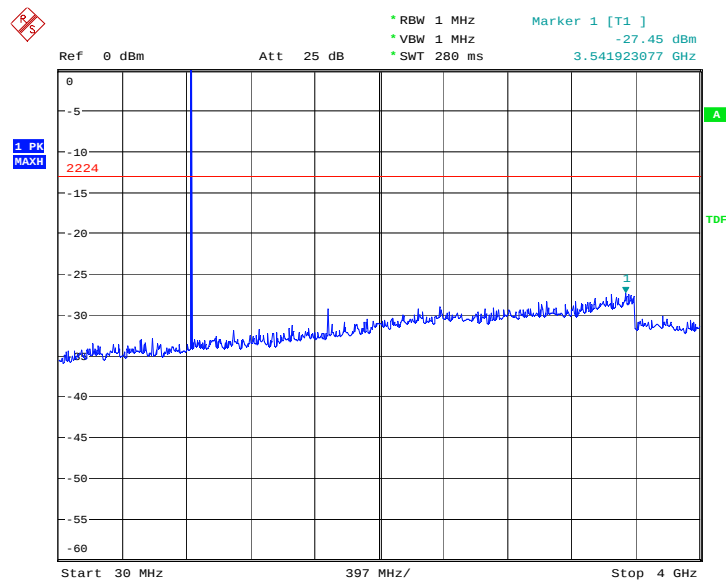

Date: 11.MAR.2009 06:10:21

### A.8.3.6 Channel 251: 4GHz – 10GHz


Spurious emission limit –13dBm.

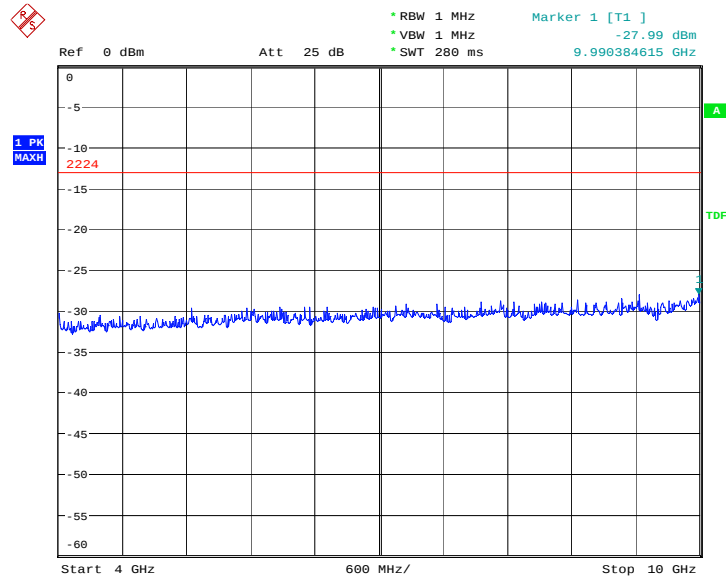

Date: 11.MAR.2009 06:10:38

### A.8.3.7 Idle mode: 30MHz – 4GHz


Spurious emission limit –13dBm.

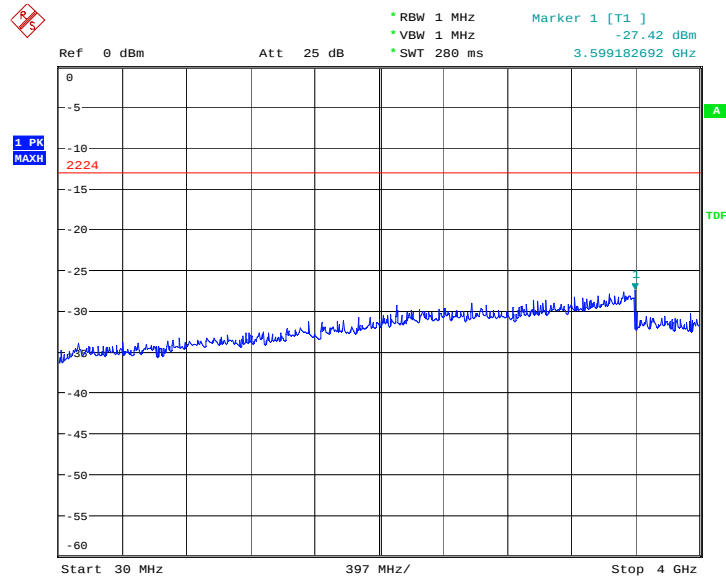

Date: 11.MAR.2009 06:10:54

### A.8.3.8 Idle mode: 4GHz – 10GHz

Spurious emission limit –13dBm.

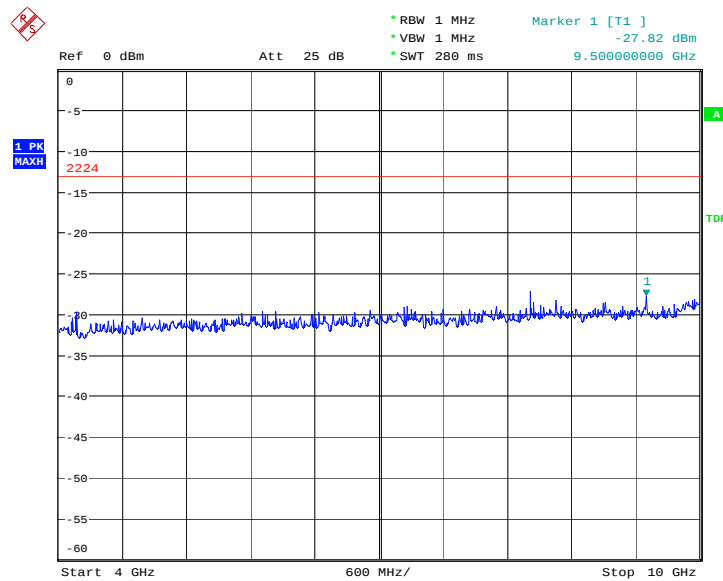

Date: 11.MAR.2009 06:11:11


# PCS1900

| Harmonic        | Tx ch. 512<br>Freq.<br>(MHz) | Level<br>(dBm) | Tx ch. 661<br>Freq.<br>(MHz) | Level<br>(dBm) | Tx ch. 810<br>Freq.<br>(MHz) | Level<br>(dBm) |
|-----------------|------------------------------|----------------|------------------------------|----------------|------------------------------|----------------|
| 2               | 3700.4                       | nf             | 3760                         | nf             | 3819.6                       | nf             |
| 3               | 5550.6                       | nf             | 5640                         | nf             | 5729.4                       | nf             |
| 4               | 7400.8                       | nf             | 7520                         | nf             | 7639.2                       | nf             |
| 5               | 9251.0                       | nf             | 9400                         | nf             | 9549.0                       | nf             |
| 6               | 11101.2                      | nf             | 11280                        | nf             | 11458.8                      | nf             |
| 7               | 12951.4                      | nf             | 13160                        | nf             | 13368.6                      | nf             |
| 8               | 14801.6                      | nf             | 15040                        | nf             | 15278.4                      | nf             |
| 9               | 16651.8                      | nf             | 16920                        | nf             | 17188.2                      | nf             |
| 10              | 18502.0                      | nf             | 18800                        | nf             | 19098.0                      | nf             |
| nf: Noise floor |                              |                |                              |                |                              |                |

## A. 8.3.9 Channel 512: 30MHz – 4GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

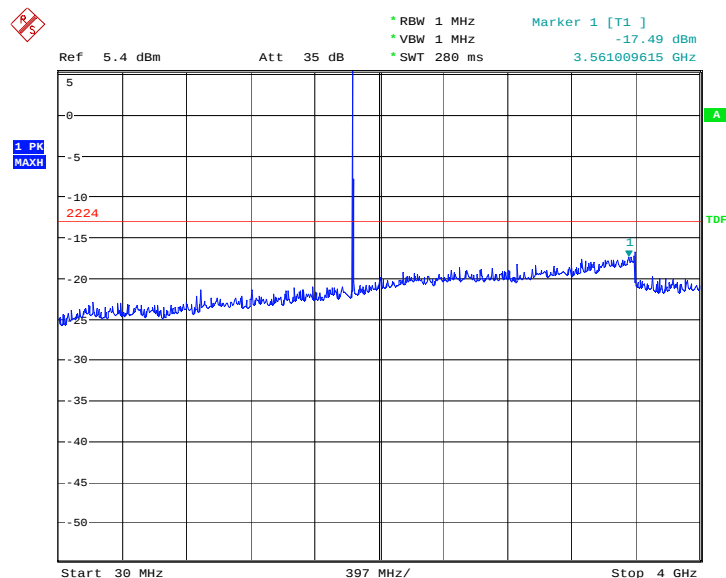

Date: 11.MAR.2009 05:37:56

### A. 8.3.10 Channel 512: 4GHz – 20GHz

Spurious emission limit –13dBm.

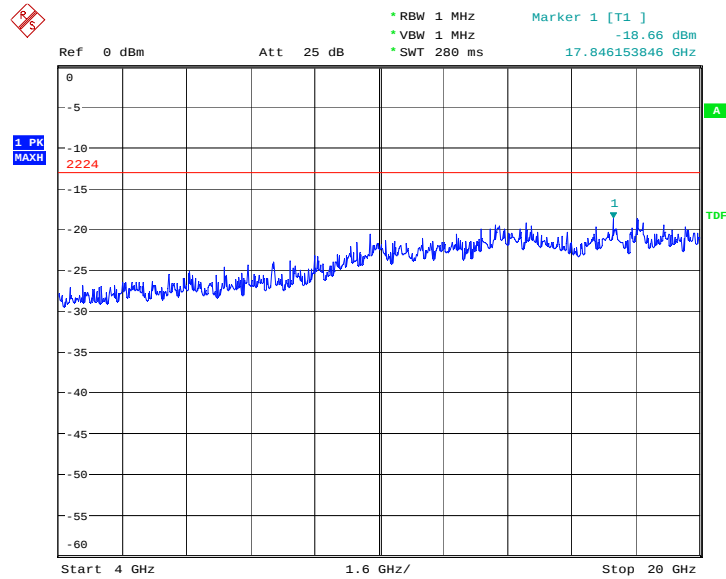


Date: 11.MAR.2009 05:38:27

### A. 8.3.11 Channel 661: 30MHz – 4GHz

Spurious emission limit –13dBm


**NOTE: peak above the limit line is the carrier frequency.**

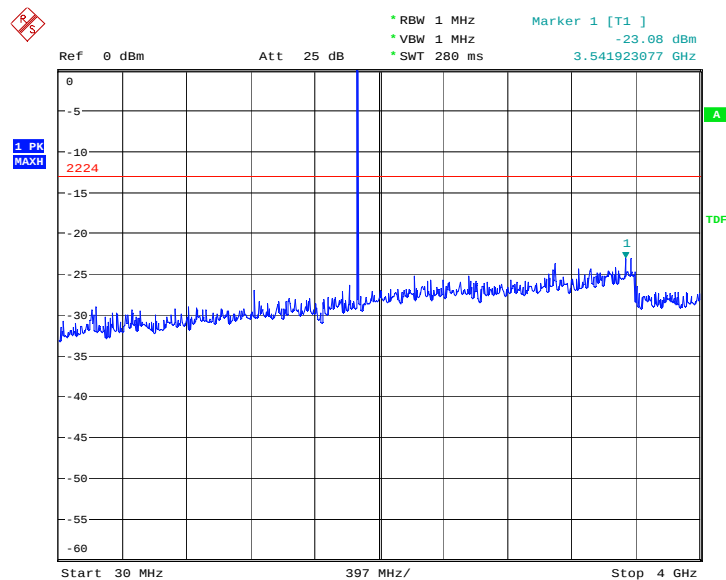

Date: 11.MAR.2009 05:39:27

### A. 8.3.12 Channel 661: 4GHz –20GHz

Spurious emission limit –13dBm

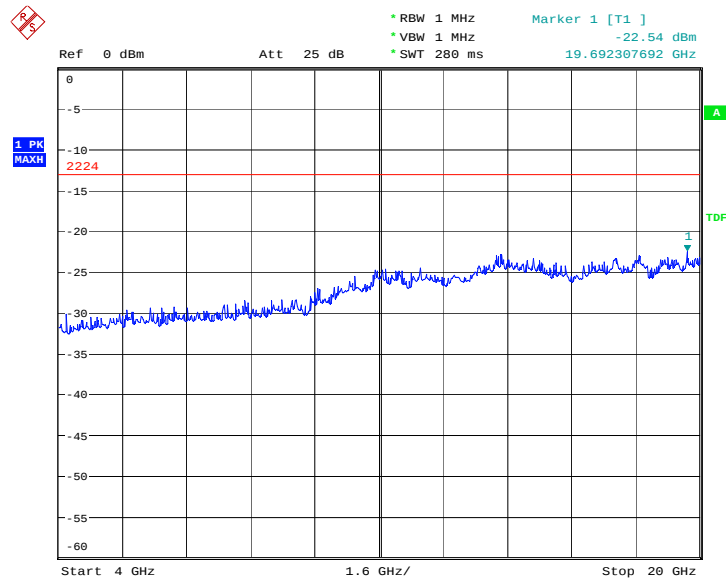


Date: 11.MAR.2009 05:39:45

### A. 8.3.13 Channel 810: 30MHz – 4GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

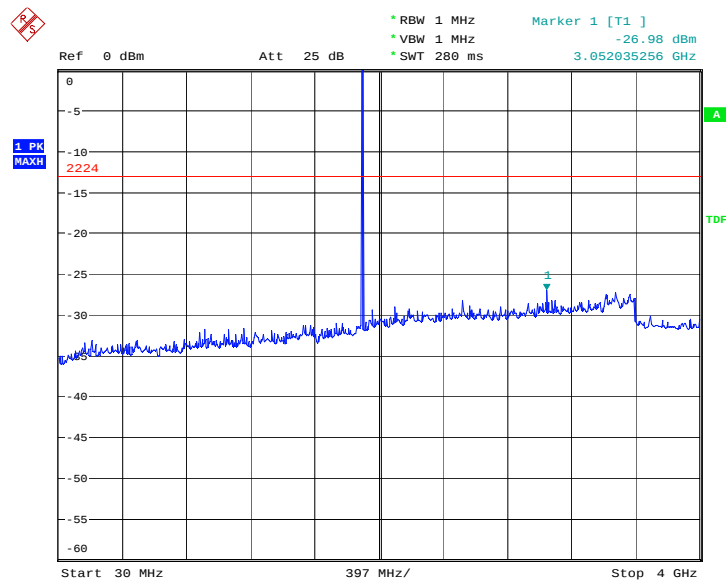

Date: 11.MAR.2009 05:40:16

### A. 8.3.14 Channel 810: 4GHz – 20GHz


Spurious emission limit –13dBm.

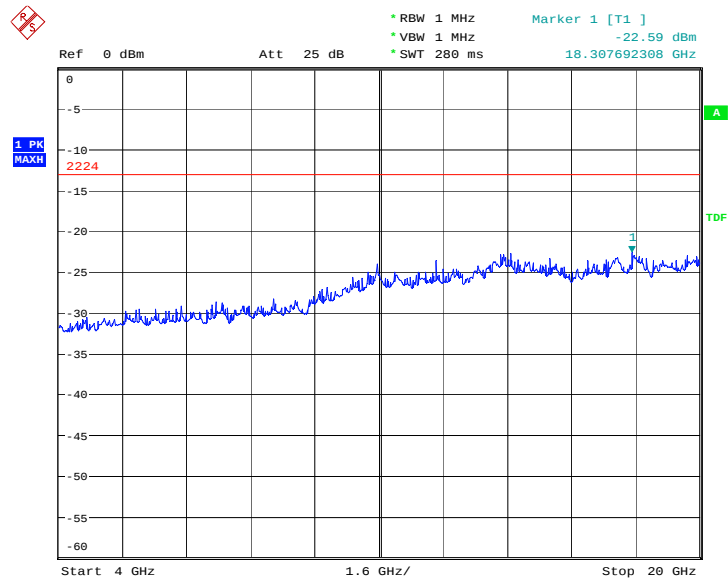

Date: 11.MAR.2009 05:40:37

### A. 8.3.15 Idle mode: 30MHz – 4GHz


Spurious emission limit –13dBm.

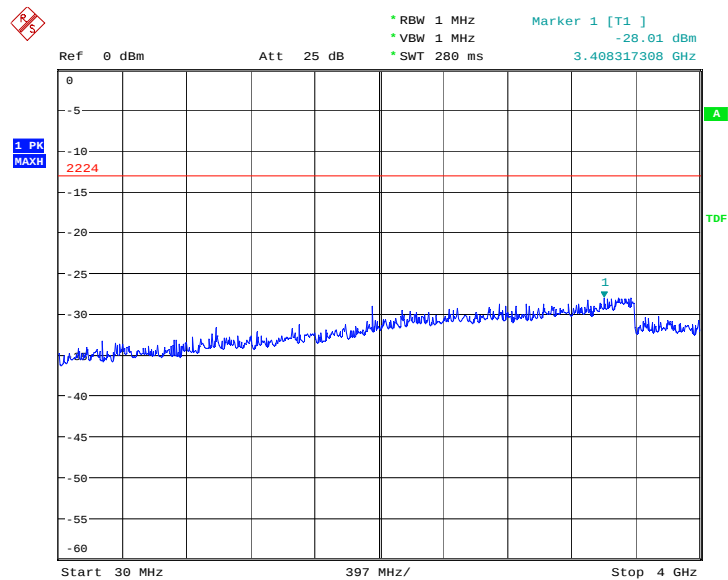

Date: 11.MAR.2009 05:41:08

### A. 8.3.16 Idle mode: 4GHz – 20GHz

Spurious emission limit -13dBm.

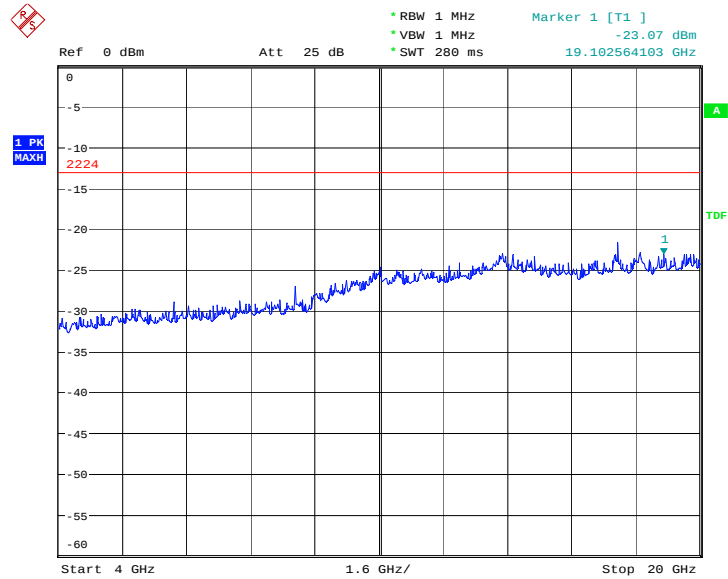

Date: 11.MAR.2009 05:41:26

\*\*\*END OF REPORT\*\*\*