



TEST REPORT

Report No.: SRTC2011-H024-E0075

Product Name: GSM Wireless Phone

Product Model: ZTE WP650

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: FCC Part 24E, Part 22H, Part 2

(October 1, 2009 edition)

FCC ID: Q78-WP650

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details	3
1.4 Manufacturer's details.....	3
1.5 Application details	4
1.6 Reference specification.....	4
1.7 Information of EUT	4
1.7.1 General information.....	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details.....	5
2. Test information	6
2.1 Summary of the test results.....	6
2.2 Test result.....	7
2.2.1 GSM850	7
2.2.1.1 RF Power Output-FCC Part2.1046.....	7
2.2.1.2 Effective Radiated Power-FCC Part22.913(a).....	8
2.2.1.3 Occupied Bandwidth-FCC Part2.1049.....	10
2.2.1.4 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917(a)	13
2.2.1.5 Band Edges Compliance-FCC Part2.1051/22.917(a)	16
2.2.1.6 Frequency Stability-FCC Part2.1055/Part22.355	18
2.2.1.7 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)	20
2.2.2 PCS1900.....	23
2.2.2.1 RF Power Output-FCC Part2.1046.....	23
2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232(c).....	24
2.2.2.3 Occupied Bandwidth-FCC Part2.1049.....	26
2.2.2.4 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238(a)	29
2.2.2.5 Band Edges Compliance-FCC Part2.1051/24.238(a)	32
2.2.2.6 Frequency Stability-FCC Part2.1055/Part24.235	34
2.2.2.7 Radiated Spurious Emissions-FCC Part2.1053/24.238(a)	36
2.3. List of test equipments	39
Appendix	40

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, 518057
City: Shenzhen
Country or Region: P.R.China
Grantee Code: Q78
Contacted person: Min Zhang
Tel: +86-021-68897541
Fax: +86-021-50801070
Email: zhang.min13@zte.com.cn

1.4 Manufacturer's details

Company: ZTE Corporation
Address: Zhongxing Bldg, Hi-Tech Park, NanShan District, 518057
City: Shenzhen
Country or Region: P.R.China
Contacted person: Li Dezi
Tel: +86-021-68895196
Fax: +86-021-50801070
Email: li.dezi@zte.com.cn

1.5 Application details

Date of reception of test sample: 2nd Nov 2011

Date of test: 3rd Nov 2011 to 24th Nov 2011

1.6 Reference specification

FCC Part 24E, Part22H, Part 2 (October 1, 2009 edition)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM Wireless Phone
FCC ID	Q78-WP650
Frequency range	GSM850: Tx:824~849MHz Rx:869~894MHz PCS1900: Tx:1850~1910MHz Rx:1930~1990MHz
Rated output power	GSM850:33.0dBm PCS1900:30.0dBm
Modulation type	GMSK
Emission Designator	300KGXW
Duplex mode	FDD
Duplex spacing	GSM850:45MHz PCS1900:80MHz
Antenna type	Fixed Internal
Power Supply	Battery or charger
Rated Power Supply Voltage	3.6V
Extreme Temperature	Lowest: -30°C Highest: +50°C
Extreme Voltage	Minimum: 3.5V Maximum: 4.2V
HW Version	f87D
SW Version	HX_SPB_FM_WP650PV1.0.0B01

1.7.2 EUT details

Name	Model	IMEI
GSM Wireless Phone	ZTE WP650	355570042147820

1.7.3 Auxiliary equipment details


Equipment	Charger
Manufacturer	ZTE
Model Number	ZWS003AIU0500070
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	ZTE
Model Number	Ni3607T30P3S473211
Capacity	700mAh
Rated Voltage	3.7V d.c.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)/24.232(c)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Spurious Emissions at antenna terminals	2.1051/22.917(a)/24.238(a)	Pass
5	Band Edges Compliance	2.1051/22.917(a)/24.238(a)	Pass
6	Frequency Stability	2.1055/24.235/22.355	Pass
7	Radiated Spurious Emissions	2.1053/22.917(a)/24.238(a)	Pass

<p>This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab</p> 	<p>Checked by: Mr. Wang Junfeng Deputy director of the test lab</p> 
<p>Tested by: Mr. Li Boyu Test engineer</p> 	<p>Issued date:</p> <p>2011.11.29</p>

2.2 Test result


2.2.1 GSM850

2.2.1.1 RF Power Output-FCC Part2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

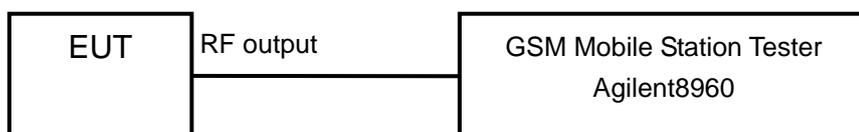

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits	$\leq 33\text{dBm}$

Test result:

GSM MODE:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.1
836.4	189	32.2
848.8	251	32.2

2.2.1.2 Effective Radiated Power-FCC Part22.913(a)


Ambient condition:

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test setup:

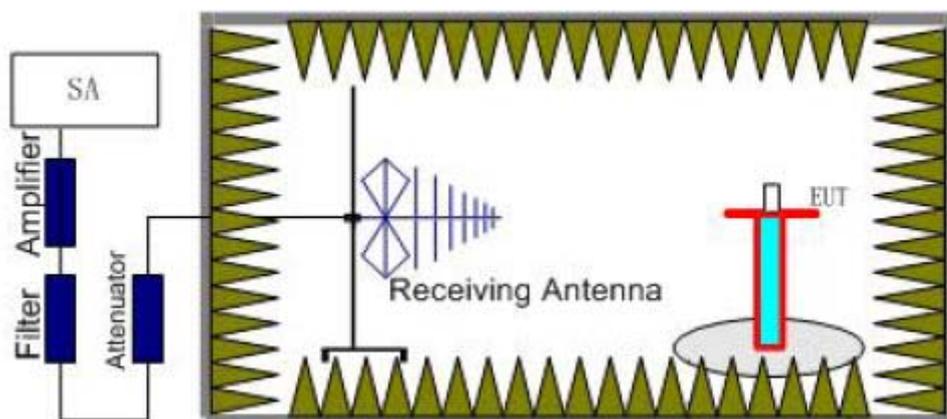

Step 1

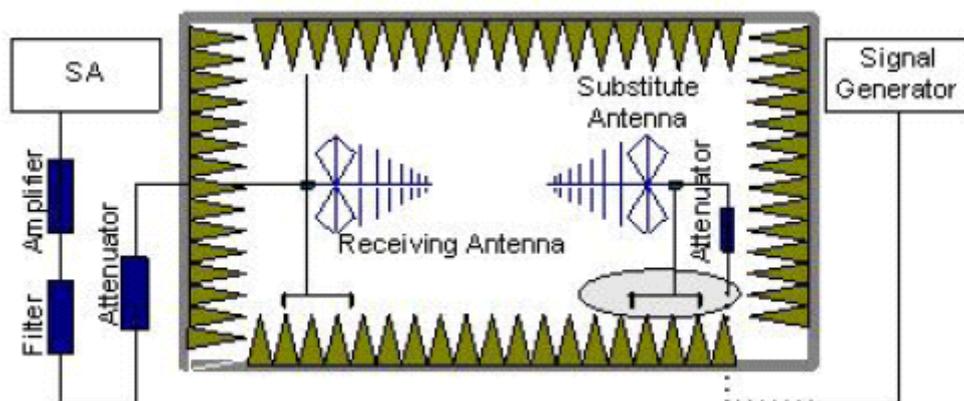

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A RMS detector is used and RBW is set to 3MHz. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits	$\leq 38.5\text{dBm}$
--------	-----------------------

Test result:

GSM MODE:


Carrier frequency (MHz)	Channel No.	E.R.P. (dBm)
824.2	128	27.3
836.4	189	28.5
848.8	251	28.2

2.2.1.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

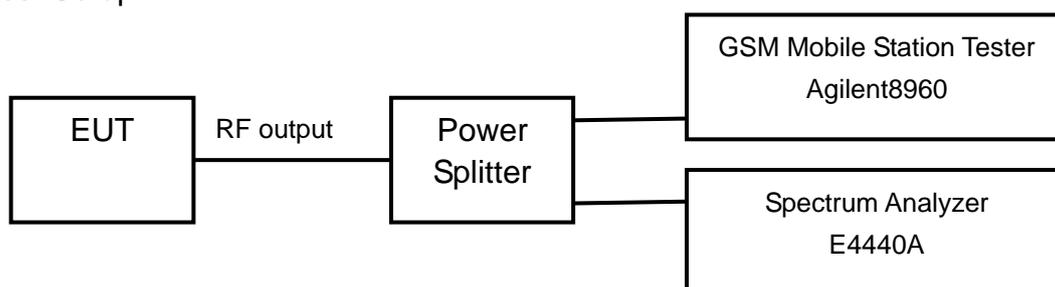

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)


Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


GSM MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	248.95
836.4	189	246.95
848.8	251	242.16


GSM MODE:

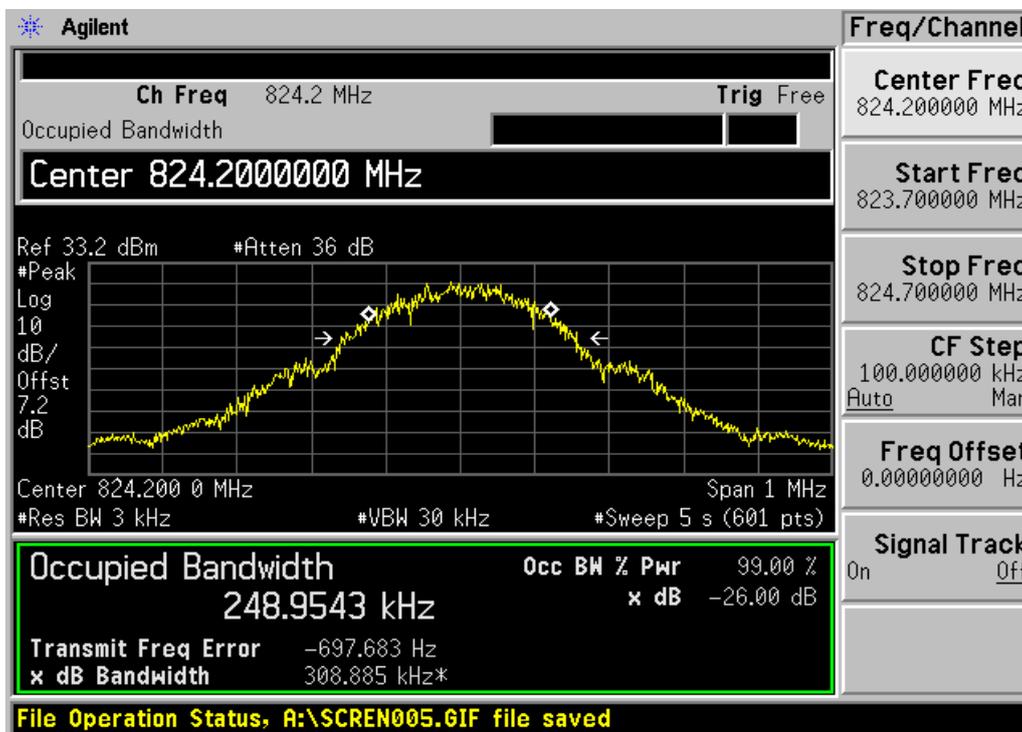

Channel 128

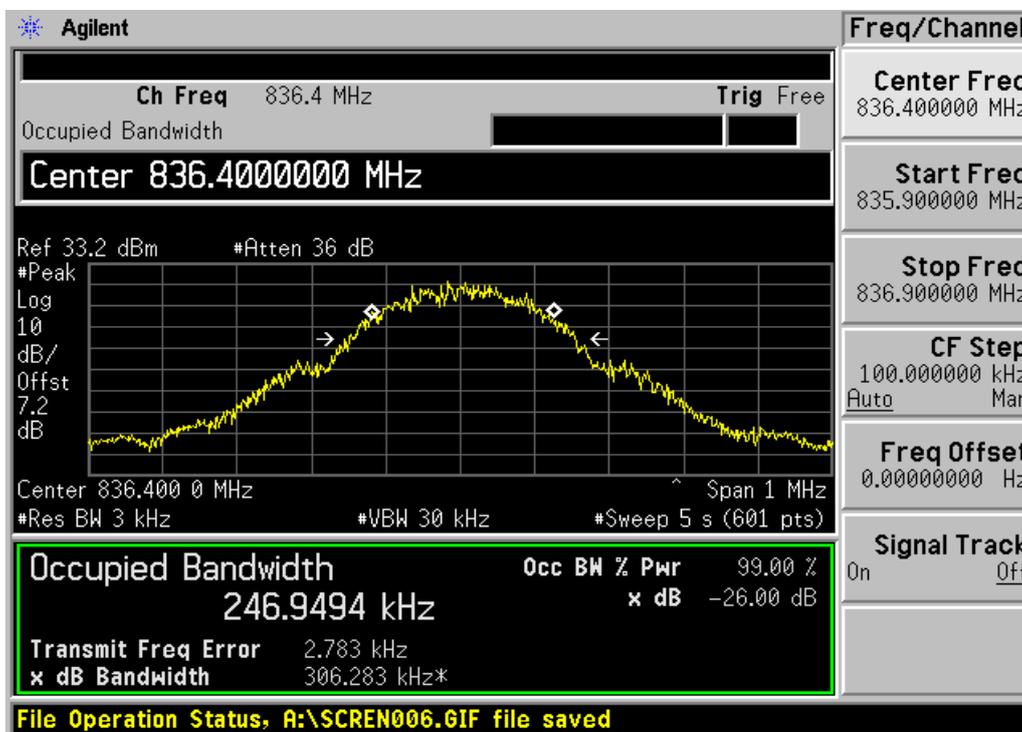

Channel 189

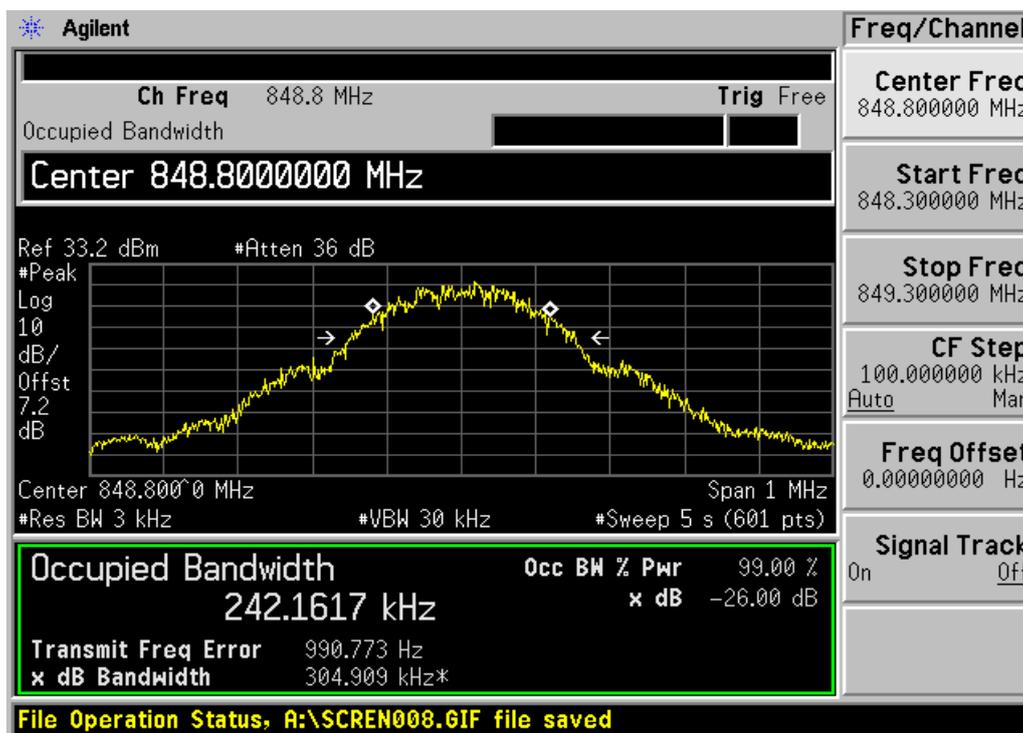


Channel 251

2.2.1.4 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

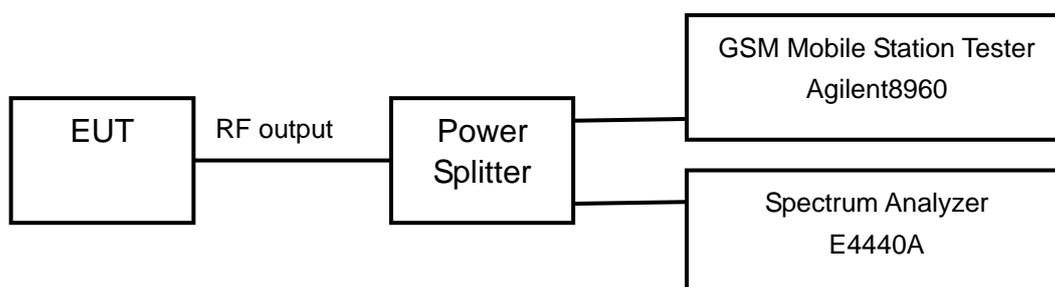

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No189 (middle channel of GSM850 band)

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM MODE:

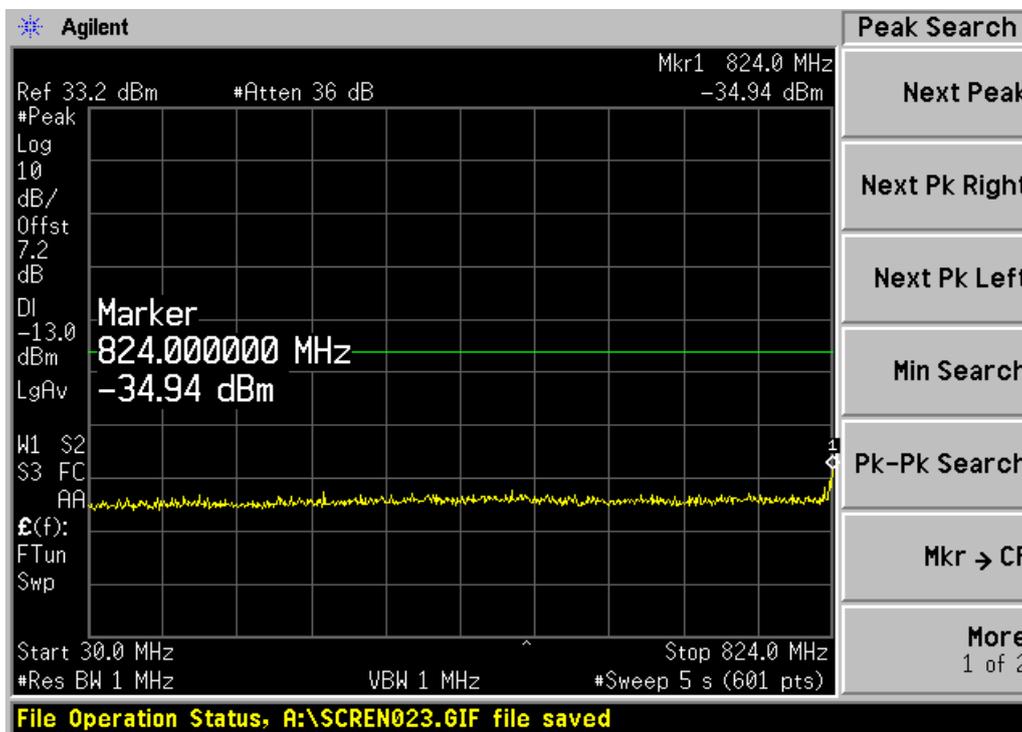


Channel 189, 30MHz~824MHz

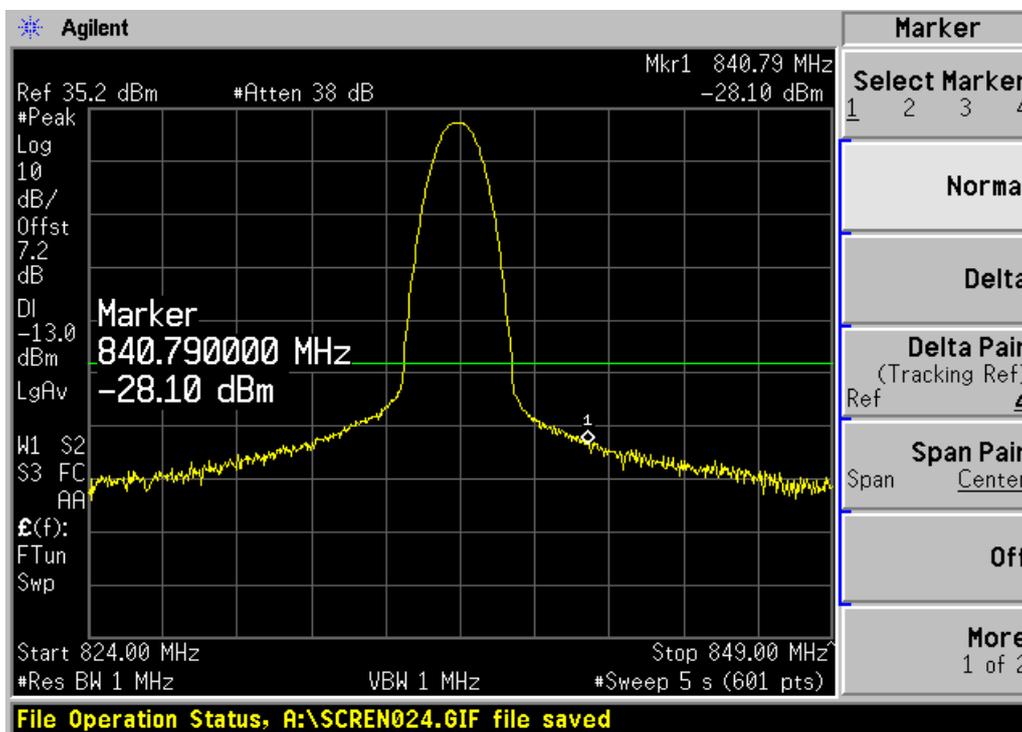

Channel 189, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

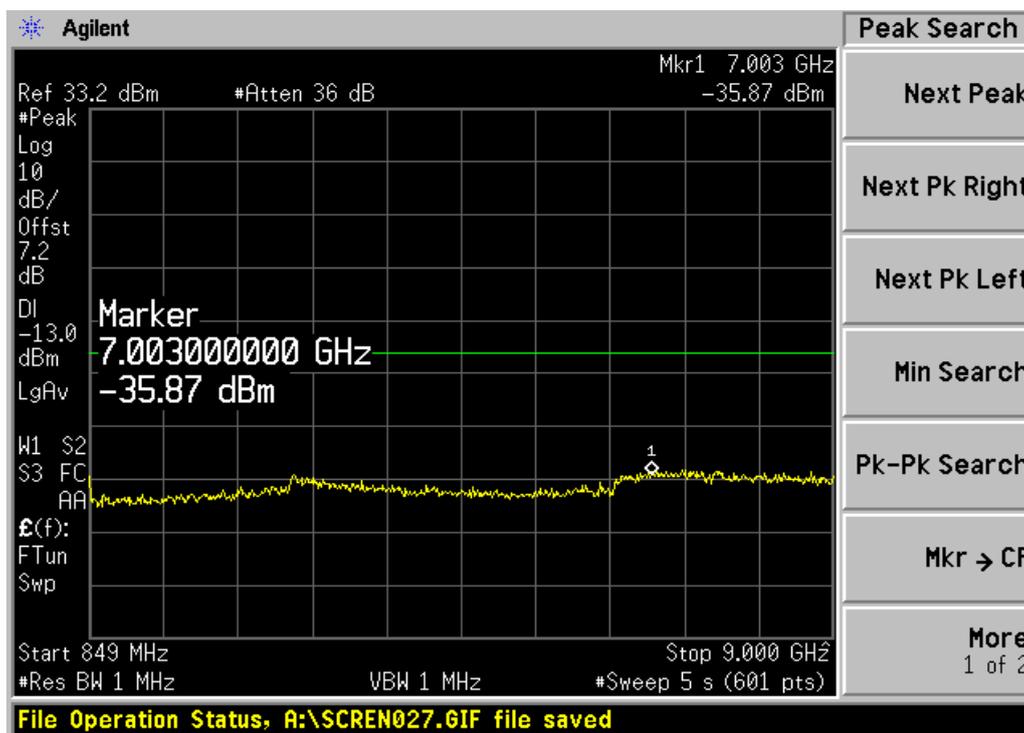


Channel 189, 849MHz~9GHz

2.2.1.5 Band Edges Compliance-FCC Part2.1051/22.917(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

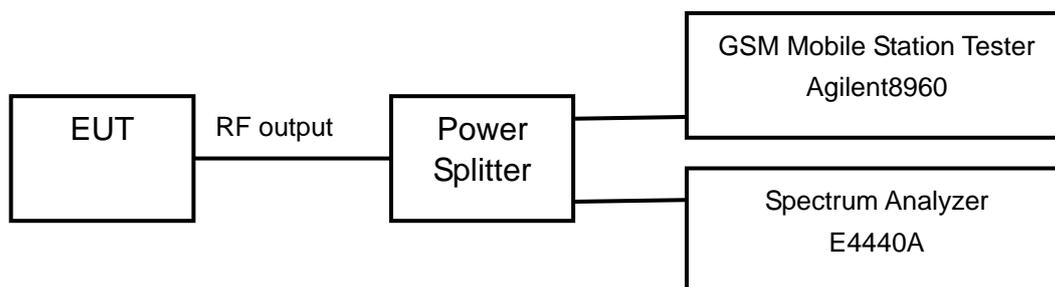

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to 3KHz on spectrum analyzer.


The measurement will be conducted at two channels No128 and No251 (Bottom and top channels of GSM850 band)

Limits	$\leq -13\text{dBm}$
--------	----------------------

Test result:

Refer to the following figures.

GSM MODE:

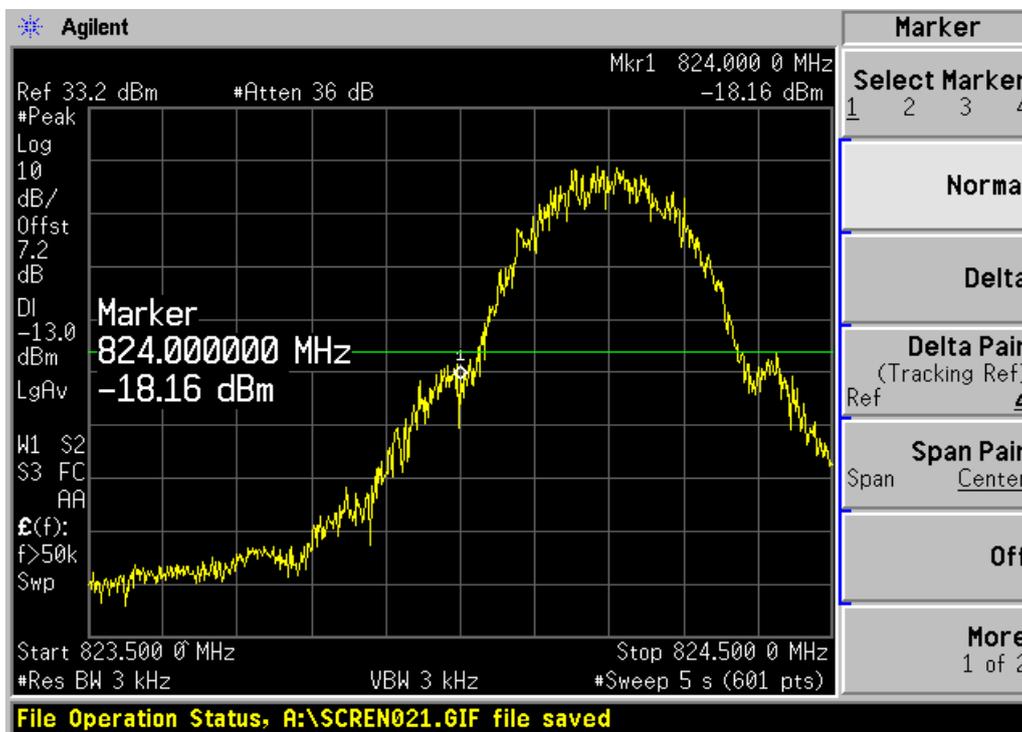

Channel 128




Channel 251

2.2.1.6 Frequency Stability-FCC Part2.1055/Part22.355

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

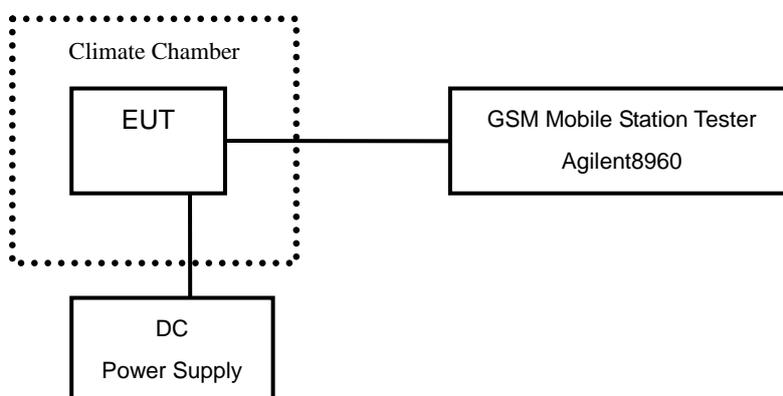

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50° C in 10° C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2 V. The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band).

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355.

Test result:
 GSM MODE:

Temperature(° C)	Test Result (ppm)@3.6V		
	Channel 128	Channel 189	Channel 251
-30	0.008	0.013	0.006
-20	0.012	0.010	0.007
-10	0.004	0.002	0.005
0	0.012	0.007	0.019
+10	0.010	0.005	0.013
+20	0.018	0.009	0.012
+30	0.011	0.008	0.015
+40	0.012	0.003	0.006
+50	0.009	0.004	0.008


Voltage (V)	Test Result (ppm)@20°C		
	Channel 128	Channel 189	Channel 251
3.5	0.008	0.003	0.004
4.2	0.006	0.020	0.009

2.2.1.7 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)


Ambient condition

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test Setup:

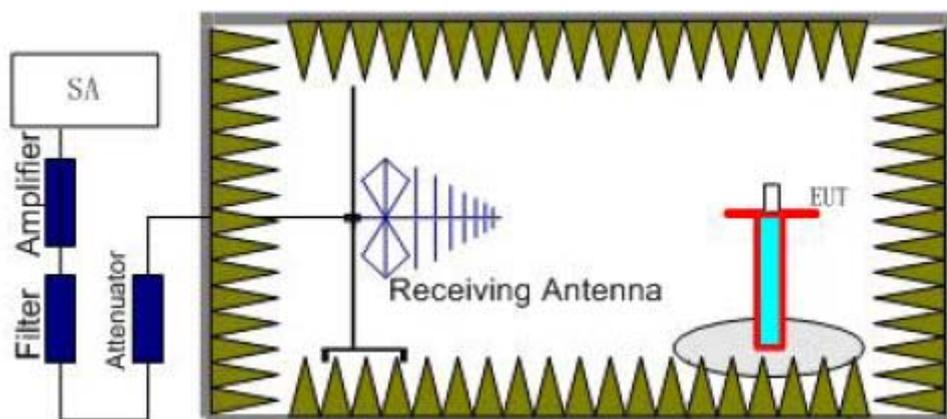

Step 1

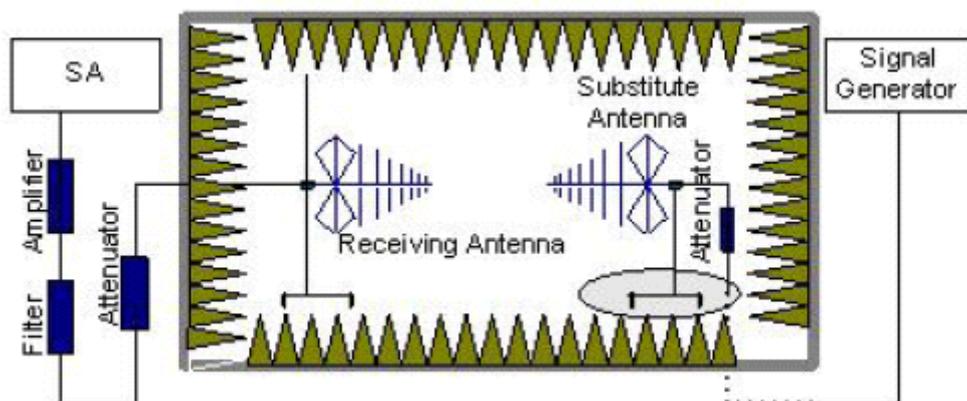

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

Calculation procedure:

The data of cable loss, antenna gain and air loss has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss, antenna gain and air loss. The basic equation with a sample calculation is as followed:

$$P = P_R + L_C + L_A - G$$

Where

P: Power of the Radiated Spurious Emissions (dBm)

P_R: reading of the receiver (dBm)

L_C: Cable Lose (dB)

L_A: Air loss (dB)

G: Antenna Gain (dBi)


Assumed the reading of the receiver is -60dBm. A cable lose of 10dB, an air lose of 30dB and an antenna gain of 11dBi are added.

$$P = P_R + L_C + L_A - G = -60 + 10 + 30 - 11 = -31 \text{dBm}$$

The measurement will be conducted at one channel No189 (middle channels of GSM850 band)


Limits	≤ -13dBm
--------	----------

Test result:
 GSM MODE:

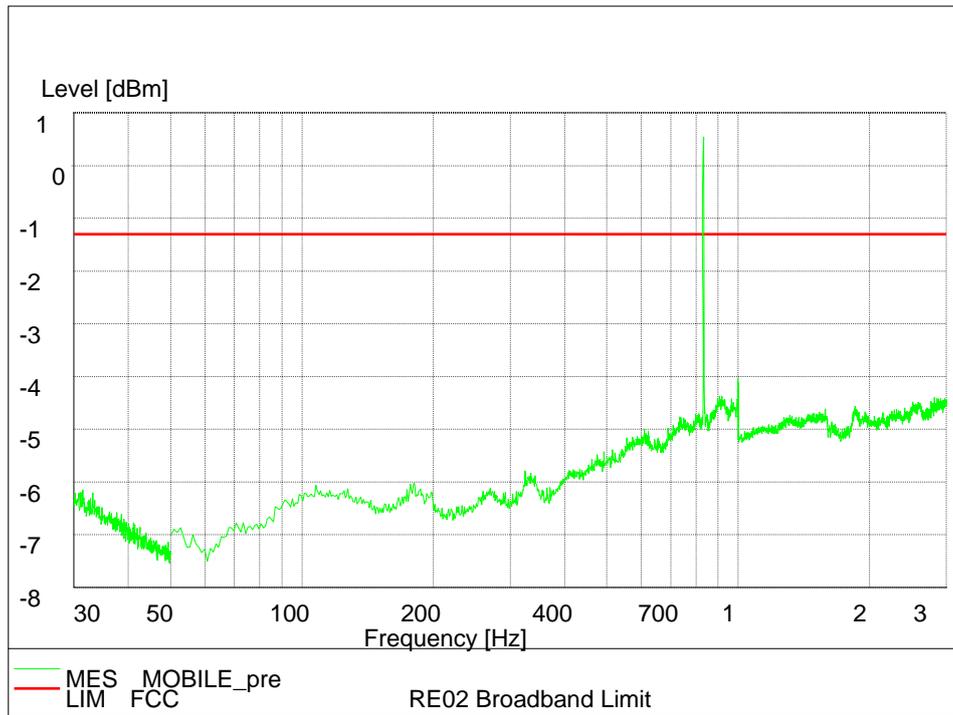

Channel 189, 30MHz~3GHz

Note: The signal beyond the limit is the base station simulator carrier.

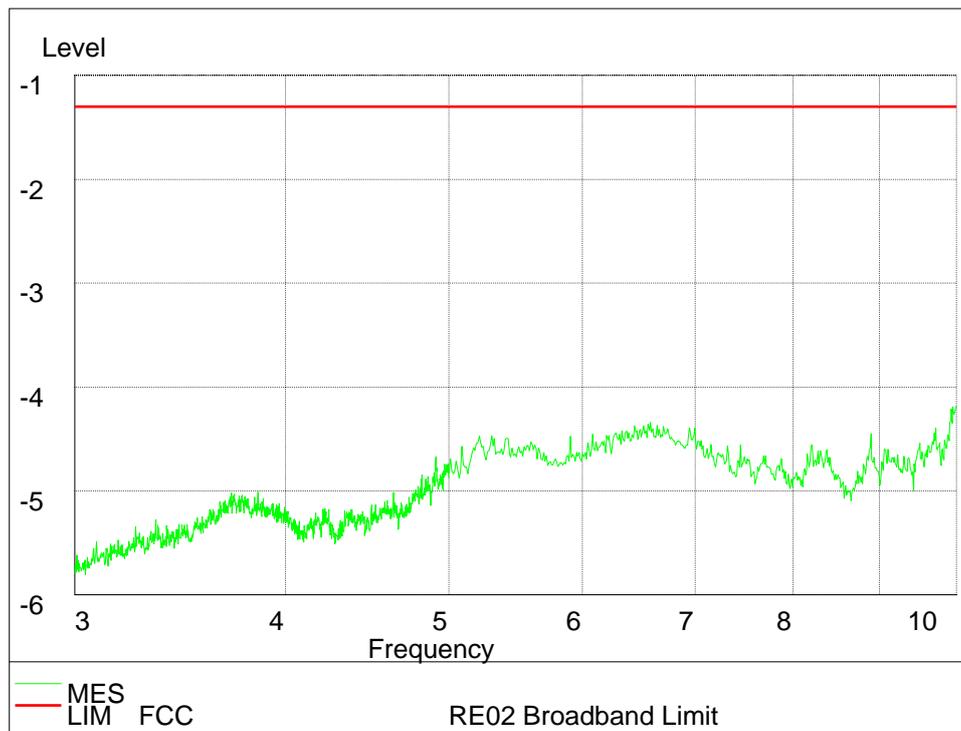

Channel 189, 3GHz~10GHz


2.2.2 PCS1900

2.2.2.1 RF Power Output-FCC Part2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

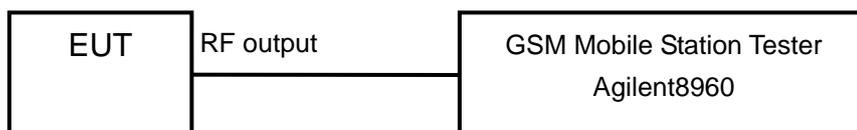

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits	≤ 30dBm

Test result:

GSM MODE:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.1
1880.0	661	29.2
1909.8	810	29.3

2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232(c)


Ambient condition:

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test setup:

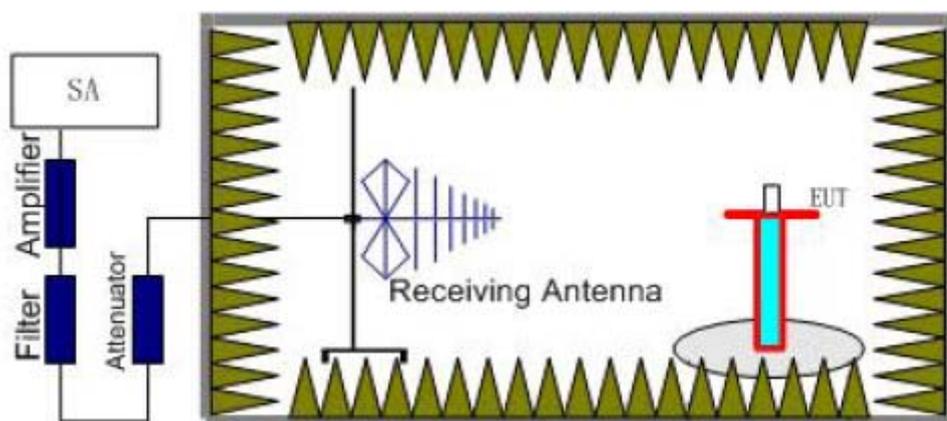

Step 1

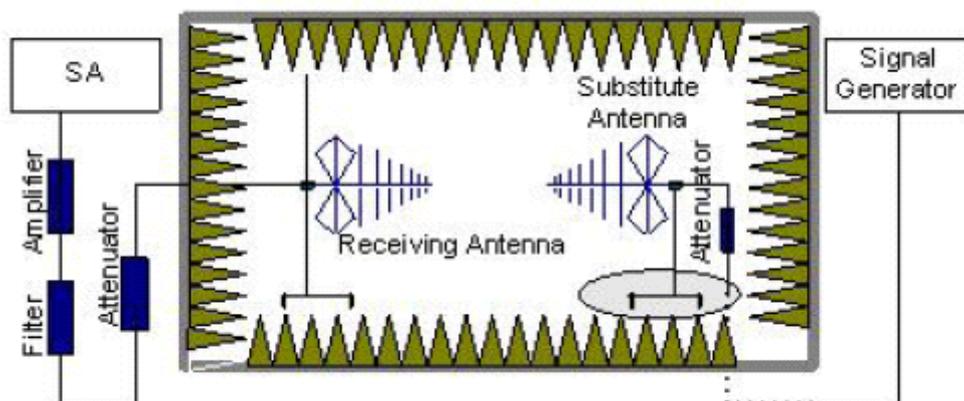

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and

varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A RMS detector is used and RBW is set to 3MHz. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits	$\leq 33\text{dBm}$
--------	---------------------

Test result:

GSM MODE:


Carrier frequency (MHz)	Channel No.	E.I.R.P. (dBm)
1850.2	512	26.4
1880.0	661	26.7
1909.8	810	27.1

2.2.2.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

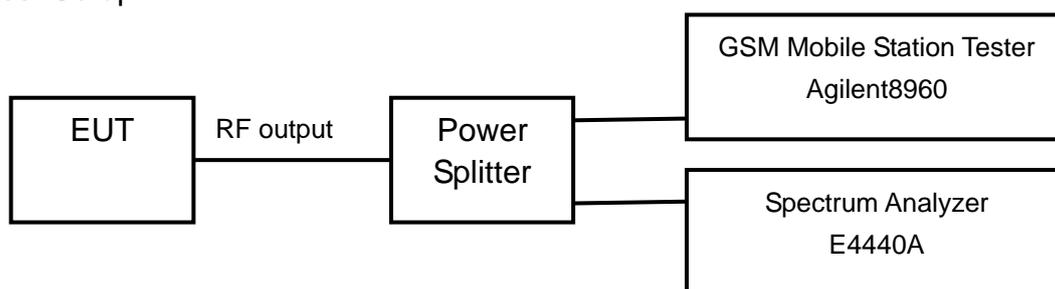

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)


Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


GSM MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	243.49
1880.0	661	243.11
1909.8	810	243.08


GSM MODE:

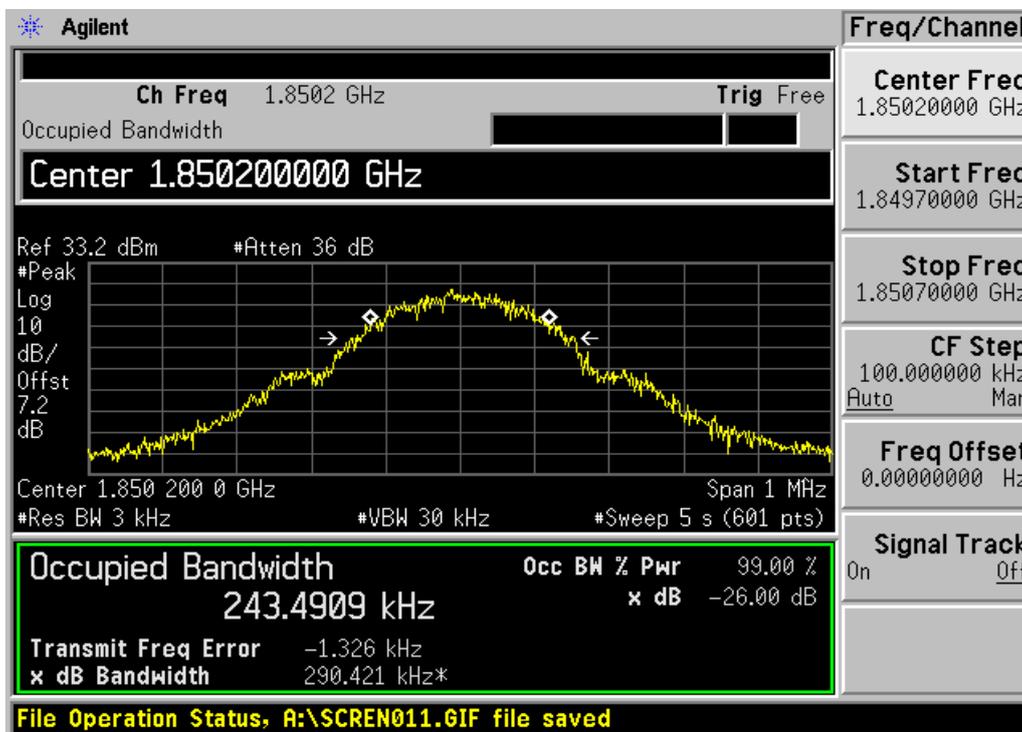

Channel 512

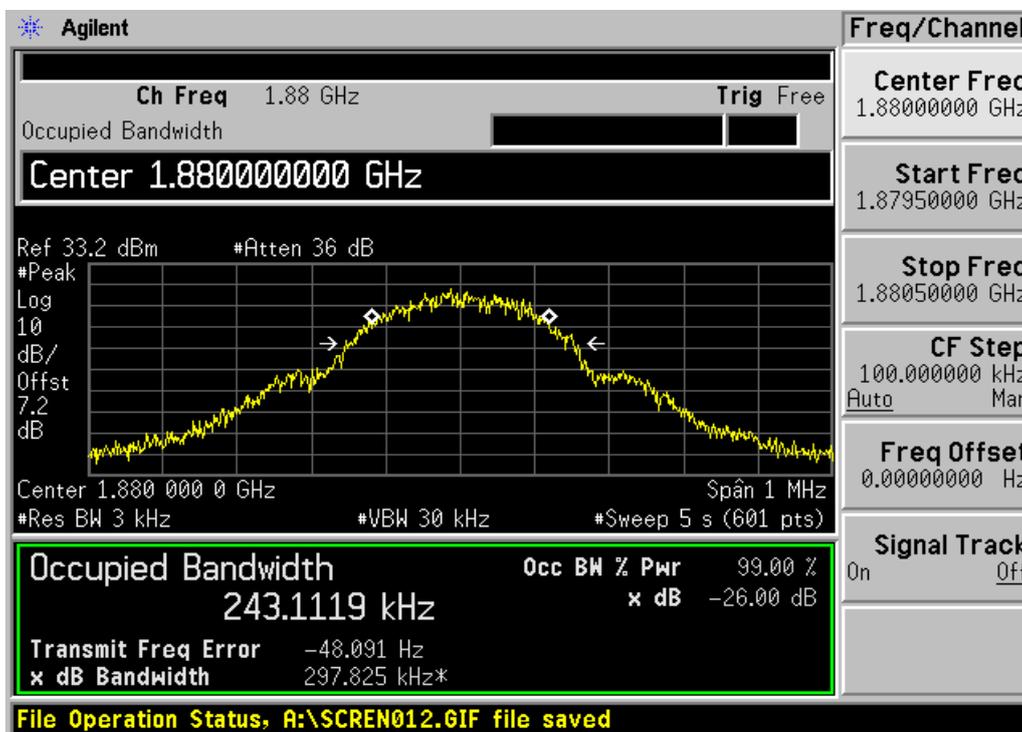

Channel 661

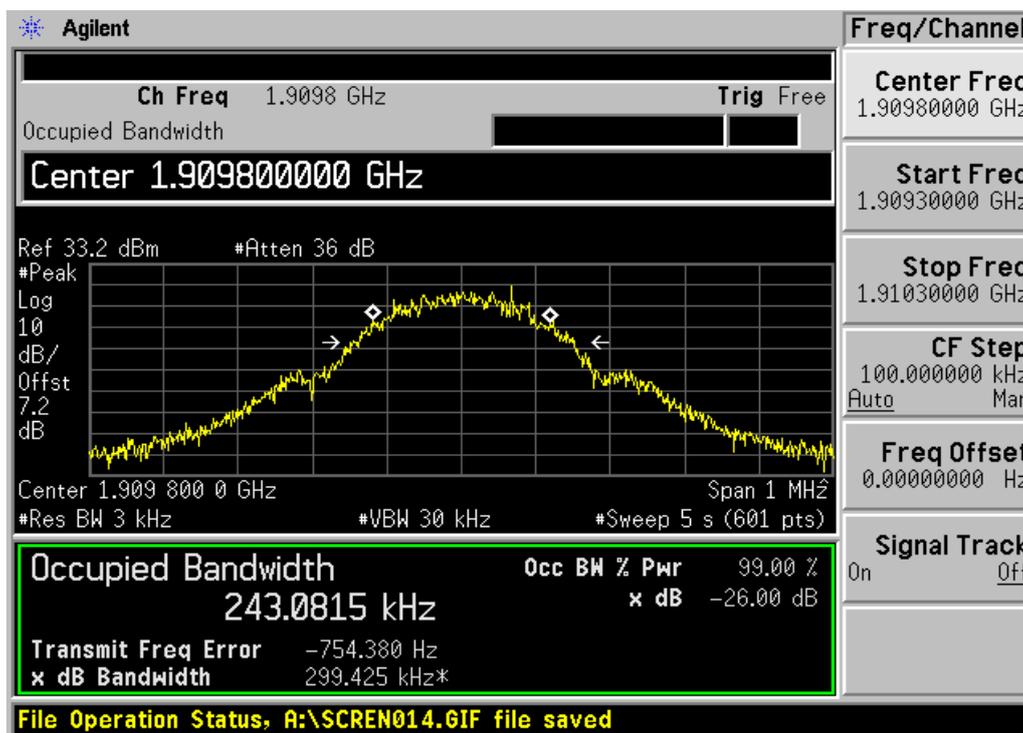


Channel 810

2.2.2.4 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

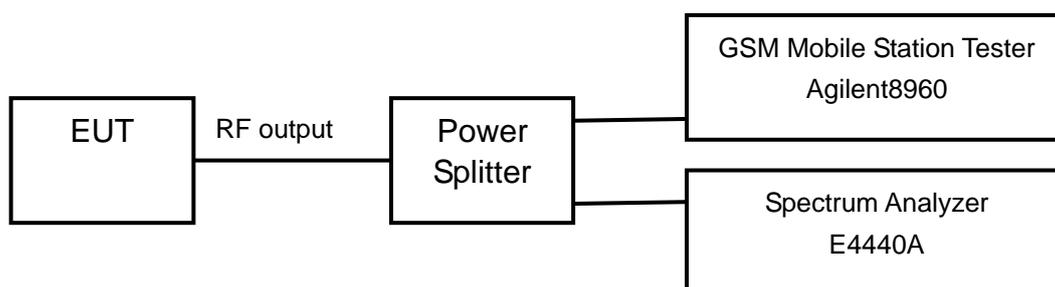

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No661 (middle channel of PCS1900 band)

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM MODE:

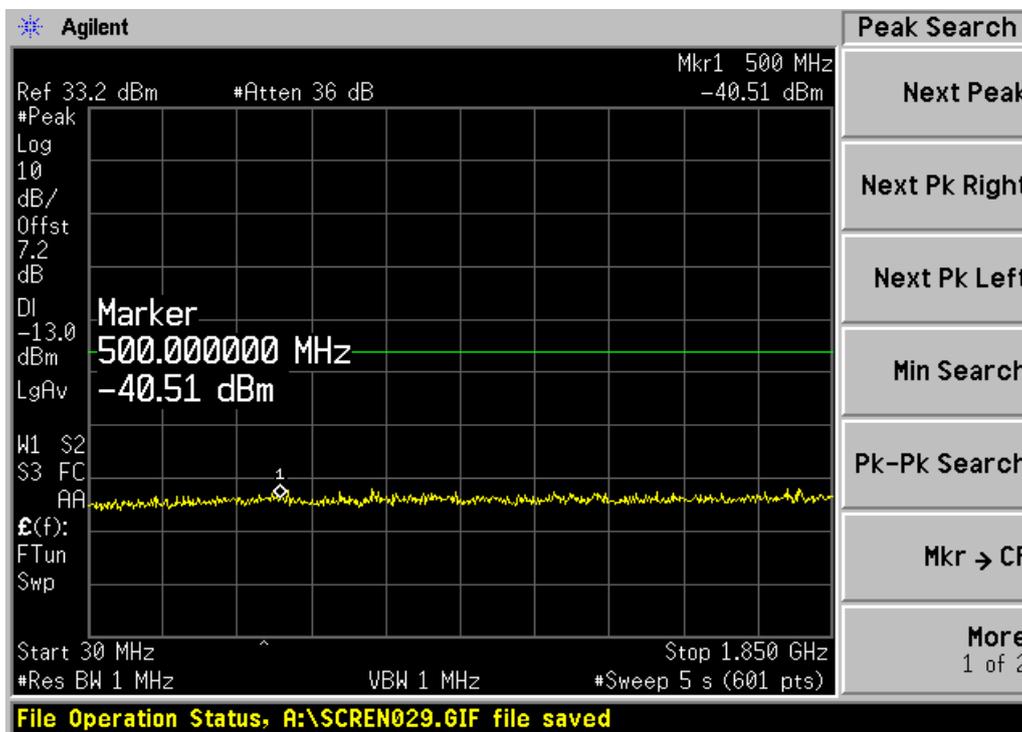


Channel 661, 30MHz~1850MHz

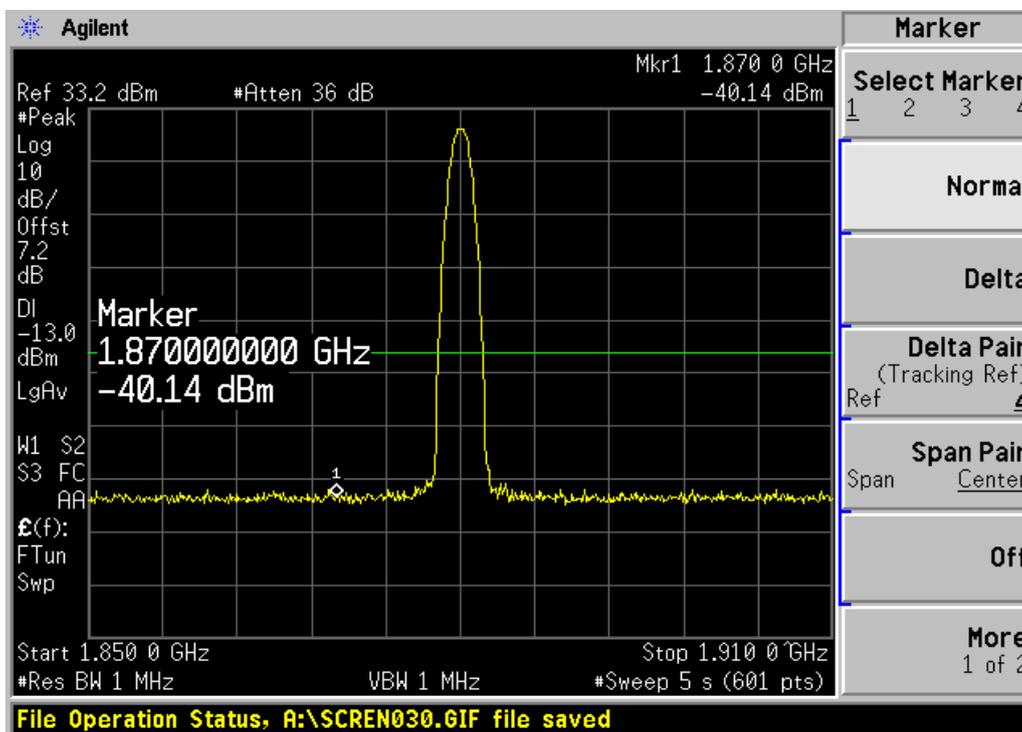

Channel 661, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.

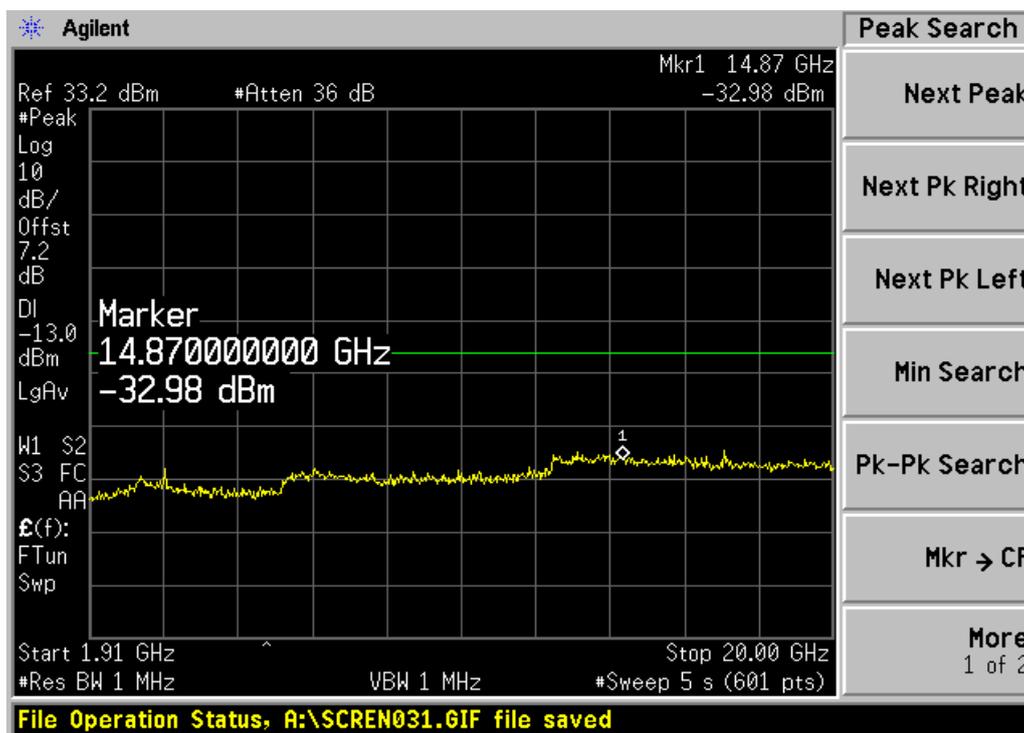


Channel 661, 1910MHz~20GHz

2.2.2.5 Band Edges Compliance-FCC Part2.1051/24.238(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

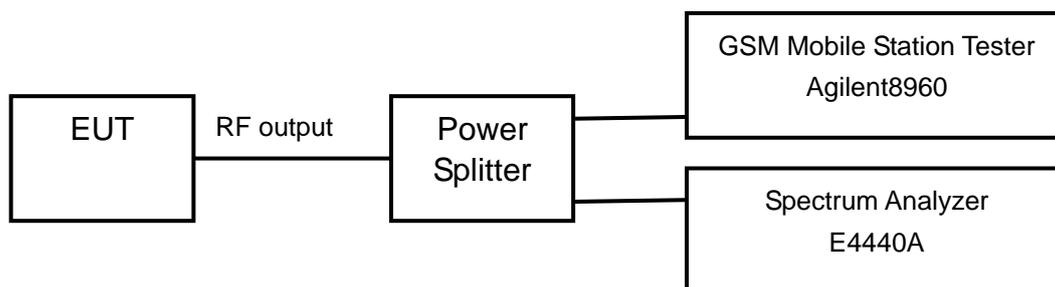

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to 3KHz on spectrum analyzer.


The measurement will be conducted at two channels No512 and No810 (Bottom and top channels of PCS1900 band)

Limits	$\leq -13\text{dBm}$
--------	----------------------


Test result:

Refer to the following figures.

GSM MODE:

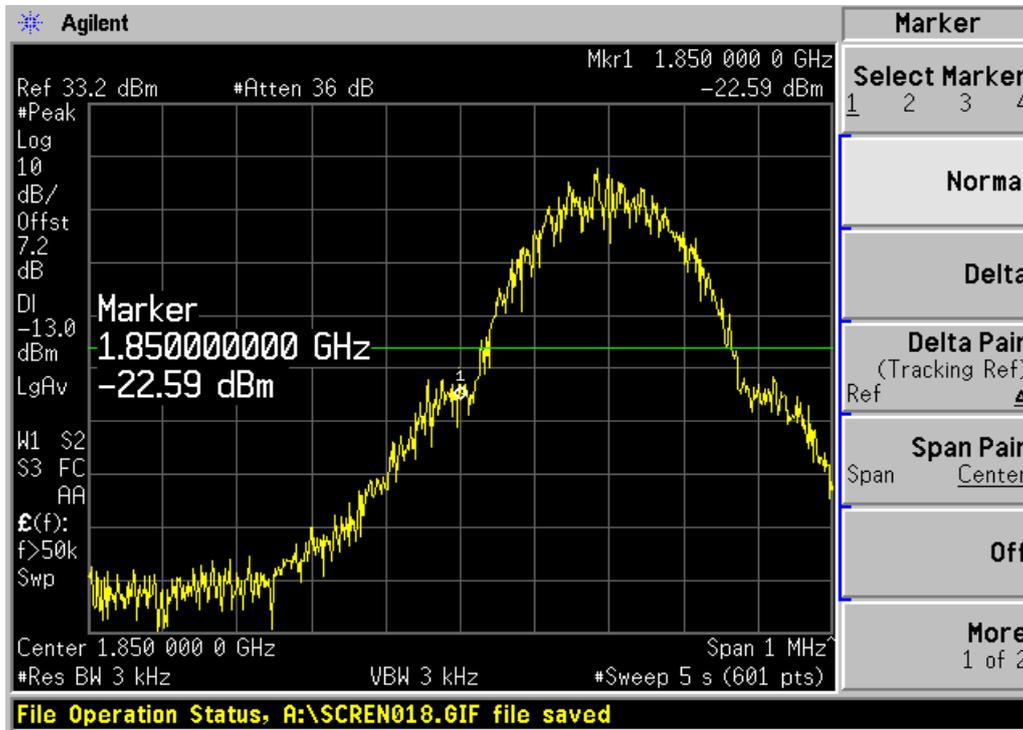

Channel 512

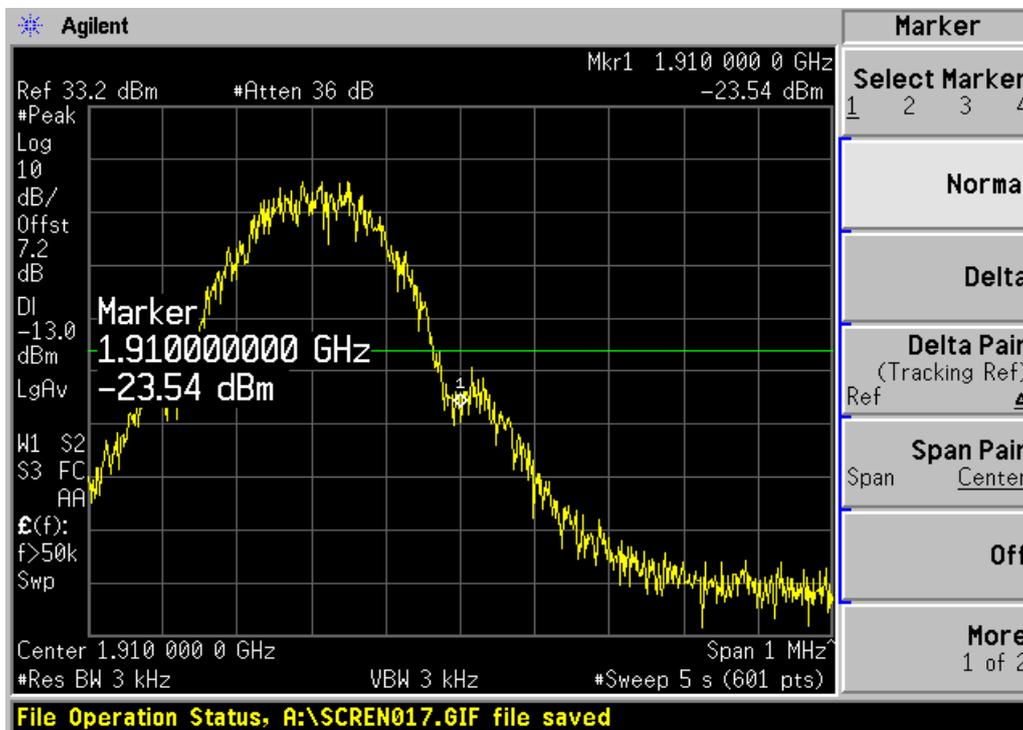


Channel 810

2.2.2.6 Frequency Stability-FCC Part2.1055/Part24.235

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

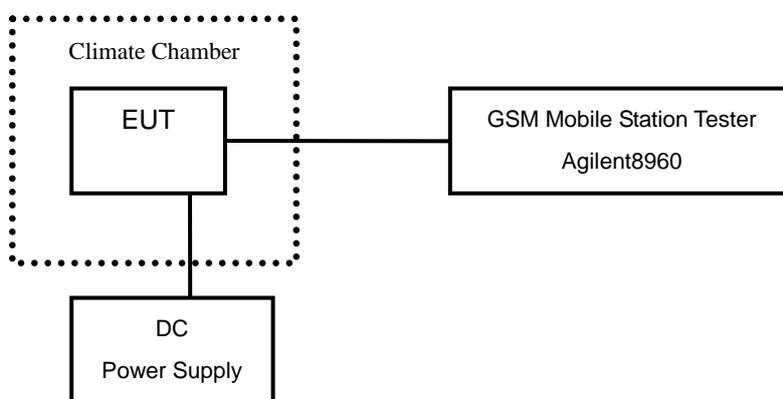

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50° C in 10° C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2 V. The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band).

Limits: No specific frequency stability requirements in part 2.1055 and part 24.235.

Test result:
 GSM MODE:

Temperature(° C)	Test Result (ppm)@3.6V		
	Channel 512	Channel 661	Channel 810
-30	0.009	0.003	0.003
-20	0.004	0.005	0.002
-10	0.006	0.003	0.002
0	0.005	0.006	0.003
+10	0.007	0.003	0.006
+20	0.005	0.003	0.004
+30	0.004	0.003	0.007
+40	0.004	0.004	0.004
+50	0.006	0.003	0.008


Voltage (V)	Test Result (ppm)@20° C		
	Channel 512	Channel 661	Channel 810
3.5	0.000	0.001	0.004
4.2	0.003	0.006	0.003

2.2.2.7 Radiated Spurious Emissions-FCC Part2.1053/24.238(a)


Ambient condition

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test Setup:

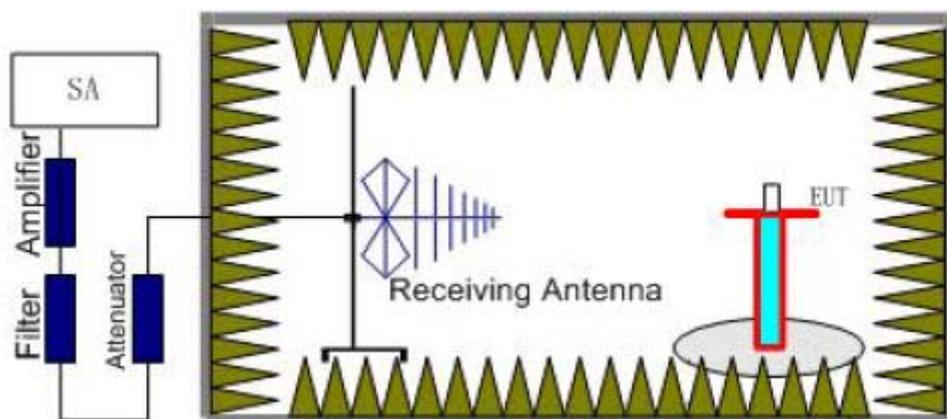

Step 1

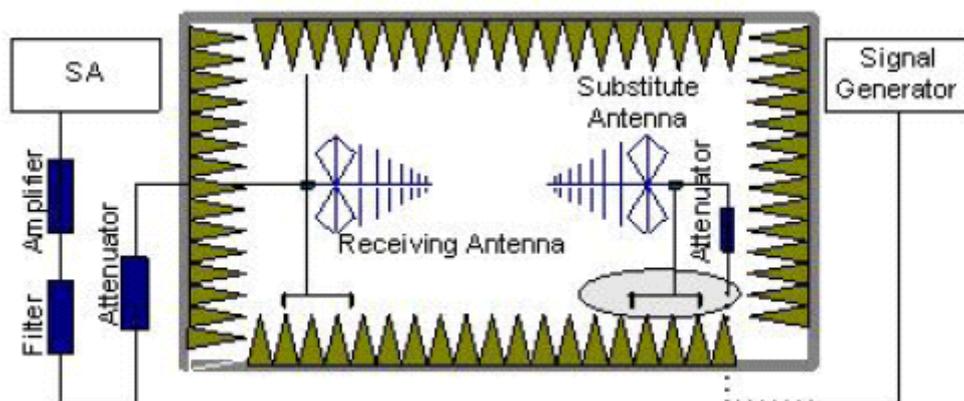

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

Calculation procedure:

The data of cable loss, antenna gain and air loss has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss, antenna gain and air loss. The basic equation with a sample calculation is as followed:

$$P = P_R + L_C + L_A - G$$

Where

P: Power of the Radiated Spurious Emissions (dBm)

P_R: reading of the receiver (dBm)

L_C: Cable Lose (dB)

L_A: Air loss (dB)

G: Antenna Gain (dBi)


Assumed the reading of the receiver is -60dBm. A cable lose of 10dB, an air lose of 30dB and an antenna gain of 11dBi are added.

$$P = P_R + L_C + L_A - G = -60 + 10 + 30 - 11 = -31 \text{dBm}$$

The measurement will be conducted at one channel No661 (middle channels of PCS1900 band).


Limits	≤ -13dBm
--------	----------

Test result:
 GSM MODE:

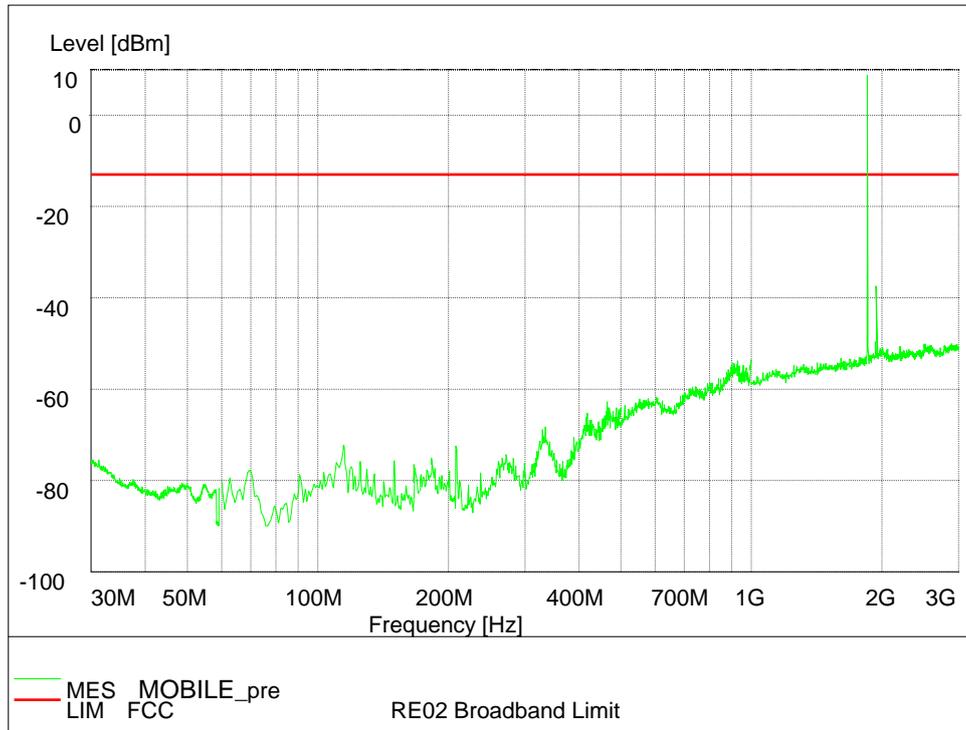

Channel 661, 30MHz~3GHz

Note: The signal beyond the limit is the base station simulator carrier.

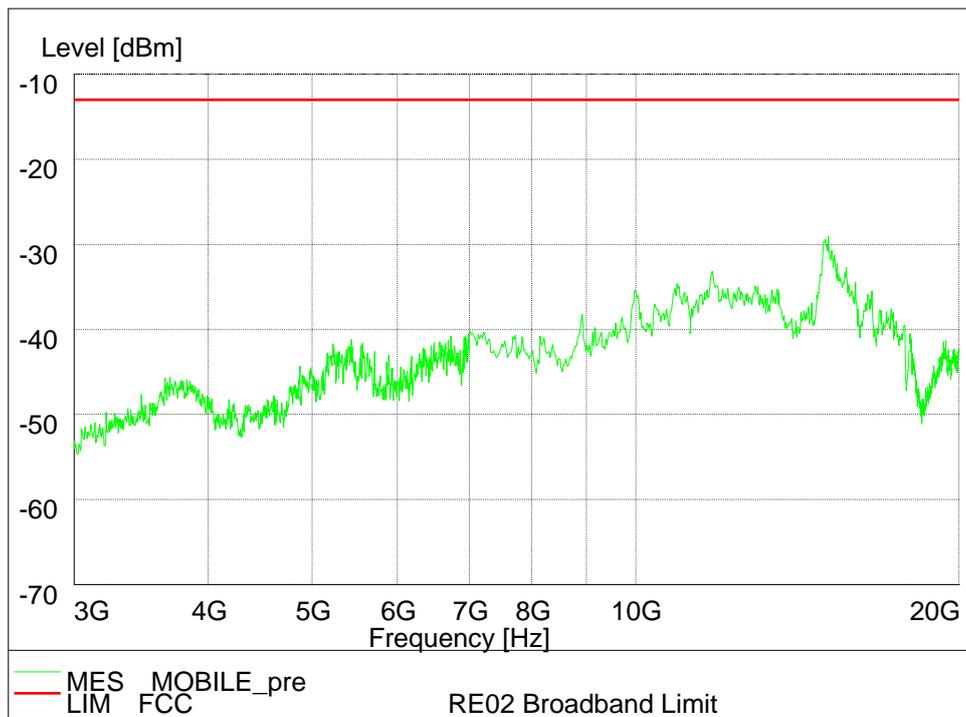

Channel 661, 3GHz~20GHz

2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date
1	E5515C(8960) Mobile Station Tester	Agilent	GB46200951	19 th Aug. 2012
2	PSA E4440A Spectrum Analyzer	Agilent	MY46181952	19 th Aug. 2012
3	E3645A DC Power Supply	Agilent	MY40000744	19 th Aug. 2012
4	1506A Power Splitter	Weinschel	MN154	19 th Aug. 2012
5	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	19 th Aug. 2012
6	ESI 40 EMI test receiver	R&S	100015	19 th Aug. 2012
7	SMR 20 Signal generator	R&S	100086	19 th Aug. 2012
8	CMU 200 Radio tester	R&S	100313	19 th Aug. 2012
9	12.65m*8.03m*7.50m Fully-Anechoic Chamber	FRANKONIA	-----	19 th Aug. 2012
10	HL562 Ultra log test antenna	R&S	100016	19 th Aug. 2012
11	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	-----	19 th Aug. 2012
12	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	19 th Aug. 2012
13	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	19 th Aug. 2012
14	PS2000 Turn Table	FRANKONIA	-----	19 th Aug. 2012
15	MA260 Antenna Master	FRANKONIA	-----	19 th Aug. 2012
16	SH-241 Climatic Chamber	ESPEC	92000389	19 th Aug. 2012
17	ES-K1 EMI test software	R&S	-----	19 th Aug. 2012
18	HL562 Receive antenna	R&S	100167	19 th Aug. 2012

Appendix

Appendix1 Test Setup