



# TEST REPORT

No. 2010TAR373

for

**ZTE CORPORATION**

**HSDPA USB MODEM**

**Model Name: MF631**

**FCC ID : Q78-ZTEMF631**

with

**Hardware Version: dg1B**

**Software Version: BD\_MF631F3V1.0.0B01**

**Issued Date: 2010-09-07**

**Note:**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633-2678, Fax:+86(0)10-62304793 Email:welcome@emcite.com. [www.emcite.com](http://www.emcite.com)

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
<b>1.1. TESTING LOCATION .....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>3</b>
<b>1.3. PROJECT DATA .....</b>	<b>3</b>
<b>1.4. SIGNATURE.....</b>	<b>3</b>
<b>2. CLIENT INFORMATION .....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
<b>3.1. ABOUT EUT.....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>5</b>
<b>3.3. GENERAL DESCRIPTION .....</b>	<b>5</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>6</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>6</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>7</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>9</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>10</b>
<b>A.1 OUTPUT POWER (§22.913(A)/§24.232(B)) .....</b>	<b>10</b>
<b>A.2 EMISSION LIMIT (§2.1051/§24.238).....</b>	<b>13</b>
<b>A.3 FREQUENCY STABILITY (§2.1055/§24.235) .....</b>	<b>26</b>
<b>A.4 OCCUPIED BANDWIDTH (§2.1049(H)(I)).....</b>	<b>28</b>
<b>A.5 EMISSION BANDWIDTH (§22.917(B)/§24.238(B)).....</b>	<b>32</b>
<b>A.6 BAND EDGE COMPLIANCE (§22.917(B)/§24.238(B)) .....</b>	<b>36</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION (§2.1057/§22.917/§24.238).....</b>	<b>38</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,  
Beijing, P.R.China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304793


### **1.2. Testing Environment**

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: 2010-08-10  
Testing End Date: 2010-09-07

### **1.4. Signature**



---

**Zi Xiaogang**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: ZTE CORPORATION  
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
Contact: Li Dezi  
Email: li.dz@zte.com.cn  
Telephone: 0086 21 68895196  
Fax: 0086 21 61460600

### **2.2. Manufacturer Information**

Company Name: ZTE CORPORATION  
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
Contact: Li Dezi  
Email: li.dz@zte.com.cn  
Telephone: 0086 21 68895196  
Fax: 0086 21 61460600

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	HSDPA USB MODEM
Model Name	MF631
FCC ID	Q78-ZTEMF631
Frequency	GSM 850MHz; PCS 1900MHz; WCDMA Band II,V
Antenna	Internal
Power supply	USB
Output power	16.86 dBm maximum EIRP measured BAND II
Extreme vol. Limits	4.8VDC to 5.2VDC (nominal: 5.0VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
N02	/	dg1B	BD_MF631F3V1.0.0B01

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. General Description**

The Equipment Under Test (EUT) is a model of HSDPA USB MODEM.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	V 10.1.09
FCC Part 22	PUBLIC MOBILE SERVICES	V 10.1.09
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

**6. SUMMARY OF TEST RESULTS**

<b>Items</b>	<b>List</b>	<b>Clause in FCC rules</b>	<b>Verdict</b>
1	Output Power	22.913(a)/24.232(b)	P
2	Emission Limit	2.1051/22.917/24.238	P
3	Conducted Emission	15.107/207	P
4	Frequency Stability	2.1055/24.235	P
5	Occupied Bandwidth	2.1049(h)(i)	P
6	Emission Bandwidth	22.917(b)/24.238(b)	P
7	Band Edge Compliance	22.917(b)/24.238(b)	P
8	Conducted Spurious Emission	2.1057/22.917/24.238	P

## 7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1	Test Receiver	ESS	847151/015	R&S	2010-10-30
2	Test Receiver	ESI40	831564/002	R&S	2011-2-10
3	BiLog Antenna	3142B	9908-1403	EMCO	2011-1-15
4	BiLog Antenna	3142B	9908-1405	EMCO	2010-9-19
5	Signal Generator	SMT06	831285/005	R&S	2010-12-25
6	Signal Generator	SMP04	100070	R&S	2011-4-19
7	LISN	ESH2-Z5	829991/012	R&S	2011-8
8	Spectrum Analyzer	FSU26	200030	R&S	2011-6-17
9	Universal Radio Communication Tester	CMU200	100680	R&S	2011-8-22
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2011-3
11	Dual-Ridge Waveguide Horn Antenna	3115	9906-5831	EMCO	2011-3
12	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2011-3
13	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2011-3
14	Climatic chamber	PL-2G	343074	ESPEC	2011-5-14

## ANNEX A: MEASUREMENT RESULTS

### A.1 OUTPUT POWER (§22.913(a)/§24.232(b))

#### A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### A.1.2 Conducted

##### A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak). These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

##### Limit

According to FCC§2.1046.

#### WCDMA Band II

##### Measurement result

WCDMA (Band II)	CH	Frequency(MHz)	Peak output power(dBm)	Target (dB)
	9262	1852.4	<b>21.55</b>	21±1.5
	9400	1880.0	21.07	21±1.5
	9538	1907.6	21.17	21±1.5

#### WCDMA Band V

##### Measurement result

WCDMA (Band V)	CH	Frequency(MHz)	Peak output power(dBm)	Target (dB)
	4132	826.4	21.43	21±1.5
	4183	836.6	21.54	21±1.5
	4233	846.6	<b>21.73</b>	21±1.5

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
2. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $A_{Rpl}=Pin - Pr$ . The  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss.

The measurement results are obtained as described below:

$$\text{Power(EIRP)}=P_{\text{Mea}}+A_{\text{Rpl}}$$

3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
5. The EUT is then put into continuously transmitting mode at its maximum power level.
6. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .
9. The test system should be checked before test by a standard comb signal source. The signal source put on the position, instead of the EUT. The test result should be compared with the test result before. If the test result is similar with the initial one, then the test system can work stably.

### WCDMA Band II-EIRP

#### Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	33dBm (2W)

#### Measurement result

##### WCDMA Band II

Frequency(MHz)	Peak EIRP(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Polarization
1852.4	16.27	47.11	-30.84	Horizontal
1880.0	16.76	47.37	-30.61	Horizontal
1907.6	<b>16.86</b>	47.54	-30.68	Horizontal

Frequency: 1907.6MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-30.68dBm)+ A<sub>Rpl</sub>(47.54dBm) = 16.86 dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

### WCDMA Band V-ERP

#### Limits

	Burst Peak EIRP (dBm)
WCDMA Band V	38.45dBm (7W)

#### Measurement result

##### WCDMA Band V

Frequency(MHz)	Peak ERP(dBm)	A <sub>Rpl</sub> (dBm)	Correction (dBm)	P <sub>Mea</sub> (dBm)	Polarization
826.4	16	45.95	2.15	-27.8	Horizontal
836.6	14.59	45.98	2.15	-29.24	Horizontal
846.6	<b>16.69</b>	45.82	2.15	-26.98	Horizontal

Frequency: 846.6MHz

Peak ERP(dBm)= P<sub>Mea</sub>(-26.98dBm)+ A<sub>Rpl</sub>(45.82dBm)-2.15dBm= 16.69 dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

## **A.2 EMISSION LIMIT** (§2.1051/§24.238)

### **A.2.1 Measurement Method**

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the WCDMA Band II ,WCDMA Band V .

**The procedure of radiated spurious emissions is as follows:**

a) Pre-calibration

With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  
 $RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$

The SA is calibrated using following setup.

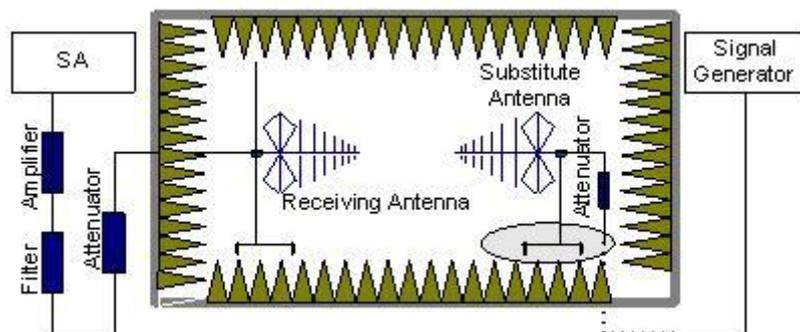


b) System check

The test system should be checked before test by a standard comb signal source. The signal source put on the position, instead of the EUT. The test result should be compared with the test result before. If the test result is similar with the initial one, then the test system can work stably.

c) EUT test

EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

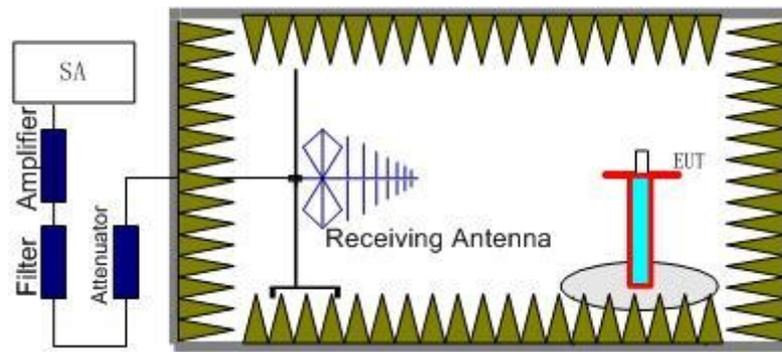

### A.2.2 Measurement Limit

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43+10\text{Log}(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) , WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II , WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss.

The measurement results are obtained as described below:

$$\text{Power} = P_{\text{Mea}} + A_{\text{Rpl}}$$

**WCDMA BAND II Mode Channel 9262/1852.4MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
17479.2	-32.36021798	15.2	-47.56021798	-13	Horizontal
15403.2	-39.14405914	14.5	-53.64405914	-13	Horizontal
13464.5	-41.84580761	13.6	-55.44580761	-13	Vertical
3703.4	-42.7962054	3	-45.7962054	-13	Horizontal
9749	-44.73248992	11.9	-56.63248992	-13	Horizontal
8153.9	-47.2080334	9.9	-57.1080334	-13	Horizontal

**WCDMA BAND II Mode Channel 9400/1880MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
17773.2	-32.25761487	17.1	-49.35761487	-13	Vertical
15615.6	-39.0333564	13.5	-52.5333564	-13	Vertical
12695.6	-42.32869146	14.2	-56.52869146	-13	Horizontal
3761.2	-44.11572532	3.6	-47.71572532	-13	Vertical
9697.1	-45.55113285	12.3	-57.85113285	-13	Vertical
8169.2	-46.7143332	10.5	-57.2143332	-13	Horizontal

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
17818.8	-32.80565947	16.3	-49.10565947	-13	Vertical
16476.4	-37.02840153	14.8	-51.82840153	-13	Horizontal
10785.2	-44.72885463	15	-59.72885463	-13	Horizontal
9723.2	-45.73582085	12	-57.73582085	-13	Horizontal
8125.7	-46.61676726	9.8	-56.41676726	-13	Horizontal
3817.6	-47.63622925	3.8	-51.43622925	-13	Vertical

**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
9775.9	-45.76042702	10.05	-55.81042702	-13	Horizontal
7933.6	-47.8099298	8.05	-55.8599298	-13	Horizontal
2492.4	-53.14036204	0.15	-53.29036204	-13	Vertical
1195.5	-56.93676406	-0.55	-56.38676406	-13	Vertical
1150.3	-57.04656006	-1.25	-55.79656006	-13	Vertical
1102	-57.37618593	-2.95	-54.42618593	-13	Vertical

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1061.95	-59.09872238	-3.55	-55.54872238	-13	Vertical
1331.15	-58.01523766	-3.45	-54.56523766	-13	Vertical
2491.5	-53.24336388	0.15	-53.39336388	-13	Vertical
7998.7	-48.31555553	7.05	-55.36555553	-13	Vertical
9921.1	-45.92677383	10.45	-56.37677383	-13	Vertical

**WCDMA BAND V Mode Channel 4233/846.6MHz**


Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1328.8	-57.92333678	-3.45	-54.47333678	-13	Vertical
2495.7	-52.64331008	0.15	-52.79331008	-13	Vertical
8158.6	-48.36010681	7.75	-56.11010681	-13	Horizontal
9779.5	-44.87550482	10.05	-54.92550482	-13	Vertical

**WCDMA Band II**

**A.2.3.1 RADIATED SPURIOUS EMISSIONS-Channel 9262: 30MHz –2GHz**

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-9262

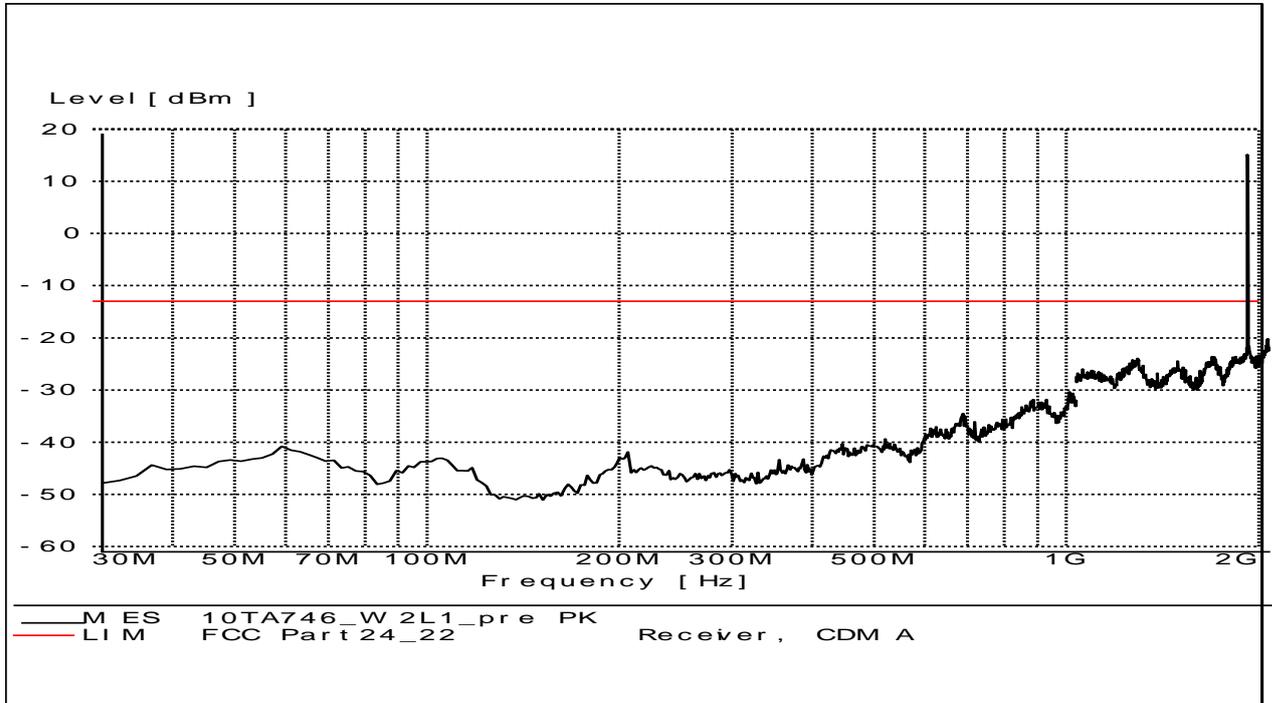

**A.2.3.2 RADIATED SPURIOUS EMISSIONS-Channel 9400: 30MHz – 2GHz**

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-9400

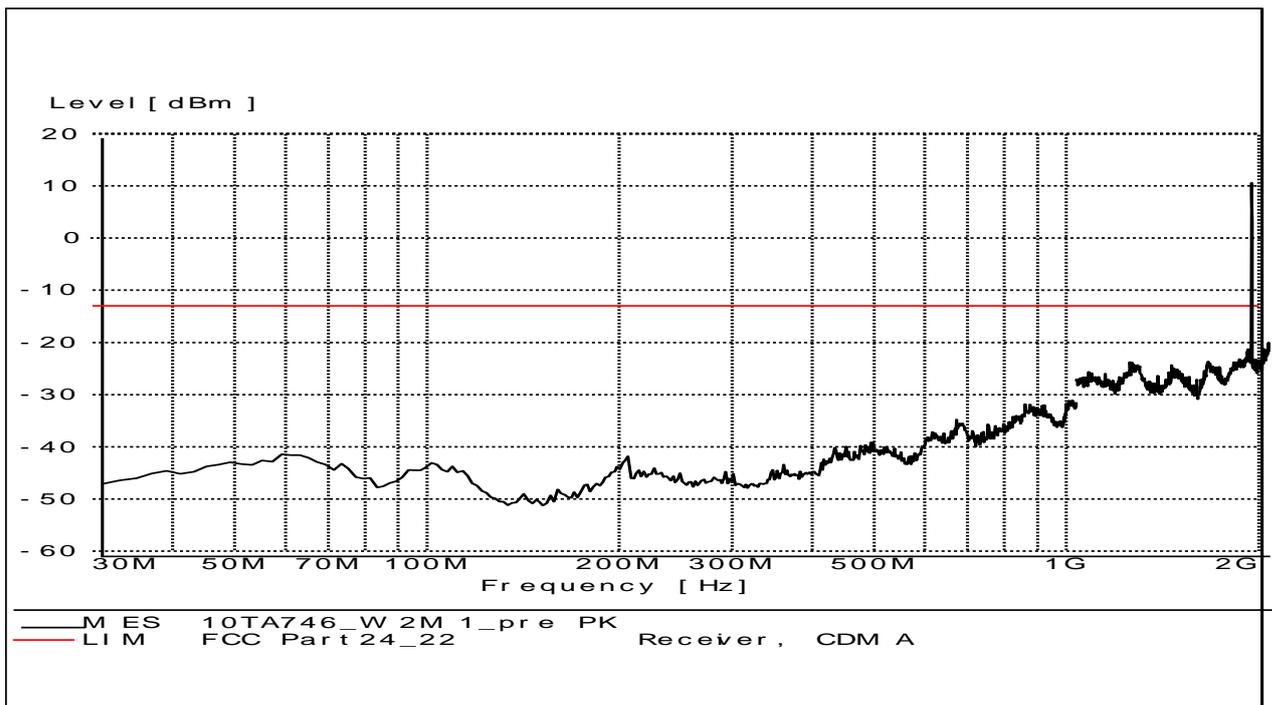

**A.2.3.3 RADIATED SPURIOUS EMISSIONS-Channel 9538: 30MHz – 2GHz**

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-9538

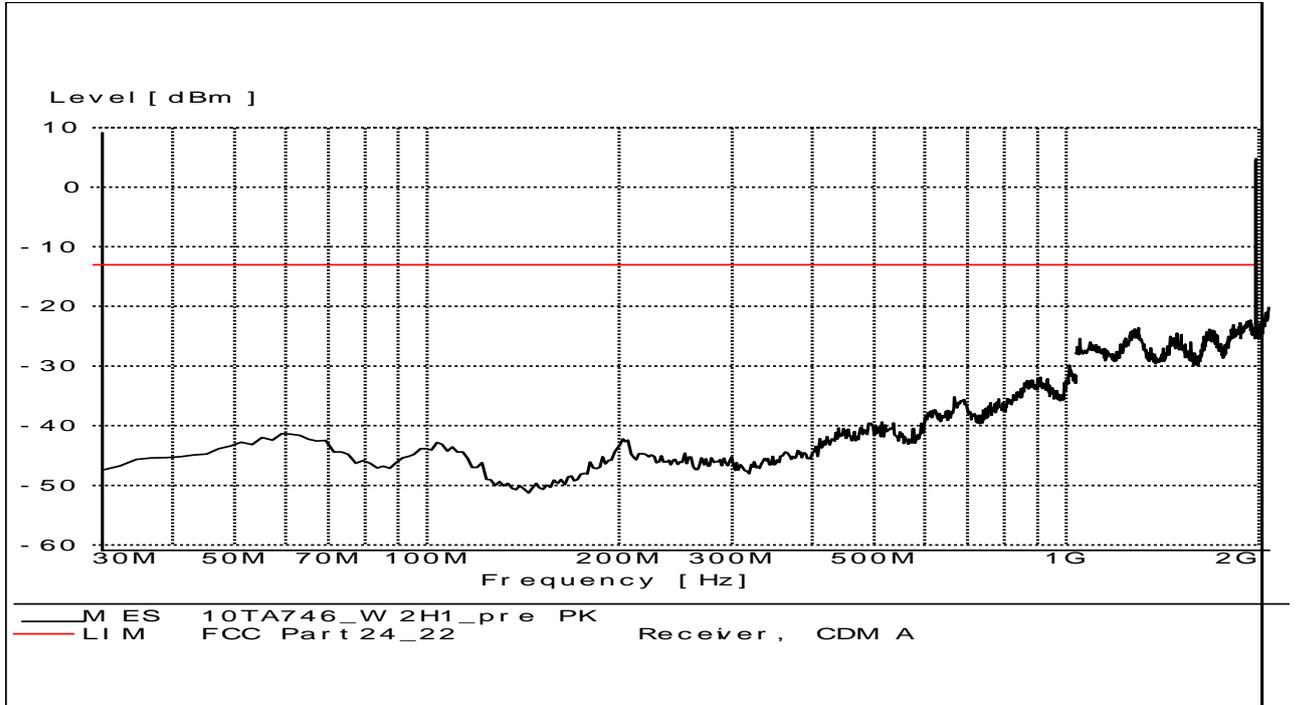

**A.2.3.4 RADIATED SPURIOUS EMISSIONS-Channel 9662: 2GHz – 18GHz**


Radiated spurious emission limit :-13dBm.

FCC24 2-18 GHz

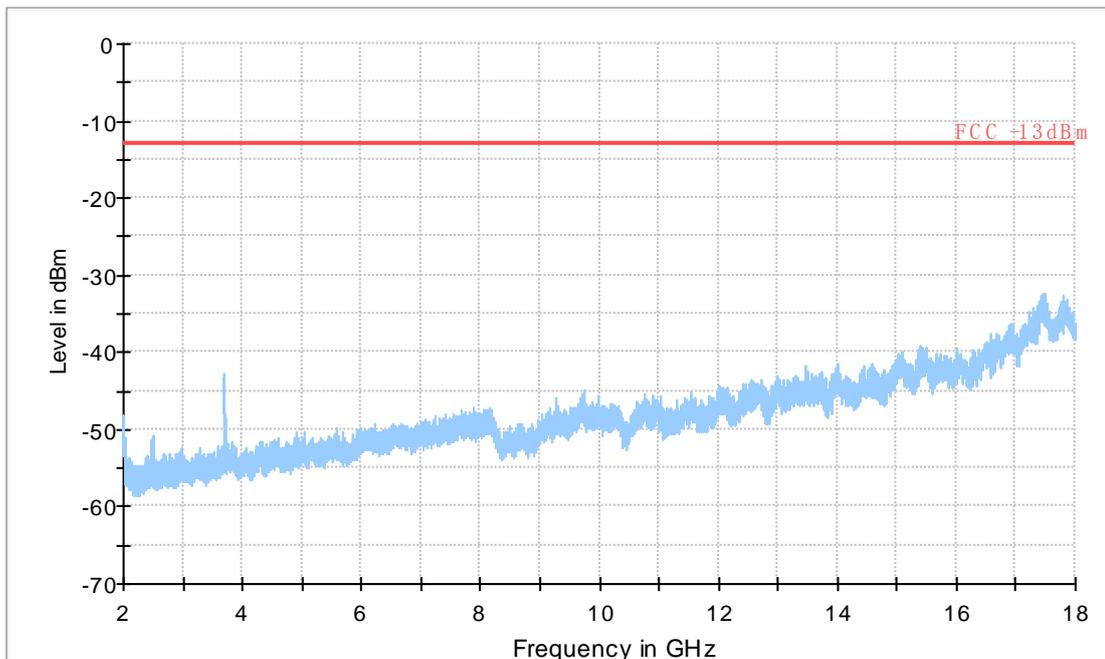


**A.2.3.5 RADIATED SPURIOUS EMISSIONS-Channel 9400: 2GHz – 18GHz**  
Radiated spurious emission limit :-13dBm.

FCC24 2-18 GHz

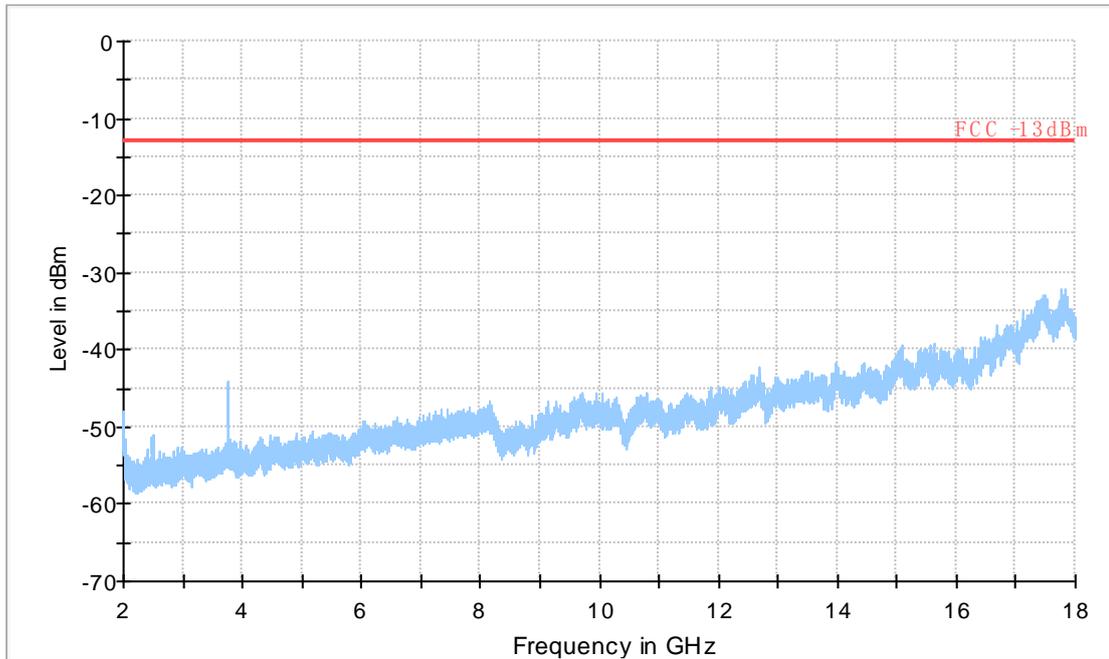

**A.2.3.6 RADIATED SPURIOUS EMISSIONS-Channel 9538: 2GHz – 18GHz**  
Radiated spurious emission limit :-13dBm.


FCC24 2-18 GHz

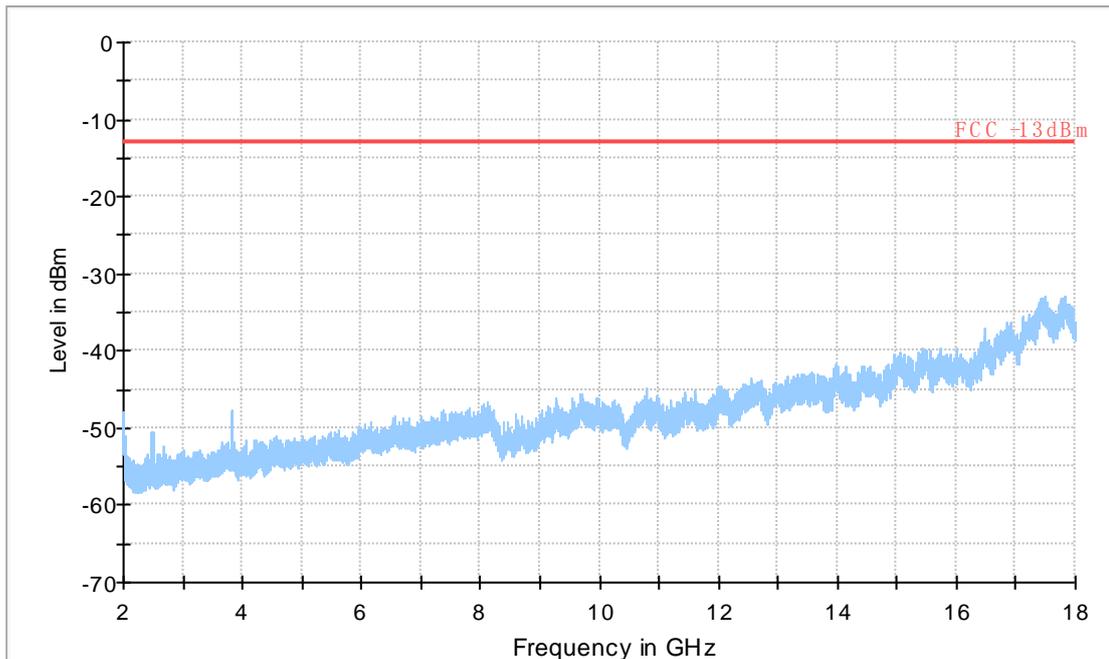

**A.2.3.7 Radiated spurious emission (18GHz-20GHz)**

Radiated spurious emission limit :-13dBm.


Note: This plot is valid for low, mid & high channels. It is same as the floor noise.

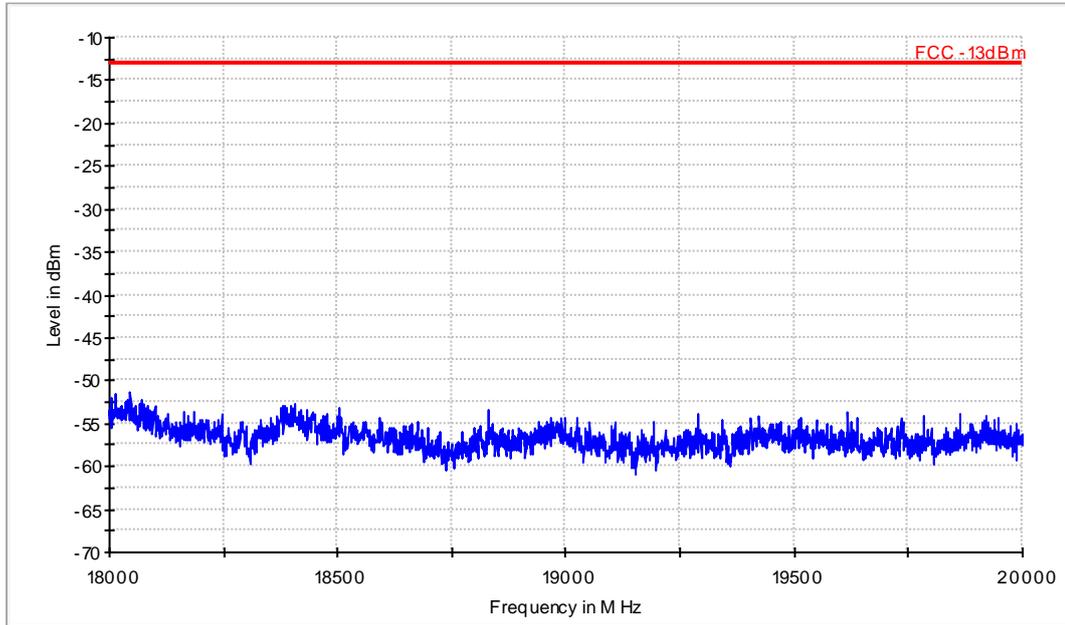

— Preview Measurement Detector 1 — FCC -13dBm


**A.2.3.8 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 2GHz**

Radiated spurious emission limit :-13dBm.

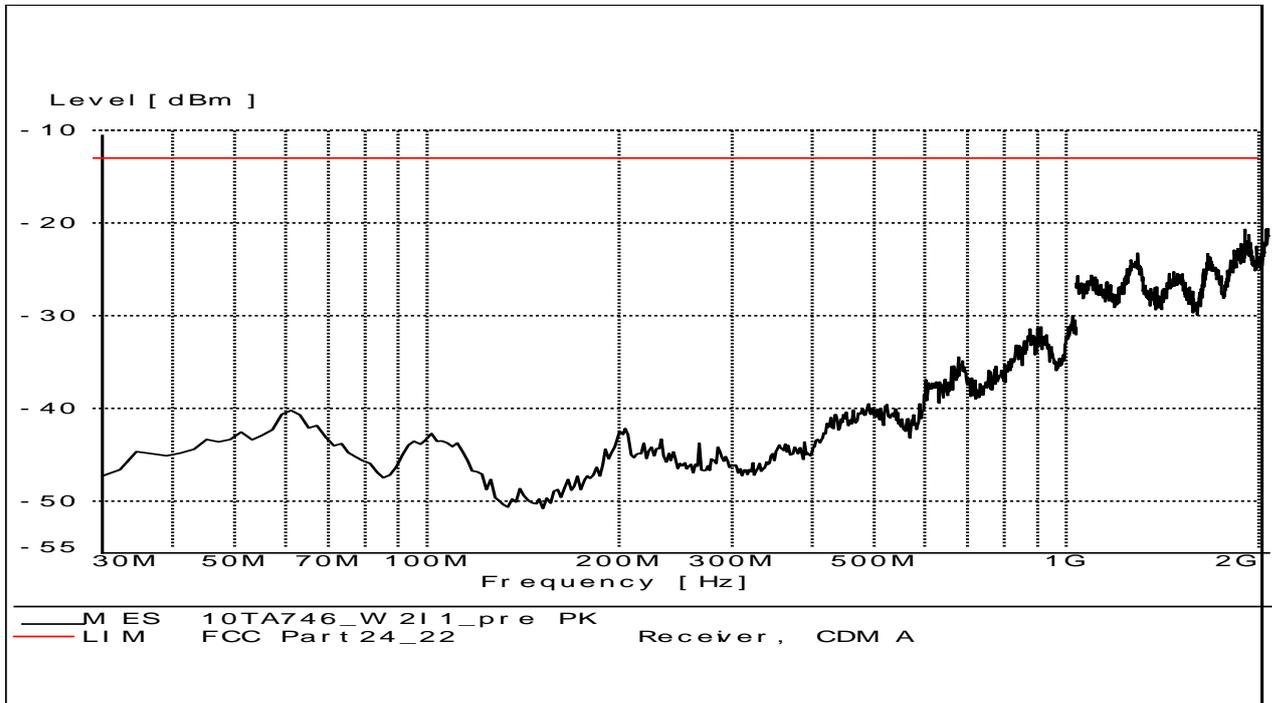


**A.2.3.9 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 2GHz – 18GHz**  
Radiated spurious emission limit :-13dBm.

FCC24 2-18 GHz

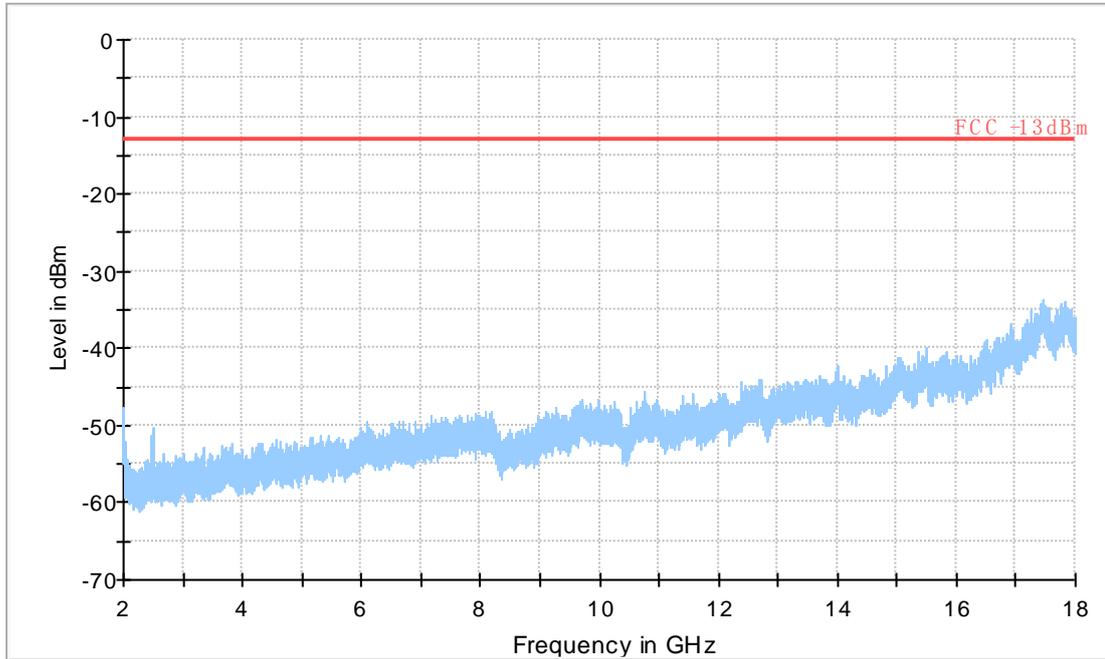

**A.2.3.10 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 18GHz – 20GHz**  
Radiated spurious emission limit :-13dBm.

Note: It is same as the floor noise.

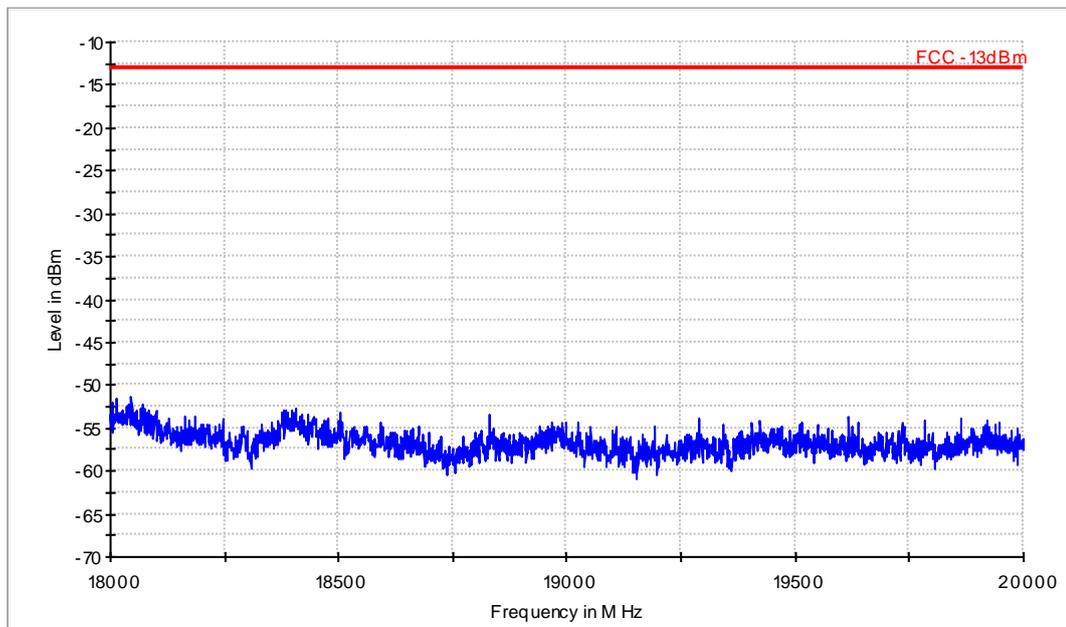


— Preview Measurement Detector 1 — FCC -13dBm

WCDMA Band V

A.2.3.11 RADIATED SPURIOUS EMISSIONS-Channel 4132: 30MHz – 1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-4132

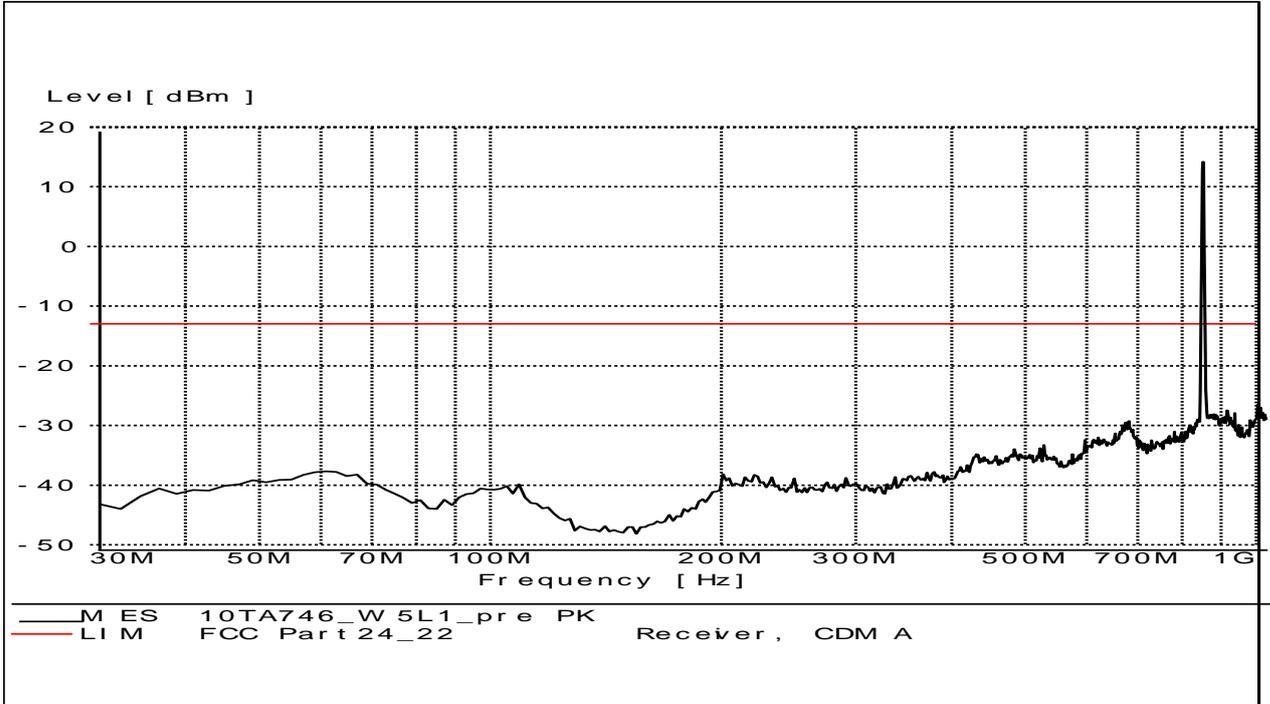

A.2.3.12 RADIATED SPURIOUS EMISSIONS-Channel 4183: 30MHz – 1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-4183

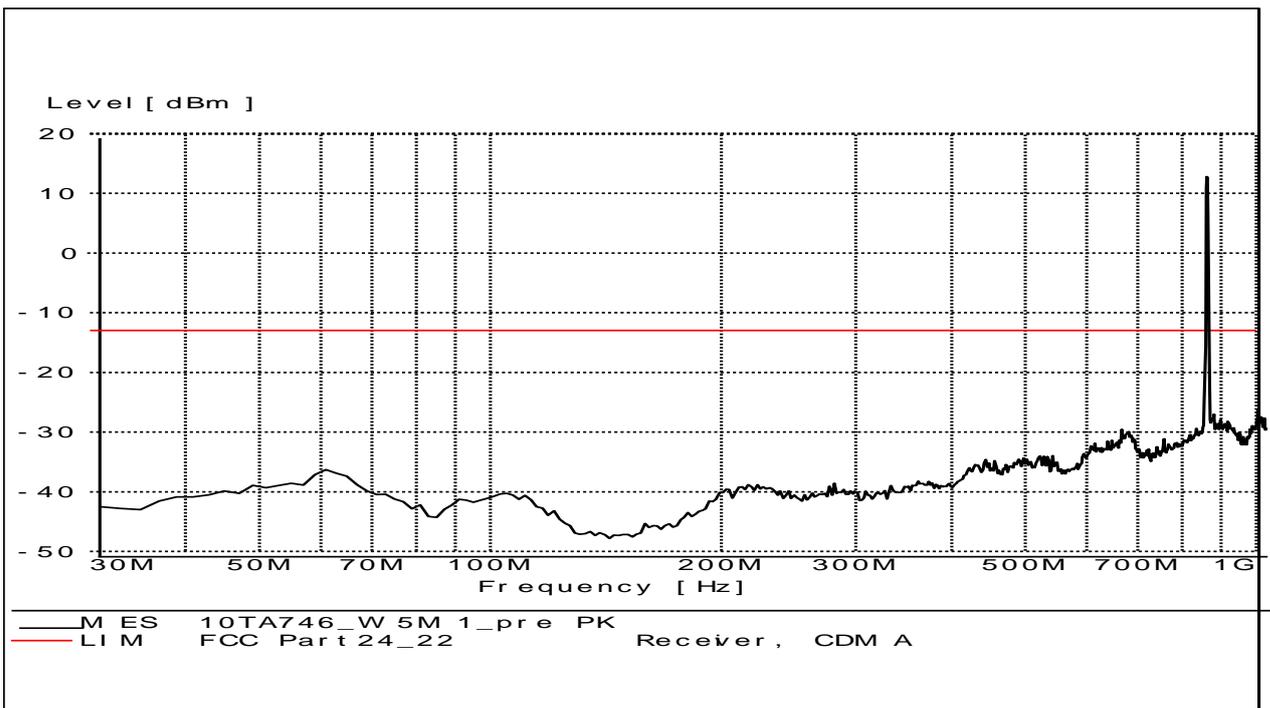

**A.2.3.13 RADIATED SPURIOUS EMISSIONS-Channel 4233: 30MHz – 1GHz**

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-4233

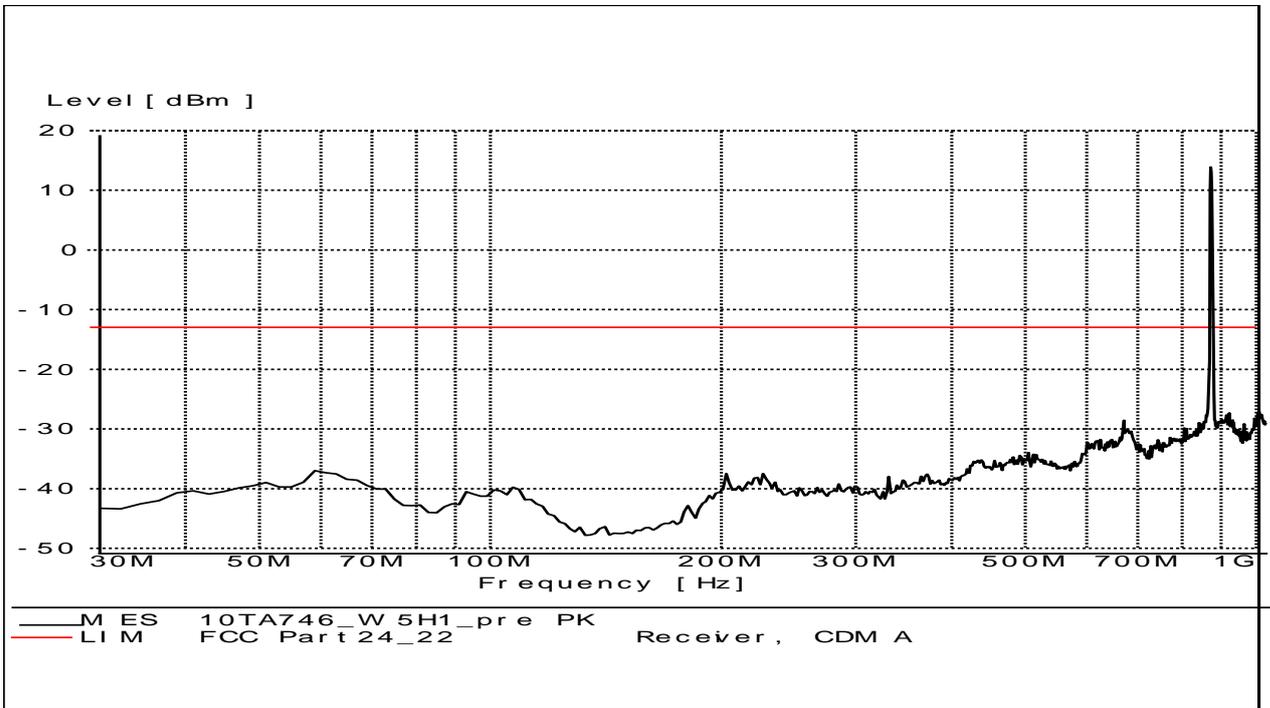

**A.2.3.14 RADIATED SPURIOUS EMISSIONS-Channel 4132: 1GHz – 10GHz**


Radiated spurious emission limit :-13dBm.

FCC22 1-10 GHz

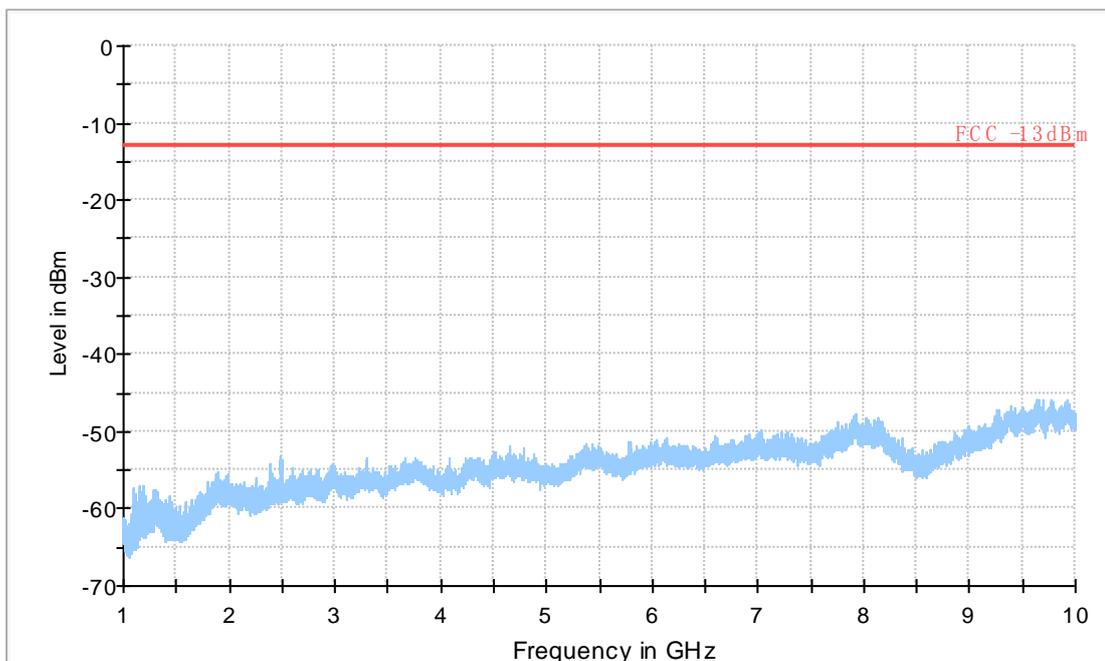


**A.2.3.15 RADIATED SPURIOUS EMISSIONS-Channel 4183: 1GHz – 10GHz**  
Radiated spurious emission limit :-13dBm.

FCC22 1-10 GHz

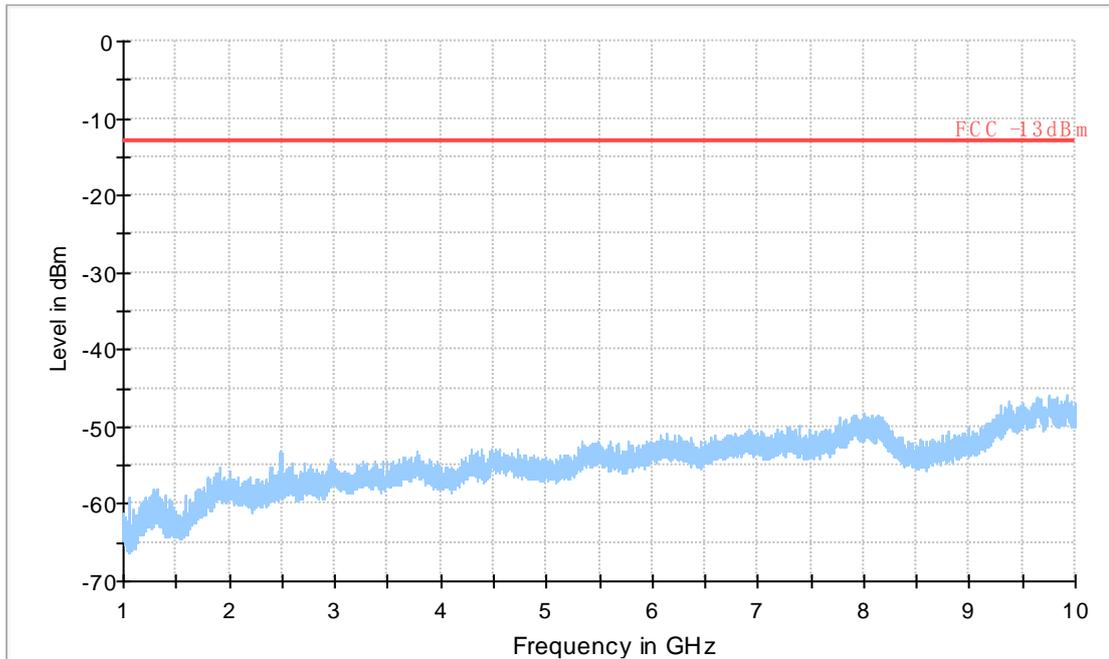


**A.2.3.16 RADIATED SPURIOUS EMISSIONS-Channel 4233: 1GHz – 10GHz**  
Radiated spurious emission limit :-13dBm.

FCC22 1-10 GHz

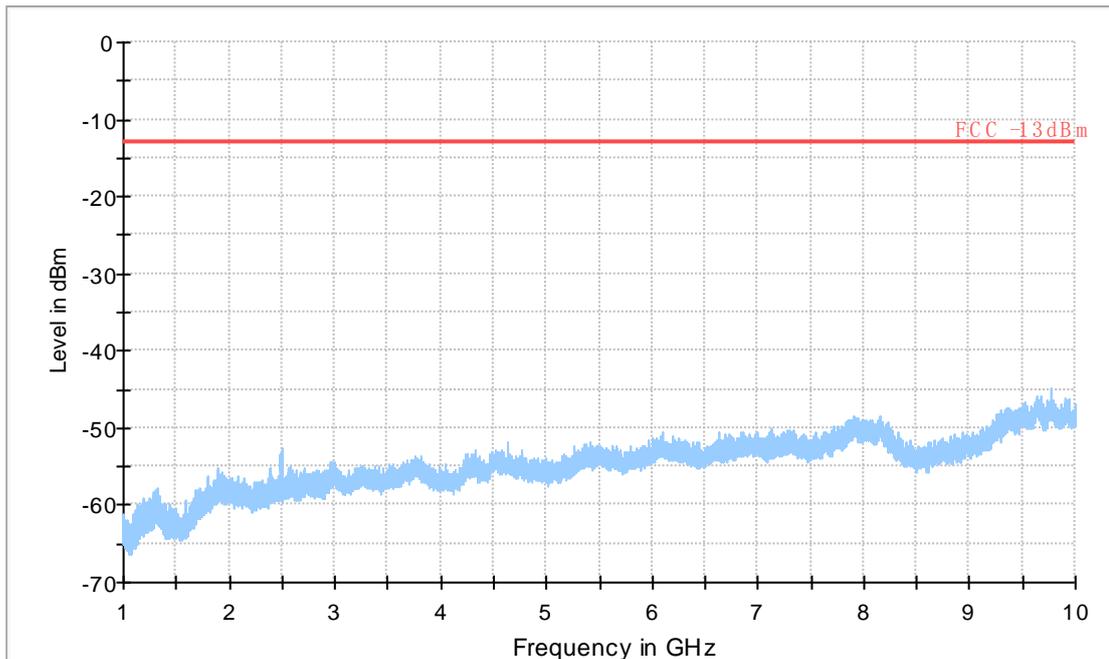


**A.2.3.17 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 1GHz**  
Radiated spurious emission limit :-13dBm.

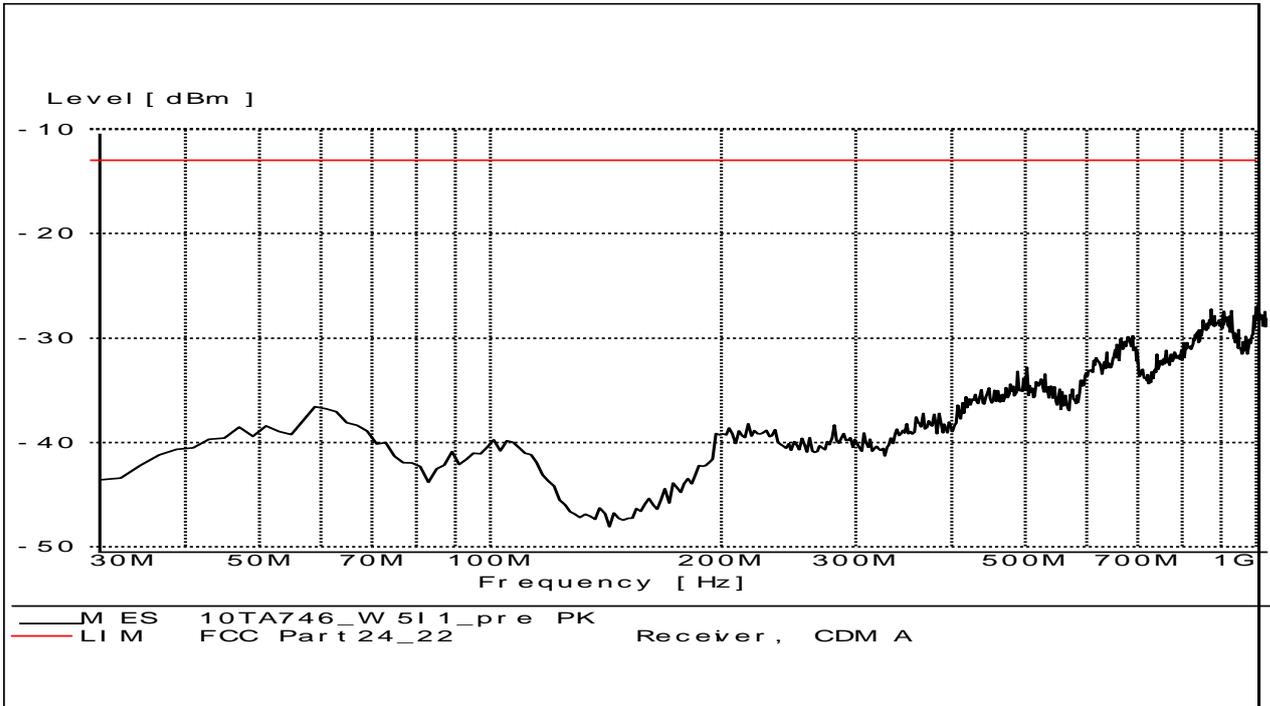

**A.2.3.18 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 1GHz – 10GHz**  
Radiated spurious emission limit :-13dBm.

FCC22 1-10 GHz

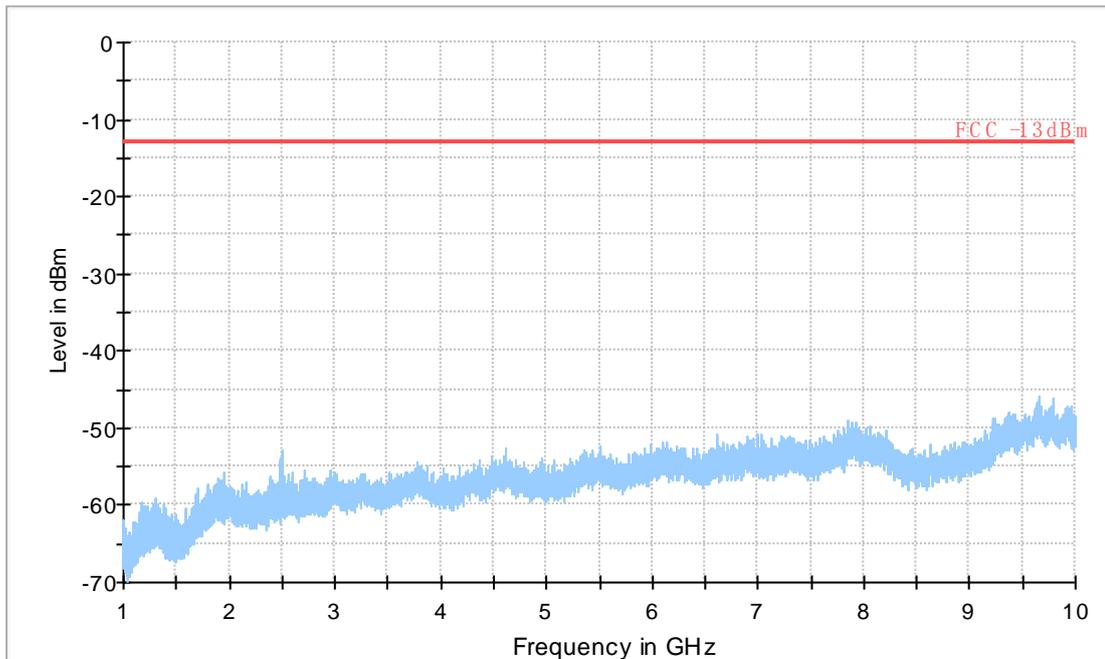

### **A.3 FREQUENCY STABILITY (§2.1055/§24.235)**

#### **A.3.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 9400 for WCDMA Band II, channel 4183 for WCDMA Band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **A.3.2 Measurement Limit**

##### **A.3.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 4.8VDC and 5.2VDC, with a nominal voltage of 5.0VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

##### **A.3.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

### A.3.3 Measurement results

#### WCDMA Band II

##### Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
4.8	43	0.023
5.0	34	0.018
5.2	37	0.020

##### Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	49	0.026
-20	52	0.028
-10	39	0.021
0	42	0.022
10	38	0.020
20	42	0.022
30	42	0.022
40	46	0.024
50	45	0.024

#### WCDMA Band V

##### Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
4.8	13	0.016
5.0	10	0.012
5.2	15	0.018

##### Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	19	0.023
-20	15	0.018
-10	16	0.019
0	20	0.024
10	18	0.022
20	14	0.017
30	17	0.020
40	15	0.018
50	18	0.022

## A.4 OCCUPIED BANDWIDTH (§2.1049(h)(i))

### A.4.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. The table below lists the measured -20dBc BW (99%). Spectrum analyzer plots are included on the following pages.

#### WCDMA Band II (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)
1852.4	4.167
1880.0	4.151
1907.6	4.151


#### WCDMA Band II

#### Channel 9262-Occupied Bandwidth (99%)

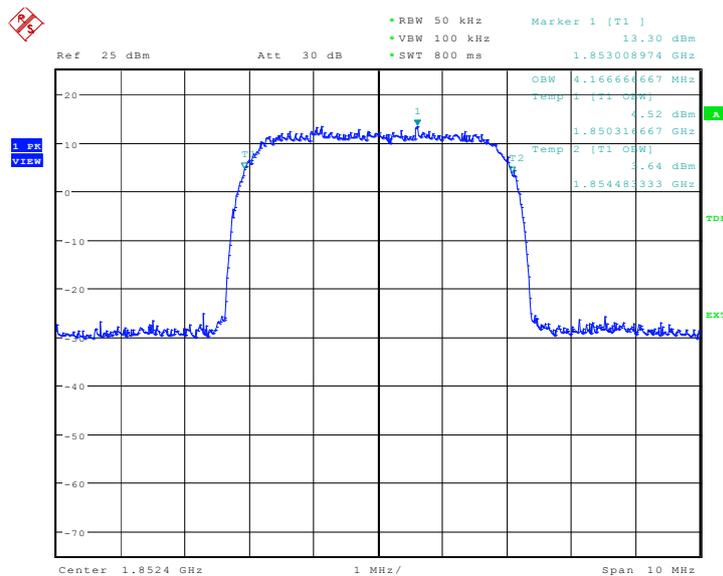


Date: 11.AUG.2010 02:40:58

### Channel 9400-Occupied Bandwidth (99%)

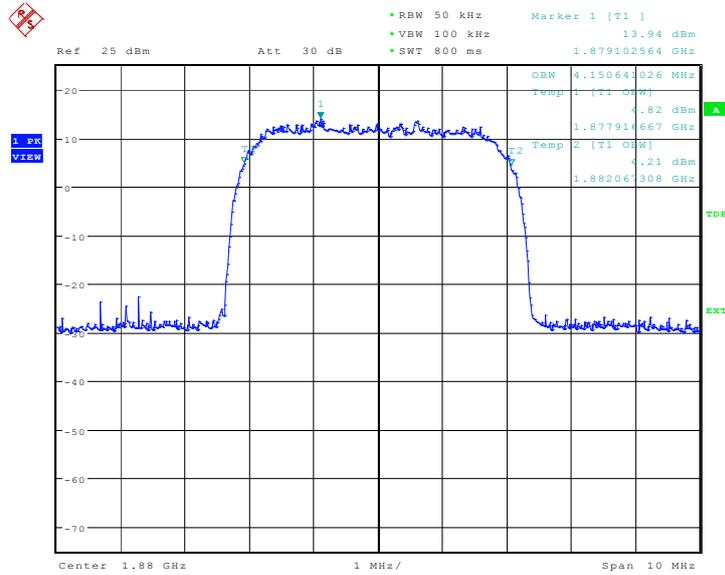

Date: 11.AUG.2010 02:41:27

### Channel 9538-Occupied Bandwidth (99%)

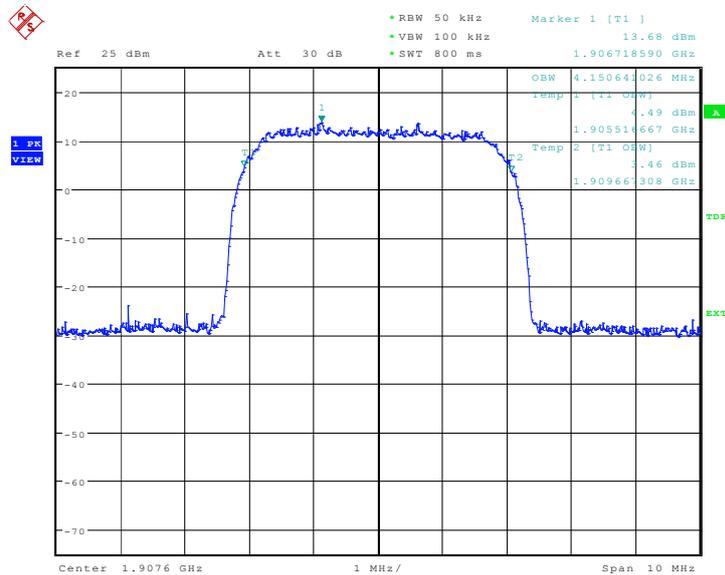


Date: 11.AUG.2010 02:41:56

**WCDMA Band V**

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)
826.4	4.151
836.6	4.167
846.6	4.167


**WCDMA Band V**

**Channel 4132-Occupied Bandwidth (99%)**

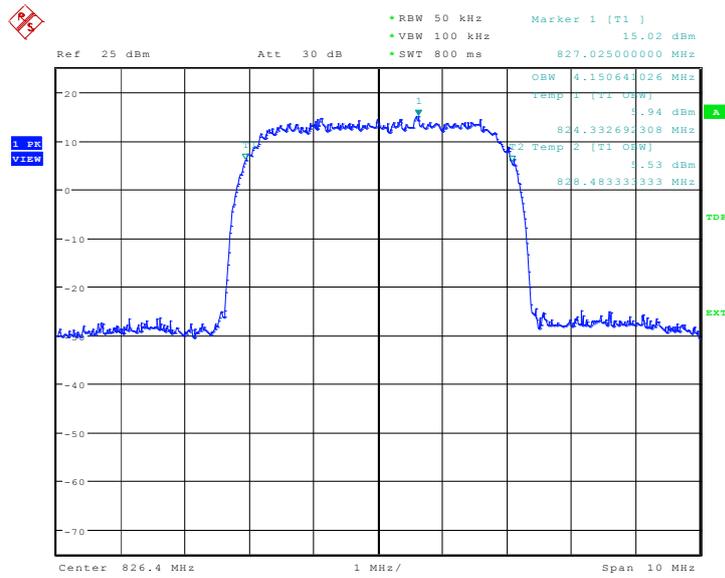


Date: 11.AUG.2010 02:58:52

### Channel 4183-Occupied Bandwidth (99%)

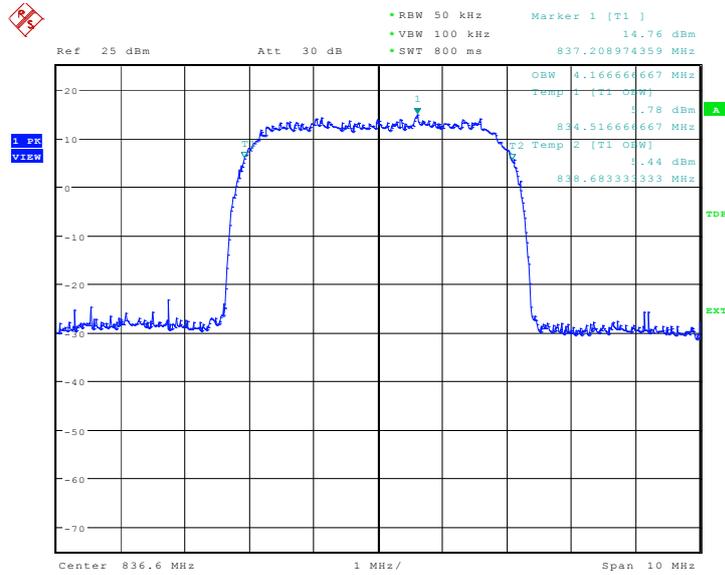

Date: 11.AUG.2010 02:59:21

### Channel 4233-Occupied Bandwidth (99%)

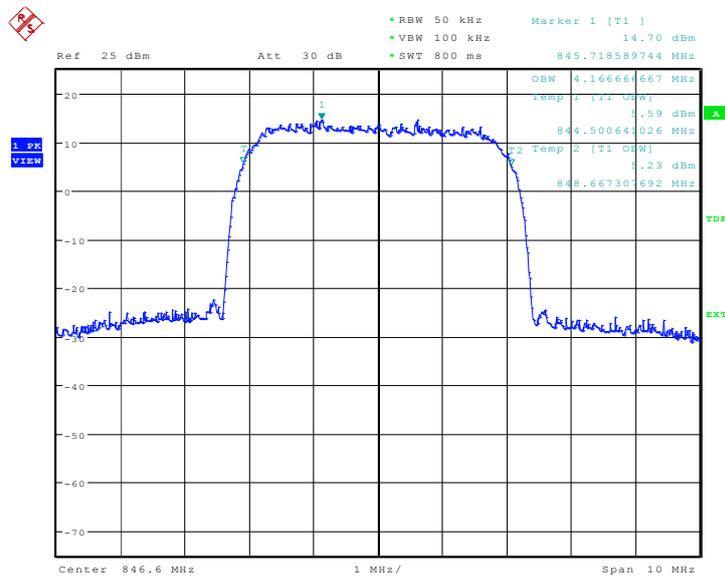

Date: 11.AUG.2010 02:59:49

## A.5 EMISSION BANDWIDTH (§22.917(b)/§24.238(b))

### A.5.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the WCDMA Band II and WCDMA Band V. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

#### WCDMA Band II (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( MHz)
1852.4	4.471
1880.0	4.471
1907.6	4.455


#### WCDMA Band II

#### Channel 9262-Occupied Bandwidth (-26dBc BW)

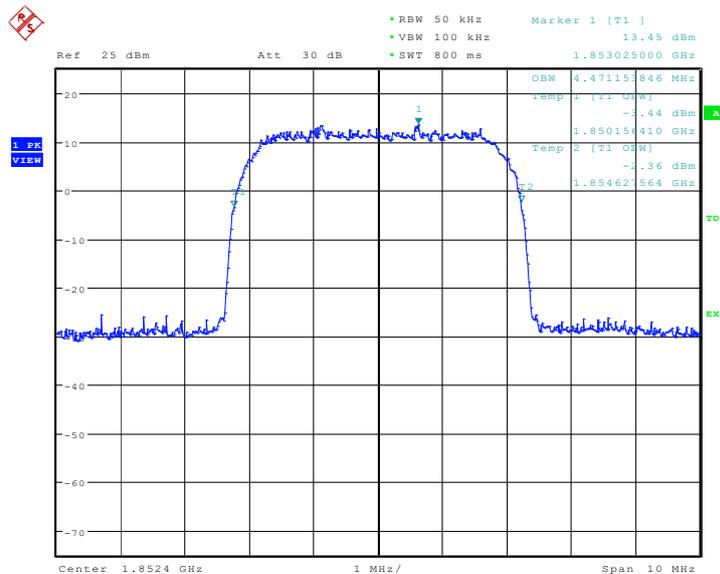


Date: 11.AUG.2010 02:42:25

### Channel 9400-Occupied Bandwidth (-26dBc BW)

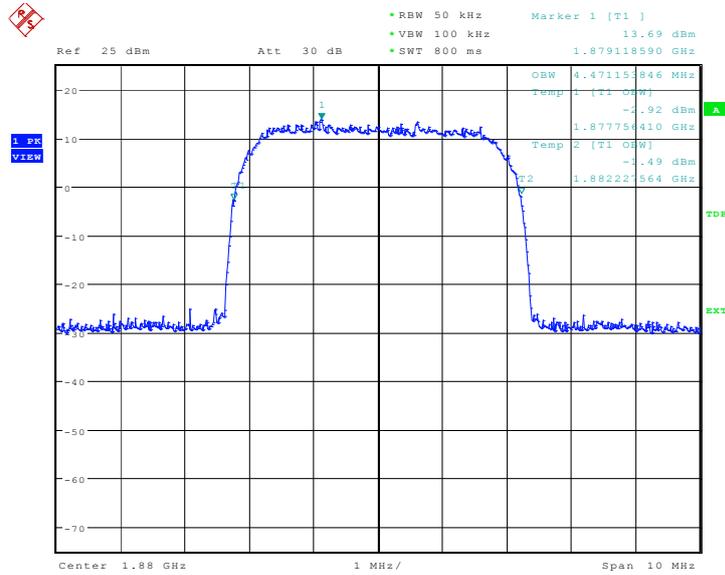

Date: 11.AUG.2010 02:42:54

### Channel 9538-Occupied Bandwidth (-26dBc BW)

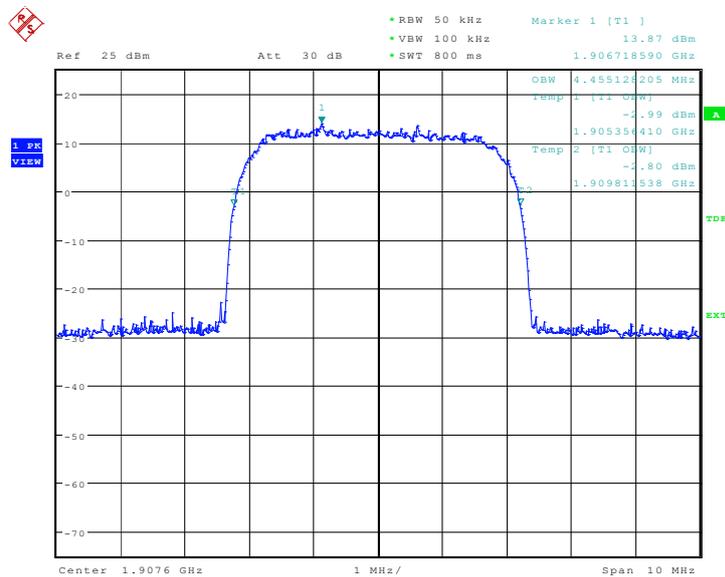


Date: 11.AUG.2010 02:43:23

**WCDMA Band V**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( MHz)
826.40	4.455
836.60	4.471
846.60	4.487


**WCDMA Band V**

**Channel 4132-Occupied Bandwidth (-26dBc BW)**

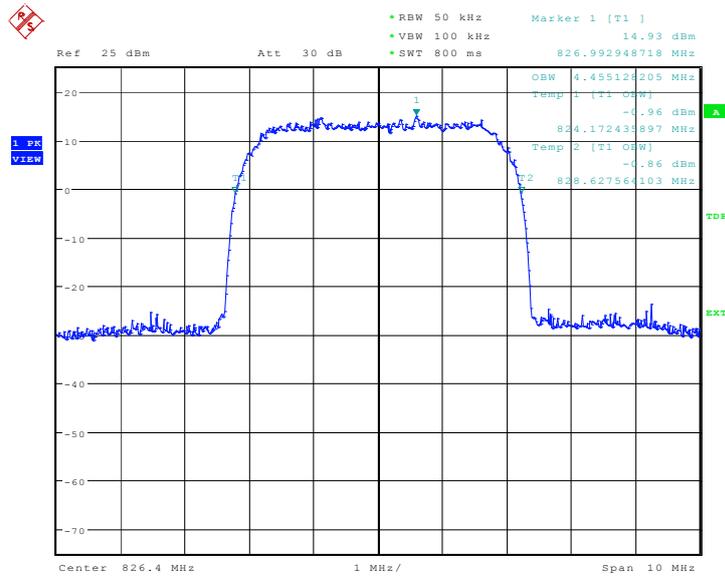


Date: 11.AUG.2010 03:00:19

### Channel 4183-Occupied Bandwidth (-26dBc BW)

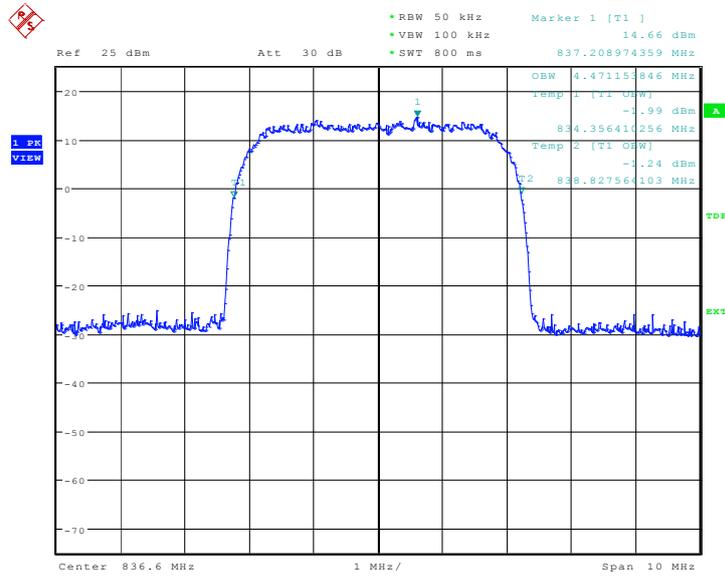

Date: 11.AUG.2010 03:00:48

### Channel 4233-Occupied Bandwidth (-26dBc BW)

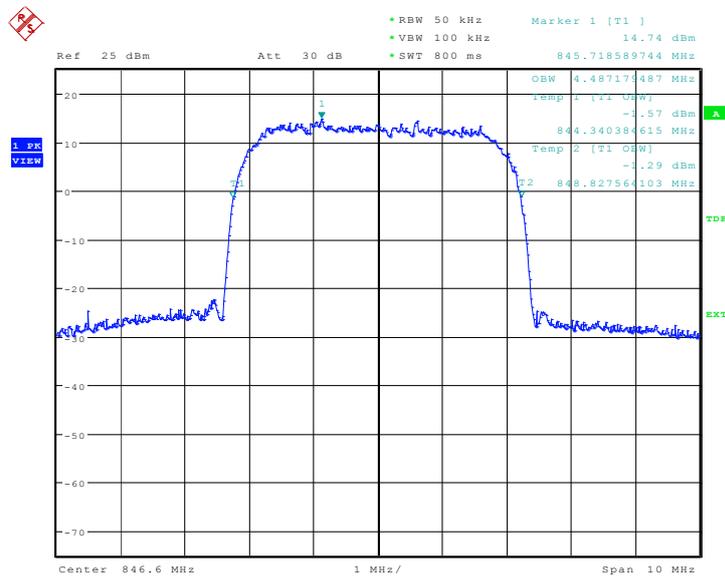


Date: 11.AUG.2010 03:01:16

**A.6 BAND EDGE COMPLIANCE (§22.917(b)/§24.238(b))**


**WCDMA Band II**

**LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262**

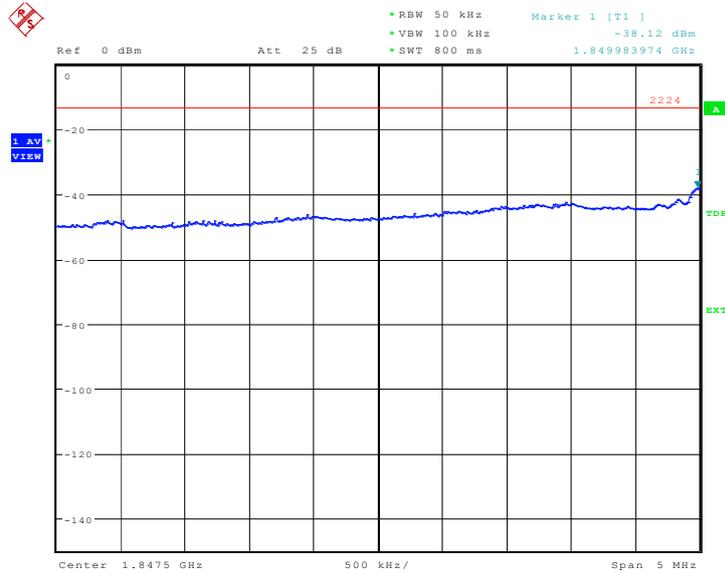


Date: 11.AUG.2010 02:43:53

**HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538**

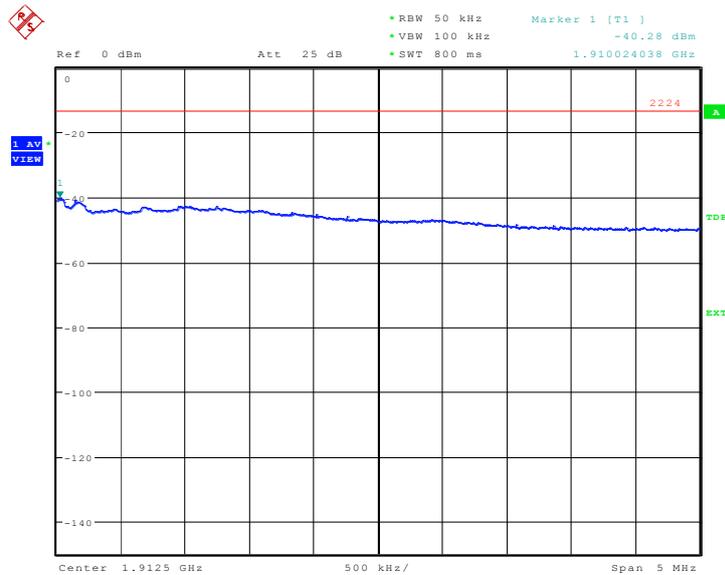


Date: 11.AUG.2010 02:44:22

**WCDMA Band V**  
**LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132**

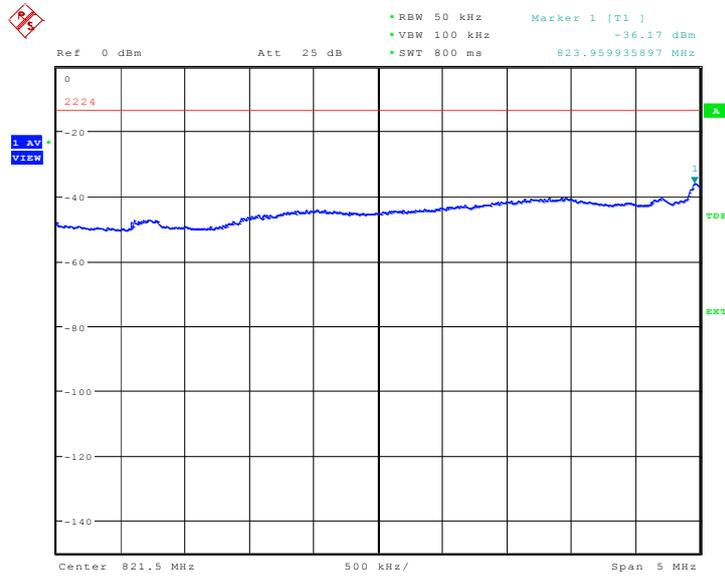

Date: 11.AUG.2010 03:01:46

**HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233**

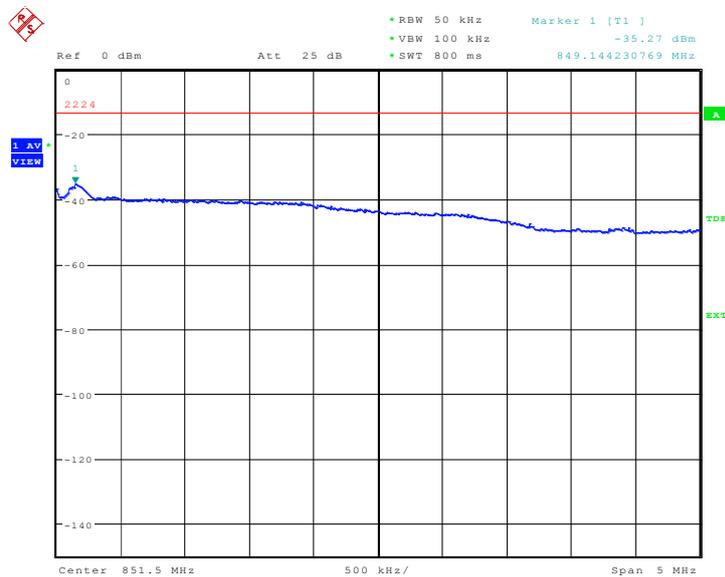

Date: 11.AUG.2010 03:02:15

## **A.7 CONDUCTED SPURIOUS EMISSION** (§2.1057/§22.917/§24.238)

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **WCDMA Band II Transmitter**

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

#### **WCDMA Band V Transmitter**

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

### **A. 7.2 Measurement Limit**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### **A.7.3 Measurement result**

#### **WCDMA Band II**

Harmonic	Tx ch. 9262 Freq. (MHz)	Level (dBm)	Tx ch. 9400 Freq. (MHz)	Level (dBm)	Tx ch. 9538 Freq. (MHz)	Level (dBm)
2	3704.8	nf	3760	nf	3815.2	nf
3	5557.2	nf	5640	nf	5722.8	nf
4	7409.6	nf	7520	nf	7630.4	nf
5	9262	nf	9400	nf	9538	nf
6	11114.4	nf	11280	nf	11445.6	nf
7	12966.8	nf	13160	nf	13353.2	nf
8	14819.2	nf	15040	nf	15260.8	nf
9	16671.6	nf	16920	nf	17168.4	nf
10	18524	nf	18800	nf	19076	nf


nf: Noise floor

**WCDMA Band II**

**A. 7.3.1 Channel 9262: 30MHz –4GHz**

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

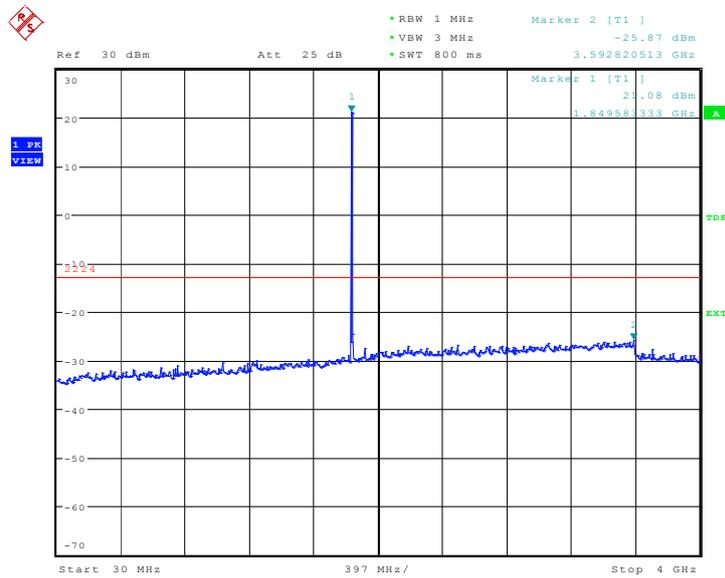

Date: 11.AUG.2010 02:44:52

**A. 7.3.2 Channel 9262: 4GHz –20GHz**

Spurious emission limit –13dBm.

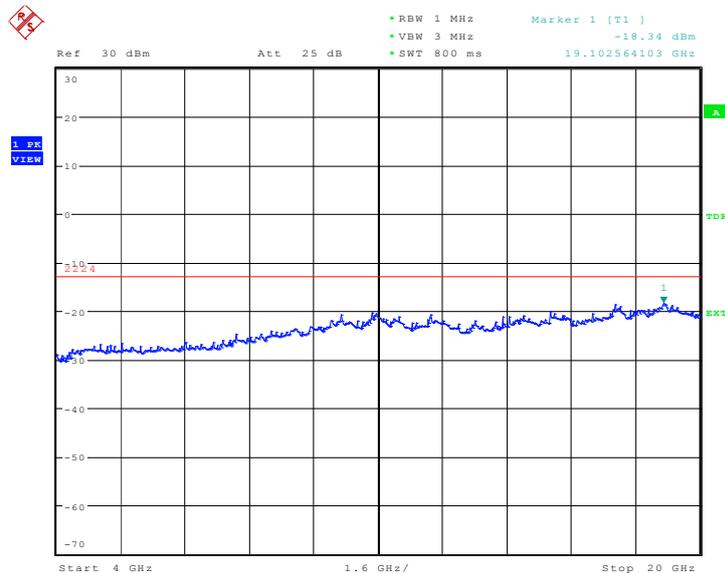


Date: 11.AUG.2010 02:45:19

### A. 7.3.3 Channel 9400: 30MHz – 4GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

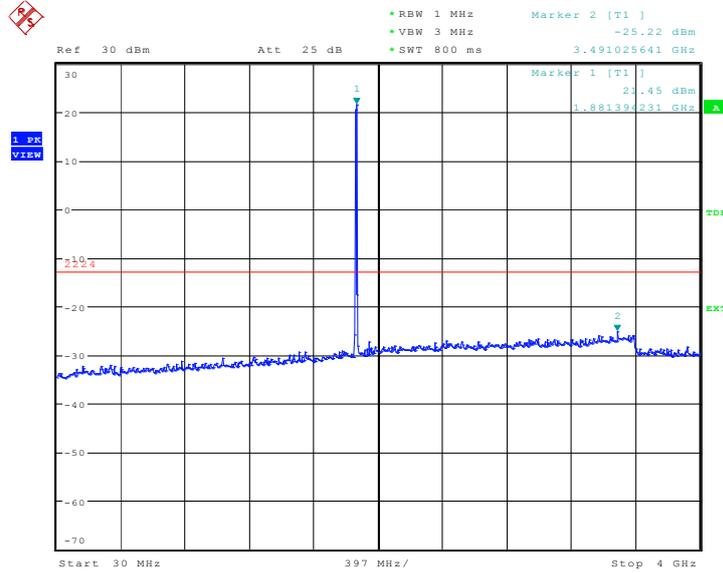

Date: 11.AUG.2010 02:45:48

### A. 7.3.4 Channel 9400: 4GHz – 20GHz

Spurious emission limit –13dBm.

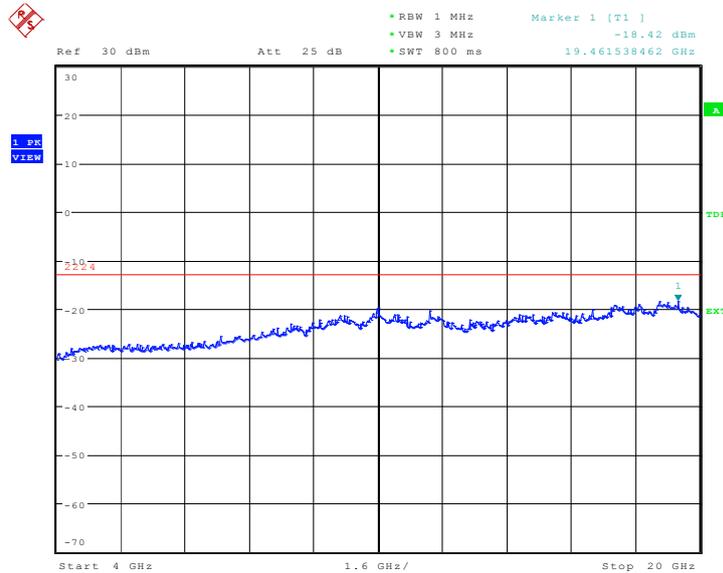


Date: 11.AUG.2010 02:46:15

### A. 7.3.5 Channel 9538: 30MHz – 4GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

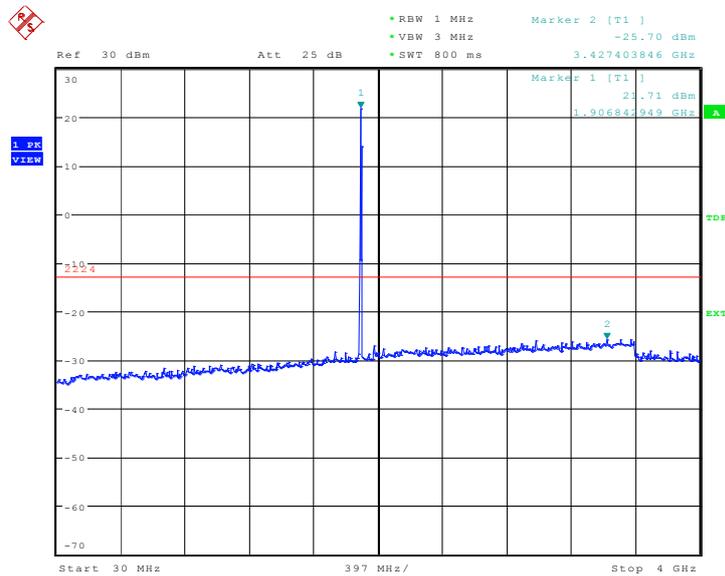

Date: 11.AUG.2010 02:46:44


### A. 7.3.6 Channel 9538: 4GHz – 20GHz

Spurious emission limit –13dBm.

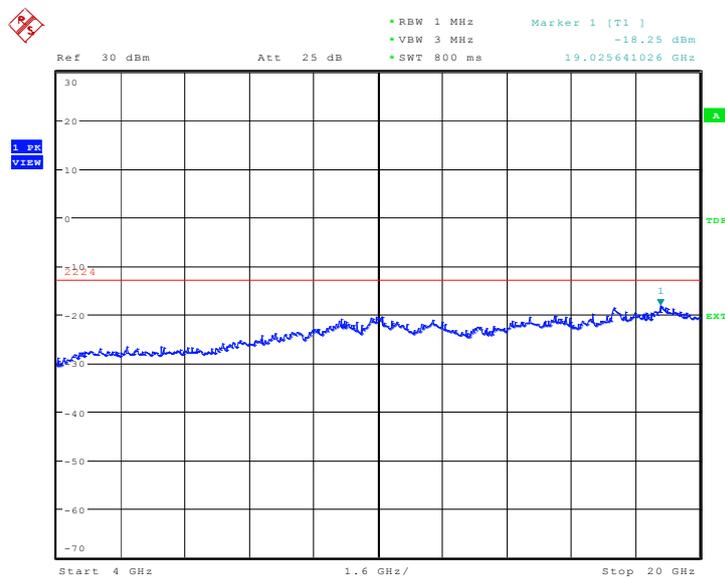


Date: 11.AUG.2010 02:47:11

**A.7.3.7 Idle mode: 30MHz – 4GHz**  
Spurious emission limit -13dBm.

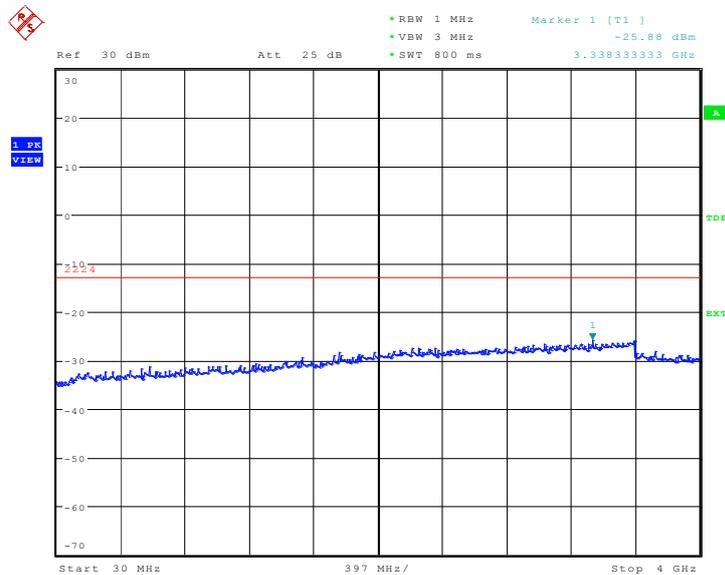

Date: 11.AUG.2010 02:47:39

**A. 7.3.8 Idle mode: 4GHz – 20GHz**  
Spurious emission limit -13dBm.

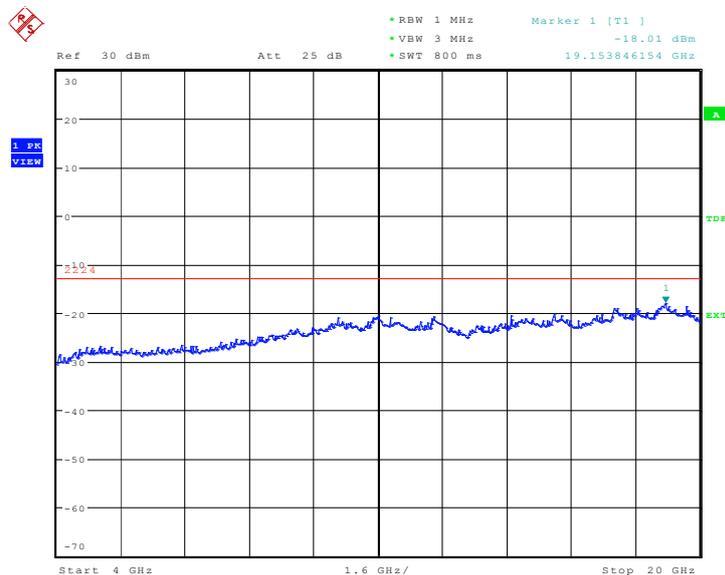


Date: 11.AUG.2010 02:48:05

**WCDMA Band V**

**A. 7.3.9 Channel 4132: 30MHz – 4GHz**

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

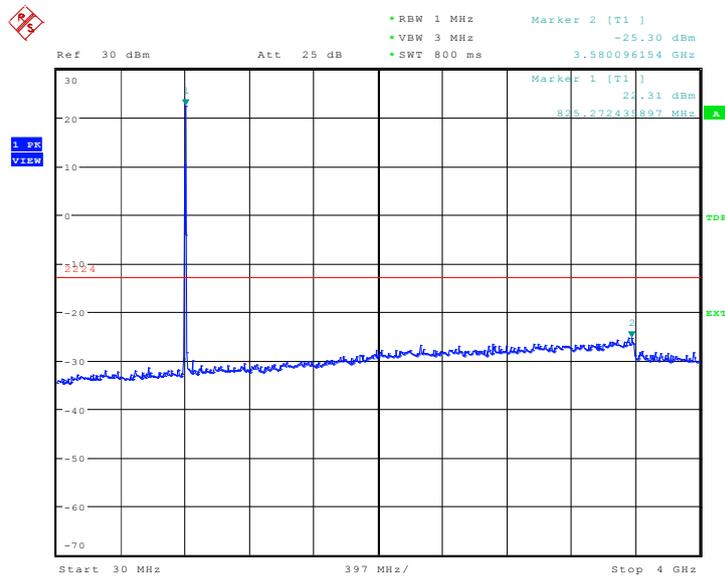

Date: 11.AUG.2010 03:02:45

**A. 7.3.10 Channel 4132: 4GHz – 10GHz**

Spurious emission limit –13dBm.

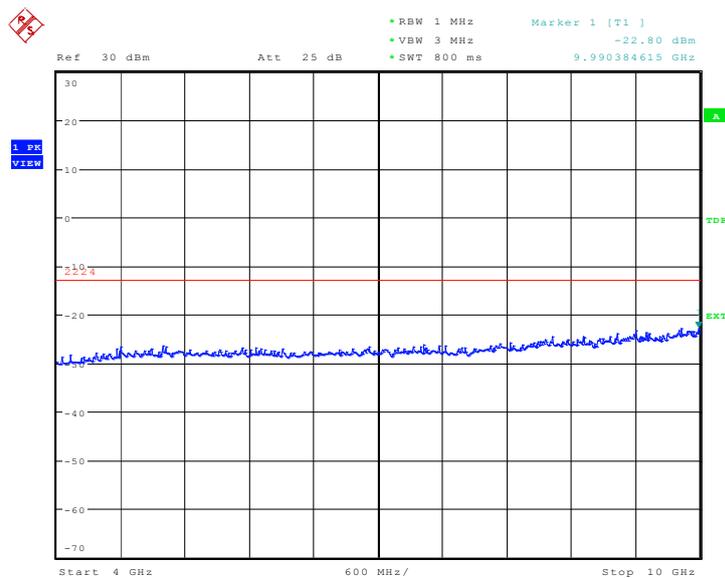


Date: 11.AUG.2010 03:03:12

**A. 7.3.11 Channel 4183: 30MHz – 4GHz**

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

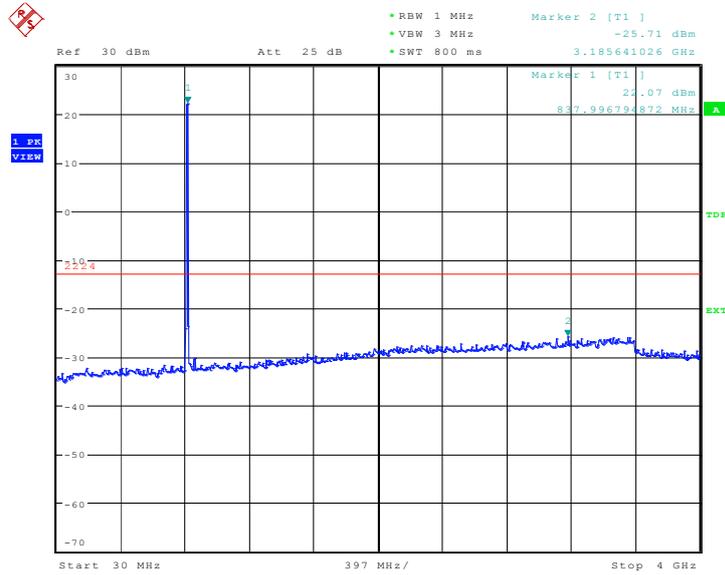

Date: 11.AUG.2010 03:03:41

**A. 7.3.12 Channel 4183:4GHz – 10GHz**

Spurious emission limit –13dBm.

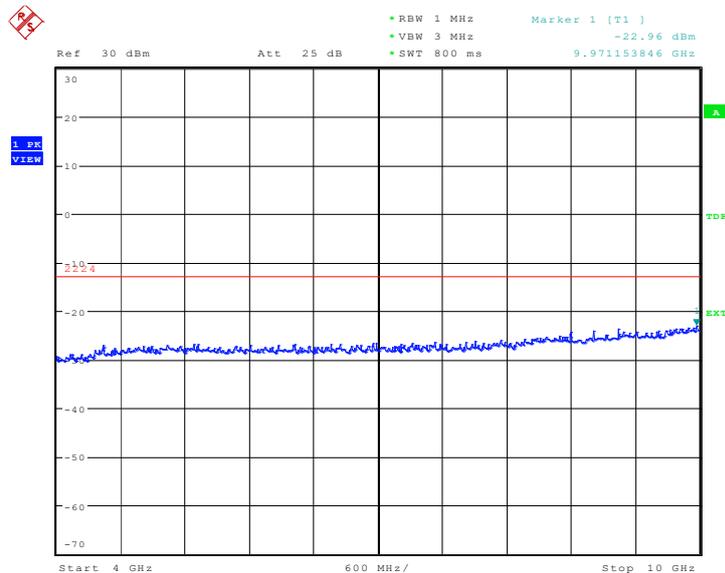


Date: 11.AUG.2010 03:04:08

### A.7.3.13 Channel 4233: 30MHz – 4GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

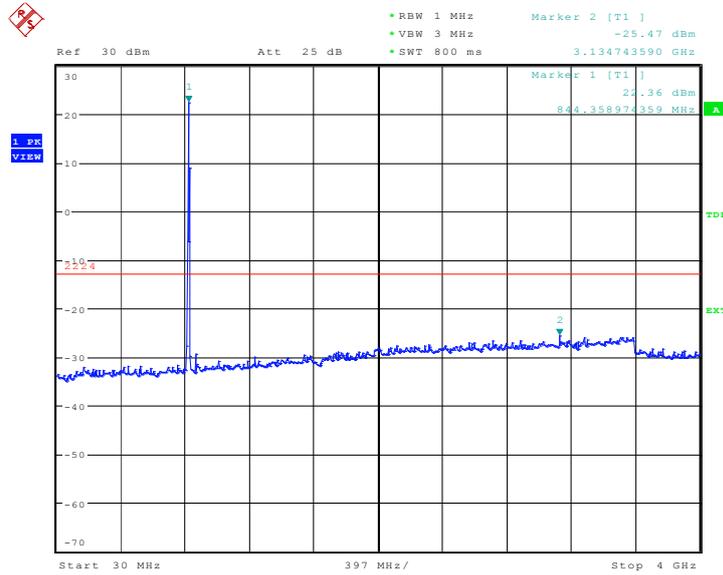

Date: 11.AUG.2010 03:04:37


### A. 7.3.14 Channel 4233: 4GHz – 10GHz

Spurious emission limit –13dBm.

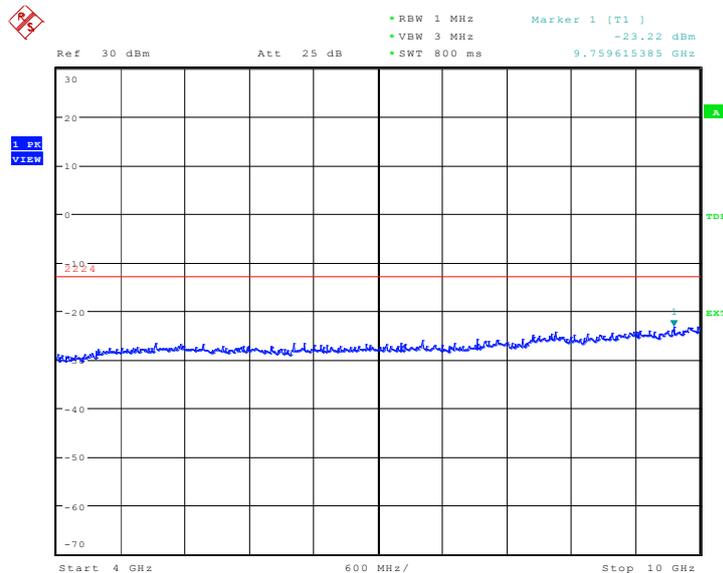


Date: 11.AUG.2010 03:05:04

**A. 7.3.15 Idle mode: 30MHz – 4GHz**  
Spurious emission limit -13dBm.

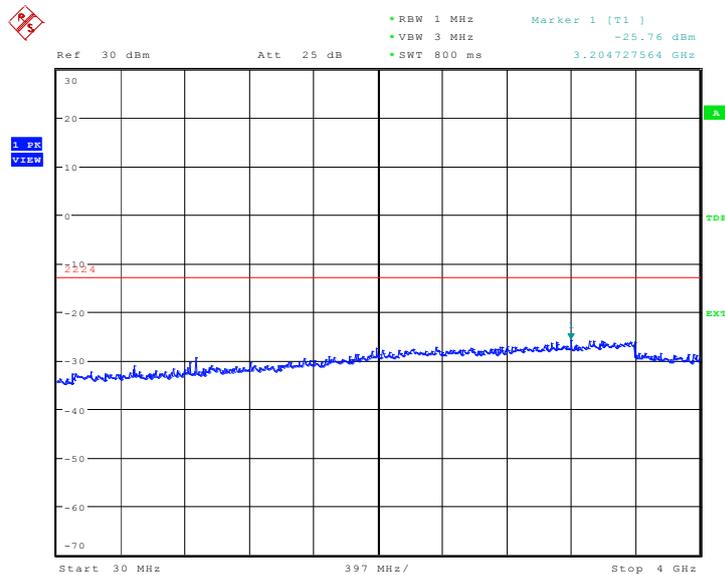

Date: 11.AUG.2010 03:05:32

**A.7.3.16 Idle mode: 4GHz – 10GHz**  
Spurious emission limit -13dBm.

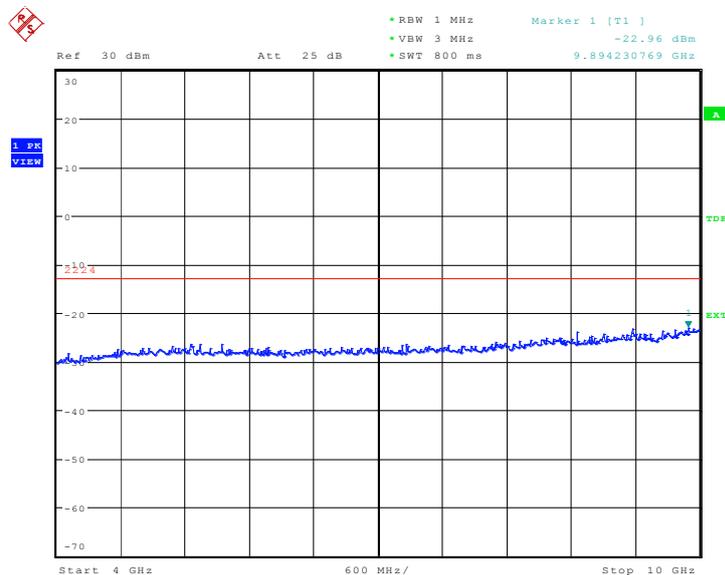

Date: 11.AUG.2010 03:05:58

\*\*\*END OF REPORT\*\*\*

