

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : Mobile Broadband Internet Device
BRAND NAME : ZTE
MODEL NAME : ZTE V72
FCC ID : Q78-ZTEV72
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Feb. 20, 2013 and completely tested on Apr. 07, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Testing Site..... 6

 1.6 Applied Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency Channel 7

 2.2 Pre-Scanned RF Power..... 8

 2.3 Test Mode..... 9

 2.4 Connection Diagram of Test System..... 10

 2.5 Support Unit used in test configuration and system 11

 2.6 RF Utility 11

 2.7 Measurement Results Explanation Example..... 11

3 TEST RESULT..... 12

 3.1 6dB Bandwidth Measurement 12

 3.2 Output Power Measurement..... 21

 3.3 Power Spectral Density Measurement 24

 3.4 Conducted Band Edges and Spurious Emission Measurement 39

 3.5 Radiated Emission Measurement..... 56

 3.6 AC Conducted Emission Measurement..... 80

 3.7 Antenna Requirements..... 84

4 LIST OF MEASURING EQUIPMENT 85

5 UNCERTAINTY OF EVALUATION 86

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	-
			Radiated Spurious Emission		Pass	Under limit 1.05 dB at 2485.630 MHz
3.6	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 11.89 dB at 0.480 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Broadband Internet Device
Brand Name	ZTE
Model Name	ZTE V72
FCC ID	Q78-ZTEV72
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/WLAN11bgn/ Bluetooth/Bluetooth4.0 - LE
HW Version	d75A
SW Version	ZTE-CN-QB125S-V72V1.0.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 11.55 dBm (0.0143 W) 802.11g : 21.91 dBm (0.1552 W) 802.11n HT20 : 20.68 dBm (0.1169 W) 802.11n HT40 : 19.82 dBm (0.0959 W)
Antenna Type	PIFA Antenna type with gain 1.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH07-HY	722060/4086B-1

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH01-KS	CO01-KS	149928/4086E-1

The test site complies with ANSI C63.4 2003 requirement.

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	11.55	11.29	11.38	11.3
CH 06	2437 MHz	11.53	11.28	11.32	11.44
CH 11	2462 MHz	11.23	11.22	11.14	11.29

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	21.91	21.53	21.49	21.38	21.44	21.28	21.5	21.57
CH 06	2437 MHz	21.01	20.55	20.49	20.52	20.26	20.18	20.09	20.16
CH 11	2462 MHz	19.89	19.32	19.28	19.4	19.3	19.15	19.13	19.51

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	20.68	20.61	20.66	20.65	20.67	20.58	20.61	20.62
CH 06	2437 MHz	19.99	19.97	19.92	19.9	19.97	19.98	19.93	19.96
CH 11	2462 MHz	19.35	19.26	19.24	19.32	19.34	19.18	19.16	19.34

Channel	Frequency	2.4GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	19.82	19.61	19.66	19.76	19.79	19.8	19.46	19.8
CH 06	2437 MHz	19.6	19.41	19.53	19.53	19.43	19.51	19.45	19.51
CH 09	2452 MHz	19.3	19.13	19.28	19.19	19.28	19.2	19.25	19.19


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
AC Conducted Emission	Mode 1 : GPRS850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

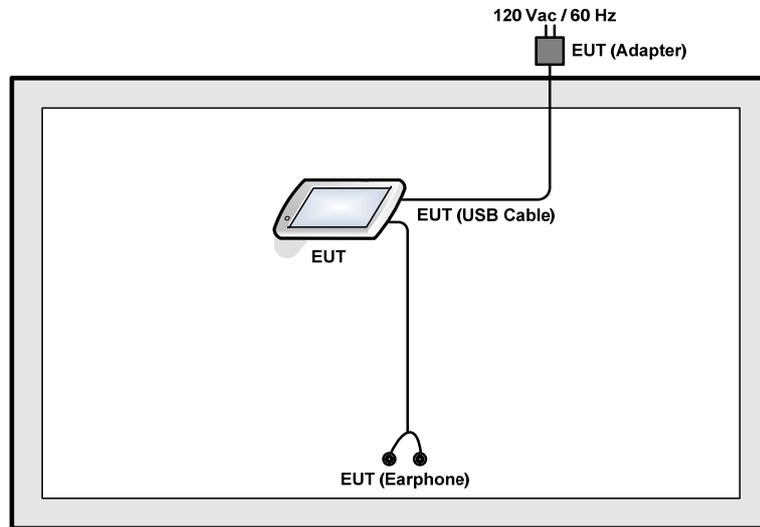

<AC Conducted Emission Mode>

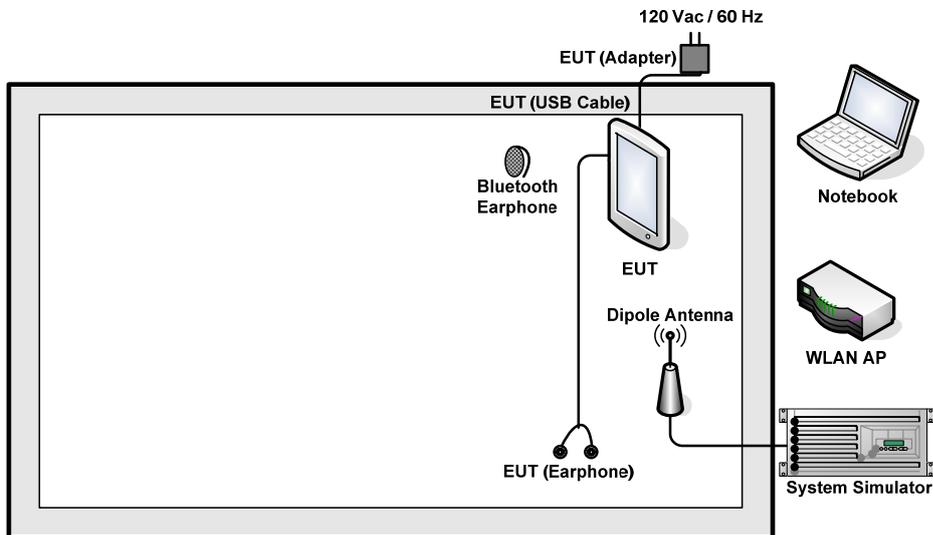

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.6 RF Utility

For WLAN function, key in “* # * # 3646633 # * # *” on the EUT directly. Then, the EUT will get into the engineering modes to contact with WLAN AP for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.6 + 10 = 15.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

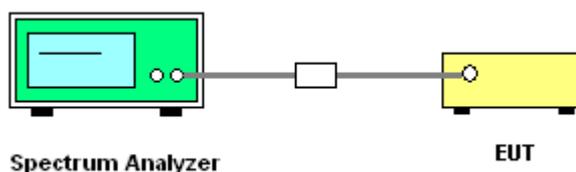




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	10.04	0.5	Pass
06	2437	10.04	0.5	Pass
11	2462	10.04	0.5	Pass


6 dB Bandwidth Plot on 802.11b Channel 01

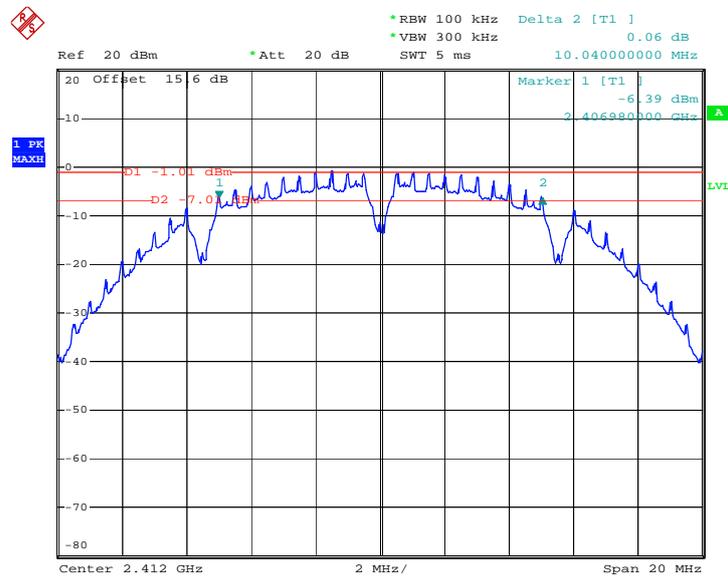

Date: 29.MAR.2013 08:02:30




6 dB Bandwidth Plot on 802.11b Channel 06

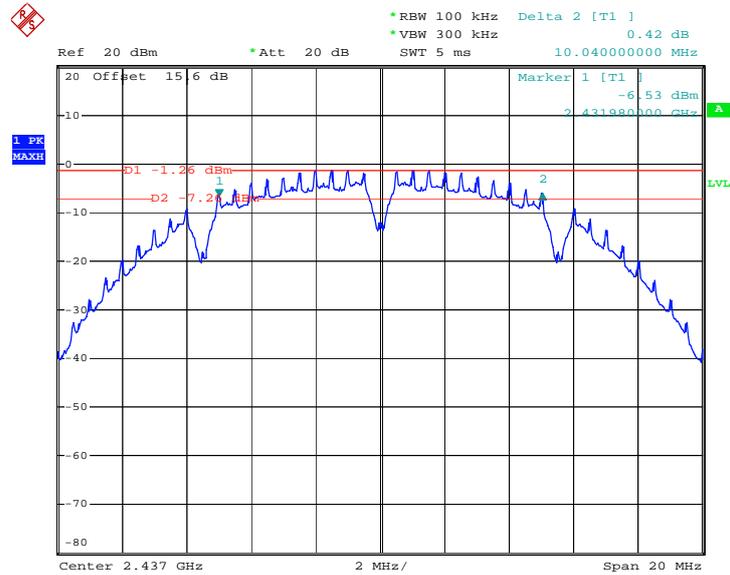

Date: 29.MAR.2013 08:08:04

6 dB Bandwidth Plot on 802.11b Channel 11

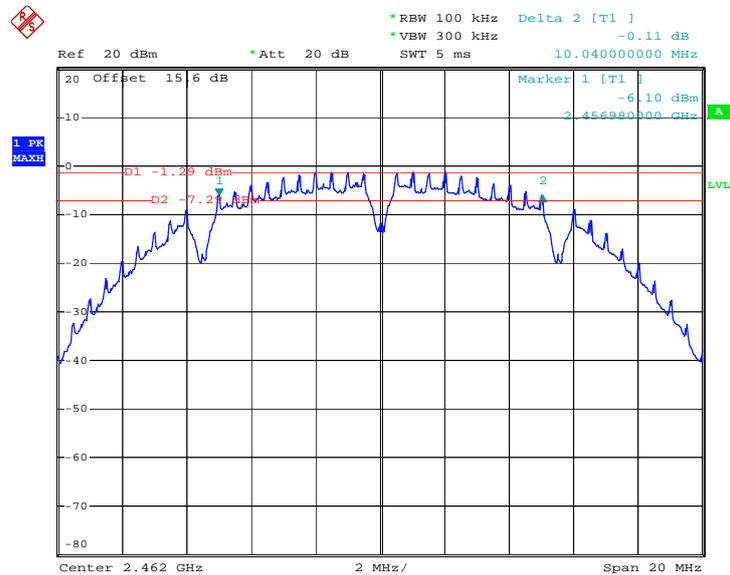


Date: 29.MAR.2013 08:12:37



Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.80	0.5	Pass
06	2437	16.28	0.5	Pass
11	2462	16.04	0.5	Pass


6 dB Bandwidth Plot on 802.11g Channel 01

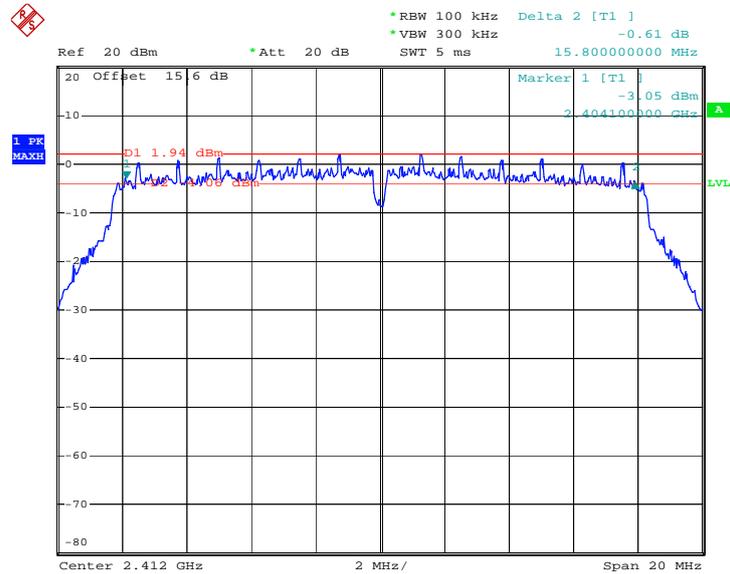

Date: 12.MAR.2013 11:49:03




6 dB Bandwidth Plot on 802.11g Channel 06

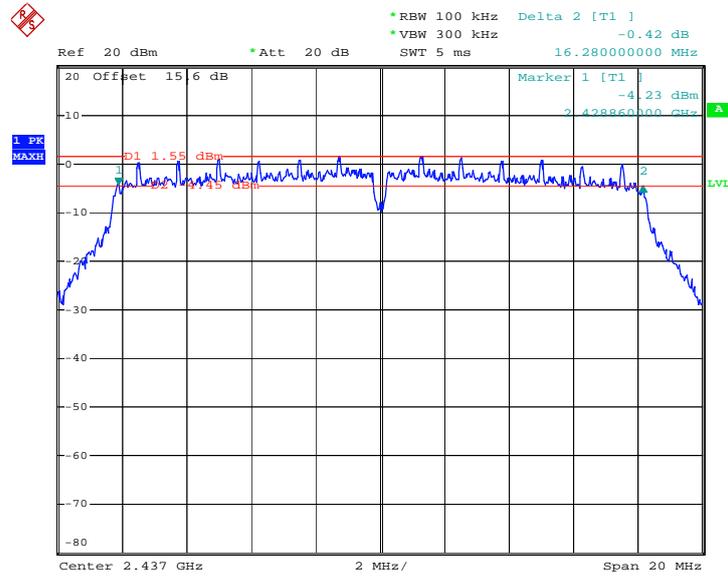

Date: 12.MAR.2013 11:55:27


6 dB Bandwidth Plot on 802.11g Channel 11

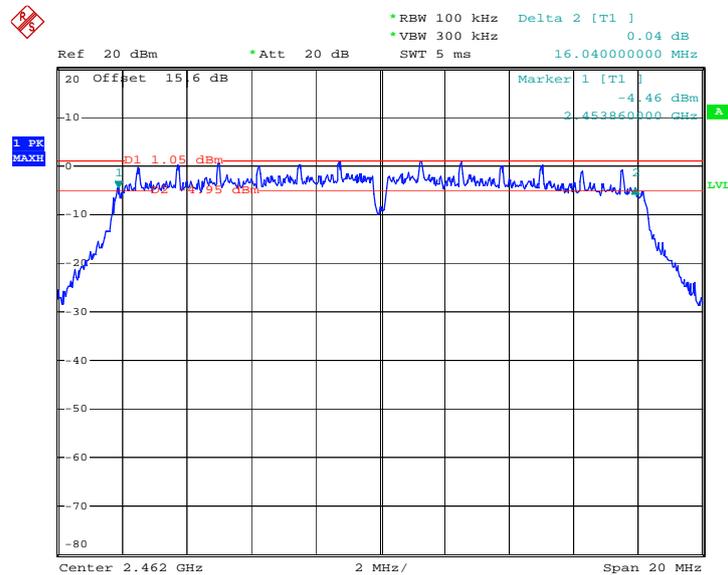

Date: 12.MAR.2013 11:58:00




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

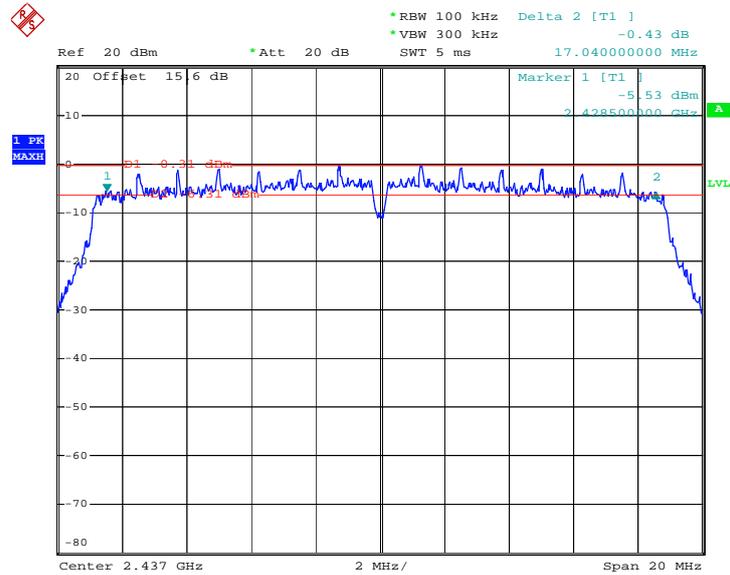

Date: 29.MAR.2013 08:24:56

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

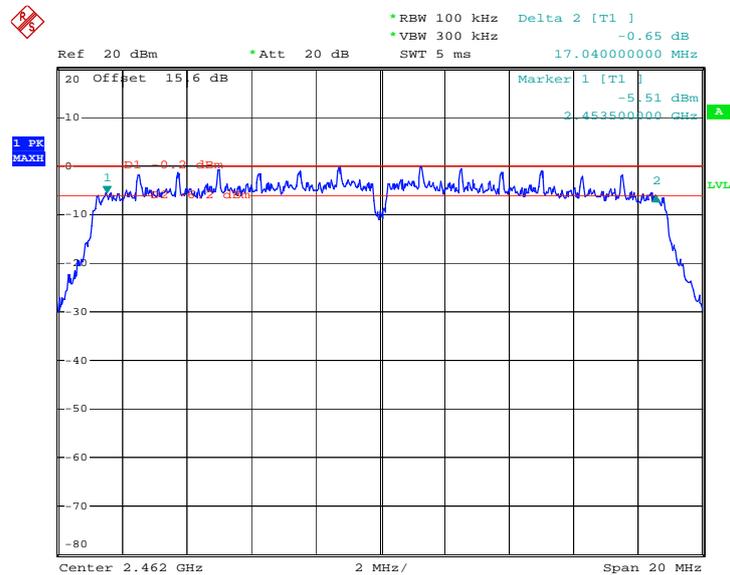


Date: 29.MAR.2013 08:31:57



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT40 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
03	2422	35.20	0.5	Pass
06	2437	35.28	0.5	Pass
09	2452	35.52	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT40 Channel 03

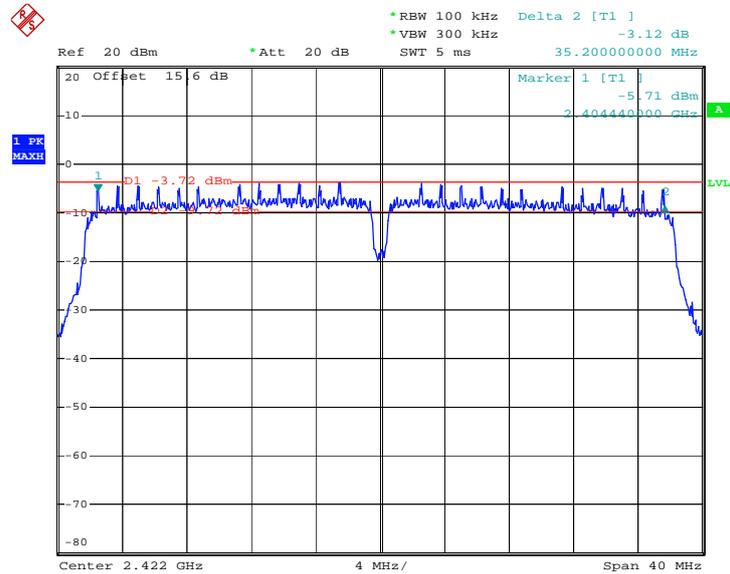

Date: 29.MAR.2013 08:39:35




6 dB Bandwidth Plot on 802.11n HT40 Channel 06

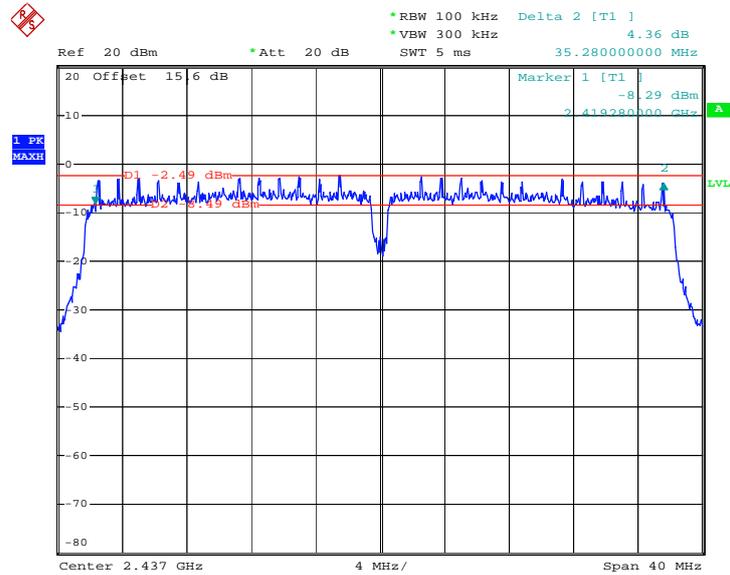

Date: 29.MAR.2013 08:53:33

6 dB Bandwidth Plot on 802.11n HT40Channel 09

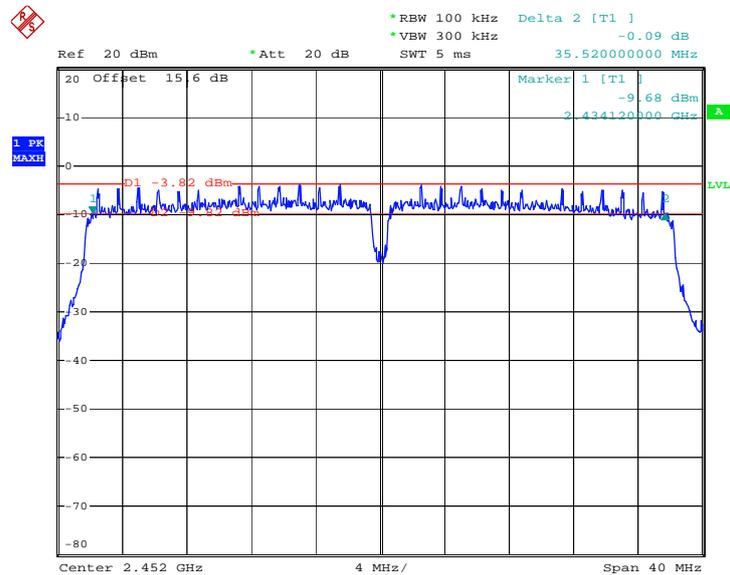

Date: 29.MAR.2013 08:49:01

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

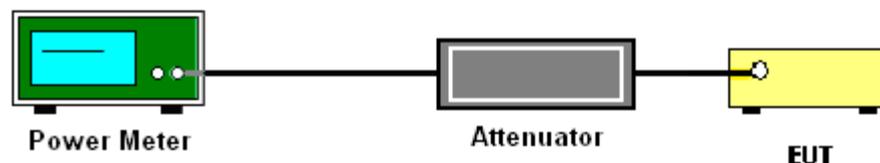

3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	11.55	30	Pass
06	2437	11.53	30	Pass
11	2462	11.23	30	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.91	30	Pass
06	2437	21.01	30	Pass
11	2462	19.89	30	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	20.68	30	Pass
06	2437	19.99	30	Pass
11	2462	19.35	30	Pass

Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT40 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
03	2422	19.82	30	Pass
06	2437	19.6	30	Pass
09	2452	19.3	30	Pass



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	99.06%	Duty Factor:	0.04dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	9.30
06	2437	9.22
11	2462	9.13

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	92.67%	Duty Factor:	2.03dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	14.09
06	2437	13.62
11	2462	13.26

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	91.80%	Duty Factor:	0.37dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	12.38
06	2437	12.19
11	2462	12.16

Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	86.09%	Duty Factor:	0.65dB

Channel	Frequency (MHz)	802.11n HT40 Average Output Power (dBm)
03	2422	11.28
06	2437	11.25
09	2452	11.23

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

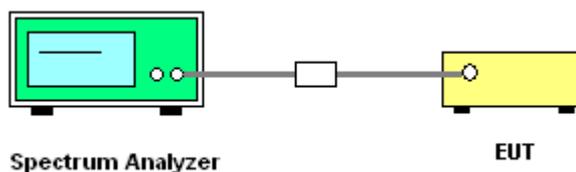

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-1.01	-13.57	8	Pass
06	2437	-1.68	-15.87	8	Pass
11	2462	-1.79	-15.77	8	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	1.96	-11.67	8	Pass
06	2437	1.07	-11.25	8	Pass
11	2462	0.97	-11.91	8	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-0.27	-13.17	8	Pass
06	2437	-0.85	-15.23	8	Pass
11	2462	-0.64	-14.18	8	Pass



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT40 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
03	2422	-4.16	-19.21	8	Pass
06	2437	-3.82	-17.23	8	Pass
09	2452	-3.71	-18.51	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on 802.11b Channel 01

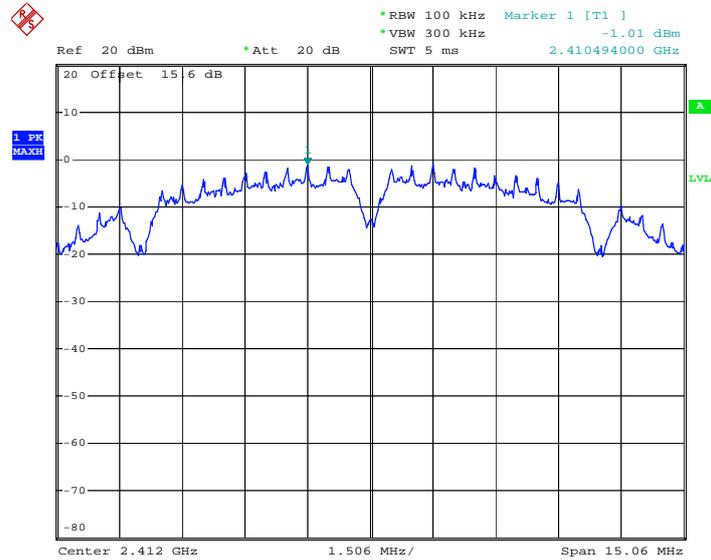

Date: 29.MAR.2013 08:03:41


PSD 100kHz Plot on 802.11b Channel 06

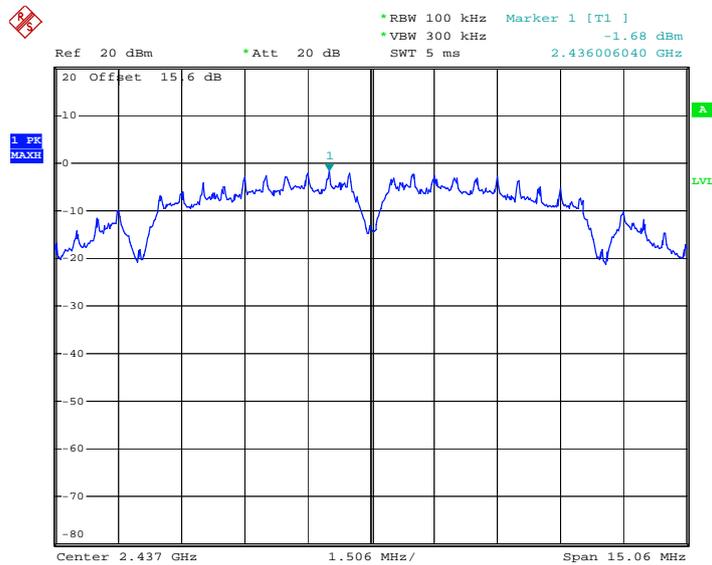

Date: 29.MAR.2013 08:08:35




PSD 100kHz Plot on 802.11b Channel 11

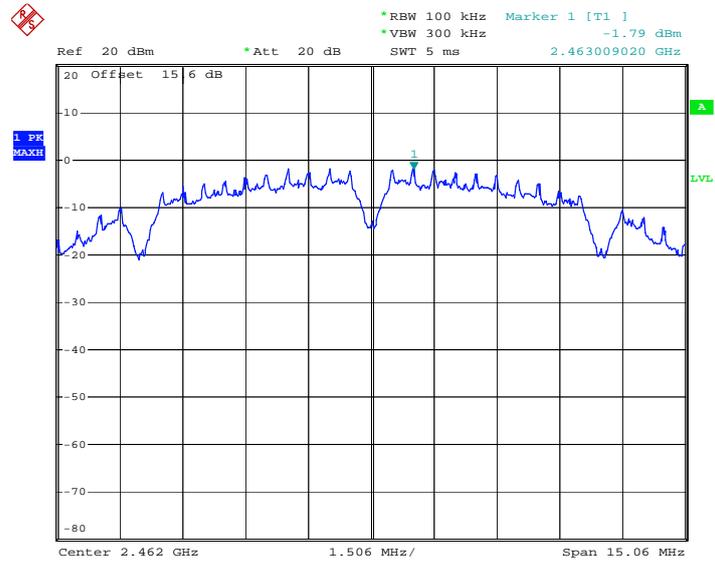

Date: 29.MAR.2013 08:13:06


PSD 100kHz Plot on 802.11g Channel 01

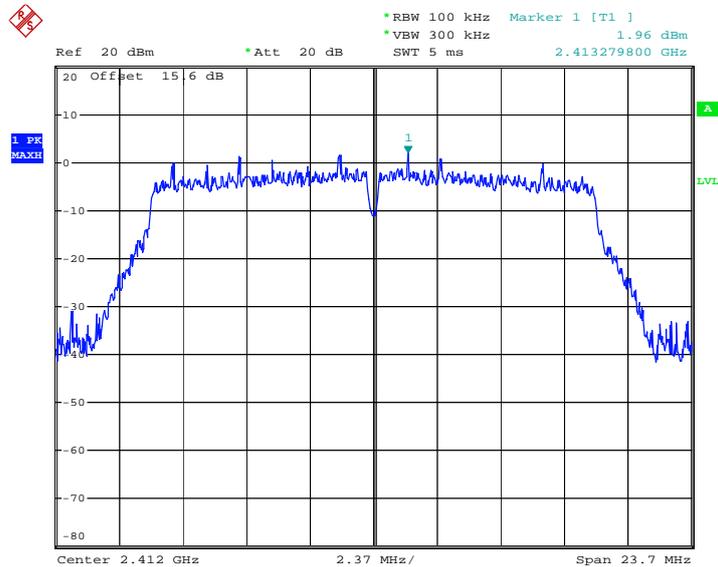

Date: 12.MAR.2013 11:49:34




PSD 100kHz Plot on 802.11g Channel 06

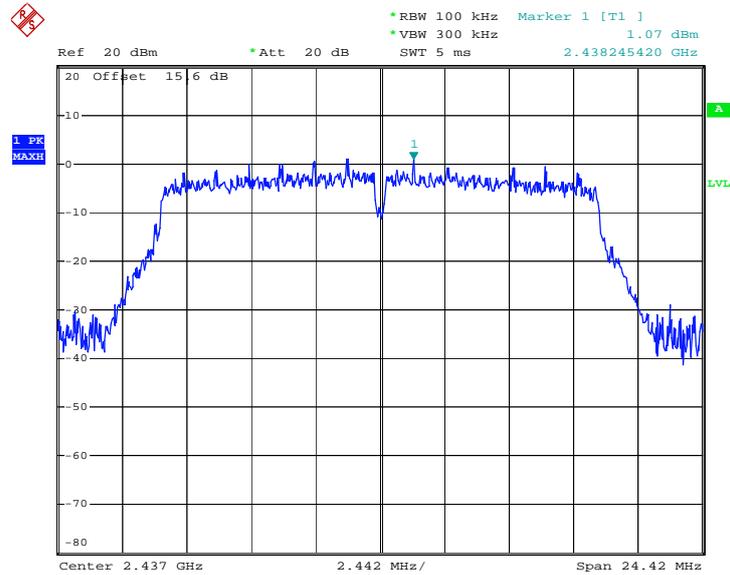

Date: 12.MAR.2013 11:55:57


PSD 100kHz Plot on 802.11g Channel 11

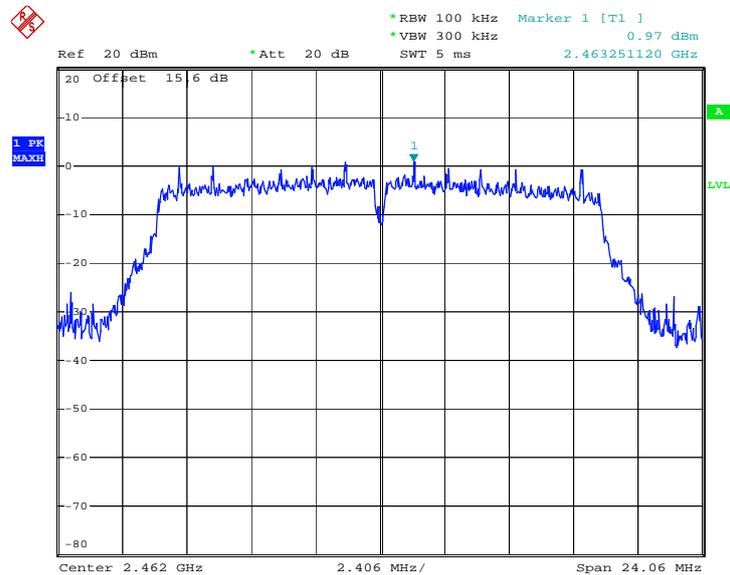

Date: 12.MAR.2013 11:58:31




PSD 100kHz Plot on 802.11n HT20 Channel 01

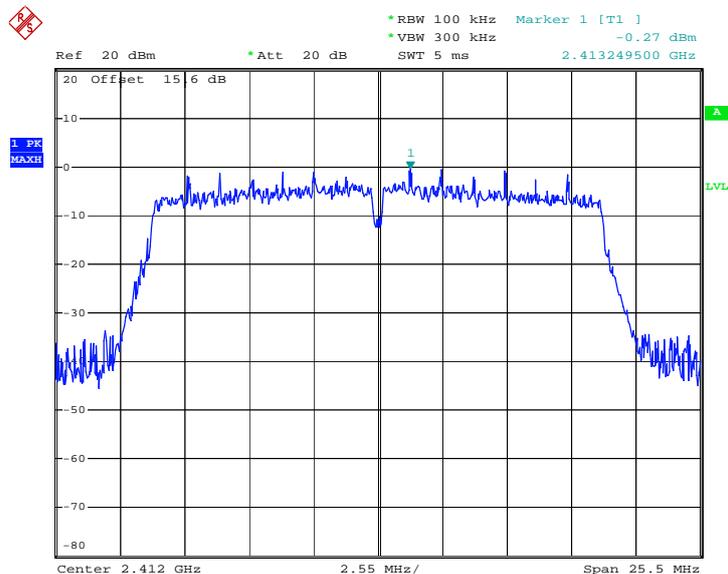

Date: 29.MAR.2013 08:19:21


PSD 100kHz Plot on 802.11n HT20 Channel 06

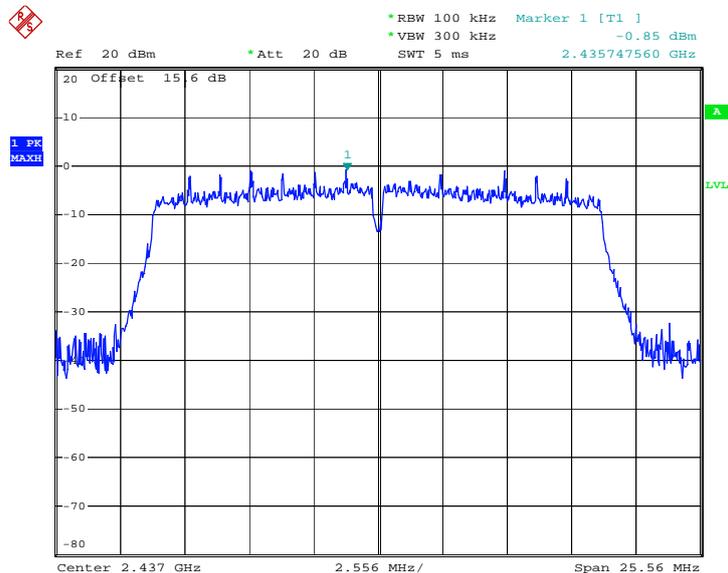

Date: 29.MAR.2013 08:26:19




PSD 100kHz Plot on 802.11n HT20 Channel 11

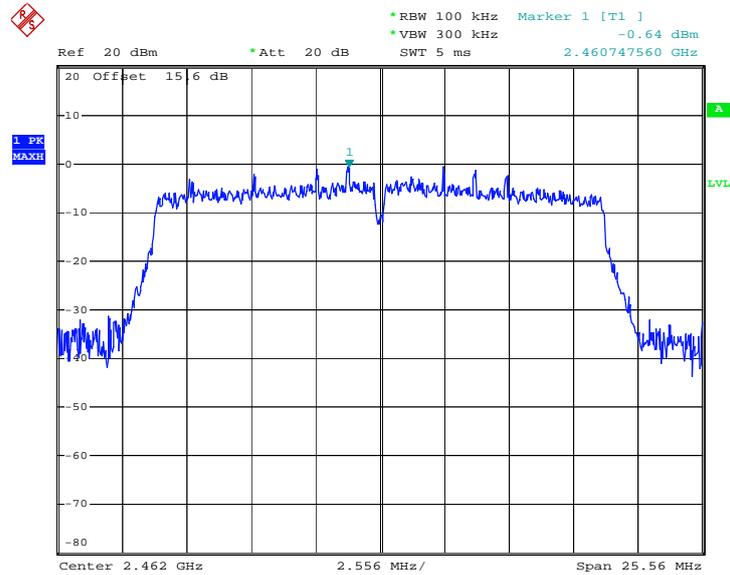

Date: 29.MAR.2013 08:33:04


PSD 100kHz Plot on 802.11n HT40 Channel 03

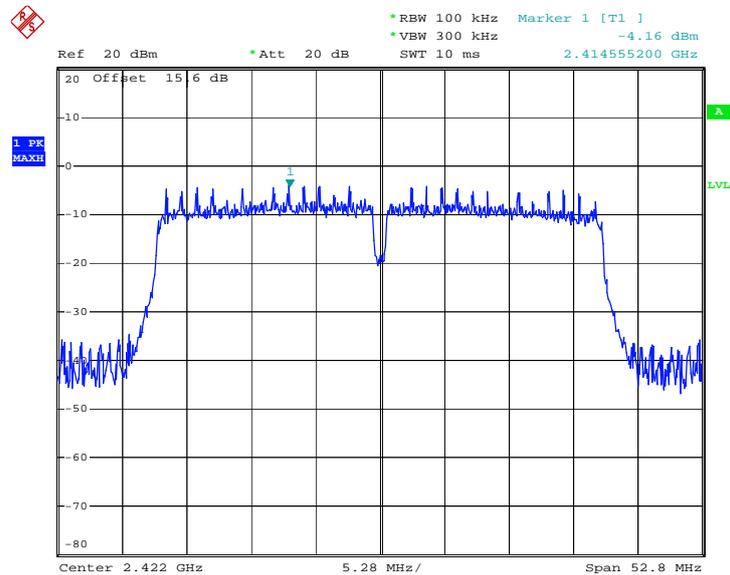

Date: 29.MAR.2013 08:41:01




PSD 100kHz Plot on 802.11n HT40 Channel 06

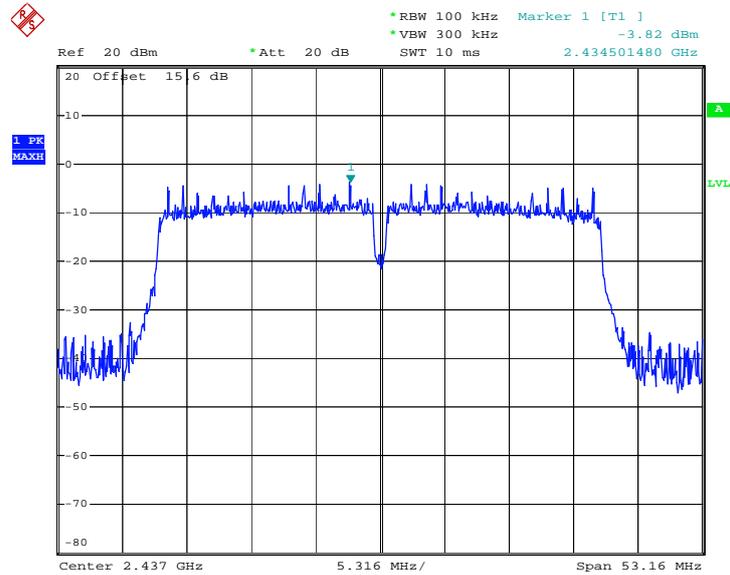

Date: 29.MAR.2013 08:45:50

PSD 100kHz Plot on 802.11n HT40 Channel 09

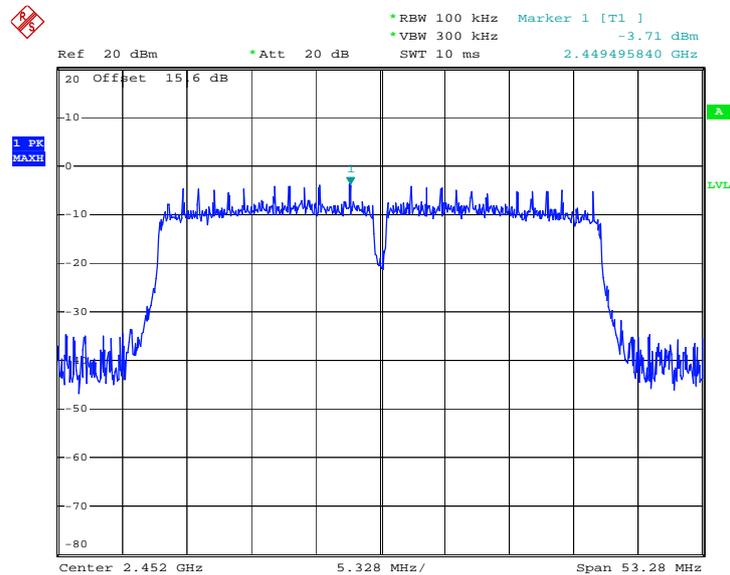


Date: 29.MAR.2013 08:49:36




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on 802.11b Channel 01

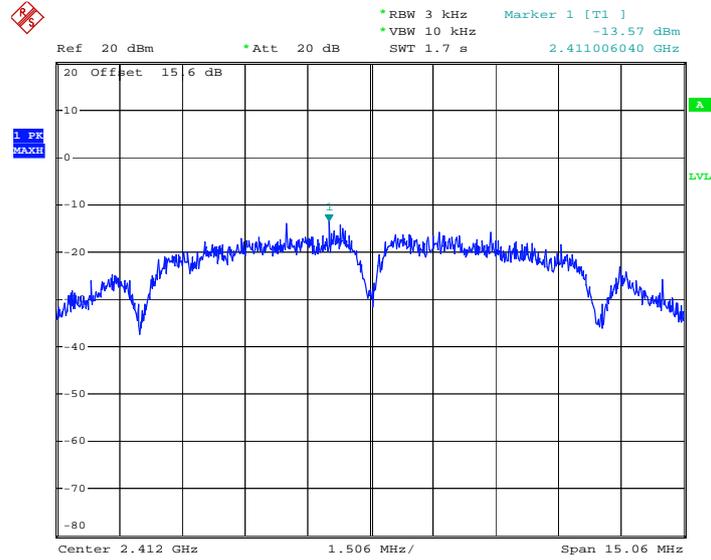

Date: 29.MAR.2013 08:03:14


PSD 3kHz Plot on 802.11b Channel 06

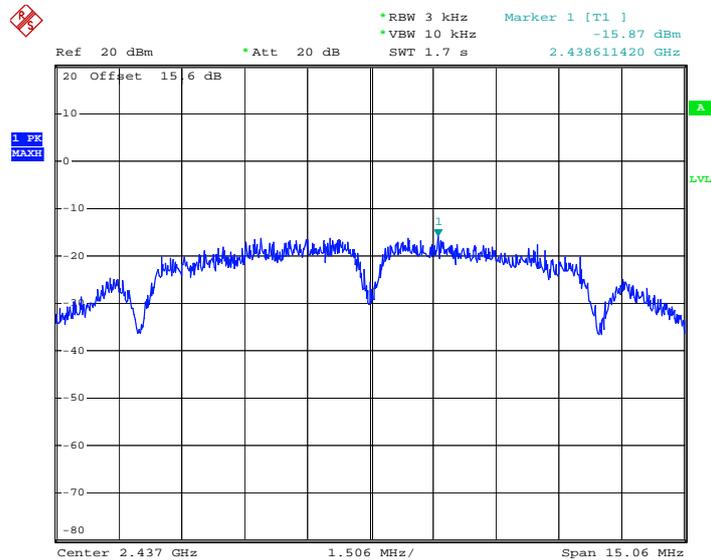

Date: 29.MAR.2013 08:08:27




PSD 3kHz Plot on 802.11b Channel 11

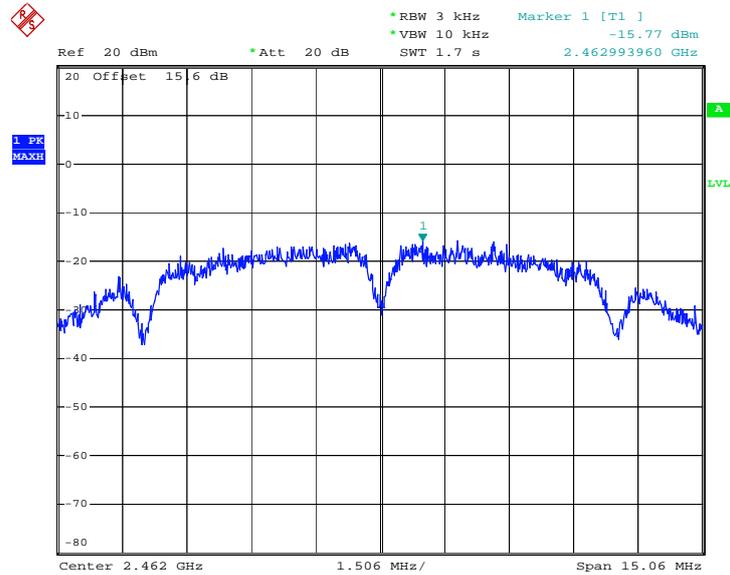

Date: 29.MAR.2013 08:12:58


PSD 3kHz Plot on 802.11g Channel 01

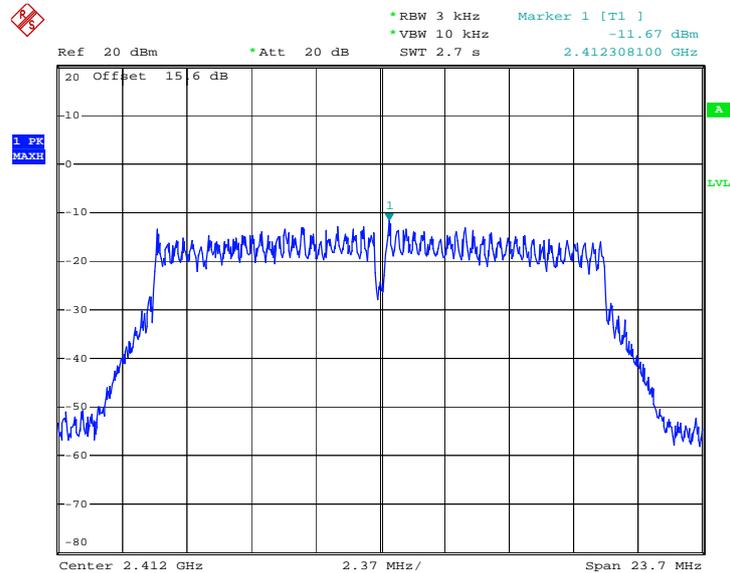

Date: 12.MAR.2013 11:49:24




PSD 3kHz Plot on 802.11g Channel 06

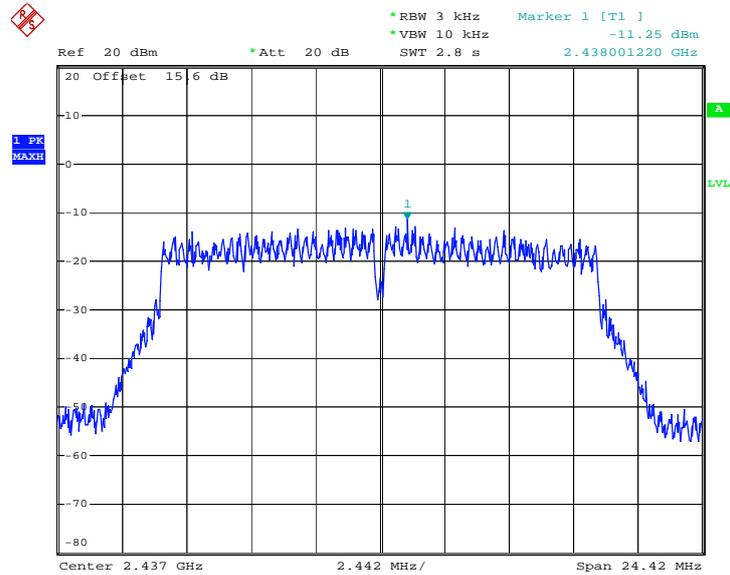

Date: 12.MAR.2013 11:55:47


PSD 3kHz Plot on 802.11g Channel 11

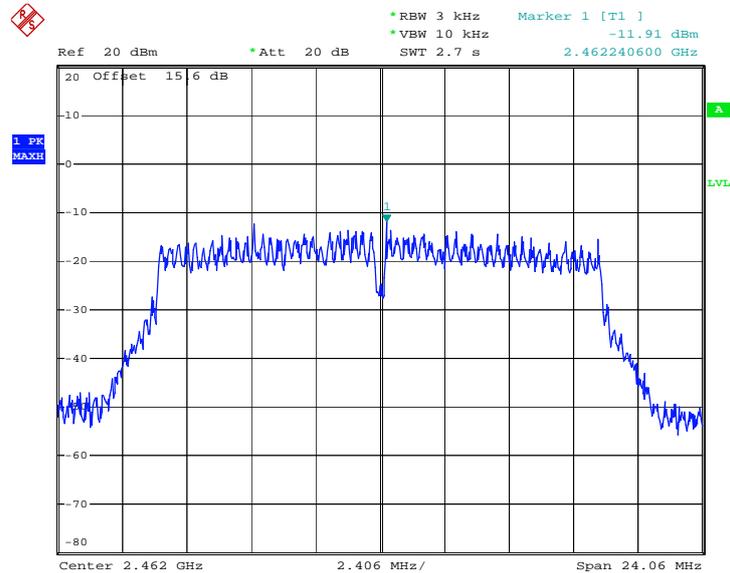

Date: 12.MAR.2013 11:58:21




PSD 3kHz Plot on 802.11n HT20 Channel 01

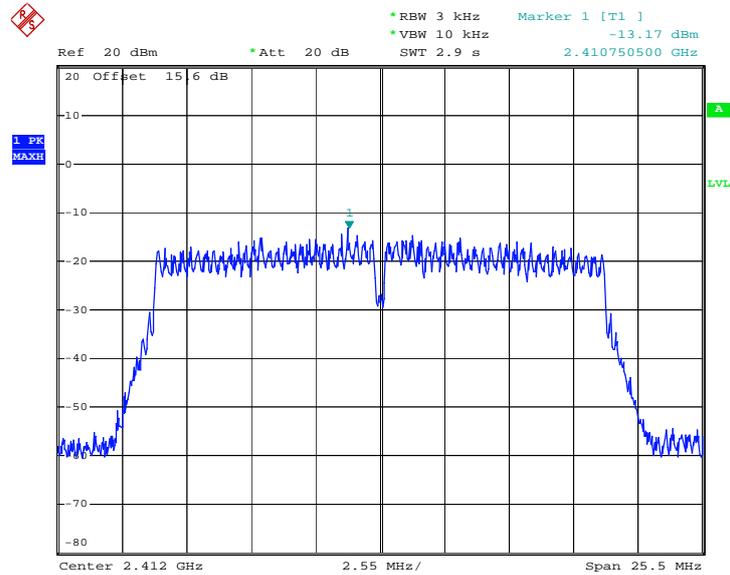

Date: 29.MAR.2013 08:19:15


PSD 3kHz Plot on 802.11n HT20 Channel 06

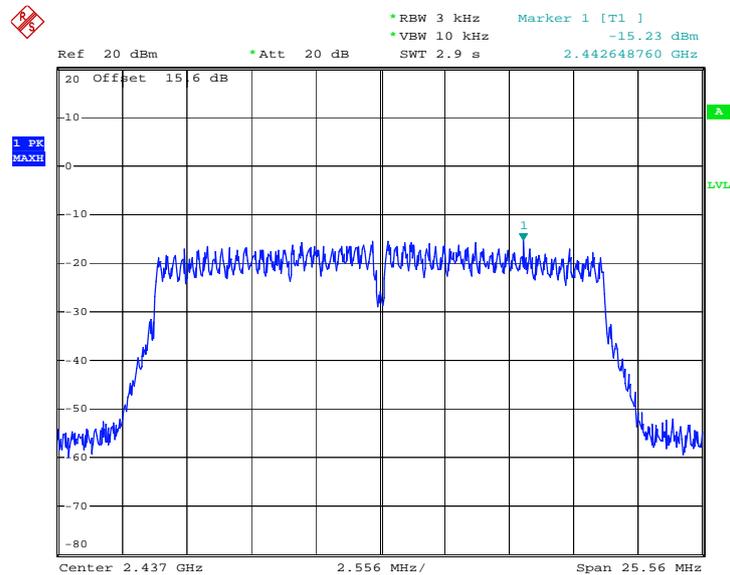

Date: 29.MAR.2013 08:25:18




PSD 3kHz Plot on 802.11n HT20 Channel 11

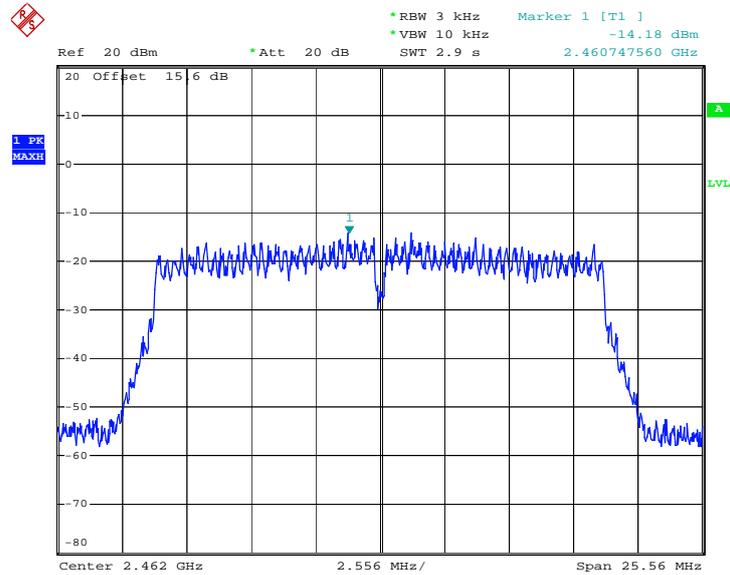

Date: 29.MAR.2013 08:32:25


PSD 3kHz Plot on 802.11n HT40 Channel 03

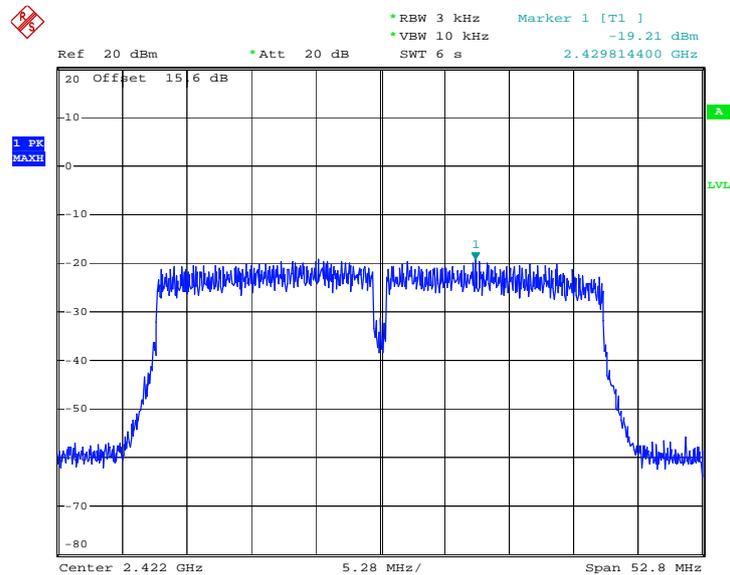

Date: 29.MAR.2013 08:40:00




PSD 3kHz Plot on 802.11n HT40 Channel 06

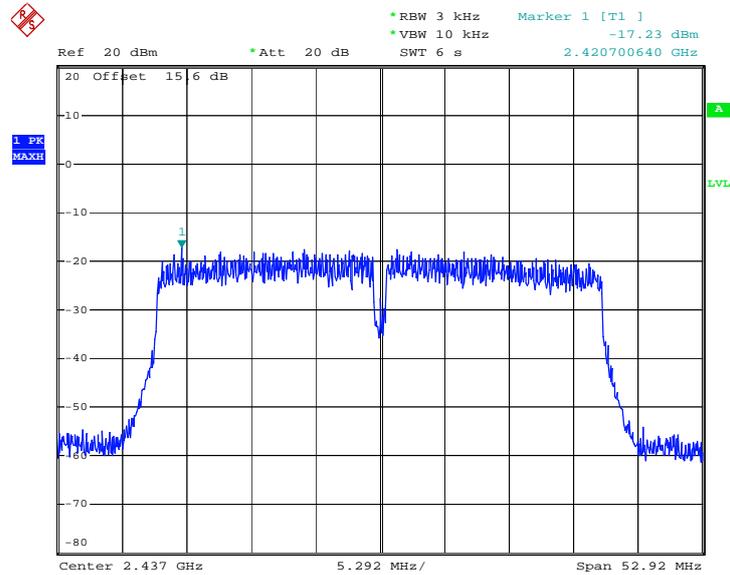

Date: 29.MAR.2013 08:54:07

PSD 3kHz Plot on 802.11n HT40 Channel 09

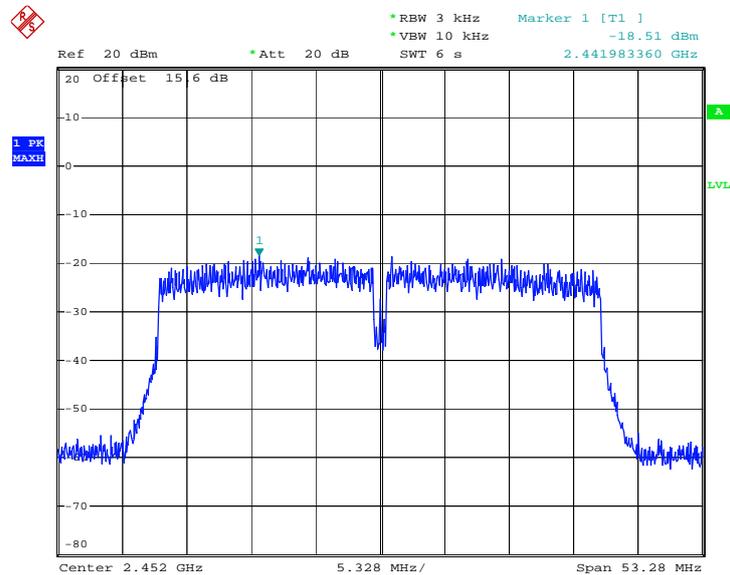

Date: 29.MAR.2013 08:49:28

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
5. Measure and record the results in the test report.

3.4.4 Test Setup

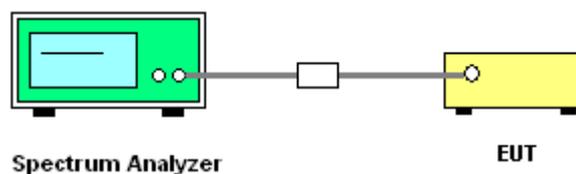




3.4.5 Test Plots of Conducted Band Edges


Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11b Channel 01

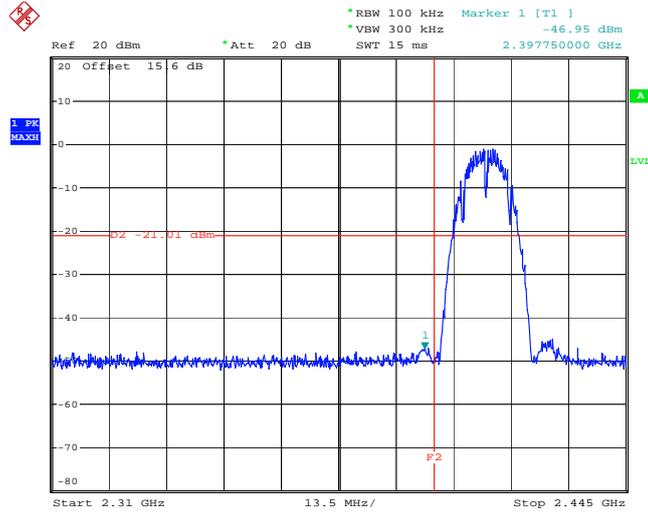

Date: 29.MAR.2013 08:04:21

High Band Edge Plot on 802.11b Channel 11

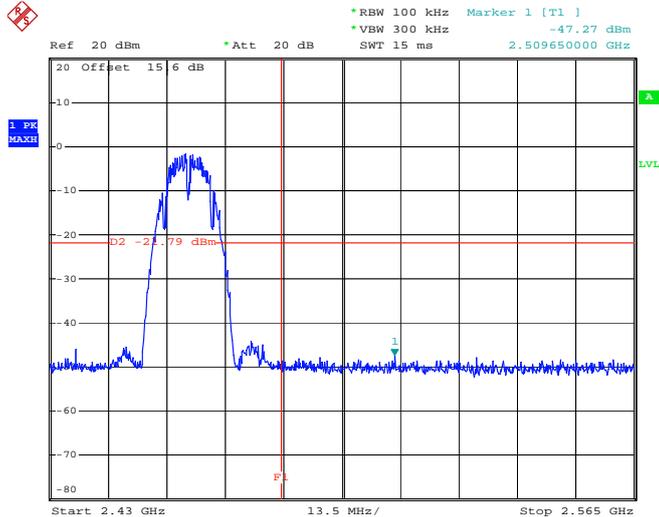


Date: 29.MAR.2013 08:13:31




Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11g Channel 01

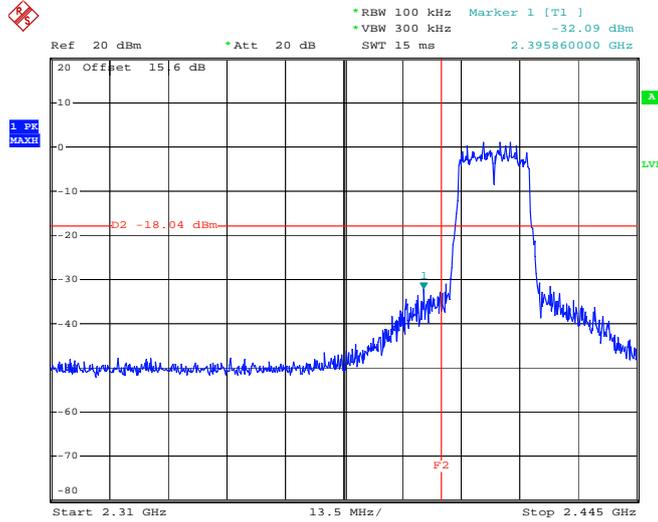

Date: 12.MAR.2013 11:49:50

High Band Edge Plot on 802.11g Channel 11

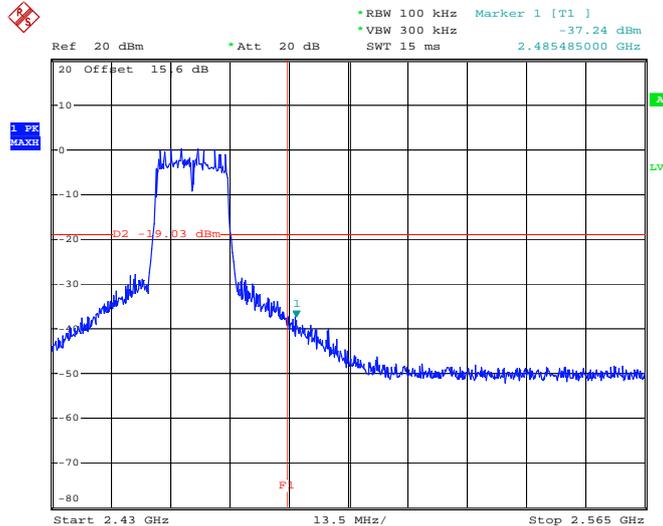


Date: 12.MAR.2013 11:58:47




Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11n HT20 Channel 01

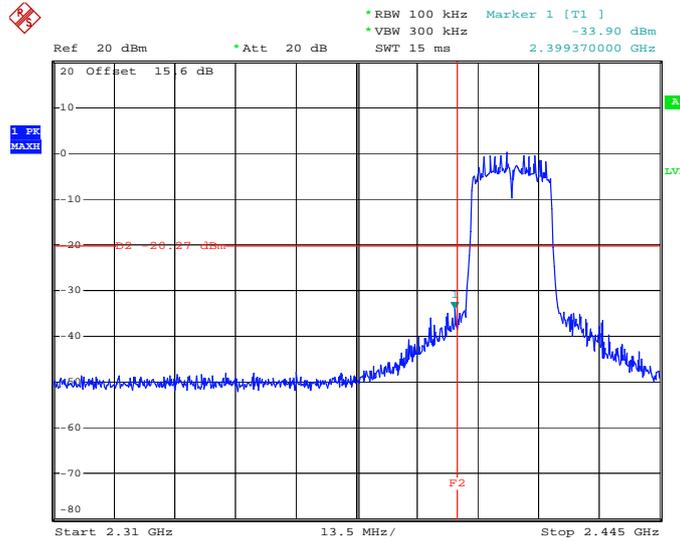

Date: 29.MAR.2013 08:20:32

High Band Edge Plot on 802.11n HT20 Channel 11

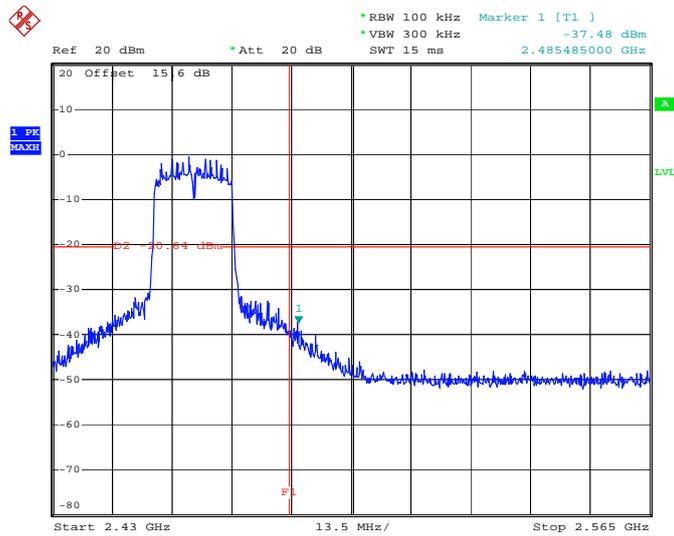


Date: 29.MAR.2013 08:33:53




Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	03 and 09	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11n HT40 Channel 03

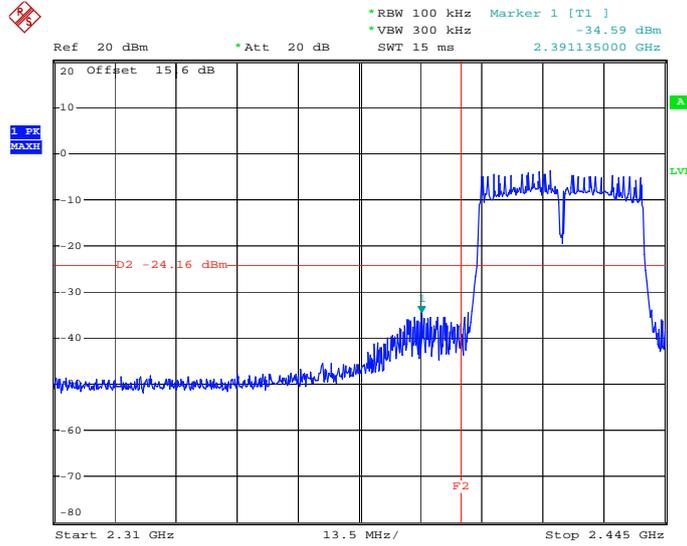

Date: 29.MAR.2013 08:42:10

High Band Edge Plot on 802.11n HT40 Channel 09

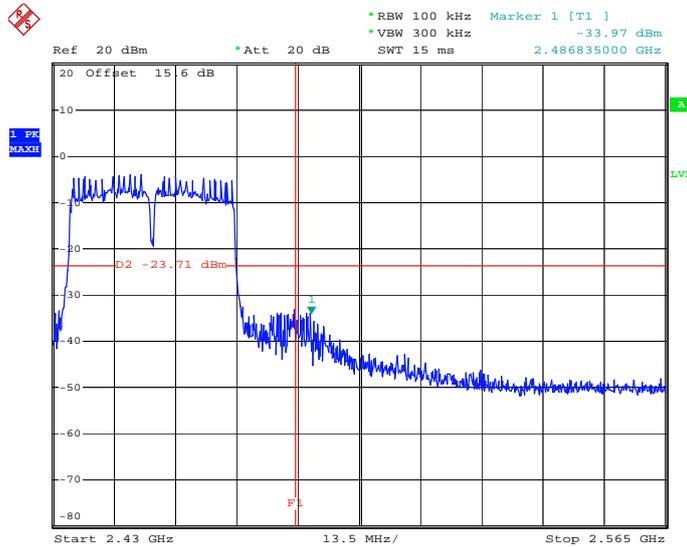


Date: 29.MAR.2013 08:50:25

3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

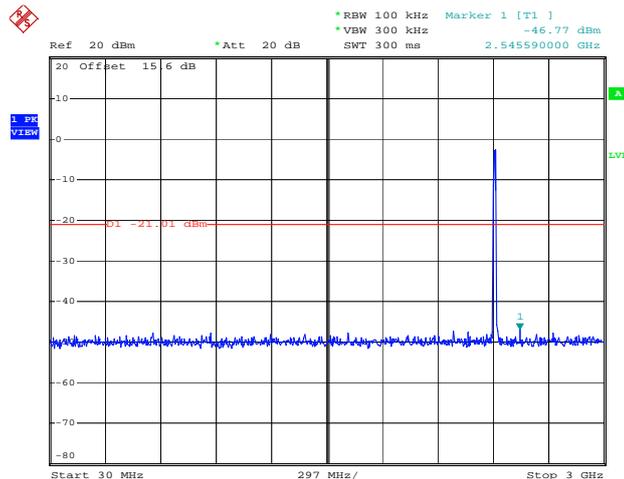

Date: 29.MAR.2013 08:05:43

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

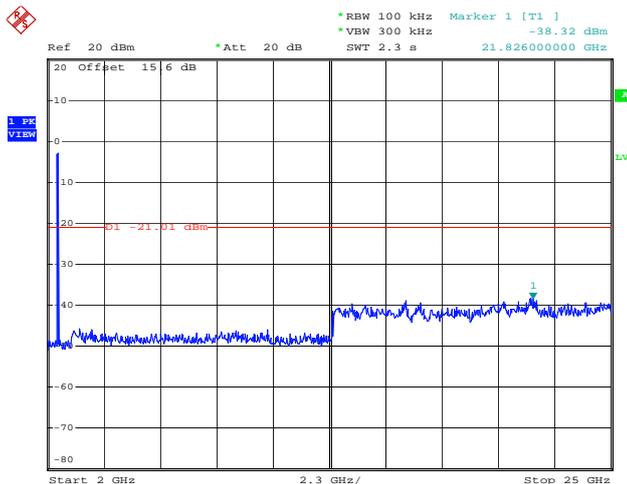


Date: 29.MAR.2013 08:06:01



802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

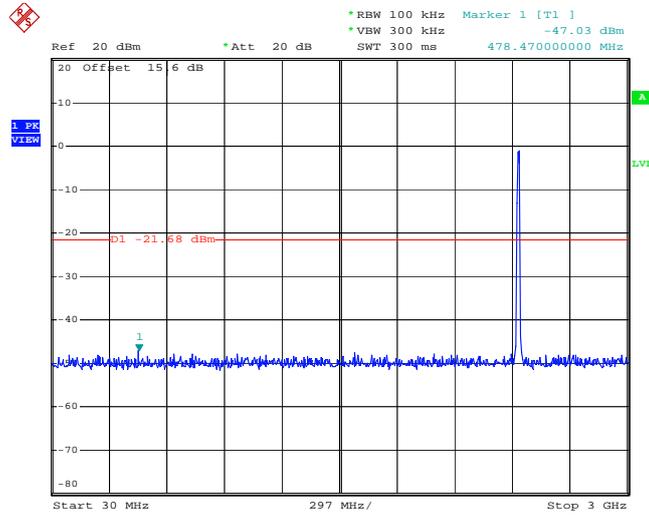

Date: 29.MAR.2013 09:05:24

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

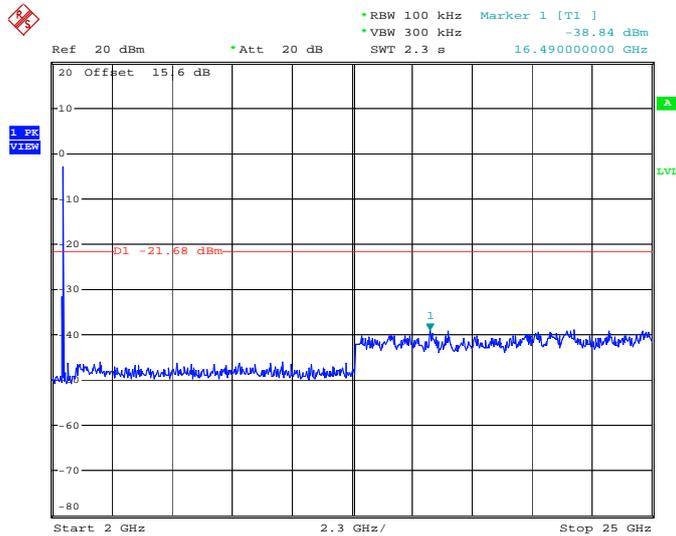


Date: 29.MAR.2013 08:09:46



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

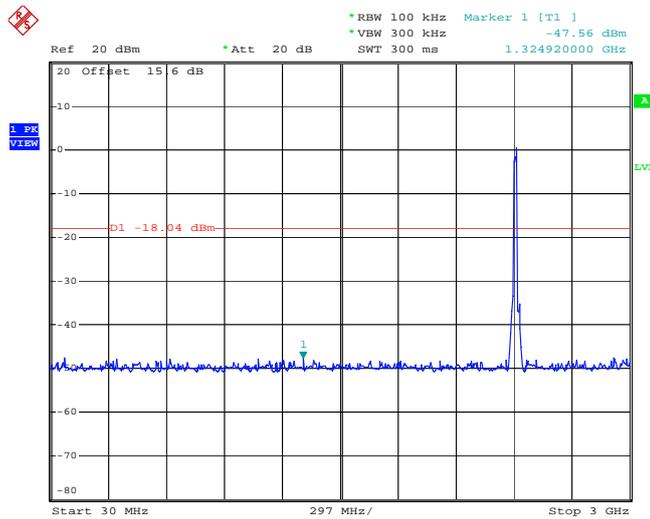

Date: 12.MAR.2013 12:28:53

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

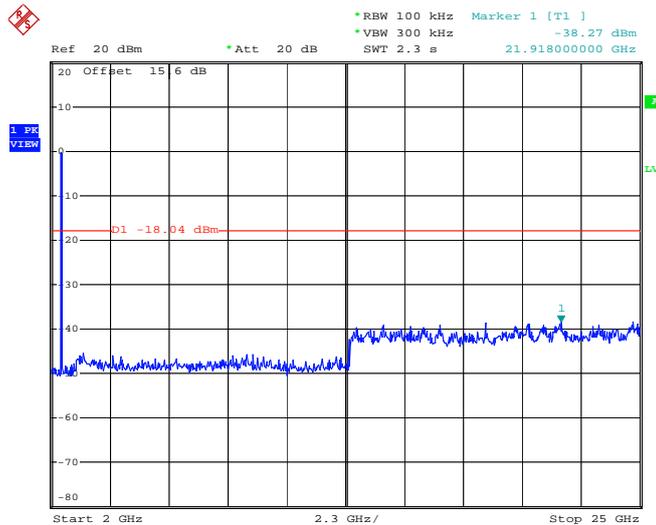


Date: 29.MAR.2013 10:22:28



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

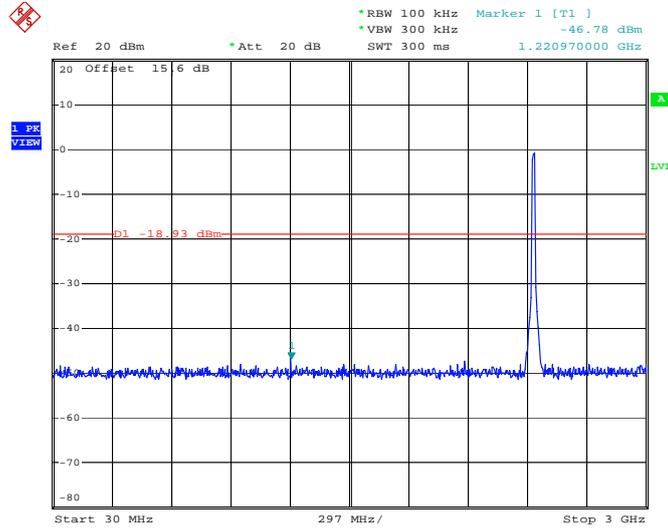

Date: 29.MAR.2013 10:23:44

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

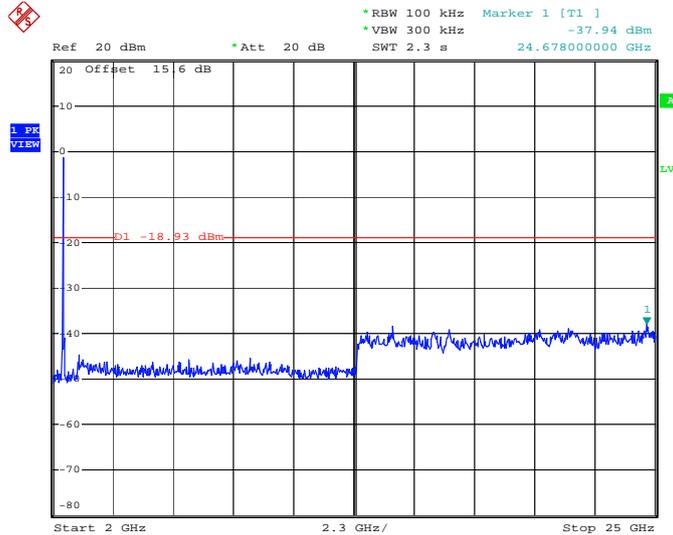


Date: 29.MAR.2013 10:24:02



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

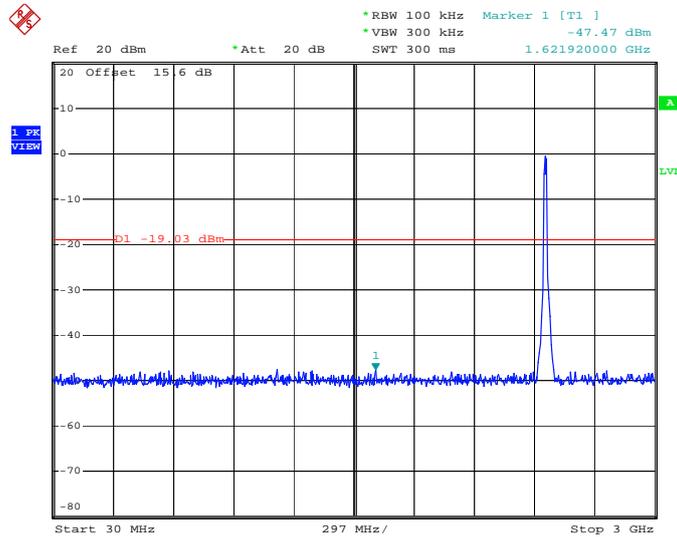

Date: 29.MAR.2013 10:25:04

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

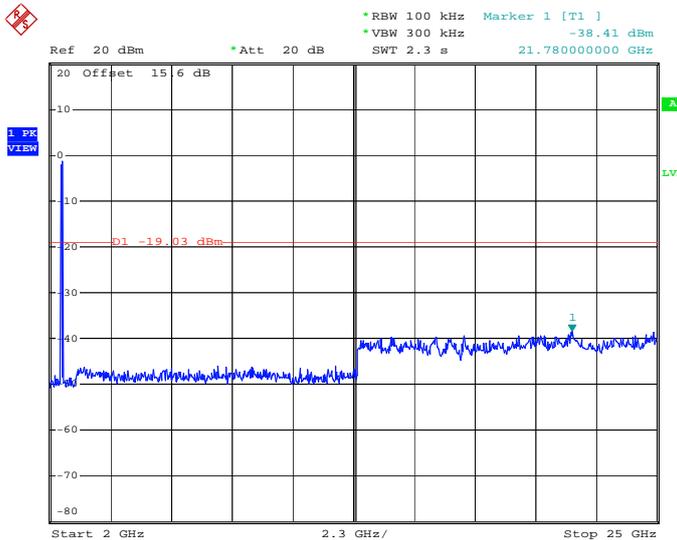


Date: 29.MAR.2013 10:25:23



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

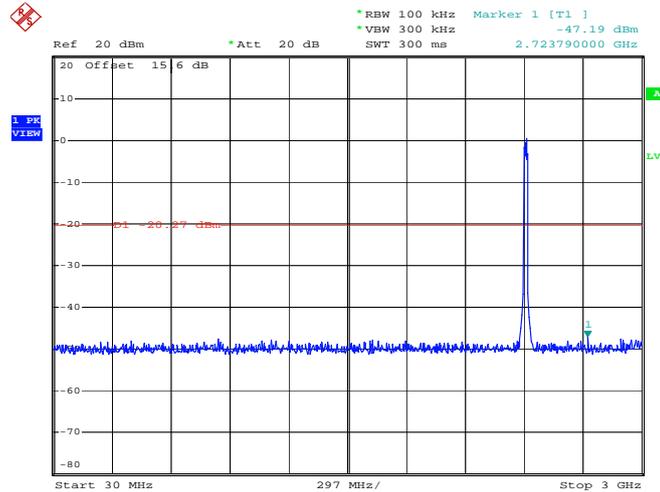

Date: 29.MAR.2013 08:21:39

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

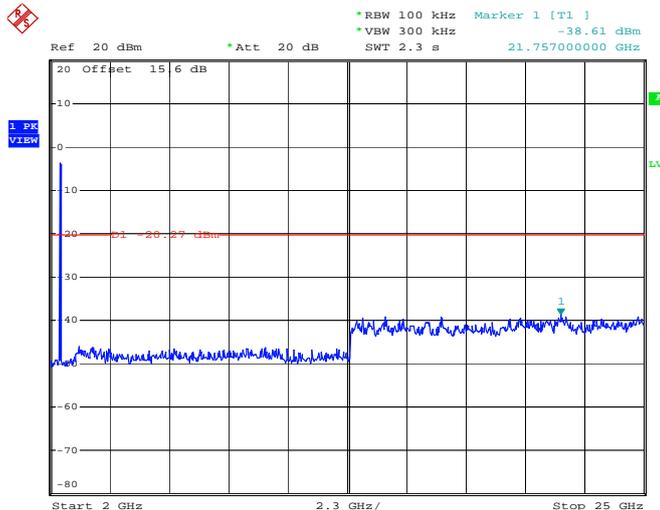


Date: 29.MAR.2013 08:21:57



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

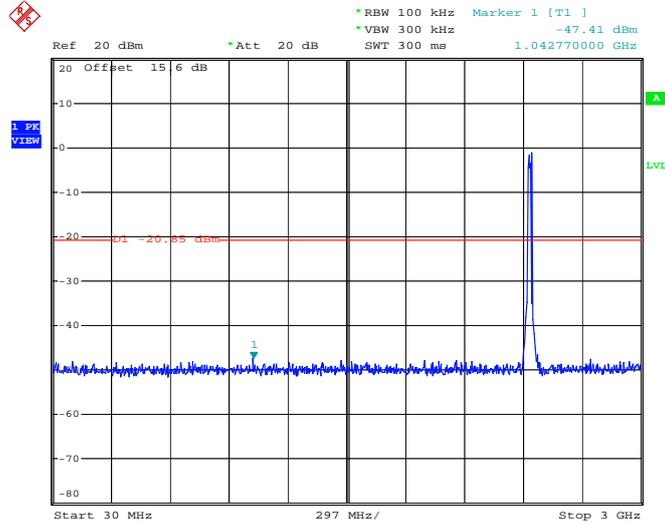

Date: 29.MAR.2013 08:27:17

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

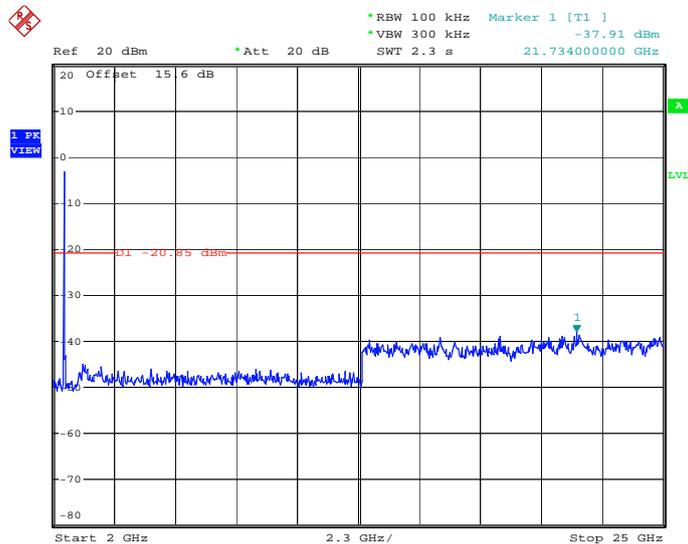


Date: 29.MAR.2013 08:27:35



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

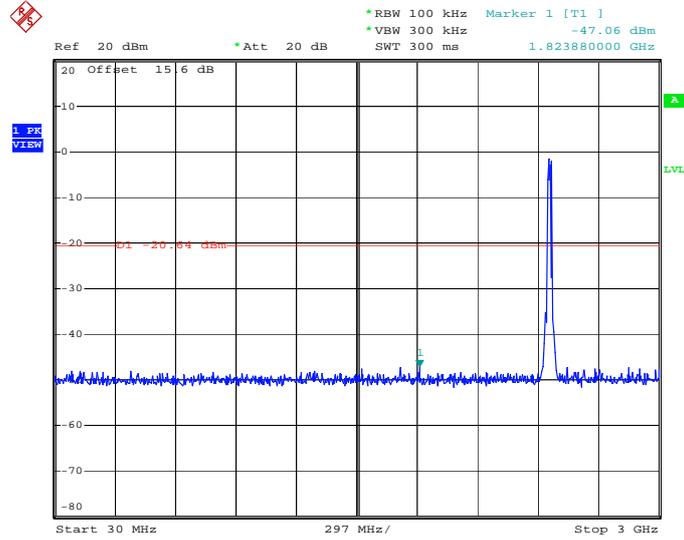

Date: 29.MAR.2013 08:35:00

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

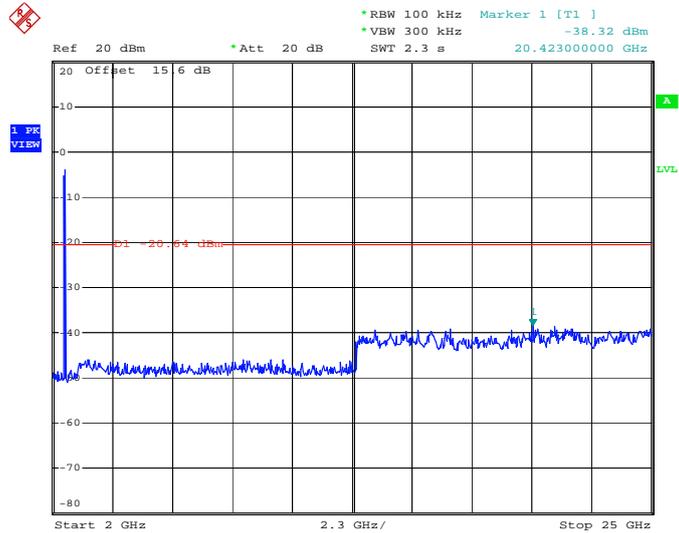


Date: 29.MAR.2013 08:35:18



Test Mode :	802.11n HT40	Temperature :	23~24
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48
Test Channel :	03, 06, 09	Test Engineer :	Lizy Li

802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 03

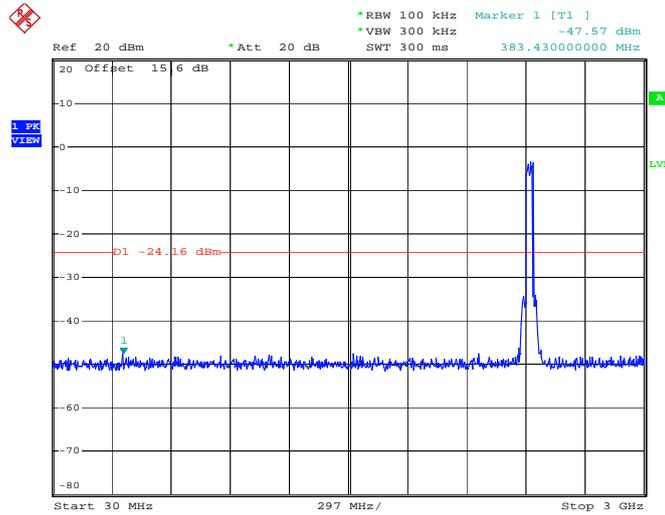

Date: 29.MAR.2013 09:58:49

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 03

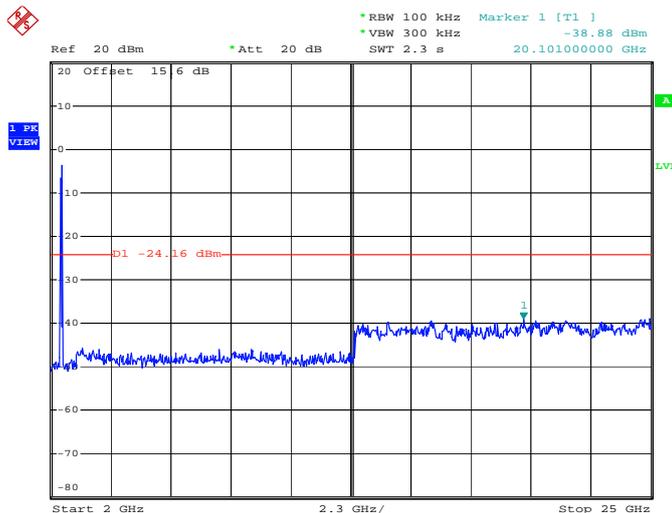


Date: 29.MAR.2013 09:59:07



802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

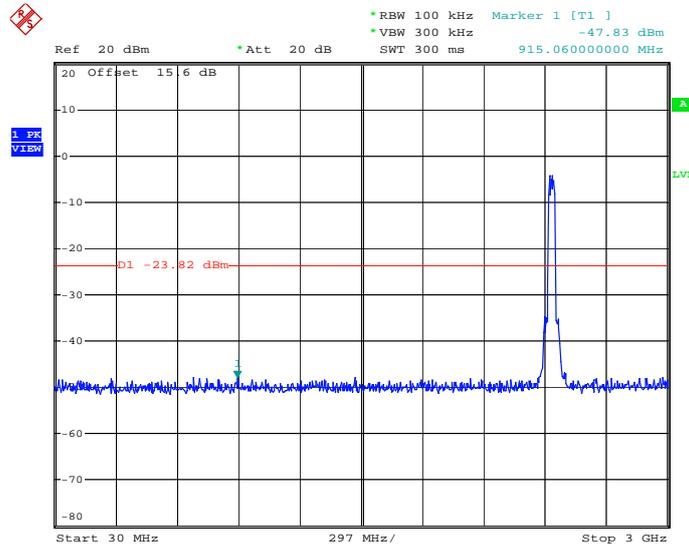

Date: 29.MAR.2013 08:46:20

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

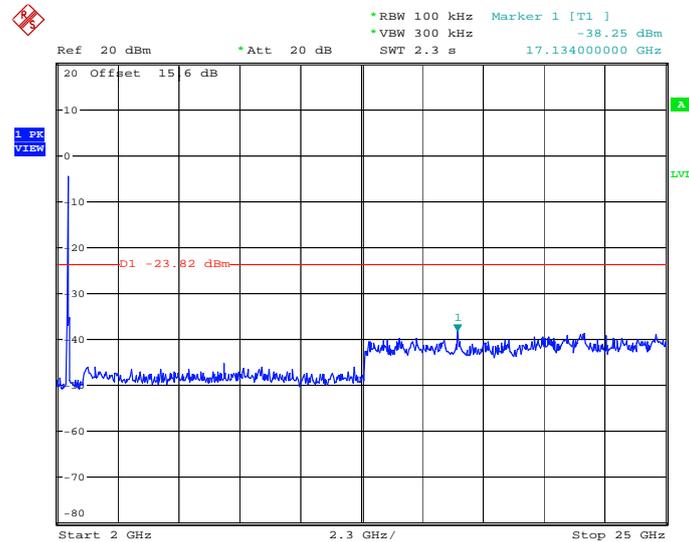


Date: 29.MAR.2013 08:46:38



802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 09

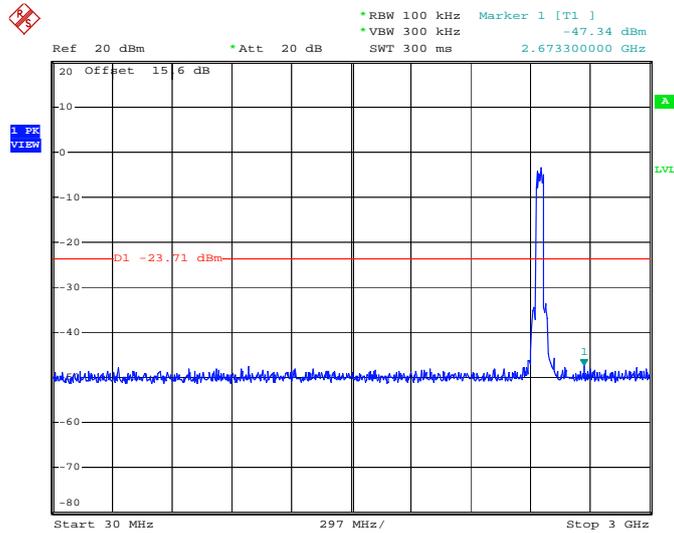

Date: 29.MAR.2013 10:00:53

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 09

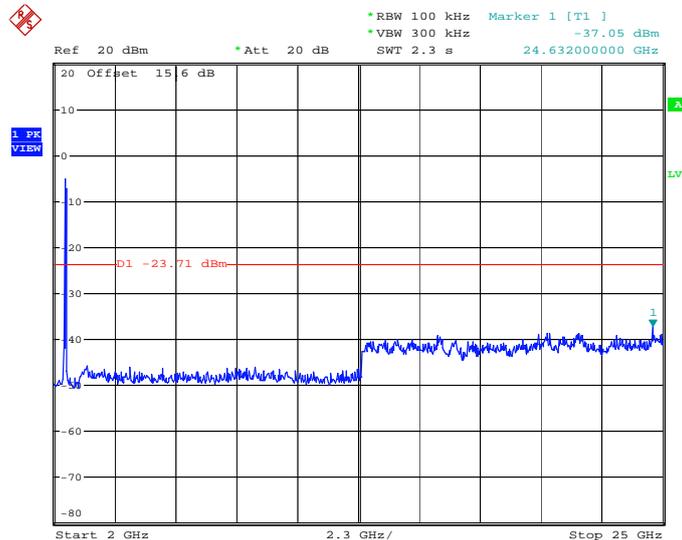

Date: 29.MAR.2013 10:01:12



3.5 Radiated Emission Measurement

3.5.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	99.057	-	-	10Hz
802.11g	92.053	1.390	0.719	1KHz
2.4G 802.11n HT20	91.796	1.298	0.770	1KHz
2.4G 802.11n HT40	86.089	0.656	1.524	3KHz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.5.4 Test Setup


For radiated emissions below 30MHz

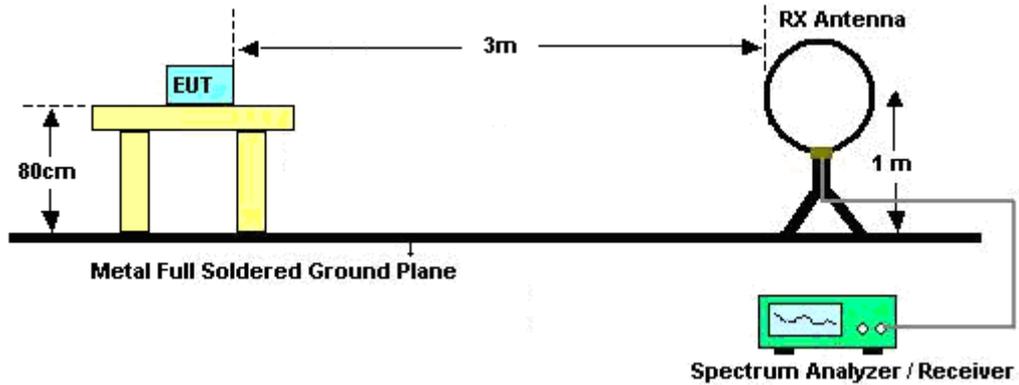

For radiated emissions from 30MHz to 1GHz

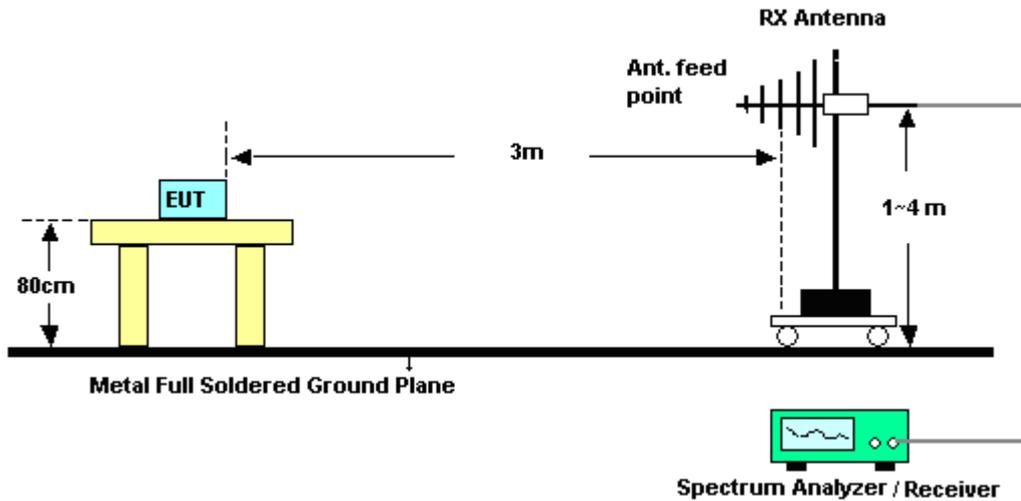

For radiated emissions above 1GHz

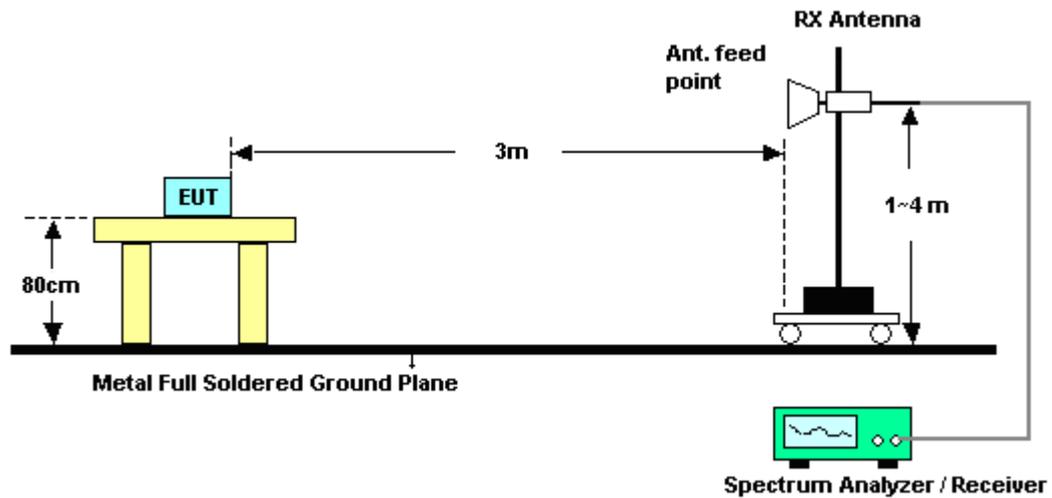

3.5.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	51~53%
Test Channel :	01	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	56.9	-17.1	74	51.99	32.3	6.91	34.3	135	324	Peak
2386.77	47.2	-6.8	54	42.26	32.3	6.91	34.27	135	324	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.47	52.67	-21.33	74	47.73	32.3	6.91	34.27	112	129	Peak
2390	43.2	-10.8	54	38.29	32.3	6.91	34.3	112	129	Average

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	51~53%
Test Channel :	11	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.62	57.56	-16.44	74	52.55	32.38	7.06	34.43	102	263	Peak
2483.5	51.06	-2.94	54	46.05	32.38	7.06	34.43	102	263	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.8	53.39	-20.61	74	48.38	32.38	7.06	34.43	166	125	Peak
2483.5	45.85	-8.15	54	40.84	32.38	7.06	34.43	166	125	Average



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	51~53%
Test Channel :	01	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.31	72.58	-1.42	74	67.64	32.3	6.91	34.27	135	316	Peak
2390	49.98	-4.02	54	45.07	32.3	6.91	34.3	135	316	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.47	68.03	-5.97	74	63.09	32.3	6.91	34.27	111	128	Peak
2390	46.2	-7.8	54	41.29	32.3	6.91	34.3	111	128	Average

Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	51~53%
Test Channel :	11	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.63	72.95	-1.05	74	67.94	32.38	7.06	34.43	103	264	Peak
2483.77	49.1	-4.9	54	44.09	32.38	7.06	34.43	103	264	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.72	71.93	-2.07	74	66.92	32.38	7.06	34.43	164	120	Peak
2483.5	45.87	-8.13	54	40.86	32.38	7.06	34.43	164	120	Average



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	51~53%
Test Channel :	01	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	72.48	-1.52	74	67.57	32.3	6.91	34.3	196	317	Peak
2389.56	51.27	-2.73	54	46.33	32.3	6.91	34.27	196	317	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.75	68.53	-5.47	74	63.59	32.3	6.91	34.27	111	128	Peak
2390	45.47	-8.53	54	40.56	32.3	6.91	34.3	111	128	Average

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	51~53%
Test Channel :	11	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.28	72.92	-1.08	74	67.91	32.38	7.06	34.43	102	266	Peak
2483.5	49.92	-4.08	54	44.91	32.38	7.06	34.43	102	266	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.44	68.9	-5.1	74	63.89	32.38	7.06	34.43	165	124	Peak
2484.1	44.25	-9.75	54	39.24	32.38	7.06	34.43	165	124	Average



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	51~53%
Test Channel :	03	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.21	72.88	-1.12	74	67.94	32.3	6.91	34.27	136	316	Peak
2388.75	49.19	-4.81	54	44.25	32.3	6.91	34.27	136	316	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	71.26	-2.74	74	66.35	32.3	6.91	34.3	167	124	Peak
2389.92	47.15	-6.85	54	42.24	32.3	6.91	34.3	167	124	Average

Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	51~53%
Test Channel :	09	Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.56	72.44	-1.56	74	67.43	32.38	7.06	34.43	100	239	Peak
2484.19	50.9	-3.1	54	45.89	32.38	7.06	34.43	100	239	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	69.71	-4.29	74	64.7	32.38	7.06	34.43	137	41	Peak
2483.5	47.61	-6.39	54	42.6	32.38	7.06	34.43	137	41	Average

3.5.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

NOTE: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 112.04 dBuV/m - 20dB = 92.04dBuV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.96	29.14	-10.86	40	48.55	11.7	0.64	31.75	111	20	Peak
146.91	26.85	-16.65	43.5	45.8	11.25	1.21	31.41	-	-	Peak
162.3	26.97	-16.53	43.5	46.81	10.31	1.22	31.37	-	-	Peak
318.9	17.98	-28.02	46	33.48	13.82	1.81	31.13	-	-	Peak
500.2	19.56	-26.44	46	29.9	18.1	2.45	30.89	-	-	Peak
724.2	21.86	-24.14	46	28.41	20.96	3	30.51	-	-	Peak
2412	106.54	-	-	101.58	32.31	6.95	34.3	135	324	Average
2412	112.04	-	-	107.08	32.31	6.95	34.3	135	324	Peak
4824	52.84	-1.16	54	67.57	33.97	8.77	57.47	135	165	Average
4824	55.04	-18.96	74	69.77	33.97	8.77	57.47	135	165	Peak
7236	42.07	-49.97	92.04	53.67	35.55	10.83	57.98	100	0	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	32.84	-7.16	40	45.6	18.56	0.55	31.87	129	76	Peak
42.96	28.4	-11.6	40	47.81	11.7	0.64	31.75	-	-	Peak
147.99	21.6	-21.9	43.5	40.55	11.24	1.21	31.4	-	-	Peak
401.5	18.66	-27.34	46	31.98	16.04	2.15	31.51	-	-	Peak
500.2	23.32	-22.68	46	33.66	18.1	2.45	30.89	-	-	Peak
801.9	23.31	-22.69	46	28.22	22.12	3.15	30.18	-	-	Peak
2412	101.21	-	-	96.25	32.31	6.95	34.3	112	129	Average
2412	106.78	-	-	101.82	32.31	6.95	34.3	112	129	Peak
4824	46.95	-27.05	74	61.68	33.97	8.77	57.47	100	0	Peak
7236	41.98	-44.8	86.78	53.58	35.55	10.83	57.98	100	0	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	2437 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	102.07	-	-	97.08	32.35	6.99	34.35	158	134	Average
2437	107.5	-	-	102.51	32.35	6.99	34.35	158	134	Peak
4875	52.75	-1.25	54	67.46	33.95	8.82	57.48	120	162	Average
4875	54.78	-19.22	74	69.49	33.95	8.82	57.48	120	162	Peak
7311	42.26	-31.74	74	53.83	35.54	10.91	58.02	100	0	Peak

Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	97.79	-	-	92.82	32.33	6.99	34.35	167	123	Average
2437	103.24	-	-	98.27	32.33	6.99	34.35	167	123	Peak
4875	50.54	-23.46	74	65.25	33.95	8.82	57.48	100	0	Peak
7311	42.58	-31.42	74	54.15	35.54	10.91	58.02	100	0	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	2462 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	104.02	-	-	99.02	32.37	7.02	34.39	102	263	Average
2462	109.52	-	-	104.52	32.37	7.02	34.39	102	263	Peak
4923	50.34	-3.66	54	65.02	33.93	8.87	57.48	100	15	Average
4923	52.5	-21.5	74	67.18	33.93	8.87	57.48	100	15	Peak
7386	42.55	-31.45	74	54.12	35.52	10.99	58.08	100	0	Peak

Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	100.89	-	-	95.89	32.37	7.02	34.39	166	125	Average
2462	106.34	-	-	101.34	32.37	7.02	34.39	166	125	Peak
4923	50.68	-23.32	74	65.36	33.93	8.87	57.48	100	0	Peak
7386	43.07	-30.93	74	54.64	35.52	10.99	58.08	100	0	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz and 9648 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	101.66	-	-	96.7	32.31	6.95	34.3	135	316	Average
2412	110.97	-	-	106.01	32.31	6.95	34.3	135	316	Peak
4821	44.32	-9.68	54	59.05	33.97	8.77	57.47	135	165	Average
4821	52.09	-21.91	74	66.82	33.97	8.77	57.47	135	165	Peak
7236	43.17	-47.8	90.97	54.77	35.55	10.83	57.98	100	0	Peak
9648	50.97	-40	90.97	58.99	36.52	13.69	58.23	100	0	Peak

Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7239 MHz and 9648 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	96.73	-	-	91.77	32.31	6.95	34.3	111	128	Average
2412	106.47	-	-	101.51	32.31	6.95	34.3	111	128	Peak
4824	47.83	-26.17	74	62.56	33.97	8.77	57.47	100	0	Peak
7239	47.63	-38.84	86.47	59.23	35.55	10.83	57.98	100	0	Peak
9648	50.42	-36.05	86.47	58.44	36.52	13.69	58.23	100	0	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	99.57	-	-	94.58	32.35	6.99	34.35	102	328	Average
2437	109.74	-	-	104.75	32.35	6.99	34.35	102	328	Peak
4875	49.52	-24.48	74	64.23	33.95	8.82	57.48	100	0	Peak
7311	41.92	-32.08	74	53.49	35.54	10.91	58.02	100	0	Peak

Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	96.83	-	-	91.86	32.33	6.99	34.35	167	124	Average
2437	106.86	-	-	101.89	32.33	6.99	34.35	167	124	Peak
4875	46.86	-27.14	74	61.57	33.95	8.82	57.48	100	0	Peak
7311	42.72	-31.28	74	54.29	35.54	10.91	58.02	100	0	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.96	24.42	-15.58	40	43.83	11.7	0.64	31.75	-	-	Peak
150.15	28.78	-14.72	43.5	47.76	11.2	1.21	31.39	102	31	Peak
159.33	27.14	-16.36	43.5	46.74	10.57	1.22	31.39	-	-	Peak
318.2	17.84	-28.16	46	33.37	13.8	1.81	31.14	-	-	Peak
608	21.03	-24.97	46	28.97	19.86	2.71	30.51	-	-	Peak
833.4	29.26	-16.74	46	34.01	22.43	3.23	30.41	-	-	Peak
2462	98.48	-	-	93.48	32.37	7.02	34.39	103	264	Average
2462	108.19	-	-	103.19	32.37	7.02	34.39	103	264	Peak
4917	47.7	-26.3	74	62.38	33.93	8.87	57.48	100	0	Peak
7386	42.38	-31.62	74	53.95	35.52	10.99	58.08	100	0	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.51	33.41	-6.59	40	47.6	17.12	0.57	31.88	128	68	Peak
73.47	20.69	-19.31	40	44.8	6.81	0.85	31.77	-	-	Peak
149.88	22.12	-21.38	43.5	41.1	11.2	1.21	31.39	-	-	Peak
384.7	16.83	-29.17	46	30.46	15.61	2.11	31.35	-	-	Peak
553.4	20.8	-25.2	46	30.45	19.01	2.56	31.22	-	-	Peak
795.6	23.56	-22.44	46	28.59	22.03	3.13	30.19	-	-	Peak
2462	96.29	-	-	91.29	32.37	7.02	34.39	164	120	Average
2462	106.09	-	-	101.09	32.37	7.02	34.39	164	120	Peak
4926	45.74	-28.26	74	60.39	33.93	8.9	57.48	100	0	Peak
7386	43.42	-30.58	74	54.99	35.52	10.99	58.08	100	0	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz and 9648 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	100.83	-	-	95.87	32.31	6.95	34.3	196	317	Average
2412	111.05	-	-	106.09	32.31	6.95	34.3	196	317	Peak
4818	43.62	-10.38	54	58.35	33.97	8.77	57.47	135	165	Average
4818	51.61	-22.39	74	66.34	33.97	8.77	57.47	135	165	Peak
7236	42.8	-48.25	91.05	54.4	35.55	10.83	57.98	100	0	Peak
9648	52.08	-38.97	91.05	60.1	36.52	13.69	58.23	107	211	Peak

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz and 9648 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	95.82	-	-	90.86	32.31	6.95	34.3	111	128	Average
2412	105.74	-	-	100.78	32.31	6.95	34.3	111	128	Peak
4824	47.49	-26.51	74	62.22	33.97	8.77	57.47	100	0	Peak
7236	47.42	-38.32	85.74	59.02	35.55	10.83	57.98	100	0	Peak
9648	50.65	-35.09	85.74	58.67	36.52	13.69	58.23	100	0	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	98.78	-	-	93.79	32.35	6.99	34.35	134	263	Average
2437	108.62	-	-	103.63	32.35	6.99	34.35	134	263	Peak
4866	48.71	-25.29	74	63.4	33.96	8.82	57.47	100	0	Peak
7311	41.95	-32.05	74	53.52	35.54	10.91	58.02	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	96.73	-	-	91.76	32.33	6.99	34.35	168	126	Average
2437	106.45	-	-	101.48	32.33	6.99	34.35	168	126	Peak
4887	46.61	-27.39	74	61.3	33.94	8.85	57.48	100	0	Peak
7311	42.48	-31.52	74	54.05	35.54	10.91	58.02	100	0	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.96	24.79	-15.21	40	44.2	11.7	0.64	31.75	132	64	Peak
107.22	19.82	-23.68	43.5	39.98	10.52	1.04	31.72	-	-	Peak
150.96	27.27	-16.23	43.5	46.32	11.13	1.21	31.39	-	-	Peak
316.1	18.29	-27.71	46	33.89	13.75	1.8	31.15	-	-	Peak
401.5	19.6	-26.4	46	32.92	16.04	2.15	31.51	-	-	Peak
623.4	21.31	-24.69	46	29.01	19.99	2.76	30.45	-	-	Peak
2462	98.17	-	-	93.17	32.37	7.02	34.39	102	266	Average
2462	107.92	-	-	102.92	32.37	7.02	34.39	102	266	Peak
4923	46.56	-27.44	74	61.24	33.93	8.87	57.48	100	0	Peak
7386	42.86	-31.14	74	54.43	35.52	10.99	58.08	100	0	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	31.81	-8.19	40	44.57	18.56	0.55	31.87	169	58	Peak
42.96	24.56	-15.44	40	43.97	11.7	0.64	31.75	-	-	Peak
79.68	22.06	-17.94	40	45.33	7.57	0.88	31.72	-	-	Peak
401.5	18.35	-27.65	46	31.67	16.04	2.15	31.51	-	-	Peak
524	20.71	-25.29	46	30.78	18.5	2.5	31.07	-	-	Peak
694.1	21.84	-24.16	46	28.83	20.55	2.93	30.47	-	-	Peak
2462	95.41	-	-	90.41	32.37	7.02	34.39	165	124	Average
2462	105.28	-	-	100.28	32.37	7.02	34.39	165	124	Peak
4926	46.07	-27.93	74	60.72	33.93	8.9	57.48	100	0	Peak
7386	41.96	-32.04	74	53.53	35.52	10.99	58.08	100	0	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	03	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.96	27.59	-12.41	40	47	11.7	0.64	31.75	123	63	Peak
155.55	27.81	-15.69	43.5	47.13	10.85	1.22	31.39	-	-	Peak
161.76	27.1	-16.4	43.5	46.94	10.31	1.22	31.37	-	-	Peak
320.3	18.68	-27.32	46	34.14	13.85	1.81	31.12	-	-	Peak
436.5	19.58	-26.42	46	31.69	16.77	2.27	31.15	-	-	Peak
791.4	23.72	-22.28	46	28.85	21.97	3.13	30.23	-	-	Peak
2422	95.55	-	-	90.62	32.33	6.95	34.35	136	316	Average
2422	105.34	-	-	100.41	32.33	6.95	34.35	136	316	Peak
4842	47.39	-26.61	74	62.1	33.96	8.8	57.47	100	0	Peak
7266	42.78	-31.22	74	54.38	35.54	10.86	58	100	0	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	03	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.51	32.05	-7.95	40	46.24	17.12	0.57	31.88	104	21	Peak
42.96	27.33	-12.67	40	46.74	11.7	0.64	31.75	-	-	Peak
74.82	21.31	-18.69	40	45.27	6.94	0.85	31.75	-	-	Peak
421.8	16.14	-29.86	46	28.7	16.46	2.22	31.24	-	-	Peak
500.2	21.5	-24.5	46	31.84	18.1	2.45	30.89	-	-	Peak
749.4	22.22	-23.78	46	28.35	21.34	3.06	30.53	-	-	Peak
2422	92.16	-	-	87.23	32.33	6.95	34.35	167	124	Average
2422	102.04	-	-	97.11	32.33	6.95	34.35	167	124	Peak
4845	43.5	-30.5	74	58.21	33.96	8.8	57.47	100	0	Peak
7266	42.78	-31.22	74	54.38	35.54	10.86	58	100	0	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	98.13	-	-	93.14	32.35	6.99	34.35	159	133	Average
2437	107.89	-	-	102.9	32.35	6.99	34.35	159	133	Peak
4872	47.36	-26.64	74	62.07	33.95	8.82	57.48	100	0	Peak
7311	41.11	-32.89	74	52.68	35.54	10.91	58.02	100	0	Peak

Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	94.04	-	-	89.07	32.33	6.99	34.35	140	46	Average
2437	103.81	-	-	98.84	32.33	6.99	34.35	140	46	Peak
4875	43.37	-30.63	74	58.08	33.95	8.82	57.48	100	0	Peak
7311	42.02	-31.98	74	53.59	35.54	10.91	58.02	100	0	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	09	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	95.07	-	-	90.12	32.35	6.99	34.39	100	239	Average
2452	104.61	-	-	99.66	32.35	6.99	34.39	100	239	Peak
4904	45.57	-28.43	74	60.26	33.94	8.85	57.48	100	0	Peak
7356	41.56	-32.44	74	53.13	35.53	10.96	58.06	100	0	Peak

Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	09	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	90.93	-	-	85.95	32.35	7.02	34.39	137	41	Average
2452	100.86	-	-	95.88	32.35	7.02	34.39	137	41	Peak
4905	40.19	-33.81	74	57.03	33.93	8.87	59.64	100	0	Peak
7356	39.37	-34.63	74	52.37	35.53	10.96	59.49	100	0	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.6.4 Test Setup

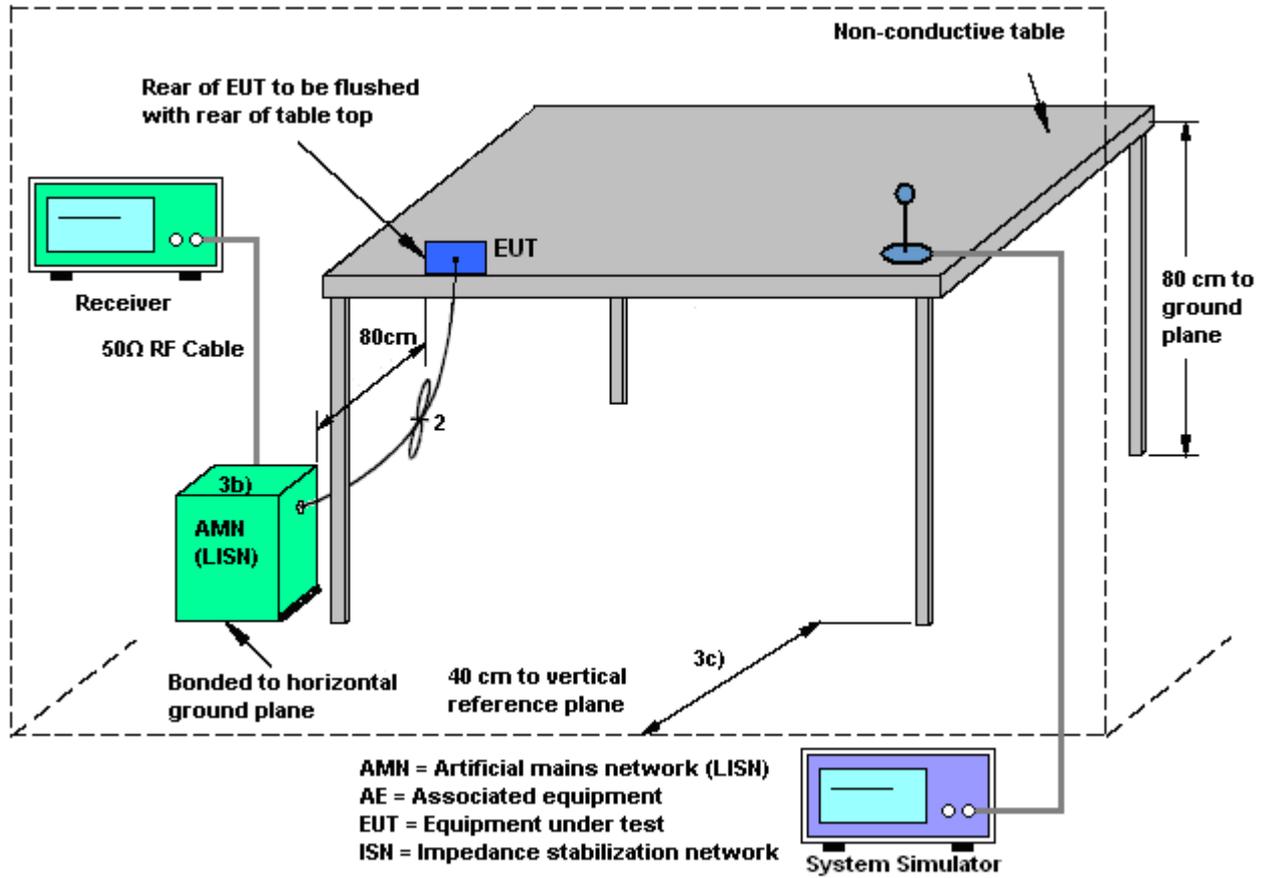



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

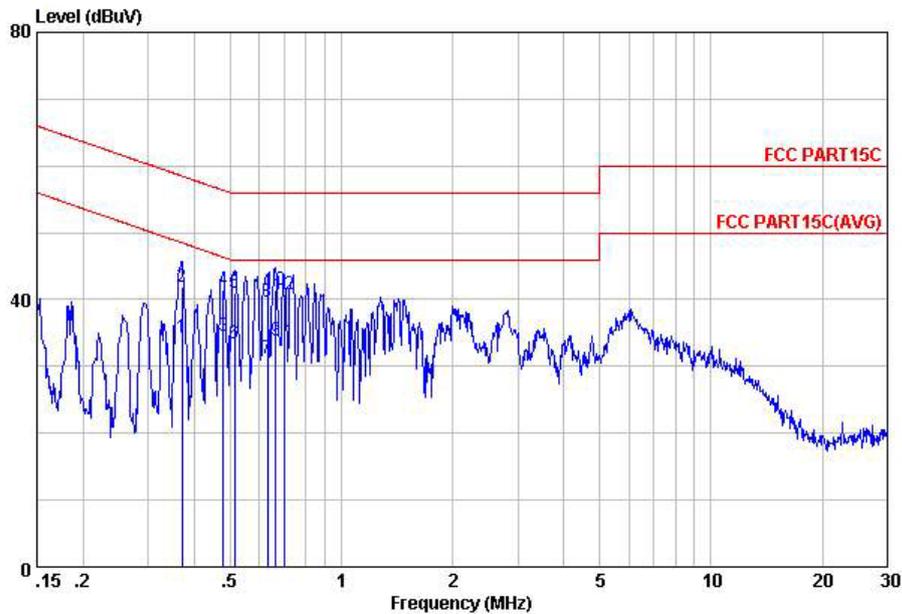


Site : C001-KS
 Condition: FCC PART15C LISN-L20130306 LINE

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.37	34.22	-14.25	48.47	23.59	0.38	10.25	Average
2	0.37	41.82	-16.65	58.47	31.19	0.38	10.25	QP
3	0.48	34.47	-11.89	46.36	24.00	0.22	10.25	Average
4	0.48	41.37	-14.99	56.36	30.90	0.22	10.25	QP
5	0.51	41.06	-14.94	56.00	30.60	0.20	10.26	QP
6	0.51	33.46	-12.54	46.00	23.00	0.20	10.26	Average
7	0.63	31.26	-14.74	46.00	20.80	0.20	10.26	Average
8	0.63	39.76	-16.24	56.00	29.30	0.20	10.26	QP
9	0.66	33.87	-12.13	46.00	23.40	0.20	10.27	Average
10	0.66	41.47	-14.53	56.00	31.00	0.20	10.27	QP
11	0.70	33.67	-12.33	46.00	23.20	0.20	10.27	Average
12	0.70	40.87	-15.13	56.00	30.40	0.20	10.27	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

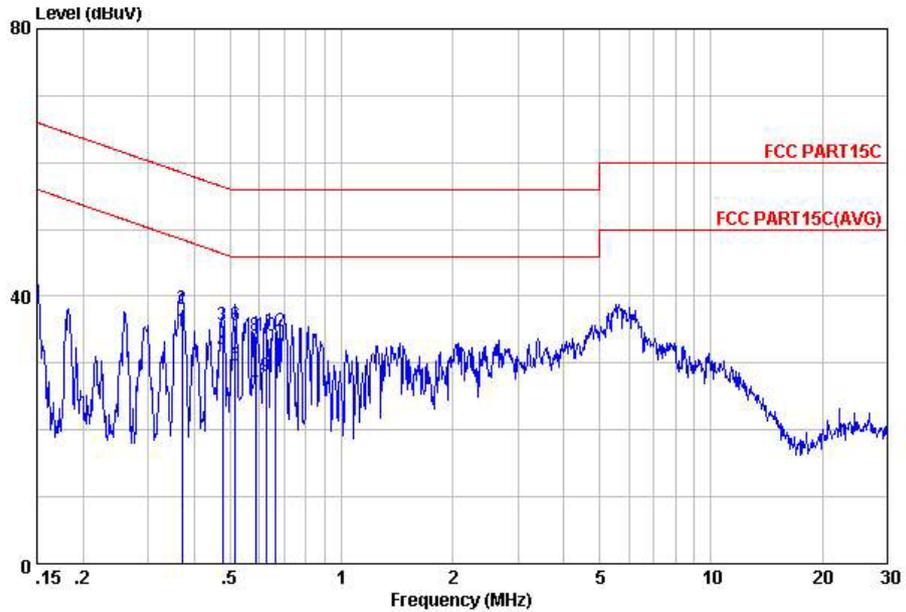

Site : C001-RS
 Condition: FCC PART15C LISN-M20130306 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.37	34.70	-13.77	48.47	24.00	0.45	10.25	Average
2	0.37	38.10	-20.37	58.47	27.40	0.45	10.25	QP
3	0.48	35.67	-20.74	56.41	25.10	0.32	10.25	QP
4	0.48	31.67	-14.74	46.41	21.10	0.32	10.25	Average
5	0.52	29.55	-16.45	46.00	19.00	0.29	10.26	Average
6	0.52	35.55	-20.45	56.00	25.00	0.29	10.26	QP
7	0.59	25.31	-20.69	46.00	14.80	0.25	10.26	Average
8	0.59	34.01	-21.99	56.00	23.50	0.25	10.26	QP
9	0.62	28.09	-17.91	46.00	17.60	0.23	10.26	Average
10	0.62	33.99	-22.01	56.00	23.50	0.23	10.26	QP
11	0.66	29.48	-16.52	46.00	19.00	0.21	10.27	Average
12	0.66	34.68	-21.32	56.00	24.20	0.21	10.27	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	Mar. 12, 2013~ Mar. 29, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Mar. 12, 2013~ Mar. 29, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Mar. 12, 2013~ Mar. 29, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Mar. 12, 2013~ Mar. 29, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	Mar. 12, 2013~ Mar. 29, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 06, 2012	Mar. 27, 2013	Oct. 05, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Nov. 30, 2012	Mar. 27, 2013	Nov. 29, 2013	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 22, 2012	Mar. 27, 2013	Aug. 21, 2013	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 01, 2012	Mar. 27, 2013	Nov. 30, 2013	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	159088	1GHz ~ 18GHz	Feb. 27, 2013	Mar. 27, 2013	Feb. 26, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10-1000MHz. 32dB.GAIN	Feb. 26, 2013	Mar. 27, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Mar. 27, 2013	Sep. 02, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Mar. 27, 2013	Sep. 27, 2013	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Mar. 27, 2013	Jul. 02, 2014	Radiation (03CH07-HY)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Apr. 07, 2013	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	Apr. 07, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	Apr. 07, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Apr. 07, 2013	Nov. 14, 2013	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 29, 2012	Apr. 07, 2013	Dec. 28, 2013	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP322002 as below.