



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

**ACCORDING TO: FCC CFR 47 PART 15 Subpart C, section 15.247 (DTS) and
RSS-210, Issue 8, Annex 8**

FOR:

**Cardo Systems Inc.
Bluetooth headset
Model: scala rider G9
FCC ID:Q95ER14**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Operating frequencies	5
6.3	Support and test equipment	5
6.4	Changes made in the EUT	5
6.5	Test configuration.....	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements	8
7.1	Minimum 6 dB bandwidth	8
7.2	Peak output power	11
7.3	Field strength of spurious emissions	17
7.4	Band edge radiated emissions	29
7.5	Peak spectral power density	37
7.6	Antenna requirements	42
8	APPENDIX A APPENDIX A Test equipment and ancillaries used for tests	43
9	APPENDIX B Measurement uncertainties.....	44
10	APPENDIX C Test laboratory description	45
11	APPENDIX D Specification references	45
12	APPENDIX E Test equipment correction factors.....	46
13	APPENDIX F Abbreviations and acronyms.....	56



1 Applicant information

Client name: Cardo Systems Inc.
Address: 100 High Tower Blvd, Pittsburgh, PA 15205, USA
Telephone: 001 412-788-4533
Fax: 001 412-788-0270
E-mail: moato@cardosystems.com
Contact name: Mr. Avi Moato

2 Equipment under test attributes

Product name: Bluetooth headset
Product type: Transceiver
Model(s): scala rider G9
Serial number: HS#1
Hardware version: 1.0
Software release: 1.0
Receipt date 12/25/2011

3 Manufacturer information

Manufacturer name: Cardo Systems Inc.
Address: 100 High Tower Blvd, Pittsburgh, PA 15205, USA
Telephone: 001 412-788-4533
Fax: 001 412-788-0270
E-Mail: moato@cardosystems.com
Contact name: Mr. Avi Moato

4 Test details

Project ID: 22777
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 12/25/2011
Test completed: 2/01/2012
Test specification(s): FCC Part 15, subpart C, §15.247 (DTS);
RSS-210 Issue 8:2010, Annex 8



5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a)2 / RSS-210 section A8.2(a), 6 dB bandwidth	Pass
FCC Section 15.247(b)3/ RSS-210 section A8.4(4), Peak output power	Pass
FCC section 15.247(i) / RSS-Gen section 5.6, RF exposure	Pass, the exhibit to the application of certification is provided
FCC Section 15.247(d) / RSS-210 section A8.5, Radiated spurious emissions	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Emissions at band edges	Pass
FCC Section 15.247(e) / RSS-210 section A8.2(b), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 7.1.2, Antenna requirement	Pass
FCC section 15.207(a) / RSS-Gen section 7.2.4, Conducted emission	Not required

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer Mr. S. Samokha, test engineer	February 1, 2012	Handwritten signatures of Mrs. E. Pitt and Mr. S. Samokha.
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	February 7, 2012	Handwritten signature of Mrs. M. Cherniavsky.
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	February 28, 2012	Handwritten signature of Mr. M. Nikishin.



6 EUT description

6.1 General information

This product is a Bluetooth headset for motorbikes technology compliant with Bluetooth™ Ver 2.1 class 1 and FM radio receiver.

It also has additional transceiver operating at 2401 MHz.

6.2 Operating frequencies

Source	Frequency, MHz		
LO	26		
Bluetooth	2402	2440	2480
Tx	2401		
FM receiver	88	98	108

6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
BT headset	Cardo Systems, Inc.	scala rider G9	HS#2

6.4 Changes made in the EUT

No changes were implemented in the EUT.



6.5 Test configuration





6.6 Transmitter characteristics

Type of equipment							
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Intended use	Condition of use						
fixed	Always at a distance more than 2 m from all people						
mobile	Always at a distance more than 20 cm from all people						
<input checked="" type="checkbox"/> portable	May operate at a distance closer than 20 cm to human body						
Assigned frequency range	2400 - 2483.5 MHz						
Operating frequency	2401 MHz						
Maximum rated output power	Peak output power			8.3 dBm			
Is transmitter output power variable?	<input checked="" type="checkbox"/>	No					
		continuous variable					
	<input checked="" type="checkbox"/>	stepped variable with stepsize			dB		
		minimum RF power			dBm		
		maximum RF power			dBm		
Antenna connection							
unique coupling	standard connector		<input checked="" type="checkbox"/> integral	with temporary RF connector			
			<input checked="" type="checkbox"/>	without temporary RF connector			
Antenna/s technical characteristics							
Type	Manufacturer		Model number		Gain		
Printed	Cardo Systems, Inc.		NA		0 dBi		
Modulation	2FSK, MSK						
Transmitter aggregate data rate/s	500 kbps (MSK); 2.4 kBps (2FSK)						
Modulating test signal (baseband)	PRBS						
Transmitter power source							
<input checked="" type="checkbox"/> Battery	Nominal rated voltage	3.7 VDC	Battery type	Lead acid			
DC	Nominal rated voltage	VDC					
AC mains	Nominal rated voltage	VAC	Frequency				



HERMON LABORATORIES

Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 21 °C	Air Pressure: 1007 hPa	Relative Humidity: 46 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0		
2400.0 – 2483.5	6.0	
5725.0 – 5850.0		500.0

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier.
- 7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 21 °C	Air Pressure: 1007 hPa	Relative Humidity: 46 %	Power Supply: Battery
Remarks:			

Table 7.1.2 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400- 2483.5 MHz
DETECTOR USED: Peak
SWEEP MODE: Single
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
MODULATING SIGNAL: PRBS

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
MODULATION: 2FSK 2401	610	500	110	Pass
MODULATION: MSK 2401	605	500	105	Pass

Reference numbers of test equipment used

HL 0415	HL 0812	HL 1425	HL 2432	HL 4289			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 21 °C	Air Pressure: 1007 hPa	Relative Humidity: 46 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 The 6 dB bandwidth test result at carrier frequency, 2FSK modulation



Plot 7.1.2 The 6 dB bandwidth test result at carrier frequency, MSK modulation

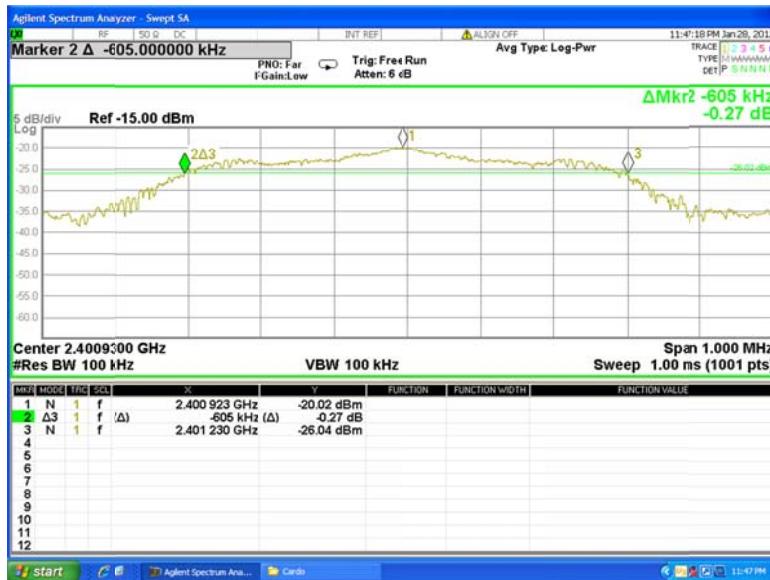



HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	12/25/2011 - 1/2/2012		
Temperature: 22.1 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: Battery
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)**
		W	dBm	
902.0 – 928.0				
2400.0 – 2483.5	6.0	1.0	30.0	131.2
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;

without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;

by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

**- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	12/25/2011 - 1/2/2012		
Temperature: 22.1 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: Battery
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

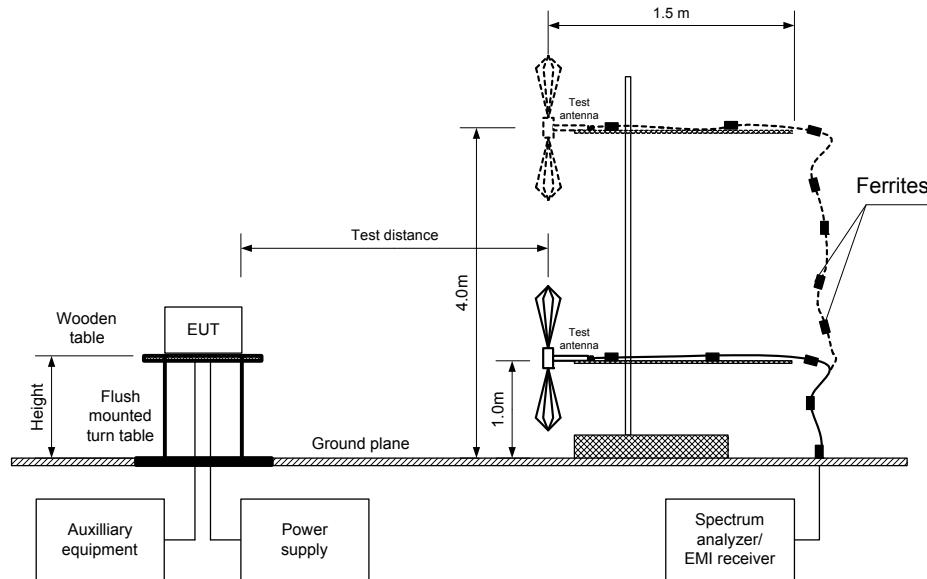

Photograph 7.2.1 Setup for carrier field strength measurements

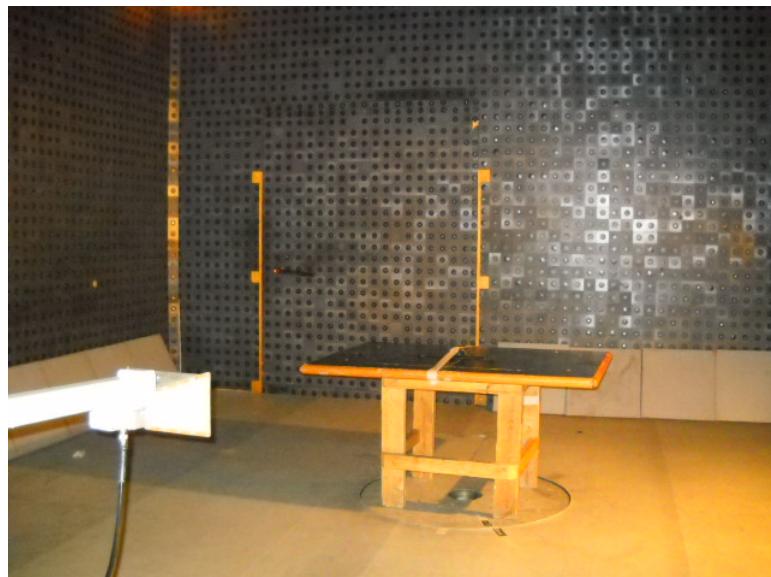



HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict: PASS	
Date(s):	12/25/2011 - 1/2/2012		
Temperature: 22.1 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 6 dB BANDWIDTH: MHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 MODULATION: MSK
 BIT RATE: 500 kbps

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2400.925	92.96	Hor	1.1	230	0	-2.2	30	-32.2	Pass

MODULATION: 2FSK
 BIT RATE: 2.4 kbps

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2400.950	103.50	Hor	1.1	230	0	8.3	30	-21.7	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Note: Maximum peak output power was obtained at Unom (115%Unom, 85%Unom) input power voltage.

Reference numbers of test equipment used

HL 0521	HL 1984	HL 2871	HL 3617				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	12/25/2011 - 1/2/2012		
Temperature: 22.1 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Field strength of carrier frequency, MSK modulation

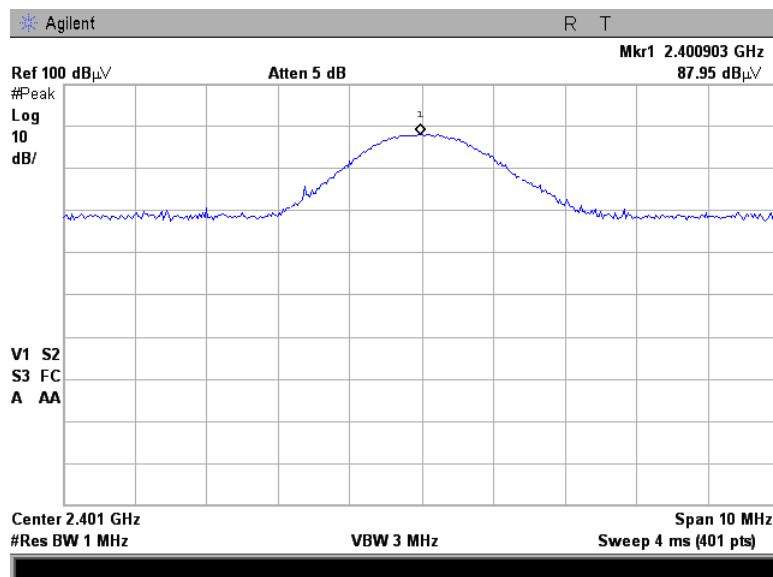

Plot 7.2.2 Field strength of carrier frequency, MSK modulation

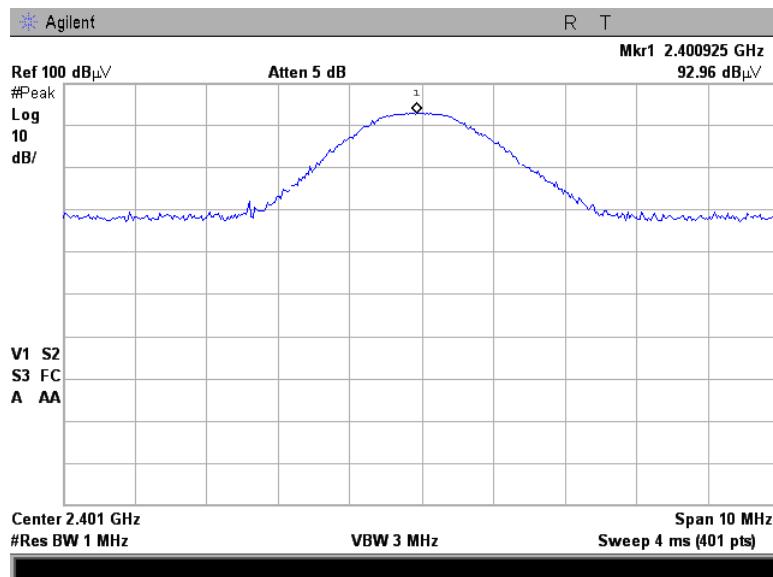





HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	12/25/2011 - 1/2/2012		
Temperature: 22.1 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: Battery
Remarks:			

Plot 7.2.3 Field strength of carrier frequency, 2FSK modulation

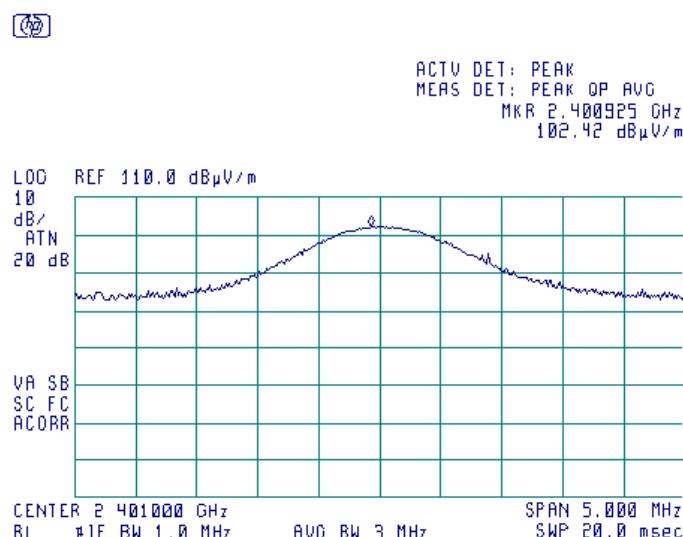

Plot 7.2.4 Field strength of carrier frequency, 2FSK modulation


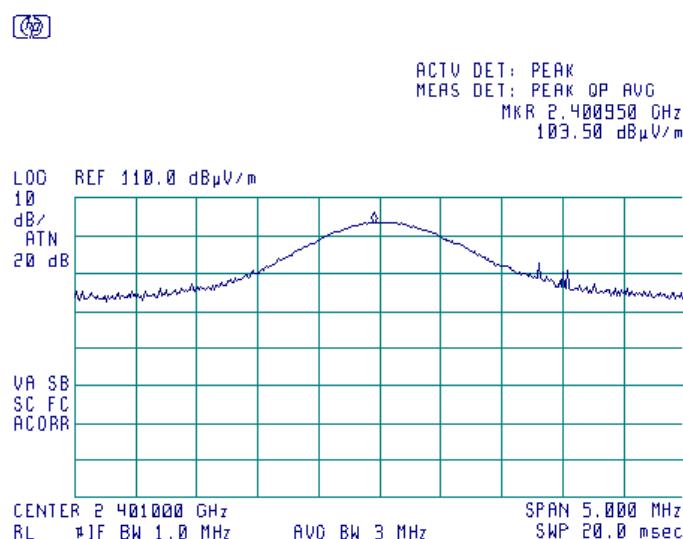




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	12/25/2011 - 1/2/2012		
Temperature: 22.1 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: Battery
Remarks:			

Plot 7.2.5 Transmitter duty cycle, 2FSK modulation

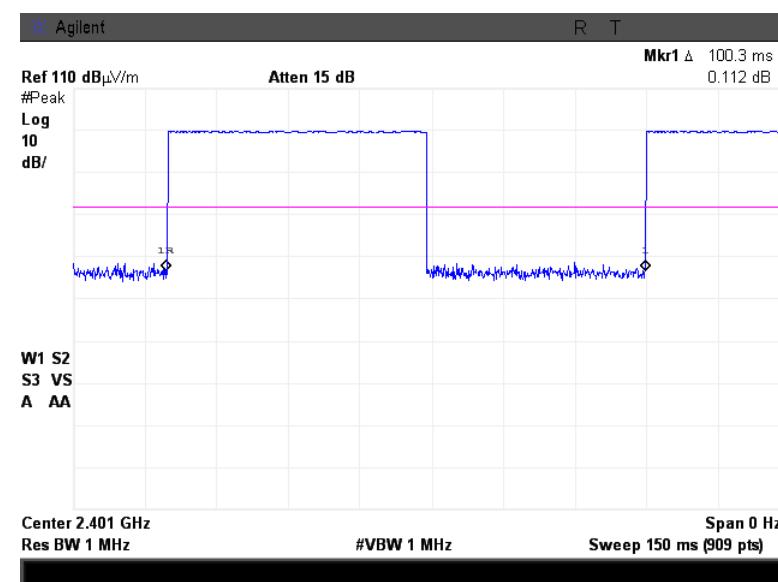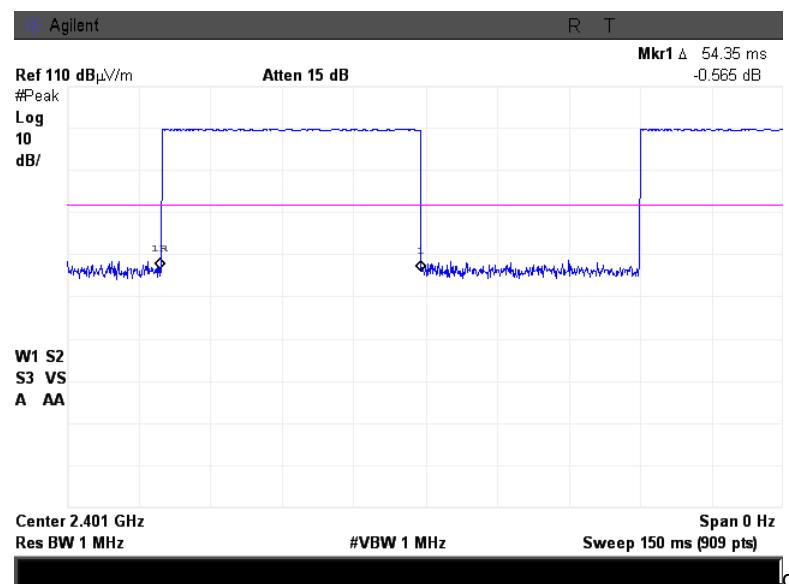



HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	2/1/2012	Air Pressure: 1007 hPa	Relative Humidity: 44 %
Temperature: 23 °C		Power Supply: Battery	
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***	
	Peak	Quasi Peak	Average		
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0	
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
1000 – 10 th harmonic	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2)$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions	
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4
Test mode:	Compliance
Date(s):	2/1/2012
Temperature: 23 °C	Air Pressure: 1007 hPa
Remarks:	Relative Humidity: 44 % Power Supply: Battery

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


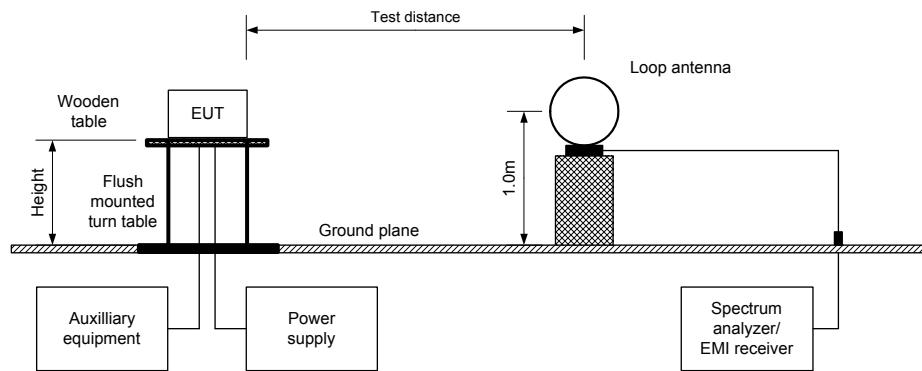


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz



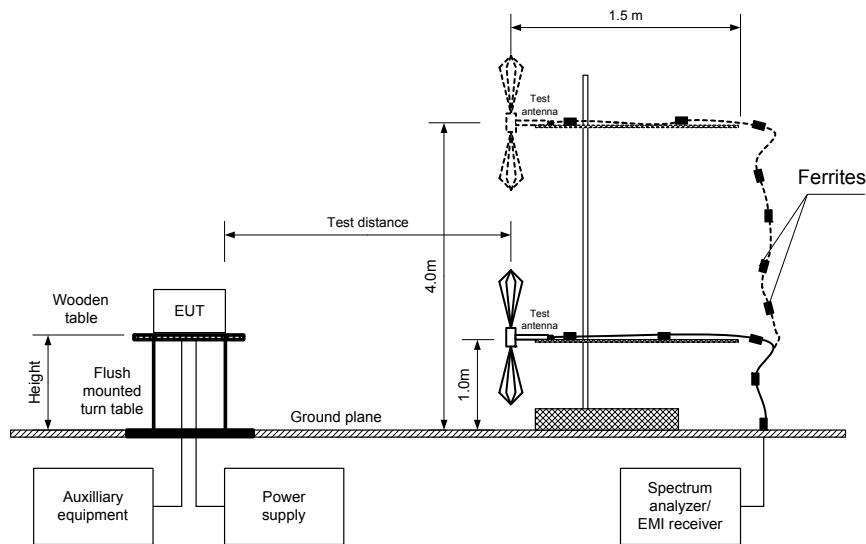

HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	2/1/2012	Temperature: 23 °C	Air Pressure: 1007 hPa
Remarks:	Relative Humidity: 44 % Power Supply: Battery		

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY:	2400-2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 - 25000 MHz
TEST DISTANCE:	3 m
MODULATION:	2FSK
MODULATING SIGNAL:	PRBS
BIT RATE:	2.4 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconical (30 MHz – 200 MHz) Log periodic (200 MHz – 1000 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
7203	63.44	H	1.0	80	102.64	39.20	20.0	19.20	Pass
9604	55.09	V	1.0	270		47.55		27.55	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY:	2400-2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	2FSK
MODULATING SIGNAL:	PRBS
BIT RATE:	2.4 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconical (30 MHz – 200 MHz) Log periodic (200 MHz – 1000 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)			Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
1664.2	H	1.1	160	59.30	74	-14.70	48.90	43.60	54	-10.40
4802.0	H	1.0	270	54.56	74	-19.44	49.84	-44.54	54	-9.46

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
54.35	100.3	NA	NA	NA	-5.3

*- Average factor was calculated as follows

$$\text{for pulse train shorter than 100 ms: } \text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

$$\text{for pulse train longer than 100 ms: } \text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions	
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4
Test mode:	Compliance
Date(s):	2/1/2012
Temperature: 23 °C	Air Pressure: 1007 hPa
Remarks:	Relative Humidity: 44 % Power Supply: Battery

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
240.1	40.20	29.8	46	-16.2	H	1.1	170	Pass
942.8	39.71	34.2	46	-11.8	H	1.1	170	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.3.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 0768	HL 2780	HL 2871	HL 3535	HL 3617
HL 3533	HL 3901	HL 4114	HL 4150				

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.3.1 Radiated emission measurements at the carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: 2FSK



ACTV DET: PEAK
MEAS DET: PEAK OP AVC
MKR 2.400893 GHz
102.64 dB μ V/m

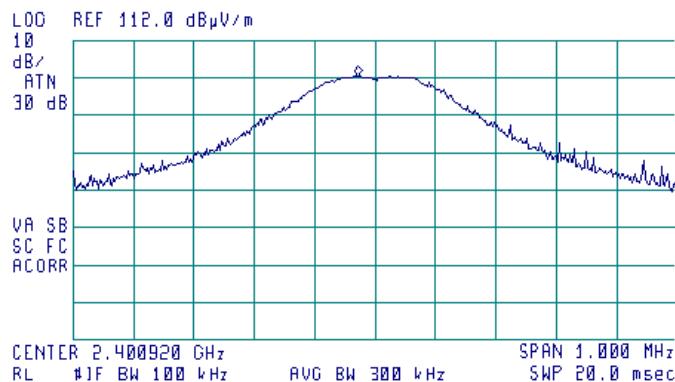



HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.3.2 Radiated emission measurements from 9 to 150 kHz at the carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: 2FSK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 9.0 kHz
72.26 dB μ V/m

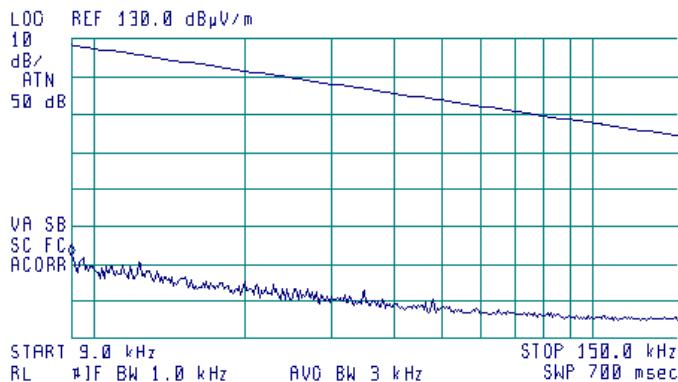


Plot 7.3.3 Radiated emission measurements from 0.15 to 30 MHz at the carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: 2FSK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
58.09 dB μ V/m

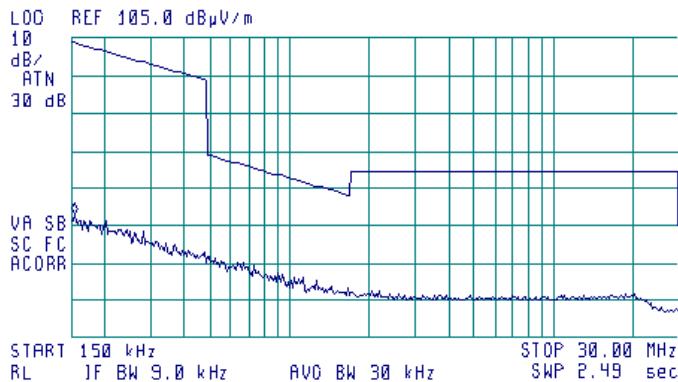



HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.3.4 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: 2FSK





ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 942.8 MHz
 39.71 dB μ V/m

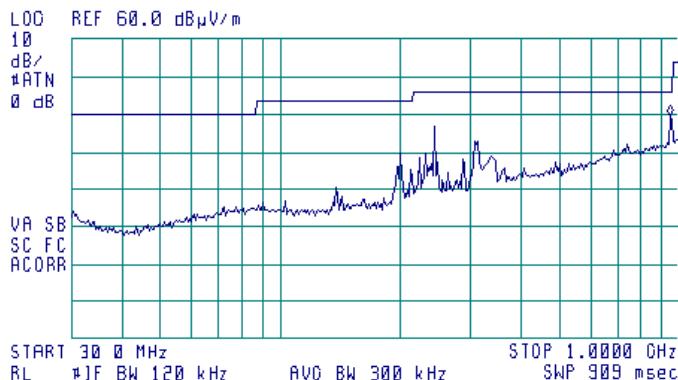**Plot 7.3.5 Radiated emission measurements from 1000 to 4000 MHz**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: 2FSK



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 2.399 GHz
 87.98 dB μ V/m

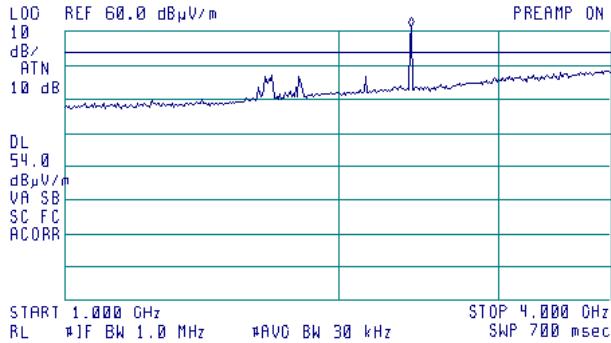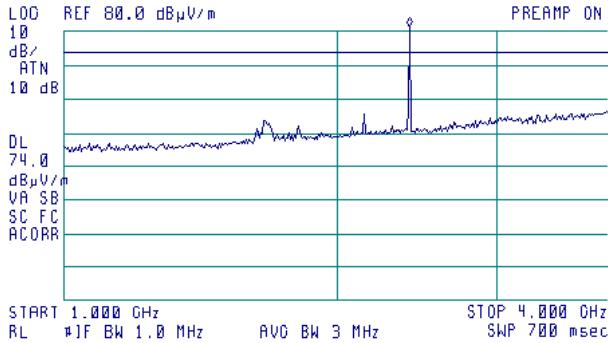




HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.3.6 Radiated emission measurements from 4.0 to 8.0 GHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: 2FSK

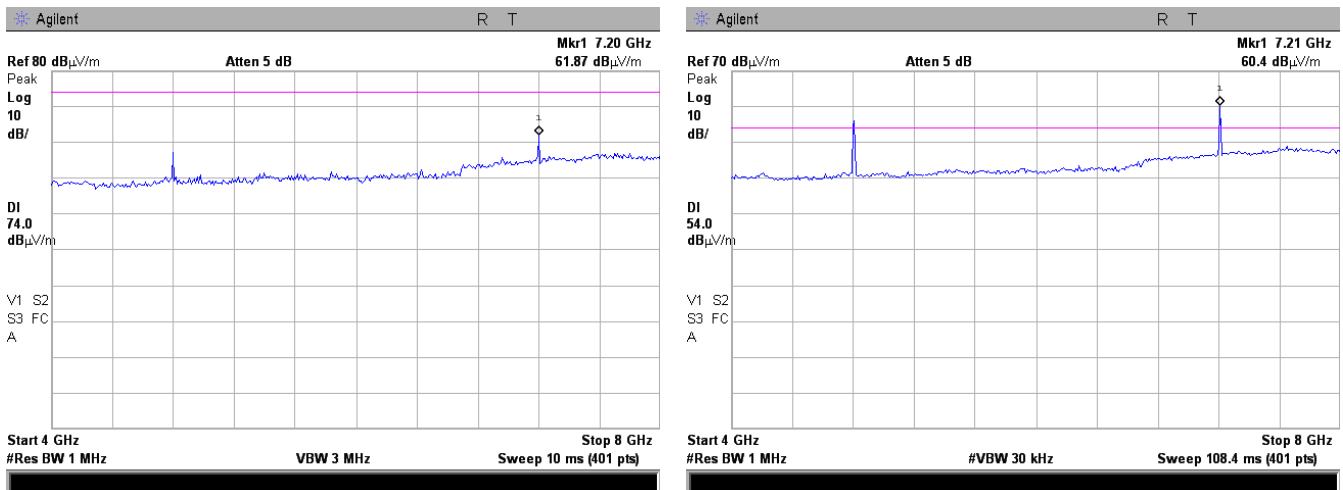**Plot 7.3.7 Radiated emission measurements from 8.0 to 18.0GHz**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: 2FSK

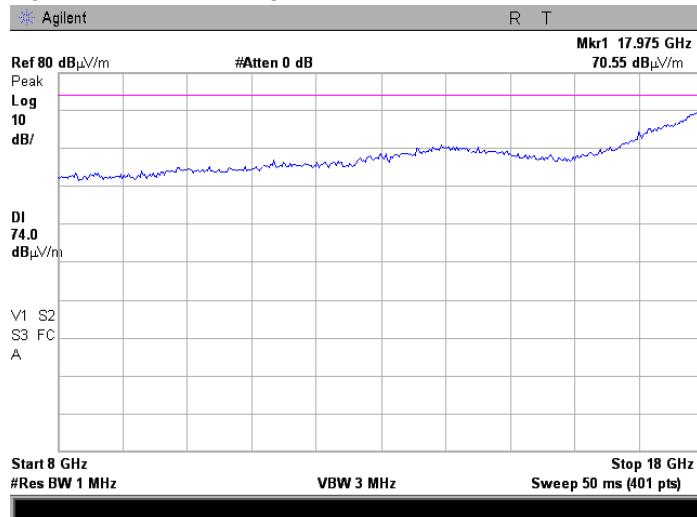




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.3.8 Radiated emission measurements at the second harmonic

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: 2FSK

ANTENNA POLARIZATION: Vertical

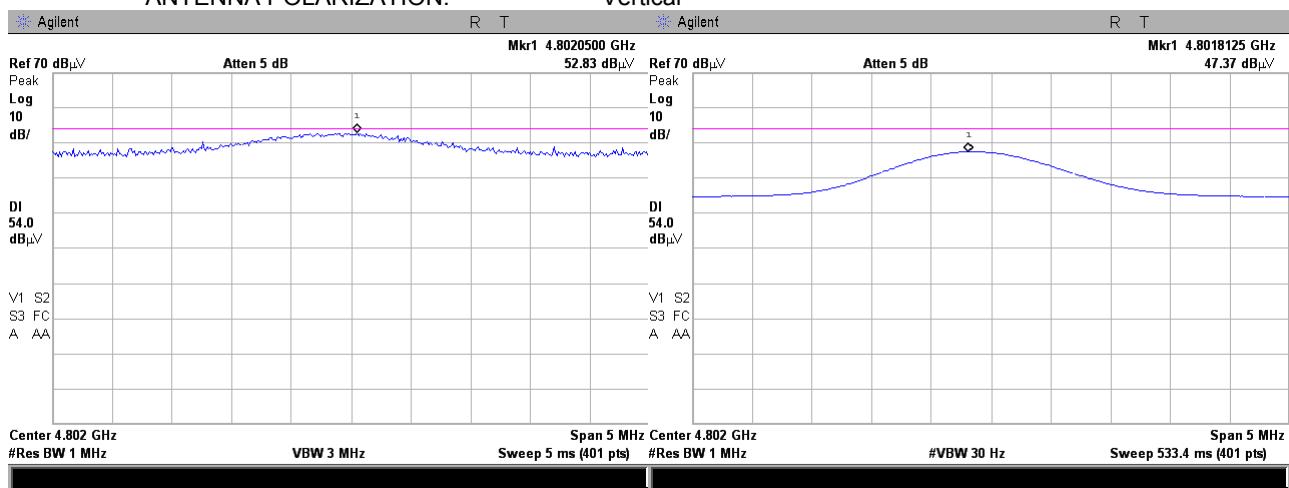

ANTENNA POLARIZATION: Horizontal

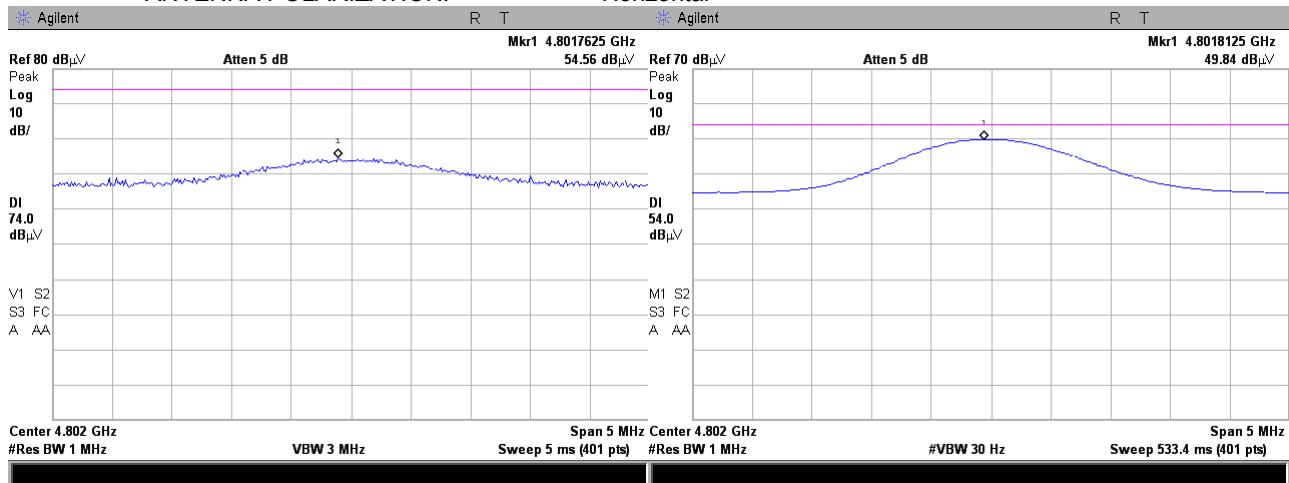



HERMON LABORATORIES


Report ID: CARRAD_FCC.22777_DTS.docx

Date of Issue: 29-Feb-12

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.3.9 Radiated emission measurements at the third harmonic

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: 2FSK

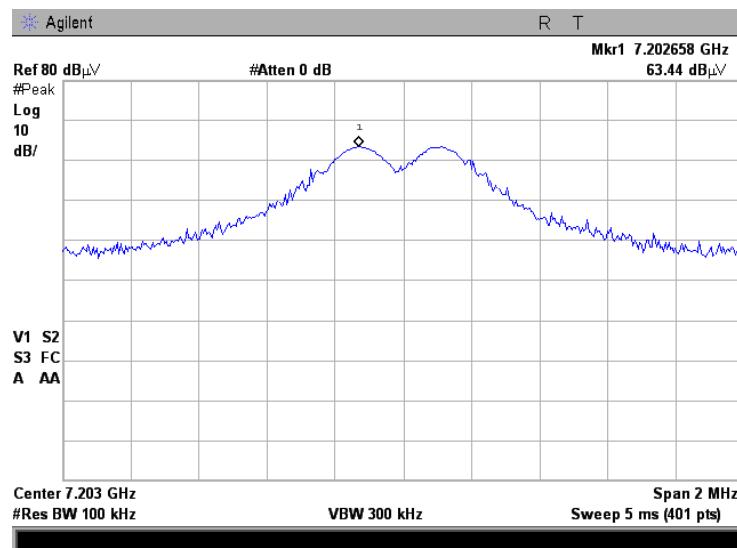

Plot 7.3.10 Radiated emission measurements at the fourth harmonic

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: 2FSK

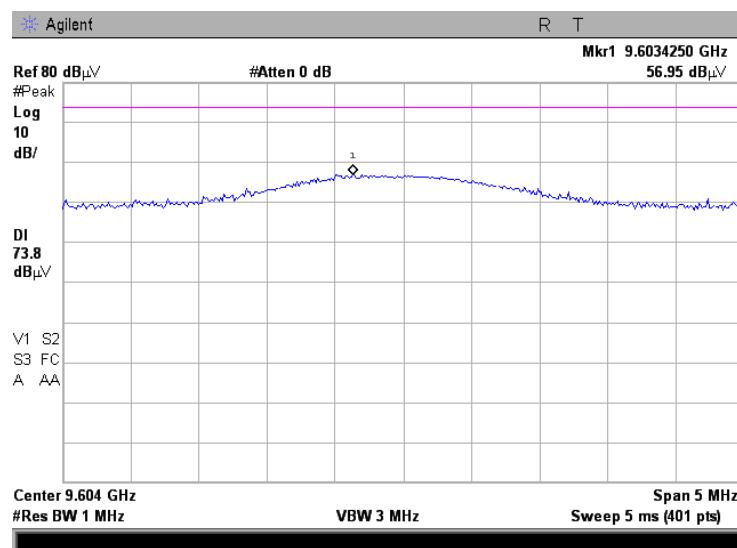





HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.3.11 Transmission pulse duration

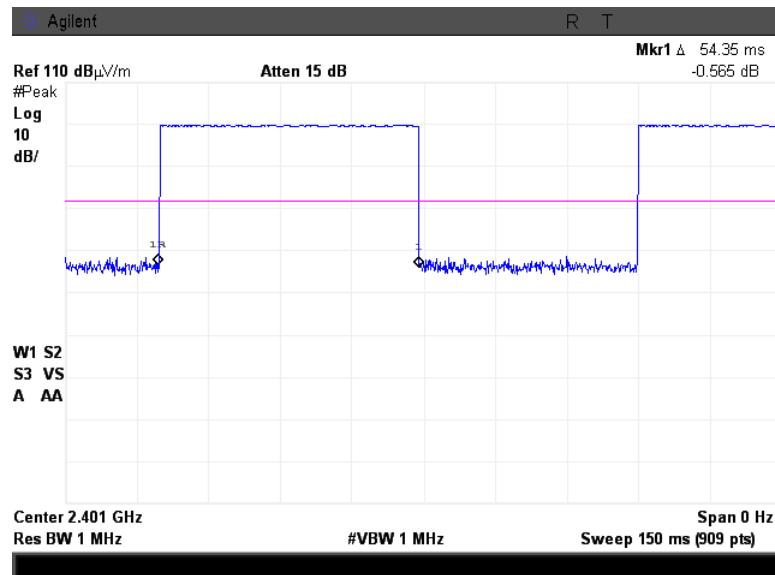

Plot 7.3.12 Transmission pulse period

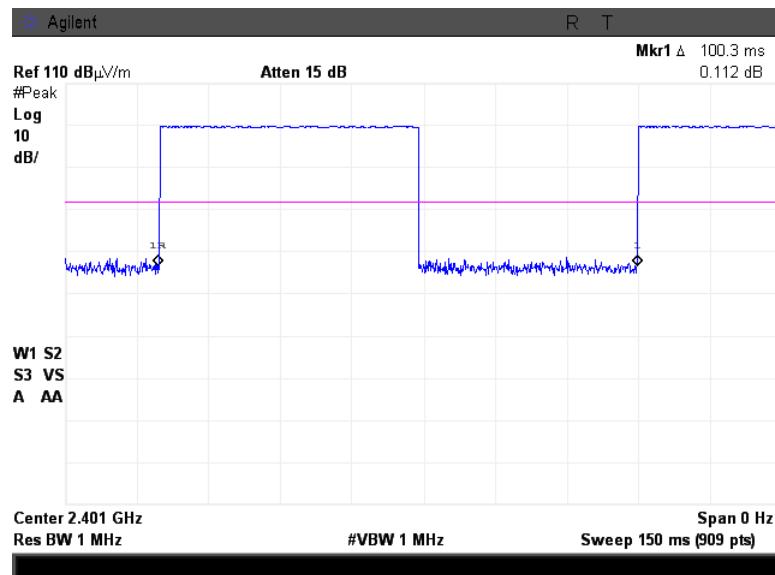



HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	2/1/2012	Air Pressure: 1007 hPa	Relative Humidity: 44 %
Temperature: 23 °C		Power Supply: Battery	
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

Figure 7.4.1 Band edge emission test setup





HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW

MODULATION: MSK
 BIT RATE: 500 kbps

Frequency, MHz	Band edge emission, dBuV/m	Emission at carrier, dBuV/m	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400	60.13	92.10	31.97	20.0	11.97	Pass
2483.5	56.17		NA		NA	

MODULATION: 2FSK
 BIT RATE: 2.4 kbps

Frequency, MHz	Band edge emission, dBuV/m	Emission at carrier, dBuV/m	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400	58.12	102.64	44.52	20.0	24.52	Pass
2483.5	43.30		NA		NA	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 0415	HL 0521	HL 0812	HL 1425	HL 1984	HL 2432	HL 2871	HL 3617
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.1 The highest emission level within the assigned band at carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: MSK

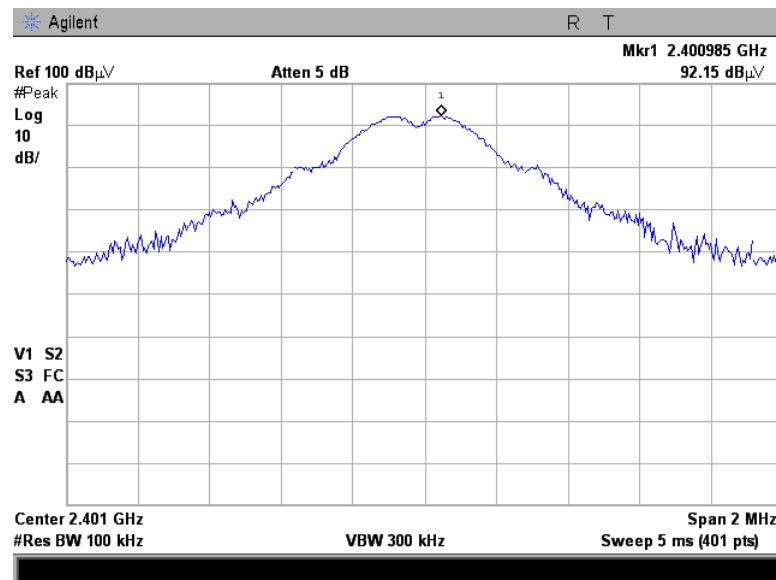



HERMON LABORATORIES


Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.2 The highest low band edge emission at carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 RBW; VBW RBW=100 kHz; VBW=300 kHz
 NOTE: Outside restricted band 2390 – 2400 MHz




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 2.39999 GHz
 60.13 dB μ V/m

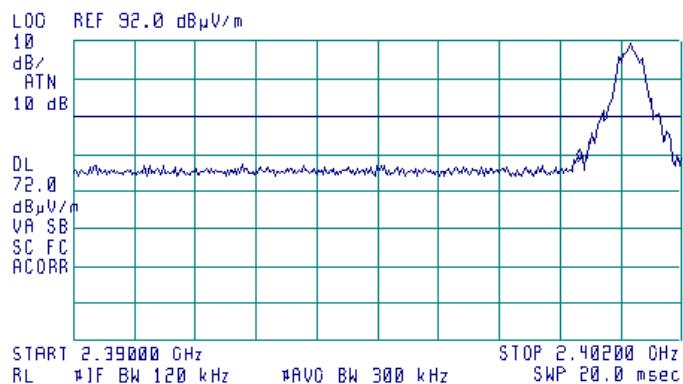**Plot 7.4.3 The highest low band edge emission at carrier frequency**


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 RBW=1MHz; VBW=3 MHz RBW=1MHz; VBW=10 kHz
 NOTE: Within restricted band 2390 – 2390 MHz



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 2.38740 GHz
 66.45 dB μ V/m

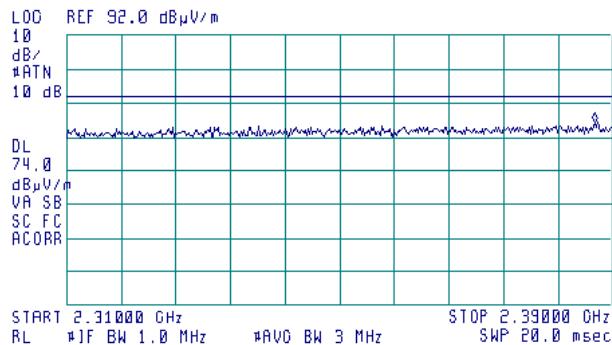

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 2.38640 GHz
 45.82 dB μ V/m

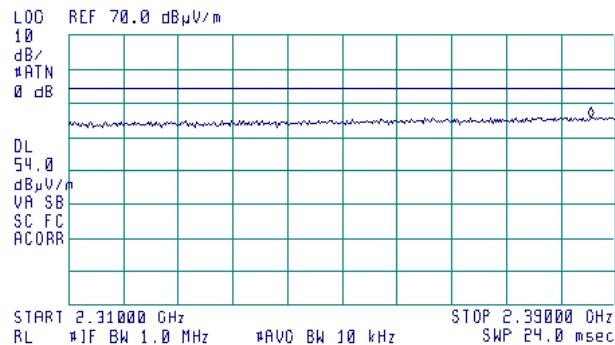



HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.4 The highest high band edge emission at carrier frequency

TEST SITE:

OATS

TEST DISTANCE:

3 m

ANTENNA POLARIZATION:

Vertical and Horizontal

RBW=1MHz; VBW=3 MHz

RBW=1MHz; VBW=10 kHz



NOTE:

Within restricted band 2483.5 – 2500 MHz



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.48585 GHz
56.17 dB μ V/m

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.49979 GHz
47.38 dB μ V/m

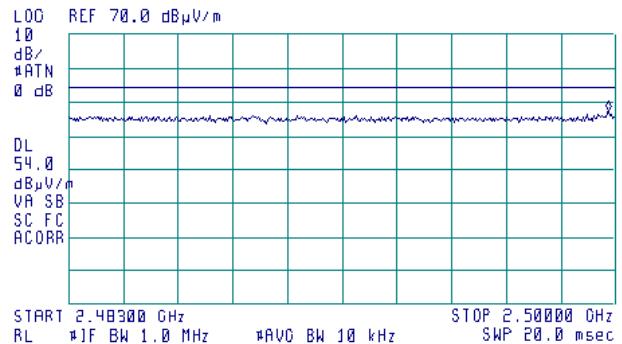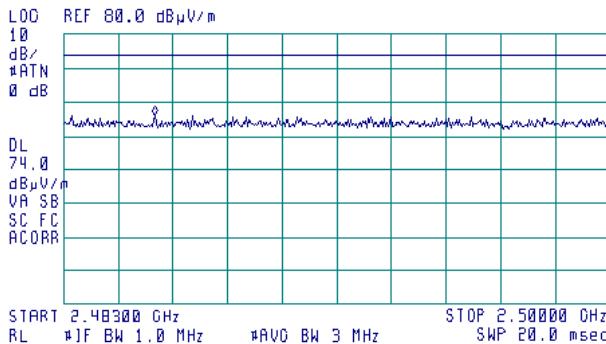




HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.5 The highest emission level within the assigned band at carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: 2FSK

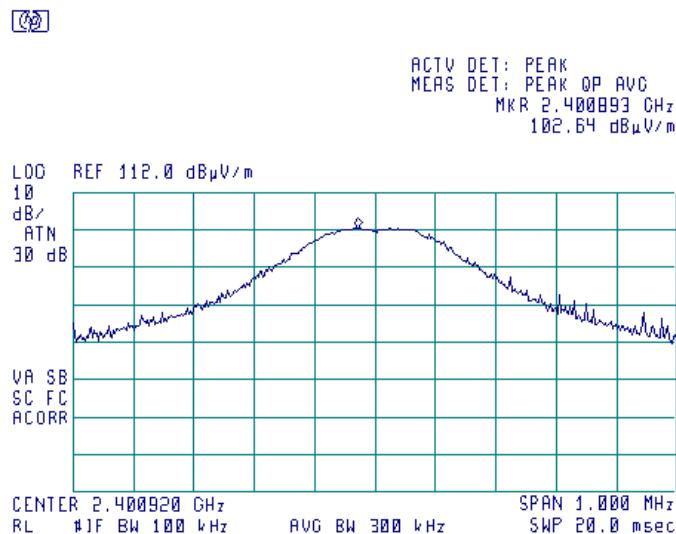



HERMON LABORATORIES


Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.6 The highest low band edge emission at carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 MODULATION: 2FSK
 NOTE: Outside restricted band 2390 – 2400 MHz




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 2.39995 GHz
 58.12 dB μ V/m

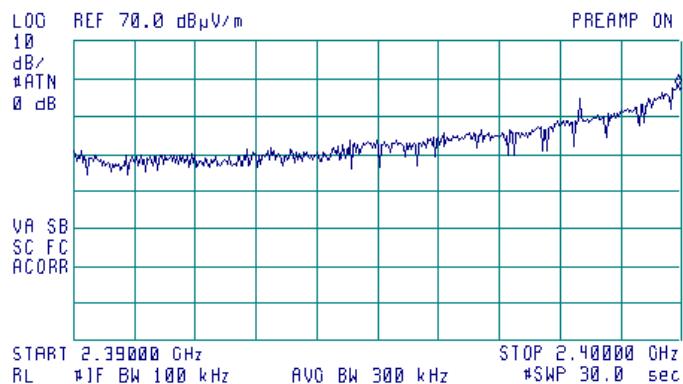**Plot 7.4.7 The highest low band edge emission at carrier frequency**


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 RBW=1MHz; VBW=3 MHz
 NOTE: Within restricted band 2310 – 2390 MHz



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 2.38980 GHz
 50.06 dB μ V/m

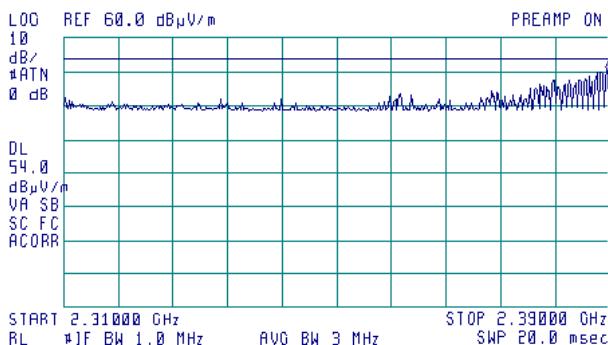

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 2.32720 GHz
 33.51 dB μ V/m

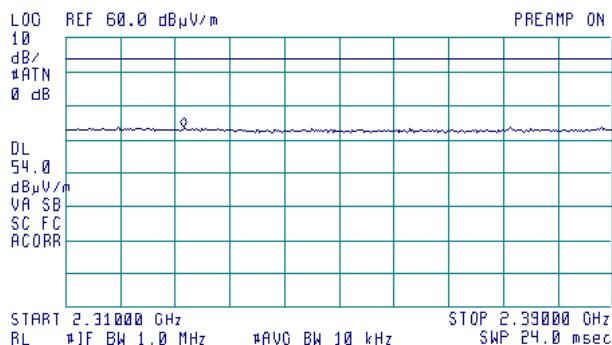




HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.8 The highest high band edge emission at high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
RBW; VBW RBW=1MHz; VBW=3 MHz
NOTE: Within restricted band 2483.5 – 2500 MHz

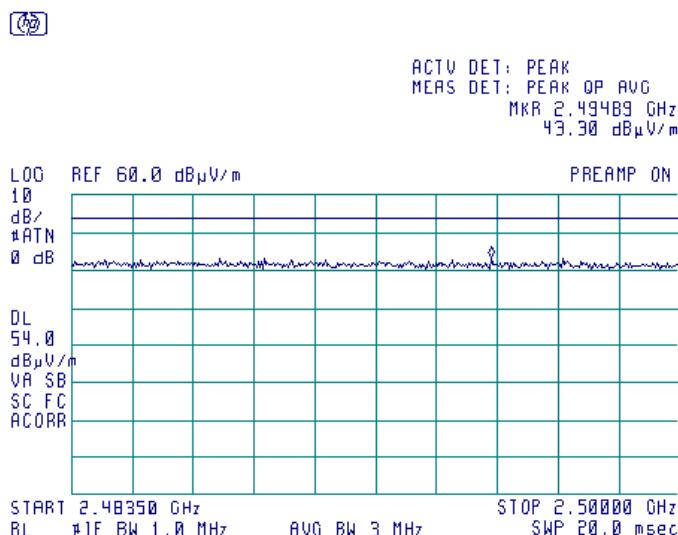



HERMON LABORATORIES

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

7.5 Peak spectral power density

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(µV/m)*
902.0 – 928.0			
2400.0 – 2483.5	3.0	8.0	103.2
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for field strength measurements

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.5.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.




HERMON LABORATORIES

Report ID: CARRAD_FCC.22777_DTS.docx

Date of Issue: 29-Feb-12

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

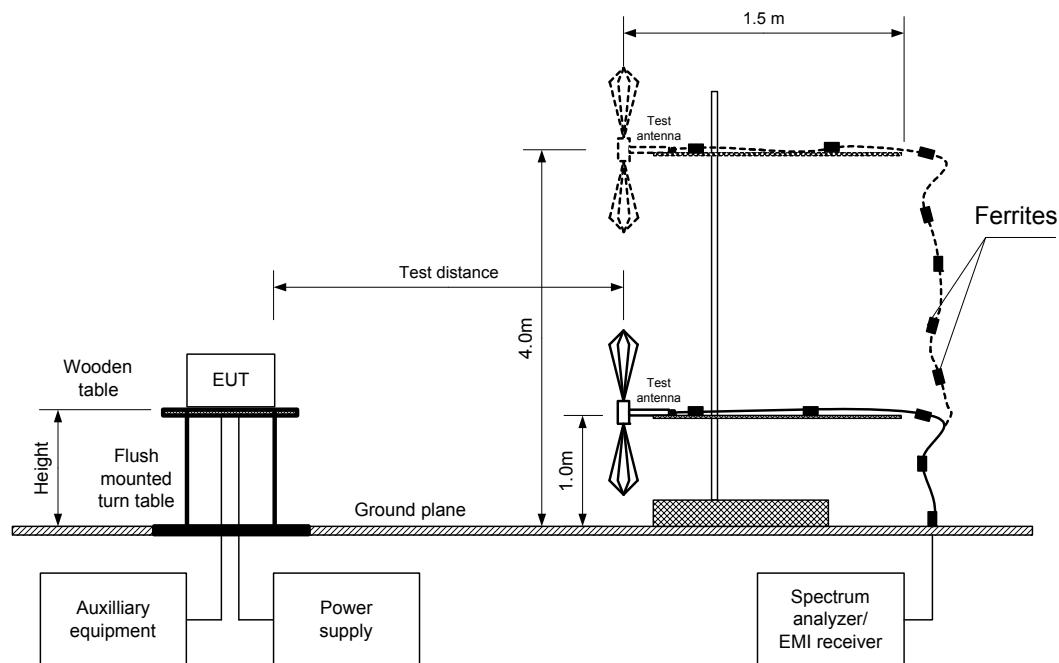



HERMON LABORATORIES

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict: PASS	
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY BAND:	2400-2483.5 MHz							
TEST DISTANCE:	3 m							
TEST SITE:	Semi Anechoic chamber							
EUT HEIGHT:	0.8 m							
DETECTOR USED:	Peak							
RESOLUTION BANDWIDTH:	3 kHz							
VIDEO BANDWIDTH:	10 kHz							
MODULATING SIGNAL:	PRBS							
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum							
Frequency, MHz	Field strength, dB(µV/m)	EUT antenna gain, dBi	Limit, dB(µV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
MSK Modulation								
2401	87.03	0	103.2	-16.17	H	1.1	230	Pass
2FSK Modulation								
2401	102.51	0	103.2	-0.69	H	1.1	230	Pass

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 1984	HL 2871	HL 3617	HL 4289			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.5.1 Peak spectral power density, MSK modulation

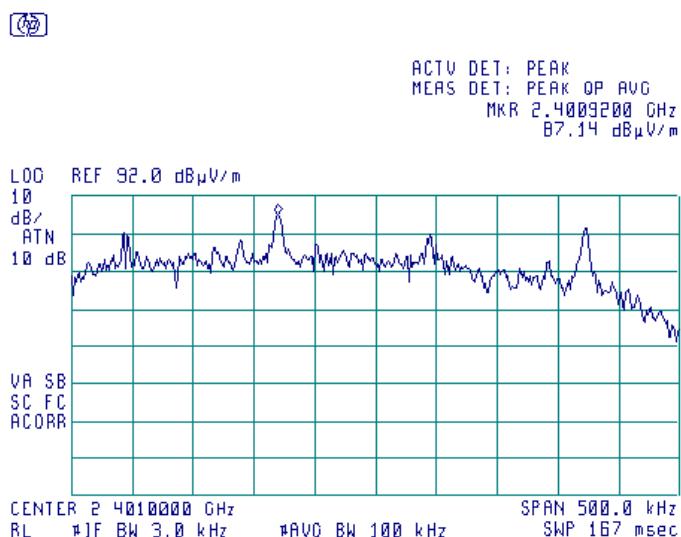

Plot 7.5.2 Peak spectral power density zoomed at the peak

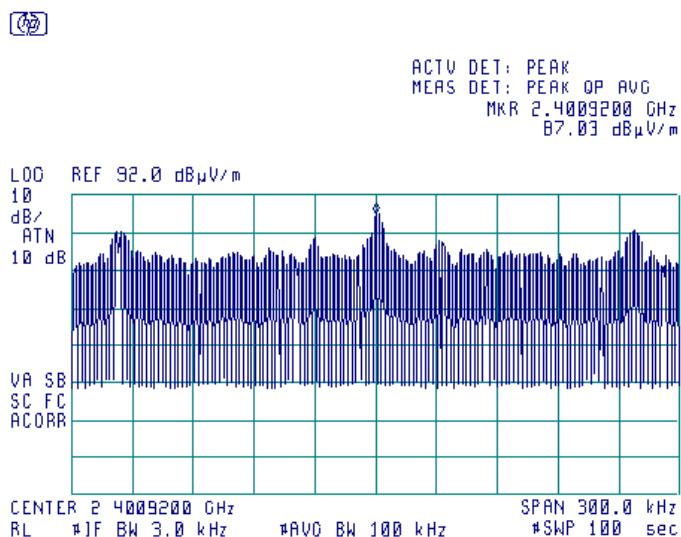




HERMON LABORATORIES

Test specification:	Section 15.247(d), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date(s):	2/1/2012		
Temperature: 23 °C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.5.3 Peak spectral power density, 2FSK modulation



Plot 7.5.4 Peak spectral power density zoomed at the peak

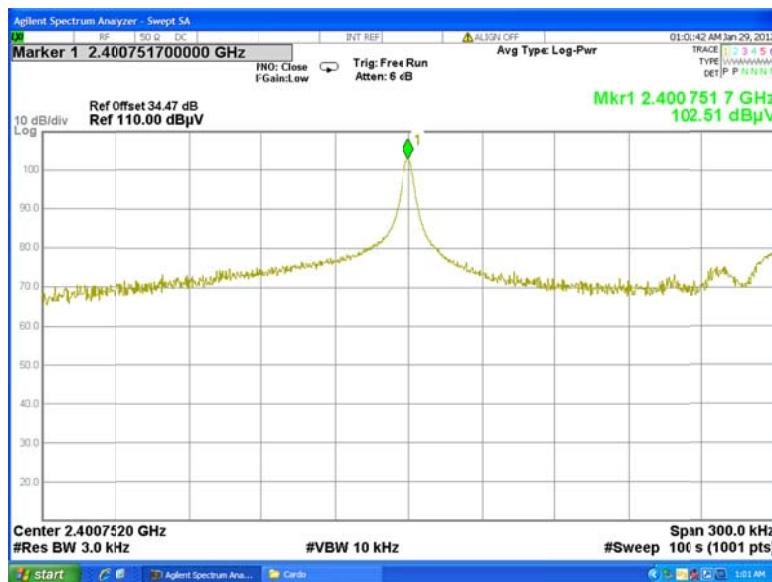



HERMON LABORATORIES

Test specification:	Section 15.203 / RSS-Gen, section 7.1.2, Antenna requirements		
Test procedure:	Visual inspection		
Test mode:	Compliance	Verdict:	PASS
Date(s):	1/3/2012		
Temperature: 22.3 °C	Air Pressure: 1024 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



HERMON LABORATORIES

8 APPENDIX A APPENDIX B Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0415	Cable, Coax, RF, RG-214, 12.3 m	Hermon Laboratories	CC-3	056	01-Dec-11	01-Dec-12
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-11	03-Jul-12
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	29-Aug-11	29-Sep-12
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-11	11-Jan-13
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain	Quinstar Technology	QWH-4200-BA	110	03-Feb-12	03-Feb-15
0812	Cable Coax, RG-214, 11.5 m, N-type connectors	Hermon Laboratories	C214-11	148	01-Dec-11	01-Dec-12
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Aug-11	24-Aug-12
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	25-Nov-11	25-Nov-12
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	25-Nov-11	25-Nov-12
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	07-Jul-11	07-Jul-12
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	15-Jan-12	15-Jan-13
3533	Amplifier, low noise, 6 to 18 GHz	Quinstar Technology	QLJ-06184040-J0	111590010 01	25-Dec-11	25-Dec-12
3535	Amplifier, low noise, 18 to 40 GHz	Quinstar Technology	QLJ-18404537-J0	111590030 01	11-Jul-11	11-Jul-12
3617	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	RG 214/U	NA	19-May-11	19-May-12
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	07-Feb-11	07-Feb-12
4114	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz	ETS Lindgren	3117	00123515	23-Jan-12	23-Jan-13
4150	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 91	14-Jun-11	14-Jun-12
4289	PXA signal analyzer, 3 Hz to 50 GHz	Agilent Technologies	N9030	US511601 71	20-Dec-11	20-Dec-12



HERMON LABORATORIES

9 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

10 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX E Specification references

FCC 47CFR part 15: 2010	Radio Frequency Devices
FR Vol.62	Federal Register, Volume 62, May 13, 1997
FCC New Guidance:2004	FCC New Guidance on Measurements for DTS
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment



HERMON LABORATORIES

12 APPENDIX F Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Standard gain horn antenna
Quinstar Technology
Model QWH
Ser.No.110, HL 0768

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

**Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604**

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged waveguide horn antenna
ETS Lindgren, Model 3117, serial number: 00123515, HL 4114

Frequency, MHz	Antenna factor, dB/m		
	Measured	Manufacturer	Deviation
1000	28.0	28.4	-0.4
1500	28.0	27.4	0.6
2000	31.2	30.9	0.3
2500	32.5	33.4	-0.9
3000	32.9	32.6	0.3
3500	32.7	32.8	-0.1
4000	33.1	33.4	-0.3
4500	33.8	33.9	-0.1
5000	33.8	34.1	-0.3
5500	34.4	34.5	-0.1
6000	35.0	35.2	-0.2
6500	35.4	35.5	-0.1
7000	35.7	35.7	0.0
7500	35.9	35.7	0.2
8000	35.8	35.8	0.0
8500	35.9	35.8	0.1
9000	36.3	36.2	0.1
9500	36.6	36.6	0.0
10000	37.1	37.1	0.0
10500	37.6	37.5	0.1
11000	37.9	37.7	0.2
11500	38.5	38.1	0.4
12000	39.2	38.7	0.5
12500	39.0	38.9	0.1
13000	39.1	39.1	0.0
13500	38.9	38.8	0.1
14000	39.0	38.8	0.2
14500	39.6	39.9	-0.3
15000	39.9	39.7	0.2
15500	39.9	40.1	-0.2
16000	40.7	40.8	-0.1
16500	41.3	41.8	-0.5
17000	42.5	42.1	0.4
17500	41.3	41.2	0.1
18000	41.4	40.9	0.5

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field strength in dB(μ V/meter)



HERMON LABORATORIES

Cable loss
Cable coax, RG-214, 12.3 m, s/n 056, HL 0415

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	10	0.23	±0.12
2	30	0.44	±0.12
3	50	0.60	±0.12
4	100	0.89	±0.12
5	150	1.11	±0.13
6	200	1.30	±0.13
7	250	1.45	±0.13
8	300	1.61	±0.13
9	400	1.94	±0.13
10	500	2.18	±0.13
11	600	2.45	±0.14
12	700	2.67	±0.14
13	800	2.94	±0.14
14	900	3.16	±0.14
15	1000	3.38	±0.14



HERMON LABORATORIES

Cable loss
Cable Coaxial, RG-214, 11.5 m, s/n 148, HL 0812

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	10	0.23	±0.12
2	30	0.44	±0.12
3	50	0.60	±0.12
4	100	0.90	±0.12
5	150	1.13	±0.13
6	200	1.34	±0.13
7	250	1.51	±0.13
8	300	1.68	±0.13
9	400	2.01	±0.13
10	500	2.28	±0.13
11	600	2.56	±0.14
12	700	2.80	±0.14
13	800	3.07	±0.14
14	900	3.33	±0.14
15	1000	3.53	±0.14



HERMON LABORATORIES

Cable loss
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



HERMON LABORATORIES

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3617

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2200	2.97	4500	5.10
50	0.33	2300	3.06	4600	5.20
100	0.48	2400	3.16	4700	5.34
200	0.71	2500	3.23	4800	5.36
300	0.89	2600	3.34	4900	5.48
400	1.04	2700	3.42	5000	5.52
500	1.19	2800	3.52	5100	5.61
600	1.32	2900	3.61	5200	5.72
700	1.44	3000	3.69	5300	5.81
800	1.56	3100	3.80	5400	5.93
900	1.68	3200	3.86	5500	6.08
1000	1.80	3300	3.98	5600	6.12
1100	1.90	3400	4.07	5700	6.25
1200	2.00	3500	4.14	5800	6.31
1300	2.11	3600	4.27	5900	6.41
1400	2.21	3700	4.36	6000	6.51
1500	2.30	3800	4.47	6100	6.62
1600	2.40	3900	4.62	6200	6.73
1700	2.49	4000	4.63	6300	6.86
1800	2.61	4100	4.76	6400	6.94
1900	2.69	4200	4.83	6500	7.06
2000	2.79	4300	4.89		
2100	2.88	4400	5.04		



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



HERMON LABORATORIES

13 APPENDIX G Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT