



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



DATE: 29 August 2018

**I.T.L. (PRODUCT TESTING) LTD.
FCC/IC Radio Test Report
for
Cardo Systems Ltd.**

Equipment under test:

**Bluetooth Communication System
for Bicycles**

**Original: scala rider FREECOM 4
New: TERRANO XT
(BLE)**

Tested by:


M. Zohar

Approved by:


D. Shidlow

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Cardo Systems Ltd.

Bluetooth Communication System for Bicycles

Original: scala rider FREECOM 4

New: TERRANO XT

FCC ID: Q95ER22

IC: 4668A-ER22

This report concerns:

Original Grant:

Class I Change:

Class II Change: X

Equipment type:

FCC: DTS Digital Transmission System

IC: Spread Spectrum Digital Device (2400-2483.5)

Limits used:

47CFR15 Section 15.247

RSS 247, Issue 2, February 2017, Section 5

RSS-Gen, Issue 4, November 2014

Measurement procedures used are KDB 558074 D01 v03r05 and ANSI C63.10: 2013.

Application for Certification

prepared by:

R. Pinchuck

ITL (Product Testing) Ltd.

1 Bat Sheva Street

Lod 7116002

Israel

e-mail Rpinchuck@itl.co.il

Applicant for this device:

(different from "prepared by")

Amit Davidson

Cardo Systems Ltd.

811 E. Plano Parkway, Suite 110A

Plano, Texas, USA, 75074

Tel: +1 (214) 396-1196

Fax: +1 (214) 276-7844

Email: amitd@cardosystems.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification	7
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	8
3.	CONDUCTED & RADIATED MEASUREMENT TEST SET-UP PHOTOS -----	10
4.	OCCUPIED BANDWIDTH -----	11
4.1	Test Specification	11
4.2	Test Procedure	11
4.3	Test Limit	11
4.4	Test Results.....	11
4.5	Test Equipment Used, Occupied Bandwidth.....	13
5.	PEAK OUTPUT POWER -----	14
5.1	Test Specification	14
5.2	Test Procedure	14
5.3	Test Limit	14
5.4	Test Results.....	14
5.5	Test Equipment Used, Radiated Maximum Power Output	15
6.	SPURIOUS RADIATED EMISSIONS -----	16
6.1	Test Specification	16
6.2	Test Procedure	16
6.3	Test Limit	17
6.4	Test Results.....	17
6.5	Test Equipment Used, Spurious Radiated Emissions	19
7.	R.F EXPOSURE/SAFETY-----	21
8.	APPENDIX A - CORRECTION FACTORS -----	23
8.1	Correction factors for RF OATS Cable 35m ITL #1879	23
8.2	Correction factor for RF CABLE for Semi Anechoic Chamber.....	24
8.3	Correction factors for Active Loop Antenna	25
8.4	Correction factors for biconical antenna – ITL # 1356	26
8.5	Correction factors for log periodic antenna – ITL # 1349.....	27
8.6	Correction factors for Double –Ridged Waveguide Horn ANTENNA.....	28
8.7	Correction factors for Horn Antenna	29



1. General Information

1.1 Administrative Information

Manufacturer:	Cardo Systems Ltd.
Manufacturer's Address:	811 E. Plano Parkway Suite 110A Plano, Texas USA, 75074 Tel: +1 (214) 396-1196 Fax: +1 (214) 276-7844
Manufacturer's Representative:	Amit Davidson
Equipment Under Test (E.U.T):	Bluetooth Communication System for Bicycles
Equipment Model No.:	Original: scala rider FREECOM 4 New: TERRANO XT
Equipment Serial No.:	Not designated
HVIN:	1
PMN:	TERRANO XT
Date of Receipt of E.U.T:	June 13, 2018
Start of Test:	June 13, 2018
End of Test:	June 20, 2018
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	47CFR15 Section 15.247 RSS 247, Issue 2, February 2017, Section 5 RSS-Gen, Issue 4, November 2014



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. Industry Canada (Canada), IC File No.: 46405-4025; Site Nos. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 Product Description

This product is a Bluetooth communication system, Bluetooth intercom and FM Radio receiver for bikes.

Based on Bluetooth Class 1.

1.4 Test Methodology

Radiated testing was performed according to the procedures in KDB 558074 D01 v03r05 and ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.6 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
for open site:
30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

1 GHz to 6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.19 dB

>6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.51 dB

2. System Test Configuration

2.1 Justification

1. The E.U.T. was originally FCC certified on 02/14/2017 under FCC ID: Q95ER22 and IC certified on 1/31/2017 under IC: 4668A-ER22.
2. Currently, changes were made to the original E.U.T. which will now be known as the TERRANO XT. See customer's declaration of changes on page 9.
3. A C2PC is requested based on those changes. The following tests were performed: occupied bandwidth, peak output power and spurious radiated emissions.
4. The E.U.T. met the requirements of a C2PC.
5. The E.U.T contains 3 transceivers: IEEE 802.15.1 standard (BLE).
6. The unit was evaluated while transmitting at the low channel (2402MHz), the mid channel (2440MHz) and the high channel (2480MHz).
7. Conducted emission method performed with connection to spectrum analyzer via 30dB attenuator.
8. Final radiated emission test for spurious emission for the new model was performed after exploratory emission testing that was performed in 3 orthogonal axes to determine the "worst case" radiation.
9. According to the following results, the worst case axis was the Y axis for all channels.

Orientation	Frequency	2 nd Harmonic	3 rd Harmonic
	(MHz)	(dBuV/m)	(dBuV/m)
X axis	2402.0	50.8	59.8
	2440.0	49.3	58.6
	2480.0	52.0	53.8
Y axis	2402.0	51.2	62.0
	2440.0	50.5	61.1
	2480.0	52.1	54.2
Z axis	2402.0	47.5	59.4
	2440.0	50.0	60.4
	2480.0	50.0	50.6

Figure 1. Screening Results

2.2 ***EUT Exercise Software***

No special exercise software was used.

2.3 ***Special Accessories***

No special accessories were needed in order to achieve compliance.

2.4 ***Equipment Modifications***

No modifications were needed in order to achieve compliance.

2.5 ***Configuration of Tested System***




Figure 2. Configuration of Tested System, Radiated




Figure 3. Configuration of Tested System, Conducted



Date: March 26, 2018

To: FCC

FCC: Q95ER22

To whom it may concern,

The previously certified device, the scala rider FREECOM2 & FREECOM4 received FCC certification on FEB 14, 2017 under FCC: Q95ER22.

Subsequently, in the new device, the TERRANO XT, the following changes were made:

1. Change name printed on enclosure.
2. Added 2 resistors to solve charging issue:
 - R59 and R60 resistors added.
3. Added Echo cancel component to improve audio:
U600 – Echo cancel BGA.
4. Adding Y601 12.28Mz clock for U600 audio component.
5. Adding the following passive for U600 audio component operation:
R69,C52,R67,Q4,R61,C50,L11,R81,C53,R68,C95,C622,C623,R605,R604,R619,R634,R636,R620,R635,C616,L601,C617,C619,C620,C610,C609,C621,C618,R633,R632,R631,C615,C614

Thank you,

Amit Davidson, HW manager

Cardo Systems, Ltd.
811 E. Plano Parkway, Ste. 110a
Plano, TX. 75074, USA

Cardo Systems, Ltd.
811 E. Plano Parkway, Ste. 110a
Plano, TX. 75074, USA

3. Conducted & Radiated Measurement Test Set-Up Photos



Figure 4. Conducted Emission Test



Figure 5. Radiated Emission Test

4. Occupied Bandwidth

4.1 Test Specification

F.C.C. Part 15, Subpart C: section 2.1048
RSS Gen, Issue 4, November 2014

4.2 Test Procedure

(Temperature (22°C)/ Humidity (68%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report. The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable. The spectrum analyzer was set to the following parameters:

Span = ~ 1.5 to 5 times the OBW

RBW between 1% to 5% of the OBW

Detector Function: Peak, Trace: Maximum Hold.

4.3 Test Limit

N/A

4.4 Test Results

Modulation	Operation Frequency	Bandwidth Reading
	(MHz)	(kHz)
BLE	2402.0	1030.0
	2440.0	1024.0
	2480.0	1024.0

Figure 6 Test Results

JUDGEMENT: Passed

For additional information see *Figure 7* to *Figure 9*.

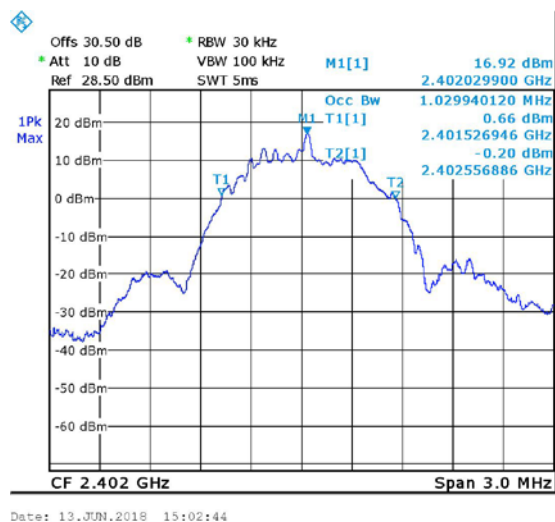


Figure 7. BLE, Low

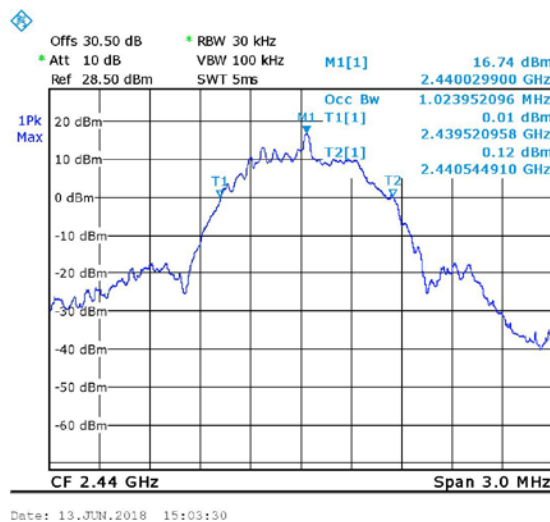


Figure 8. BLE, Mid

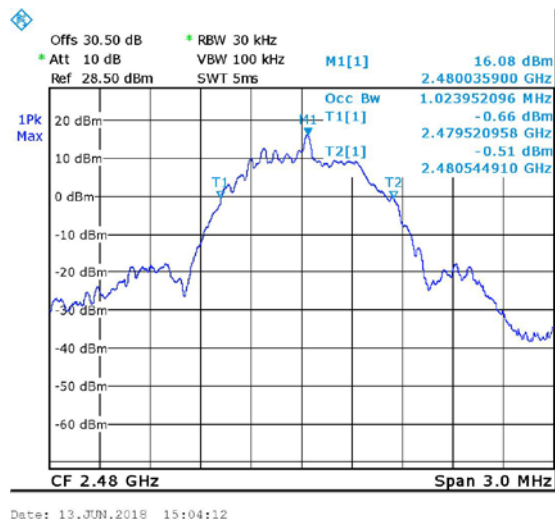


Figure 9. BLE, High



4.5 Test Equipment Used, Occupied Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	October 1, 2018
Spectrum Analyzer	Rohde & Schwarz	FSL6	100194	February 19, 2018	February 19, 2019
RF Cable	EIM	RG214-11N(X2)	-	August 13, 2017	August 13, 2018

Figure 10 Test Equipment Used

5. Peak Output Power

5.1 Test Specification

F.C.C. Part 15, Subpart C: section 15.247(b)(1)
RSS 247, Issue 2, Clause 5.4(2)

5.2 Test Procedure

(Temperature (22°C)/ Humidity (68%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report. The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable.

5.3 Test Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt.

5.4 Test Results

JUDGEMENT: Passed by 948.7 mW

Unit	Modulation	Operation Frequency	Power	Power	Limit	Margin
(Original/New)		(MHz)	(dBm)	(mW)	(mW)	(mW)
Original	BLE	2402.0	17.1	51.3	1000.0	-948.7
		2440.0	17.3	53.7	1000.0	-946.3
		2480.0	16.3	42.7	1000.0	-957.3
New	BLE	2402.0	16.6	45.7	1000.0	-954.3
		2440.0	16.6	45.7	1000.0	-954.3
		2480.0	16.1	40.7	1000.0	-959.3

Figure 11 Radiated Power Output Test Results



5.5 Test Equipment Used, Radiated Maximum Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	October 1, 2018
Spectrum Analyzer	Rohde & Schwarz	FSL6	100194	February 19, 2018	February 19, 2019
RF Cable	EIM	RG214-11N(X2)	-	August 13, 2017	August 13, 2018

Figure 12 Test Equipment Used

6. Spurious Radiated Emissions

6.1 Test Specification

FCC, Part 15, Subpart C, Sections 247(d), 15.205, 15.209
RSS Gen, Issue 4, Section 8.10

6.2 Test Procedure

(Temperature (22°C)/ Humidity (60%RH))

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

For measurements between 1.0GHz-25.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -25.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

6.3 Test Limit

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength* (dBμV/m)	Field strength* (dBμV/m)@3m
0.009-0.490	2400/F(kHz)	300	48.5-13.8	128.5-73.8
0.490-1.705	24000/F(kHz)	30	33.8-23.0	73.8-63.0
1.705-30.0	30	30	29.5	69.5
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

6.4 Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C 209 and RSS Gen, Issue 4, Section 8.10 specification.

For additional information see *Figure 13*.



Spurious Radiated Emission

Specification: FCC, Part 15, Subpart C; Sections 15.209, 15.205, 15.247(d);
RSS Gen, Issue 4, Section 8.10

Antenna Polarization: Horizontal/Vertical
Protocol type: BLE

Frequency range: 9 kHz to 25.0 GHz
Detectors: Peak

Unit	Operation Frequency	Freq.	Pol	Peak Reading	Peak Limit	Peak Margin
(Original/New)	(MHz)	(MHz)	(H/V)	(dBμV/m)	(dBμV/m)	(dB)
Original	2402.0	7206.0	V	59.0	74.0	-15.0
		7206.0	H	61.6	74.0	-12.4
		9608.0	V	58.9	74.0	-15.1
		9608.0	H	59.2	74.0	-14.8
	2440.0	7320.0	V	54.9	74.0	-19.1
		7320.0	H	55.0	74.0	-19.0
		9760.0	V	63.4	74.0	-10.6
		9760.0	H	61.2	74.0	-12.8
	2480.0	4960.0	V	49.1	74.0	-24.9
		7440.0	H	56.3	74.0	-17.7
		9920.0	V	63.8	74.0	-10.2
		9920.0	H	64.5	74.0	-9.5
New	2402.0	7206.0	V	54.4	74.0	-19.6
		7206.0	H	61.9	74.0	-12.1
		9608.0	V	60.4	74.0	-13.6
		9608.0	H	60.5	74.0	-13.5
	2440.0	7320.0	V	53.0	74.0	-21.0
		7320.0	H	52.1	74.0	-21.9
		9760.0	V	62.6	74.0	-11.4
		9760.0	H	58.7	74.0	-15.3
	2480.0	4960.0	V	51.0	74.0	-23.0
		7440.0	H	54.2	74.0	-19.8
		9920.0	V	61.6	74.0	-12.4
		9920.0	H	63.6	74.0	-10.4

Figure 13. Radiated Emission Results - BLE



Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

6.5 Test Equipment Used, Spurious Radiated Emissions

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 19, 2018	February 19, 2019
Spectrum Analyzer	HP	8592L	3826A01204	February 19, 2018	February 19, 2019
EMI Receiver	HP	8542E	3906A00276	February 19, 2018	February 19, 2019
RF Filter section	HP	85420E	3705A00248	February 19, 2018	February 19, 2019
Horn Antenna	ETS	3115	29845	May 31, 2018	May 31 2021
Horn Antenna	ARA	SWH-28	1007	December 13, 2017	December 13, 2020
Log Periodic Antenna	EMCO	3146	9505-4081	May 31, 2018	May 31, 2019
Biconical Log Antenna	EMCO	3110B	9912-3337	May 15, 2017	May 15, 2019
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2017	October 19, 2018
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	October 1, 2017	October 1, 2018
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	October 1, 2017	October 1, 2018
RF Cable	Commscope ORS	0623 WBC-400	G020132-	October 1, 2017	October 1, 2018
RF Cable	EIM	RG214-11N(X2)	-	August 13, 2017	August 13, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR
Antenna Mast	ETS	2070-2	9608-1497	NCR	NCR
Turntable	ETS	2087	-	NCR	NCR
Mast & Table Controller	ETS/EMCO	2090	9608-1456	NCR	NCR

Figure 14 Test Equipment Used



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



7. R.F Exposure/Safety

The typical placement of the E.U.T. is on a bicycle helmet. The typical distance between the E.U.T. and the user is 3cm. See photos on following page.

SAR Testing Exclusion Based on Section 4.3.1 and Appendix A of KDB447498 D01 V05 and RSS 102, Issue 5, Section 2.5.2 Requirements

For FCC

Section 4.3.1 and Appendix A of KDB447498 D01 V05 was used as the guidance as follows:

Peak power output =16.6 dBm =45.7mW

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] =$

$45.7/30 * 1.55=2.36$ this value is less than 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR.

The SAR measurement is not necessary.


For IC

(a) For IC per Table 1 of RSS 102 Issue 5, SAR exemption based on IC limit of 83mW at a separation distance of 30mm= 3.0cm at 2450 MHz.

EUT power transmission is 16.6 dBm =45.7mW

This is below the 83.0mW SAR exemption limits.

See photos on following page.

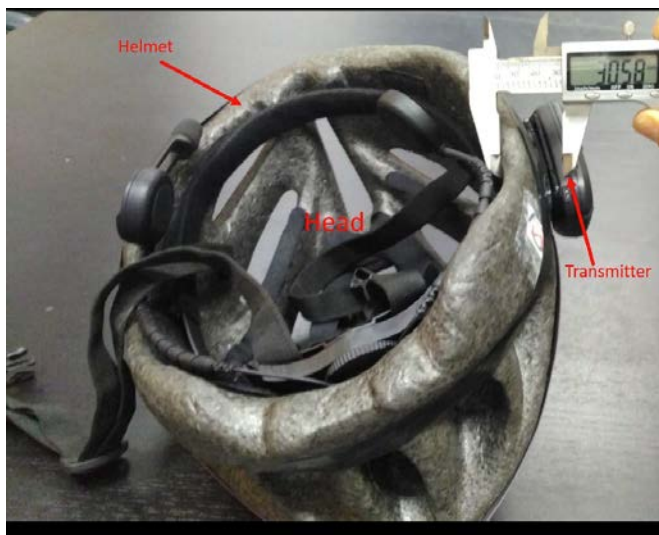



8. APPENDIX A - CORRECTION FACTORS

8.1 Correction factors for

RF OATS Cable 35m ITL #1879

Frequency (MHz)	Cable loss (dB)
30.0	1.1
50.0	1.1
100.0	1.7
150.0	2.1
200.0	2.5
250.0	2.7
300.0	2.9
350.0	3.1
400.0	3.5
450.0	3.7
500.0	3.9
550.0	4.0
600.0	4.2
650.0	4.4
700.0	4.9
750.0	5.0
800.0	5.0
850.0	4.9
900.0	5.0
950.0	5.1
1000.0	5.4



8.2 Correction factor for RF CABLE for Semi Anechoic Chamber
ITL # 1841

FREQ (MHz)	LOSS (dB)
1000.0	1.5
2000.0	2.1
3000.0	2.7
4000.0	3.1
5000.0	3.5
6000.0	4.1
7000.0	4.6
8000.0	4.9
9000.0	5.7
10000.0	5.7
11000.0	6.1
12000.0	6.1
13000.0	6.2
14000.0	6.7
15000.0	7.4
16000.0	7.5
17000.0	7.9
18000.0	8.1
19000.0	8.8
20000.0	9.1

NOTES:

- 1. The cable is manufactured by Commscope*
- 2. The cable type is 0623 WBC-400, serial # G020132 and 10m long*



8.3 Correction factors for Active Loop Antenna

Model 6502 S/N 9506-2950

ITL # 1075:

f(MHz)	MAF(dBs/m)	AF(dB/m)
0.01	-33.1	18.4
0.02	-37.2	14.3
0.03	-38.2	13.3
0.05	-39.8	11.7
0.1	-40.1	11.4
0.2	-40.3	11.2
0.3	-40.3	11.2
0.5	-40.3	11.2
0.7	-40.3	11.2
1	-40.1	11.4
2	-40	11.5
3	-40	11.5
4	-40.1	11.4
5	-40.2	11.3
6	-40.4	11.1
7	-40.4	11.1
8	-40.4	11.1
9	-40.5	11
10	-40.5	11
20	-41.5	10
30	-43.5	8



8.4 Correction factors for biconical antenna – ITL # 1356

Model: EMCO 3110B

Serial No.:9912-3337

Frequency	ITL 1356 AF
[MHz]	[dB/m]
30	13.00
35	10.89
40	10.59
45	10.63
50	10.12
60	9.26
70	7.74
80	6.63
90	8.23
100	11.12
120	13.16
140	13.07
160	14.80
180	16.95
200	17.17



8.5 Correction factors for log periodic antenna – ITL # 1349

Model: EMCO 3146

Serial No.:9505-4081

Frequency	ITL 1349 AF
[MHz]	[dB/m]
200	11.58
250	12.04
300	14.76
400	15.55
500	17.85
600	18.66
700	20.87
800	21.15
900	22.32
1000	24.22



**8.6 Correction factors for Double –Ridged Waveguide
Horn ANTENNA**

Model: 3115
Serial number:29845
3 meter range; ITL # 1352

FREQUENCY	AFE	FREQUENCY	AFE
(GHz)	(dB/m)	(GHz)	(dB/m)
0.75	25	9.5	38
1.0	23.5	10.0	38.5
1.5	26.0	10.5	38.5
2.0	29.0	11.0	38.5
2.5	27.5	11.5	38.5
3.0	30.0	12.0	38.0
3.5	31.5	12.5	38.5
4.0	32.5	13.0	40.0
4.5	32.5	13.5	41.0
5.0	33.0	14.0	40.0
5.5	35.0	14.5	39.0
6.0	36.5	15.0	38.0
6.5	36.5	15.5	37.5
7.0	37.5	16.0	37.5
7.5	37.5	16.5	39.0
8.0	37.5	17.0	40.0
8.5	38.0	17.5	42.0
9.0	37.5	18.0	42.5



8.7 Correction factors for

Horn Antenna
Model: SWH-28
at 3 meter range.

CALIBRATION DATA

3 m distance

Frequency, MHz	Measured antenna factor, dB/m ¹⁾
18000	32.4
18500	32.0
19000	32.3
19500	32.4
20000	32.3
20500	32.8
21000	32.8
21500	32.7
22000	33.1
22500	33.0
23000	33.1
23500	33.8
24000	33.5
24500	33.5
25000	33.8
25500	33.9
26000	34.2
26500	34.7

¹⁾ The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

ITL #:1353