

Test of APIN0224, APIN0225 802.11a/b/g/n/ac

To: FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: ARUB145-U1 Rev A



TEST REPORT

FROM



Test of APIN0224, APIN0225 802.11a/b/g/n/ac

to

To FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: ARUB145-U1 Rev A

Note: this report contains data with regard to the 2400-2483.5 MHz and 5725-5850 MHz operational modes of the Aruba Networks APIN0224 and APIN0225 Wireless Access Point. Test data for the 5,150 - 5,350 and 5,470-5,725 MHz is reported in MiCOM Labs test report ARUB145-U2

This report supersedes: NONE

Applicant: Aruba Networks
1344 Crossman Avenue
Sunnyvale
California 94089, USA

Product Function: Wireless LAN Access Point

Copy No: pdf Issue Date: 11th May 2013

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



TEST CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 3 of 472

This page has been left intentionally blank

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION	6
PRODUCT CERTIFICATION	7
TEST RESULT CERTIFICATE	9
1. REFERENCES AND MEASUREMENT UNCERTAINTY	10
1.1. Normative References	10
1.2. Test and Uncertainty Procedures	11
2. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
2.1. Technical Details	12
2.2. Scope of Test Program	13
2.3. Equipment Model(s) and Serial Number(s)	17
2.4. Antenna Details	17
2.5. Cabling and I/O Ports	18
2.6. Test Configurations	19
2.7. Equipment Modifications	21
2.8. Deviations from the Test Standard	21
3. TEST EQUIPMENT CONFIGURATION(S)	22
3.1. Conducted RF Emission Test Set-up	22
3.2. Radiated Spurious Emission Test Set-up > 1 GHz	23
3.3. Digital Emissions Test Set-up (0.03 – 1 GHz)	24
3.4. ac Wireline Emission Test Set-up	25
4. TEST SUMMARY	26
5. TEST RESULTS	28
5.1. Device Characteristics	28
5.1.1. <i>Conducted Testing</i>	28
5.1.2. <i>Radiated Emission Testing</i>	73
5.1.3. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i>	122
6. PHOTOGRAPHS	125
6.1. Test Setup - Digital Emissions below 1 GHz	125
6.2. Radiated Emissions Test Setup >1 GHz – ANT-19	127
7. TEST EQUIPMENT	129
APPENDIX	130
A. SUPPORTING INFORMATION	130
A.1. CONDUCTED TEST PLOTS	130
A.1.1. <i>6 dB & 99% Bandwidth</i>	131
A.1.2. <i>Peak Output Power</i>	209
A.1.3. <i>Power Spectral Density</i>	278
A.1.4. <i>Conducted Spurious Emissions</i>	349

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 5 of 472

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 27th day of March 2012.

President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2013



For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 6 of 472

RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 7 of 472

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

"World Class Accreditation"

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 27th day of March 2012.





President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2013

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation

United States of America – Telecommunication Certification Body (TCB)
TCB Identifier – US0159

Industry Canada – Certification Body
CAB Identifier – US0159

Europe – Notified Body
Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB)
RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 8 of 472

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	11 th May 2013	Initial release.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 9 of 472

TEST RESULT CERTIFICATE

Manufacturer:	Aruba Networks 1344 Crossman Avenue Sunnyvale California 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	802.11a/b/g/n/ac Wireless LAN Access Point	Telephone:	+1 925 462 0304
Model:	APIN0224 & APIN0225	Fax:	+1 925 462 0306
S/N's:	BX0000206		
Test Date(s):	15th January - 29 March 2013	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.247 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TEST CERTIFICATE #2381.01


Graeme Grieve
Quality Manager MiCOM Labs,


Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 10 of 472

1. REFERENCES AND MEASUREMENT UNCERTAINTY

1.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
i.	FCC 47 CFR Part 15, Subpart C	2010	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators
ii.	RSS-210 Annex 8	2010	Radio Standards Specification 210, Issue 8, Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
iii.	FCC OET KDB 662911	4 th April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
iv.	DA 00-705	2000	FCC DA 00-705 “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” released March 30, 2000
v.	RSS-GEN	2010	Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment
vi.	FCC 47 CFR Part 15, Subpart B	2010	47 CFR Part 15, SubPart B; Unintentional Radiators
vii.	ICES-003	2004	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 4
viii.	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ix.	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
x.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
xi.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
xii.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
xiii.	A2LA	July 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

1.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 12 of 472

2. PRODUCT DETAILS AND TEST CONFIGURATIONS

2.1. Technical Details

Details	Description
Purpose:	Test of the APIN0224, APIN0225 802.11a/b/g/n/ac to FCC Part 15.247 and Industry Canada RSS-210 regulations.
Applicant:	Aruba Networks 1344 Crossman Avenue Sunnyvale California 94089, USA
Manufacturer:	As applicant.
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB145-U1 Rev A
Date EUT received:	4 th January 2013
Standard(s) applied:	FCC 47 CFR Part 15.247 & IC RSS-210
Dates of test (from - to):	15th January - 29 March 2013
No of Units Tested:	One
Type of Equipment:	802.11a/b/g/n/ac Wireless Access Point 3x3 Spatial Multiplexing MIMO configuration
Manufacturers Trade Name:	Wireless Access Point
Model(s):	APIN0224, APIN0225
Location for use:	Indoor only
Declared Frequency Range(s):	2400 - 2483.5 MHz; 5725 - 5850 MHz
Hardware Rev	6.3.0.0
Software Rev	37654
Type of Modulation:	Per 802.11 -CCK, BPSK, QPSK, DSSS, OFDM
Declared Nominal Average Output Power:	802.11b: +18 dBm 802.11g:Leg. +18dBm, HT-20 +18 dBm, HT-40 +14 dBm 802.11a:Leg. +18dBm, HT-20 +18 dBm, HT-40 +14 dBm 802.11ac-40 +14dBm, 802.11ac-80 +12dBm
EUT Modes of Operation:	Legacy 802.11a/b/g, 802.11n HT-20, HT-40 ac-40, ac-80
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	POE 12 Vdc 1.25 A
Operating Temperature Range:	Declared range 0° to +40°.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 13 of 472

ITU Emission Designator:	2400 – 2483.5 MHz 802.11b	13M9G1D
	2400 – 2483.5 MHz 802.11g	16M6D1D
	2400 – 2483.5 MHz 802.11n – HT-20	17M8D1D
	2400 – 2483.5 MHz 802.11n – HT-40	36M6D1D
	5725 – 5850 MHz 802.11a	17M7D1D
	5725 – 5850 MHz 802.11n – HT-20	17M7D1D
	5725 – 5850 MHz 802.11n – HT-40	36M4D1D
	5725 – 5850 MHz 802.11VHT-40	36M4D1D
	5725 – 5850 MHz 802.11VHT-80	75M9D1D
Equipment Dimensions:	203mm x 203mm x 65mm / 8.0"x8.0"x2.6" (WxDxH)	
Weight:	750 g / 27 oz	
Primary function of equipment:	Wireless Access Point for transmitting data and voice.	

2.2. Scope of Test Program

Aruba Networks APIN0224, APIN0225 Wireless Access Point

The scope of the test program was to test the APIN0224, APIN0225 802.11a/b/g/n/ac, 3x3 Spatial Multiplexing MIMO configurations in the frequency ranges 2400 - 2483.5 MHz and 5725 – 5850 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications.

FCC OET KDB Implementation

This test program implements the following FCC KDB – 662911 4/4/2011;

Emissions Testing of Transmitters with Multiple Outputs in the Same Band

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Aruba Networks Inc
APIN0224 External Antenna 802.11 a/b/g/n/ac Wireless Access Point



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Aruba Networks Inc
APIN0225 Integral Antenna 802.11 a/b/g/n/ac Wireless Access Point



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Aruba Networks Inc
802.11 a/b/g/n/ac Wireless Access Point (Rear)



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 17 of 472

2.3. Equipment Model(s) and Serial Number(s)

Equipment Type	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11a/b/g/n WLAN	Aruba Networks	APIN0224	BX0000206
Support	Laptop PC	IBM	Thinkpad	None

2.4. Antenna Details

Model	Type	Gain	Freq. Band	Note
		dBi	MHz	
AP-ANT-1B	Omni	3.8	2400 - 2500	3x per unit
		5.8	4900 - 5875	
AP-ANT-13B	Omni	4.4	2400 - 2500	3x per unit
		3.3	4900 - 5900	
AP-ANT-16	Omni	3.9	2400 - 2500	3x per unit
		4.7	4900 - 5900	
AP-ANT-17	Directional 120degr.	6.0	2400 - 2500	3x per unit
		5.0	4900 - 5875	
AP-ANT-18	Directional 60degr.	7.5	2400 - 2500	3x per unit
		7.5	5150 - 5875	
AP-ANT-19	Omni	3.0	2400 - 2500	3 x per unit
		6.0	5150 - 5875	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 18 of 472

APIN0225 Integrated Antennas

Model	Type	Gain	Freq. Band	Note
		dBi	MHz	
metal sheet	Omni	4.0	2400 - 2500	(3x per band, per unit)
metal sheet	Omni	4.5	5150 - 5875	(3x per band, per unit)

2.5. Cabling and I/O Ports

Number and type of I/O ports

1. 2 x 10/100/1000 Ethernet ENET0, ENET1
2. Console - Serial maintenance terminal
3. 12 Vdc, supply connector
4. RF Antenna Connectors (x3) – Reverse SMA (APIN0224 Only)
5. USB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s) (802.11a/b/g/n/ac)	Variant	Data Rate with Highest Power	Frequencies (MHz)
2.4 GHz			
b	Legacy	1 MBit/s	2,412
g	Legacy	6 MBit/s	2,437
n	HT-20	6.5 (MCS 0)	2,462
	HT-40	13.5 (MCS 0)	2,422 2,437 2,452
5.8 GHz			
a	Legacy	6 MBit/s	5,745
n	HT-20	6.5 (MCS 0)	5,785
	HT-40	13.5 (MCS 0)	5,825
ac	ac-40	13.5 (MCS 0)	5,755
ac	ac-80	29.3 (MCS 0)	5,795
ac	ac-80	29.3 (MCS 0)	5,775

Legacy – data rates for 802.11abg products

Results for the above configurations are provided in this report

Antenna Test Configurations for Radiated Emissions

Results for the following configurations are provided in this report.

Radiated emissions testing was performed for three different antennas that represent the highest gain for each antenna type intended for use with the EUT;- Integral antenna (As used in APINR109) ; ANT-18 60 degree sector antenna; ANT-19 monopole antenna.

Radiated emissions testing was performed for all possible configurations for antenna ANT-18 which is the highest gain antenna used with the equipment. Radiated emissions testing was performed for the other two antennas in worst case mode (mode with the highest spectral density)

2,400 – 2483.5 MHz

5,725 – 5850 MHz

15.247	
802.11b,g, 802.11n HT-20	SE 2412
	SE 2437
	SE 2462
	BE 2390
	BE 2483.5
802.11n HT-40 802.11ac-40	SE 2412
	SE 2437
	SE 2462
	BE 2390
	BE 2483.5

15.247	
802.11a 802.11n HT-20	a SE 5745
	a SE 5785
	a SE 5825
802.11n HT-40 802.11ac-40	SE 5755
	SE 5795
	BE 5460
802.11ac-80	SE 5775
	BE 5460

KEY:-

SE – Spurious Emission
 BE – Band-Edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

2.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3. TEST EQUIPMENT CONFIGURATION(S)


3.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 6 dB and 99% Bandwidth
2. Section 6.1.1.2. Peak Output Power
3. Section 6.1.1.3. Power Spectral Density
4. Section 6.1.1.4. Conducted Spurious Emissions

Conducted Test Set-Up Pictorial Representation

3 - Port Test Configuration

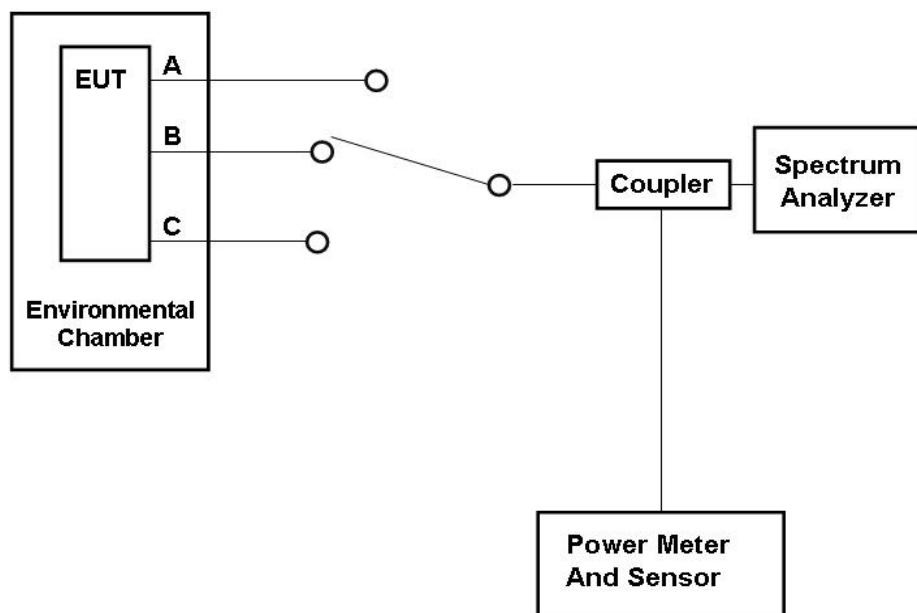


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

Radiated Emission Measurement Setup – Above 1 GHz

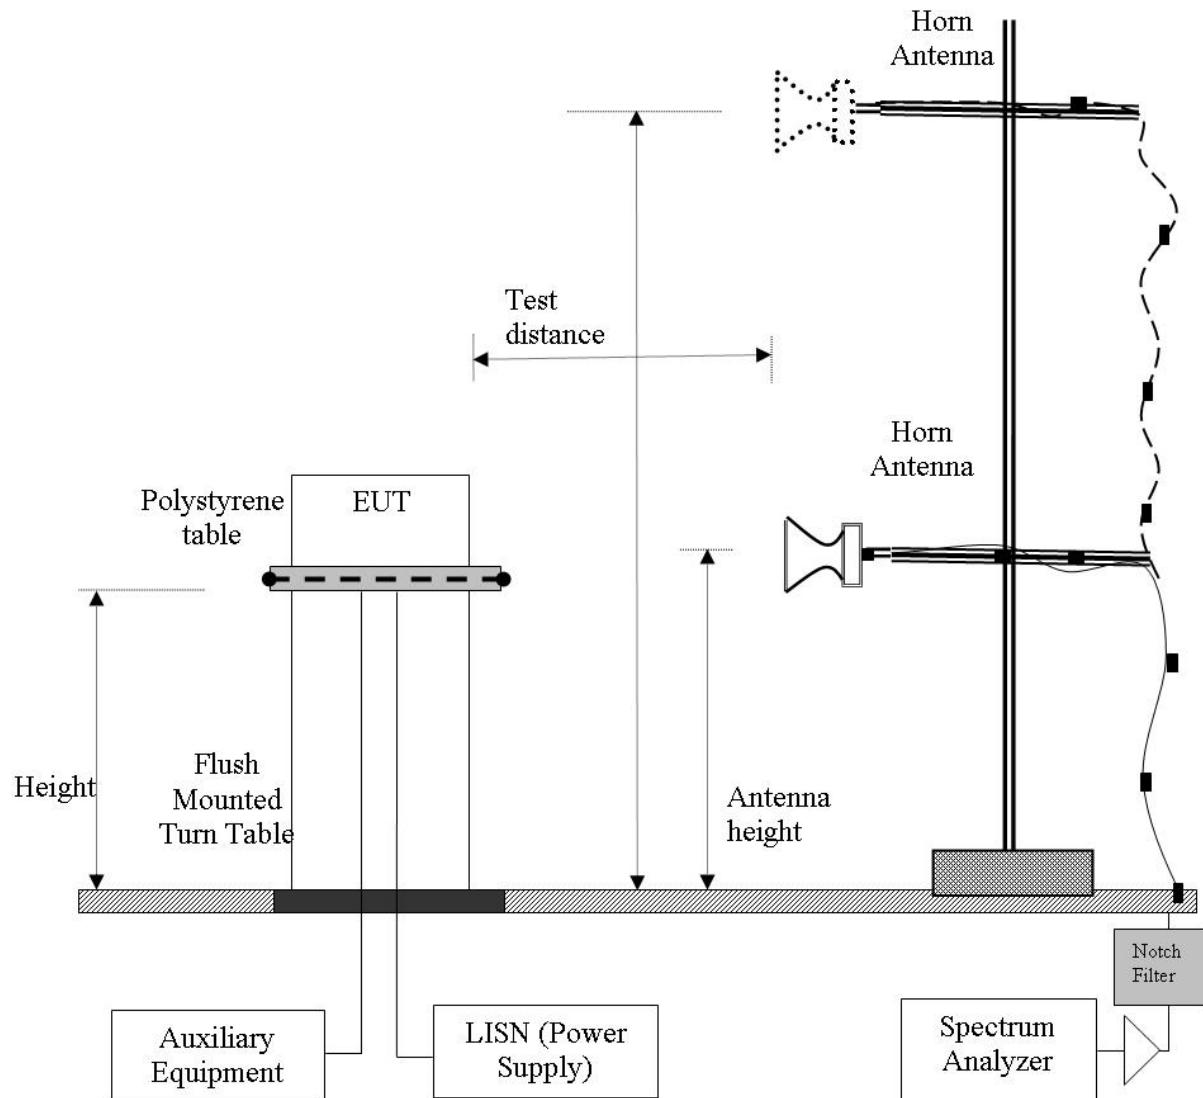


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

Digital Emission Measurement Setup – Below 1 GHz

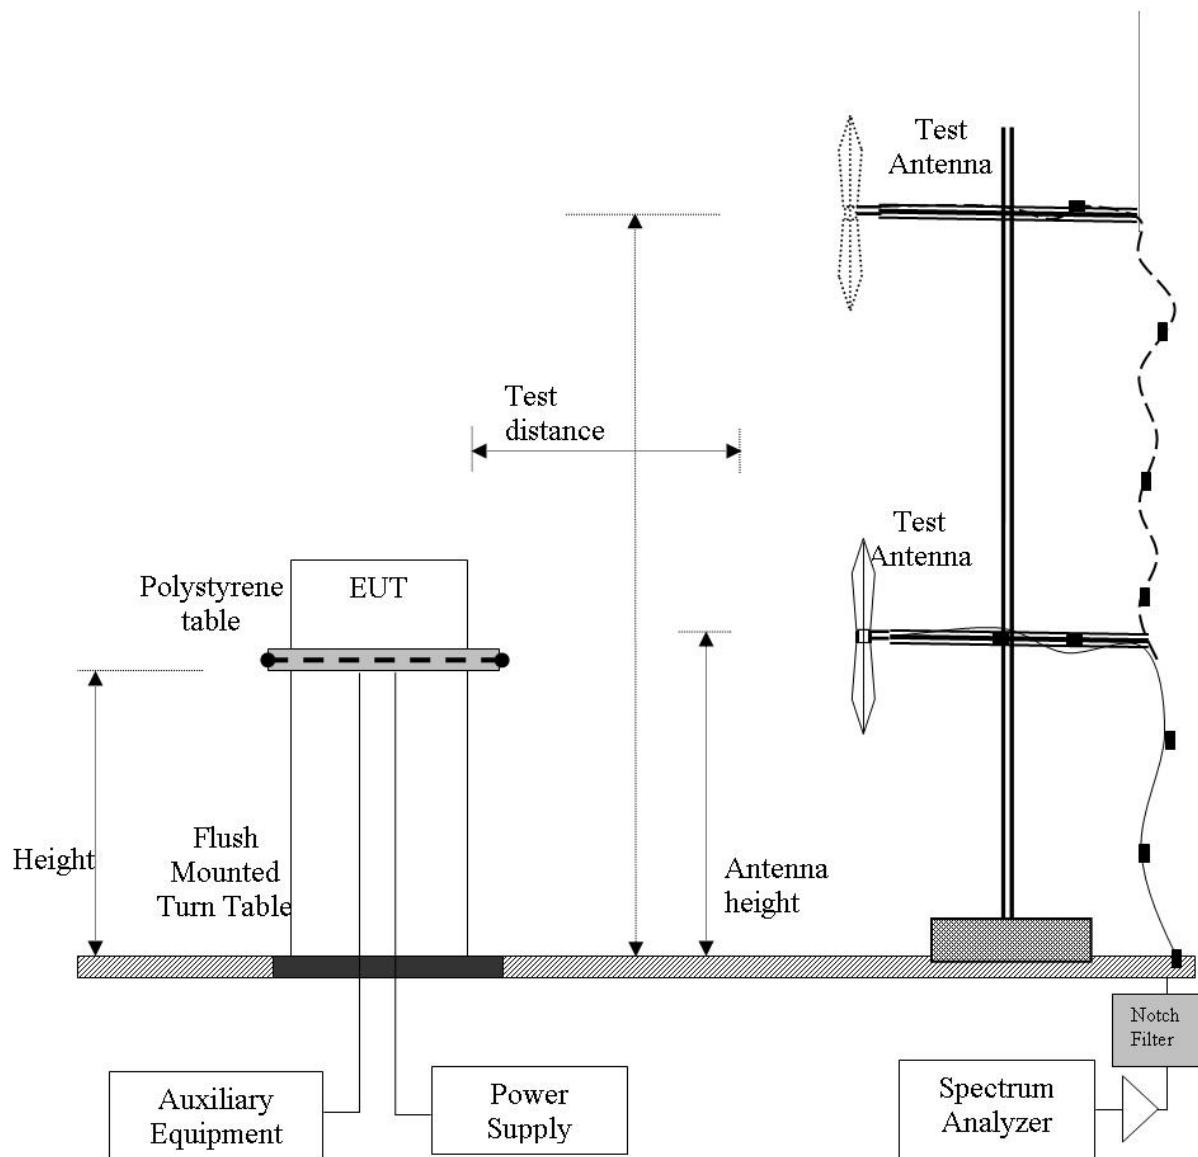


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 5.1.3 ac Wireline Conducted Emissions

Test Measurement Set up

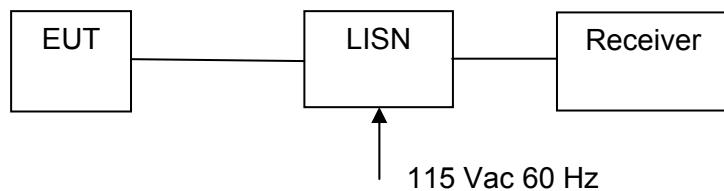

Measurement set up for AC Wireline Conducted Emissions Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 26 of 472

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(2) A8.2(1) 4.4	6 dB and 99 % Bandwidths	≥ 500 kHz	Conducted	Complies	5.1.1.1
15.247(b)(3) 15.31(e) A8.4(4)	Peak Output Power Voltage Variation	Shall not exceed 1W Variation of supply voltage 85 % -115 %	Conducted	Complies	5.1.1.2
15.247(e) A8.2	Peak Power Spectral Density	Shall not be greater than +8 dBm in any 3 kHz band	Conducted	Complies	5.1.1.3
15.247(d) 15.205 / 15.209 A8.5 2.2 4.7	Spurious Emissions (30MHz - 26 GHz b/g and 30 MHz – 40 GHz a)	The radiated emission in any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density	Conducted	Complies	5.1.1.4

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(d) 15.205 / 15.209 A8.5 2.2 2.6 4.7	Radiated Emissions	Restricted Bands	Radiated	Complies	5.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	
	Radiated Band Edge	Band-edge results Peak Emissions		Complies	
15.205 / 15.209 2.2	Radiated Spurious Emissions	Emissions <1 GHz (30M-1 GHz)	Radiated	Complies	5.1.2.4
15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	N/A EUT is POE powered - not shipped with equipment	5.1.3

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

5. TEST RESULTS

5.1. Device Characteristics

5.1.1. Conducted Testing

5.1.1.1. 6 dB and 99 % Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.1 Emission Bandwidth		
Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate centre frequency.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 29 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11b	Duty Cycle (%):	99%
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
2412.0	10.180	10.180	10.180	--	10.180	10.180	≥ 0.5	-9.68
2437.0	10.180	10.180	10.180	--	10.180	10.180	≥ 0.5	-9.68
2462.0	10.180	10.180	10.180	--	10.180	10.180	≥ 0.5	-9.68

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)	
	Port(s)					
MHz	a	b	c	d		
2412.0	13.226	13.146	13.226	--	13.226	
2437.0	13.146	13.146	13.146	--	13.146	
2462.0	13.146	13.146	13.146	--	13.146	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 30 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11g	Duty Cycle (%):	99%
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
2412.0	16.433	16.433	16.433	--	16.433	16.433	≥ 0.5	-15.93
2437.0	16.433	16.433	16.433	--	16.433	16.433	≥ 0.5	-15.93
2462.0	16.433	16.433	16.433	--	16.433	16.433	≥ 0.5	-15.93

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	16.593	16.513	16.513	--	16.593		
2437.0	16.513	16.513	16.513	--	16.513		
2462.0	16.513	16.513	16.513	--	16.513		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 31 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	99%
Data Rate:	6.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
2412.0	16.433	16.192	16.433	--	16.433	16.192	≥ 0.5	-15.69
2437.0	16.433	16.353	16.433	--	16.433	16.353	≥ 0.5	-15.85
2462.0	16.433	16.433	16.433	--	16.433	16.433	≥ 0.5	-15.93

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	16.513	16.513	16.513	--	16.513		
2437.0	16.513	16.513	16.513	--	16.513		
2462.0	16.513	16.513	16.513	--	16.513		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 32 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
2422.0	36.393	35.271	35.591	--	36.393	35.271	≥ 0.5	-34.77
2437.0	36.553	35.591	35.912	--	36.553	35.591	≥ 0.5	-35.09
2452.0	36.553	35.591	35.591	--	36.553	35.591	≥ 0.5	-35.09

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2422.0	36.232	36.232	36.232	--	36.232		
2437.0	36.232	36.232	36.232	--	36.232		
2452.0	36.232	36.232	36.232	--	36.232		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 33 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11a	Duty Cycle (%):	99%
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
5745.0	17.715	17.715	17.715	--	17.715	17.715	≥ 0.5	-17.22
5785.0	17.715	17.715	17.715	--	17.715	17.715	≥ 0.5	-17.22
5825.0	17.715	17.715	17.715	--	17.715	17.715	≥ 0.5	-17.22

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d				
5745.0	17.796	17.796	17.796	--	17.796			
5785.0	17.796	17.796	17.796	--	17.796			
5825.0	17.796	17.796	17.956	--	17.956			

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 34 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	99%
Data Rate:	6.5 mcs	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
5745.0	17.715	17.715	17.715	--	17.715	17.715	≥ 0.5	-17.22
5785.0	17.715	17.715	17.715	--	17.715	17.715	≥ 0.5	-17.22
5825.0	17.715	17.715	17.715	--	17.715	17.715	≥ 0.5	-17.22

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
5745.0	17.796	17.796	17.796	--	17.796		
5785.0	17.796	17.796	17.796	--	17.796		
5825.0	17.876	17.796	18.036	--	18.036		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 35 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	Bit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
5755.0	36.553	36.553	36.553	--	36.553	36.553	≥ 0.5	-36.05
5795.0	36.553	36.553	36.553	--	36.553	36.553	≥ 0.5	-36.05

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
5755.0	36.232	36.232	36.232	--	36.232		
5795.0	36.232	36.393	36.232	--	36.393		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 36 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11ac-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
5755.0	36.553	36.553	36.553	--	36.553	36.553	≥ 0.5	-36.05
5795.0	36.553	36.553	36.553	--	36.553	36.553	≥ 0.5	-36.05

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d				
5755.0	36.393	36.393	36.393	--	36.393			
5795.0	36.393	36.393	36.393	--	36.393			

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 37 of 472

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	802.11ac-80	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
5775.0	76.313	76.313	76.313	--	76.313	76.313	≥ 0.5	-75.81

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
5775.0	75.992	75.992	75.671	--	75.992		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 38 of 472

Specification

Limits

§15.247 (a)(2) & RSS-210 §A8.2(1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

§ IC RSS-Gen 4.4.1 Occupied Bandwidth When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

§ IC RSS-Gen 4.4.2 6 dB Bandwidth Where indicated, the 6 dB bandwidth is measured at the points when the spectral density of the signal is 6 dB down from the in –band spectral density of the modulated signal, with the transmitter modulated by a representative signal.

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 39 of 472

5.1.1.2. Peak Output Power

Conducted Test Conditions for Fundamental Emission Output Power						
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5			
Test Heading:	Emission Output Power	Rel. Humidity (%):	32 - 45			
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001			
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.2 Fundamental Emission Output Power KDB 662911 was implemented for In-band power measurements. The measure and sum technique was implemented in all cases.					
Test Procedure for Fundamental Emission Output Power Measurement The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.						
Supporting Information Calculated Power = $A + G + 10 \log (1/x) \text{ dBm}$ $A = \text{Total Power} [10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$, G = Antenna Gain, x = Duty Cycle						

Maximum power settings declared by the manufacturer

Operational Mode	Power Setting
802.11 a/b/g	18.0
802.11 n HT-20	18.0
802.11 n HT-40	14.0
802.11 ac-40 (5.8 GHz only)	14.0
802.11 ac-80 (5.8 GHz only)	12.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

15.247 (c) Operation with directional antenna gains greater than 6 dBi.
 If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Uncorrelated Operation

2.4 GHz Uncorrelated Operation (MIMO)

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
(dB)	(dBi)	Uncorrelated	Max. Power Per Chain	(dBm)
Integral	3.0	+30.0	+25.23	+33.0

5.8 GHz Uncorrelated Operation (MIMO)

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
(dB)	(dBi)	Uncorrelated	Max. Power Per Chain	(dBm)
Integral	4.5	+30.0	+25.23	+34.5

Correlated Operation

2.4 GHz Correlated Operation (Non-MIMO i.e. Legacy)

Antenna	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power	Maximum EIRP
(dB)		Ports	dB	dBi	Σ (dBm)	(dBm)
Integral	3.0	3	4.77	7.77	+28.23	+36.0

5.8 GHz Correlated Operation (Non-MIMO i.e. Legacy)

Antenna	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power	Maximum EIRP
(dB)		Ports	dB	dBi	Σ (dBm)	(dBm)
Integral	4.5	3	4.77	9.27	+26.73	+36.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 41 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11b	Duty Cycle (%):	99%
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2412.0	20.97	21.73	20.77	--	25.95	30.00	-4.05	18.00
2437.0	20.80	21.56	20.68	--	25.80	30.00	-4.20	18.00
2462.0	20.90	21.53	20.92	--	25.90	30.00	-4.10	18.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 42 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11g	Duty Cycle (%):	99%
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2412.0	23.79	24.53	24.44	--	29.04	30.00	-0.96	16.50
2437.0	23.74	24.47	24.35	--	28.97	30.00	-1.03	16.50
2462.0	23.82	24.55	24.35	--	29.02	30.00	-0.98	16.50

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 43 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11n HT-20	Duty Cycle (%):	99%
Data Rate:	6.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2412.0	23.62	24.55	24.27	--	28.94	30.00	-1.06	16.50
2437.0	23.72	24.48	24.34	--	28.96	30.00	-1.04	16.50
2462.0	23.76	24.36	24.28	--	28.91	30.00	-1.09	16.50

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 44 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	29.3 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
2422.0	24.36	25.77	25.35	--	29.97	30.00	-0.03	16.00
2437.0	24.17	25.55	25.13	--	29.76	30.00	-0.24	16.00
2452.0	24.30	25.60	25.06	--	29.79	30.00	-0.21	16.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 45 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11a	Duty Cycle (%):	99%
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
5745.0	23.05	25.16	23.98	--	28.92	30.00	-1.08	15.50
5785.0	23.26	24.99	24.42	--	29.05	30.00	-0.95	15.50
5825.0	23.43	24.77	24.53	--	29.05	30.00	-0.95	15.50

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 46 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11n HT-20	Duty Cycle (%):	99%
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
5745.0	22.93	25.19	23.99	--	28.91	30.00	-1.09	15.50
5785.0	23.29	25.09	24.52	--	29.13	30.00	-0.87	15.50
5825.0	23.36	24.76	24.78	--	29.12	30.00	-0.88	15.50

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 47 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	13.5 mcs	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
5755.0	23.01	24.98	24.20	--	28.91	30.00	-1.09	14.00
5795.0	22.69	24.20	23.87	--	28.40	30.00	-1.60	14.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 48 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11ac-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
5755.0	23.42	25.35	24.74	--	29.35	30.00	-0.65	15.00
5795.0	23.64	25.00	24.88	--	29.32	30.00	-0.68	15.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 49 of 472

Equipment Configuration for Peak Output Power

Variant:	802.11ac-80	Duty Cycle (%):	99%
Data Rate:	29.3 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dBm	
5775.0	23.96	25.70	25.52	--	29.90	30.00	-0.10	16.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limits

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

15.247 (b) (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.247 (c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

§15.31 (e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

§ RSS-210 A8.4(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands the maximum peak conducted power shall not exceed 1 watt.

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 51 of 472

5.1.1.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density						
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5			
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45			
Standard Section(s):	15.247 (e)	Pressure (mBars):	999 - 1001			
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.3 Maximum Power Spectral Density Level in the Emission Bandwidth					
Test Procedure for Power Spectral Density						
The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time \geq span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.						
Supporting Information						
Calculated Power = $A + 10 \log (1/x)$ dBm						
$A = \text{Total Power Spectral Density} [10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$						
$x = \text{Duty Cycle}$						
Limit Line: KDB 662911 was implemented for In-band power spectral density (PSD) measurements - Option (2) measure and subtract $10 \log (N)$ dB from the limit for devices with multiple RF ports						

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 52 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11b	Duty Cycle (%):	99%
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2412.0	-3.395	-2.488	-3.369	--	1.708	N/A	≤8.0	-6.29
2437.0	-3.674	-3.755	-3.741	--	1.048	N/A	≤8.0	-6.95
2462.0	-3.363	-4.217	-3.625	--	1.051	N/A	≤8.0	-6.95

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 53 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11g	Duty Cycle (%):	99%
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2412.0	-5.866	-7.412	-6.946	--	-1.921	N/A	≤8.0	-9.92
2437.0	-8.000	-7.819	-6.771	--	-2.724	N/A	≤8.0	-10.72
2462.0	-6.692	-7.570	-6.918	--	-2.273	N/A	≤8.0	-10.27

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 54 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	99%
Data Rate:	6.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2412.0	-5.110	4.966	3.361	--	7.493	N/A	≤8.0	-0.51
2437.0	-9.734	5.537	4.077	--	7.953	N/A	≤8.0	-0.05
2462.0	-3.515	4.730	3.672	--	7.594	N/A	≤8.0	-0.41

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 55 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2422.0	-11.243	-11.506	-12.832	--	-7.035	N/A	≤8.0	-15.04
2437.0	-10.037	-9.736	-9.696	--	-5.049	N/A	≤8.0	-13.05
2452.0	-8.111	5.138	-10.727	--	5.445	N/A	≤8.0	-2.56

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 56 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99%
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5745.0	-5.297	-3.796	-4.095	--	0.422	N/A	≤8.0	-7.58
5785.0	-3.460	-4.042	-5.008	--	0.647	N/A	≤8.0	-7.35
5825.0	-5.187	-3.481	-3.887	--	0.645	N/A	≤8.0	-7.35

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 57 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	99%
Data Rate:	6.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5745.0	-6.251	-4.044	-5.293	--	-0.330	N/A	≤8.0	-8.33
5785.0	-4.481	-3.672	-4.864	--	0.461	N/A	≤8.0	-7.54
5825.0	-4.831	-4.630	-4.672	--	0.061	N/A	≤8.0	-7.94

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 58 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5755.0	-11.752	-9.419	-10.786	--	-5.775	N/A	≤8.0	-13.77
5795.0	-12.661	-11.313	-11.337	--	-6.955	N/A	≤8.0	-14.96

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 59 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5755.0	-8.518	-7.465	-9.214	--	-3.568	N/A	≤8.0	-11.57
5795.0	-8.984	-8.170	-7.491	--	-3.401	N/A	≤8.0	-11.40

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 60 of 472

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-80	Duty Cycle (%):	99%
Data Rate:	29.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5775.0	-11.138	-10.723	-11.650	--	-6.383	N/A	≤8.0	-14.38

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Peak Power Spectral Density Limits

§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

RSS-210 §A8.2(2) The transmitter power spectral density (into the antenna) shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 62 of 472

5.1.1.4. Conducted Spurious Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Max Unwanted Emission Levels	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.4 Maximum Unwanted Emission Levels		
Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 63 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions

Variant:	802.11b	Duty Cycle (%):	99%
Data Rate:	1 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	CCK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-48.348	-12.14	-38.159	-10.98	-48.231	-12.22	--	--
2437.0	30.0 - 26000.0	-38.775	-11.22	-47.844	-11.84	-48.526	-11.36	--	--
2462.0	30.0 - 26000.0	-48.400	-12.05	-37.703	-10.99	-38.085	-11.84	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
2412.0	2400.0	-41.217	-11.66	-41.752	-10.57	-42.097	-11.47	--	--
2462.0	2483.5	-44.542	-11.40	-43.473	-10.58	-44.631	-11.40	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	= 40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 64 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions	
Variant:	802.11g
Data Rate:	6 MBit/s
Modulation:	OFDM
TPC:	Not Applicable
Engineering Test Notes:	

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-48.256	-13.49	-38.559	-14.94	-48.406	-15.46	--	--
2437.0	30.0 - 26000.0	-38.484	-14.70	-47.933	-15.51	-47.487	-13.58	--	--
2462.0	30.0 - 26000.0	-48.215	-13.38	-38.010	-13.92	-38.319	-14.17	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
2412.0	2400.0	-31.968	-11.84	-30.827	-10.89	-30.003	-12.28	--	--
2462.0	2483.5	-42.486	-12.88	-38.018	-12.00	-40.505	-12.96	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies									
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS								
Measurement Uncertainty:	= 40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB								

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 65 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions

Variant:	802.11n HT-20	Duty Cycle (%):	99%
Data Rate:	6.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-48.779	-15.72	-38.376	-12.89	-48.475	-15.17	--	--
2437.0	30.0 - 26000.0	-38.817	-17.80	-47.850	-14.02	-48.630	-14.40	--	--
2462.0	30.0 - 26000.0	-47.762	-17.86	-37.925	-13.53	-38.559	-15.27	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
2412.0	2400.0	-36.149	-13.82	-35.273	-12.35	-34.048	-14.62	--	--
2462.0	2483.5	-43.924	-14.50	-43.387	-13.71	-44.074	-14.12	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	= 40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 66 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2422.0	30.0 - 26000.0	-48.821	-19.66	-38.207	-16.67	-38.558	-17.90	--	--
2437.0	30.0 - 26000.0	-39.259	-17.51	-47.496	-14.77	-48.240	-16.96	--	--
2452.0	30.0 - 26000.0	-48.203	-17.01	-38.214	-14.52	-38.805	-15.78	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
2422.0	2400.0	-39.167	-18.29	-39.440	-16.32	-39.882	-17.41	--	--
2452.0	2483.5	-37.546	-16.85	-37.792	-14.17	-36.940	-15.56	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	= 40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 67 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions

Variant:	802.11a	Duty Cycle (%):	99%
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
5745.0	30.0 - 40000.0	-36.188	-16.32	-35.520	-12.32	-35.885	-15.69	--	--
5785.0	30.0 - 40000.0	-26.104	-14.67	-25.282	-14.65	-26.692	-15.22	--	--
5825.0	30.0 - 40000.0	-25.895	-15.71	-34.951	-12.66	-35.240	-12.75	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
5745.0	5725.0	-30.920	-13.12	-29.476	-12.16	-28.911	-10.96	--	--
5825.0	5850.0	-30.904	-12.76	-31.837	-12.38	-30.782	-11.07	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	= 40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 68 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions	
Variant:	802.11n HT-20
Data Rate:	6.5 Mbit/s
Modulation:	OFDM
TPC:	Not Applicable
Engineering Test Notes:	

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
5745.0	30.0 - 40000.0	-35.820	-13.71	-35.866	-13.95	-36.326	-13.71	--	--
5785.0	30.0 - 40000.0	-26.466	-15.23	-24.916	-13.85	-26.234	-13.18	--	--
5825.0	30.0 - 40000.0	-25.911	-16.05	-35.201	-14.86	-36.353	-15.54	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
5745.0	5725.0	-29.527	-12.92	-27.251	-11.75	-29.601	-11.91	--	--
5825.0	5850.0	-33.000	-12.50	-32.075	-12.61	-29.123	-11.35	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	= 40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 69 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions

Variant:	802.11n HT-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
5755.0	30.0 - 40000.0	-26.094	-22.19	-35.333	-21.04	-36.147	-20.97	--	--
5795.0	30.0 - 40000.0	-25.726	-21.11	-35.455	-20.74	-36.104	-19.10	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
5755.0	5725.0	-37.995	-19.01	-36.897	-17.58	-37.467	-18.73	--	--
5795.0	5850.0	-39.380	-19.17	-38.355	-17.97	-39.299	-18.84	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	= 40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 70 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions

Variant:	802.11ac-40	Duty Cycle (%):	99%
Data Rate:	13.5 Mbit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
5755.0	30.0 - 40000.0	-26.372	-15.52	-34.942	-14.40	-36.318	-15.17	--	--
5795.0	30.0 - 40000.0	-26.492	-16.55	-34.287	-17.88	-36.253	-18.84	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
5755.0	5725.0	-28.424	-15.07	-28.766	-14.17	-27.593	-14.62	--	--
5795.0	5850.0	-36.972	-14.88	-34.688	-14.47	-34.251	-14.64	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	= 40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 71 of 472

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions	
Variant:	802.11ac-80
Data Rate:	29.3 Mbit/s
Modulation:	OFDM
TPC:	Not Applicable
Engineering Test Notes:	

Test Measurement Results									
--------------------------	--	--	--	--	--	--	--	--	--

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
5775.0	30.0 - 40000.0	-36.155	-19.43	-25.644	-17.73	-36.334	-18.21	--	--

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
5775.0	5725.0	-32.777	-18.34	-32.707	-17.15	-32.134	-17.67	--	--

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies									
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS								
Measurement Uncertainty:	= 40 GHz \pm 2.37 dB, > 40 GHz \pm 4.6 dB								

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB
5725 MHz	5850 MHz	

§15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

§15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2. Radiated Emission Testing

Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209

Industry Canada RSS-210 §A8.5, §2.2, §2.6

Industry Canada RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Operational Modes

Operational mode(s) tested for spurious emissions were the modes which delivered maximum spectral density 802.11b and 802.11a.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$


$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented

5.1.2.1. Integral antenna – Spurious Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	17.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	18	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position Horizontal; BE emissions were higher when the EUT was in Hozi position vs Vert;		
Test Notes 2			

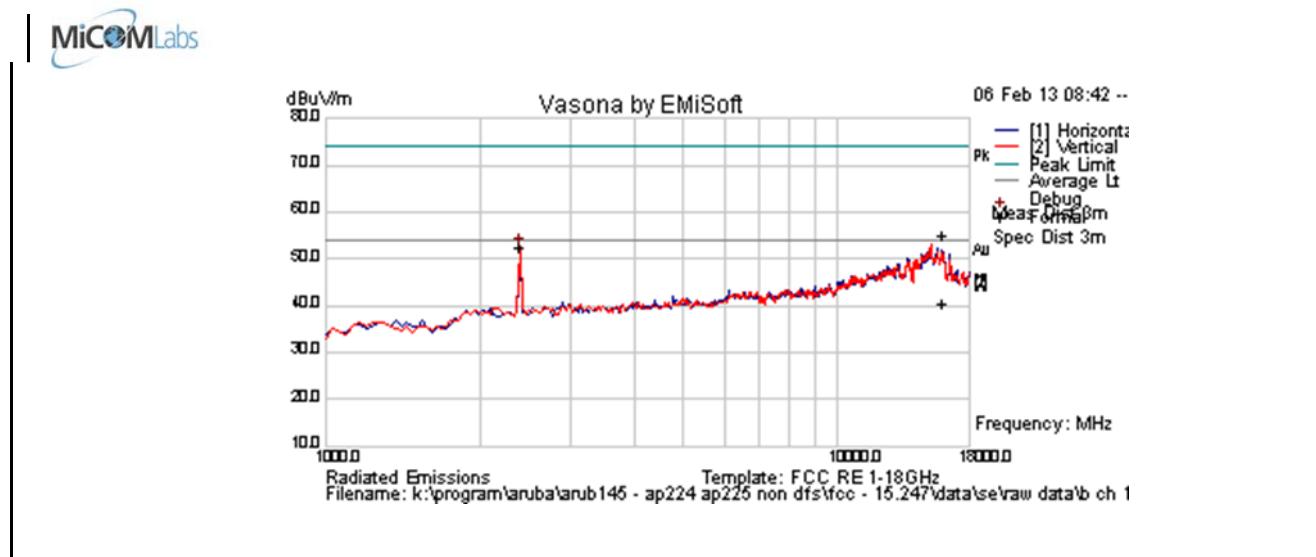


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
16022.124	45.9	9.0	0.2	55.1	Peak Max	V	157	310	74.0	-18.9	Pass	RB
16022.124	31.4	9.0	0.2	40.7	Average Max	V	157	310	54.0	-13.3	Pass	RB
2396.794	61.3	3.0	-11.7	52.6	Peak [Scan]	V						FUND
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	17.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	18	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position Horizontal; BE emissions were higher when the EUT was in Hozi position vs Vert;		
Test Notes 2			

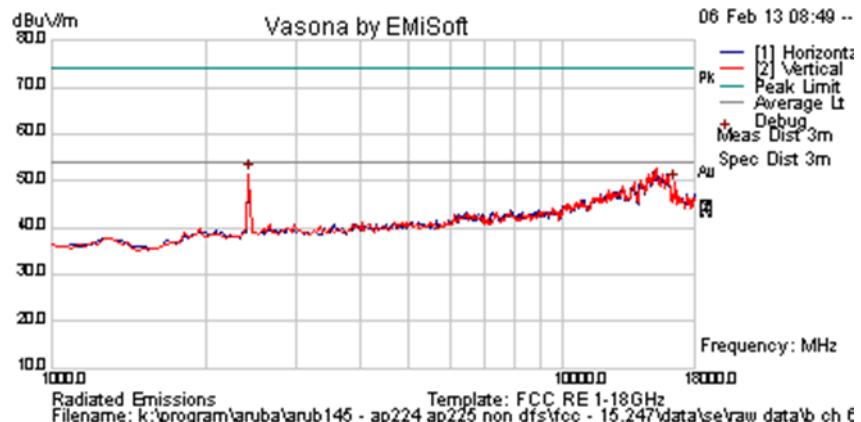


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	60.1	3.0	-11.6	51.5	Peak [Scan]	H						FUND
16501.002	45.9	9.0	0.2	55.1	Peak Max	V	157	310	74.0	-18.9	Pass	RB
16501.002	31.4	9.0	0.2	40.7	Average Max	V	157	310	54.0	-13.3	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	17.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	18	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position Horizontal; BE emissions were higher when the EUT was in Hozi position vs Vert;		
Test Notes 2			

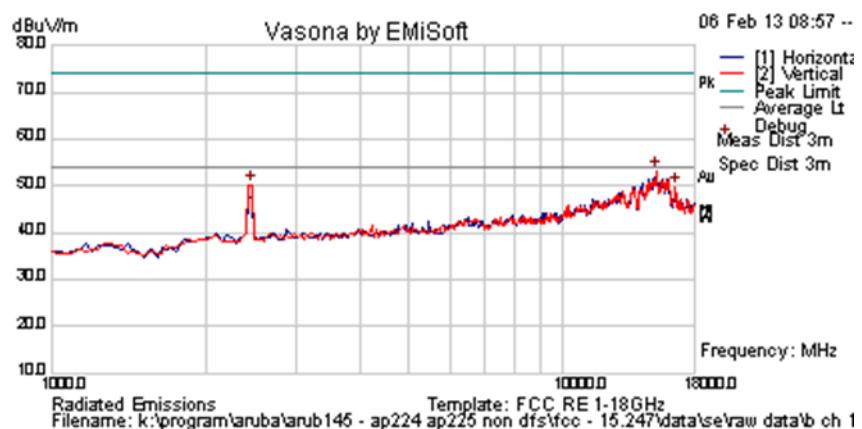


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	58.8	3.0	-11.5	50.3	Peak [Scan]	V						FUND
16535.07	45.9	9.0	0.2	55.1	Peak Max	V	157	310	74.0	-18.9	Pass	RB
16535.07	31.4	9.0	0.2	40.7	Average Max	V	157	310	54.0	-13.3	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2.2. AP-ANT-1B – Spurious Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-1B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

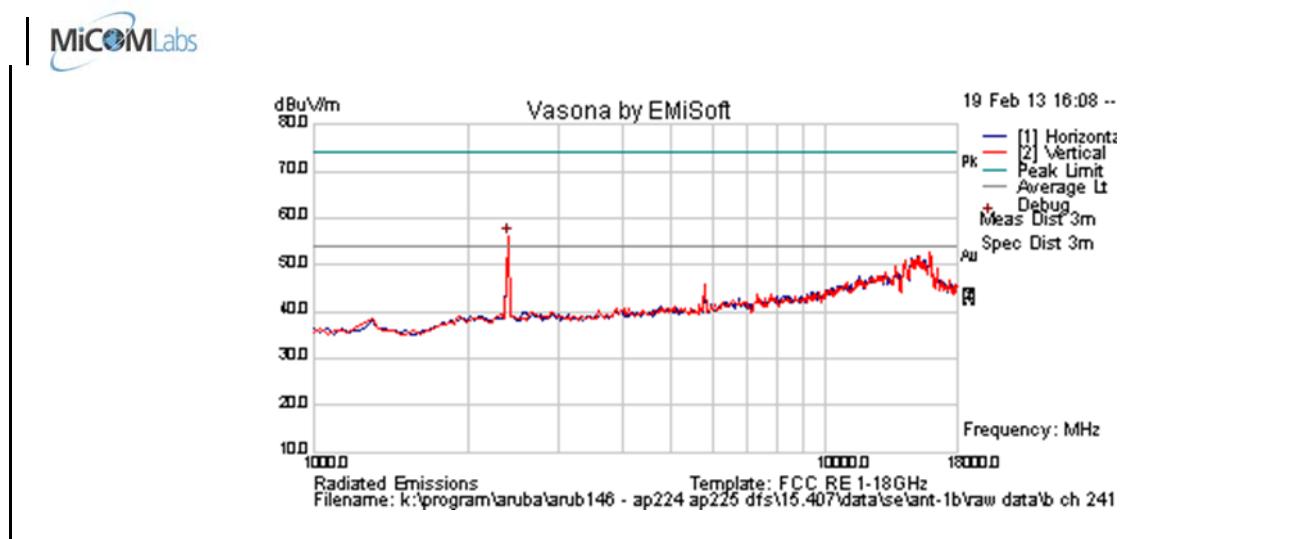


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	64.8	3.0	-11.7	56.1	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-1B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

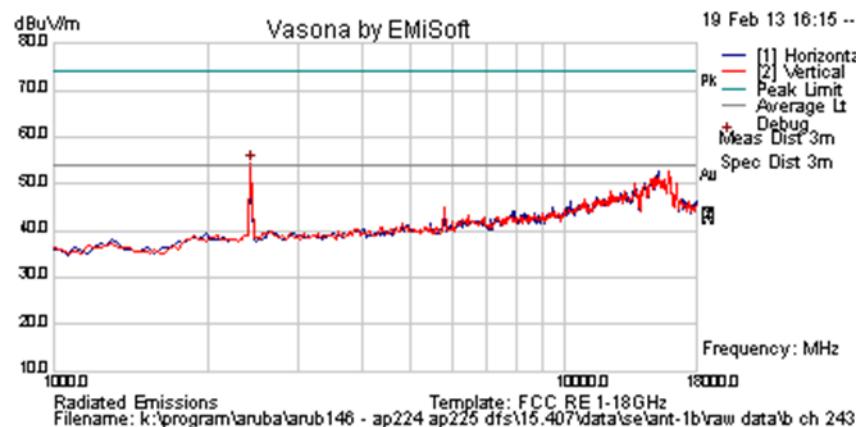


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	62.9	3.0	-11.6	54.3	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-1B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

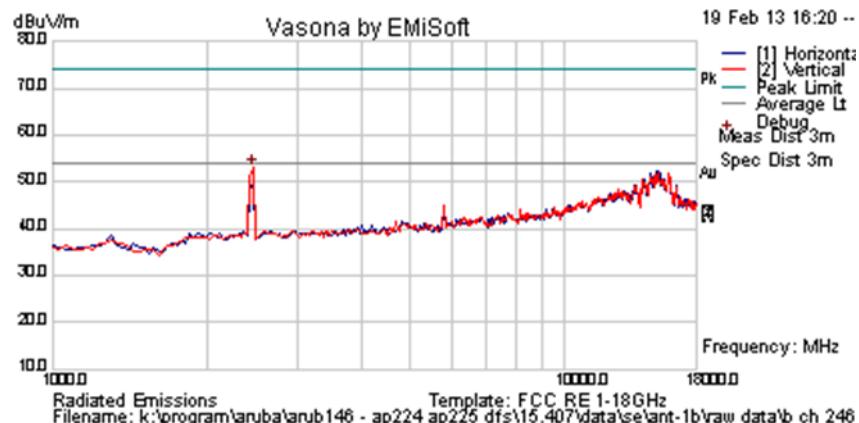


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	61.5	3.0	-11.5	52.9	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-1B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

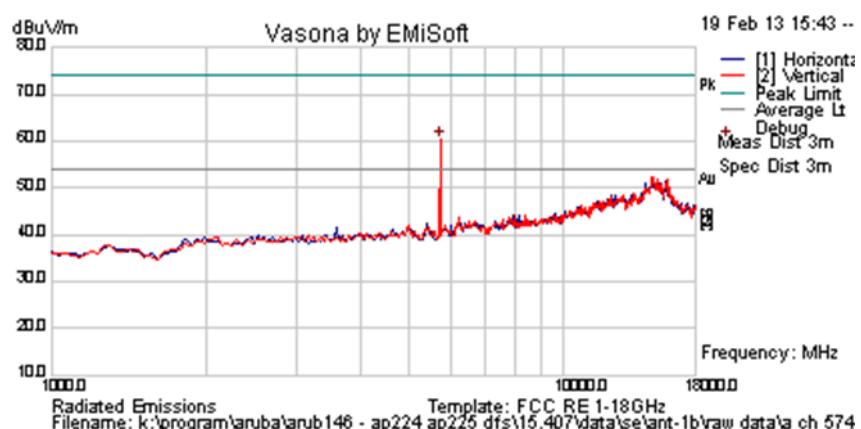


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	65.1	4.8	-9.5	60.3	Peak [Scan]	V	200					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-1B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

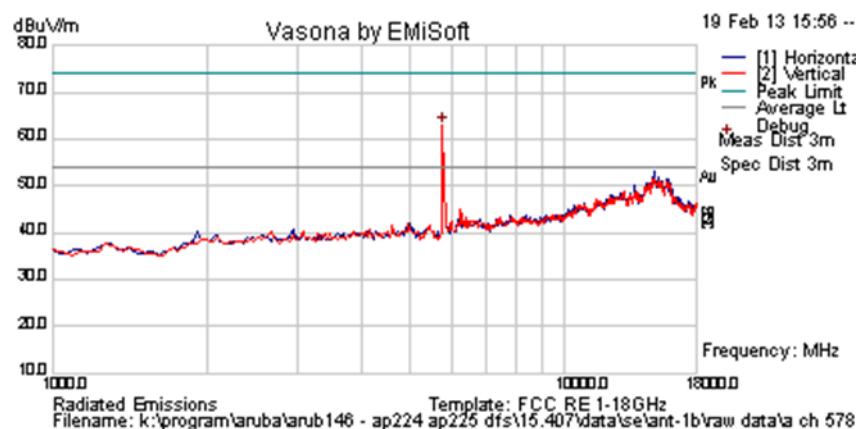


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	67.7	4.8	-9.5	63.0	Peak [Scan]	H	200					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-1B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

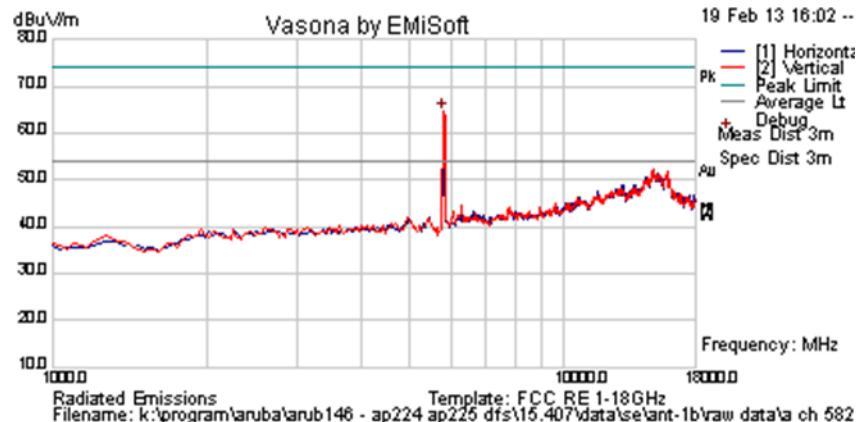


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5803.607	69.1	4.8	-9.4	64.5	Peak [Scan]	V	150					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2.3. AP-ANT-13B – Spurious Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-13B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

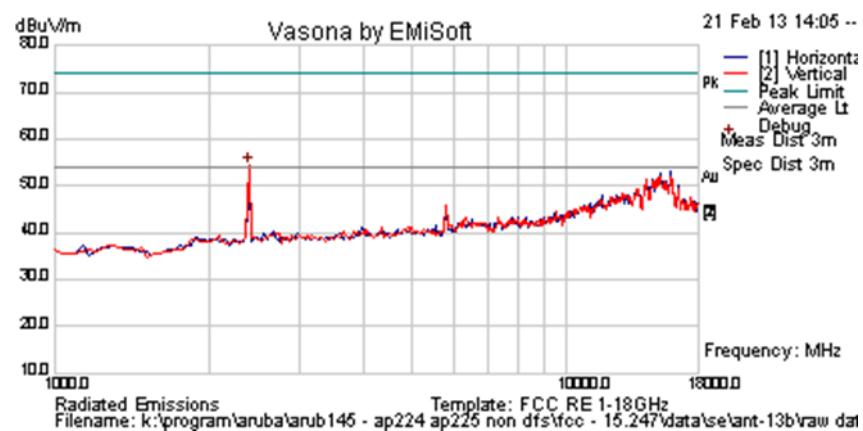


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	62.9	3.0	-11.7	54.2	Peak [Scan]	V	150					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-13B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

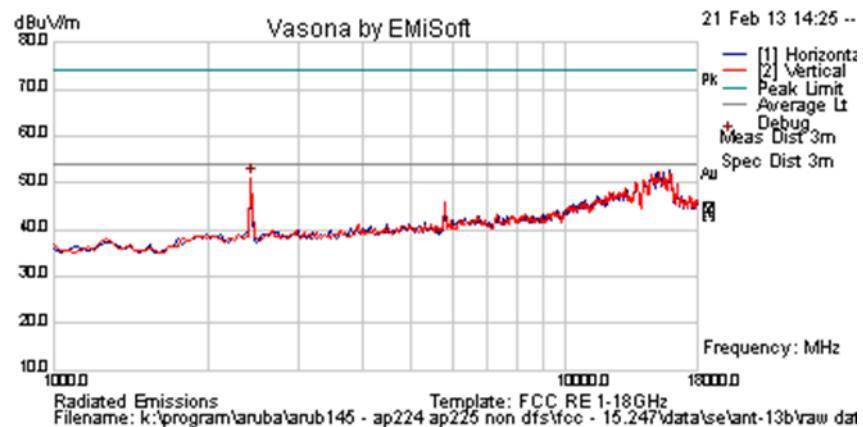


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	59.8	3.0	-11.6	51.2	Peak [Scan]	V	150					FUND
Legend:												
TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-13B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

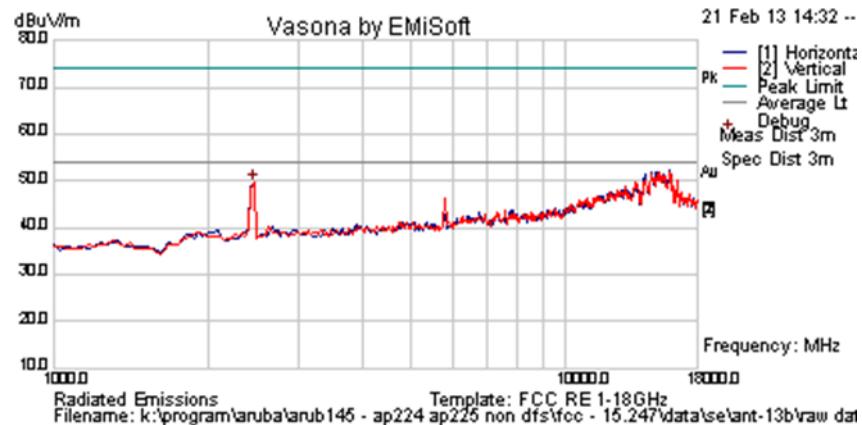


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	58.1	3.0	-11.5	49.6	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-13B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

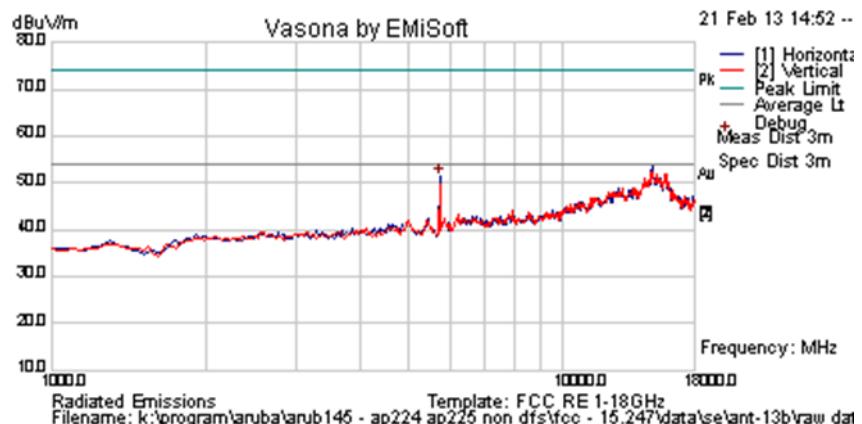


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	56.2	4.8	-9.5	51.4	Peak [Scan]	H	150					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-13B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

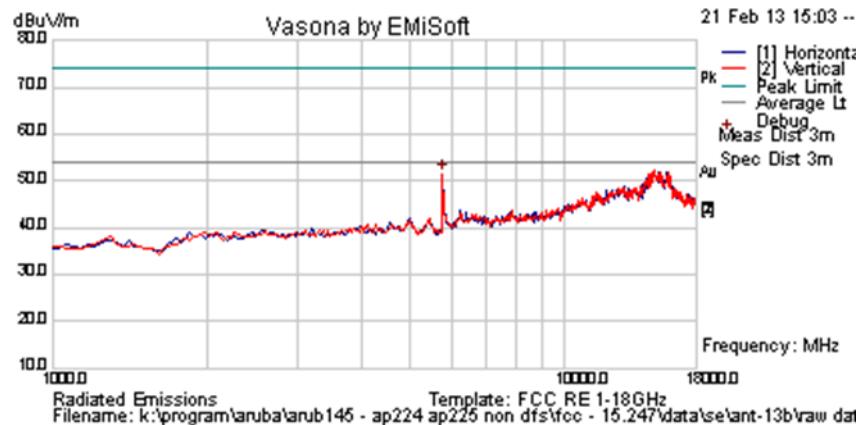


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	56.2	4.8	-9.5	51.6	Peak [Scan]	H	200					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-13B	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

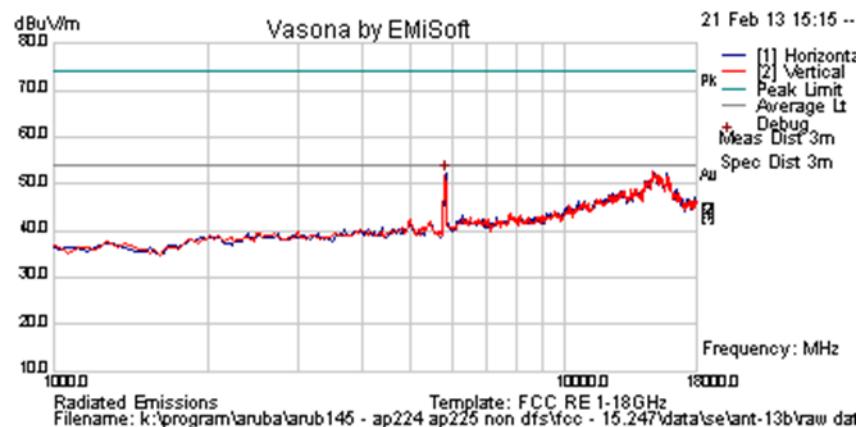


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5837.675	56.7	4.8	-9.3	52.3	Peak [Scan]	H	200					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2.4. AP-ANT-16 – Spurious Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-16	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

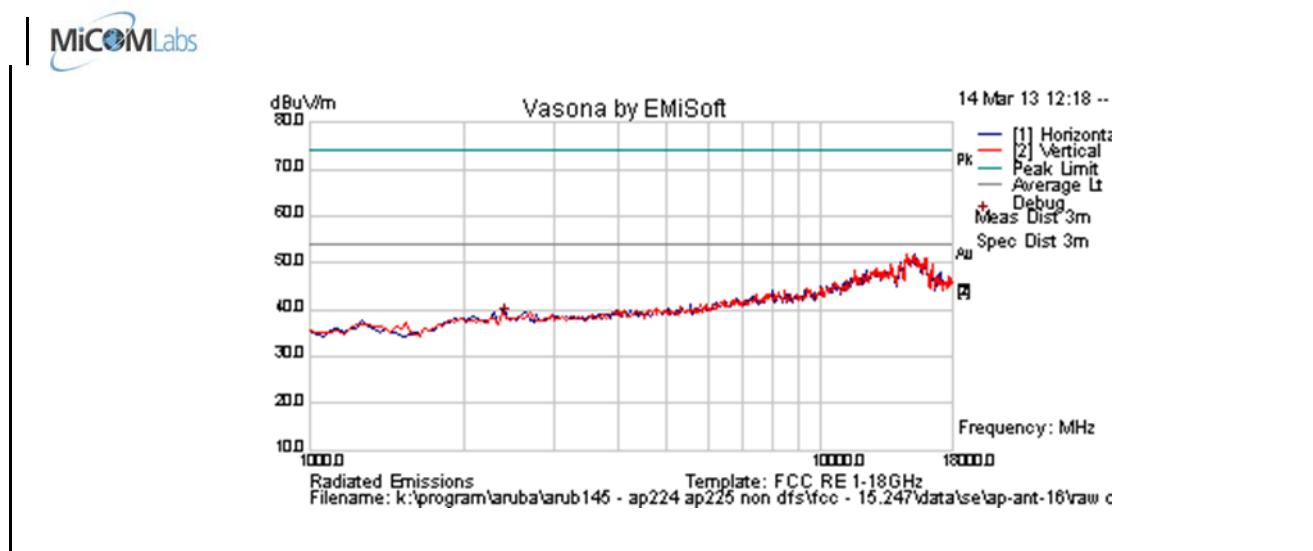


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2425.163	47.0	3.2	-11.6	38.6	Peak [Scan]	V	98					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-16	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

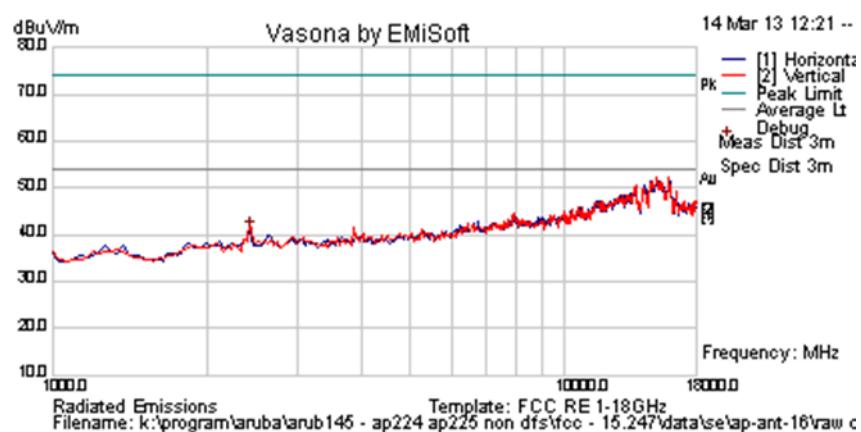


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2432.217	49.4	3.2	-11.6	41.0	Peak [Scan]	V	98					FUND
Legend:												TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-16	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

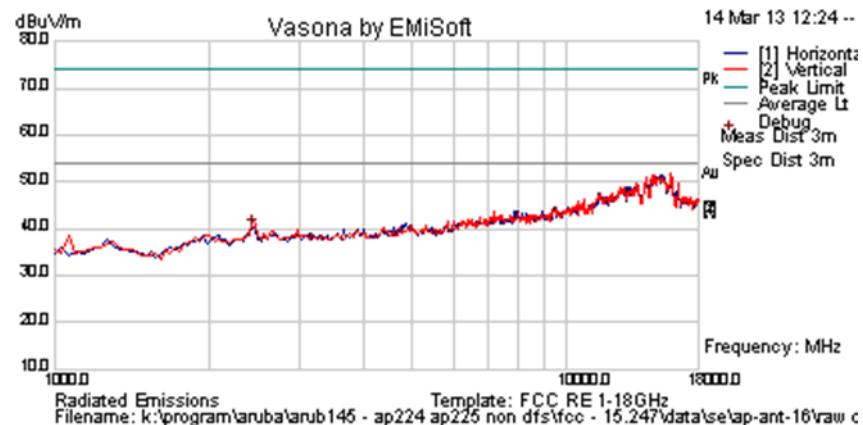


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2448.176	48.5	3.2	-11.5	40.2	Peak [Scan]	V	98					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-16	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

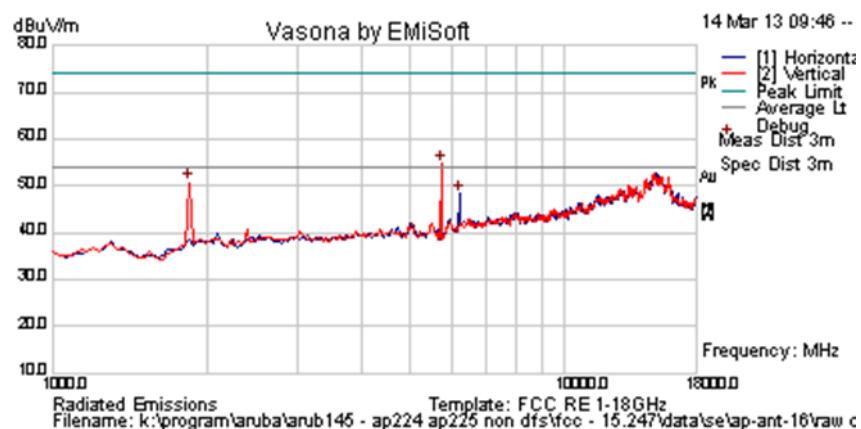


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	59.3	5.0	-9.5	54.7	Peak [Scan]	V	100					FUND
1851.70341	60.4	2.8	-12.4	50.8	Peak [Scan]	V	200	0	54.0	-3.2	Pass	NRB
6212.425	50.6	5.5	-7.8	48.3	Peak [Scan]	H	100	0	54	-5.7	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-16	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

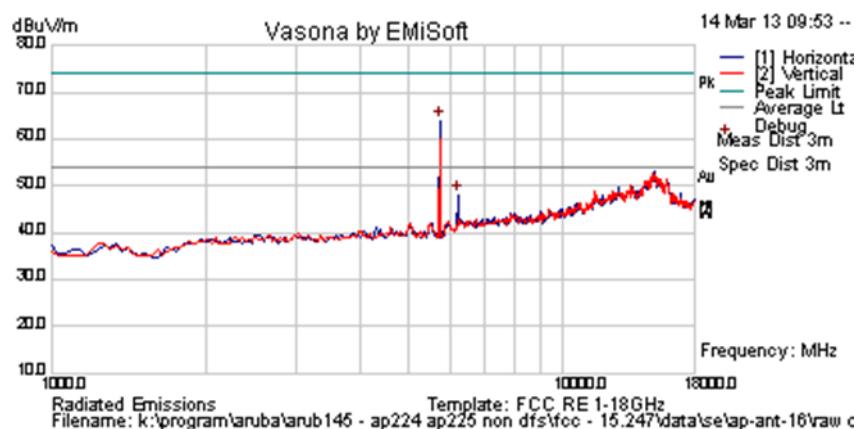


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	68.4	5.0	-9.5	63.9	Peak [Scan]	H	100					FUND
6212.42485	50.5	5.5	-7.8	48.2	Peak [Scan]	H	100	0	54.0	-5.8	Pass	NRB
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission										
		RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-16	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

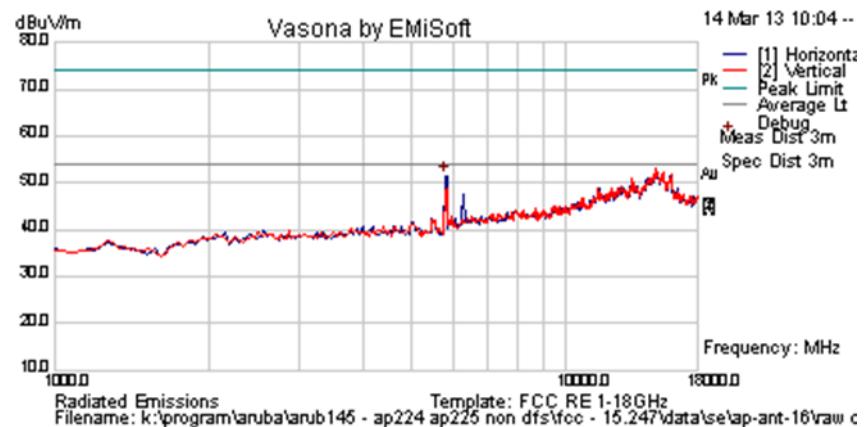


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5803.607	55.9	5.1	-9.4	51.6	Peak [Scan]	H	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2.5. AP-ANT-18 – Spurious Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-18	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

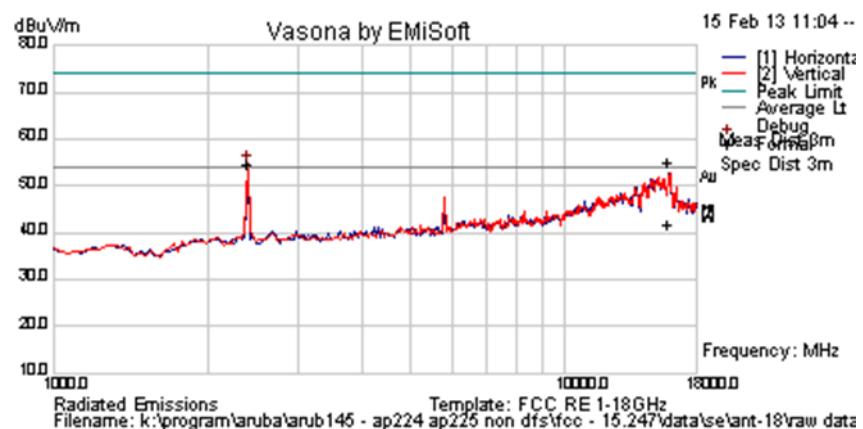


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15927.730	46.3	8.9	-0.1	55.1	Peak Max	H	183	309	74.0	-18.9	Pass	
15927.73	33.0	8.9	-0.1	41.8	Average Max	H	183	309	54.0	-12.2	Pass	
2396.794	63.4	3.0	-11.7	54.7	Peak [Scan]	V	150					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-18	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

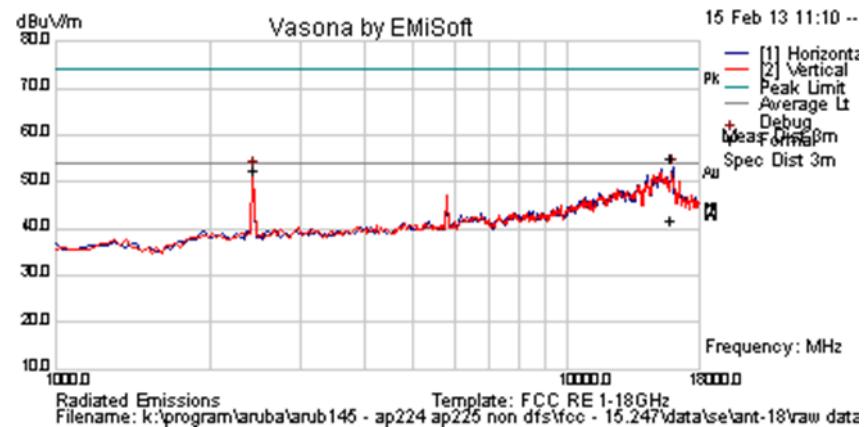


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15927.730	46.3	8.9	-0.1	55.1	Peak Max	H	183	309	74.0	-18.9	Pass	
15927.73	33.0	8.9	-0.1	41.8	Average Max	H	183	309	54.0	-12.2	Pass	
2430.862	61.1	3.0	-11.6	52.5	Peak [Scan]	V	150					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-18	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

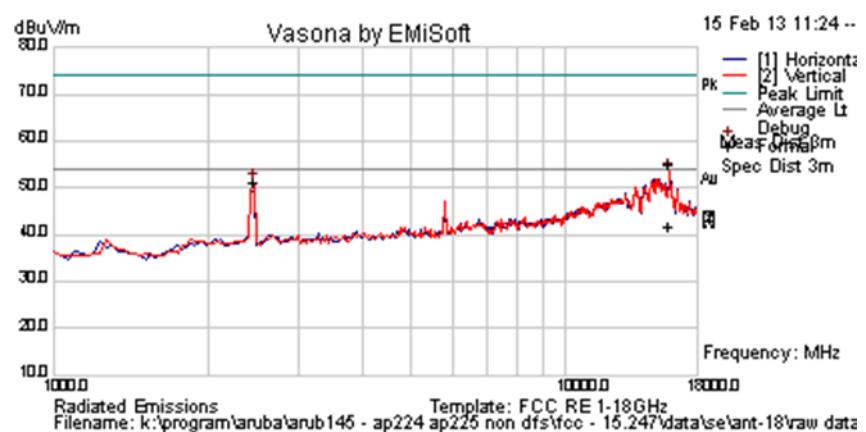

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15927.730	46.3	8.9	-0.1	55.1	Peak Max	H	183	309	74.0	-18.9	Pass	
15927.73	33.0	8.9	-0.1	41.8	Average Max	H	183	309	54.0	-12.2	Pass	
2464.930	59.7	3.0	-11.5	51.1	Peak [Scan]	V	150					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 99 of 472

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-18	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

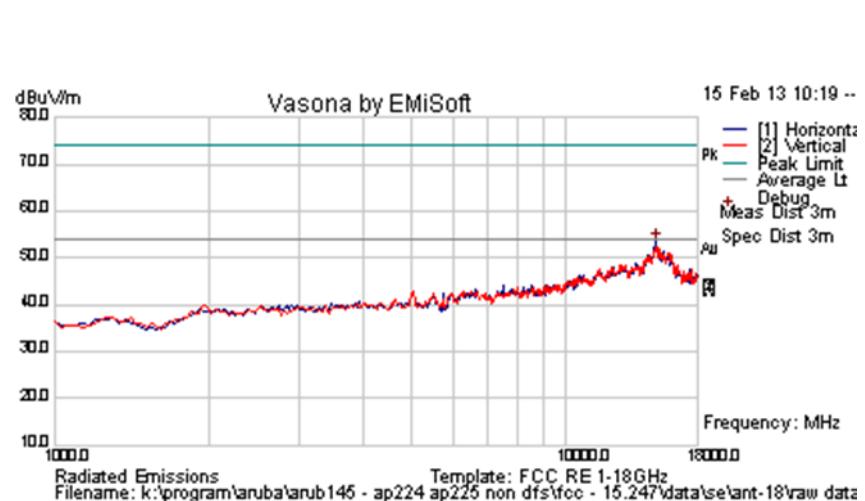


Formally measured emission peaks

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-18	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

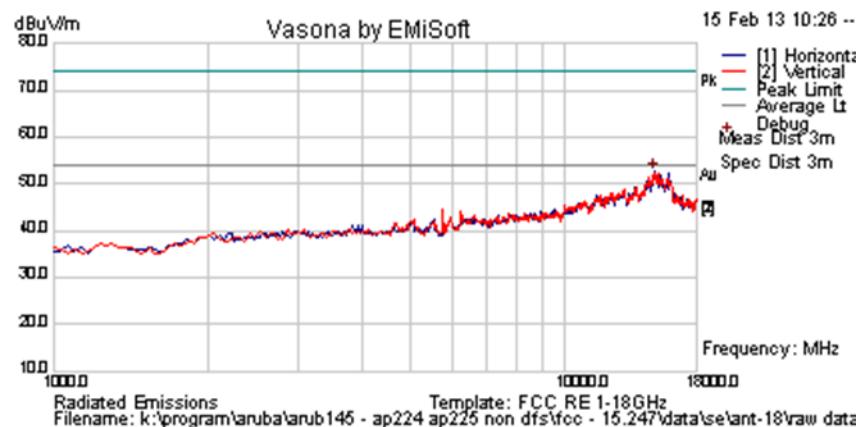

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
14933.868	46.9	8.1	-2.3	52.7	Peak [Scan]	H	200					NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 101 of 472

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-18	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

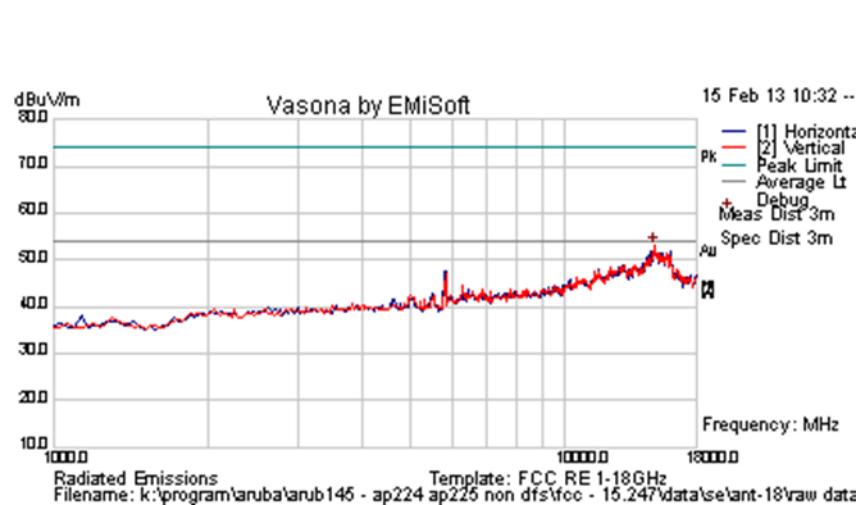


Formally measured emission peaks

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2.6. AP-ANT-19 – Spurious Emissions

Test Freq.	2412 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-19	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

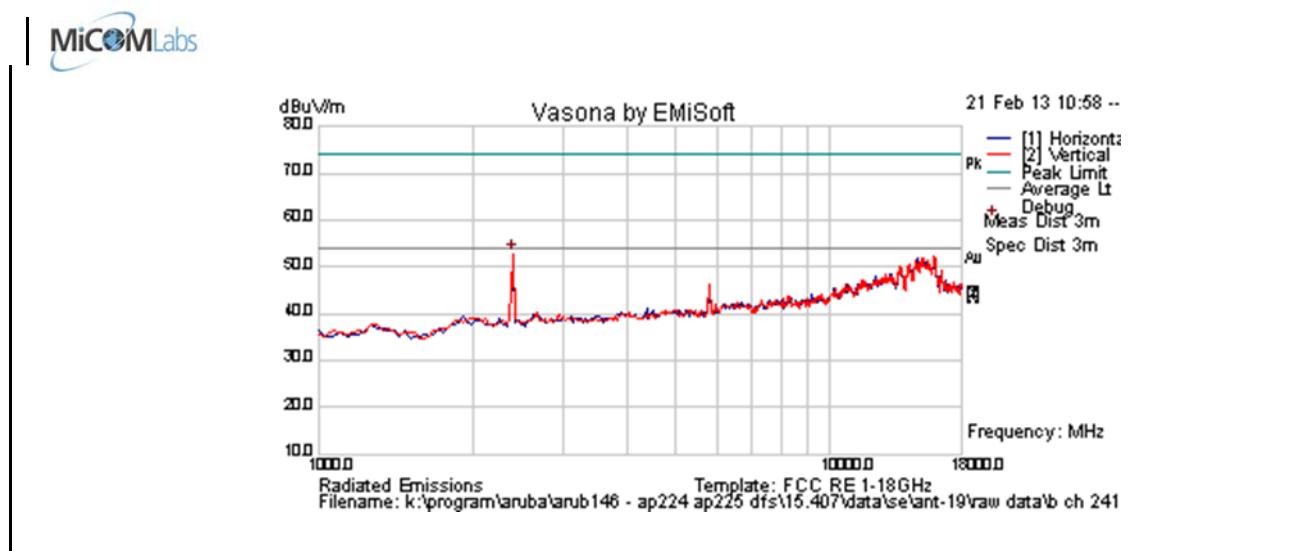


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	61.5	3.0	-11.7	52.8	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-19	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

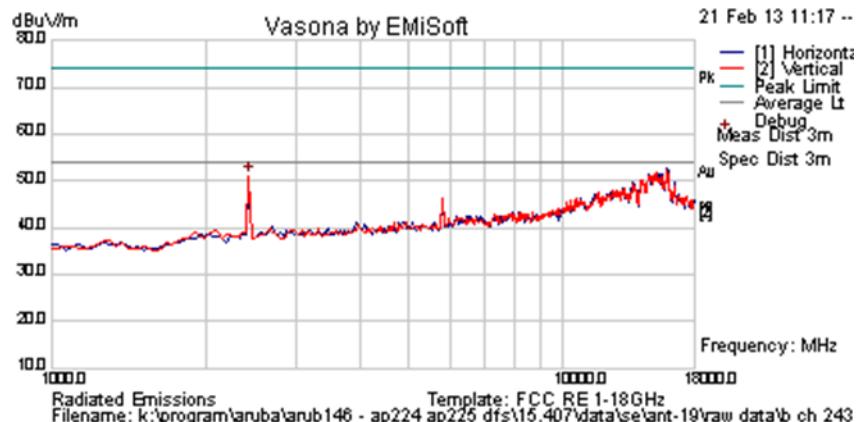


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	59.6	3.0	-11.6	51.0	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2462 MHz	Engineer	SB
Variant	802.11b; 1 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1012
Antenna	AP-ANT-19	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

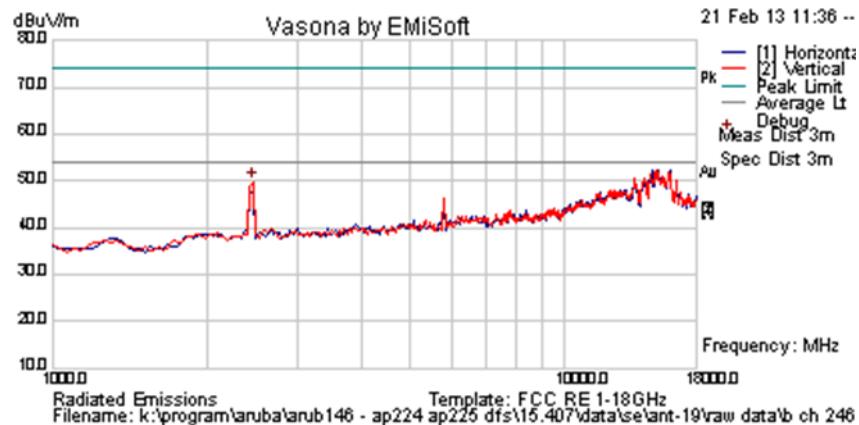


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	58.4	3.0	-11.5	49.9	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5745 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-19	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

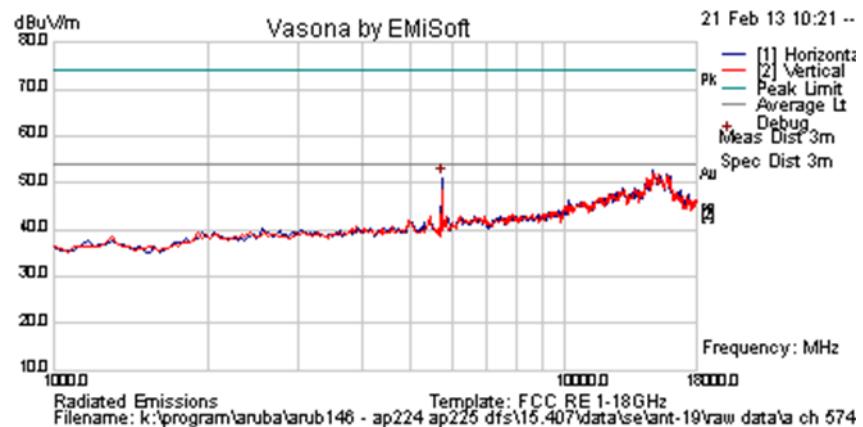


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	55.9	4.8	-9.5	51.1	Peak [Scan]	H	200					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5785 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-19	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

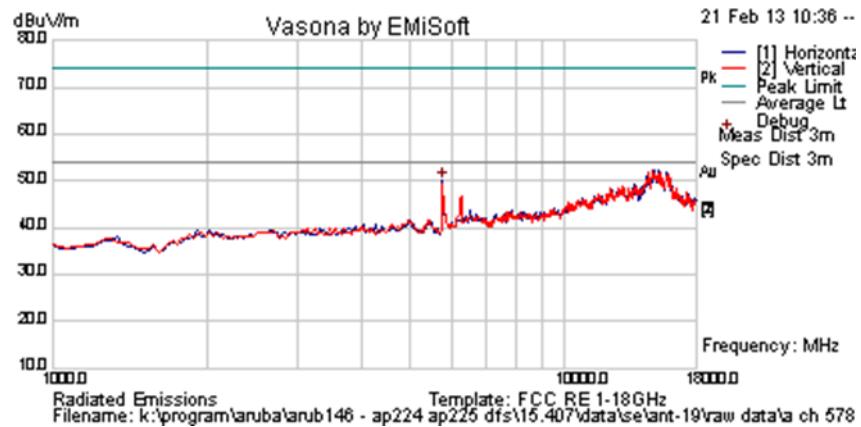


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	54.7	4.8	-9.5	50.0	Peak [Scan]	H	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5825 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	19
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	15.5	Press. (mBars)	1012
Antenna	AP-ANT-19	Duty Cycle (%)	100
Test Notes 1	POE - Support equipment (not located inside chamber)		
Test Notes 2			

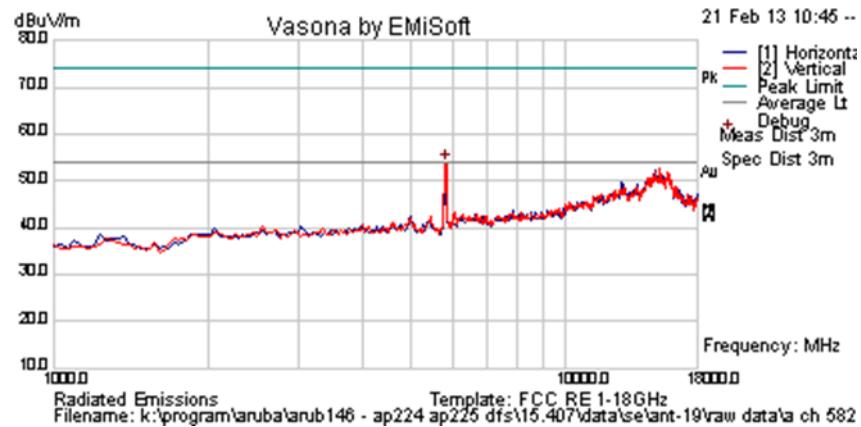

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5837.675	58.5	4.8	-9.3	54.0	Peak [Scan]	V	100					FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2.7. Band-Edge - Spurious Emissions

2.4 GHz Frequency Band

Peak Limit 74.0 dB μ V, Peak Limit 54.0 dB μ V

Integral Antenna

Operational Mode	2390 MHz		2483.5 MHz		Power Setting	
	dB μ V		Power Setting	dB μ V		
	Peak	Average		Peak		
b	65.03	45.81	18.0	66.39	40.64	18.0
g	60.45	41.40	16.5	64.97	45.89	16.5
n HT-20	60.69	41.54	16.5	65.56	45.57	16.5
n HT-40	67.57	50.39	14.0	71.38	52.86	14.0

Antenna ANT-1B

Operational Mode	2390 MHz		2483.5 MHz		Power Setting	
	dB μ V		Power Setting	dB μ V		
	Peak	Average		Peak		
b	52.50	37.49	18.0	53.14	38.82	18.0
g	61.82	40.82	16.5	60.59	42.35	16.5
n HT-20	61.88	42.21	16.5	60.18	41.93	16.5
n HT-40	70.44	51.38	14.0	72.56	52.20	14.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 109 of 472

Antenna ANT-13B

Operational Mode	2390 MHz		2483.5 MHz		Power Setting	
	dB μ V		Power Setting	dB μ V		
	Peak	Average		Peak	Average	
b	52.60	37.15	18.0	50.43	38.72	18.0
g	63.79	44.40	16.5	57.67	40.96	16.5
n HT-20	64.07	44.59	16.5	58.45	40.96	16.5
n HT-40	71.55	53.37	14.0	70.70	51.02	14.0

Antenna ANT-16

Operational Mode	2390 MHz		2483.5 MHz		Power Setting	
	dB μ V		Power Setting	dB μ V		
	Peak	Average		Peak	Average	
b	50.18	37.40	18.0	48.82	31.56	18.0
g	53.88	38.38	16.5	47.68	31.56	16.5
n HT-20	52.86	38.38	16.5	48.27	31.56	16.5
n HT-40	59.07	44.12	14.0	59.74	41.24	14.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 110 of 472

Antenna ANT-18

Operational Mode	2390 MHz			2483.5 MHz		
	dB μ V		Power Setting	dB μ V		Power Setting
	Peak	Average		Peak	Average	
b	53.01	37.15	18.0	55.30	40.39	18.0
g	57.74	38.72	16.5	59.99	43.12	16.5
n HT-20	58.89	39.00	16.5	61.02	43.36	16.5
n HT-40	70.84	50.37	14.0	72.82	52.80	14.0

Antenna ANT-19

Operational Mode	2390 MHz			2483.5 MHz		
	dB μ V		Power Setting	dB μ V		Power Setting
	Peak	Average		Peak	Average	
b	50.19	36.06	18.0	61.38	40.96	18.0
g	54.28	36.18	16.5	55.94	38.72	16.5
n HT-20	53.85	36.18	16.5	59.97	38.72	16.5
n HT-40	66.56	48.00	14.0	70.52	52.07	14.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 111 of 472

5.8 GHz Frequency Band

Integral Antenna

5460 MHz			
Operational Mode	Peak	Average	Power Setting
a	49.68	36.68	15.5
n HT-20	49.68	36.68	15.5
n HT-40	49.30	36.49	14.0
ac-40	49.43	36.49	14.0
ac-80	49.60	36.86	12.0

Antenna ANT-1B

5460 MHz			
Operational Mode	Peak	Average	Power Setting
a	48.76	36.10	15.5
n HT-20	48.86	35.90	18.0
n HT-40	47.95	35.90	14.0
ac-40	48.72	36.10	14.0
ac-80	49.17	36.10	12.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 112 of 472

Antenna 13B

5460 MHz			
Operational Mode	Peak	Average	Power Setting
a	45.99	33.24	15.5
n HT-20	46.30	33.24	15.5
n HT-40	46.06	32.96	14.0
ac-40	45.87	33.24	14.0
ac-80	47.43	33.24	12.0

Antenna ANT-16

5460 MHz			
Operational Mode	Peak	Average	Power Setting
a	47.77	34.86	15.5
n HT-20	48.20	34.86	15.5
n HT-40	47.58	34.86	14.0
ac-40	48.20	34.86	14.0
ac-80	48.44	34.86	12.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Antenna ANT-18

5460 MHz			
Operational Mode	Peak	Average	Power Setting
a	48.48	37.20	15.5
n HT-20	48.29	37.20	15.5
n HT-40	48.95	37.65	14.0
ac-40	48.39	37.20	14.0
ac-80	48.99	37.60	12.0

Antenna ANT-19

5460 MHz			
Operational Mode	Peak	Average	Power Setting
a	48.72	35.90	15.5
n HT-20	48.90	35.90	15.5
n HT-40	48.44	35.90	14.0
ac-40	48.76	35.90	14.0
ac-80	48.62	36.10	12.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification Limits

FCC §15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

FCC §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

IC RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

IC RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 115 of 472

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2.8. Digital Emissions (0.03-1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209 Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3dB\mu V/m$$


Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Test Freq.	2437 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	19.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	34
Power Setting	18	Press. (mBars)	1001
Antenna	Integral		
Test Notes 1	Eut: Position Horizontal; S/N:;C-84 Only		
Test Notes 2	PSU: POE (support equipment not in chamber ferrite clamp on cables)		

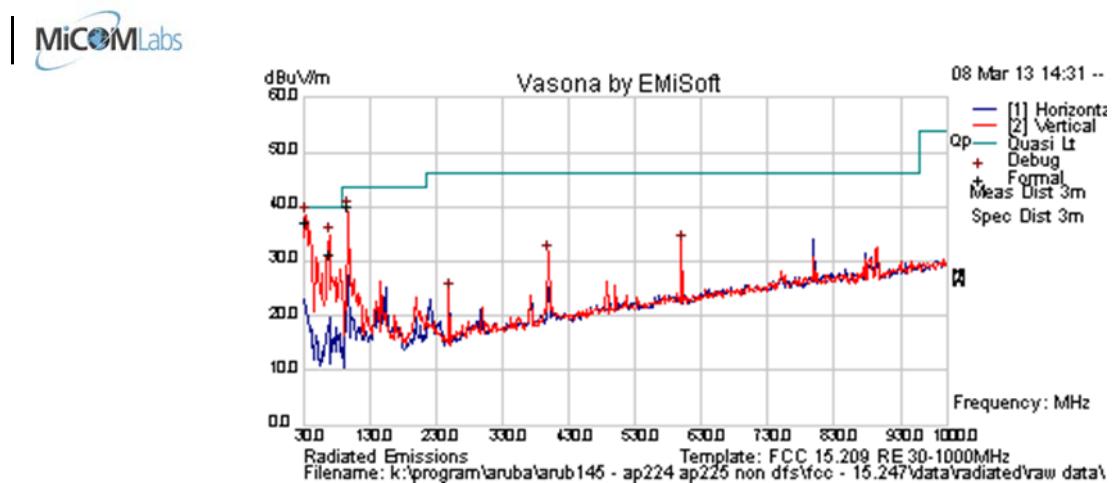


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
34.088	46.4	3.6	-13.0	37.0	Quasi Max	V	102	208	40	-3.0	Pass	
98.040	57.9	4.1	-21.8	40.1	Quasi Max	V	117	88	43.5	-3.4	Pass	
68.990	50.5	3.9	-23.2	31.2	Quasi Max	V	155	304	40	-8.8	Pass	
399.240	40.7	5.5	-14.8	31.4	Peak [Scan]	V	155	304	46	-14.6	Pass	
599.681	38.6	6.2	-11.6	33.2	Peak [Scan]	V	155	304	46	-12.8	Pass	
249.879	38.6	4.9	-19.0	24.5	Peak [Scan]	H	155	304	46	-21.5	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	19.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	34
Power Setting	18	Press. (mBars)	1001
Antenna	Integral		
Test Notes 1	Eut: Position Vertical; S/N:;C-84 Only		
Test Notes 2	PSU: POE (support equipment not in chamber ferrite clamp on cables)		

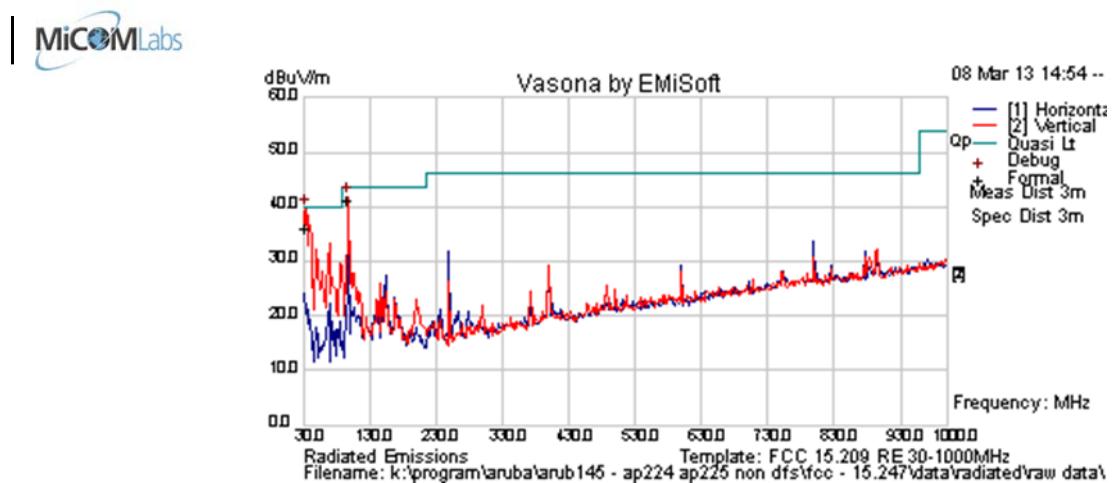


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
34.092	45.5	3.6	-13.0	36.1	Quasi Max	V	117	116	40	-3.9	Pass	
98.125	58.9	4.1	-21.8	41.2	Quasi Max	V	109	360	43.5	-2.3	Pass	
154.412	42.0	4.4	-18.9	27.5	Peak [Scan]	H	108	360	43.5	-16.0	Pass	
249.466	44.5	4.9	-19.0	30.4	Peak [Scan]	H	108	360	46	-15.6	Pass	
399.553	37.1	5.5	-14.8	27.8	Peak [Scan]	V	108	360	46	-18.2	Pass	
278.716	33.2	5.0	-17.4	20.8	Peak [Scan]	H	108	360	46	-25.2	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	19.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	34
Power Setting	18	Press. (mBars)	1001
Antenna	Integral		
Test Notes 1	Eut: Position Vertical; S/N:;C-84 Only		
Test Notes 2	PSU: AC/DC 110VAC		

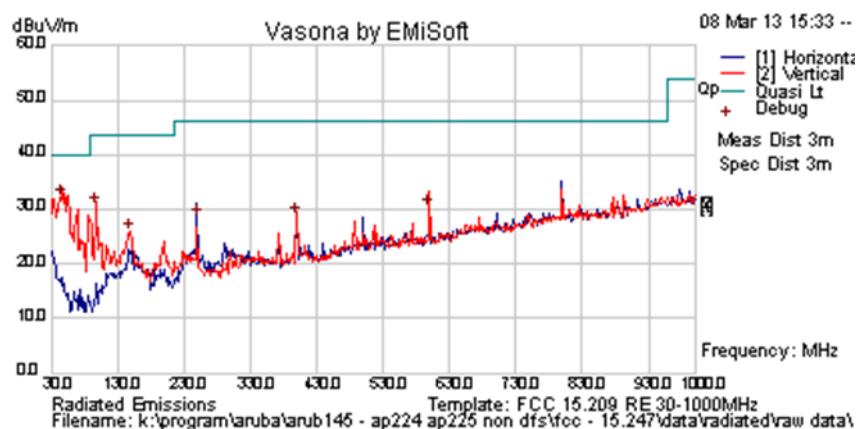


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
46.005	49.9	3.7	-21.5	32.2	Peak [Scan]	V	98	360	40	-7.8	Pass	
399.570	37.9	5.5	-14.8	28.6	Peak [Scan]	V	98	360	46	-17.4	Pass	
598.905	35.7	6.2	-11.6	30.4	Peak [Scan]	V	98	360	46	-15.7	Pass	
148.825	40.2	4.4	-18.8	25.8	Peak [Scan]	V	98	360	43.5	-17.7	Pass	
97.415	48.5	4.1	-22.0	30.6	Peak [Scan]	V	98	360	43.5	-12.9	Pass	
250.089	42.6	4.9	-19.0	28.5	Peak [Scan]	H	98	360	46	-17.6	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	19.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	34
Power Setting	18	Press. (mBars)	1001
Antenna	Integral		
Test Notes 1	Eut: Position Horizontal; S/N:;C-84 Only		
Test Notes 2	PSU: AC/DC 110VAC		

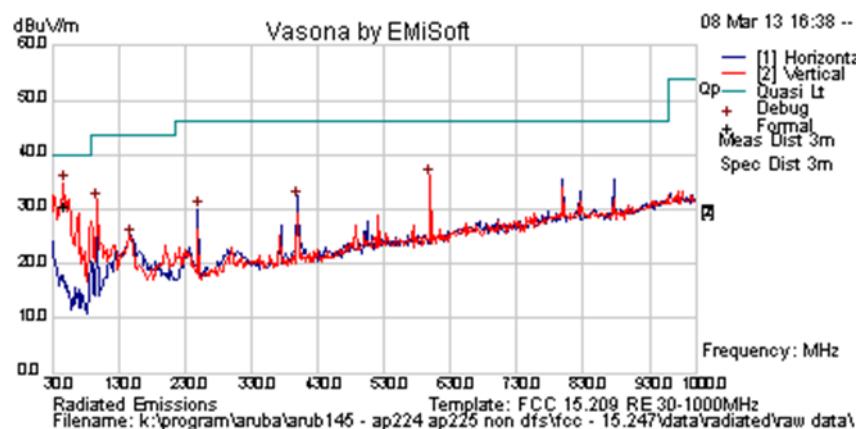

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
48.456	49.3	3.7	-22.6	30.4	Quasi Max	V	113	143	40	-9.6	Pass	
97.569	49.1	4.1	-22.0	31.2	Peak [Scan]	V	98	360	43.5	-12.3	Pass	
599.443	40.9	6.2	-11.6	35.5	Peak [Scan]	V	98	360	46	-10.5	Pass	
148.825	38.9	4.4	-18.8	24.5	Peak [Scan]	V	98	360	43.5	-19.0	Pass	
249.652	43.9	4.9	-19.0	29.8	Peak [Scan]	H	98	360	46	-16.2	Pass	
399.147	40.9	5.5	-14.8	31.6	Peak [Scan]	H	98	360	46	-14.4	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency

NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

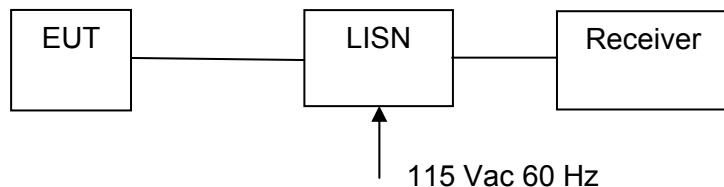

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

ac/dc Adaptor

Test Freq.	N/A	Engineer	SB
Variant	AC Line Emissions	Temp (°C)	20
Freq. Range	0.150 MHz - 30 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1011
Antenna	Integral		
Test Notes 1	Eut: Position Horizontal; S/N:;C-84 Only		
Test Notes 2	PSU: AC/DC 110VAC		

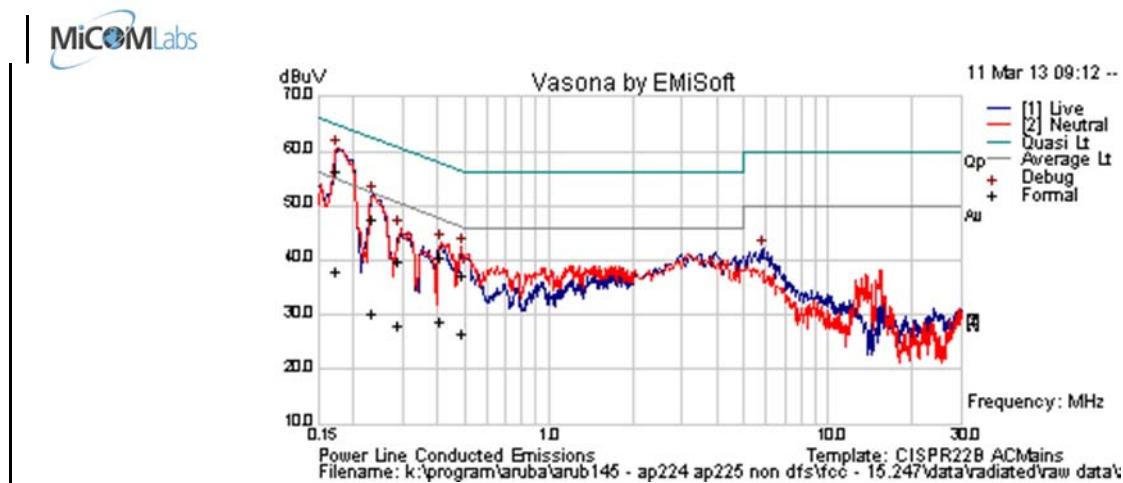

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.174	46.4	9.9	0.1	56.4	Quasi Peak	Live	64.77	-8.4	Pass	
0.236	37.6	9.9	0.1	47.6	Quasi Peak	Live	62.24	-14.7	Pass	
0.489	27.4	9.9	0.1	37.4	Quasi Peak	Neutral	56.18	-18.8	Pass	
0.414	30.4	9.9	0.1	40.4	Quasi Peak	Neutral	57.57	-17.2	Pass	
0.291	29.9	9.9	0.1	39.9	Quasi Peak	Neutral	60.5	-20.6	Pass	
0.174	28.1	9.9	0.1	38.1	Average	Live	54.77	-16.7	Pass	
0.236	20.4	9.9	0.1	30.3	Average	Live	52.24	-21.9	Pass	
0.489	16.7	9.9	0.1	26.7	Average	Neutral	46.18	-19.5	Pass	
0.414	18.8	9.9	0.1	28.8	Average	Neutral	47.57	-18.8	Pass	
0.291	18.0	9.9	0.1	28.0	Average	Neutral	50.5	-22.5	Pass	
5.882	31.4	10.2	0.3	41.9	Peak [Scan]	Live	50	-8.1	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band										

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 124 of 472

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------


Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6. PHOTOGRAPHS

6.1. Conducted Test Setup

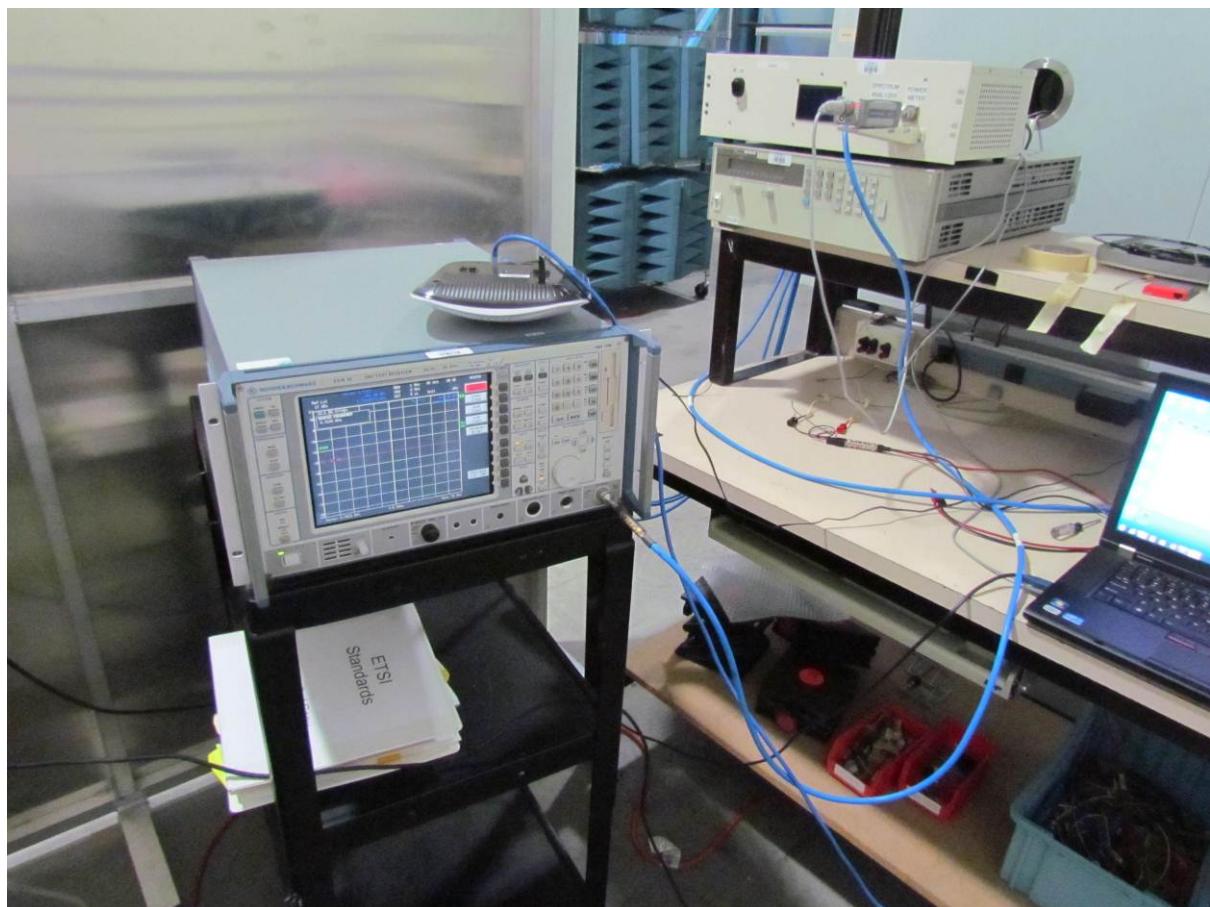


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. Test Setup - Digital Emissions > 1 GHz

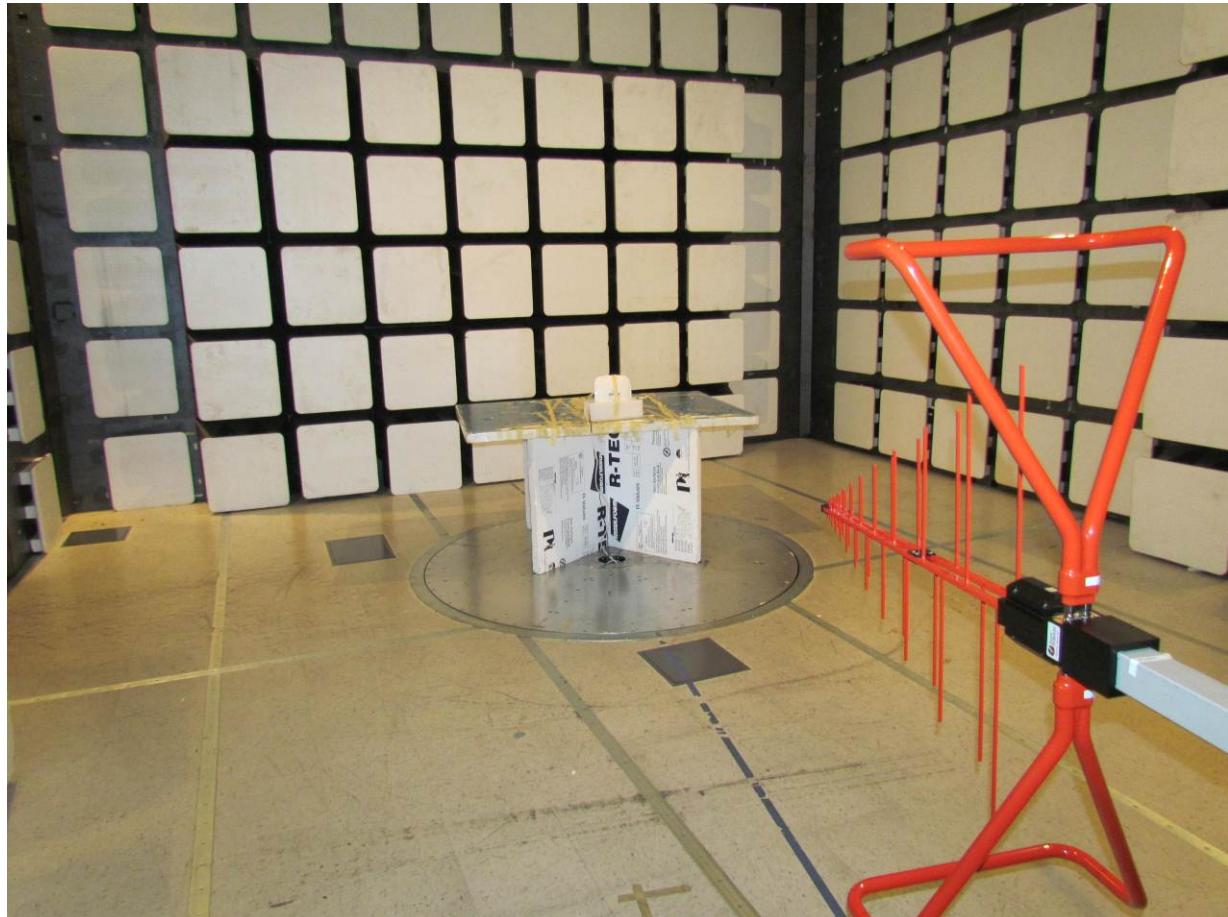

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. Radiated Emissions Test Setup >1 GHz

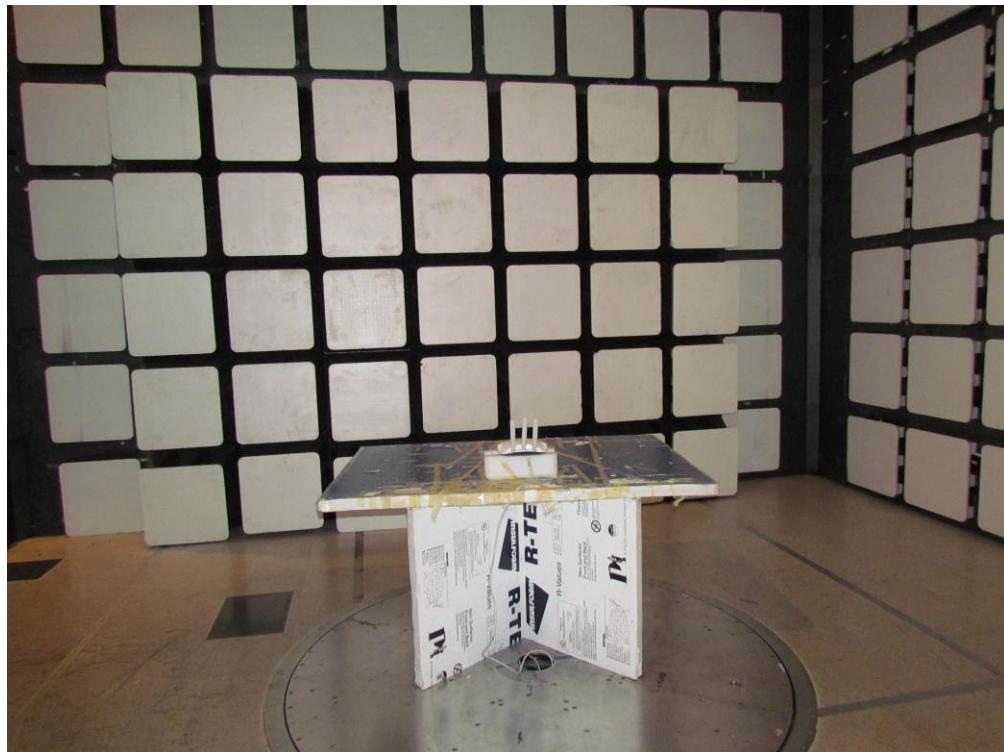

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.4. ac Wireline Test Setup >1 GHz



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 129 of 472

7. TEST EQUIPMENT

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 th Nov 13
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 th Nov 13
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 th Nov 13
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 th Nov 13
0158	Barometer /Thermometer	Control Co.	4196	E2846	8 th Dec 13
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 nd Dec 13
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 th Nov 13
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 th Nov 13
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 th Nov 13
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
	EMC Test Software	EMISoft	Vasona	5.0051	N/A
	RF Conducted Test Software	National Instruments	Labview	Version 8.2	N/A
	RF Conducted Test Software	MiCOM Labs ATS		Version 1.5	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: APIN0224, APIN0225 802.11a/b/g/n/ac
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: ARUB145-U1 Rev A
Issue Date: 11th May 2013
Page: 130 of 472

APPENDIX

A. SUPPORTING INFORMATION


A.1. CONDUCTED TEST PLOTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.1. 6 dB & 99% Bandwidth

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

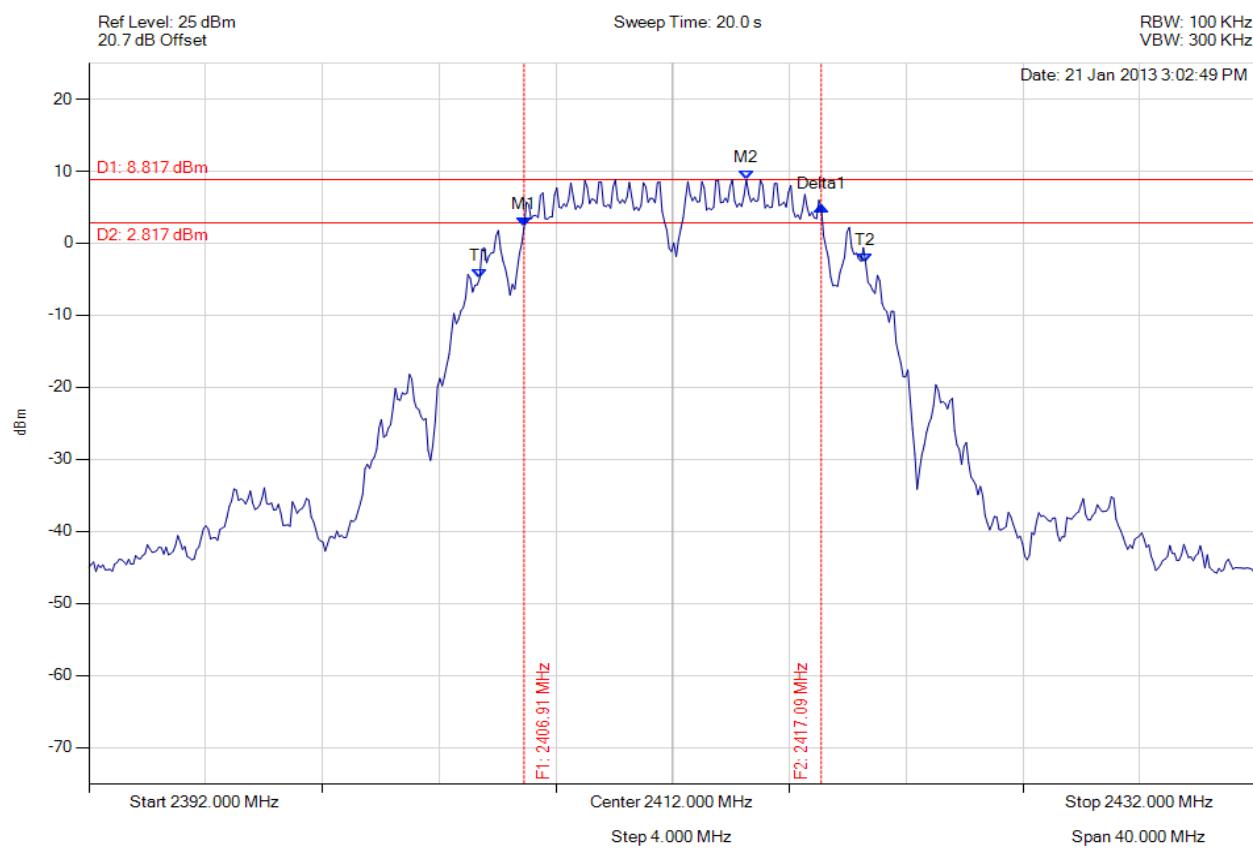


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2406.910 MHz : 2.228 dBm M2 : 2414.525 MHz : 8.817 dBm Delta1 : 10.180 MHz : 2.866 dB T1 : 2405.387 MHz : -4.904 dBm T2 : 2418.613 MHz : -2.750 dBm OBW : 13.226 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

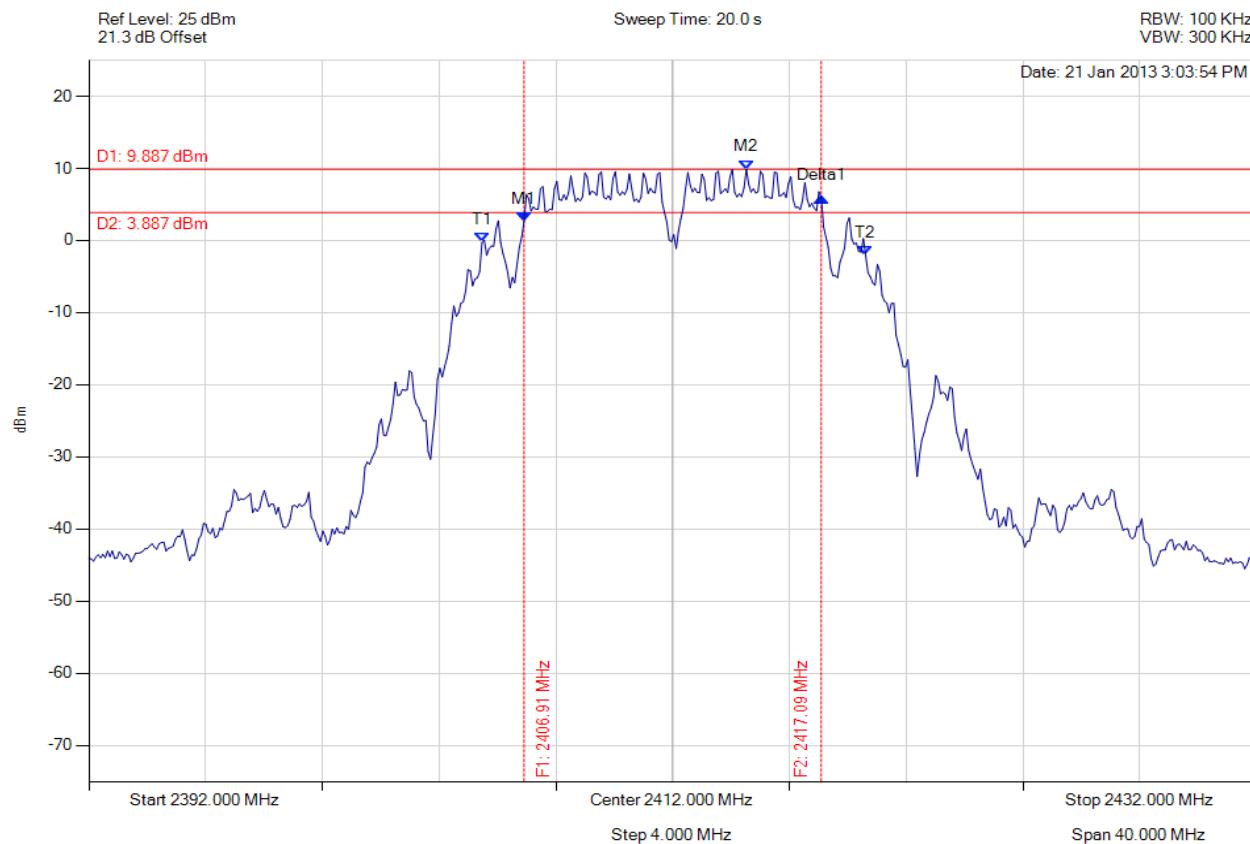


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2406.910 MHz : 2.688 dBm M2 : 2414.525 MHz : 9.887 dBm Delta1 : 10.180 MHz : 3.321 dB T1 : 2405.467 MHz : -0.267 dBm T2 : 2418.613 MHz : -2.079 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

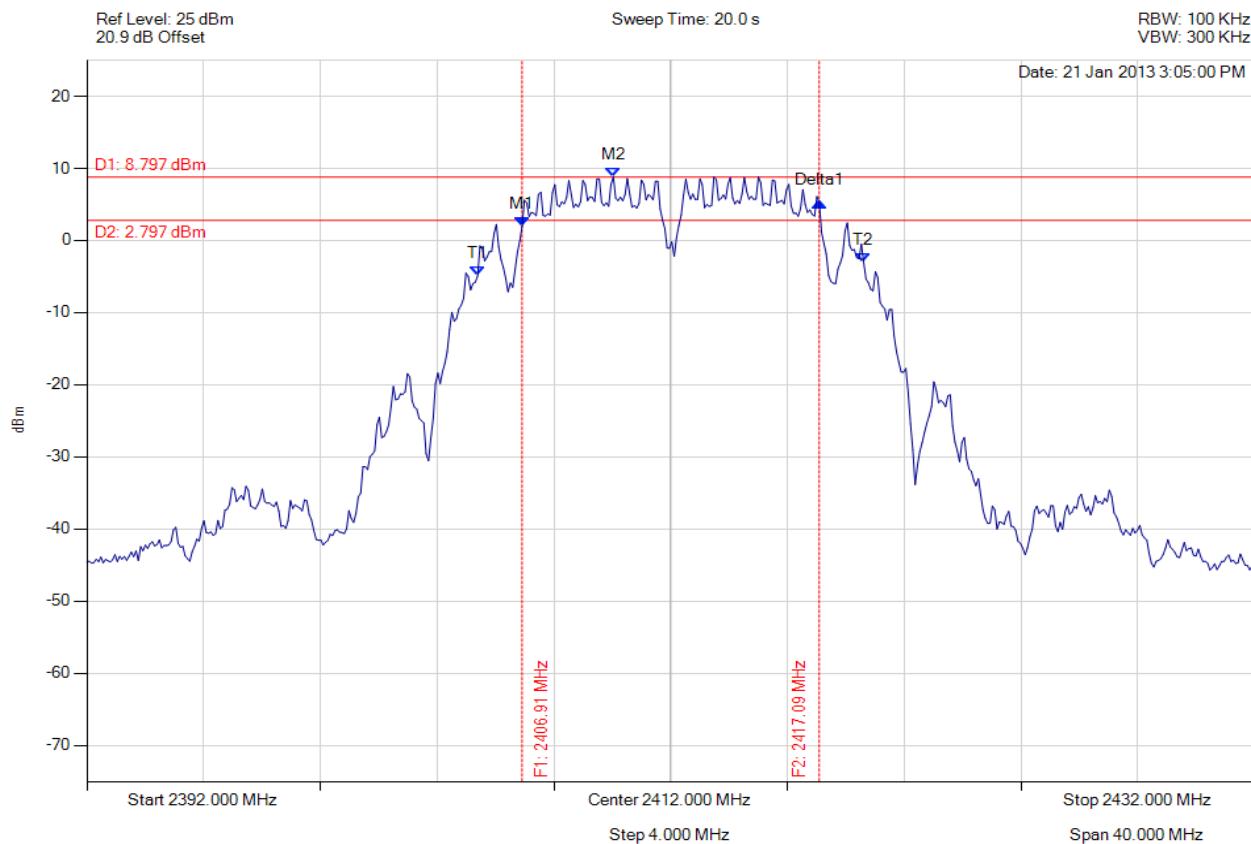


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2406.910 MHz : 1.958 dBm M2 : 2410.036 MHz : 8.797 dBm Delta1 : 10.180 MHz : 3.321 dB T1 : 2405.387 MHz : -4.925 dBm T2 : 2418.613 MHz : -2.999 dBm OBW : 13.226 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

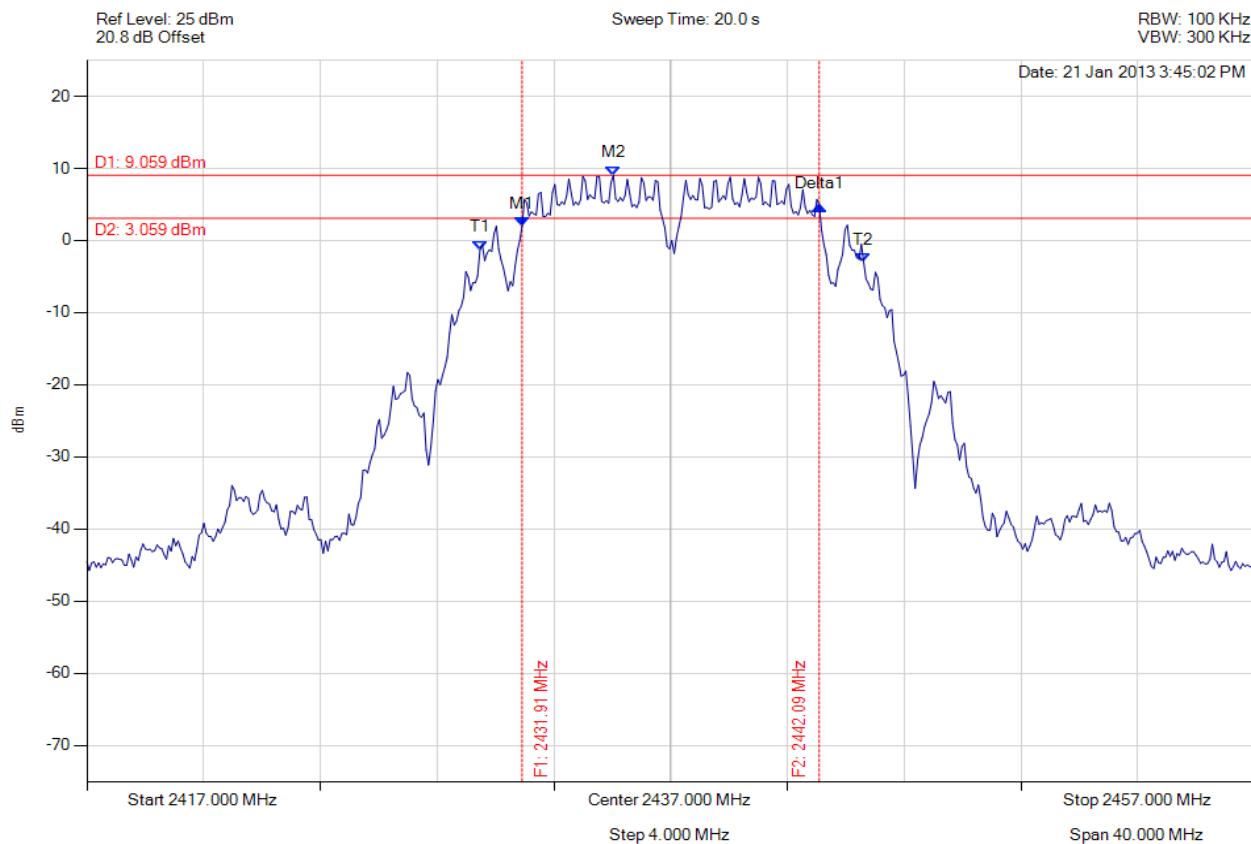


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.910 MHz : 2.033 dBm M2 : 2435.036 MHz : 9.059 dBm Delta1 : 10.180 MHz : 2.837 dB T1 : 2430.467 MHz : -1.290 dBm T2 : 2443.613 MHz : -2.964 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.000 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

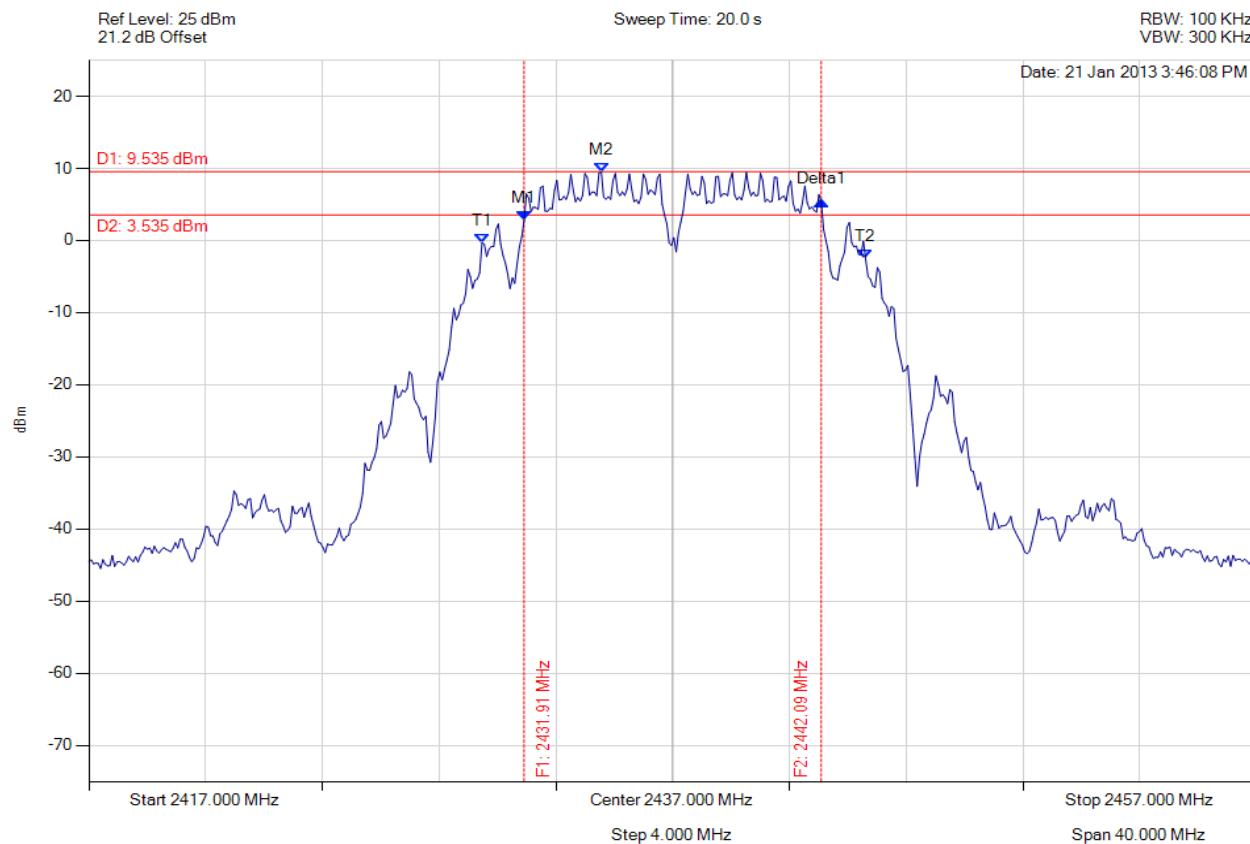


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.910 MHz : 2.806 dBm M2 : 2434.555 MHz : 9.535 dBm Delta1 : 10.180 MHz : 2.595 dB T1 : 2430.467 MHz : -0.310 dBm T2 : 2443.613 MHz : -2.604 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

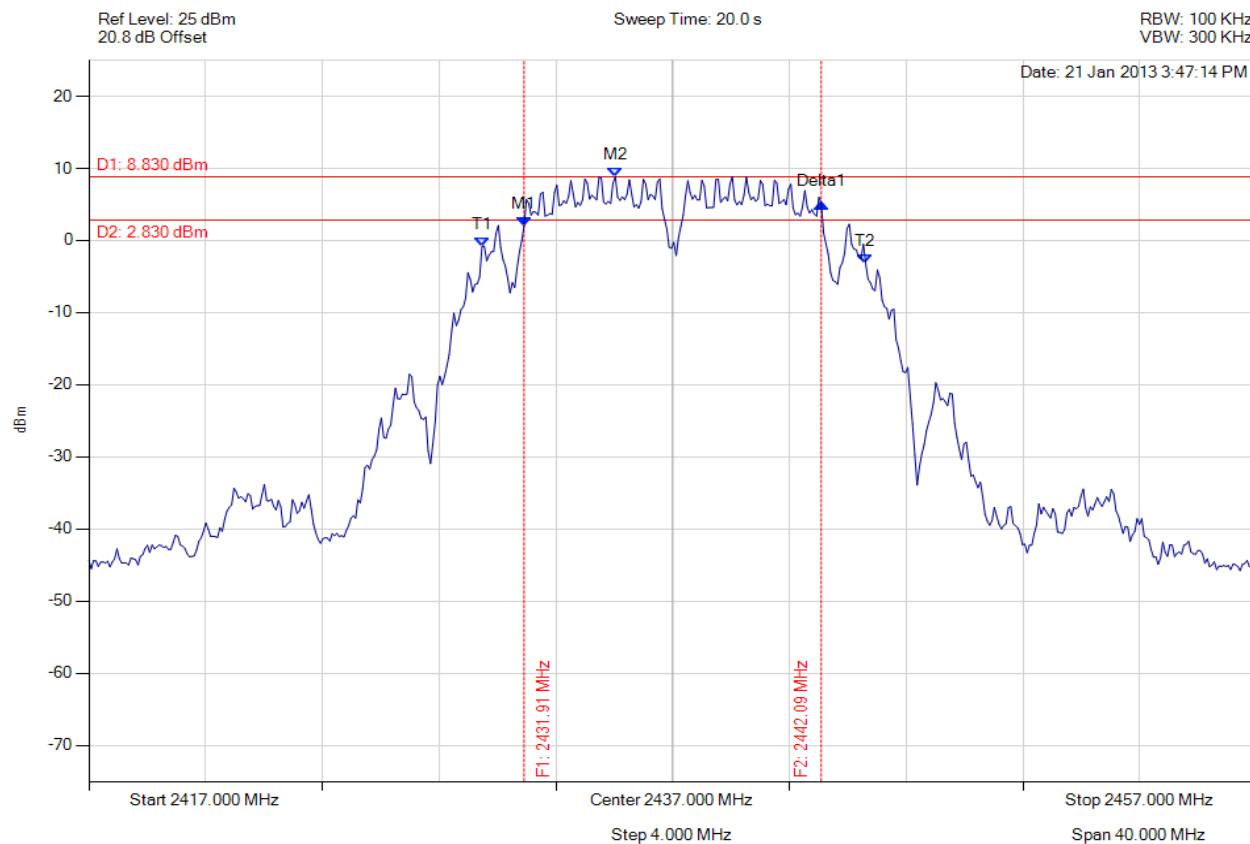


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.910 MHz : 2.004 dBm M2 : 2435.036 MHz : 8.830 dBm Delta1 : 10.180 MHz : 3.097 dB T1 : 2430.467 MHz : -0.863 dBm T2 : 2443.613 MHz : -3.167 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

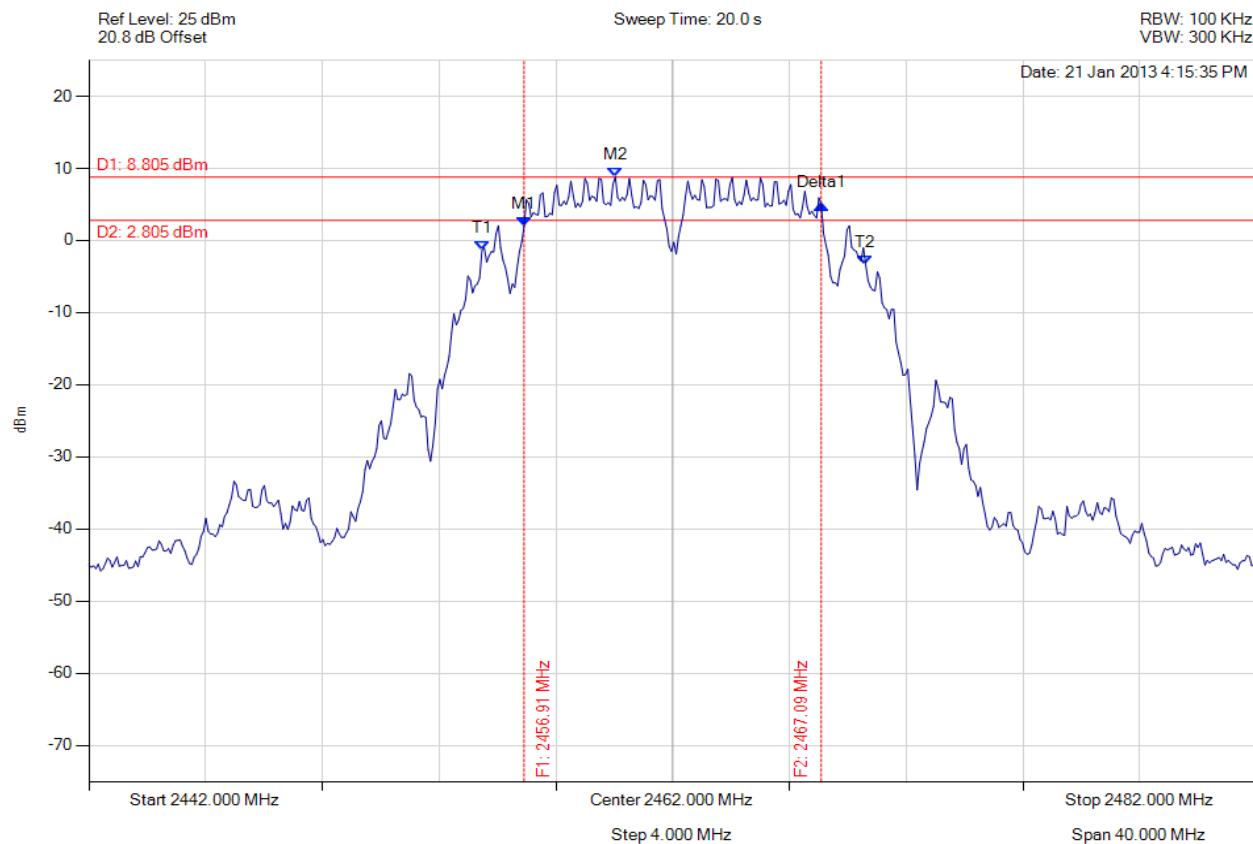


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2456.910 MHz : 1.994 dBm M2 : 2460.036 MHz : 8.805 dBm Delta1 : 10.180 MHz : 2.990 dB T1 : 2455.467 MHz : -1.345 dBm T2 : 2468.613 MHz : -3.320 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

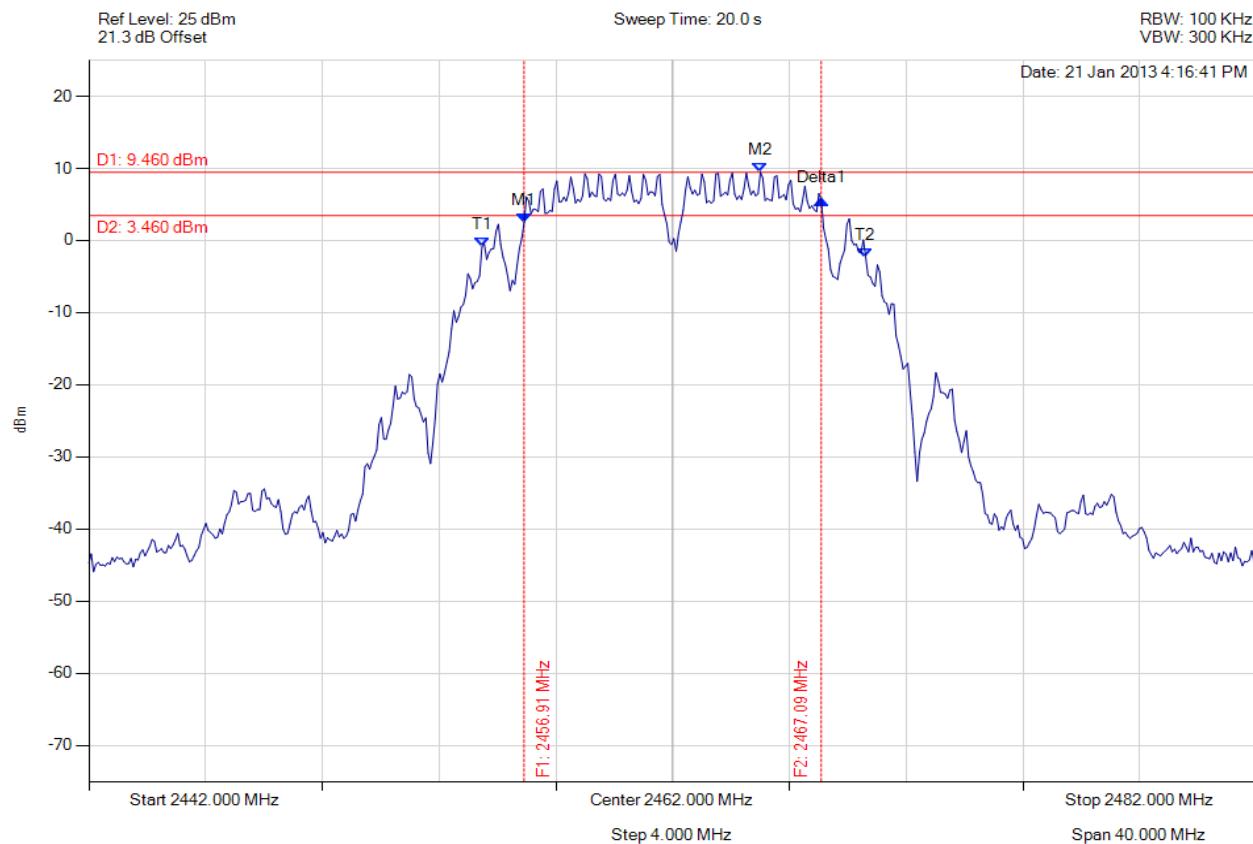


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2456.910 MHz : 2.429 dBm M2 : 2465.006 MHz : 9.460 dBm Delta1 : 10.180 MHz : 3.236 dB T1 : 2455.467 MHz : -0.800 dBm T2 : 2468.613 MHz : -2.299 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

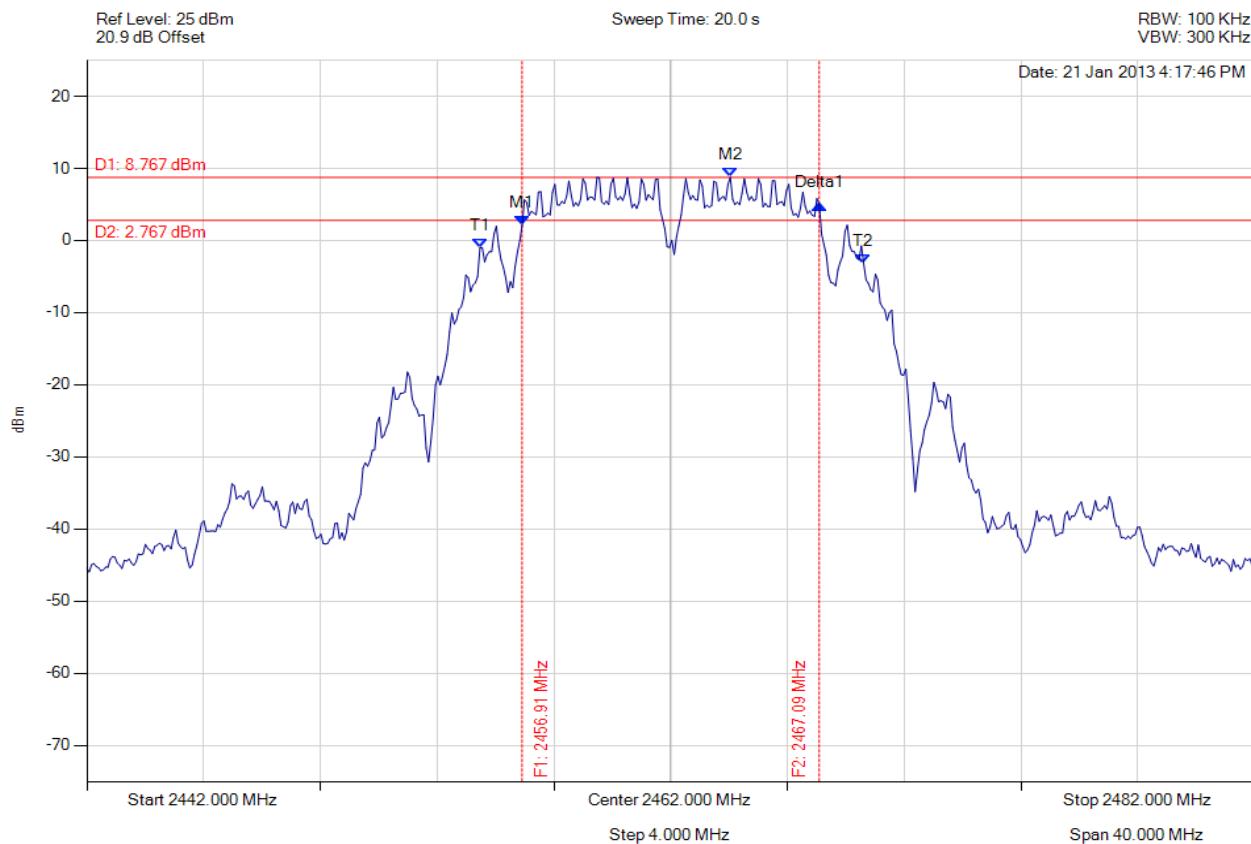


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2456.910 MHz : 2.059 dBm M2 : 2464.044 MHz : 8.767 dBm Delta1 : 10.180 MHz : 2.943 dB T1 : 2455.467 MHz : -0.971 dBm T2 : 2468.613 MHz : -3.169 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 10.180 MHz Limit: ≥ 0.5 MHz Margin: -9.68 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

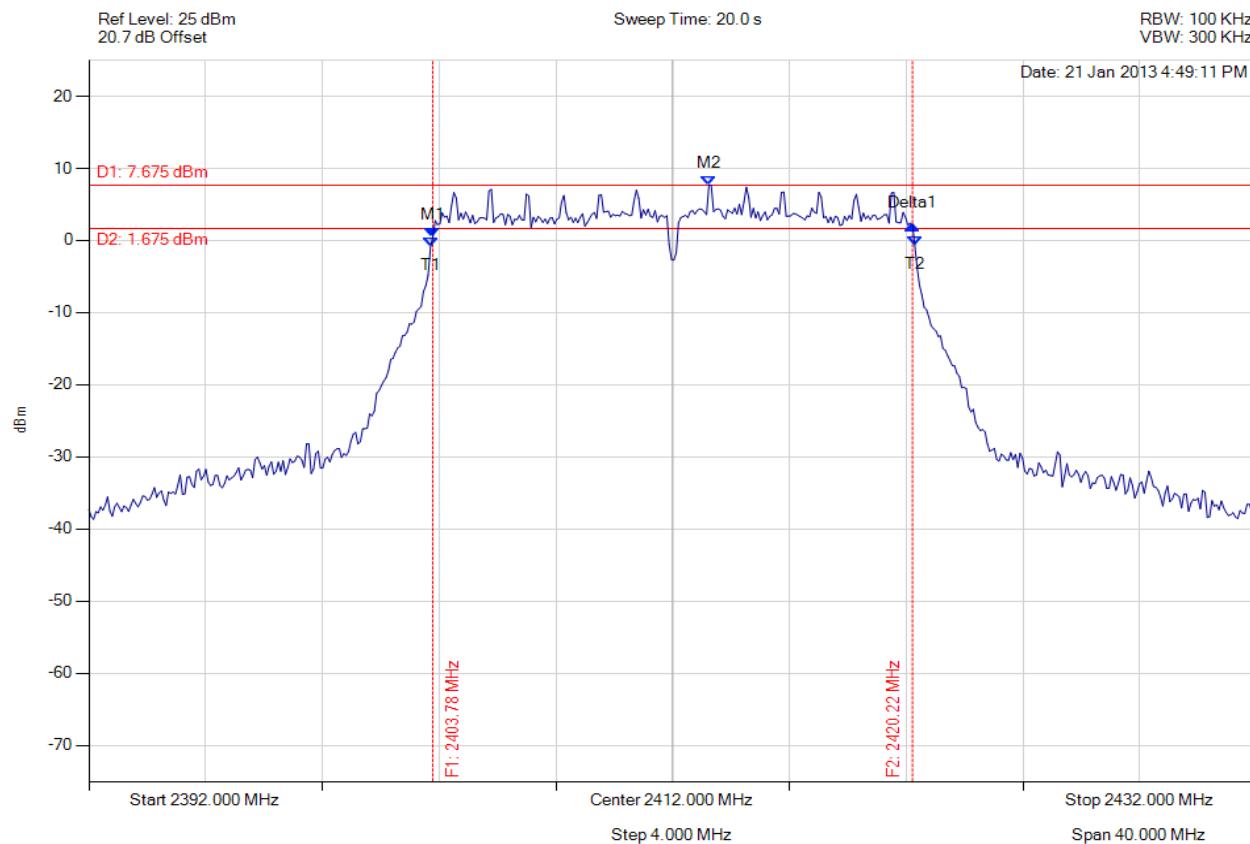


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2403.784 MHz : 0.481 dBm M2 : 2413.242 MHz : 7.675 dBm Delta1 : 16.433 MHz : 1.692 dB T1 : 2403.703 MHz : -0.881 dBm T2 : 2420.297 MHz : -0.743 dBm OBW : 16.593 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

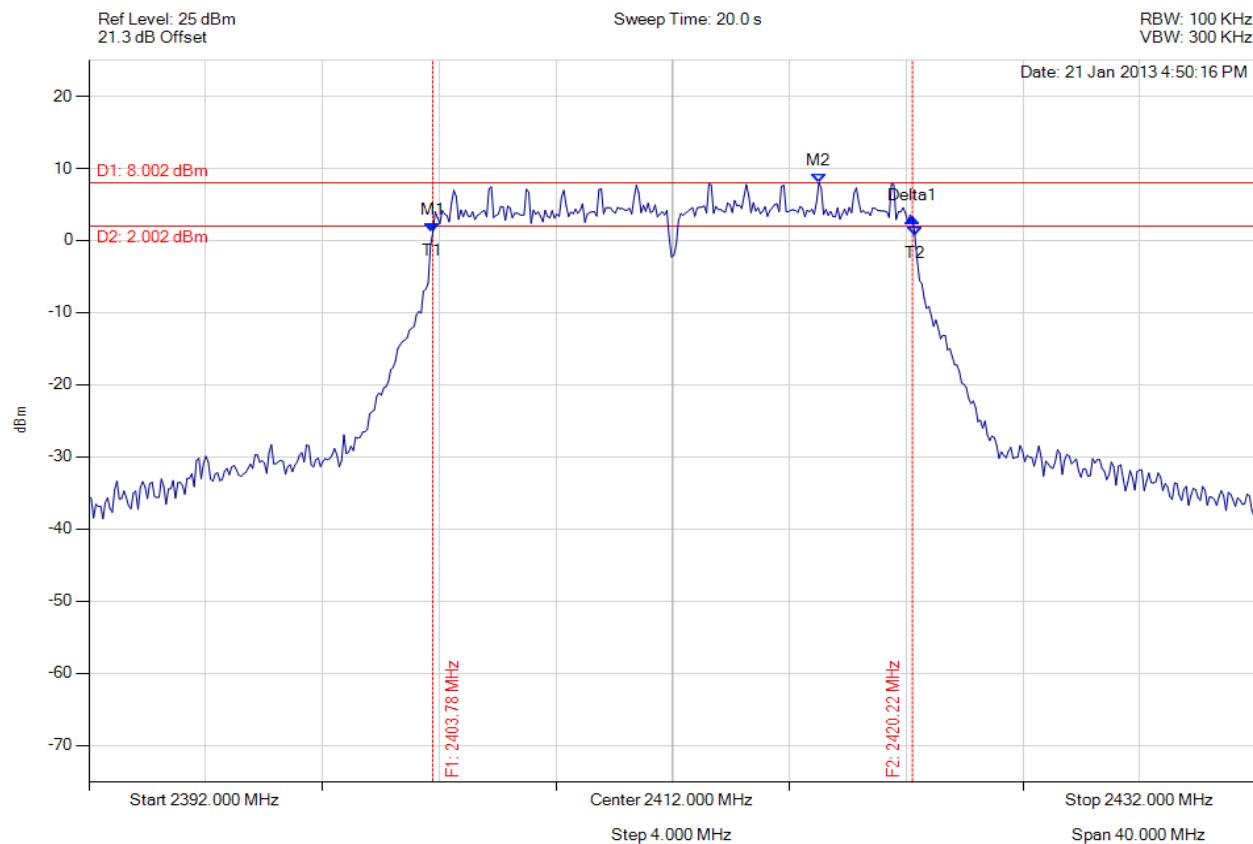


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2403.784 MHz : 1.079 dBm M2 : 2417.010 MHz : 8.002 dBm Delta1 : 16.433 MHz : 2.060 dB T1 : 2403.784 MHz : 1.079 dBm T2 : 2420.297 MHz : 0.693 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

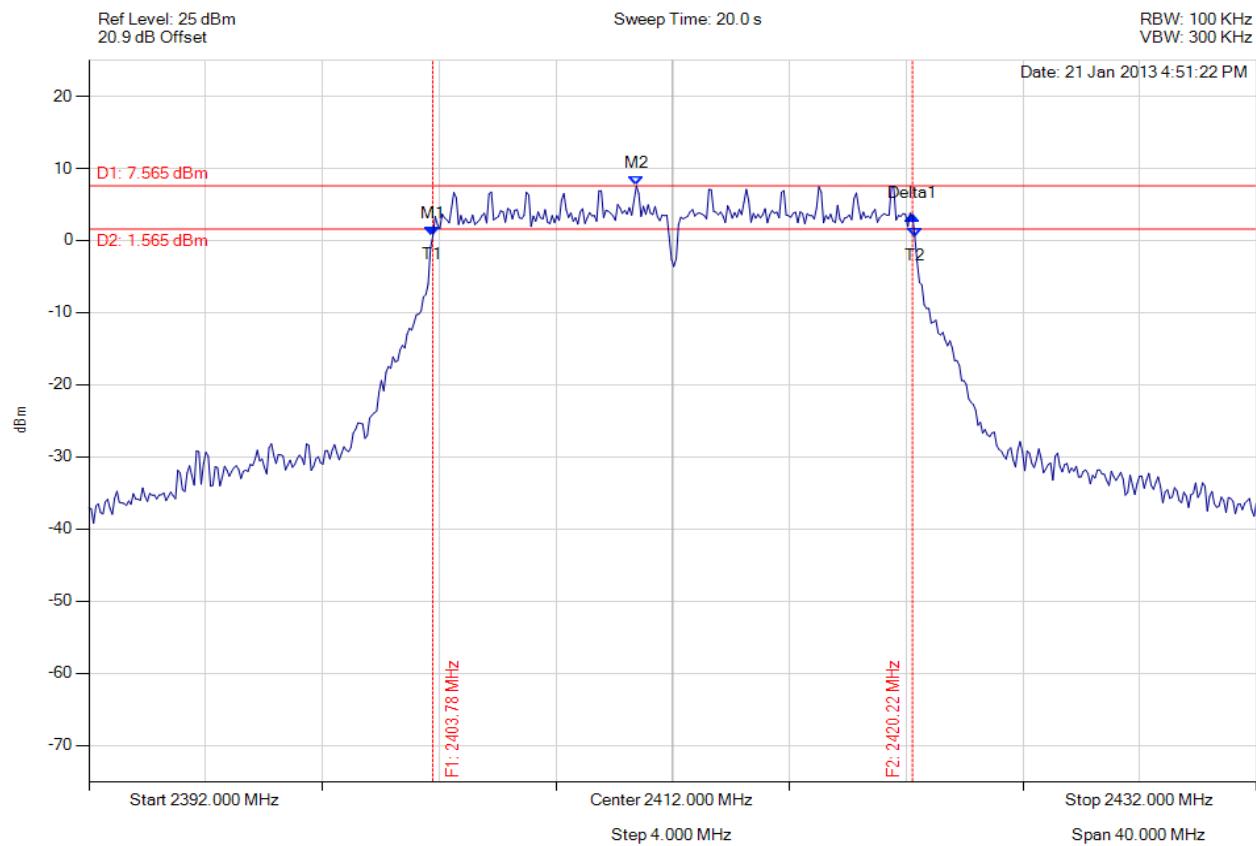


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2403.784 MHz : 0.613 dBm M2 : 2410.758 MHz : 7.565 dBm Delta1 : 16.433 MHz : 2.800 dB T1 : 2403.784 MHz : 0.613 dBm T2 : 2420.297 MHz : 0.467 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

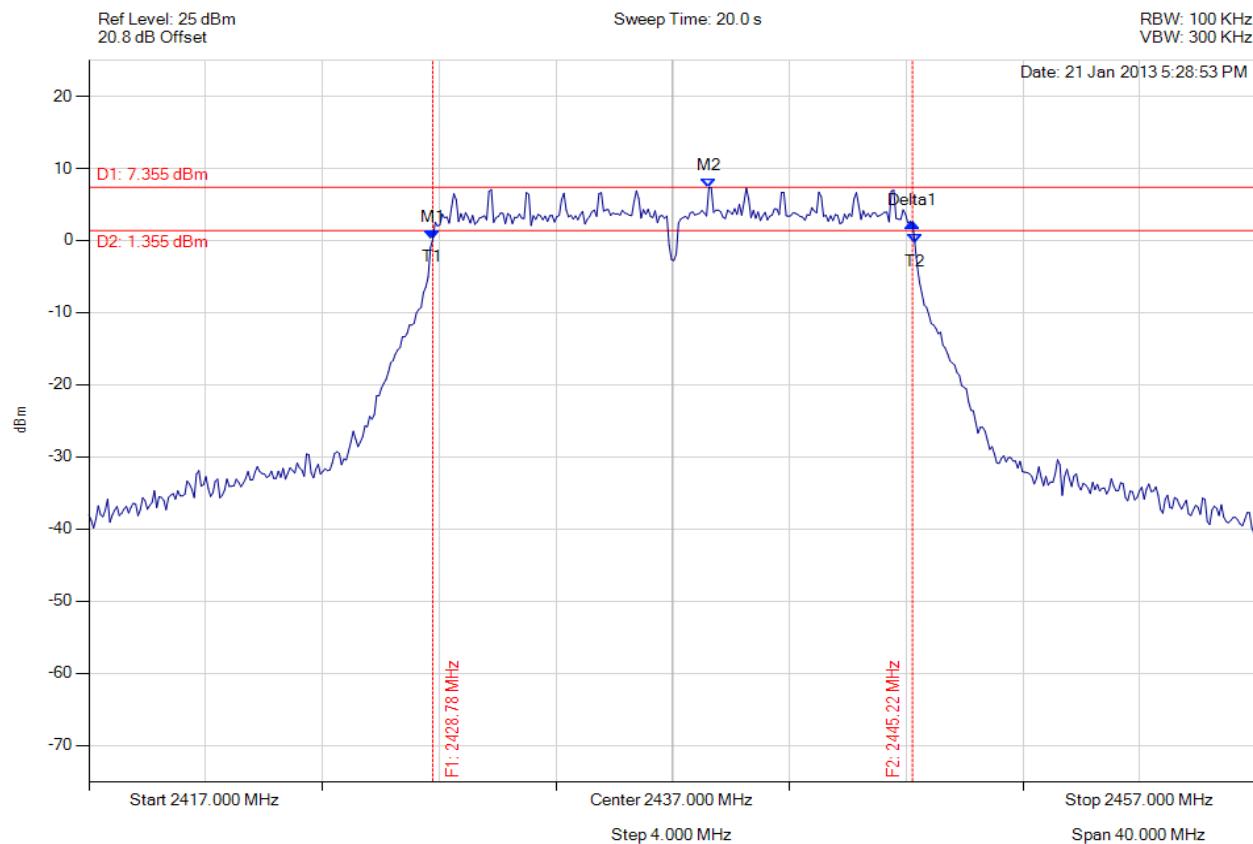


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.784 MHz : 0.203 dBm M2 : 2438.242 MHz : 7.355 dBm Delta1 : 16.433 MHz : 2.290 dB T1 : 2428.784 MHz : 0.203 dBm T2 : 2445.297 MHz : -0.361 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

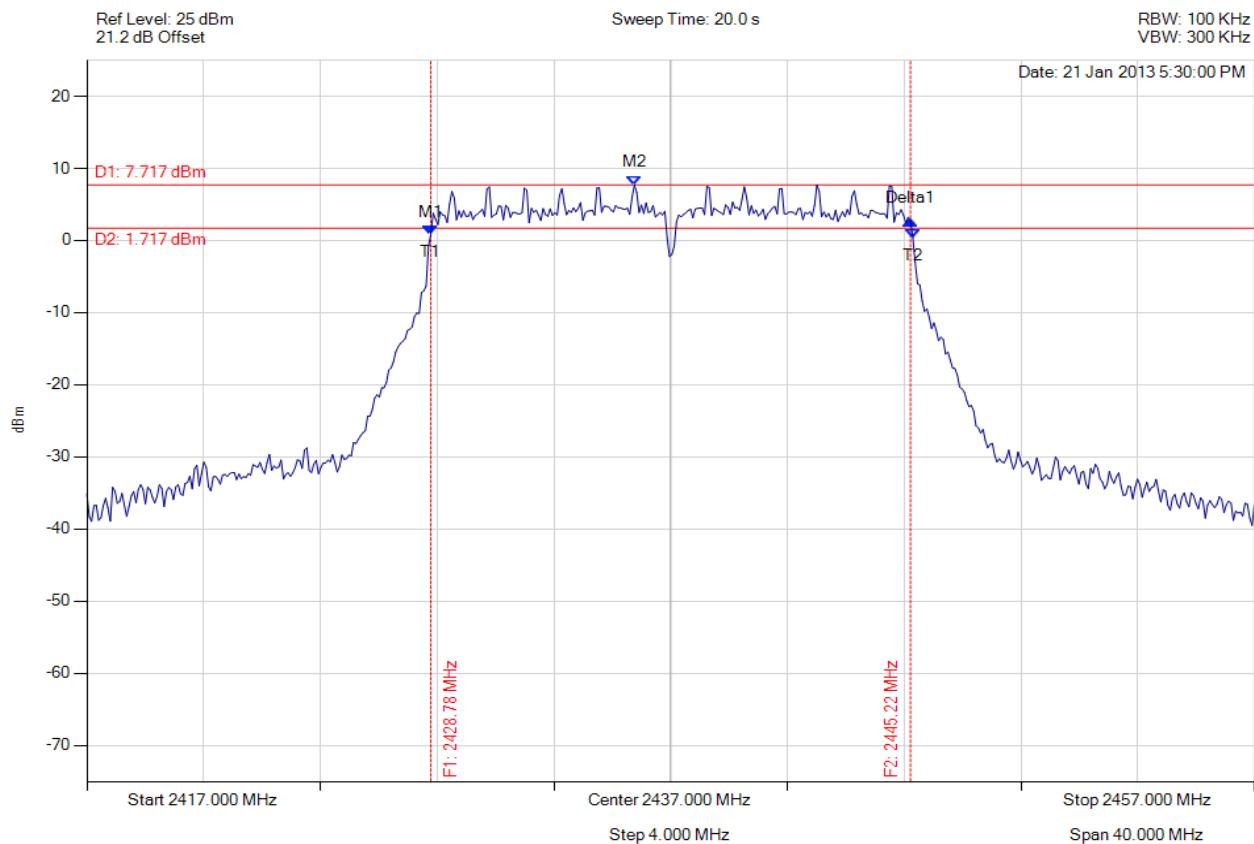


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.784 MHz : 0.861 dBm M2 : 2435.758 MHz : 7.717 dBm Delta1 : 16.433 MHz : 1.885 dB T1 : 2428.784 MHz : 0.861 dBm T2 : 2445.297 MHz : 0.377 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

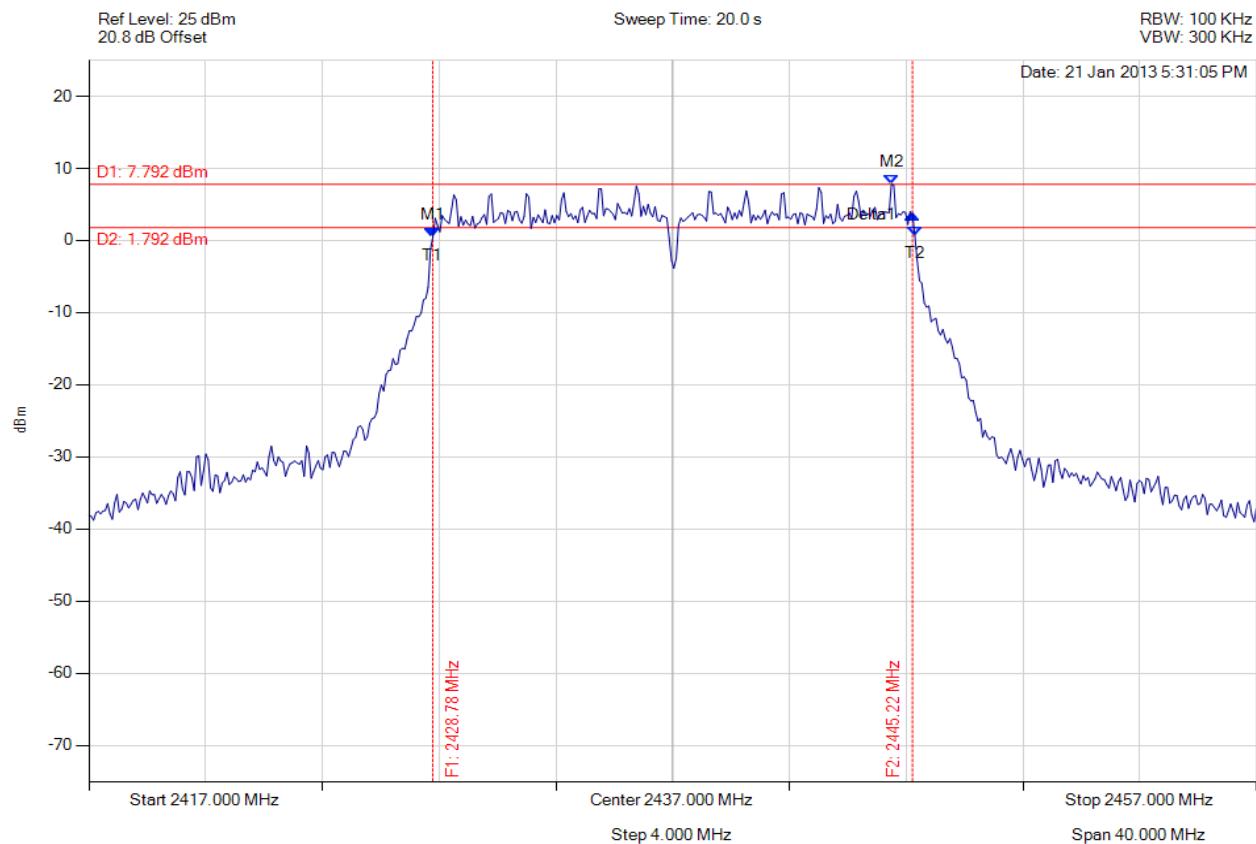


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.784 MHz : 0.469 dBm M2 : 2444.495 MHz : 7.792 dBm Delta1 : 16.433 MHz : 3.101 dB T1 : 2428.784 MHz : 0.469 dBm T2 : 2445.297 MHz : 0.683 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

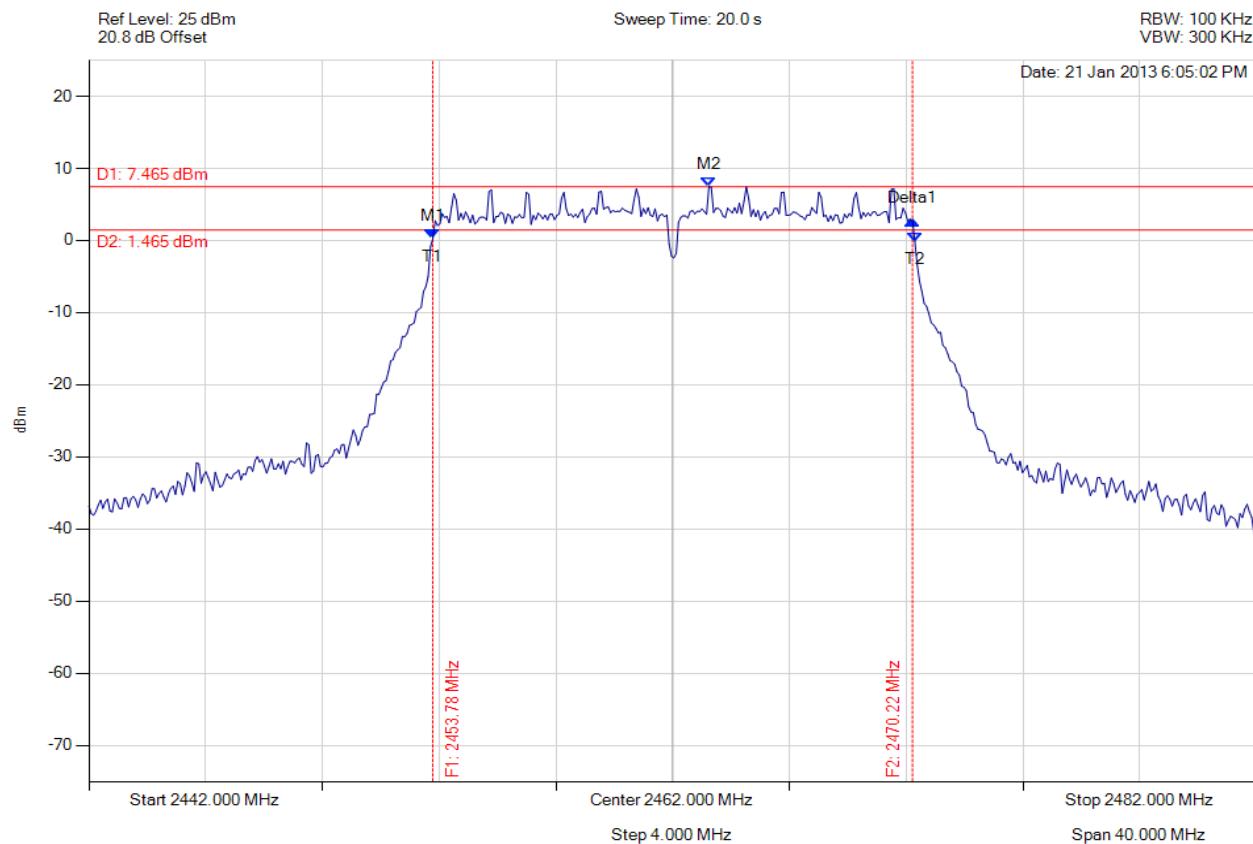


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2453.784 MHz : 0.264 dBm M2 : 2463.242 MHz : 7.465 dBm Delta1 : 16.433 MHz : 2.471 dB T1 : 2453.784 MHz : 0.264 dBm T2 : 2470.297 MHz : -0.137 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

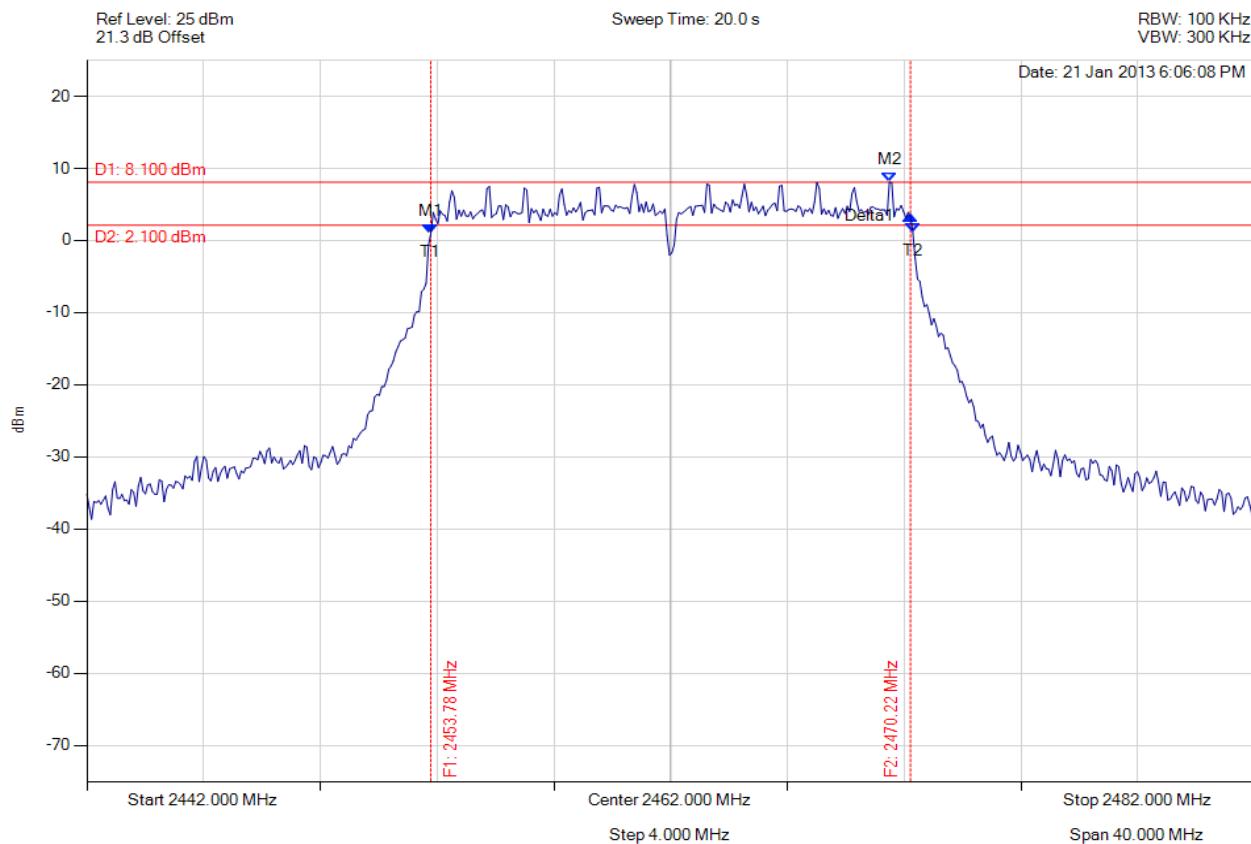


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2453.784 MHz : 0.951 dBm M2 : 2469.495 MHz : 8.100 dBm Delta1 : 16.433 MHz : 2.508 dB T1 : 2453.784 MHz : 0.951 dBm T2 : 2470.297 MHz : 1.061 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

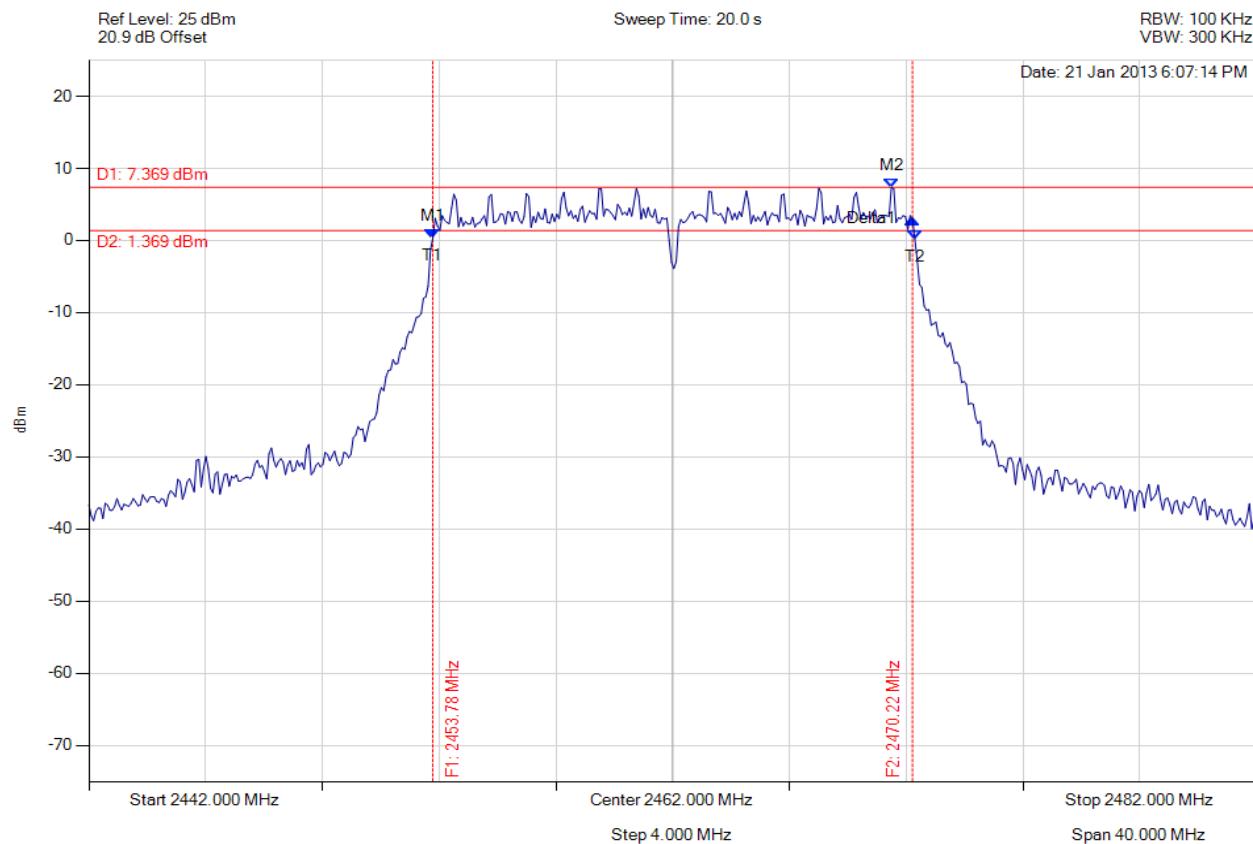


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2453.784 MHz : 0.347 dBm M2 : 2469.495 MHz : 7.369 dBm Delta1 : 16.433 MHz : 2.678 dB T1 : 2453.784 MHz : 0.347 dBm T2 : 2470.297 MHz : 0.188 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

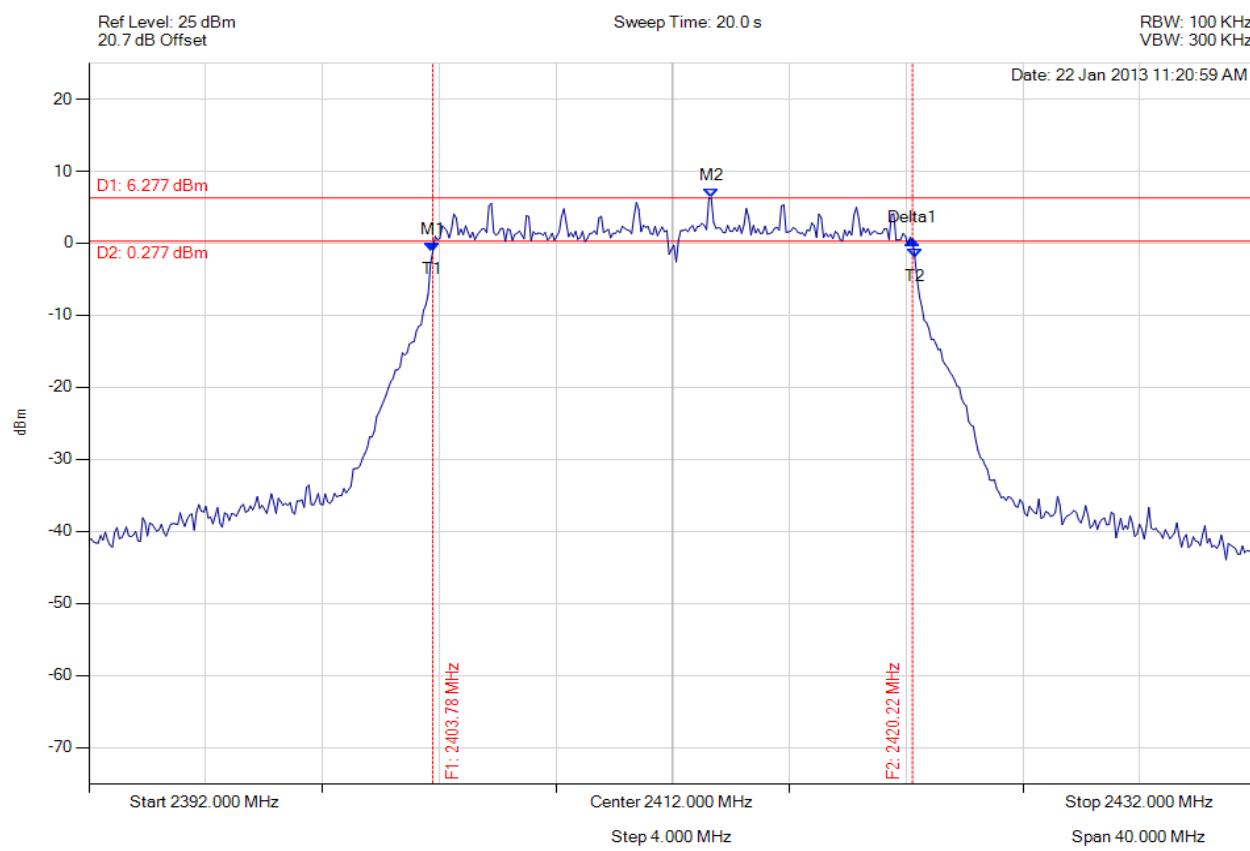


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2403.784 MHz : -1.132 dBm M2 : 2413.323 MHz : 6.277 dBm Delta1 : 16.433 MHz : 1.607 dB T1 : 2403.784 MHz : -1.132 dBm T2 : 2420.297 MHz : -2.039 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.433 MHz Limit: ≥ 0.5 MHz Margin: -15.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

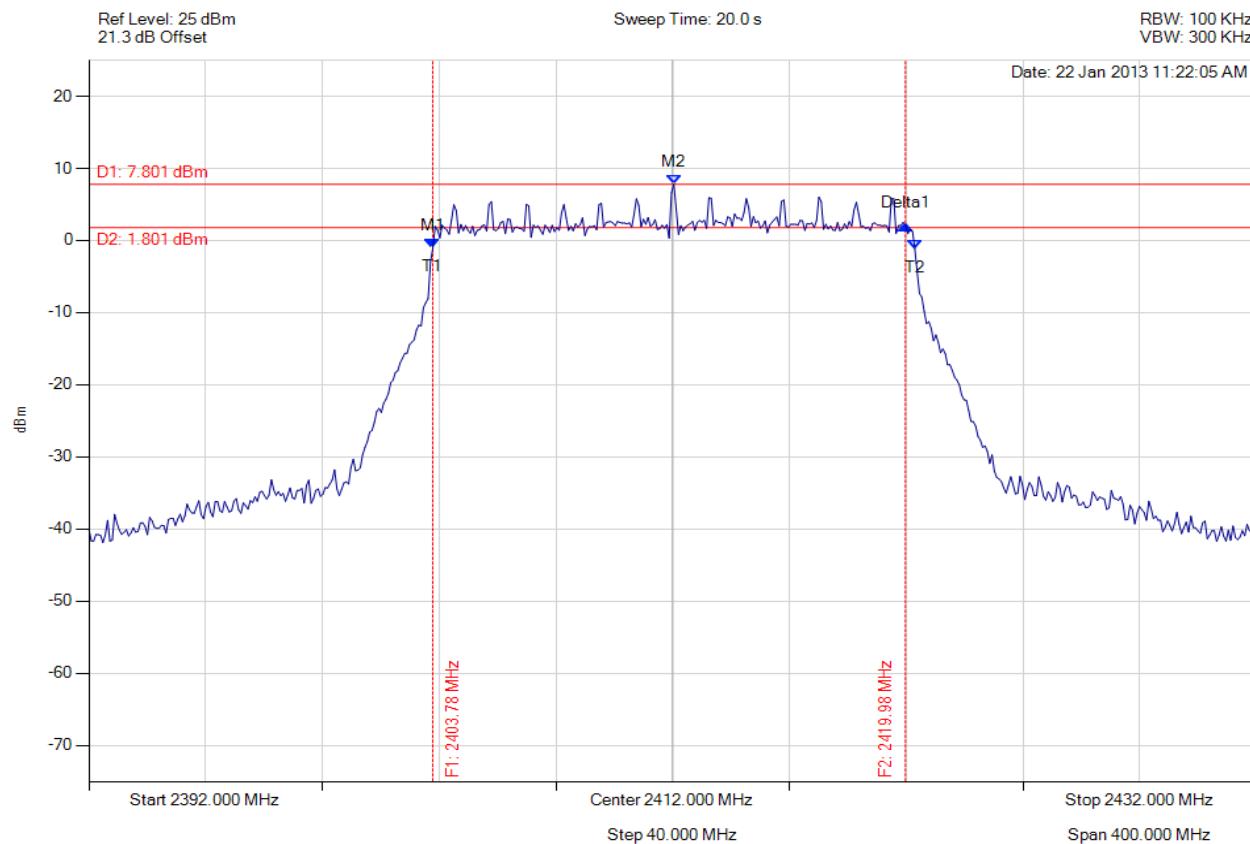

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2403.784 MHz : -1.079 dBm M2 : 2412.040 MHz : 7.801 dBm Delta1 : 16.192 MHz : 3.268 dB T1 : 2403.784 MHz : -1.079 dBm T2 : 2420.297 MHz : -1.176 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.192 MHz Limit: ≥ 0.5 MHz Margin: -15.69 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.