

EMC TEST REPORT For FCC



Test Report No. : 2004090004

Date of Issue : September 2, 2004

FCC ID : QB3CORECESS3221

Model/Type No. : Corecess 3221

Kind of Product : VDSL Modem

Applicant : Corecess Inc.

Applicant Address : 500-2, Sangdaewon-Dong, Jungwon-Ku, Sunghnam-City,
Kyungki-Do, Korea

Manufacturer : Corecess Inc.

Manufacturer Address : 500-2, Sangdaewon-Dong, Jungwon-Ku, Sunghnam-City,
Kyungki-Do, Korea

Contact Person : Young-Jun, Song

Telephone : +82-31-739-6743

Received Date : August 27, 2004

Test period : Start: August 28, 2004 End: August 31, 2004

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

The test results presented in this report relate only to the object tested.


CERTiTEK Standards Laboratory Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Tested by



Young-Joon, Park
EMC Test Engineer
Date: September 2, 2004

Reviewed by



James Hong
EMC Technical Manager
Date: September 2, 2004

REPORT REVISION HISTORY

Date	Revision	Page No
September 2, 2004	Issued (2004090004)	All

This report shall not be reproduced except in full, without the written approval of CERTiTEK Standards Laboratory Co., Ltd. This document may be altered or revised by CERTiTEK Standards Laboratory Co., Ltd. Personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CERTiTEK Standards Laboratory Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description	4
1.1 Model Differences	4
1.2 Device Modifications	4
1.3 EUT Configuration(s)	5
1.4 Test Software	5
1.5 EUT Operating Mode(s)	5
1.6 Calibration Details of Equipment Used for Measurement	6
1.7 Test Facility	6
1.8 Measurement Procedure	6
1.9 Laboratory Accreditations and Listings	7
2.0 Emissions Test Regulations	8
2.1 Conducted Voltage Emissions	9
2.2 Radiated Electric Field Emissions	10
Configurations	11
APPENDIX A - TEST DATA	12
Conducted Voltage Emissions (Quasi-Peak reading)	12
Radiated Electric Field Emissions (Quasi-Peak reading)	14

1.0 General Product Description

1.0.1 Tested Equipment

- ☒ Unless otherwise indicated, all tests were conducted on Model Corecess 3221.
- ☐ Tests performed on Model _____ were considered to be representative of Model(s) _____.

1.0.2 Equipment Size, Mobility and Identification

Dimensions: 160(L) by 160(W) by 35(H) ☒ mm ☐ inch
Mobility: ☐ Hand-Held ☒ Table-top ☐ Floor-standing
Serial No.: Prototype

1.0.3 Electrical Ratings

ADSL Modem
Input: 5Vdc, 1.0A
Output: -

Adapter
Input: 100-240Vac, 50/60Hz, 0.5A
Output: 5Vdc, 2.0A, 10.0W

1.0.4 Test Voltage & Frequency (Using the adaptor)

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 120Vac
Frequency: 60Hz

1.0.5 Clock & Other Frequencies Utilized

25MHz

1.1 Model Differences

Not applicable

1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

☒ Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
Adaptor (for EUT)	OEM	ADS6818-1505-W 0520	-	-
Personal Computer	Hewlett-Packard Company	PD1059P	-	DoC
LCD Monitor	TIANJIN SAMSUNG ELECTRONICS DISPLAY	176T-DZ/KOR	N372HVEX225526	DoC
Adaptor (for LCD Monitor)	Anam Instruments (Shen Zhen) Co., Ltd.	AP04214-UV	-	-
Keyboard (PS/2 type)	COMPAQ	KB-0133	B55680FGA0985M	DoC
Mouse (PS/2 type)	SAMSUNG	OMS3CB	0303009873	DoC
Mouse (USB type)	SAMSUNG	OMS3CB	0303009881	DoC
Mouse (Serial type)	SAMSUNG	BASM1	4476257-20000	DoC
Printer (Parallel type)	Seiko Epson Corp.	Stylus Color 460	BWCE136524	DoC
Telephone(RJ-11 type)	SAMSUNG	-	-	-

☒ Cable Description

#	Description	Ferrite Core	Length (m)	Other Details
1	EUT LAN Cable, Unshielded	No	3.0	Between EUT and PC
2	EUT PHONE Cable, Unshielded	No	3.0	Between EUT and Telephone
3	EUT LINE Cable, Unshielded	No	3.0	Connect to VDSL
4	DC In Cable, Unshielded	No	1.5	Between the EUT and Adaptor (1)
5	Adaptor (1) Power Cable, Unshielded	No	1.8	Connect to AC Power
6	Mouse cable, Shielded	No	1.5	USB type
7	Mouse cable, Shielded	No	2.1	Serial type
8	Mouse cable, Shielded	No	1.5	PS/2 type
9	Keyboard cable, Shielded	No	1.5	PS/2 type
10	Monitor cable, Shielded	Yes	1.5	Between the PC and LCD Monitor
11	DC In Cable, Unshielded	Yes	1.5	Between the LCD Monitor and Adaptor (2)
12	Printer cable, Shielded	No	1.5	Between the PC and Printer
13	Adaptor (2) Power Cable, Unshielded	No	1.5	Connect to AC power
14	AC power cable, Unshielded	No	1.5	Connect to AC power
15	AC power cable, Unshielded	No	1.5	Connect to AC power

1.4 Test Software

☒ Pinging
☐ Not applicable

1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

☐ Test program (H-Pattern) ☐ Test program (color bar)
☐ Standby ☐ Test program (customer specific)
☒ Practice operation

1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested. Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)

Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

* Measurement procedures was In accordance with ANSI C63.4-2001 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2

1.9 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 and 10 meter Open Area Test Sites to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	MIC	EMI (CE, RE) EMS (ESD, Burst, RS, Surge, CS, Power-Frequency Susceptibility, Voltage Dips and Short Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	 NO-119
Europe	GLAS	EMC EN 55011, EN 55022, EN 55024, EN 61326, EN 50130-4, EN 50081-1, EN 50081-2, EN 50082-1, EN 50082-2, EN 61000-6-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61000-3-2, EN 61000-3-3	 No.13000796-02

2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

- | | | |
|--|----------------------------------|---|
| ☐ EN 50081-1:1992 | ☐ Class A | ☐ Class B |
| ☐ EN 61000-6-3:2001 | ☐ Class A | ☐ Class B |
| ☐ EN 50081-2:1993 | ☐ Class A | ☐ Class B |
| ☐ EN 61000-6-4:2001 | ☐ Class A | ☐ Class B |
| ☐ EN 50083-2:2001 | | |
| ☐ EN 55011:1998 +A1:1999 | ☐ Group 1 | ☐ Group 2 |
| | ☐ Class A | ☐ Class B |
| ☐ EN 55013:1990 +A12:1994 +A13:1996 +A14:1999 | | |
| ☐ EN 55013:2001 | | |
| ☐ EN 55014-1:2000 | | |
| ☐ EN 55014-1:2000 +A1:2001 | | |
| ☐ EN 55015:2000 | | |
| ☐ EN 55015:2000 +A1:2001 | | |
| ☐ EN 55022:1994 +A1:1995 +A2:1997 | ☐ Class A | ☐ Class B |
| ☐ EN 55022:1998 | ☐ Class A | ☐ Class B |
| ☐ EN 55022:1998 +A1:2000 | ☐ Class A | ☐ Class B |
| ☐ EN 61000-3-2:1995 +A1:1998 +A2:1998 +A14:2000 | | |
| ☐ EN 61000-3-2:2000 | | |
| ☐ EN 61000-3-3:1995 | | |
| ☐ EN 61000-3-3:1995 +A1:2001 | | |
| ☐ VCCI V-3/2003.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS 3548:1995 +A1:1997 +A2:1997 | ☐ Class A | ☐ Class B |
| ☒ FCC Part 15 Subpart B | ☐ Class A | ☒ Class B |
| ☒ CISPR 22:1997 | ☐ Class A | ☒ Class B |
| The unit was tested to CISPR 22 and complied with the alternate methods allowed by FCC under paragraphs 15.107 and 15.109. | | |
| ☐ CISPR 22:1997 +A1:2000 | ☐ Class A | ☐ Class B |

2.1 Conducted Voltage Emissions

Test Date

August 31, 2004

Test Location

EMI-CE: Shielded Room

Test Instruments

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2004-09-01

Test Accessories

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	LISN	EMCO	3825/2	9409-2246	2004-09-04
☒	LISN	EMCO	3825/2	9607-2574	2004-09-04

Frequency Range of Measurement

- ☒ 150 kHz to 30 MHz
☐ 450 kHz to 30 MHz
☐ _____

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ MET minimum margin is 13.0 dBuV at 4.49 MHz
☐ NOT MET limit exceeded by maximum of ____ dBuV at ____ MHz
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Radiated Electric Field Emissions

Test Date

August 28, 2004

Test Location

☒ EMI-OATS: Testing was performed at a test distance of 10 m

☐ EMI-OATS: Testing was performed at a test distance of 3 m

Test Instruments

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	Field Strength Meter	Rohde & Schwarz	ESVS30	826638/008	2005-04-08

Test Accessories

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
☒	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2005-05-21
☐	Biconical Antenna	EMCO	3110	9202-1510	2005-04-09
☐	Log-periodic Antenna	EMCO	3146	9607-4567	2005-04-06

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results


The requirements are:

- ☒ MET minimum margin is 3.3 dBuV/m at 149.95 MHz
☐ NOT MET limit exceeded by maximum of ____ dBuV/m at ____ MHz
☐ NOT APPLICABLE

Remarks

See Appendix A for test data



Configuration

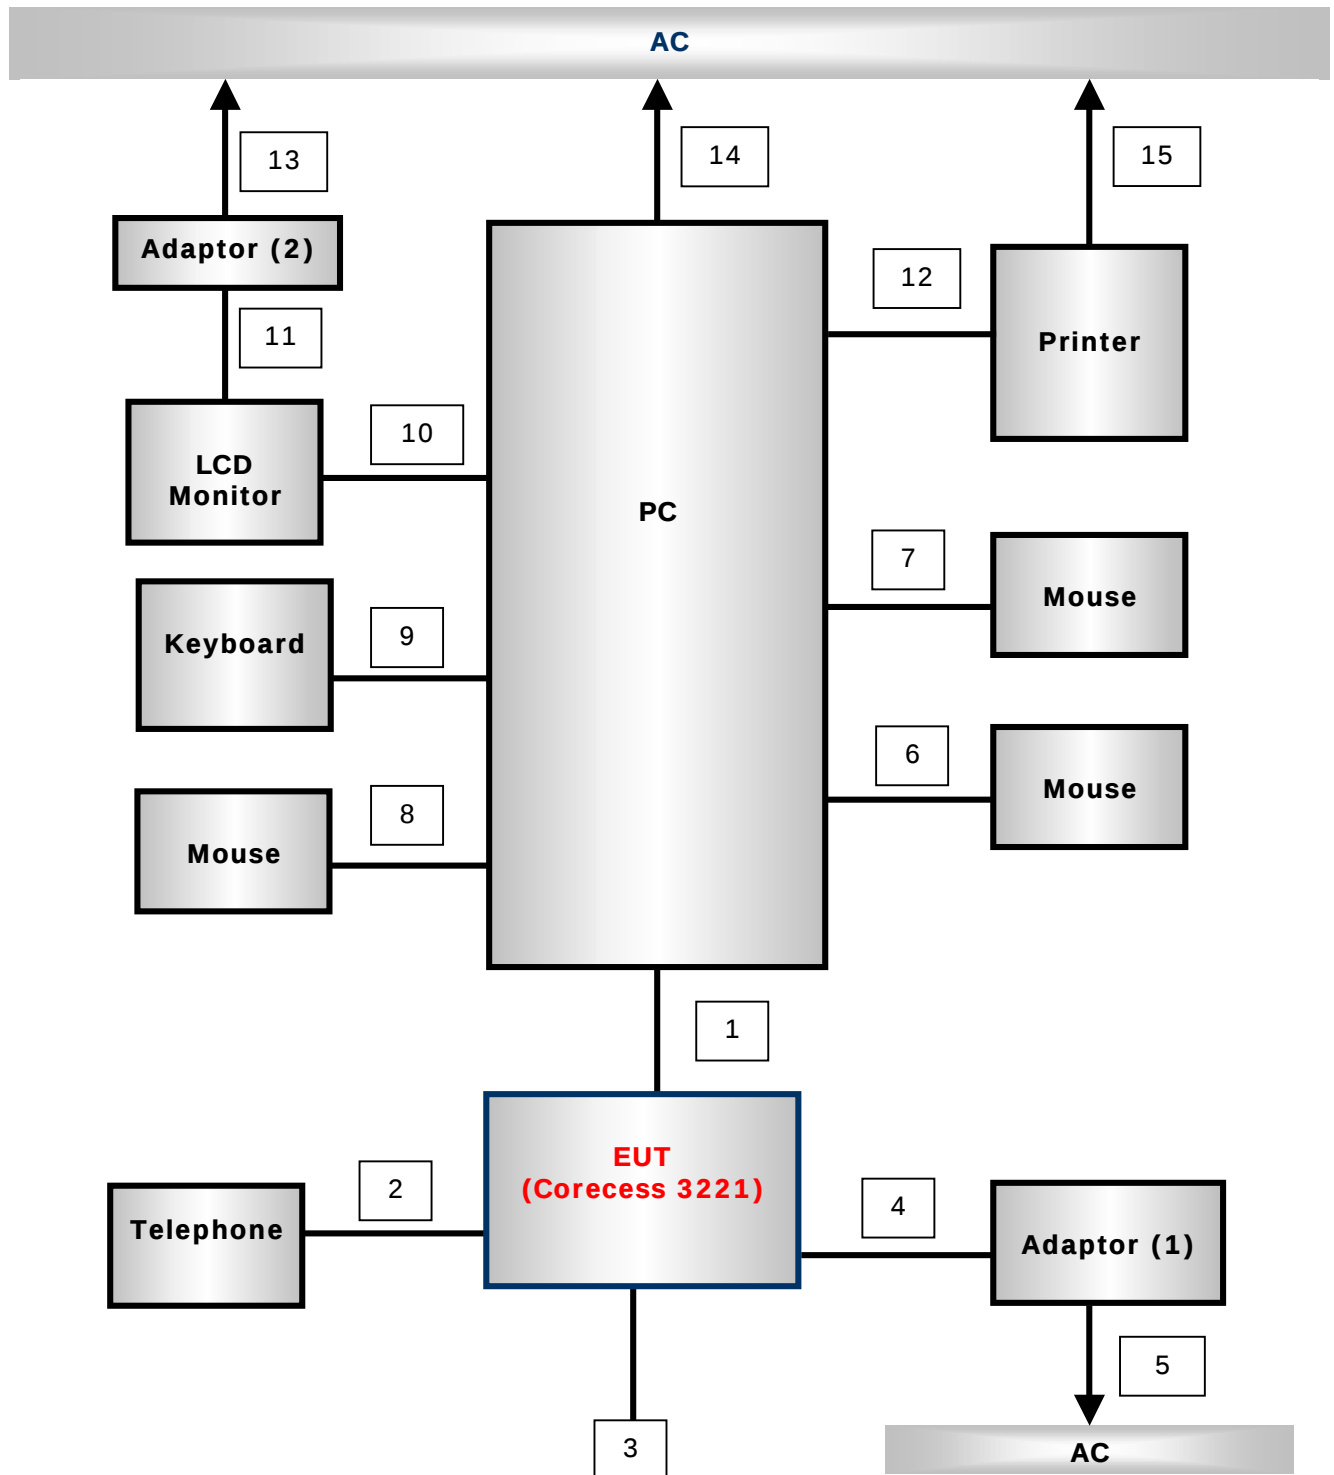

APPENDIX A – TEST DATA

Conducted Voltage Emissions (Quasi-Peak reading)

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]
4.15	0.1	0.2	H	56.0	42.3	42.6	13.4	46.0	28.9	29.2	16.8
4.20	0.1	0.2	H	56.0	42.0	42.3	13.7	46.0	29.3	29.6	16.4
4.26	0.1	0.2	N	56.0	42.0	42.3	13.7	46.0	29.3	29.6	16.4
4.41	0.1	0.2	N	56.0	42.2	42.5	13.5	46.0	29.3	29.6	16.4
4.49	0.1	0.2	H	56.0	42.7	43.0	13.0	46.0	29.3	29.6	16.4
4.63	0.1	0.2	N	56.0	42.1	42.4	13.6	46.0	29.0	29.3	16.7

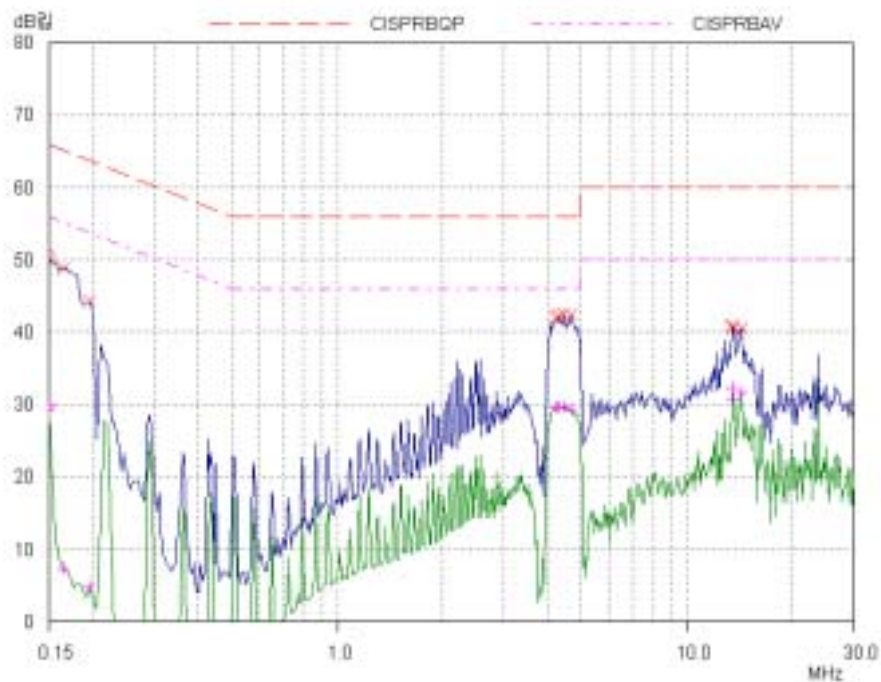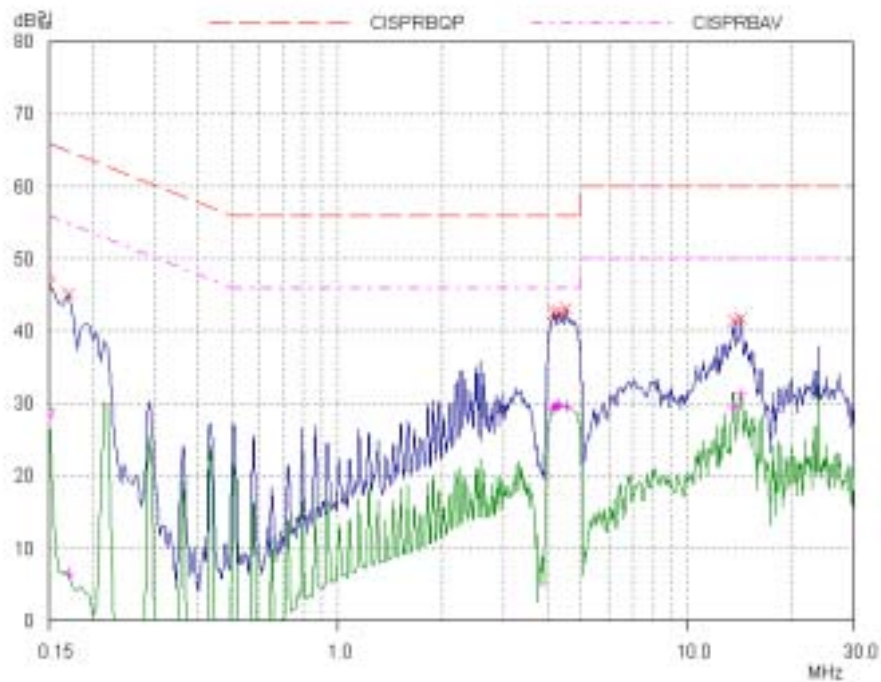

Radiated Electric Field Emissions (Quasi-Peak reading)

Frequency [MHz]	Reading [dBuV / m]	Pol.	Height [m]	Correction Factor		Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
				Antenna	Cable			
46.93	13.2	H	4.0	9.6	1.3	30.0	24.1	5.9
82.81	14.6	V	2.0	8.6	1.7	30.0	24.9	5.1
94.43	15.0	V	1.8	8.9	1.7	30.0	25.6	4.4
149.95	16.8	V	4.0	7.6	2.3	30.0	26.7	3.3
413.86	14.8	H	2.0	13.7	4.0	37.0	32.5	4.5
751.59	9.3	V	1.0	19.0	5.2	37.0	33.5	3.5