

## **FCC EVALUATION REPORT FOR CERTIFICATION**

Manufacturer : SEVIT Co., Ltd.  
126-1, Gongdan-dong, Gumi-City,  
Gyeongsangbuk-Do, Korea  
Attn : Mr. Jae-Min Cho, Director

Date of Issue : February 17, 2004  
Test Report No. : GETEC-E3-04-008  
Test Site : Gumi College EMC Center

FCC ID

**QDBLT-17FMF**

APPLICANT

**SEVIT Co., Ltd.**

Rule Part(s) : FCC Part 15 Subpart B  
Equipment Class : Class B Computing Device Peripheral  
EUT Type : 17" LCD TV/Monitor  
Model No. : LT-17FMF  
Trade name : D'BOSS


This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

  
\_\_\_\_\_  
Jea-Woon Choi, EMC engineer  
GUMI College EMC center

Reviewed by,

  
\_\_\_\_\_  
Tae-Sig Park, Technical manager  
GUMI College EMC center

## CONTENTS

<b>1. SCOPE.....</b>	<b>3</b>
<b>2. INTRODUCTION .....</b>	<b>4</b>
<b>3. TEST CONDITIONS &amp; EUT INFORMATION.....</b>	<b>5</b>
<b>3.1 DESCRIPTION OF EUT.....</b>	<b>5</b>
<b>3.2 SUPPORT EQUIPMENT USED .....</b>	<b>6</b>
<b>4. DESCRIPTION OF TESTS.....</b>	<b>7</b>
<b>4.1 CONDUCTED EMISSION .....</b>	<b>7</b>
<b>4.2 RADIATED EMISSION.....</b>	<b>8</b>
<b>5. CONDUCTED EMISSION.....</b>	<b>9</b>
<b>5.1 OPERATING ENVIRONMENT .....</b>	<b>9</b>
<b>5.2 TEST SET-UP.....</b>	<b>9</b>
<b>5.3 MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
<b>5.4 LIMIT.....</b>	<b>10</b>
<b>5.5 TEST EQUIPMENT USED .....</b>	<b>10</b>
<b>5.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION.....</b>	<b>11</b>
<b>6. RADIATED EMISSION .....</b>	<b>15</b>
<b>6.1 OPERATING ENVIRONMENT .....</b>	<b>15</b>
<b>6.2 TEST SET-UP.....</b>	<b>15</b>
<b>6.3 MEASUREMENT UNCERTAINTY .....</b>	<b>15</b>
<b>6.4 LIMIT .....</b>	<b>16</b>
<b>6.5 TEST EQUIPMENT USED .....</b>	<b>16</b>
<b>6.6 TEST DATA FOR RADIATED EMISSION .....</b>	<b>17</b>
<b>7. ANTENNA POWER CONDUCTION .....</b>	<b>22</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>22</b>
<b>7.2 TEST SET-UP.....</b>	<b>22</b>
<b>7.3 TEST EQUIPMENT USED .....</b>	<b>22</b>
<b>7.4 TEST DATA FOR ANTENNA POWER CONDUCTION .....</b>	<b>23</b>
<b>8. NOISE FIGURE .....</b>	<b>26</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>26</b>
<b>8.2 TEST SET-UP.....</b>	<b>26</b>
<b>8.3 TEST EQUIPMENT USED .....</b>	<b>26</b>
<b>8.4 TEST DATA FOR NOISE FIGURE .....</b>	<b>26</b>
<b>9. SAMPLE CALCULATIONS.....</b>	<b>27</b>
<b>9.1 EXAMPLE 1 :.....</b>	<b>27</b>
<b>9.2 EXAMPLE 2 :.....</b>	<b>27</b>
<b>10. RECOMMENDATION &amp; CONCLUSION.....</b>	<b>28</b>
<b>APPENDIX A – ATTESTATION STATEMENT</b>	
<b>APPENDIX B – PLOTS OF CONDUCTED EMISSIONS</b>	
<b>APPENDIX C – ID SAMPLE LABEL &amp; LOCATION</b>	
<b>APPENDIX D – BLOCK DIAGRAM</b>	
<b>APPENDIX E – TEST SET-UP PHOTOGRAPHS</b>	
<b>APPENDIX F – EXTERNAL PHOTOGRAPHS</b>	
<b>APPENDIX G –INTERNAL PHOTOGRAPHS</b>	
<b>APPENDIX H – USER’S MANUAL</b>	

## 1. Scope

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.*

- **FCC ID** QDBLT-17FMF
- **Rule Part(s)** FCC Part 15 Subpart B
- **Equipment Class** Class B Computing Device Peripheral
- **Manufacturer** SEVIT Co., Ltd.
- **Address** 126-1, Gongdan-Dong, Gumi-city, Gyeongsangbuk-Do, Korea  
Tel No.: +82-54-461-2005
- **EUT Type** 17" LCD TV/Monitor
- **Model No.** LT-17FMF
- **Trade Name** D·BOSS
- **Test Procedure(s)** ANSI C63.4 (1992)
- **Dates of Test** February 09 ~ 12, 2004
- **Place of Test** Gumi College EMC Center
- **Test Report No.** GETET-E3-04-008


## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-1992) was used in determining radiated and conducted emissions emanating from **SEVIT Co., Ltd. 17" LCD TV/Monitor (Model No.: LT-17FMF)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-City, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daejeon city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufacturers. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

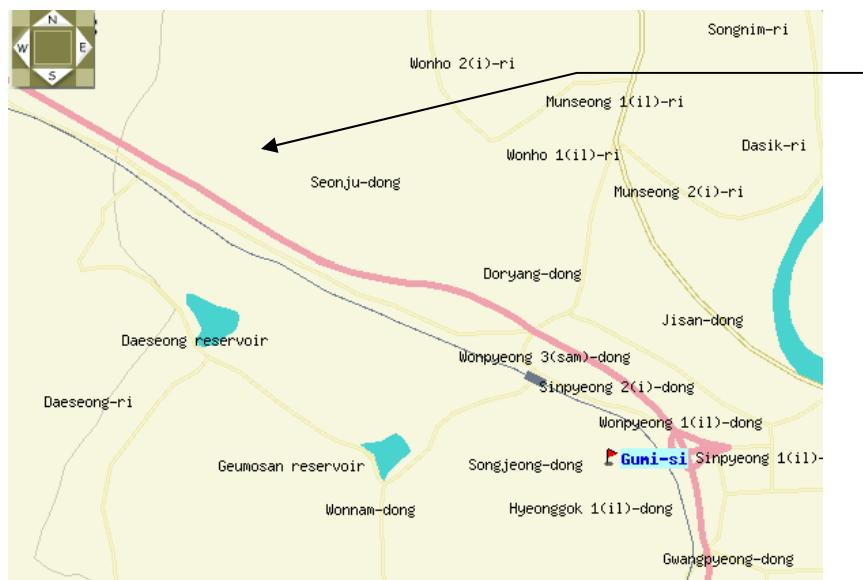

**GUMI COLLEGE EMC CENTER**  
407, Bugok-Dong, Gumi-City,  
Gyeongsangbuk-Do 730-711, Korea  
Tel: +82-54-440-1195  
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.

### 3. Test Conditions & EUT Information

#### 3.1 Description of EUT

The Equipment Under Test (EUT) is the SEVIT Co., Ltd. 17" LCD TV/Monitor (Model No.: LT-17FMF)  
**FCC ID : QDBLT-17FMF**

<b>Maximum Resolution(s)</b>	1280×768 Non-interlaced @ 60Hz
<b>Frequency Range</b>	H- Sync : 31.5kHz ~ 60.2kHz V-Sync : 56Hz ~ 75Hz
<b>Test pattern</b>	PC Mode: Scrolling "H"s, Winamp player TV Mode: Color bar pattern DVD Mode: DVD playing FM Radio frequency: 87.5MHz ~ 108MHz
<b>LCD Panel</b>	LC171W03 (LG Philips LCD)
<b>Power Cord</b>	1.8m Unshielded AC power cord
<b>Port(s) / Input connector(s)</b>	15-Pin D-sub type connector
<b>Cable(s)</b>	1.8m shielded D-sub cable with a ferrite core on it's end 1.8m shielded AC/DC adapter cable with ferrite cores on both ends 1.8m unshielded power cable 1.5m shielded S-VHS cable 1.5m shielded PC sound input cable 1.5m shielded component input cable 1.5m shielded AV input cable 1.5m shielded external sound input cable 2.85m headphone cable 0.65m telescopic ANT cable
<b>AC/DC Adapter</b>	SAD6012SE (SERONICS CO., LTD.) Input: 100~240VAC 50/60Hz, 1.5~0.6A Output: 12.0VDC 5A

**3.2 Support Equipment used**

<b>PC</b>	COMPAQ PD1075 S/N: 7041JC8F0245 FCC ID: DoC	Connected to the EUT and Peripheral equipments
<b>Video card</b>	ATI Radeon VE S/N: 6001833 FCC ID: DoC	Connected to the EUT
<b>Printer</b>	H.P Deskjet 970cxi S/N: MY9B01F1FG FCC ID: DoC	Connected to the parallel port of PC
<b>DVD Player</b>	PIONEER DV525 S/N: UEYD0R390LL FCC ID: DoC	Connected to the EUT
<b>Serial Mouse</b>	Microsoft 61402 S/N: 00696998 FCC ID: C3KKS3	Connected to the serial port of PC
<b>PS/2 Key-board</b>	COMPAQ 166516-AD6 S/N: B13BBOR39I006D FCC ID: AQ6-23K15	Connected to the PS/2 port of PC
<b>Joystick</b>	Microsoft X05-92626 S/N: 9262600296169 FCC ID: DoC	Connected to the USB port of PC
<b>Head phone</b>	GOWOONSORI GW-500M FCC ID: DoC	Connected to the EUT
<b>TV signal generator</b>	FLUKE 54200 S/N: 831011 FCC ID: DoC	Connected to the EUT

*See "Appendix E – Test Setup Photographs" for actual system test set-up*

## 4. Description of tests

### 4.1 Conducted Emission

The Line conducted emission test facility is inside a  $4 \times 8 \times 2.5$  meter shielded enclosure.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9KHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters.

PC: The worst operating condition of the test sample was found out by varying operating mode.

And, the test of 4 modes (1280\*768/60Hz, 1024\*768/75Hz, 800\*600/75Hz, 640\*480/75Hz).

TV: Displaying the color bar pattern by the TV signal generator, the EUT was measured the local oscillator for each channel.

DVD: Displaying live images by DVD player, the EUT was measured.

FM Radio: The volume control of the EUT was adjusted to be 1/8 of the rated audio output power.

All configurations were noted in the test report and the photographs were attached.

Each EME reported was calibrated using the R/S signal generator

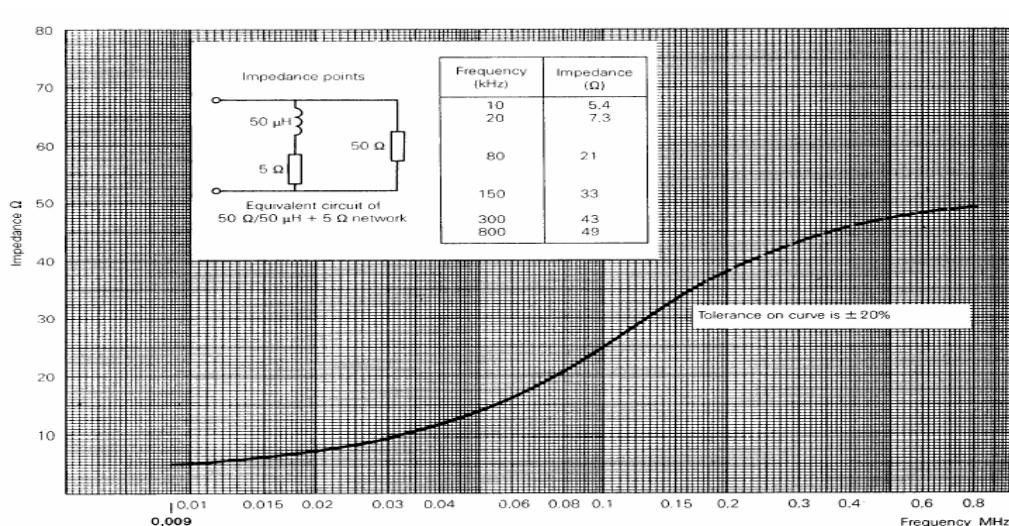


Fig 2. Impedance of LISN

## 4.2 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using bicornical log antenna (Schwarzbeck, VLB9160). Above 1GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 10m-test range using bicornical antenna (R&S, HK116), log-periodic antenna (R&S, HL223) and horn antenna (Schwarzbeck, BBHA9120D)

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

PC: Each emission was maximized by varying the mode of operation or resolution; clock or data exchange speed; scrolling "H" pattern to the EUT and / or support equipment and powering the monitor from mounted outlet box, applicable; which ever determined the worst case emission. The worst-case test mode (1280\*768/60Hz).

TV: Displaying the color bar pattern by the TV signal generator, the EUT was measured the local oscillator for each channel.

DVD: Displaying live images by DVD player, the EUT was measured.

FM Radio: The volume control of the EUT was adjusted to be 1/8 of the rated audio output power.

All configurations were noted in the test report and the photographs were attached.

Each EME reported was calibrated using the R/S signal generator

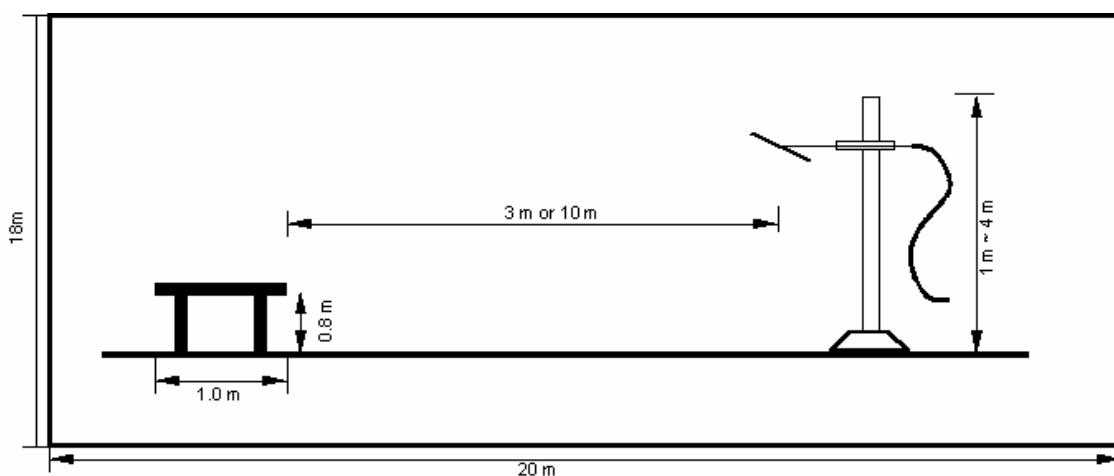


Fig 3. Dimensions of Open Site Test Area

## 5. Conducted Emission

### 5.1 Operating environment

Temperature : 22 °C  
 Relative humidity : 47 %

### 5.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

### 5.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (±dB)	
		Power Port	Communication port
Receiver specification	Rectangular	1.00	1.00
LISN coupling specification	Rectangular	1.50	
ISN coupling specification	Rectangular		1.50
Mismatch			
LISN VRC : $\Gamma_l = 0.20$	U-shaped	0.05	0.05
ISN VRC : $\Gamma_l = 0.20$		-0.05	-0.05
ATT VRC(IN) : $\Gamma_g = 0.03$			
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
Mismatch			
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.09	0.09
ATT VRC : $\Gamma_g = 0.11$		-0.09	-0.09
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
System repeatability	Std Deviation	0.09	0.09
Cable and input attenuator calibration	Normal (k=2)	0.50	0.50
Repeatability of EUT			
Combined standard uncertainty $U_c(y)$	Normal	1.16 -1.16	1.16 -1.16
Extended uncertainty U	Normal (k=2)	2.32 -2.32	2.32 -2.32

**5.4 Limit**

RFI Conducted	CISPR 22 Class B Limits dB ( $\mu$ V/m)	
Freq. Range	CISPR 22 Quasi-Peak	CISPR 22 Average
150kHz – 0.5MHz	66 – 56*	56 – 46*
0.5MHz – 5MHz	56	46
5MHz – 30MHz	60	50

\*Limits decreases linearly with the logarithm of frequency.

**5.5 Test equipment used**

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>	<b>Calibrated Date</b>
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2003
■ - ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 17. 2003
■ - ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 17. 2003
■ - 54200	FLUKE	TV Signal generator	831011	12. 17. 2003

## 5.6 Test data for power line conducted emission

- Test Date : February 11, 2004
- Resolution bandwidth : 9kHz
- Frequency range : 0.15MHz ~ 30MHz

### 5.6.1 PC Mode

- ◆ Test resolution: 1280\*768/60Hz

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.665	H	30.57	56.00	25.43	31.37	46.00	14.63
1.065	H	31.49	56.00	24.51	31.39	46.00	14.61
1.665	H	32.41	56.00	23.59	32.01	46.00	13.99
2.26	H	32.83	56.00	23.17	31.93	46.00	14.07
2.86	H	33.66	56.00	22.34	32.66	46.00	13.34
3.845	N	34.02	56.00	21.98	33.52	46.00	12.48
6.43	N	37.56	60.00	22.44	37.26	50.00	12.74
6.925	H	35.23	60.00	24.77	35.93	50.00	14.07

- ◆ Test resolution: 1024\*768/75Hz

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.481	H	33.34	56.32	22.99	30.04	46.32	12.29
0.689	H	33.37	56.00	22.63	32.97	46.00	13.03
0.826	H	33.77	56.00	22.23	33.87	46.00	12.13
1.034	H	33.99	56.00	22.01	34.09	46.00	11.91
1.443	H	34.20	56.00	21.80	32.40	46.00	13.60
1.859	H	34.32	56.00	21.68	32.52	46.00	13.48
2.821	N	35.57	56.00	20.43	34.57	46.00	11.43
3.025	N	36.82	56.00	19.18	35.62	46.00	10.38
3.713	N	37.32	56.00	18.68	36.12	46.00	9.88
4.219	N	36.07	56.00	19.93	31.27	46.00	14.73
6.676	N	39.06	60.00	20.94	36.36	50.00	13.64
15.431	N	41.18	60.00	18.82	38.48	50.00	11.52

◆ Test resolution: 800\*600/75Hz

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.481	H	32.84	56.32	23.49	33.64	46.32	12.69
0.69	H	33.87	56.00	22.13	34.67	46.00	11.33
0.897	N	31.93	56.00	24.07	32.73	46.00	13.27
2.828	N	36.37	56.00	19.63	35.17	46.00	10.83
3.588	N	37.52	56.00	18.48	36.72	46.00	9.28
4.125	N	36.77	56.00	19.23	35.97	46.00	10.03
6.559	N	39.56	60.00	20.44	39.46	50.00	10.54
15.184	N	39.45	60.00	20.55	36.75	50.00	13.25
15.808	N	39.52	60.00	20.48	36.92	50.00	13.08

◆ Test resolution: 640\*480/75Hz

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.481	H	32.94	56.32	23.39	33.84	46.32	12.49
0.689	H	33.77	56.00	22.23	34.57	46.00	11.43
0.897	H	33.88	56.00	22.12	34.68	46.00	11.32
1.521	H	34.21	56.00	21.79	34.41	46.00	11.59
2.139	N	35.58	56.00	20.42	34.58	46.00	11.42
2.899	N	36.77	56.00	19.23	35.27	46.00	10.73
3.796	N	37.62	56.00	18.38	37.02	46.00	8.98
4.141	N	36.97	56.00	19.03	36.57	46.00	9.43
6.63	N	39.36	60.00	20.64	39.56	50.00	10.44
6.767	H	39.02	60.00	20.98	38.52	50.00	11.48
15.36	N	38.97	60.00	21.03	39.37	50.00	10.63

**5.6.2 TV Mode**

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.481	H	33.54	56.32	22.79	34.34	46.32	11.99
0.553	H	32.97	56.00	23.03	32.47	46.00	13.53
0.689	H	34.07	56.00	21.93	34.97	46.00	11.03
0.897	H	34.18	56.00	21.82	34.98	46.00	11.02
1.515	N	34.13	56.00	21.87	34.43	46.00	11.57
2.068	N	35.28	56.00	20.72	33.68	46.00	12.32
2.893	N	36.97	56.00	19.03	35.47	46.00	10.53
3.517	H	36.09	56.00	19.91	33.69	46.00	12.31
4.141	H	36.71	56.00	19.29	35.41	46.00	10.59
6.682	N	39.86	60.00	20.14	39.76	50.00	10.24
11.024	N	36.24	60.00	23.76	33.94	50.00	16.06

**5.6.3 DVD Mode**

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.481	H	33.24	56.32	23.09	34.04	46.32	12.29
0.689	H	33.57	56.00	22.43	34.37	46.00	11.63
0.897	H	33.58	56.00	22.42	34.38	46.00	11.62
1.307	N	32.74	56.00	23.26	33.24	46.00	12.76
1.515	H	34.51	56.00	21.49	34.81	46.00	11.19
2.75	N	35.87	56.00	20.13	35.17	46.00	10.83
3.783	N	37.42	56.00	18.58	36.82	46.00	9.18
4.128	N	36.97	56.00	19.03	36.27	46.00	9.73
6.676	N	39.46	60.00	20.54	39.36	50.00	10.64
15.288	N	39.26	60.00	20.74	38.26	50.00	11.74
15.834	N	39.52	60.00	20.48	37.32	50.00	12.68

**5.6. FM Radio Mode**

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.482	H	32.74	56.30	23.57	33.64	46.30	12.67
0.689	H	33.67	56.00	22.33	34.47	46.00	11.53
0.897	H	33.98	56.00	22.02	34.78	46.00	11.22
1.314	N	32.94	56.00	23.06	33.54	46.00	12.46
1.521	H	34.01	56.00	21.99	34.41	46.00	11.59
2.899	H	35.76	56.00	20.24	33.96	46.00	12.04
4.004	N	37.27	56.00	18.73	36.57	46.00	9.43
4.121	N	37.07	56.00	18.93	36.57	46.00	9.43
6.702	N	38.96	60.00	21.04	38.96	50.00	11.04

## 6. Radiated Emission

### 6.1 Operating environment

Temperature : 23 °C  
 Relative humidity : 24 %

### 6.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber and found frequency for open area test site.

The formal radiated emission was measured at 3m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	1.00	1.00	1.00	1.00
Receiver specification	Rectangular	1.00	1.00	1.00	1.00
Antenna directivity	Rectangular	0.50	0.00	3.00	0.50
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	2.83	-2.94	-1.96	-2.96
Mismatch					
Receiver VRC : $\Gamma_l = 0.09$	U-shaped	0.33	0.33	0.33	0.33
Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)		-0.35	-0.35	-0.18	-0.18
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$					
System repeatability	Std Deviation	0.07	0.05	0.06	0.10
Cable loss calibration	Normal (k=2)	0.20	0.20	0.20	0.20
Combined standard uncertainty $U_c(y)$	Normal	1.88 -1.88	1.90 -1.90	2.33 -2.32	1.94 -1.93
Extended uncertainty U	Normal (k=2)	3.77 -3.77	3.80 -3.80	4.65 -4.63	3.87 -3.85

**6.4 Limit**

Frequency (MHz)	FCC Limit @ 3m. Quasi-Peak dB ( $\mu$ V/m)	FCC Limit @ 10m. Quasi-Peak dB ( $\mu$ V/m)	CISPR Limit @ 10m. Quasi-Peak dB ( $\mu$ V/m)
30 – 88	40.0	29.5	30.0
88 – 216	43.5	33.0	30.0
216 – 230	46.0	35.6	30.0
230 – 960	46.0	35.6	37.0
960 – 1000	54.0	43.5	37.0
> 1000	54.0	43.5	No Specified limit

\*Limit extrapolated 20dB / decade

**6.5 Test equipment used**

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>	<b>Calibrated Date</b>
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2003
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2003
■ - HK116	Rohde & Schwarz	Biconical antenna	826861/018	11. 21. 2003
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 21. 2003
■ - BBHA9120D	Schwarzbeck	horn antenna	207	11. 21. 2003
■ - 8449B	Agilent	Pre-Amplifier	3008A01828	NCR
■ - 54200	FLUKE	TV Signal generator	831011	12. 17. 2003
■ - HD100	HD GmbH	Position Controller	100/692/01	NCR
■ - DS415S	HD GmbH	Turntable	415/657/01	NCR
■ - MA240	HD GmbH	Antenna Mast	240/565/01	NCR

## 6.6 Test data for radiated emission


- Test Date : February 12, 2004
- Resolution bandwidth : 120kHz / 1MHz
- Frequency range : 30MHz ~ 5000MHz
- Detector mode : 30MHz ~ 1000MHz : Quasi-peak detector mode  
1000MHz ~ 5000MHz : Average detector mode

### 6.6.1 PC Mode

◆ Test resolution: 1280\*768/60Hz

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
110.94	20.4	V	9.18	2.81	32.4	43.5	11.1
132.72	20.9	V	10.65	3.18	34.7	43.5	8.8
152.28	18.2	V	11.85	3.48	33.5	43.5	10.0
174	21	H	13.19	3.61	37.8	43.5	5.7
217.51	16.2	H	15.24	4.41	35.9	46.0	10.1
282.78	14.9	H	17.74	5.10	37.7	46.0	8.3
442.32	18.4	V	16.92	6.31	41.6	46.0	4.4
516.06	12.4	H	17.95	6.73	37.1	46.0	8.9
663.48	8.4	H	19.48	7.62	35.5	46.0	10.5
737.22	7.7	H	20.18	8.12	36.0	46.0	10.0
810.92	12.7	V	20.56	8.57	41.8	46.0	4.2
958.38	2.8	V	22.64	9.51	34.9	46.0	11.1

Note: "H": Horizontal, "V": Vertical

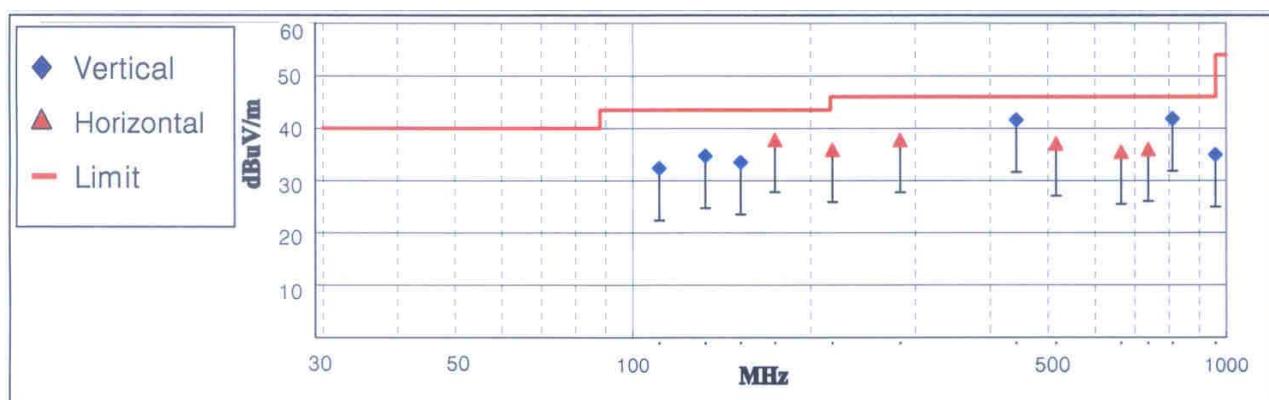

< Fig 5. Radiated emission result>

### 6.6.2 TV Mode

- ♦ Radiated Emission due to the local oscillator  
Fundamental frequency

Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
2(55.25)	1	101.0	-	43.5	<<
3(61.25)	1	107.0	-	43.5	<<
4(67.25)	1	113.0	-	43.5	<<
5(77.25)	1	123.0	-	43.5	<<
6(83.25)	1	129.0	-	43.5	<<
7(175.25)	1	221.0	-	46.0	<<
8(181.25)	1	227.0	-	46.0	<<
9(187.25)	1	233.0	-	46.0	<<
10(193.25)	1	239.0	-	46.0	<<
11(199.25)	1	245.0	-	46.0	<<
12(205.25)	1	251.0	-	46.0	<<
13(211.25)	1	257.0	-	46.0	<<
14(471.25)	1	517.0	-	46.0	<<
19(501.25)	1	547.0	-	46.0	<<
24(531.25)	1	577.0	-	46.0	<<
29(561.25)	1	607.0	-	46.0	<<
34(591.25)	1	637.0	-	46.0	<<
39(621.25)	1	667.0	-	46.0	<<
44(651.25)	1	697.0	-	46.0	<<
49(681.25)	1	727.0	-	46.0	<<
54(711.25)	1	757.0	-	46.0	<<
59(741.25)	1	787.0	-	46.0	<<
64(771.25)	1	817.0	-	46.0	<<
69(801.25)	1	847.0	-	46.0	<<

“<<” : The margin is more than 30dB

♦ Radiated Emission due to the local oscillator

Harmonic frequency

Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
All Channel	-	-	-	-	<<

“<<” : The margin is more than 30dB


♦ Radiated Emission due to the other source than local oscillator

Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
3(55.25)	--	38.94	32.54	40.0	7.46
		45.23	31.06	40.0	8.94
		97.97	33.68	43.5	9.82
		156.00	32.97	43.5	10.53
		175.09	36.6	43.5	6.9
		188.17	32.04	43.5	11.46
		524.88	30.98	46.0	15.02
		527.76	30.68	46.0	15.32
		529.33	30.42	46.0	15.58
		782.12	37.33	46.0	8.67
		853.98	35.07	46.0	18.48

## 6.6.3 DVD Mode

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
96.53	18.4	H	9.17	2.75	30.3	43.5	13.2
98.39	13.9	H	9.33	2.78	26.0	43.5	17.5
116.58	16	V	10.70	3.05	29.7	43.5	13.8
136.73	15.2	V	11.61	3.18	30.0	43.5	13.5
141.94	15.7	V	11.82	3.22	30.7	43.5	12.8
187.38	14	V	13.44	3.67	31.1	43.5	12.4
466.09	18.6	V	16.78	5.93	41.3	46.0	4.7
468.67	15.3	V	16.78	5.95	38.0	46.0	8.0
776.82	7.6	V	20.39	7.76	35.8	46.0	10.2
781.69	5.2	V	20.51	7.79	33.5	46.0	12.5
871.83	2.6	H	22.03	8.33	33.0	46.0	13.0
879.54	6.8	H	22.06	8.38	37.2	46.0	8.8

Note: "H": Horizontal, "V": Vertical

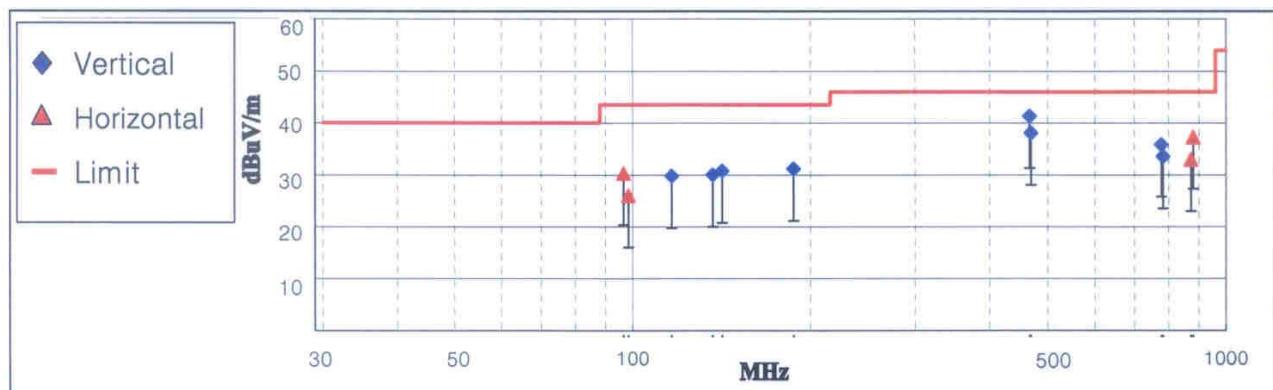

< Fig 6. Radiated emission result >

**6.6.4 FM Radio Mode**

Disturbance radiation due to the local oscillator

Ch. No. (CH Freq.)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
89.7MHz	1	100.4	-	43.5	<<
	2	200.8	-	43.5	<<
	3	301.2	-	46.0	<<
	4	401.6	-	46.0	<<
	5	502	-	46.0	<<
	6	602.4	-	46.0	<<
	7	702.8	-	46.0	<<
	8	803.2	-	46.0	<<
	9	903.6	-	46.0	<<
99.3MHz	1	110	-	43.5	<<
	2	220	-	46.0	<<
	3	330	-	46.0	<<
	4	440	-	46.0	<<
	5	550	-	46.0	<<
	6	660	-	46.0	<<
	7	770	-	46.0	<<
	8	880	-	46.0	<<
	9	990	-	46.0	<<
103.1MHz	1	113.8	-	43.5	<<
	2	227.6	-	46.0	<<
	3	341.4	-	46.0	<<
	4	455.2	-	46.0	<<
	5	569	-	46.0	<<
	6	682.8	-	46.0	<<
	7	796.6	-	46.0	<<
	9	910.4	-	46.0	<<
	-	156.48	31.61	43.5	11.89
Other Frequency	-	465.72	38.9	46.0	7.1
	-	468.98	38.02	46.0	7.98
	-	470.19	36.66	46.0	9.34
	-	776.12	36.39	46.0	9.61
	-	863.03	34.01	46.0	11.99
	-	872.21	32.73	46.0	13.27

## 7. Antenna power conduction

### 7.1 Operating environment

Temperature : 23 °C  
Relative humidity : 24 %

### 7.2 Test set-up

The Antenna power conduction measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2003
■ - 11852B	Hewlett-Packard	MIN LOSS PAD	03313	NCR

#### 7.4 Test data for Antenna power conduction

- Test Date : February 12, 2004
- Resolution bandwidth : 120kHz
- Frequency range : 30MHz ~ 2000MHz

- ◆ Antenna power conduction due to the local oscillator
- Fundamental frequency

Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
2(55.25)	1	101.0	-	50.0	<<
3(61.25)	1	107.0	-	50.0	<<
4(67.25)	1	113.0	-	50.0	<<
5(77.25)	1	123.0	-	50.0	<<
6(83.25)	1	129.0	-	50.0	<<
7(175.25)	1	221.0	-	50.0	<<
8(181.25)	1	227.0	-	50.0	<<
9(187.25)	1	233.0	-	50.0	<<
10(193.25)	1	239.0	-	50.0	<<
11(199.25)	1	245.0	-	50.0	<<
12(205.25)	1	251.0	-	50.0	<<
13(211.25)	1	257.0	-	50.0	<<
14(471.25)	1	517.0	-	50.0	<<
19(501.25)	1	547.0	-	50.0	<<
24(531.25)	1	577.0	-	50.0	<<
29(561.25)	1	607.0	-	50.0	<<
34(591.25)	1	637.0	-	50.0	<<
39(621.25)	1	667.0	-	50.0	<<
44(651.25)	1	697.0	-	50.0	<<
49(681.25)	1	727.0	-	50.0	<<
54(711.25)	1	757.0	-	50.0	<<
59(741.25)	1	787.0	-	50.0	<<
64(771.25)	1	817.0	41.7	50.0	8.3
74(831.25)	1	877.0	40.5	50.0	9.5
79(861.25)	1	907.0	41.0	50.0	9.0

“<<” : The margin is more than 30dB

♦ Antenna power conduction due to the local oscillator  
 Harmonic frequency

Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
2(55.25)	16	1616.0	22.1	50.0	27.9
3(61.25)	16	1712.0	26.1	50.0	23.9
4(67.25)	14	1582.0	28.5	50.0	21.5
5(77.25)	14	1722.0	26.1	50.0	23.9
6(83.25)	12	1548.0	24.9	50.0	25.1
7(175.25)	8	1768.0	28.3	50.0	21.7
8(181.25)	8	1816.0	24.3	50.0	25.7
9(187.25)	8	1864.0	27.0	50.0	23.0
10(193.25)	6	1434.0	29.6	50.0	20.4
11(199.25)	8	1960.0	31.4	50.0	18.6
12(205.25)	4	1004.0	30.5	50.0	19.5
13(211.25)	6	1542.0	31.7	50.0	18.3
14(471.25)	2	1034.0	33.5	50.0	16.5
19(501.25)	3	1641.0	35.2	50.0	14.8
24(531.25)	3	1731.0	39.2	50.0	10.8
29(561.25)	3	1821.0	44.1	50.0	5.9
31(573.25)	3	1857.0	44.7	50.0	5.3
32(579.25)	3	1875.0	44.8	50.0	5.2
33(585.25)	3	1893.0	45.2	50.0	4.8
34(591.25)	3	1911.0	46.5	50.0	3.5
44(651.25)	2	1394.0	34.3	50.0	15.7
49(681.25)	2	1454.0	38.6	50.0	11.4
54(711.25)	2	1598.0	38.5	50.0	11.5
59(741.25)	2	1574.0	41.9	50.0	8.1
69(801.25)	2	1694.0	46.1	50.0	3.9

## ♦ Antenna power conduction due to the local oscillator

Channel NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
1	73.25	1	119.0	-	50.0	<<
14	121.25	1	167.0	-	50.0	<<
24	223.25	1	269.0	-	50.0	<<
34	283.25	1	329.0	-	50.0	<<
44	343.25	1	389.0	-	50.0	<<
50	379.25	1	425.0	-	50.0	<<
51	385.25	1	431.0	-	50.0	<<
55	409.25	1	455.0	-	50.0	<<
56	415.25	1	461.0	-	50.0	<<
57	421.25	1	467.0	-	50.0	<<
58	427.25	1	473.0	-	50.0	<<
59	433.25	1	479.0	-	50.0	<<
60	439.25	1	485.0	-	50.0	<<
64	463.25	1	509.0	-	50.0	<<
74	523.25	1	569.0	-	50.0	<<
84	583.25	1	629.0	-	50.0	<<
94	643.25	1	689.0	-	50.0	<<
105	679.25	1	725.0	-	50.0	<<
115	739.25	1	785.0	-	50.0	<<
125	799.25	1	845.0	-	50.0	<<

“&lt;&lt;” : The margin is more than 30dB

## ♦ Harmonic Frequency

Channel NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
24	223.25	6	1614.0	32.4	50.0	17.6
34	283.25	4	1316.0	33.5	50.0	16.5
44	343.25	5	1945.0	35.8	50.0	14.2
50	379.25	4	1700.0	46.7	50.0	3.3
51	385.25	4	1724.0	43.6	50.0	6.4
55	409.25	4	1820.0	41.4	50.0	8.6
56	415.25	4	1844.0	40.3	50.0	9.7

## ♦ Antenna power conduction due to other source than the local oscillator

Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
All Channel	-	-	-	50	<<

## 8. Noise Figure

### 8.1 Operating environment

Temperature : 26°C  
 Relative humidity : 47 %

### 8.2 Test set-up

The Noise Figure measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - N8973A	HewlettPackard	Noise Figure Analyzer	GB42151318	02.26.2003
■ - N4000A	HewlettPackard	Noise Source	US41120227	10.18.2002
■ - 11852B	HewlettPackard	MIN LOSS PAD	03313	NCR
■ - 11852B	HewlettPackard	MIN LOSS PAD	03309	NCR

### 8.4 Test data for Noise Figure

- Test Date : February 12, 2004  
 - Test Channel : 2 ~ 69CH

VHF				UHF			
Ch.No.	Ch. Freq. (MHz)	Noise Figure (dB)	Limit (dB)	Ch.No.	Ch. Freq. (MHz)	Noise Figure (dB)	Limit (dB)
2	55.25	8.5	14.0	14	471.25	7.6	14.0
3	61.25	8.2		19	501.25	7.5	
4	67.25	7.7		24	531.25	7.7	
5	73.25	7.9		29	561.25	8.0	
6	79.25	7.6		34	591.25	8.5	
7	85.25	7.9		39	621.25	9.0	
8	91.25	7.9		44	651.25	9.2	
9	97.25	7.9		49	681.25	9.1	
10	103.25	8.0		54	711.25	9.1	
11	109.25	7.9		59	741.25	9.2	
12	115.25	8.0		64	771.25	9.2	
13	211.25	8.1		69	801.25	9.4	

## 9. Sample Calculations

$$\text{dB}\mu\text{V} = 20 \log_{10}(\mu\text{V}/\text{m})$$

$$\text{dB}\mu\text{V} = \text{dBm} + 107$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

### 9.1 Example 1 :

#### ■ 20.3 MHz

Class B Limit	=	250 $\mu\text{V}$	=	48 $\text{dB}\mu\text{V}$
Reading	=	- 67.8 dBm(Calibrated level)		
Convert to $\text{dB}\mu\text{V}$	=	- 67.8 dBm + 107 = 39.2 $\text{dB}\mu\text{V}$		
$10^{(39.2\text{dB}\mu\text{V}/20)}$	=	91.2 $\mu\text{V}$		
Margin	=	39.2 - 48 = -8.8		
	=	8.8 dB below Limit		

### 9.2 Example 2 :

#### ■ 66.7 MHz

Class B Limit	=	100 $\mu\text{V}/\text{m}$	=	40.0 $\text{dB}\mu\text{V}/\text{m}$
Reading	=	- 76.0 dBm(Calibrated level)		
Convert to $\text{dB}\mu\text{V}/\text{m}$	=	- 76.0 dBm + 107 = 31.0 $\text{dB}\mu\text{V}/\text{m}$		
Antenna Factor + Cable Loss	=	5.8 dB		
	Total	=	36.8 $\text{dB}\mu\text{V}/\text{m}$	
Margin	=	36.8 - 40.0 = -3.2		
	=	3.2 dB below Limit		

## 10. Recommendation & conclusion

The data collected shows that the **SEVIT Co., Ltd. 17" LCD TV/Monitor (Model No.: LT-17FMF)** was complies with §15.107, §15.109, §15.111, and §15.117 of the FCC Rules.