



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

BROADCOM 54g WLAN MINI PCI CARD

MODEL NUMBER: BCM94306MP

FCC ID: QDS-BRCM1005-D

REPORT NUMBER: 03U1965-1

ISSUE DATE: 6/12/2003

Prepared for
BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086 USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. TEST RESULT CERTIFICATION | 3 |
| 2. DESCRIPTION OF CLASS II CHANGE | 4 |
| 3. TEST METHODOLOGY | 5 |
| 4. FACILITIES AND ACCREDITATION..... | 5 |
| 4.1. <i>FACILITIES AND EQUIPMENT</i> | 5 |
| 4.2. <i>TABLE OF ACCREDITATIONS AND LISTINGS.....</i> | 6 |
| 5. CALIBRATION AND UNCERTAINTY | 7 |
| 5.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | 7 |
| 5.2. <i>MEASUREMENT UNCERTAINTY</i> | 7 |
| 5.3. <i>TEST AND MEASUREMENT EQUIPMENT</i> | 8 |
| 6. SETUP OF EQUIPMENT UNDER TEST..... | 9 |
| 7. APPLICABLE LIMITS AND TEST RESULTS..... | 11 |
| 7.1. <i>RADIATED EMISSIONS.....</i> | 11 |
| 7.2. <i>POWERLINE CONDUCTED EMISSIONS.....</i> | 24 |
| 8. SETUP PHOTOS..... | 27 |

1. TEST RESULT CERTIFICATION

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE CA 94086 USA

EUT DESCRIPTION: BROADCOM 54g WLAN MINI PCI CARD

MODEL: BCM94306MP

DATE TESTED: JUNE 6, 2003

| APPLICABLE STANDARDS | |
|-----------------------|-------------------------|
| STANDARD | TEST RESULTS |
| FCC PART 15 SUBPART C | NO NON-COMPLIANCE NOTED |

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



MIKE HECKROTTE
CHIEF ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



YAN ZHENG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. DESCRIPTION OF CLASS II CHANGE

The EUT is an 802.11g WLAN operating in the 2400 – 2483.5 MHz band with a peak output power of 25.55 dBm (359 mW). The changes are as follows:

Add a new host computer and add two new monopole type blade antennas.

The host computer is a Dell model PP04S.

The Wistron antenna has a peak gain of 1.22 dBi and the Hitachi antenna has a peak gain of 1.7 dBi. Testing was performed on the worst-case, highest gain antenna due to same type of antennas.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.


4. FACILITIES AND ACCREDITATION

4.1. FACILITIES AND EQUIPMENT

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2. TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|---|---|
| USA | FCC | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements |  1300 |
| Japan | VCCI | CISPR 22 Two OATS and one conducted Site |  VCCI R-1014, R-619, C-640 |
| Norway | NEMKO | EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1 |  ELA 117 |
| Norway | NEMKO | EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC |  ELA-171 |
| Taiwan | BSMI | CNS 13438 |  SL2-IN-E-1012 |
| Canada | Industry Canada | RSS210 Low Power Transmitter and Receiver |  IC2324 A,B,C, and F |

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measurement instruments utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations, and are traceable to national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| | |
|-------------------------------------|----------------|
| Radiated Emission, 30 to 200 MHz | +/- 3.3 dB |
| Radiated Emission, 200 to 1000 MHz | +4.5 / -2.9 dB |
| Radiated Emission, 1000 to 2000 MHz | +4.5 / -2.9 dB |
| Power Line Conducted Emission | +/- 2.9 dB |

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST AND MEASUREMENT EQUIPMENT LIST | | | | |
|-------------------------------------|--------------|------------------|---------------|----------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due Date |
| Bilog Antenna | AR | LPB-25201A | 1185 | 3/28/2004 |
| EMI Receiver | HP | 8542A | 3942A00280 | 11/20/2003 |
| RF Filter Section | HP | 85420E | 3705A00256 | 11/20/2003 |
| EMI Test Receiver | R & S | ESHS 20 | 827129/006 | 7/17/2004 |
| LISN, 10 kHz ~ 30 MHz | FCC | 50/250-25-2 | 114 | 9/6/2003 |
| Line Filter | Lindgren | LMF-3489 | 497 | CNR |
| LISN, 10 kHz ~ 30 MHz | Solar | 8012-50-R-24-BNC | 837990 | 9/6/2003 |
| Preamplifier, 1 ~ 26 GHz | Miteq | NSP10023988 | 646456 | 4/25/2004 |
| Antenna, Horn 1 ~ 18 GHz | EMCO | 3115 | 2238 | 2/4/2004 |
| Spectrum Analyzer | HP | 8593EM | 3710A00205 | 6/11/2003 |
| 2.4-2.5GHz reject filter | Micro Tronic | BRM50702 | 2 | N.C.R |

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|--------------|----------------|---------------|------------|
| Device Type | Manufacturer | Model | Serial Number | FCC ID |
| Laptop | Dell | PP04S | N/A | DoC |
| AC Adapter | Dell | AA22850 | N/A | N/A |


I/O CABLES

| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
|-----------|-----------|----------------------|----------------|-------------------|--------------|-----------|
| 1 | AC | 1 | US115 | Unshielded | 1.8m | No |
| 2 | DC | 1 | DC Jack | Unshielded | 1.8m | No |

TEST SETUP

The EUT was installed in a host computer.

SETUP DIAGRAM

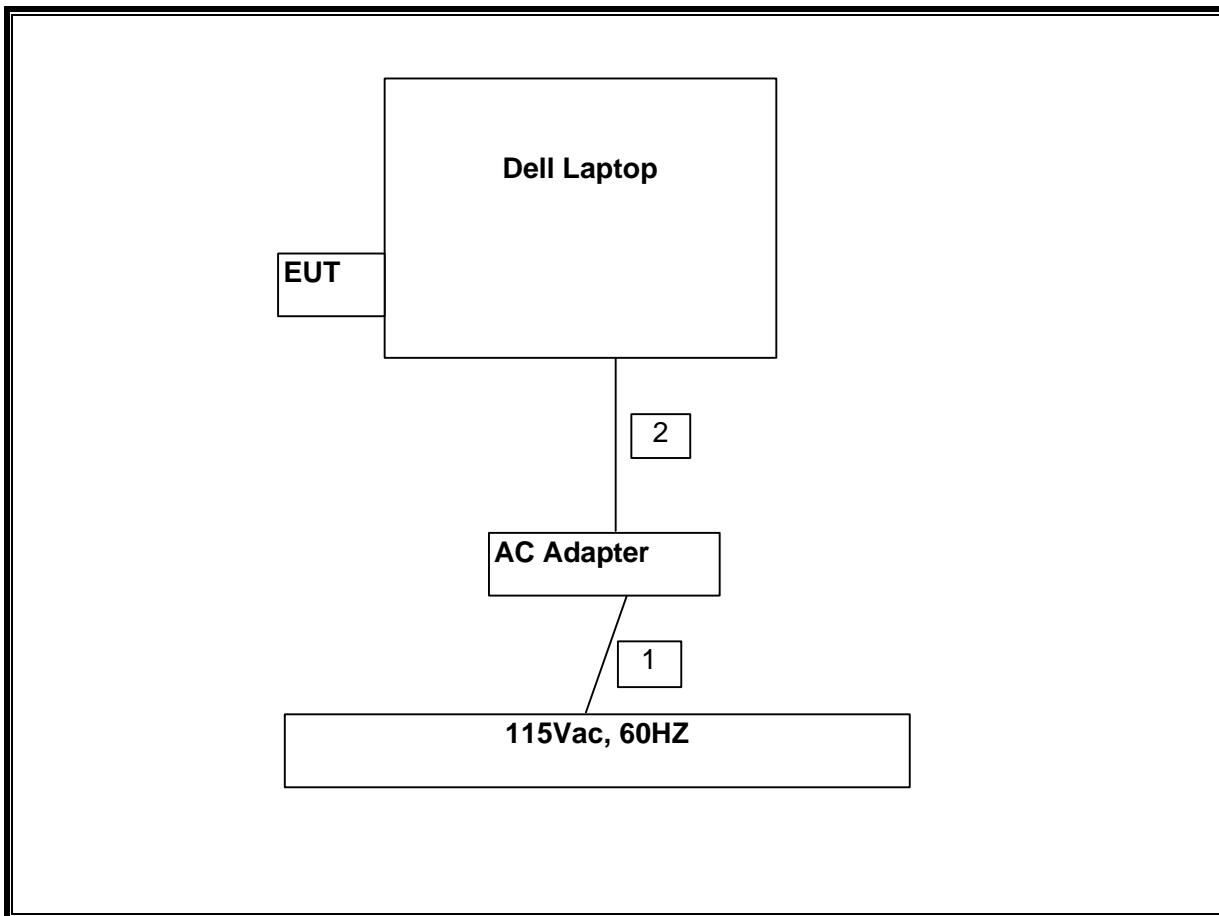

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS


No non-compliance noted:


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

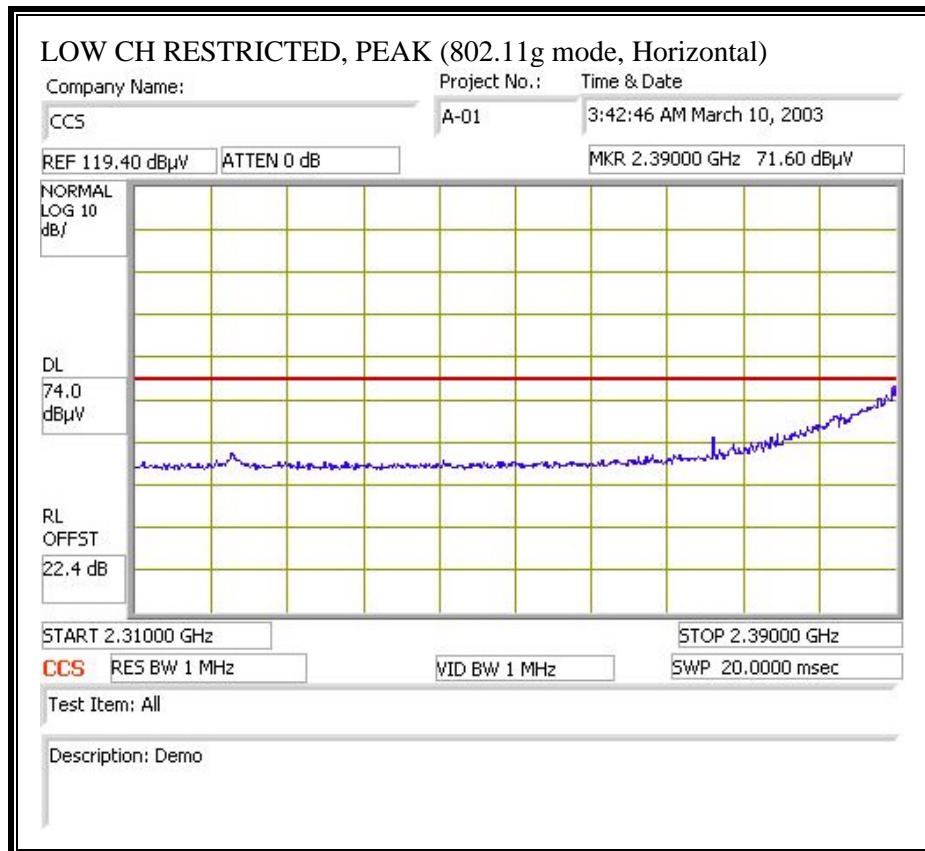

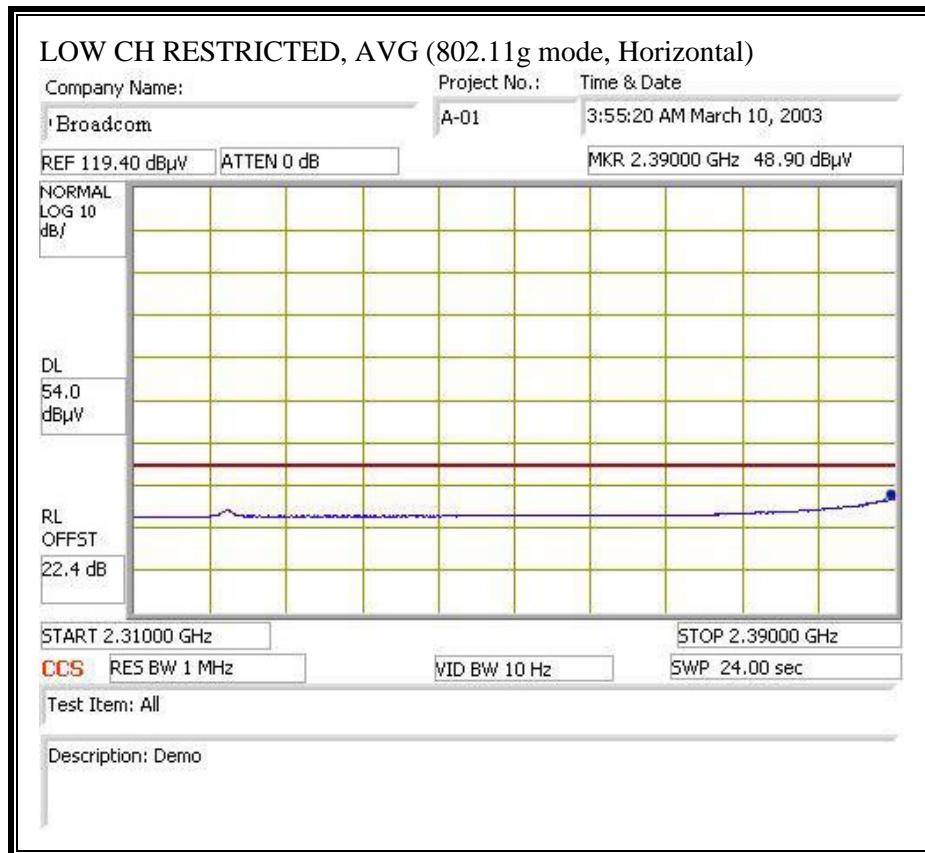



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

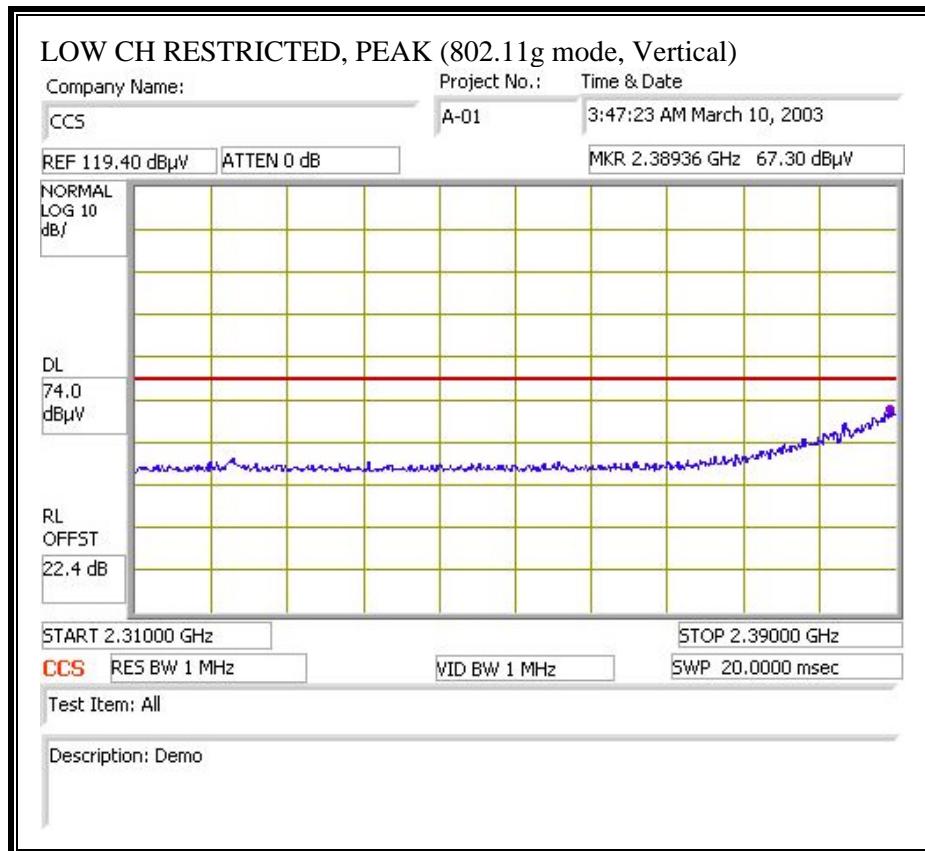

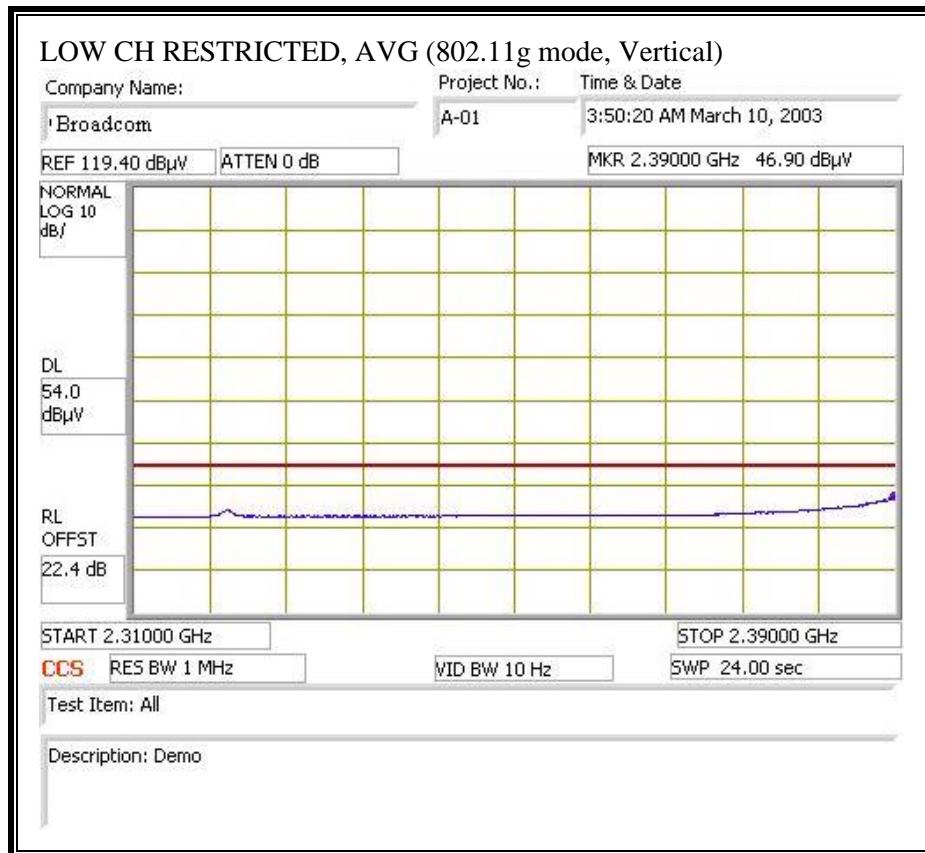



RESTRICTED BANDEDGE (qMODE, HIGH CHANNEL, HORIZONTAL)

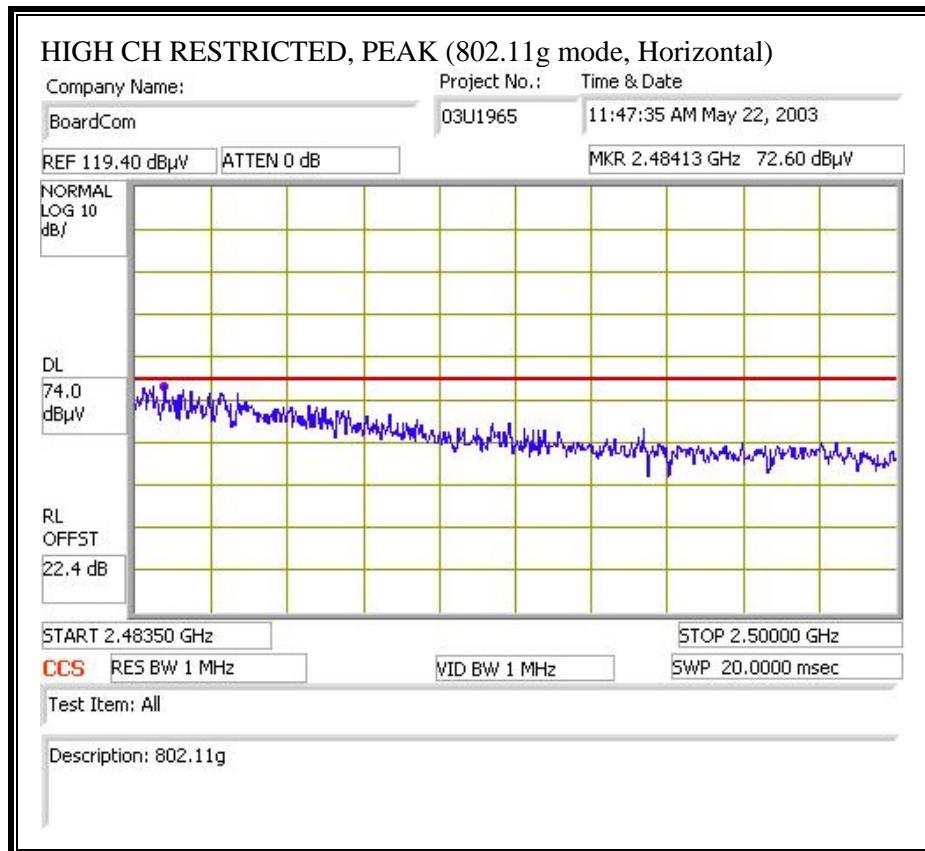

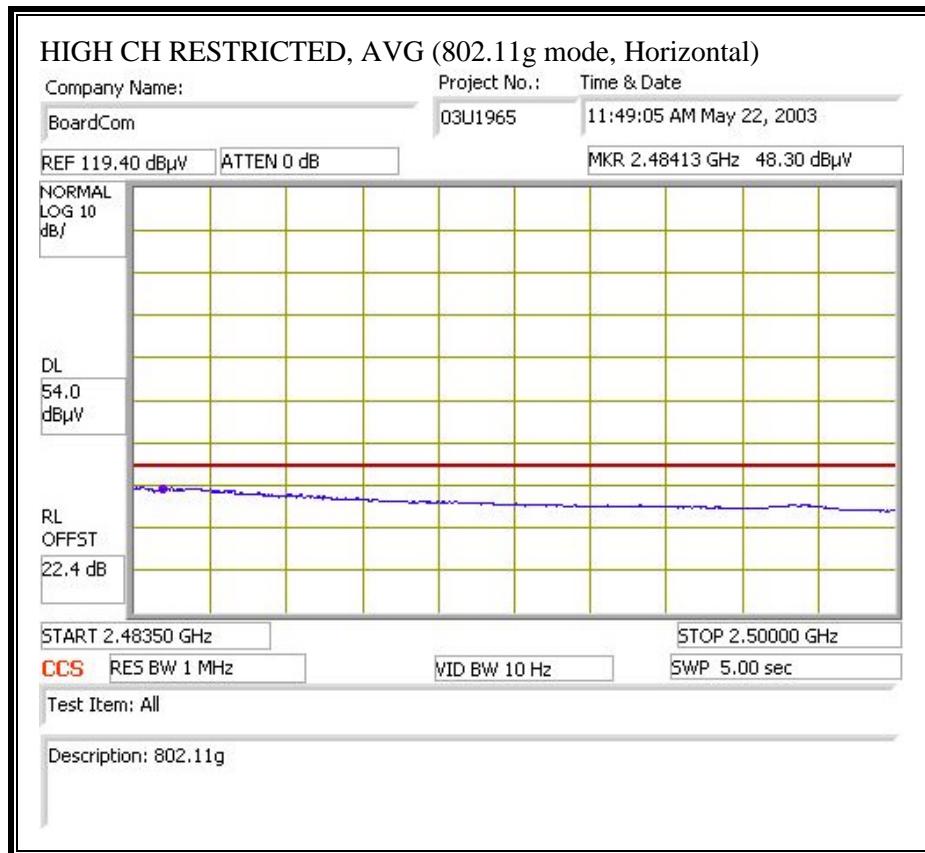

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

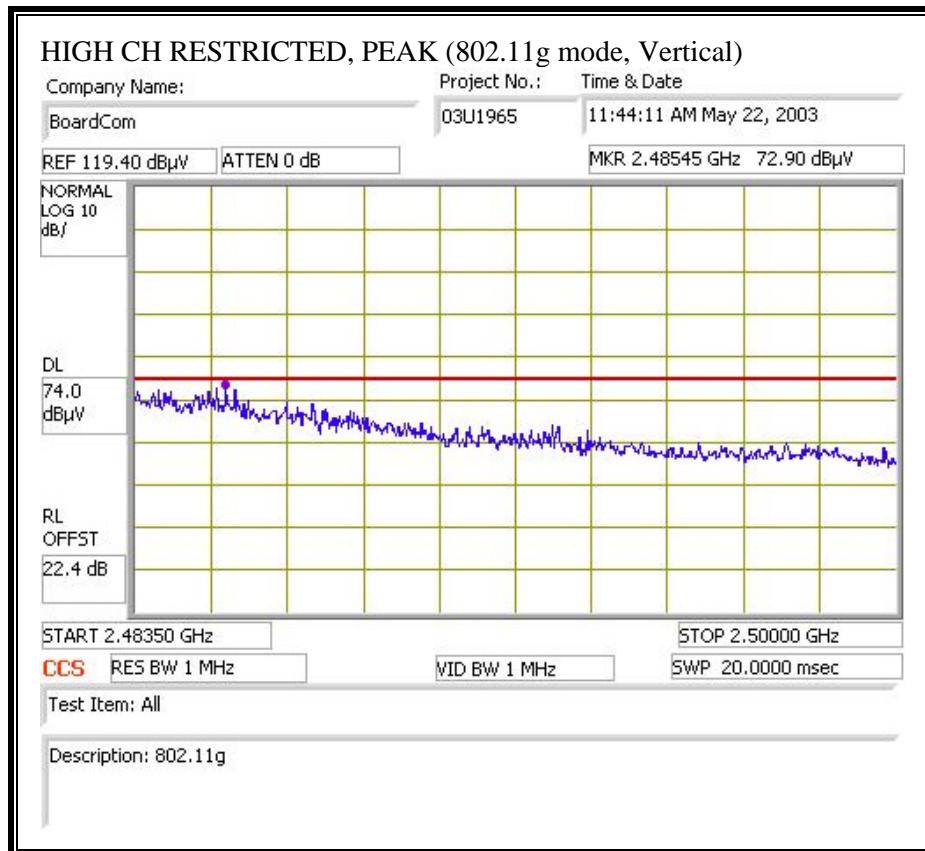


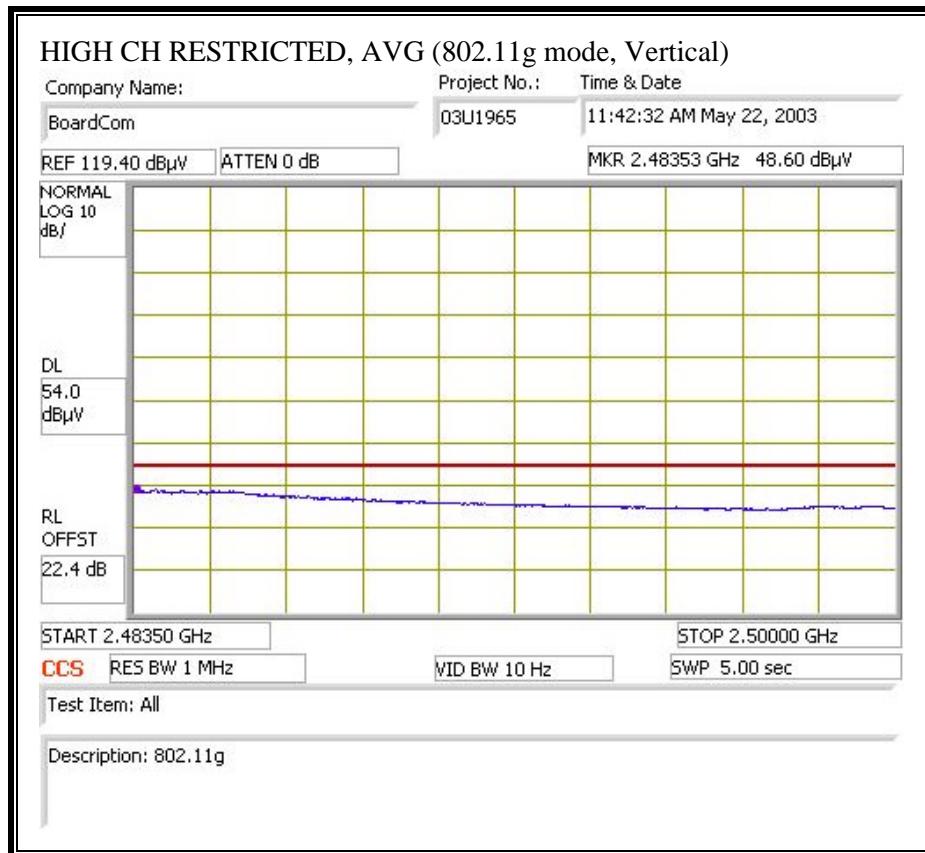


HARMONICS AND SPURIOUS EMISSIONS

| 05/29/03 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------------------------------------|-------------------------------------|---|------------|------------------------------|-----------|--------------|-----|----------------|---------------|------------------|-------------------|--------------|---------------|-------------------|-----------------------|-------------------|-------------|--------------------|------------------------------|-------------------|------------------------------|---------------------------------|-------------------------------------|-------------------------------------|---|------|------------------|-----|------------------------------|---------|--------------------------|----|----------------|------|--------------------------------|--------|-----------------------|----|------------|-----|------------------|--|--|
| <p>Test Engr: Yan Zheng Project #: 03U1965 Company: Boardcom EUT Descrip.: 802.11g EUT M/N: BCM94306MP Test Target: T1 Mode Oper: Transmitt</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>EMCO Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Spectrum Analyzer</td> <td>Horn >18GHz</td> </tr> <tr> <td>T72; S/N: 6739 @1m</td> <td>T87 Miteq 924342</td> <td>HP 8566B Analyzer</td> <td>T117; ARA 18-26GHz; S/N:1013</td> </tr> </table> <p>Hi Frequency Cables</p> <table border="1"> <tr> <td><input type="checkbox"/> (2 ft)</td> <td><input type="checkbox"/> (2 ~ 3 ft)</td> <td><input type="checkbox"/> (4 ~ 6 ft)</td> <td><input checked="" type="checkbox"/> (12 ft)</td> </tr> </table> <p>Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth</p> <p>Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth</p> | | | | | | | | | | | | | | | EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Spectrum Analyzer | Horn >18GHz | T72; S/N: 6739 @1m | T87 Miteq 924342 | HP 8566B Analyzer | T117; ARA 18-26GHz; S/N:1013 | <input type="checkbox"/> (2 ft) | <input type="checkbox"/> (2 ~ 3 ft) | <input type="checkbox"/> (4 ~ 6 ft) | <input checked="" type="checkbox"/> (12 ft) | | | | | | | | | | | | | | | | | | |
| EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Spectrum Analyzer | Horn >18GHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T72; S/N: 6739 @1m | T87 Miteq 924342 | HP 8566B Analyzer | T117; ARA 18-26GHz; S/N:1013 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <input type="checkbox"/> (2 ft) | <input type="checkbox"/> (2 ~ 3 ft) | <input type="checkbox"/> (4 ~ 6 ft) | <input checked="" type="checkbox"/> (12 ft) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| f GHz | Dist feet | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | HPF | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Channe 11 (2462MHz) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Spurious | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.372 | 9.8 | 56.1 | 36.1 | 25.7 | 1.4 | -43.4 | 0.0 | 1.0 | 40.9 | 20.9 | 74.0 | 54.0 | -33.1 | -33.1 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.924 | 9.8 | 52.2 | 37.5 | 34.1 | 3.8 | -44.8 | 0.0 | 1.0 | 46.3 | 31.6 | 74.0 | 54.0 | -27.7 | -22.4 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.386 | 9.8 | 51.6 | 37.1 | 37.1 | 4.9 | -44.5 | 0.0 | 1.0 | 50.1 | 35.6 | 74.0 | 54.0 | -23.9 | -18.4 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.310 | 9.8 | 50.1 | 37.4 | 39.8 | 6.6 | -42.5 | 0.0 | 1.0 | 54.9 | 42.2 | 74.0 | 54.0 | -19.1 | -11.8 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.696 | 9.8 | 56.4 | 44.0 | 33.0 | 8.8 | -44.8 | 0.0 | 1.0 | 54.3 | 41.9 | 74.0 | 54.0 | -19.7 | -12.1 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.696 | 9.8 | 56.1 | 44.0 | 33.0 | 8.8 | -44.8 | 0.0 | 1.0 | 54.0 | 41.9 | 74.0 | 54.0 | -20.0 | -12.1 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.310 | 9.8 | 56.0 | 37.2 | 39.8 | 6.6 | -42.5 | 0.0 | 1.0 | 60.8 | 42.0 | 74.0 | 54.0 | -13.2 | -12.0 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.386 | 9.8 | 50.0 | 38.0 | 37.1 | 4.9 | -44.5 | 0.0 | 1.0 | 48.5 | 36.5 | 74.0 | 54.0 | -25.5 | -17.5 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.924 | 9.8 | 49.1 | 36.7 | 34.1 | 3.8 | -44.8 | 0.0 | 1.0 | 43.2 | 30.8 | 74.0 | 54.0 | -30.8 | -23.2 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Channel 6 (2442MHz) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.874 | 9.8 | 48.7 | 37.2 | 34.1 | 3.8 | -44.7 | 0.0 | 1.0 | 42.8 | 31.3 | 74.0 | 54.0 | -31.2 | -22.7 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.311 | 9.8 | 49.6 | 37.7 | 37.0 | 4.8 | -44.5 | 0.0 | 1.0 | 47.9 | 36.0 | 74.0 | 54.0 | -26.1 | -18.0 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.185 | 9.8 | 49.8 | 37.4 | 39.7 | 6.5 | -42.4 | 0.0 | 1.0 | 54.6 | 42.2 | 74.0 | 54.0 | -19.4 | -11.8 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.496 | 9.8 | 56.8 | 43.7 | 32.6 | 8.7 | -45.0 | 0.0 | 1.0 | 54.1 | 41.0 | 74.0 | 54.0 | -19.9 | -13.0 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.496 | 9.8 | 56.6 | 43.7 | 32.6 | 8.7 | -45.0 | 0.0 | 1.0 | 53.9 | 41.0 | 74.0 | 54.0 | -20.1 | -13.0 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.185 | 9.8 | 50.2 | 37.4 | 39.7 | 6.5 | -42.4 | 0.0 | 1.0 | 55.0 | 42.2 | 74.0 | 54.0 | -19.0 | -11.8 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.311 | 9.8 | 51.3 | 37.8 | 37.0 | 4.8 | -44.5 | 0.0 | 1.0 | 49.6 | 36.1 | 74.0 | 54.0 | -24.4 | -17.9 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.874 | 9.8 | 49.8 | 37.0 | 34.1 | 3.8 | -44.7 | 0.0 | 1.0 | 43.9 | 31.1 | 74.0 | 54.0 | -30.1 | -22.9 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Channel 1 (2412MHz) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.824 | 9.8 | 49.1 | 37.0 | 34.0 | 3.7 | -44.7 | 0.0 | 1.0 | 43.2 | 31.1 | 74.0 | 54.0 | -30.8 | -22.9 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.060 | 9.8 | 48.5 | 36.9 | 39.6 | 6.5 | -42.2 | 0.0 | 1.0 | 53.3 | 41.7 | 74.0 | 54.0 | -20.7 | -12.3 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14.472 | 9.8 | 53.1 | 40.9 | 40.7 | 7.3 | -44.8 | 0.0 | 1.0 | 57.2 | 45.0 | 74.0 | 54.0 | -16.8 | -9.0 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.296 | 9.8 | 55.2 | 43.6 | 32.2 | 8.7 | -45.2 | 0.0 | 1.0 | 51.9 | 40.3 | 74.0 | 54.0 | -22.1 | -13.7 | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19.296 | 9.8 | 55.9 | 43.6 | 32.2 | 8.7 | -45.2 | 0.0 | 1.0 | 52.6 | 40.3 | 74.0 | 54.0 | -21.4 | -13.7 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14.472 | 9.8 | 52.9 | 43.6 | 40.7 | 7.3 | -44.8 | 0.0 | 1.0 | 57.0 | 47.7 | 74.0 | 54.0 | -17.0 | -6.3 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.060 | 9.8 | 49.3 | 36.8 | 39.6 | 6.5 | -42.2 | 0.0 | 1.0 | 54.1 | 41.6 | 74.0 | 54.0 | -19.9 | -12.4 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.824 | 9.8 | 48.7 | 36.9 | 34.0 | 3.7 | -44.7 | 0.0 | 1.0 | 42.8 | 31.0 | 74.0 | 54.0 | -31.2 | -23.0 | V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table> | | | | | | | | | | | | | | | f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit | Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit | Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit | AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit | CL | Cable Loss | HPF | High Pass Filter | | |
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CL | Cable Loss | HPF | High Pass Filter | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

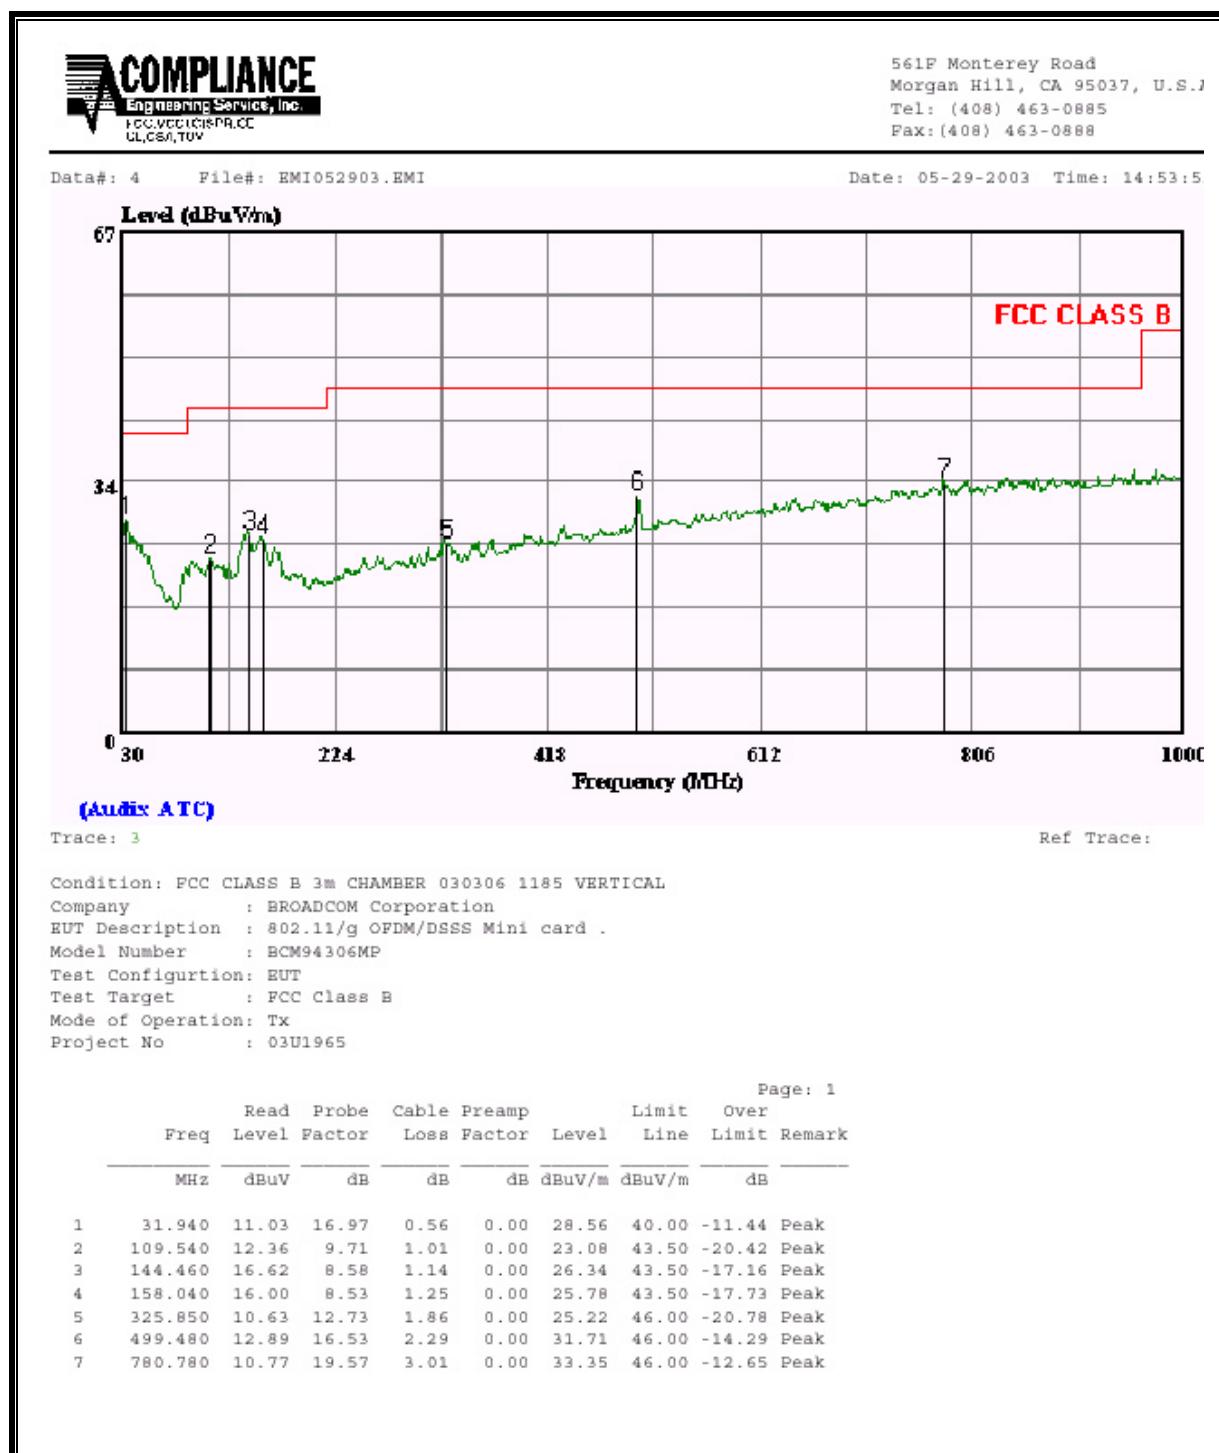

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

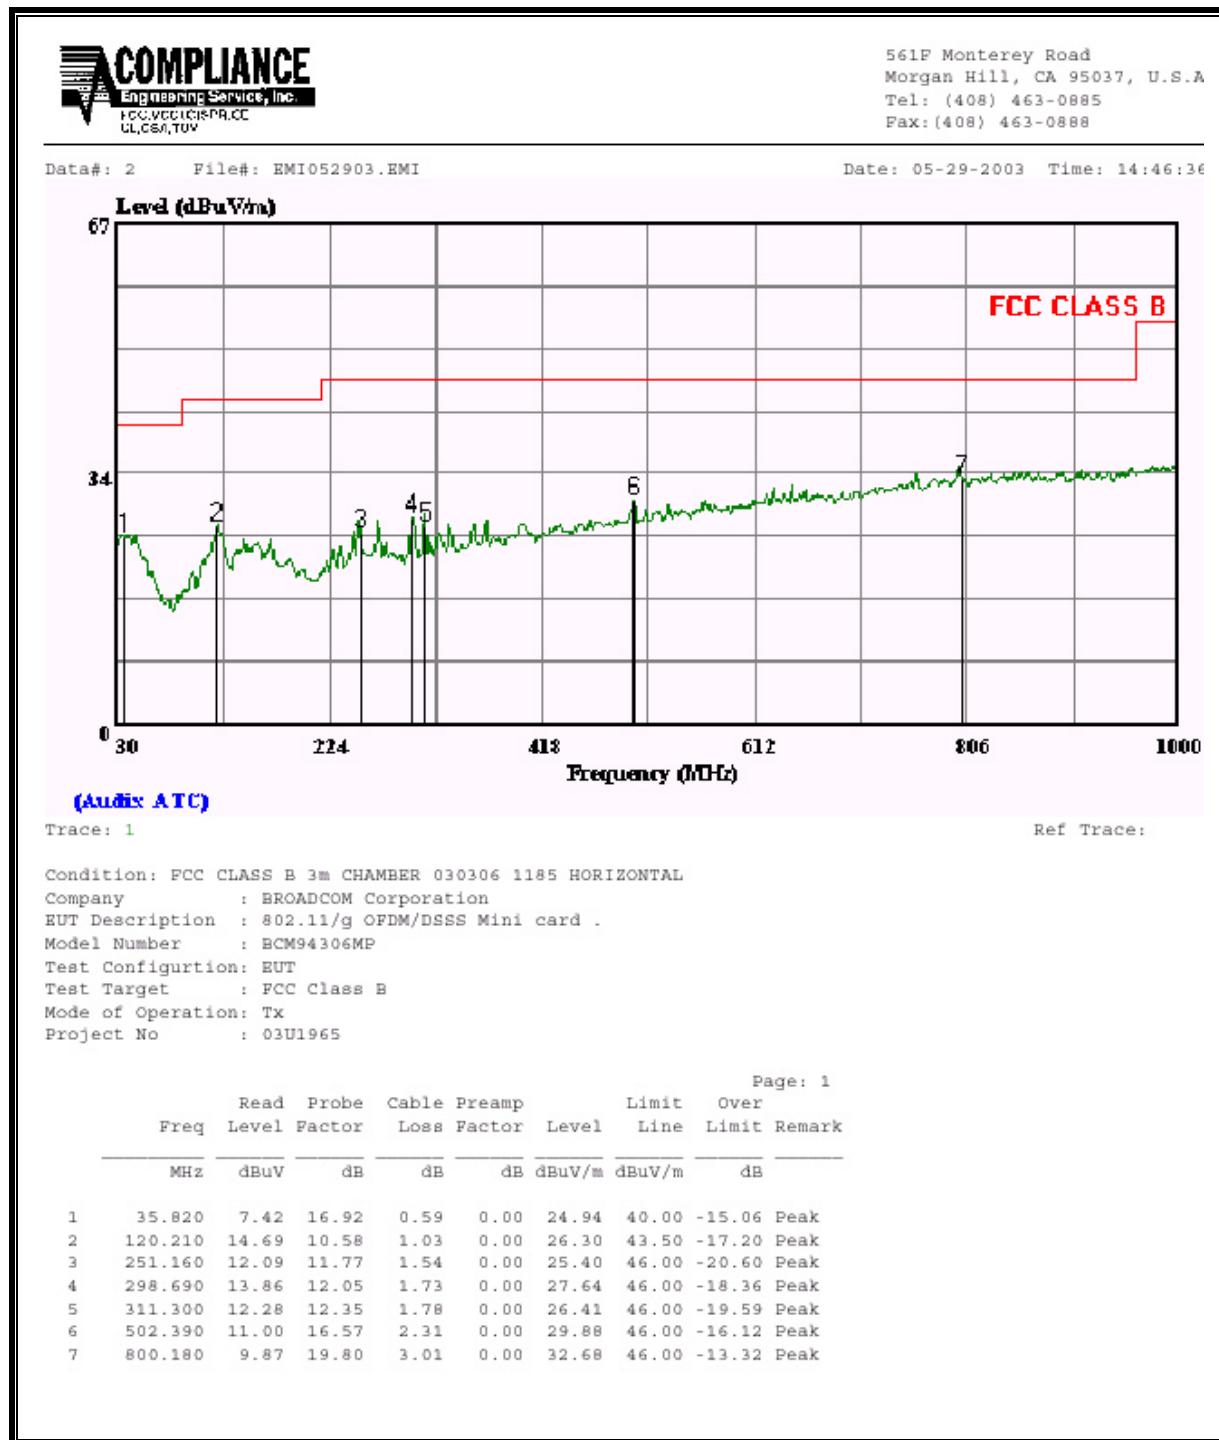

7.2. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|-----------------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 [*] | 56 to 46 [*] |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

6 WORST EMISSIONS

| CONDUCTED EMISSIONS DATA (115VAC 60Hz) | | | | | | | | | |
|--|-----------|-----------|-----------|---------------|-------------|------------|---------|---------|--------|
| Freq. (MHz) | Reading | | | Closs (dB) | Limit QP | EN B AV | Margin | | Remark |
| | PK (dBuV) | QP (dBuV) | AV (dBuV) | | | | QP (dB) | AV (dB) | |
| 0.56 | 40.34 | -- | -- | 0.00 | 56.00 | 46.00 | -15.66 | -5.66 | L1 |
| 0.16 | 44.28 | -- | -- | 0.00 | 65.66 | 55.66 | -21.38 | -11.38 | L1 |
| 2.78 | 38.68 | -- | -- | 0.00 | 56.00 | 46.00 | -17.32 | -7.32 | L1 |
| 0.56 | 37.52 | -- | -- | 0.00 | 56.00 | 46.00 | -18.48 | -8.48 | L2 |
| 0.16 | 43.70 | -- | -- | 0.00 | 65.69 | 55.69 | -21.99 | -11.99 | L2 |
| 21.04 | 35.48 | -- | -- | 0.00 | 60.00 | 50.00 | -24.52 | -14.52 | L2 |
| 6 Worst Data | | | | | | | | | |

LINE 1 AND LINE 2 RESULTS

