



FCC CFR47 PART 15 SUBPART E
INDUSTRY CANADA RSS-210 ISSUE 7
CLASS II PERMISSIVE CHANGE
TEST REPORT

FOR
802.11ag/Draft 802.11n WLAN PCI-E Mini Card
(Dell Pacino PP31L with BCM94322HM8L Inside)

MODEL NUMBER: BCM94322HM8L
FCC ID: QDS-BRCM1031
IC: 4324A-BRCM1031

REPORT NUMBER: 08U11720-4A

ISSUE DATE: May 12, 2008

Prepared for
BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]
NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	4-28-08	Initial issue	Sunny Shih
A	5-12-08	<ol style="list-style-type: none">1. Updated sec. 5.2 Description of class II permissive change.2. Added Co-located MPE calculations	Sunny Shih

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>6</i>
5.2. <i>DESCRIPTION OF CLASS II CHANGE.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>6</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	<i>6</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>7</i>
6. TEST AND MEASUREMENT EQUIPMENT	9
7. RADIATED TEST RESULTS	10
7.1. <i>LIMITS AND PROCEDURE</i>	<i>10</i>
7.2. <i>TRANSMITTER ABOVE 1 GHz IN THE 5.15 – 5.25 GHz BAND</i>	<i>11</i>
7.2.1. <i>802.11a MODE.....</i>	<i>11</i>
7.3. <i>TRANSMITTER ABOVE 1 GHz IN THE 5.25 – 5.35 GHz BAND</i>	<i>12</i>
7.3.1. <i>802.11a MODE.....</i>	<i>12</i>
7.3.2. <i>802.11n HT40 MODE.....</i>	<i>13</i>
7.4. <i>TRANSMITTER ABOVE 1 GHz IN THE 5.47 – 5.725 GHz BAND</i>	<i>15</i>
7.4.1. <i>802.11a MODE.....</i>	<i>15</i>
7.4.2. <i>802.11n HT40 MODE.....</i>	<i>16</i>
7.5. <i>RECEIVER ABOVE 1 GHz</i>	<i>18</i>
7.6. <i>WORST-CASE BELOW 1 GHz.....</i>	<i>19</i>
8. MAXIMUM PERMISSIBLE EXPOSURE.....	21
9. AC POWER LINE CONDUCTED EMISSIONS.....	26
10. SETUP PHOTOS	29

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA

EUT DESCRIPTION: 802.11ag / Draft 802n WLAN PCI-E MINI CARD
(Dell Pacino PP31L with BCM94322HM8L Inside)

MODEL: BCM94322HM8L

SERIAL NUMBER: 240


DATE TESTED: APRIL 22 - 26, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
RSS-210 Issue 7 Annex 9 and RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All expressions of Pass/Fail in this report are opinions expressed by CCS based on interpretations of the test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



SUNNY SHIH
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC MO&O 06-96, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Broadcom 802.11g WLAN PCI-E Mini Card installed inside Dell Pacino, model PP31L.

The radio module is manufactured by Broadcom and model number is BCM9432HM8L.

5.2. DESCRIPTION OF CLASS II CHANGE

The major changes filed under this application are:

- Adding portable platform, model Dell PP31L.
- Add co-location of UWB+BT module FCC ID: QDS-BRCM1035

Only the Radiated Emission and AC mains line conduction tests are performed.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Manufacture	Model	Main (dBi), Tx 1	MIMO (dBi), Tx 3 (Used as Aux)	Antenna Tested
5150 - 5350	Advance-Connectek, Inc (ACON)	AMP8P-700047	-4.23	-0.96	<input type="checkbox"/>
	Amphenol	QT0932-11-001-R (Tx1-2) & QT0932-11-004-R (Tx3)	0.52	-0.94	<input checked="" type="checkbox"/>
5470 - 5725	Advance-Connectek, Inc (ACON)	AMP8P-700047	-2.3	0.09	<input type="checkbox"/>
	Amphenol	QT0932-11-001-R (Tx1-2) & QT0932-11-004-R (Tx3)	3.23	-0.87	<input checked="" type="checkbox"/>

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was BCMWL5, rev. 4.170.75.0.

The test utility software used during testing was wl_tool, rev. 4.170 RC75.0.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case data rate for each mode is determined to be as follows, based on original test report and CCS Test plan.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	PACINO	COP7C00031	N/A
AC Adapter	Dell	NADP-90KB A	TH-09T215-17971-292-00HX	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115V	Unshielded	2.0m	N/A
2	DC	1	DC	Unshielded	2.0m	N/A

TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

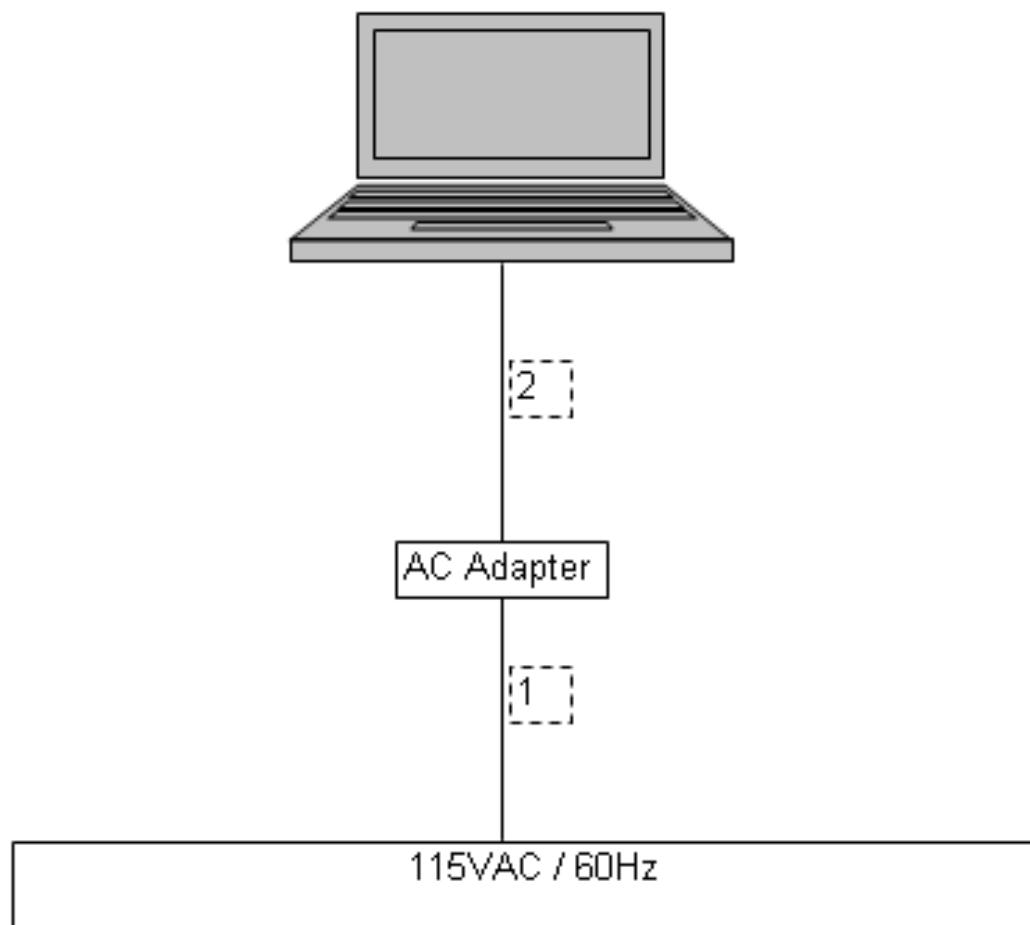

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00945	4/15/2008	4/15/2009
Bilog Antenna	Sunol Sciences	JB1	C01016	10/13/2007	10/13/2008
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	8/3/2007	9/27/2008
Preamplifier, 1300 MHz	Agilent / HP	8447D	C01064	5/9/2007	5/9/2008
RF Filter Section, 2.9 GHz	Agilent / HP	85420E	C00958	2/6/2007	6/12/2008
Peak Power Meter	Agilent / HP	E4416A	C00963	2/14/2007	12/2/2008
Peak / Average Power Sensor	Agilent	E9327A	C00964	2/14/2007	12/2/2008
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	10/16/2007	1/27/2009
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	9/15/2006	9/15/2008
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	9/15/2006	9/15/2008
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	5/2/2006	8/7/2008

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

7.2. TRANSMITTER ABOVE 1 GHz IN THE 5.15 – 5.25 GHz BAND

7.2.1. 802.11a MODE

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																																																																																																											
Compliance Certification Services, Fremont 5m Chamber																																																																																																											
Company:		Broadcom																																																																																																									
Project #:		08U11720																																																																																																									
Date:		4/25/2008																																																																																																									
Test Engineer:		Vien Tran																																																																																																									
Configuration:		EUT insides Pacino laptop																																																																																																									
Mode:		Tx 11a Legacy Mode_5150-5250MHz Band																																																																																																									
<u>Test Equipment:</u>																																																																																																											
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit																																																																																															
T120; S/N: 29310 @3m			T144 Miteq 3008A00931									FCC 15.205																																																																																															
Hi Frequency Cables																																																																																																											
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements																																																																																												
						A-5m Chamber			HPF_7.6GHz						RBW=VBW=1MHz																																																																																												
															Average Measurements																																																																																												
															RBW=1MHz, VBW=10Hz																																																																																												
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																												
LOW CH, 5180 MHz																																																																																																											
15.540	3.0	43.9	30.3	39.2	12.7	-34.8	0.0	0.7	61.7	48.1	74	54	-12.3	-5.9	H																																																																																												
15.540	3.0	42.1	29.3	39.2	12.7	-34.8	0.0	0.7	59.9	47.1	74	54	-14.1	-6.9	V																																																																																												
MID CH, 5200 MHz																																																																																																											
15.600	3.0	44.2	30.6	39.0	12.7	-34.8	0.0	0.7	61.9	48.3	74	54	-12.1	-5.7	H																																																																																												
15.600	3.0	42.5	29.8	39.0	12.7	-34.8	0.0	0.7	60.2	47.5	74	54	-13.8	-6.5	V																																																																																												
HI CH, 5240 MHz																																																																																																											
15.720	3.0	44.5	31.9	38.6	12.8	-34.7	0.0	0.7	61.9	49.3	74	54	-12.1	-4.7	H																																																																																												
15.720	3.0	42.7	30.6	38.6	12.8	-34.7	0.0	0.7	60.1	48.0	74	54	-13.9	-6.0	V																																																																																												
<table> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td colspan="12"></td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td colspan="12"></td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td colspan="12"></td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td colspan="12"></td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td colspan="12"></td> <td></td> <td></td> </tr> </table>																		f	Measurement Frequency	Amp	Preamp Gain													Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters													Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m													Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength													Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter														
f	Measurement Frequency	Amp	Preamp Gain													Avg Lim	Average Field Strength Limit																																																																																										
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters													Pk Lim	Peak Field Strength Limit																																																																																										
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m													Avg Mar	Margin vs. Average Limit																																																																																										
AF	Antenna Factor	Peak	Calculated Peak Field Strength													Pk Mar	Margin vs. Peak Limit																																																																																										
CL	Cable Loss	HPF	High Pass Filter																																																																																																								

7.3. TRANSMITTER ABOVE 1 GHz IN THE 5.25 – 5.35 GHz BAND



7.3.1. 802.11a MODE

HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company: Broadcom		Project #: 08U11720		Date: 4/25/2008		Test Engineer: Vien Tran		Configuration: EUT insides Pacino laptop		Mode: Tx 11a Legacy Mode_5250-5350MHz Band					
Test Equipment:															
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz										Limit			
T120; S/N: 29310 @3m	T144 Miteq 3008A00931											FCC 15.205			
Hi Frequency Cables															
2 foot cable	3 foot cable	12 foot cable										Peak Measurements			
		A.5m Chamber										RBW=VBW=1MHz			
												Average Measurements			
												RBW=1MHz, VBW=10Hz			
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CH, 5260 MHz															
15.780	3.0	41.0	29.1	38.4	12.8	-34.6	0.0	0.7	58.3	46.3	74	54	-15.7	-7.7	H
15.780	3.0	39.2	28.1	38.4	12.8	-34.6	0.0	0.7	56.5	45.3	74	54	-17.5	-8.7	V
MID CH, 5300 MHz															
10.600	3.0	42.1	30.1	36.0	10.7	-36.6	0.0	0.8	52.9	41.0	74	54	-21.1	-13.0	H
15.900	3.0	40.4	29.3	38.0	12.8	-34.6	0.0	0.7	57.4	46.3	74	54	-16.6	-7.7	H
10.600	3.0	41.3	29.4	36.0	10.7	-36.6	0.0	0.8	52.2	40.2	74	54	-21.8	-13.8	V
15.900	3.0	39.6	28.6	38.0	12.8	-34.6	0.0	0.7	56.6	45.6	74	54	-17.4	-8.4	V
HI CH, 5320 MHz															
10.640	3.0	42.7	30.8	36.1	10.7	-36.6	0.0	0.8	53.7	41.8	74	54	-20.3	-12.2	H
15.960	3.0	41.0	30.0	37.8	12.8	-34.5	0.0	0.7	57.9	46.9	74	54	-16.1	-7.1	H
10.600	3.0	42.0	30.0	36.0	10.7	-36.6	0.0	0.8	52.8	40.9	74	54	-21.2	-13.1	V
15.900	3.0	40.3	29.2	38.0	12.8	-34.6	0.0	0.7	57.3	46.2	74	54	-16.7	-7.8	V
Definitions															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit			Pk Lim	Peak Field Strength Limit		
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Avg Mar	Margin vs. Average Limit			Pk Mar	Margin vs. Peak Limit		
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Peak	Calculated Peak Field Strength			HPF	High Pass Filter		
AF	Antenna Factor														
CL	Cable Loss														

7.3.2. 802.11n HT40 MODE

RESTRICTED BANDEDGE (HIGH CHANNEL 62, HORIZONTAL)

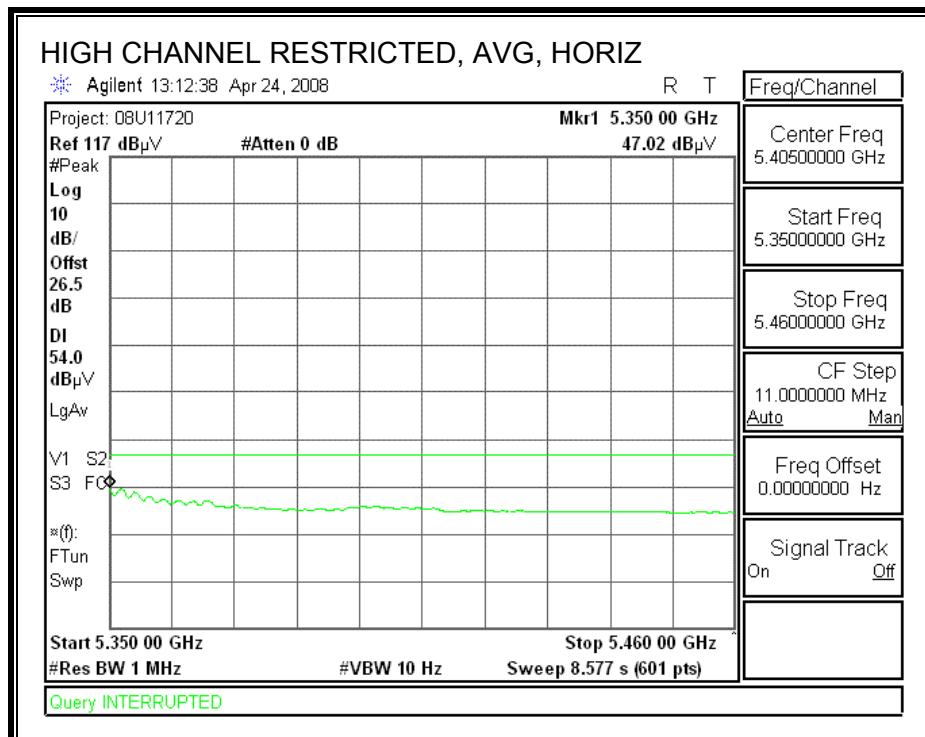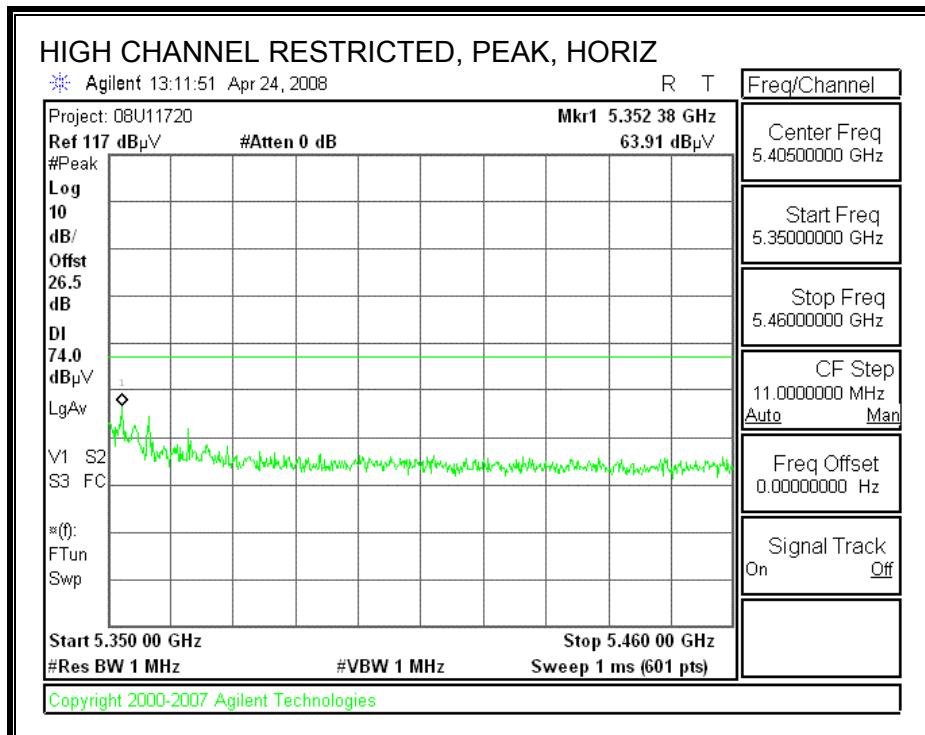

RESTRICTED BANDEDGE (HIGH CHANNEL 62, VERTICAL)

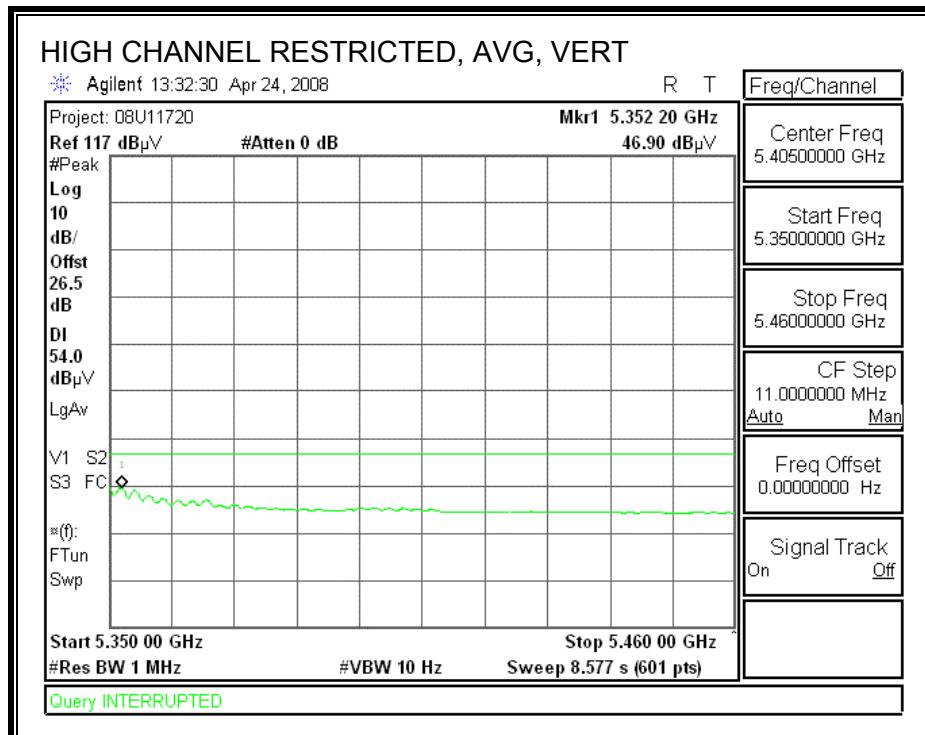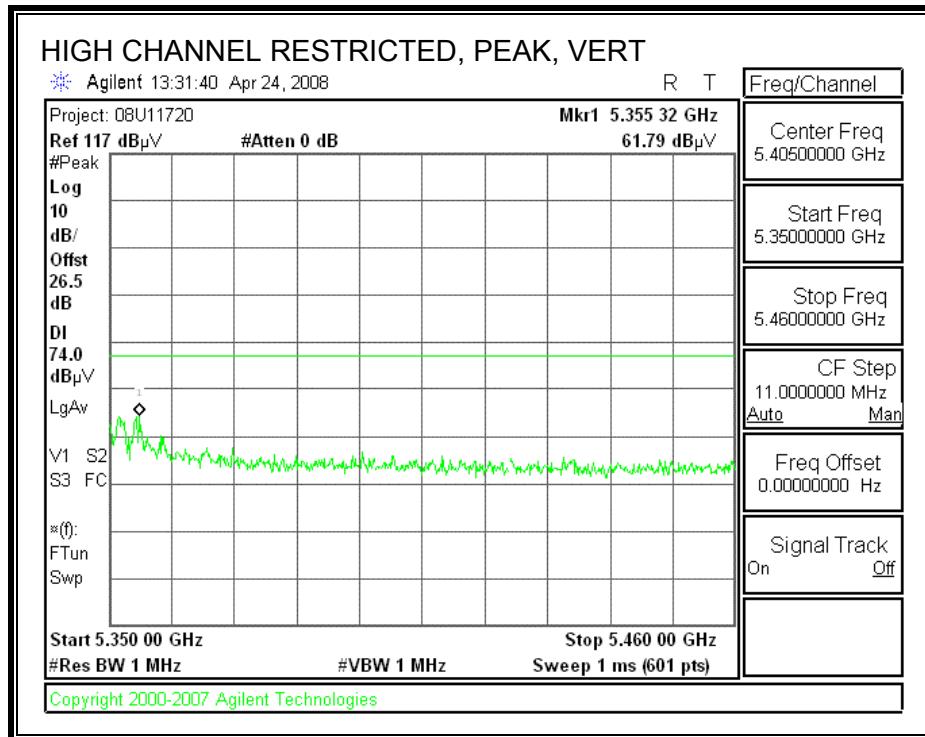

7.4. TRANSMITTER ABOVE 1 GHz IN THE 5.47 – 5.725 GHz BAND



7.4.1. 802.11a MODE

HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																												
Company:	Broadcom																																											
Project #:	08U11720																																											
Date:	4/25/2008																																											
Test Engineer:	Vien Tran																																											
Configuration:	EUT insides Pacino laptop																																											
Mode:	Tx 11a Legacy Mode_5470-5725MHz Band																																											
<u>Test Equipment:</u>																																												
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit																																
T120; S/N: 29310 @3m			T144 Miteq 3008A00931									FCC 15.205																																
Hi Frequency Cables																																												
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz																													
						A-5m Chamber			HPF_7.6GHz						Average Measurements RBW=1MHz, VBW=10Hz																													
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																													
LOW CH, 5500 MHz																																												
11.000	3.0	41.7	29.8	36.3	11.1	-36.3	0.0	0.7	53.6	41.7	74	54	-20.4	-12.3	H																													
11.000	3.0	39.9	28.8	36.3	11.1	-36.3	0.0	0.7	51.8	40.7	74	54	-22.2	-13.3	V																													
MID CH, 5600 MHz																																												
11.200	3.0	42.8	30.9	36.4	11.3	-36.1	0.0	0.7	55.1	43.2	74	54	-18.9	-10.8	H																													
11.200	3.0	41.1	30.1	36.4	11.3	-36.1	0.0	0.7	53.4	42.4	74	54	-20.6	-11.6	V																													
HI CH, 5700 MHz																																												
11.400	3.0	43.5	31.5	36.4	11.5	-35.9	0.0	0.7	56.2	44.2	74	54	-17.8	-9.8	H																													
11.400	3.0	41.8	30.7	36.4	11.5	-35.9	0.0	0.7	54.5	43.4	74	54	-19.5	-10.6	V																													
<table border="0"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																							
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																							
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																							
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																							
CL	Cable Loss	HPF	High Pass Filter																																									

7.4.2. 802.11n HT40 MODE

RESTRICTED BANDEDGE (HIGH CHANNEL 102, HORIZONTAL)

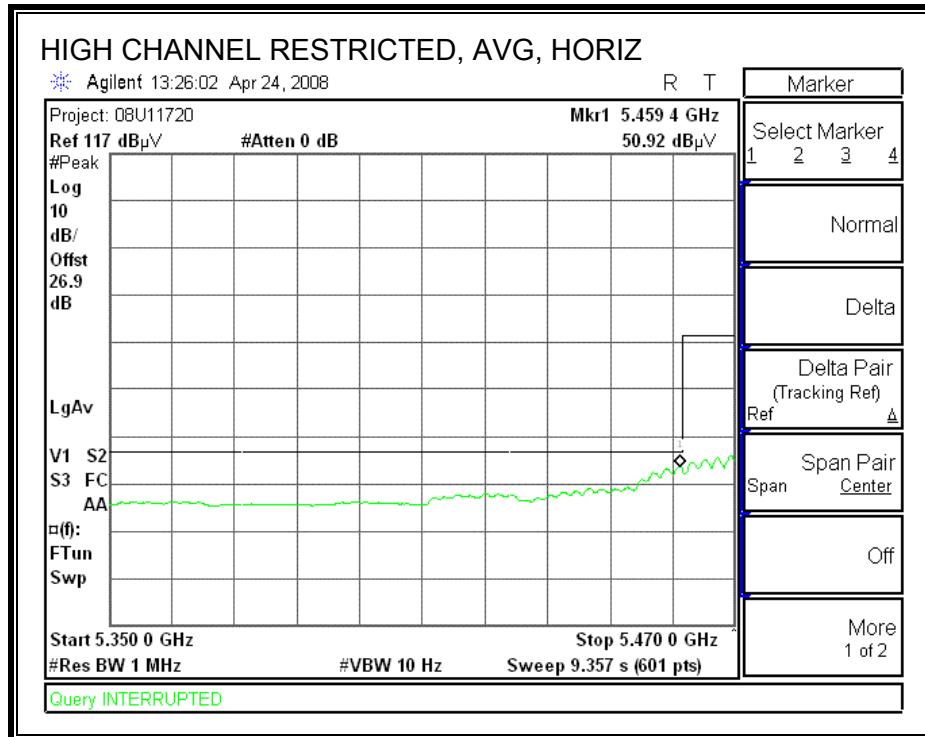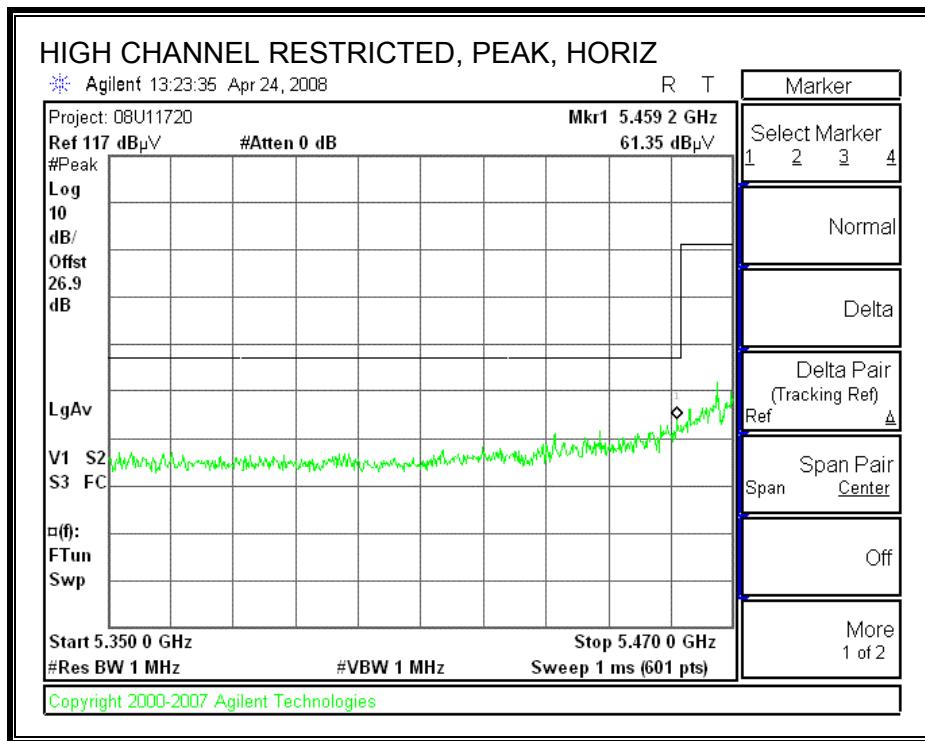

RESTRICTED BANDEDGE (HIGH CHANNEL 102, VERTICAL)

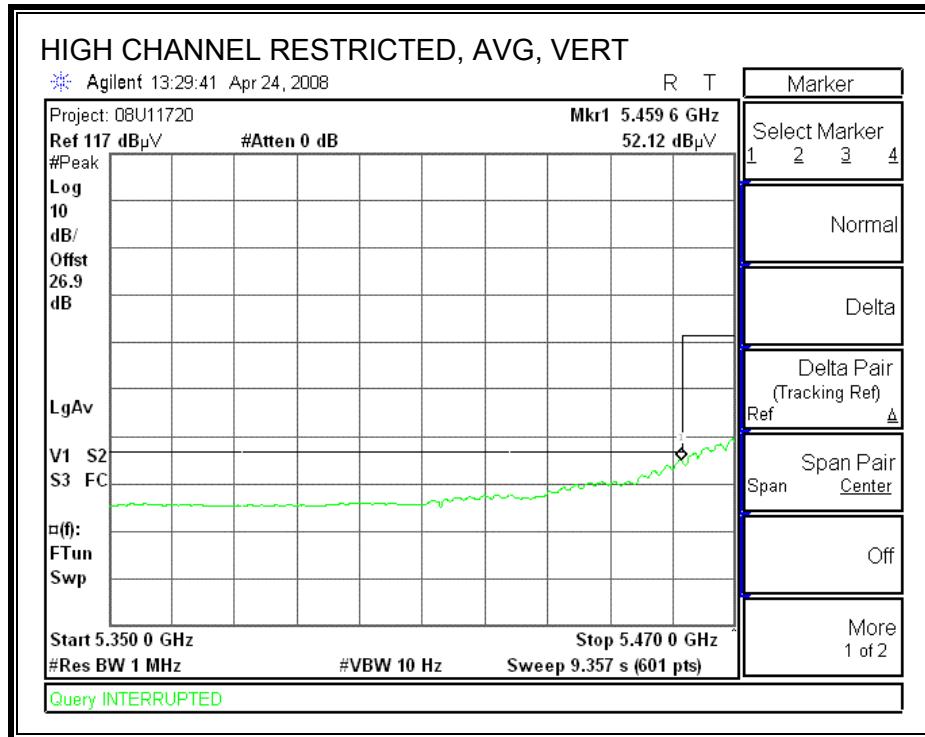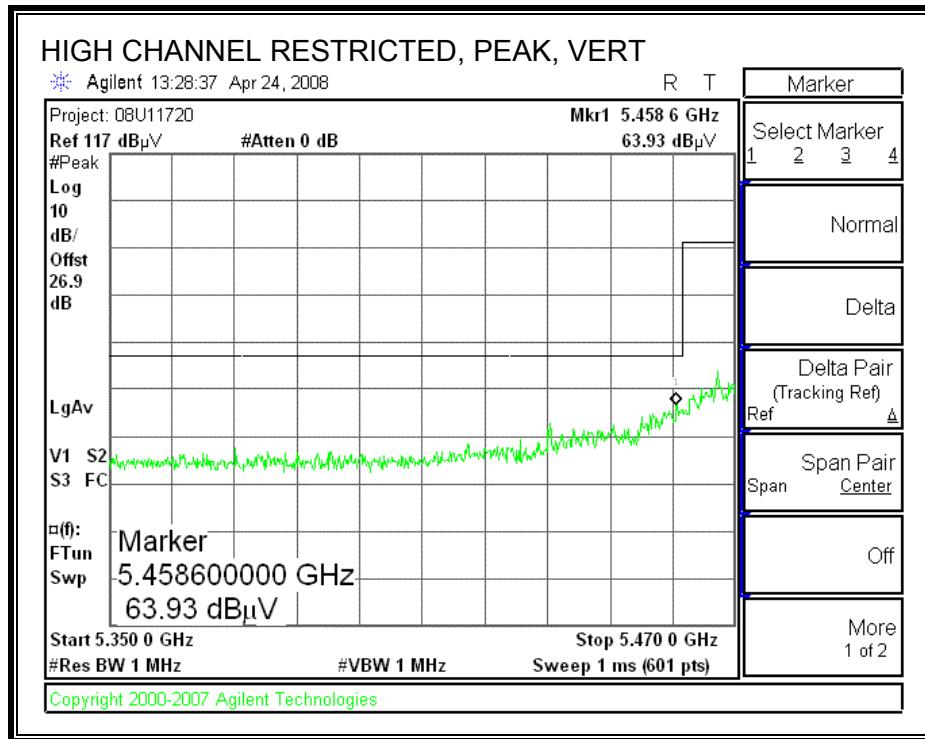

7.5. RECEIVER ABOVE 1 GHz

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company:	Broadcom														
Project #:	08U11720														
Date:	4/25/2008														
Test Engineer:	Vien Tran														
Configuration:	EUT insides Pacino laptop														
Mode:	Rx Mode														
<u>Test Equipment:</u>															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T120; S/N: 29310 @3m		T144 Miteq 3008A00931						RX RSS 210							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz					
A-5m Chamber															
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.498	3.0	54.5	49.6	27.6	3.6	-38.8	0.0	0.0	46.9	42.0	74	54	-27.1	-12.0	H
2.995	3.0	48.2	32.8	31.2	5.3	-37.4	0.0	0.0	47.4	32.0	74	54	-26.6	-22.0	H
1.498	3.0	54.7	49.7	27.6	3.6	-38.8	0.0	0.0	47.1	42.1	74	54	-26.9	-11.9	V
2.995	3.0	50.0	36.5	31.2	5.3	-37.4	0.0	0.0	49.2	35.7	74	54	-24.8	-18.3	V
f Measurement Frequency					Amp Preamp Gain					Avg Lim Average Field Strength Limit					
Dist Distance to Antenna					D Corr Distance Correct to 3 meters					Pk Lim Peak Field Strength Limit					
Read Analyzer Reading					Avg Average Field Strength @ 3 m					Avg Mar Margin vs. Average Limit					
AF Antenna Factor					Peak Calculated Peak Field Strength					Pk Mar Margin vs. Peak Limit					
CL Cable Loss					HPF High Pass Filter										


7.6. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)



Compliance Certification Service:
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 20 File#: 08U11720_pacino.EMI Date: 04-25-2008 Time: 15:54:19

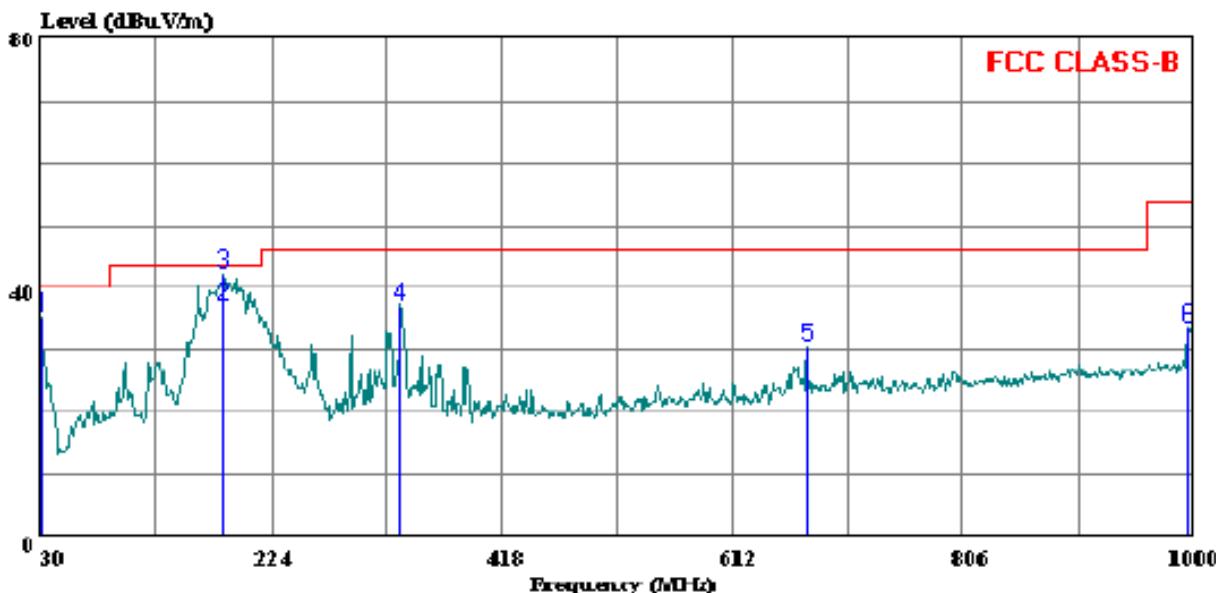

Trace: 17

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator:: Vien Tran
Project #: 08U11720
Company: Broadcom
Configuration:: EUT in Pacino laptop Amphenol antenna
Mode : Tx 5GHz Band
Target: FCC Class B

Page: 1


Freq	Read		Limit	Over	Remark	
	MHz	dBuV	Level	Line	Limit	
1	30.000	44.33	-9.13	35.20	40.00	-4.80 Peak
2	183.260	55.72	-18.52	37.20	43.50	-6.30 QP
3	183.260	60.83	-18.52	42.31	43.50	-1.19 Peak
4	332.640	52.08	-14.99	37.09	46.00	-8.91 Peak
5	675.050	39.17	-8.85	30.31	46.00	-15.69 Peak
6	996.120	36.33	-2.91	33.43	54.00	-20.57 Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 16 File#: 08U11720_pacino.EMI Date: 04-25-2008 Time: 15:42:00

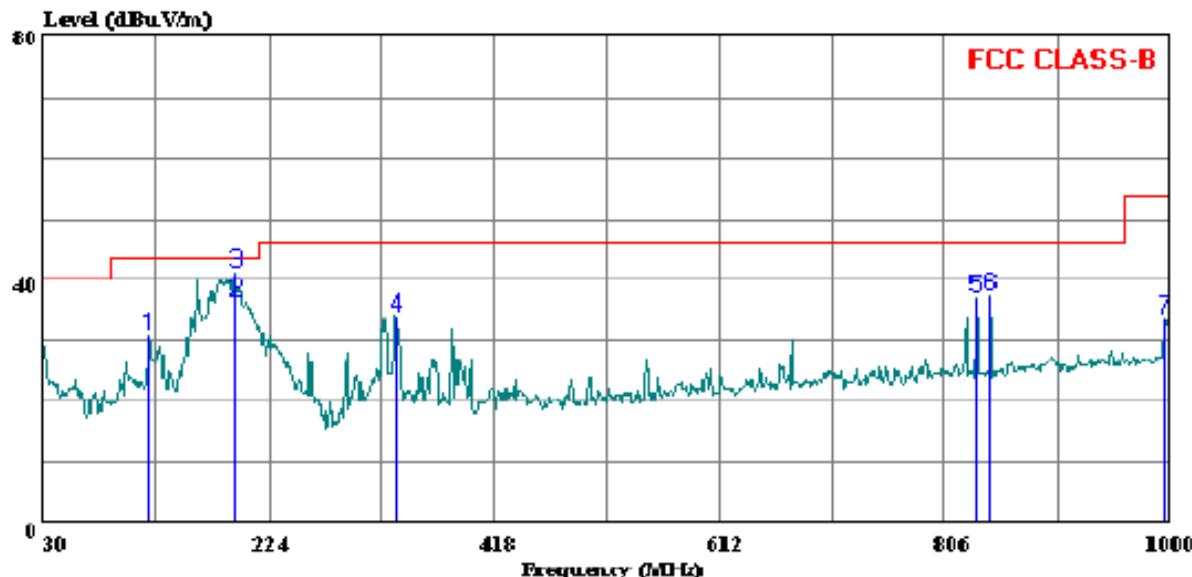

Trace: 13

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator:: Vien Tran
Project #: 08U11720
Company: Broadcom
Configuration:: EUT in Pacino laptop Amphenol antenna
Mode : Tx 5GHz Band
Target: FCC Class B

Page: 1

Freq	Read		Limit	Over	Remark
	Level	Factor			
MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	120.210	47.50	-16.73	30.77	43.50 -12.73 Peak
2	194.900	54.03	-17.78	36.25	43.50 -7.25 QP
3	194.900	58.83	-17.78	41.05	43.50 -2.45 Peak
4	333.610	49.00	-14.99	34.01	46.00 -11.99 Peak
5	833.160	43.50	-6.28	37.22	46.00 -8.78 Peak
6	845.770	43.50	-6.10	37.40	46.00 -8.60 Peak
7	996.120	36.50	-2.91	33.59	54.00 -20.41 Peak

8. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842f	4.89f	*(900f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824f	2.19f	*(180f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5

Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000/ <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 × 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 × 10 ⁻⁵ <i>f</i>	616 000/ <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, *f*, is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20) / \sqrt{S}}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10) / (d^2)}$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

CO-LOCATED MPE CALCULATIONS for Mobile configuration

For multiple colocated transmitters operating simultaneously the total power density can be calculated by summing the Power * Gain product (in linear units) of each transmitter.

yields

$$d = 0.282 * \sqrt{((P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)) / S}$$

where

d = distance in cm

Px = Power of transmitter x in mW

Gx = Numeric gain of antenna x

S = Power Density in mW/cm²

In the table below, Power and Gain are entered in units of dBm and dBi respectively, then converted to their linear forms for the purpose of the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Please see next page

RESULTS

(MPE distance equals 20 cm)

Mode	Band	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	FCC Power Density (mW/cm^2)	IC Power Density (W/m^2)
Bluetooth	2.4 GHz	0.70	3.15			
WLAN	5.2 GHz	15.30	0.52			
Combined				20.0	0.01	0.08

Mode	Band	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	FCC Power Density (mW/cm^2)	IC Power Density (W/m^2)
Bluetooth	2.4 GHz	0.70	3.15			
WLAN	5.3 GHz	18.70	0.52			
Combined				20.0	0.02	0.17

Mode	Band	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	FCC Power Density (mW/cm^2)	IC Power Density (W/m^2)
Bluetooth	2.4 GHz	0.70	3.15			
WLAN	5.6 GHz	20.70	3.32			
Combined				20.0	0.05	0.51

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit (dB)	FCC_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			QP	AV	QP (dB)	AV (dB)	
0.21	48.93	--	41.19	0.00	63.13	53.13	-14.20	-11.94	L1	
0.53	43.01	--	37.70	0.00	56.00	46.00	-12.99	-8.30	L1	
23.02	44.51	--	36.71	0.00	60.00	50.00	-15.49	-13.29	L1	
0.21	49.38	--	42.72	0.00	63.13	53.13	-13.75	-10.41	L2	
0.53	45.57	--	36.90	0.00	56.00	46.00	-10.43	-9.10	L2	
23.02	41.23	--	33.31	0.00	60.00	50.00	-18.77	-16.69	L2	
6 Worst Data										

LINE 1 RESULTS



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 17 File#: 08U11720_Pacino.EMI
Date: 04-25-2008 Time: 16:36:43

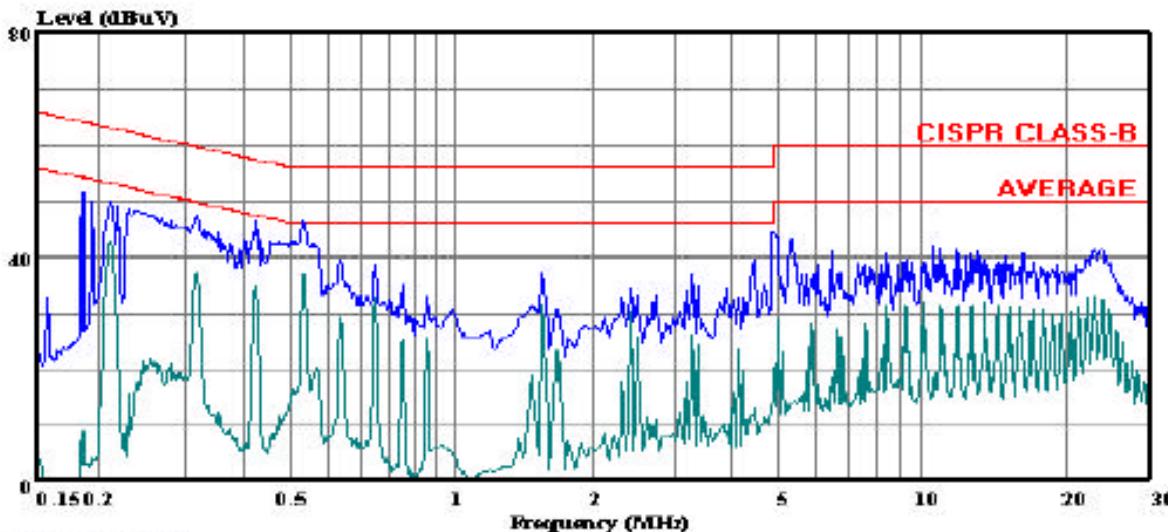

(Line Conduction)
Trace: 15

Ref Trace:


Condition: CISPR CLASS-B
Test Operator:: Vien Tran
Project #: : 08U11720
Company: : BroadCom Corporation
Configuration:: EUT in Pacino w/ Amphenol antenna
Mode: : TX worst case
Target: : FCC Class B
Voltage: : 115VAC / 60Hz
: Line 1: Peak (Blue); Average (Green)

LINE 2 RESULTS



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 24 File#: 08U11720_Pacino.EMI
Date: 04-25-2008 Time: 16:42:45

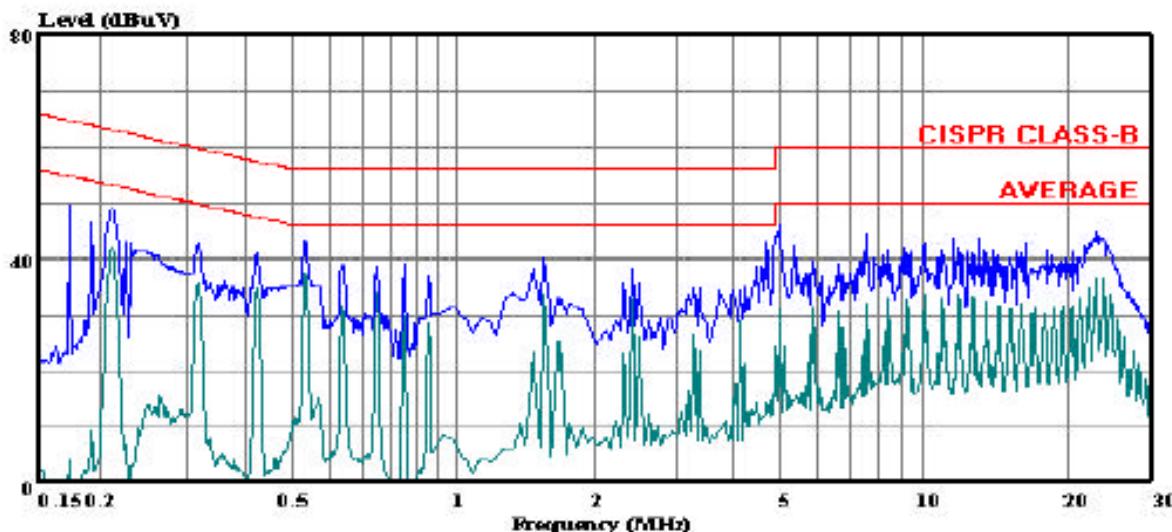

(Line Conduction)
Trace: 22

Ref Trace:

Condition: CISPR CLASS-B
Test Operator:: Vien Tran
Project #: : 08U11720
Company: : Broadcom Corporation
Configuration:: EUT in Pacino w/ Amphenol antenna
Mode: : TX worst case
Target: : FCC Class B
Voltage: : 115VAC / 60Hz
: Line 2: Peak (Blue); Average (Green)