




No. 8 Lane 724, Bo Ai Street, Zhubei City,
Hsin Chu Hsien 302, Taiwan, R.O.C.
TEL:03-656-9065
FAX:03-656-9085

Data: 11

File: E:\客戶 data\Brondcom\BCM943228Z.EM6 (14)

Date: 2015-07-16 Time: 13:38:48

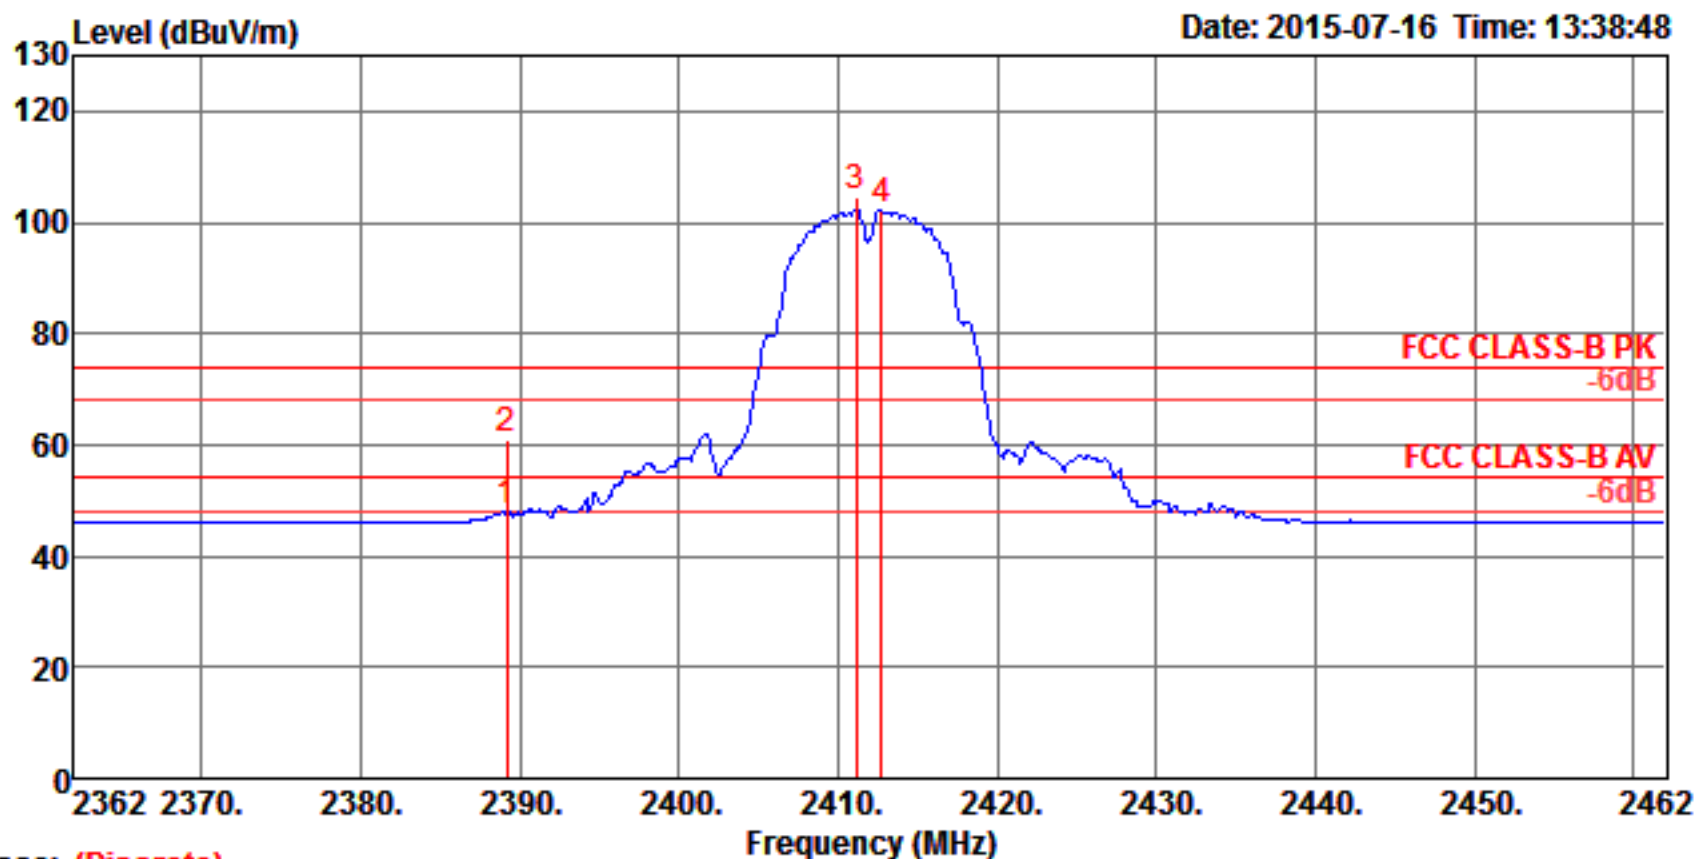

Trace: (Discrete)

Condition: FCC CLASS-B PK 3m HORN 912D 20150617 VERTICAL

: RBW:1000.000KHz VBW:1.000KHz SWT:0.400sec

Eut : BCM943228Z

Mode : TX 11B CH1 CCK 1M

Power : 64

Memo 5-1 : EUT Z ANT Y

Memo 5-2 : 1TX

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	cm	deg		
1	2389.13	48.00	54.00	-6.00	17.03	3.86	27.11	0.00	197	178	Average VERTICAL
2	2389.13	61.08	74.00	-12.92	30.11	3.86	27.11	0.00	197	178	Peak VERTICAL
3 0	2411.13	104.53	74.00	30.53	73.49	3.88	27.16	0.00	197	178	Peak VERTICAL
4 0	2412.72	102.24	54.00	48.24	71.17	3.89	27.18	0.00	197	178	Average VERTICAL




No. 8 Lane 724, Bo Ai Street, Zhubei City,
Hsin Chu Hsien 302, Taiwan, R.O.C.
TEL:03-656-9065
FAX:03-656-9085

Data: 12

File: E:\客戶 data\Brondcom\BCM943228Z.EM6 (14)

Date: 2015-07-16 Time: 13:45:12

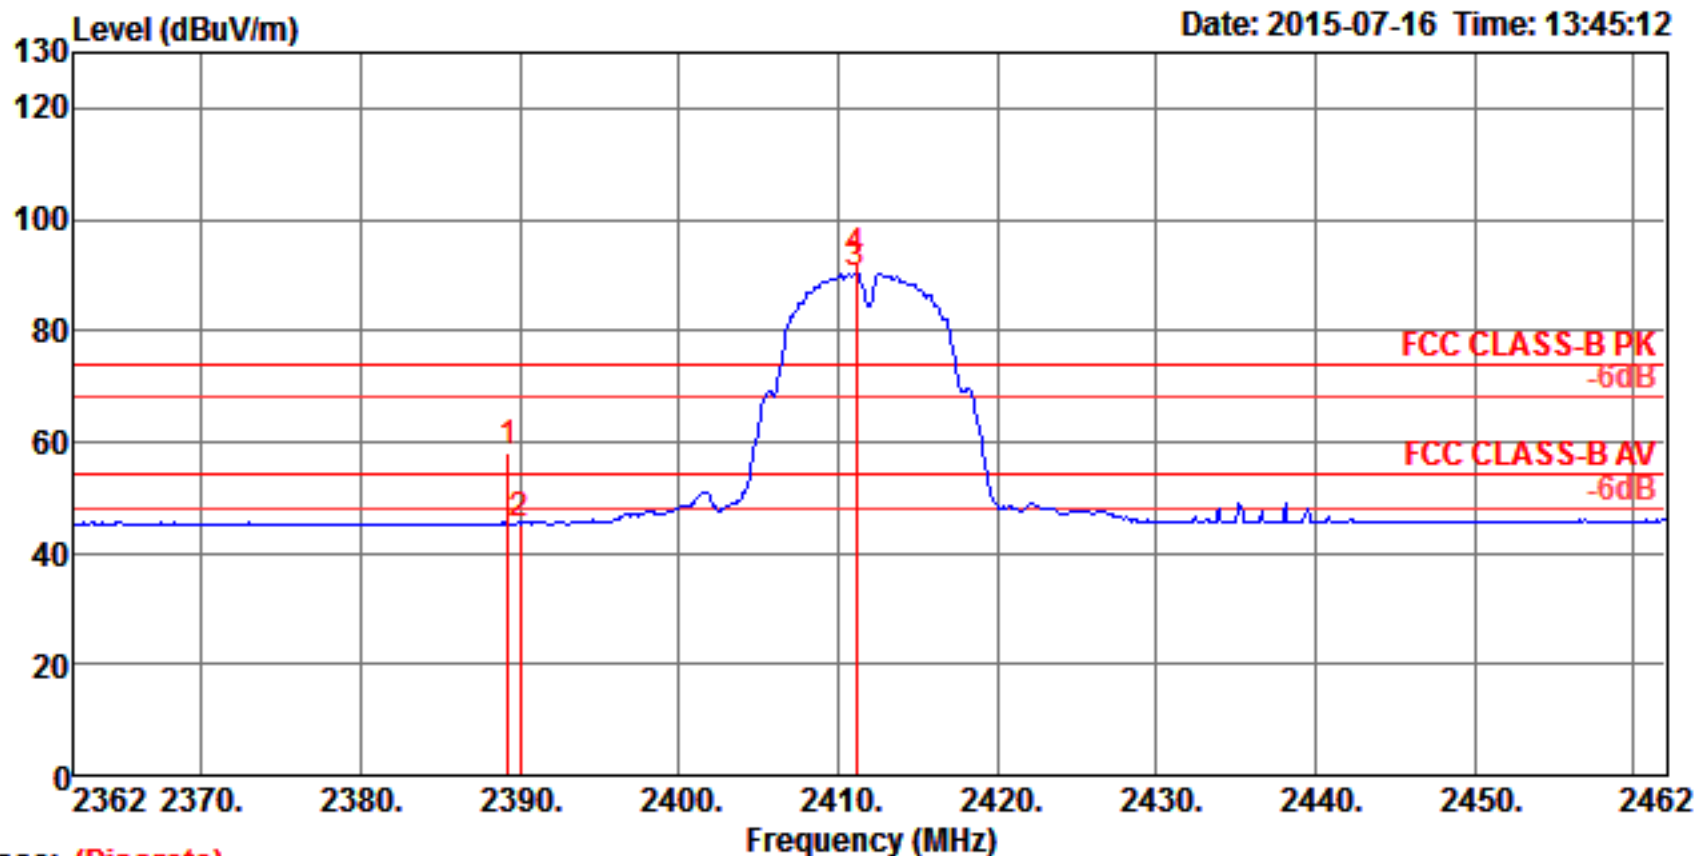

Trace: (Discrete)

Condition: FCC CLASS-B PK 3m HORN 912D 20150617 HORIZONTAL

: RBW:1000.000KHz VBW:1.000KHz SWT:0.400sec

Eut : BCM943228Z

Mode : TX 11B CH1 CCK 1M

Power : 64

Memo 5-1 : EUT Z ANT Y

Memo 5-2 : 1TX

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.28	58.16	74.00	-15.84	27.19	3.86	27.11	0.00	105	294	Peak HORIZONTAL
2	2390.00	45.32	54.00	-8.68	14.35	3.86	27.11	0.00	105	294	Average HORIZONTAL
3 0	2411.13	90.37	54.00	36.37	59.33	3.88	27.16	0.00	105	294	Average HORIZONTAL
4 0	2411.13	92.80	74.00	18.80	61.76	3.88	27.16	0.00	105	294	Peak HORIZONTAL




No. 8 Lane 724, Bo Ai Street, Zhubei City,
Hsin Chu Hsien 302, Taiwan, R.O.C.
TEL:03-656-9065
FAX:03-656-9085

Data: 13

File: E:\客戶 data\Brondcom\BCM943228Z.EM6 (14)

Date: 2015-07-16 Time: 14:01:43

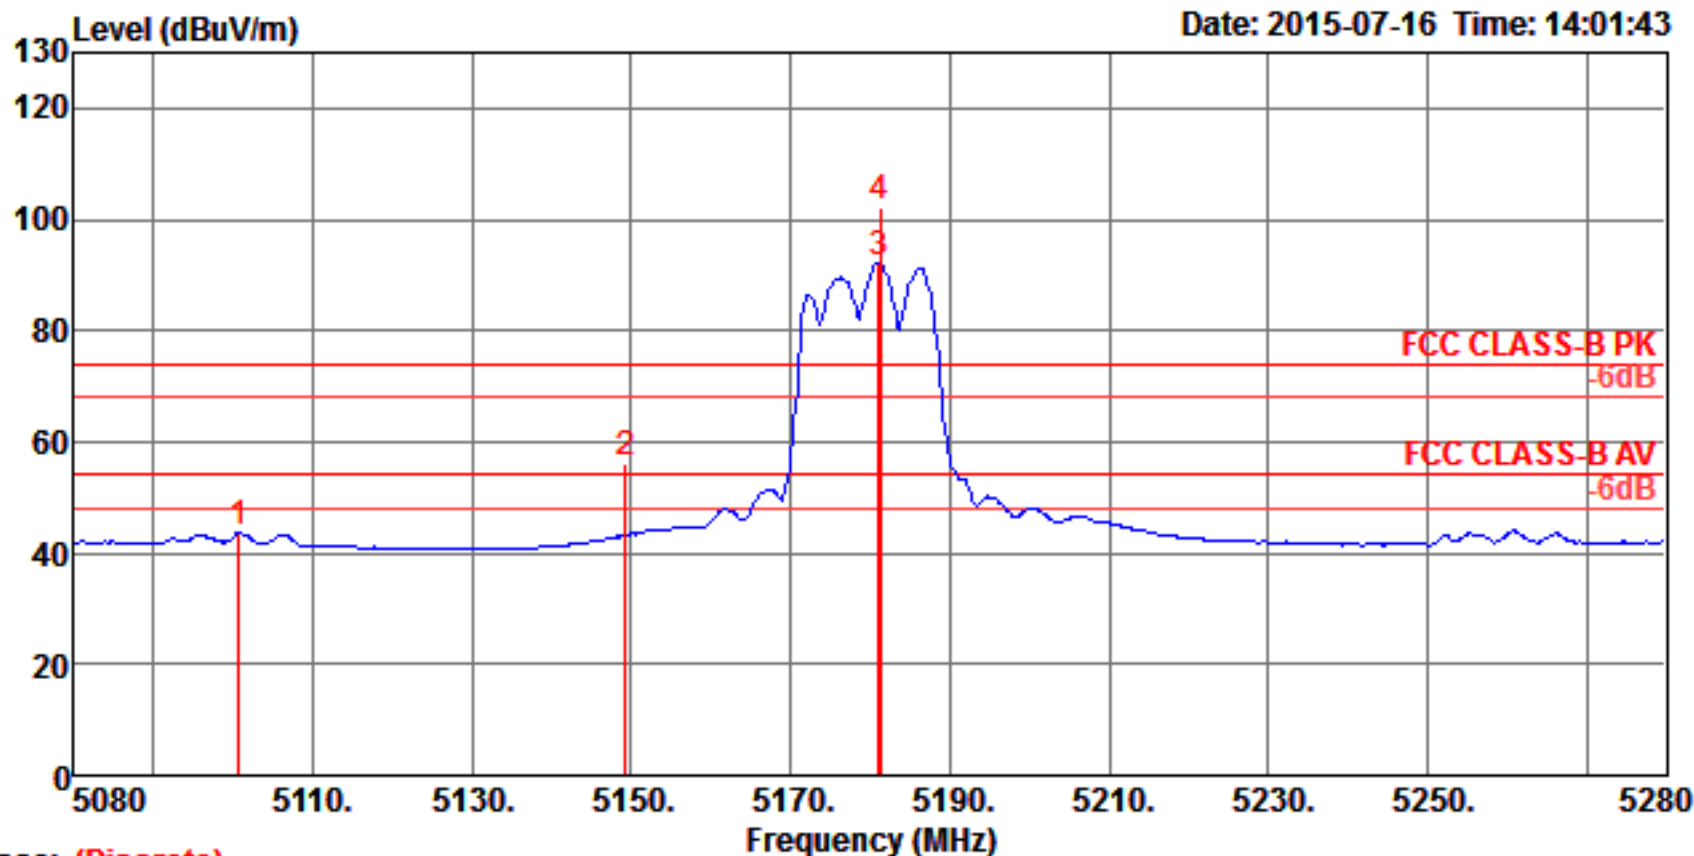

Trace: (Discrete)

Condition: FCC CLASS-B PK 3m HORN 912D 20150617 VERTICAL

: RBW:1000.000KHz VBW:1.000KHz SWT:0.400sec

Eut : BCM943228Z

Mode : TX 11A CH36 OFDM 6M

Power : 44

Memo 5-1 : EUT Z ANT Y

Memo 5-2 : 2TX

	Freq	Level	Limit	Over	Read	CableAntenna	Preampl	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5100.65	43.43	54.00	-10.57	39.82	5.77	31.48	33.64	179	359	Average VERTICAL
2	5149.20	56.29	74.00	-17.71	52.60	5.80	31.52	33.63	179	359	Peak VERTICAL
3 0	5181.15	92.28	54.00	38.28	88.53	5.82	31.55	33.62	179	359	Average VERTICAL
4 0	5181.20	102.35	74.00	28.35	98.60	5.82	31.55	33.62	179	359	Peak VERTICAL




No. 8 Lane 724, Bo Ai Street, Zhubei City,
Hsin Chu Hsien 302, Taiwan, R.O.C.
TEL:03-656-9065
FAX:03-656-9085

Data: 14

File: E:\客戶 data\Brondcom\BCM943228Z.EM6 (14)

Date: 2015-07-16 Time: 14:12:27

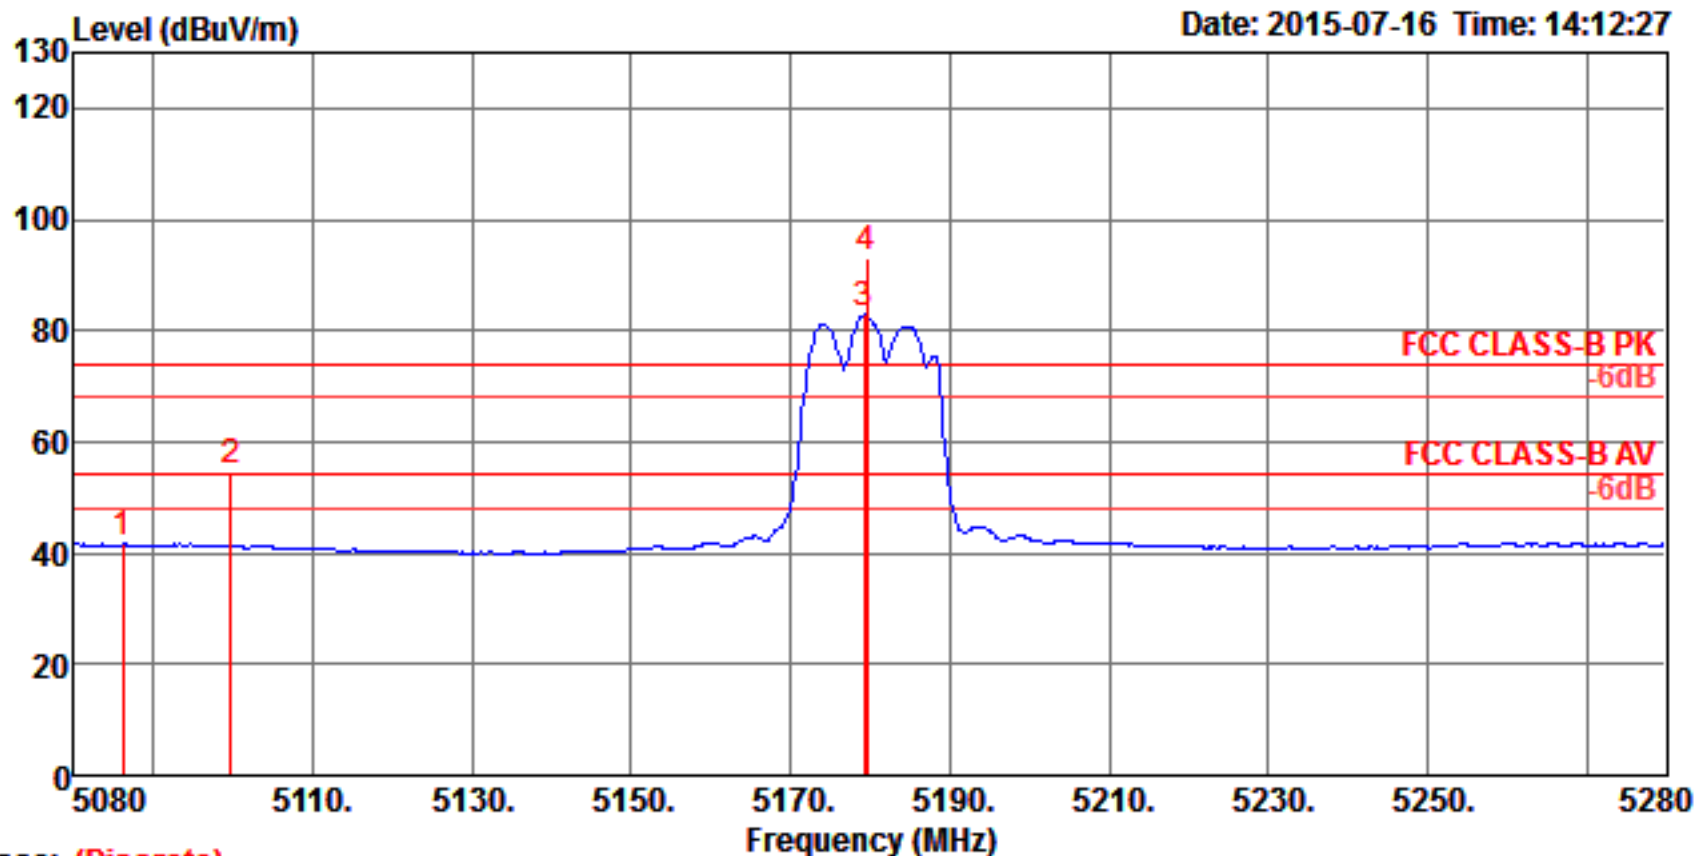

Trace: (Discrete)

Condition: FCC CLASS-B PK 3m HORN 912D 20150617 HORIZONTAL

: RBW:1000.000KHz VBW:1.000KHz SWT:0.400sec

Eut : BCM943228Z

Mode : TX 11A CH36 OFDM 6M

Power : 44

Memo 5-1 : EUT Z ANT Y

Memo 5-2 : 2TX

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor			
			dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5086.00	41.61	54.00	-12.39	38.02	5.76	31.47	33.64	170	62	Average HORIZONTAL
2	5099.60	54.58	74.00	-19.42	50.97	5.77	31.48	33.64	170	62	Peak HORIZONTAL
3 0	5179.20	82.82	54.00	28.82	79.07	5.82	31.55	33.62	170	62	Average HORIZONTAL
4 0	5179.60	93.26	74.00	19.26	89.51	5.82	31.55	33.62	170	62	Peak HORIZONTAL