

# ***FCC TEST REPORT***

**FCC ID** : QE845071TX27

**Applicant** : **Interactive Toy Concepts(HK) Ltd.**  
7/F., Eu Yan San Tower, 11-15 Chatham Road South, TST, Kowloon,  
Hong Kong

**Equipment Under Test (EUT) :**

Product description : R/C Helicopter

Model No. : 45071

**Standards** : FCC 15 Subpart C Paragraph 15.227

**Date of Test** : August 23, 2007

**Test Engineer** : Tiger Su

**Reviewed By** : 

PERPARED BY:  
**Waltek Services (Shenzhen) Co., Ltd.**

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen 518045, Guangdong,  
China.

Tel: 86-755-83551033

Fax: 86-755-83552400

## 2 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS .....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>5</b>
<b>4 GENERAL INFORMATION.....</b>	<b>6</b>
4.1 CLIENT INFORMATION .....	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T.....	6
4.4 DESCRIPTION OF SUPPORT UNITS .....	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>8</b>
<b>6 CONDUCTED EMISSION TEST .....</b>	<b>10</b>
6.1 TEST EQUIPMENT.....	10
6.2 TEST PROCEDURE .....	10
6.3 CONDUCTED TEST SETUP .....	11
6.4 EUT OPERATING CONDITION .....	11
6.5 CONDUCTED EMISSION LIMITS .....	12
6.6 CONDUCTED EMISSION TEST RESULT.....	12
<b>7 RADIATION EMISSION TEST.....</b>	<b>13</b>
7.1 TEST EQUIPMENT.....	13
7.2 MEASUREMENT UNCERTAINTY.....	13
7.3 TEST PROCEDURE .....	13
7.4 RADIATED TEST SETUP .....	14
7.5 SPECTRUM ANALYZER SETUP.....	15
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	15
7.7 SUMMARY OF TEST RESULTS .....	15
7.8 EUT OPERATING CONDITION .....	16
7.9 RADIATED EMISSIONS LIMIT.....	16
7.10 RADIATED EMISSIONS TEST RESULT.....	17
7.11 RADIATED EMISSION TEST DATA.....	17
<b>8 OCCUPIED BANDWIDTH .....</b>	<b>19</b>
8.1 TEST PROCEDURE .....	19
<b>9 PHOTOGRAPHS OF TESTING.....</b>	<b>21</b>
9.1 RADIATION EMISSION TEST VIEW .....	21
<b>10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>22</b>
10.1 EUT - FRONT VIEW .....	22
10.2 EUT - BACK VIEW .....	22
10.3 PCB- FRONT VIEW .....	23

10.4	PCB- BACK VIEW.....	23
<b>11</b>	<b>FCC ID LABEL.....</b>	<b>24</b>

### 3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (25MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

## 4 General Information

### 4.1 Client Information

Applicant:	<b>Interactive Toy Concepts(HK) Ltd.</b>
Address of Applicant:	7/F.,Eu Yan San Tower, 11-15 Chatham Road South, TST, Kowloon, Hong Kong
Manufacturer:	Interactive Toy Concepts (HK) Ltd.
Address:	7/F., Eu Yan San Tower, 11-15 Chatham Road South, TST, Kowloon, Hong Kong

### 4.2 General Description of E.U.T.

Product description:	R/C Helicopter
Model No.:	45071

### 4.3 Details of E.U.T.

Power Supply:	TX: 9 VDC Battery
---------------	-------------------

### 4.4 Description of Support Units

The EUT has been tested as an independent device unit.

### 4.5 Standards Applicable for Testing

The customer requested FCC tests for R/C Helicopter. The standards used were FCC 15 Paragraph 15.227, Paragraph 15.205, Paragraph 15.209, Paragraph 15.31,Paragraph 15.33, Paragraph 15.35.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 101879**

Compliance Engineering Service (China) EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 101879, September 28, 2004.

#### **4.7 Test Location**

All Emissions tests were performed at:-

No. 6 Bldg. 35 Jin Ao Industry Technolog Yuan, Jukeng Rd., Da-Dhui-Keng Cun, Guan Lan Zhen, Bao An Qu, ShenZhen City, China 518110

## 5 Equipment Used during Test

DESCRIPTION	MFR	MODEL#	SERIAL #	LAST CAL.	CAL.DUE	Firmware	Software
AMPLIFIER	MITEQ	AW-1604-3000	1093584	2007/06/10	2008/06/09	N/A	N/A
ANTENNA	EMCO	3142B	9910-1436	2007/06/10	2008/06/09	N/A	N/A
BILOG ANTENNA	SCHAFF NER	CBL6143	5082	2007/06/10	2008/06/09	N/A	N/A
Horn Antenna	ASA	NA	NA	2007/06/10	2008/06/09	N/A	N/A
Loop Antenna	R&S	6108	N/A	2007/06/10	2008/06/09	N/A	N/A
CABLE	TIME MICROW AVE	LMR-400	N-TYPE04	2007/06/10	2008/06/09	N/A	N/A
Spectrum Analyzer	Agilent	E7402A	MY420001 39	2007/06/10	2008/06/09	N/A	N/A
EMI test Receiver	ROHDE& SCHWAR Z	ESCI	1166.595K 03	2007/02/09	2008/02/08	N/A	N/A
Signal Generator	Agilent	8648C	3847M011 14	2007/02/09	2008/02/08	N/A	N/A

DESCRIPTION	MFR	MODEL#	SERIAL#	LAST CAL.	CAL. DUE	Firmware	Software
Receiver	R&S	ESPI3		2007/02/09	2008/02/08	Ver 3.32 SP2	Labview 5.0
LISN (EUT)	R&S	ENV216		2007/02/09	2008/02/08	N/A	N/A

LISN	EMCO	3825/2	8901-1459	2007/02/09	2008/02/08	N/A	N/A
SPECTRUM ANALYZER	ADVANT ENT	R3132	N02563	2007/06/10	2008/06/09	Ver F04	N/A

## 6 Conducted Emission Test

Product Name:	R/C Helicopter
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	.....
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 6.1 Test Equipment


Please refer to Section 5 this report.

### 6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

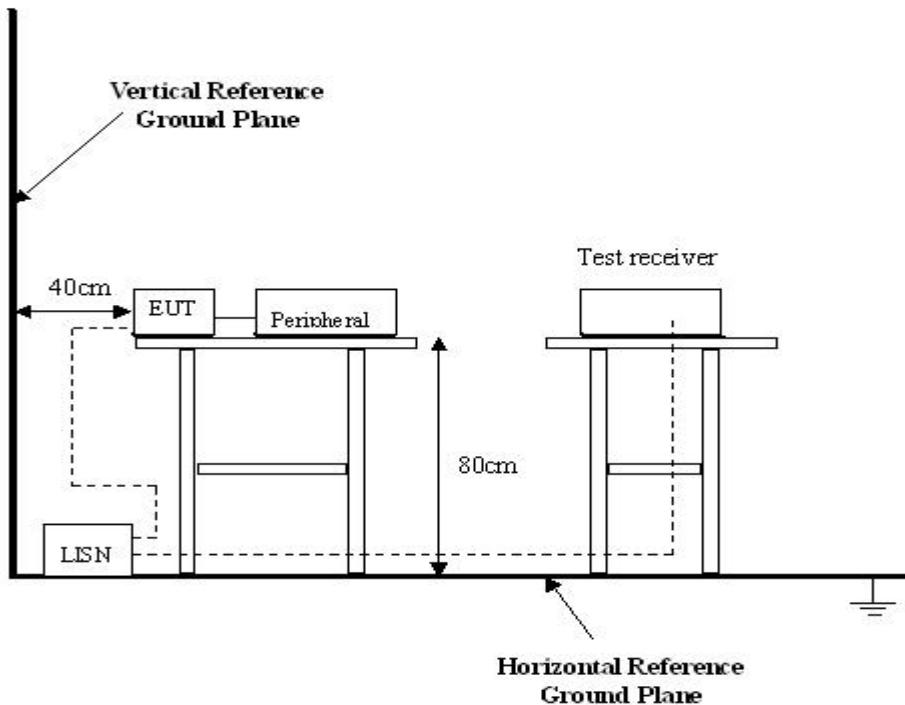

### 6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

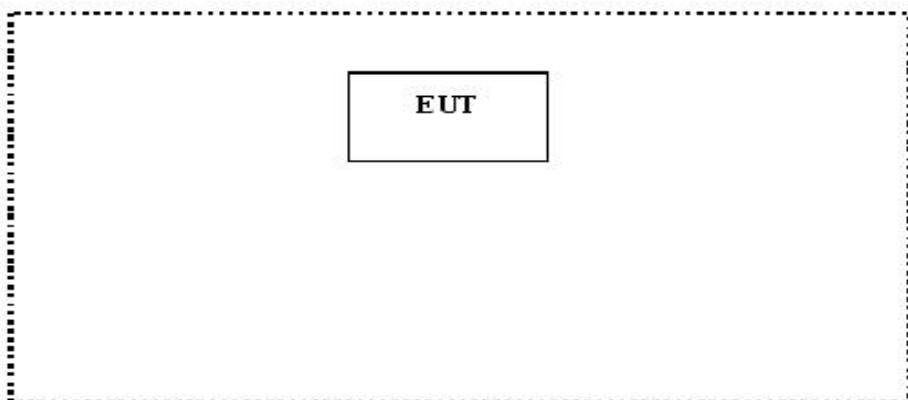

## 6.5 Conducted Emission Limits

66-56 dB $\mu$ V/m between 0.15MHz & 0.5MHz

56 dB $\mu$ V/m between 0.5MHz & 5MHz

60 dB $\mu$ V/m between 5MHz & 30MHz

**Note:** In the above limits, the tighter limit applies at the band edges.

## 6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

## 7 Radiation Emission Test

Product Name:	R/C Helicopter
Test Requirement:	FCC Part15 Paragraph 15.227
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	August 23, 2007
Frequency Range:	25MHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

### 7.1 Test Equipment

Please refer to Section 5 this report.

### 7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at CCS EMC Lab is +4.0 dB.


### 7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

5. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
6. The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

#### 7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209, Paragraph 15.227 limits.

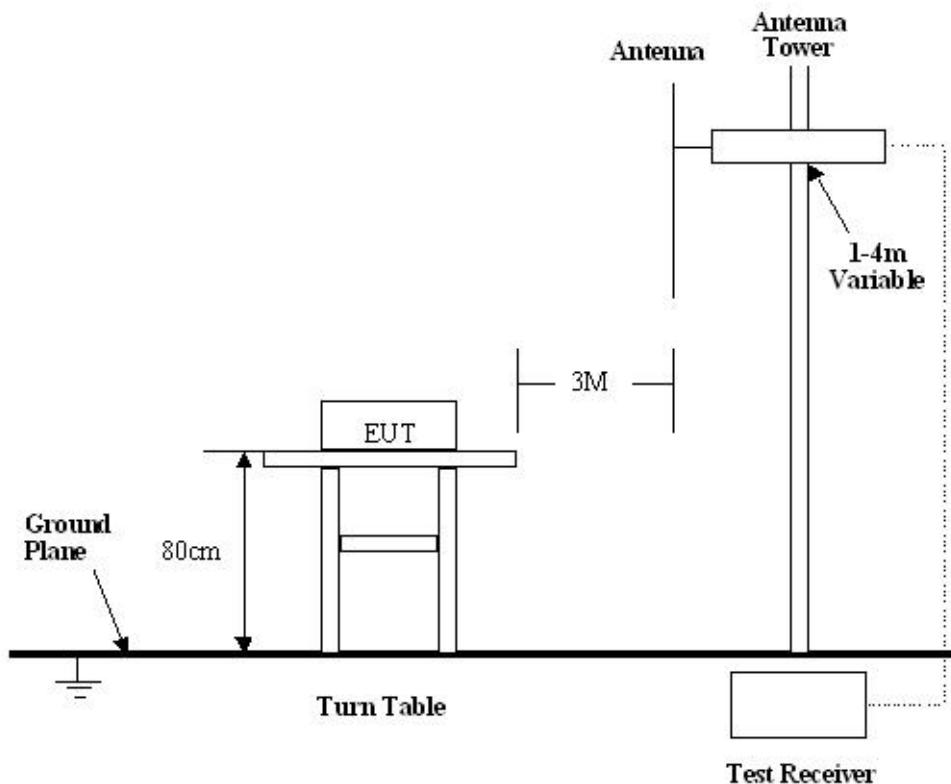

## 7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.227 Rules, the system was tested to 1000 MHz.

Start Frequency .....	25 MHz
Stop Frequency .....	1000 MHz
Sweep Speed Auto	
IF Bandwidth .....	100 kHz
Video Bandwidth.....	1 MHz
Quasi-Peak Adapter Bandwidth .....	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth .....	1MHz

## 7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## 7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.227 standards.

## 7.8 EUT Operating Condition

Same as section 6.4 of this report.

## 7.9 Radiated Emissions Limit

### A. FCC Part 15 subpart C Paragraph 15.227 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental
	dBuV/m
27.195	80

**Note:**(1) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

**Note:** (1) RF Voltage(dBuV)=20 log RF Voltage(uV)  
(2) In the Above Table,the tighter limit applies at the band edges.  
(3) Distance refers to the distance in meters between the measuring instrument antenna.

## 7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding The meter reading of the spectrum analyser (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna Correction factors are stated in terms of dB. The gain of the pressleter was accounted For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS  
33            20dBuV+10.36dB=30.36dBuV/m @3m

## 7.11 Radiated Emission Test Data

Test Item:	Radiated Emission Test Data
Test Voltage:	9 VDC Battery
Test Mode:	TX On
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
27.195	Vertical	72.3	80.0	7.7	1.5	60
27.195	Horizontal	68.7	80.0	11.3	1.5	120
54.390	Horizontal	28.6	40.0	11.4	1.5	140
81.585	Horizontal	27.1	40.0	12.9	1.8	60
108.780	Horizontal	26.5	43.5	17.0	1.5	120
135.975	Horizontal	28.7	43.5	14.8	1.2	45
163.170	Horizontal	29.7	43.5	13.8	1.5	60
190.365	Horizontal	28.3	43.5	15.2	1.8	120
217.560	Horizontal	30.4	46.0	15.6	1.5	180
244.755	Horizontal	31.6	46.0	14.4	1.5	120
271.950	Horizontal	34.6	46.0	11.4	1.5	60
299.145	Horizontal	35.3	46.0	10.7	1.0	180
54.390	Vertical	32.2	40.0	7.8	1.5	45
81.585	Vertical	33.5	40.0	12.8	1.8	60
108.780	Vertical	30.7	43.5	12.8	1.8	120
135.975	Vertical	33.6	43.5	9.9	1.5	180
163.170	Vertical	34.2	43.5	9.3	1.2	180
190.365	Vertical	32.1	43.5	11.4	1.0	45
217.560	Vertical	34.8	46.0	11.2	1.5	45
244.755	Vertical	35.6	46.0	10.4	1.5	120
271.950	Vertical	37.7	46.0	8.3	1.5	120
299.145	Vertical	38.1	46.0	7.9	1.5	180

## 8 Occupied Bandwidth


Rules of test : FCC Part15.227  
Test Date: August 23, 2007  
Test mode: TX On  
Temperature: 24 °C  
Humidity: 52%RH

### 8.1 Test Procedure


1. The field strength of any emissions which appear outside of the band shall not exceed the general radiated emission limits in section 15.209.
2. The useful radiated emission form the EUT was detected by the spectrum analyser with peak detector.
3. The result has been complied with the 15.227 (b), see the following plot:

Frequency MHz	Emission dBuV/m	Limit dBuV/m
26.96	11.62	40
27.28	12.02	40

The graph as below.

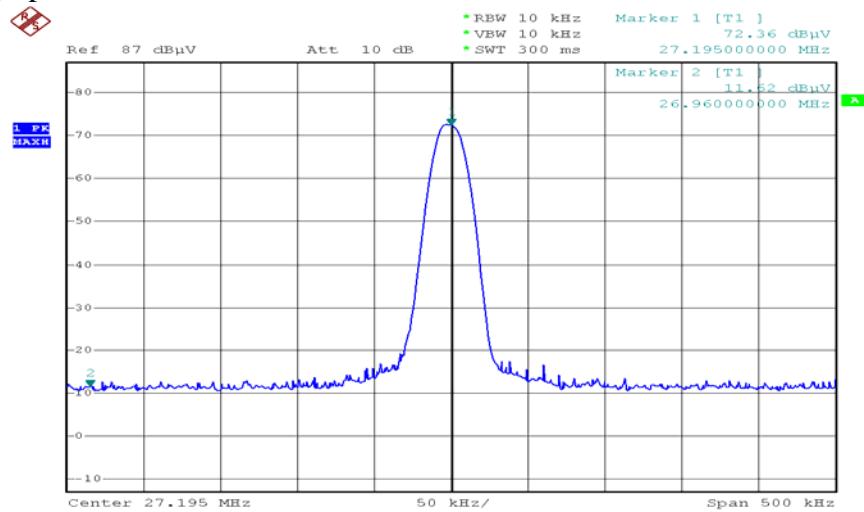



1  
Date: 22.AUG.2007 16:50:03

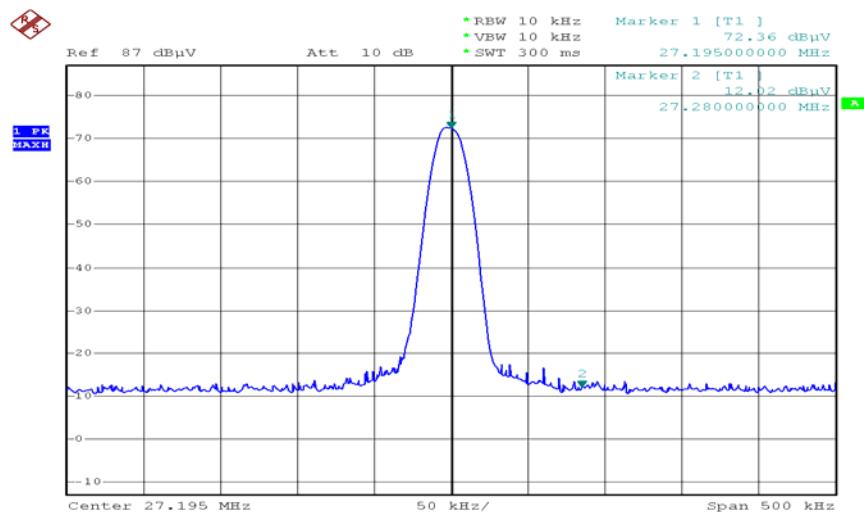

1  
Date: 22.AUG.2007 16:51:32

## 9 Photographs of Testing

### 9.1 Radiation Emission Test View

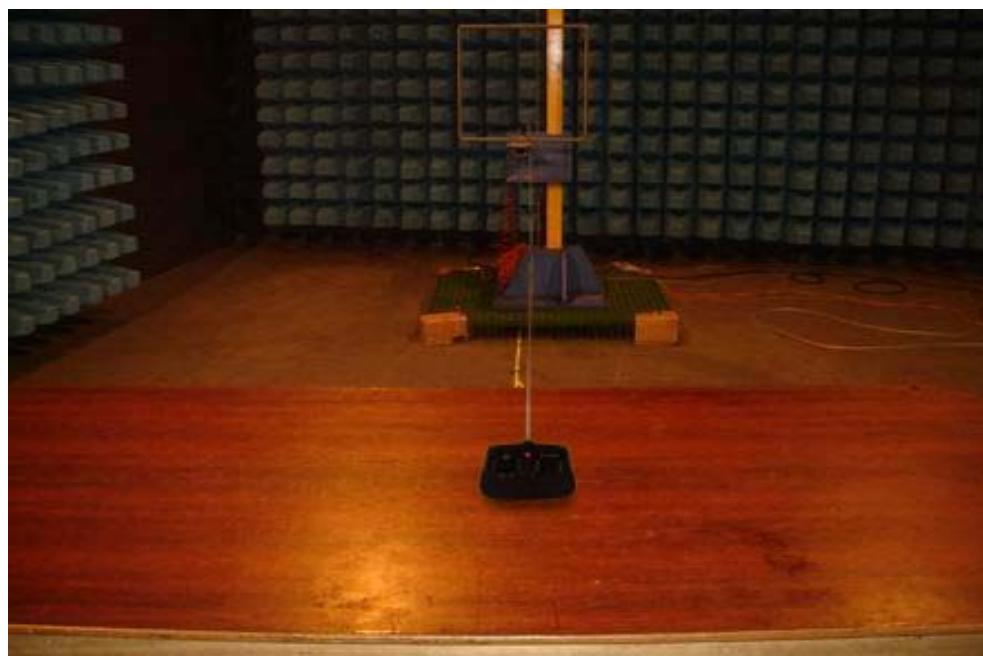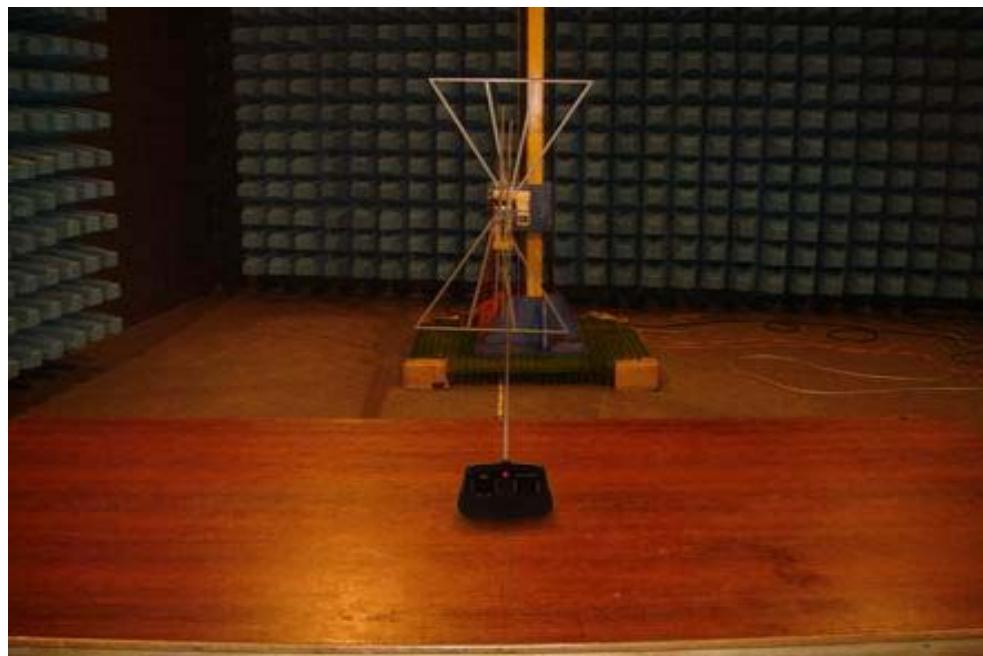

## 10 Photographs - Constructional Details


### 10.1 EUT - Front View




### 10.2 EUT - Back View



### 10.3 PCB- Front View

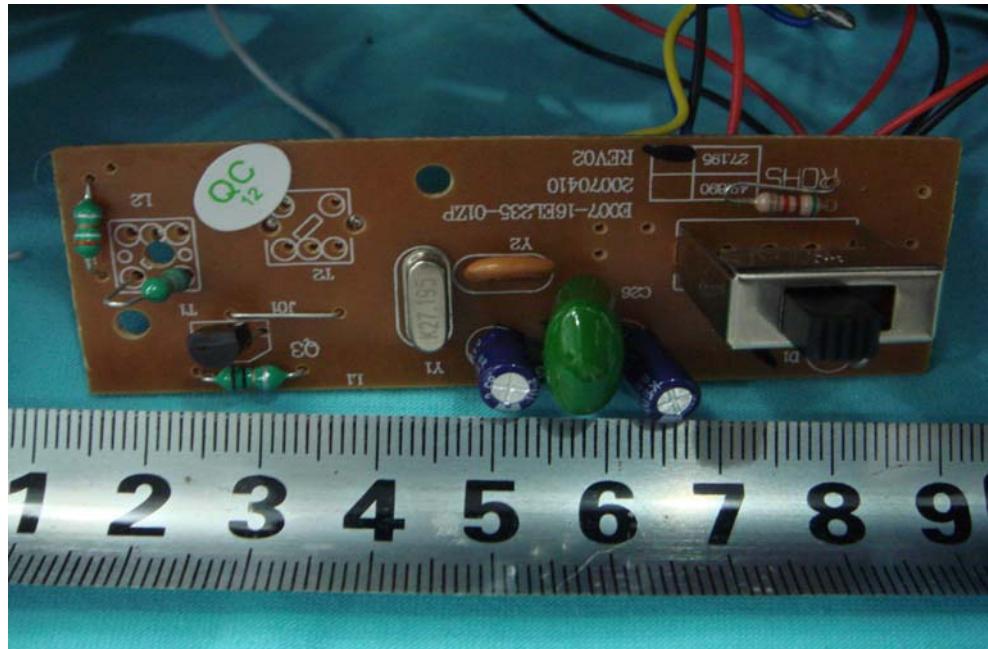

### 10.4 PCB- Back View

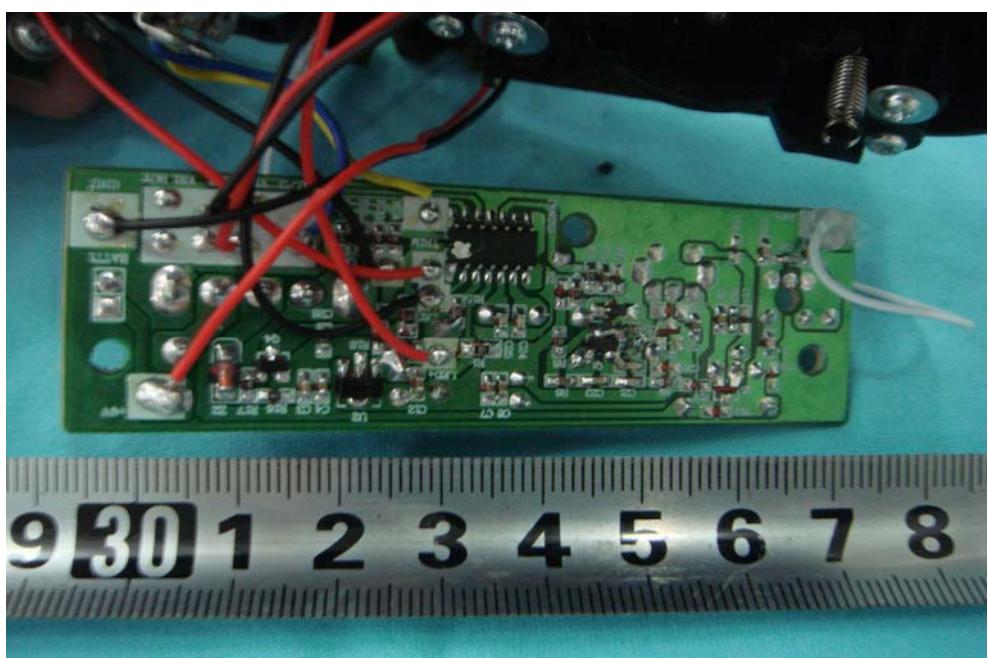

## 11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/proposed FCC Mark Location

