

SAR TEST REPORT

DT&C Co., Ltd. 42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel : 031-321-2664, Fax: 031-321-1664	Report No : DRTFCC1411-1504(3) Pages:(1) / (82) page	
1. Customer • Name : Rayence Co., Ltd. • Address : 1F, 2F, 3F, #402, 14, Samsung 1ro 1-gil, Hwaseong-si, Gyeonggi-do, 445-170, Korea 2. Use of Report : FCC Original Grant 3. Product Name (Model) : Medical Image Processing Unit (1012WCA) 4. Date of Test : 2015-10-28 5. Test Method Used : CFR §2.1093 6. Testing Environment : See appended test report 7. Test Result : ☒ Pass ☐ Fail		
The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.		
Affirmation	Tested by Name : Bumjun Park (Signature)	Technical Manager Name : Hakmin Kim (Signature)
2015. 10. 30. DT&C Co., Ltd.		

Test Report Version

Test Report No.	Date	Description
DRTFCC1411-1504(3)	Oct. 30, 2015	Initial issue

Table of Contents

1. DESCRIPTION OF DEVICE.....	5
1.1 Guidance Applied	6
1.2 Device Overview	6
1.3 Nominal and Maximum Output Power Specifications	6
1.4 DUT Antenna Locations	7
1.5 SAR Test Exclusions Applied	7
1.6 Power Reduction for SAR	7
1.7 Device Serial Numbers	7
2. INTROCUCTION	8
3. DESCRIPTION OF TEST EQUIPMENT	9
3.1 SAR MEASUREMENT SETUP	9
3.2 EX3DV4 Probe Specification	10
3.3 Probe Calibration Process	11
3.3.1 E-Probe Calibration	11
3.4 Data Extrapolation.....	12
3.5 SAM Twin PHANTOM	13
3.6 Device Holder for Transmitters.....	13
3.7 Brain & Muscle Simulation Mixture Characterization	14
3.8 SAR TEST EQUIPMENT	15
4. TEST SYSTEM SPECIFICATIONS.....	16
5. SAR MEASUREMENT PROCEDURE.....	17
5.1 Measurement Procedure.....	17
6. RF EXPOSURE LIMITS	18
7. FCC MEASUREMENT PROCEDURES.....	19
7.1 Measured and Reported SAR	19
7.2 SAR Testing with 802.11 Transmitters	19
7.2.1 General Device Setup	19
7.2.2 Initial Test Position Procedure	19
7.2.3 2.4 GHz SAR Test Requirements.....	20
7.2.4 OFDM Transmission Mode and SAR Test Channel Selection	20
7.2.5 Initial Test Configuration Procedure	20
7.2.6 Subsequent Test Configuration Procedures.....	21
7.2.7 Simultaneous Transmission of MIMO Chains	21
8. RF CONDUCTED POWERS.....	22
8.1 WLAN Conducted Powers	22
9. SYSTEM VERIFICATION.....	27
9.1 Tissue Verification	27
9.2 Test System Verification	28
10. SAR TEST RESULTS	29
10.1 Head SAR Results	29
10.2 Body SAR Results.....	30
10.3 SAR Test Notes	31
11. SAR MEASUREMENT VARIABILITY.....	32
11.1 Measurement Variability	32
11.2 Measurement Uncertainty	32
12. IEEE P1528 –MEASUREMENT UNCERTAINTIES.....	33
13. CONCLUSION.....	37



14. REFERENCES	38
Attachment 1. – Probe Calibration Data	40
Attachment 2. – Dipole Calibration Data	52
Attachment 3. – SAR SYSTEM VALIDATION.....	81

1. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

General Information

EUT type	Medical Image Processing Unit (1012WCA)			
FCC ID	QIIRY1012WA			
Equipment model name	1012WCA			
Equipment add model name	N/A			
Equipment serial no.	Identical prototype			
Mode(s) of Operation	2.4 GHz W-LAN(802.11b/g/n HT20/n HT40), 5 G W-LAN (802.11a/11n HT20/11n HT40)			
TX Frequency Range	Band	Mode	Bandwidth	Frequency
	DTS	802.11b/g/n	HT20	2412 ~ 2462 MHz
	U-NII-1	802.11n	HT40	2422 ~ 2452 MHz
		802.11a/n	HT20	5180 ~ 5240 MHz
RX Frequency Range	DTS	802.11n	HT40	5190 ~ 5230 MHz
		802.11b/g/n	HT20	2412 ~ 2462 MHz
	U-NII-1	802.11n	HT40	2422 ~ 2452 MHz
		802.11a/n	HT20	5180 ~ 5240 MHz
Equipment Class	Band	Measured Conducted Power [dBm]	Reported SAR	
			1g SAR (W/kg)	
			MIMO	
			Head	Body
DTS	2.4 GHz W-LAN	15.92	0.26	0.28
U-NII-1	5.2 GHz W-LAN	10.94	0.10	0.05
FCC Equipment Class	Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)			
Date(s) of Tests	2015-10-28			
Antenna Type	Internal Type Antenna			
Functions	- W-LAN(2.4GHz 802.11b/g/n(HT20)/n(HT40)), W-LAN(5GHz 802.11a/n(HT20)/n(HT40)) supported * No simultaneous transmission between WLAN(2.4GHz)& WLAN(5GHz)			

1.1 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04 Handset SAR v01r03
- FCC KDB Publication 690783 D01 SAR Listings on Grants v01r03
- FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB Publication 865664 D02 RF Exposure Reporting v01r02

1.2 Device Overview

Band	Mode	Operating Modes	Tx Frequency
DTS	2.4 GHz WLAN	Data	2412 ~ 2462 MHz
U-NII-1	5.2 GHz WLAN	Data	5180 ~ 5240 MHz


1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

Band & Mode			Modulated Average[dBm]								
			Ant. 1			Ant. 2			MIMO		
			Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High	Ch Low	Ch Mid	Ch High
DTS	IEEE 802.11b (2.4 GHz)	Maximum	16.0	16.5	17.0	16.0	16.0	16.0	19.0	19.5	19.5
		Nominal	15.0	15.5	16.0	15.0	15.0	15.0	18.0	18.5	18.5
	IEEE 802.11g (2.4 GHz)	Maximum	9.5	15.0	9.5	9.5	14.5	9.5	12.5	17.5	12.5
		Nominal	8.5	14.0	8.5	8.5	13.5	8.5	11.5	16.5	11.5
	IEEE 802.11n HT20 (2.4 GHz)	Maximum	10.5	16.0	11.5	9.5	14.5	10.5	13.0	18.0	14.0
		Nominal	9.5	15.0	10.5	8.5	13.5	9.5	12.0	17.0	13.0
	IEEE 802.11n HT40 (2.4 GHz)	Maximum	9.0	13.5	10.0	7.5	12.5	9.0	11.0	16.0	12.5
		Nominal	8.0	12.5	9.0	6.5	11.5	8.0	10.0	15.0	11.5

Band & Mode			Modulated Average[dBm]											
			Ant. 1				Ant. 2				MIMO			
			Ch Low	Ch Mid-1	Ch Mid-2	Ch High	Ch Low	Ch Mid-1	Ch Mid-2	Ch High	Ch Low	Ch Mid-1	Ch Mid-2	Ch High
U-NII-1	IEEE 802.11a (5.2 GHz)	Maximum	12.0	12.0	12.0	12.5	9.5	9.5	10.0	10.0	14.0	14.0	14.0	14.5
		Nominal	11.0	11.0	11.0	11.5	8.5	8.5	9.0	9.0	13.0	13.0	13.0	13.5
U-NII-1	IEEE 802.11n HT20 (5.2 GHz)	Maximum	12.5	13.0	13.5	13.5	10.0	10.5	11.0	11.0	14.5	15.0	15.5	15.5
		Nominal	11.5	12.0	12.5	12.5	9.0	9.5	10.0	10.0	13.5	14.0	14.5	14.5
U-NII-1	IEEE 802.11n HT40 (5.2 GHz)	Maximum	11.5	-	-	13.5	8.5	-	-	11.0	13.5	-	-	15.5
		Nominal	10.5	-	-	12.5	7.5	-	-	10.0	12.5	-	-	14.5

1.4 DUT Antenna Locations

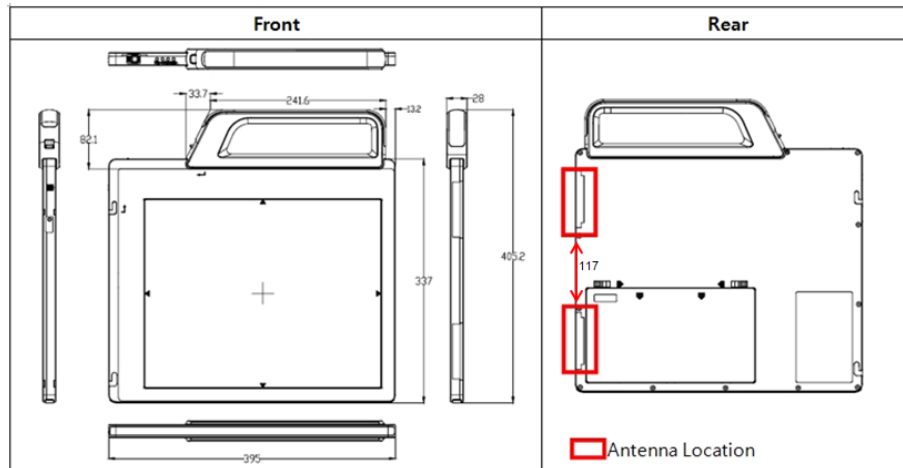

Note: Exact antenna dimensions and separation distances are shown in the “Antenna Location_QIIRY1012WA” in the FCC Filing.

1.5 SAR Test Exclusions Applied

(A) WIFI

Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of **2.4 GHz WIFI** (rounded to the nearest mW) and the antenna 1 to user separation distance, **2.4 GHz WIFI SAR was required**; $[(50/5) * \sqrt{2.462}] = \underline{15.7} > 3.0$.

Based on the maximum conducted power of **2.4 GHz WIFI** (rounded to the nearest mW) and the antenna 2 to user separation distance, **2.4 GHz WIFI SAR was required**; $[(40/5) * \sqrt{2.462}] = \underline{12.5} > 3.0$.

Based on the maximum conducted power of **5.2 GHz WIFI** (rounded to the nearest mW) and the antenna 1 to user separation distance, **5.2 GHz WIFI SAR was required**; $[(22/5) * \sqrt{5.24}] = \underline{10.2} > 3.0$.

Based on the maximum conducted power of **5.2 GHz WIFI** (rounded to the nearest mW) and the antenna 2 to user separation distance, **5.2 GHz WIFI SAR was required**; $[(13/5) * \sqrt{5.24}] = \underline{5.8} > 3.0$.

Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

1.6 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.7 Device Serial Numbers

Band & Mode	Head Serial Number	Body-Worn Serial Number
2.4 GHz WLAN	FCC #1	FCC #1

2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95*.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m^3)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller each pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i7-3770 3.40 GHz desktop computer with Windows 7 system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robotis connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

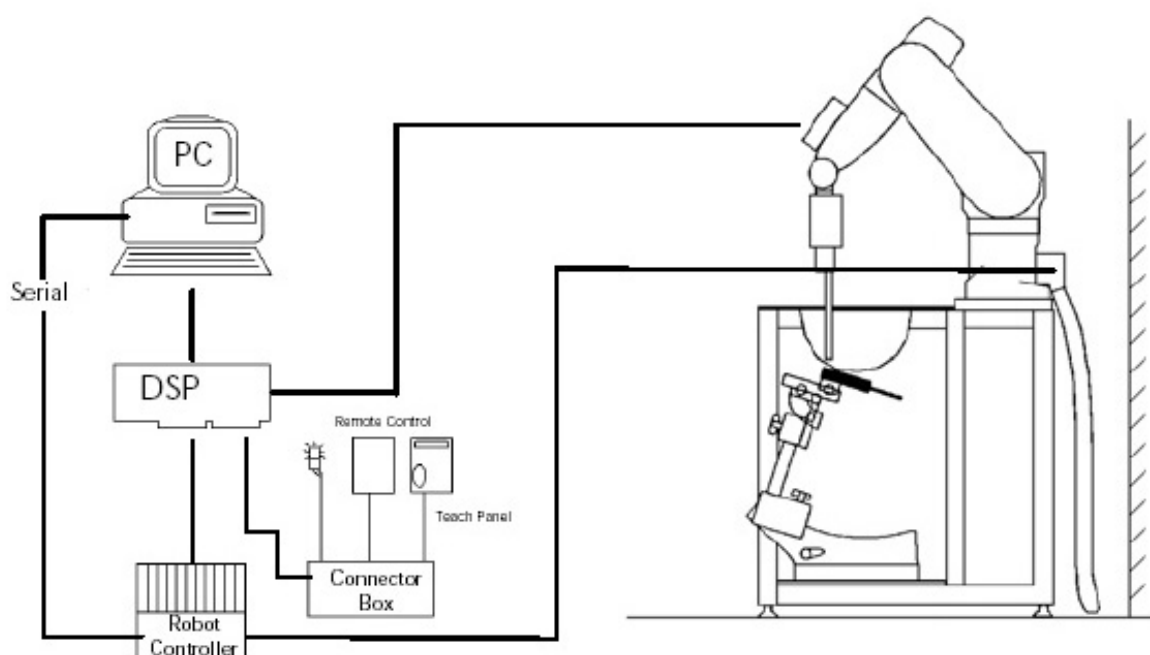


Figure 3.1 SAR Measurement System Setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

3.2 EX3DV4 Probe Specification

Calibration	In air from 10 MHz to 6 GHz
	In brain and muscle simulating tissue at Frequencies of 300 MHz, 450 MHz, 600 MHz, 750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2300 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz
Frequency	10 MHz to 6 GHz
Linearity	± 0.2 dB(30 MHz to 6 GHz)
Dynamic	10 μ W/g to > 100 mW/g
Range	Linearity : ± 0.2 dB
Dimensions	Overall length : 337 mm
Tip length	20 mm
Body diameter	12 mm
Tip diameter	2.5 mm
Distance from probe tip to sensor center	1.0 mm
Application	SAR Dosimetry Testing Compliance tests of mobile phones




Figure 3.2 Triangular Probe Configurations



Figure 3.3 Probe Thick-Film Technique



DAE System

The SAR measurements were conducted with the dosimetric probe ES3DV3, designed in the classical triangular configuration(see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multitier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

3.3 Probe Calibration Process

3.3.1 E-Probe Calibration

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

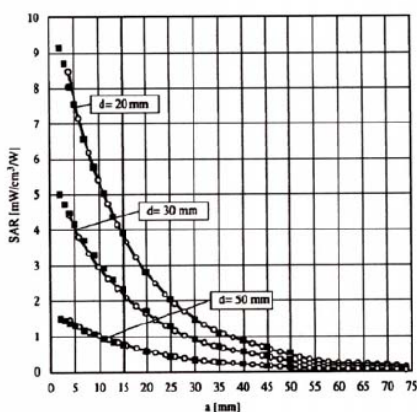


Figure 3.4 E-Field and Temperature Measurements at 900MHz

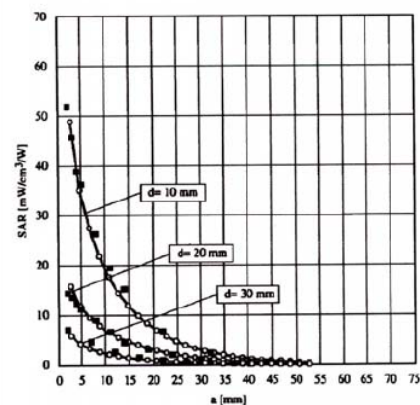


Figure 3.5 E-Field and Temperature Measurements at 1800MHz

3.4 Data Extrapolation

The DASY5 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{free} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

3.5 SAM Twin PHANTOM

The SAM Twin Phantom V5.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)



Figure 3.6 SAM Twin Phantom

SAM Twin Phantom Specification:

Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
	Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet

Specific Anthropomorphic Mannequin (SAM) Specifications:

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 3.7). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



Figure 3.7 Sam Twin Phantom shell

3.6 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c, V5.0 or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.8 Mounting Device

3.7 Brain & Muscle Simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.



Figure 3.9 Simulated Tissue

Table3.1 Composition of the Tissue Equivalent Matter

Ingredients (% by weight)	Frequency (MHz)							
	835		1900		2450		5200 ~ 5800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.19	50.75	55.24	70.23	71.88	73.40	65.52	80.00
Salt (NaCl)	1.480	0.940	0.310	0.290	0.160	0.060	-	-
Sugar	57.90	48.21	-	-	-	-	-	-
HEC	0.250	-	-	-	-	-	-	-
Bactericide	0.180	0.100	-	-	-	-	-	-
Triton X-100	-	-	-	-	19.97	-	17.24	-
DGBE	-	-	44.45	29.48	7.990	26.54	-	-
Diethylene glycol hexyl ether	-	-	-	-	-	-	17.24	-
Polysorbate (Tween) 80	-	-	-	-	-	-	-	20.00
Target for Dielectric Constant	41.5	55.2	40.0	53.3	39.2	52.7	-	-
Target for Conductivity (S/m)	0.90	0.97	1.40	1.52	1.80	1.95	-	-

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

3.8 SAR TEST EQUIPMENT

Table 3.2 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	Robot	SCHMID	TX90XL	N/A	N/A	F13/5RR2A1/A/01
☒	Robot Controller	SCHMID	C58C	N/A	N/A	F13/5RR2A1/C/01
☒	Joystick	SCHMID	N/A	N/A	N/A	S-13200990
☒	Intel Core i7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Laptop Holder	SCHMID	SMLH1001CD	N/A	N/A	N/A
☒	2mm Oval Phantom ELI5	SCHMID	QDIVA001BB	N/A	N/A	1223
☒	Data Acquisition Electronics	SCHMID	DAE4V1	2015-08-27	2016-08-27	1396
☒	Dosimetric E-Field Probe	SCHMID	EX3DV4	2015-09-29	2016-09-29	3933
☐	Dummy Probe	N/A	N/A	N/A	N/A	N/A
☒	2450MHz SAR Dipole	SCHMID	D2450V2	2015-09-28	2017-09-28	726
☒	5GHz SAR Dipole	SCHMID	D5GHzV2	2015-03-23	2017-03-23	1103
☒	Network Analyzer	Agilent	E5071C	2015-10-20	2016-10-20	MY46106970
☒	Signal Generator	Agilent	ESG-3000A	2015-06-26	2016-06-26	US37230529
☒	Signal Generator	Agilent	E4438C	2015-09-09	2016-09-09	US41461520
☒	Amplifier	EMPOWER	BBS3Q7ELU	2015-09-09	2016-09-09	1020
☒	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2015-10-20	2016-10-20	1005
☒	Power Meter	HP	EPM-442A	2015-02-26	2016-02-26	GB37170267
☒	Power Meter	Anritsu	ML2495A	2015-09-23	2016-09-23	1435003
☒	Wide Bandwidth Power Sensor	Anritsu	MA2490A	2015-09-23	2016-09-23	1409034
☒	Power Sensor	HP	8481A	2015-02-26	2016-02-26	3318A96566
☒	Power Sensor	HP	8481A	2015-02-06	2016-02-06	2702A65976
☒	Dual Directional Coupler	Agilent	778D-012	2015-01-06	2016-01-06	50228
☒	Dual Directional Coupler	HP	772D	2015-07-27	2016-07-27	2889A01064
☒	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2015-09-09	2016-09-09	N/A
☒	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2015-02-25	2016-02-25	N/A
☒	Attenuators(3 dB)	Agilent	8491B	2015-06-26	2016-06-26	MY39260700
☒	Attenuators(10 dB)	WEINSCHEL	23-10-34	2015-01-06	2016-01-06	BP4387
☐	Step Attenuator	HP	8494A	2015-09-10	2016-09-10	3308A33341
☒	Dielectric Probe kit	SCHMID	DAK-3.5	2014-12-09	2015-12-09	1092

NOTE: The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. Each equipment item was used solely within its respective calibration period.

4. TEST SYSTEM SPECIFICATIONS

Automated TEST SYSTEM SPECIFICATIONS:

Positioner

Robot	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	0.02 mm
No. of axis	6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor	Intel Core i7-3770
Clock Speed	3.40 GHz
Operating System	Windows 7 Professional
Data Card	DASY5 PC-Board

Data Converter

Features	Signal, multiplexer, A/D converter. & control logic
Software	DASY5
Connecting Lines	Optical downlink for data and status info Optical uplink for commands and clock

PC Interface Card

Function	24 bit (64 MHz) DSP for real time processing Link to DAE 4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot
-----------------	--

E-Field Probes

Model	EX3DV4 S/N: 3933
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	± 0.2 dB (30 MHz to 6 GHz)

Phantom

Phantom	SAM Twin Phantom (V5.0)
Shell Material	Composite
Thickness	2.0 ± 0.2 mm



Figure 2.2 DASY5 Test System

5. SAR MEASUREMENT PROCEDURE

5.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:




Figure 5.1
Sample SAR Area Scan

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 5-1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 5-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

Frequency	Maximum Area Scan Resolution (mm) (Δx_{area} , Δy_{area})	Maximum Zoom Scan Resolution (mm) (Δx_{zoom} , Δy_{zoom})	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥ 22

Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

*Also compliant to IEEE 1528-2013 Table 6

6. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-2005

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

7. FCC MEASUREMENT PROCEDURES

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

7.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96 % is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.2.2 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

7.2.3 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

7.2.4 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.2.5 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

7.2.6 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

7.2.7 Simultaneous Transmission of MIMO Chains

The simultaneous transmission conditions for MIMO must be considered separately for each standalone and aggregated frequency band according to the 802.11 transmission mode configurations and exposure conditions to determine SAR compliance. The aggregate maximum output power of all simultaneous transmitting antennas in all transmission chains may be used to determine SAR test exclusion for each frequency band and transmission mode configuration. The most conservative SAR test separation distance among the antennas must be used to apply the standalone SAR test exclusion provisions in KDB Publication 447498. When this power-based standalone SAR test exclusion does not apply, the sum of 1-g SAR provision in KDB Publication 447498 should be used to determine simultaneous transmission SAR test exclusion.

8. RF CONDUCTED POWERS

8.1 WLAN Conducted Powers

Mode	Freq.	Channel	802.11b (2.4 GHz) Conducted Power (dBm) Ant 1			
			Data Rate (Mbps)			
	(MHz)		1	2	5.5	11
802.11b	2412	1	15.99	15.94	15.88	15.83
	2437	6	16.48	16.45	16.44	16.43
	2462	11	<u>16.81</u>	16.79	16.76	16.68

Table 8.1 IEEE 802.11b Average RF Power Ant 1

Mode	Freq.	Channel	802.11b (2.4 GHz) Conducted Power (dBm) Ant 2			
			Data Rate (Mbps)			
	(MHz)		1	2	5.5	11
802.11b	2412	1	<u>15.92</u>	15.88	15.83	15.82
	2437	6	15.85	15.79	15.74	15.67
	2462	11	15.73	15.71	15.66	15.60

Table 8.2 IEEE 802.11b Average RF Power Ant 2

Mode	Freq.	Channel	802.11b (2.4 GHz) Conducted Power (dBm) Ant 1+2			
			Data Rate (Mbps)			
	(MHz)		1	2	5.5	11
802.11b	2412	1	18.97	18.92	18.87	18.84
	2437	6	19.19	19.14	19.12	19.08
	2462	11	<u>19.31</u>	19.29	19.26	19.18

Table 8.3 IEEE 802.11b Average RF Power Ant 1 + 2

Mode	Freq.	Channel	802.11g (2.4 GHz) Conducted Power (dBm) Ant 1							
			Data Rate (Mbps)							
	(MHz)		6	9	12	18	24	36	48	54
802.11g	2412	1	9.25	9.22	9.17	9.13	9.13	9.12	9.08	8.99
	2437	6	14.35	14.31	14.24	14.20	14.18	14.15	14.12	14.06
	2462	11	9.25	9.23	9.21	9.18	9.14	9.10	9.04	8.98

Table 8.4 IEEE 802.11g Average RF Power Ant 1

Mode	Freq.	Channel	802.11g (2.4 GHz) Conducted Power (dBm) Ant 2							
			Data Rate (Mbps)							
	(MHz)		6	9	12	18	24	36	48	54
802.11g	2412	1	9.18	9.13	9.12	9.08	9.05	8.98	8.95	8.90
	2437	6	14.47	14.42	14.36	14.34	14.27	14.21	14.14	14.07
	2462	11	9.25	9.21	9.17	9.13	9.05	9.00	9.00	8.94

Table 8.5 IEEE 802.11g Average RF Power Ant 2

Mode	Freq.	Channel	802.11g (2.4 GHz) Conducted Power (dBm) Ant 1+2							
			Data Rate (Mbps)							
	(MHz)		6	9	12	18	24	36	48	54
802.11g	2412	1	12.23	12.19	12.16	12.12	12.10	12.06	12.03	11.96
	2437	6	17.42	17.38	17.31	17.28	17.24	17.19	17.14	17.08
	2462	11	12.26	12.23	12.20	12.17	12.11	12.06	12.03	11.97

Table 8.6 IEEE 802.11g Average RF Power Ant 1+2

Mode	Freq.	Channel	802.11n HT20 (2.4 GHz) Conducted Power (dBm) Ant 1							
			Data Rate (Mbps)							
	(MHz)		6.5	13	19.5	26	39	52	58.5	65
802.11n (HT-20)	2412	1	10.36	10.33	10.28	10.26	10.22	10.16	10.16	10.10
	2437	6	15.64	15.59	15.54	15.47	15.41	15.39	15.36	15.31
	2462	11	11.43	11.39	11.37	11.33	11.33	11.25	11.21	11.19

Table 8.7 IEEE 802.11n HT20 Average RF Power Ant 1

Mode	Freq.	Channel	802.11n HT20 (2.4 GHz) Conducted Power (dBm) Ant 2							
			Data Rate (Mbps)							
	(MHz)		6.5	13	19.5	26	39	52	58.5	65
802.11n (HT-20)	2412	1	9.22	9.21	9.15	9.09	9.09	9.03	8.98	8.96
	2437	6	14.18	14.12	14.08	14.00	13.98	13.93	13.88	13.88
	2462	11	10.48	10.44	10.40	10.35	10.35	10.34	10.27	10.19

Table 8.8 IEEE 802.11n HT20 Average RF Power Ant 2

Mode	Freq.	Channel	802.11n HT20 (2.4 GHz) Conducted Power (dBm) Ant 1+2							
			Data Rate (Mbps)							
	(MHz)		6.5	13	19.5	26	39	52	58.5	65
802.11n (HT-20)	2412	1	12.84	12.82	12.76	12.73	12.70	12.64	12.62	12.58
	2437	6	17.98	17.93	17.88	17.81	17.76	17.73	17.69	17.66
	2462	11	13.99	13.95	13.92	13.88	13.88	13.83	13.78	13.73

Table 8.9 IEEE 802.11n HT20 Average RF Power Ant 1+2

Mode	Freq.	Channel	802.11n HT40 (2.4 GHz) Conducted Power (dBm) Ant 1							
			Data Rate (Mbps)							
	(MHz)		13.5	27	40.5	54	81	108	121.5	135
802.11n (HT-40)	2422	3	8.57	8.54	8.50	8.48	8.47	8.43	8.37	8.34
	2437	6	13.33	13.31	13.28	13.23	13.16	13.10	13.04	12.98
	2452	9	9.56	9.54	9.52	9.50	9.42	9.38	9.29	9.29

Table 8.10 IEEE 802.11n HT40 Average RF Power Ant 1

Mode	Freq.	Channel	802.11n HT40 (2.4 GHz) Conducted Power (dBm) Ant 2							
			Data Rate (Mbps)							
	(MHz)		13.5	27	40.5	54	81	108	121.5	135
802.11n (HT-40)	2422	3	7.16	7.10	7.09	7.04	7.01	6.94	6.89	6.85
	2437	6	12.14	12.10	12.09	12.06	12.00	11.98	11.94	11.92
	2452	9	8.71	8.70	8.65	8.62	8.61	8.56	8.51	8.47

Table 8.11 IEEE 802.11n HT40 Average RF Power Ant 2

Mode	Freq.	Channel	802.11n HT40 (2.4 GHz) Conducted Power (dBm) Ant 1+2							
			Data Rate (Mbps)							
	(MHz)		13.5	27	40.5	54	81	108	121.5	135
802.11n (HT-40)	2422	3	10.93	10.89	10.86	10.83	10.81	10.76	10.70	10.67
	2437	6	15.79	15.76	15.74	15.70	15.63	15.59	15.54	15.49
	2452	9	12.17	12.15	12.12	12.09	12.05	12.00	11.93	11.91

Table 8.12 IEEE 802.11n HT40 Average RF Power Ant 1+2

Mode	Freq.	Channel	802.11a (5 GHz) Conducted Power (dBm) Ant 1							
			Data Rate (Mbps)							
	(MHz)		6	9	12	18	24	36	48	54
802.11a	5180	36	11.57	11.53	11.54	11.54	11.34	11.32	11.49	11.54
	5200	40	11.66	11.43	11.45	11.54	11.50	11.59	11.65	11.52
	5220	44	11.71	11.67	11.52	11.56	11.56	11.60	11.47	11.66
	5240	48	12.01	11.80	11.90	11.88	11.88	11.89	11.96	11.82

Table 8.13 IEEE 802.11a Average RF Power Ant 1

Mode	Freq.	Channel	802.11a (5 GHz) Conducted Power (dBm) Ant 2							
			Data Rate (Mbps)							
	(MHz)		6	9	12	18	24	36	48	54
802.11a	5180	36	9.23	9.02	9.04	9.10	9.11	9.07	9.05	9.09
	5200	40	9.49	9.46	9.33	9.26	9.27	9.24	9.32	9.32
	5220	44	9.66	9.50	9.60	9.46	9.54	9.56	9.61	9.52
	5240	48	9.83	9.65	9.76	9.74	9.58	9.71	9.65	9.82

Table 8.14 IEEE 802.11a Average RF Power Ant 2

Mode	Freq.	Channel	802.11a (5 GHz) Conducted Power (dBm) Ant 1+2							
			Data Rate (Mbps)							
	(MHz)		6	9	12	18	24	36	48	54
802.11a	5180	36	13.57	13.47	13.48	13.50	13.38	13.35	13.45	13.50
	5200	40	13.72	13.57	13.53	13.56	13.54	13.59	13.65	13.57
	5220	44	13.82	13.73	13.68	13.65	13.68	13.71	13.65	13.74
	5240	48	14.07	13.87	13.98	13.96	13.90	13.95	13.97	13.95

Table 8.15 IEEE 802.11a Average RF Power Ant 1+2

Mode	Freq.	Channel	802.11n HT20 (5 GHz) Conducted Power (dBm) Ant 1							
			Data Rate (Mbps)							
	(MHz)		6.5	13	19.5	26	39	52	58.5	65
802.11n (HT-20)	5180	36	12.14	11.94	12.09	11.89	12.07	12.01	12.05	12.08
	5200	40	12.74	12.63	12.54	12.68	12.57	12.7	12.57	12.54
	5220	44	13.05	13.04	12.87	12.92	12.88	12.82	12.99	12.92
	5240	48	13.32	13.27	13.23	13.28	13.24	13.2	13.12	13.26

Table 8.16 IEEE 802.11n HT20 Average RF Power Ant 1

Mode	Freq.	Channel	802.11n HT20 (5 GHz) Conducted Power (dBm) Ant 2							
			Data Rate (Mbps)							
	(MHz)		6.5	13	19.5	26	39	52	58.5	65
802.11n (HT-20)	5180	36	9.55	9.50	9.48	9.31	9.42	9.34	9.42	9.41
	5200	40	10.44	10.42	10.25	10.25	10.32	10.41	10.28	10.39
	5220	44	10.62	10.59	10.37	10.39	10.44	10.39	10.51	10.38
	5240	48	10.91	10.90	10.76	10.71	10.78	10.67	10.74	10.84

Table 8.17 IEEE 802.11n HT20 Average RF Power Ant 2

Mode	Freq.	Channel	802.11n HT20 (5 GHz) Conducted Power (dBm) Ant 1+2							
			Data Rate (Mbps)							
	(MHz)		6.5	13	19.5	26	39	52	58.5	65
802.11n (HT-20)	5180	36	14.05	13.90	13.99	13.80	13.96	13.89	13.95	13.96
	5200	40	14.75	14.68	14.56	14.65	14.60	14.72	14.59	14.61
	5220	44	15.02	15.00	14.81	14.85	14.84	14.79	14.94	14.85
	5240	48	15.29	15.26	15.18	15.20	15.20	15.13	15.11	15.23

Table 8.18 IEEE 802.11n HT20 Average RF Power Ant 1+2

Mode	Freq.	Channel	802.11n HT40 (5 GHz) Conducted Power (dBm) Ant 1							
			Data Rate (Mbps)							
	(MHz)		13.5	27	40.5	54	81	108	121.5	135
802.11n (HT-40)	5190	38	11.43	11.39	11.21	11.25	11.26	11.37	11.36	11.31
	5230	46	<u>13.24</u>	13.22	13.23	13.21	13.08	13.04	13.08	13.15

Table 8.19 IEEE 802.11n HT20 Average RF Power Ant 1

Mode	Freq.	Channel	802.11n HT40 (5 GHz) Conducted Power (dBm) Ant 2							
			Data Rate (Mbps)							
	(MHz)		13.5	27	40.5	54	81	108	121.5	135
802.11n (HT-40)	5190	38	8.31	8.12	8.14	8.20	8.15	8.06	8.24	8.16
	5230	46	<u>10.94</u>	10.82	10.81	10.83	10.81	10.87	10.71	10.75

Table 8.20 IEEE 802.11n HT20 Average RF Power Ant 2

Mode	Freq.	Channel	802.11n HT40 (5 GHz) Conducted Power (dBm) Ant 1+2							
			Data Rate (Mbps)							
	(MHz)		13.5	27	40.5	54	81	108	121.5	135
802.11n (HT-40)	5190	38	13.15	13.07	12.96	13.00	12.99	13.04	13.09	13.03
	5230	46	<u>15.25</u>	15.20	15.20	15.20	15.11	15.10	15.07	15.13

Table 8.21 IEEE 802.11n HT20 Average RF Power Ant 1+2

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02 and October 2012 / April 2013 FCC/TCB Meeting Notes:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.

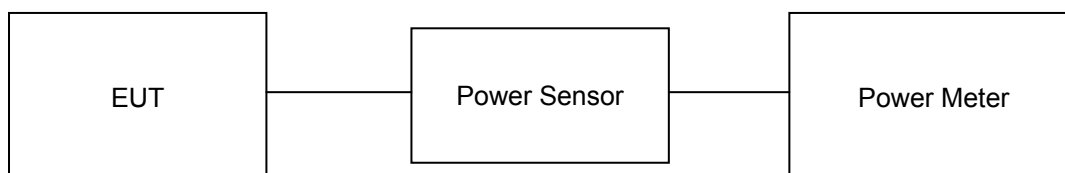


Figure 8.1 Average Power Measurement Setup

9. SYSTEM VERIFICATION

9.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	ErDeviation [%]	σ Deviation [%]
Oct. 28. 2015	2450 Head	21.1	21.6	2412	39.265	1.766	40.318	1.745	2.68	-1.19
				2437	39.222	1.788	40.298	1.769	2.74	-1.06
				2450	39.200	1.800	40.293	1.780	2.79	-1.11
				2462	39.184	1.813	40.289	1.791	2.82	-1.21
Oct. 28. 2015	2450 Body	21.1	21.4	2412	52.751	1.914	51.056	1.921	-3.21	0.37
				2437	52.717	1.938	50.984	1.949	-3.29	0.57
				2450	52.700	1.950	50.945	1.963	-3.33	0.67
				2462	52.685	1.967	50.918	1.976	-3.35	0.46
Oct. 28. 2015	5200 Head	21.1	21.7	5200	36.000	4.660	36.050	4.798	0.14	2.96
				5230	35.970	4.690	36.027	4.843	0.16	3.26
Oct. 28. 2015	5200 Body	21.1	21.5	5200	49.010	5.299	49.424	5.219	0.84	-1.51
				5230	48.970	5.334	49.412	5.266	0.90	-1.27

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

9.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 2450 MHz and 5 GHz by using the SAR Dipole kit(s). (Graphic Plots Attached)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED

SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
F	2450	D2450V2, SN:726	Oct. 28. 2015	Head	21.1	21.6	3933	250	51.2	13.4	53.6	4.69
F	2450	D2450V2, SN: 726	Oct. 28. 2015	Body	21.1	21.4	3933	250	49.5	12.5	50.0	1.01
F	5200	D5GV2, SN: 1103	Oct. 28. 2015	Head	21.1	21.7	3933	100	78.7	7.68	76.8	-2.41
F	5200	D5GV2, SN: 1103	Oct. 28. 2015	Body	21.1	21.5	3933	100	74.6	7.56	75.6	1.34

Note1 : System Verification was measured with input 250 mW(2450 MHz), 100 mW(5200 MHz) and normalized to 1W.

Note2 : To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.

Note3: Full system validation status and results can be found in Attachment 3.

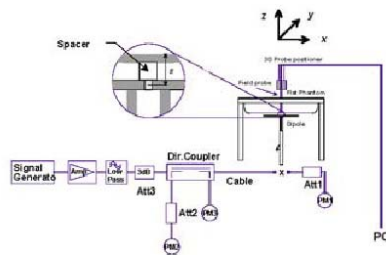


Figure 9.1 Dipole Verification Test Setup Diagram & Photo

10. SAR TEST RESULTS

10.1 Head SAR Results

Table 10.1 DTS Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/ Antenna	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2412	1	802.11b MIMO Ant.1	16.0	15.99	-0.010	0 mm [Front]	FCC #1	0.080	1	99.5	0.079	1.002	1.005	0.080	
2462	11	802.11b MIMO Ant.1	17.0	16.81	0.030	0 mm [Front]	FCC #1	0.083	1	99.5	0.086	1.045	1.005	0.090	
2412	1	802.11b MIMO Ant.2	16.0	15.92	-0.010	0 mm [Front]	FCC #1	0.256	1	99.5	0.254	1.019	1.005	0.260	A1
2462	11	802.11b MIMO Ant.2	16.0	15.73	0.030	0 mm [Front]	FCC #1	0.196	1	99.5	0.194	1.064	1.005	0.207	
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- The front with touch configuration was only tested since only the front is touched to human body in normal operation condition of this device.
- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Scaled SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412	1	802.11b Ant.1	DSSS	16.0	0.080	2437	802.11g	OFDM	15.0	0.794	0.064	X
2462	11	802.11b Ant.1	DSSS	17.0	0.090	2437	802.11g	OFDM	15.0	0.631	0.057	X
2412	1	802.11b Ant.2	DSSS	16.0	0.260	2437	802.11g	OFDM	14.5	0.708	0.184	X
2462	11	802.11b Ant.2	DSSS	16.0	0.207	2437	802.11g	OFDM	14.5	0.708	0.147	X
2412	1	802.11b Ant.1	DSSS	16.0	0.080	2437	802.11n HT20	OFDM	16.0	1.000	0.080	X
2462	11	802.11b Ant.1	DSSS	17.0	0.090	2437	802.11n HT20	OFDM	16.0	0.794	0.071	X
2412	1	802.11b Ant.2	DSSS	16.0	0.260	2437	802.11n HT20	OFDM	14.5	0.708	0.184	X
2462	11	802.11b Ant.2	DSSS	16.0	0.207	2437	802.11n HT20	OFDM	14.5	0.708	0.147	X
2412	1	802.11b Ant.1	DSSS	16.0	0.080	2437	802.11n HT40	OFDM	13.5	0.562	0.045	X
2462	11	802.11b Ant.1	DSSS	17.0	0.090	2437	802.11n HT40	OFDM	13.5	0.447	0.040	X
2412	1	802.11b Ant.2	DSSS	16.0	0.260	2437	802.11n HT40	OFDM	12.5	0.447	0.116	X
2462	11	802.11b Ant.2	DSSS	16.0	0.207	2437	802.11n HT40	OFDM	12.5	0.447	0.093	X
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10.2 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/ Antenna	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5230	46	802.11n HT40 MIMO Ant.1	13.5	13.24	-0.010	0 mm [Front]	FCC #1	0.051	13.5	94.2	0.048	1.062	1.062	0.054	
5230	46	802.11n HT40 MIMO Ant.2	11.0	10.94	-0.010	0 mm [Front]	FCC #1	0.104	13.5	94.2	0.090	1.014	1.062	0.097	A2
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- The front with touch configuration was only tested since only the front is touched to human body in normal operation condition of this device.
- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

10.2 Body SAR Results

Table 10.3 DTS Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/ Antenna	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2412	1	802.11b MIMO Ant.1	16.0	15.99	-0.150	0 mm [Front]	FCC #1	0.069	1	99.5	0.081	1.002	1.005	0.082	
2462	11	802.11b MIMO Ant.1	17.0	16.81	-0.020	0 mm [Front]	FCC #1	0.065	1	99.5	0.066	1.045	1.005	0.069	
2412	1	802.11b MIMO Ant.2	16.0	15.92	-0.150	0 mm [Front]	FCC #1	0.267	1	99.5	0.274	1.019	1.005	0.281	A3
2462	11	802.11b MIMO Ant.2	16.0	15.73	-0.020	0 mm [Front]	FCC #1	0.121	1	99.5	0.121	1.064	1.005	0.129	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- The front with touch configuration was only tested since only the front is touched to human body in normal operation condition of this device.
- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Scaled SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412	1	802.11b Ant.1	DSSS	16.0	0.082	2437	802.11g	OFDM	15.0	0.794	0.065	X
2462	11	802.11b Ant.1	DSSS	17.0	0.069	2437	802.11g	OFDM	15.0	0.631	0.044	X
2412	1	802.11b Ant.2	DSSS	16.0	0.281	2437	802.11g	OFDM	14.5	0.708	0.199	X
2462	11	802.11b Ant.2	DSSS	16.0	0.129	2437	802.11g	OFDM	14.5	0.708	0.091	X
2412	1	802.11b Ant.1	DSSS	16.0	0.082	2437	802.11n HT20	OFDM	16.0	1.000	0.082	X
2462	11	802.11b Ant.1	DSSS	17.0	0.069	2437	802.11n HT20	OFDM	16.0	0.794	0.055	X
2412	1	802.11b Ant.2	DSSS	16.0	0.281	2437	802.11n HT20	OFDM	14.5	0.708	0.199	X
2462	11	802.11b Ant.2	DSSS	16.0	0.129	2437	802.11n HT20	OFDM	14.5	0.708	0.091	X
2412	1	802.11b Ant.1	DSSS	16.0	0.082	2437	802.11n HT40	OFDM	13.5	0.562	0.046	X
2462	11	802.11b Ant.1	DSSS	17.0	0.069	2437	802.11n HT40	OFDM	13.5	0.447	0.031	X
2412	1	802.11b Ant.2	DSSS	16.0	0.281	2437	802.11n HT40	OFDM	12.5	0.447	0.126	X
2462	11	802.11b Ant.2	DSSS	16.0	0.129	2437	802.11n HT40	OFDM	12.5	0.447	0.058	X
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10.4 UNII Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/ Antenna	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5230	46	802.11n HT40 MIMO Ant.1	13.5	13.24	0.070	0 mm [Front]	FCC #1	0.031	13.5	94.2	0.025	1.062	1.062	0.028	
5230	46	802.11n HT40 MIMO Ant.2	11.0	10.94	0.070	0 mm [Front]	FCC #1	0.061	13.5	94.2	0.050	1.014	1.062	0.054	A4
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- The front with touch configuration was only tested since only the front is touched to human body in normal operation condition of this device.
- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

10.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. The front with touch configuration was only tested since the front is touched to human body in normal operation condition of this device.
7. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjusted SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

11. SAR MEASUREMENT VARIABILITY

11.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

11.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664D01v01r03, the standard measurement uncertainty analysis per IEEE 1528-2003 was not required.

12. IEEE P1528 –MEASUREMENT UNCERTAINTIES

2450 MHz Head

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	∞
RF Ambient Conditions	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.31 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	∞
Liquid conductivity (Meas.)	± 4.6	Normal	1	0.64	$\pm 4.6 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	∞
Combined Standard Uncertainty					$\pm 12.1 \%$	330
Expanded Uncertainty (k=2)					$\pm 24.2 \%$	

The above measurement uncertainties are according to IEEE P1528 (2003)

2450 MHz Body

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	∞
RF Ambient Conditions	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.31 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.64	$\pm 4.2 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	$\pm 4.0 \%$	∞
Combined Standard Uncertainty					$\pm 12.1 \%$	330
Expanded Uncertainty (k=2)					$\pm 24.2 \%$	

The above measurement uncertainties are according to IEEE P1528 (2003)

5200 MHz Head

Error Description	Uncertainty value $\pm$ %	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.55 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.714 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.543 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.462 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.714 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.144 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.462 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.501 %	∞
RF Ambient Conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.732 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.231 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.674 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.577 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.887 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.31 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.887 %	∞
Liquid conductivity (Meas.)	± 4.4	Normal	1	0.64	± 4.4 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.887 %	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	± 4.2 %	∞
Combined Standard Uncertainty		RSS			± 12.4 %	330
Expanded Uncertainty (k=2)					± 24.8 %	

The above measurement uncertainties are according to IEEE P1528 (2003)

5200 MHz Body

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.55 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.543 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.714 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.144 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.462 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.501 \%$	∞
RF Ambient Conditions	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.732 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.231 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.674 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.577 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.887 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.31 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.887 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.64	$\pm 4.3 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.887 \%$	∞
Liquid permittivity (Meas.)	± 4.7	Normal	1	0.6	$\pm 4.7 \%$	∞
Combined Standard Uncertainty		RSS			$\pm 12.5 \%$	330
Expanded Uncertainty (k=2)					$\pm 25.0 \%$	

The above measurement uncertainties are according to IEEE P1528 (2003)

13. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

14. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e Wi-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

Attachment 1. – Probe Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **DT&C (Dymstec)**

Certificate No: EX3-3933_Sep15

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3933**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
 QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes**


Calibration date: **September 29, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Israa Elnaouq	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: September 30, 2015			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3933

September 29, 2015

Probe EX3DV4

SN:3933

Manufactured: July 24, 2013
Calibrated: September 29, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3933

September 29, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.51	0.53	0.19	$\pm 10.1 \%$
DCP (mV) ^B	99.9	100.1	88.1	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	186.0	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		194.3	
		Z	0.0	0.0	1.0		178.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3933

September 29, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
300	45.3	0.87	12.77	12.77	12.77	0.05	1.20	± 13.3 %
450	43.5	0.87	12.15	12.15	12.15	0.16	1.90	± 13.3 %
600	42.7	0.88	11.12	11.12	11.12	0.05	1.20	± 13.3 %
750	41.9	0.89	10.60	10.60	10.60	0.21	1.35	± 12.0 %
835	41.5	0.90	10.22	10.22	10.22	0.13	1.82	± 12.0 %
900	41.5	0.97	9.94	9.94	9.94	0.16	1.76	± 12.0 %
1750	40.1	1.37	8.62	8.62	8.62	0.22	1.05	± 12.0 %
1900	40.0	1.40	8.32	8.32	8.32	0.38	0.81	± 12.0 %
2300	39.5	1.67	7.94	7.94	7.94	0.29	0.93	± 12.0 %
2450	39.2	1.80	7.51	7.51	7.51	0.26	1.09	± 12.0 %
2600	39.0	1.96	7.65	7.65	7.65	0.27	1.15	± 12.0 %
3500	37.9	2.91	7.36	7.36	7.36	0.16	1.90	± 13.1 %
5200	36.0	4.66	5.25	5.25	5.25	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.03	5.03	5.03	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.78	4.78	4.78	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.70	4.70	4.70	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.61	4.61	4.61	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 29, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
300	58.2	0.92	12.13	12.13	12.13	0.05	1.10	± 13.3 %
450	56.7	0.94	12.46	12.46	12.46	0.06	1.10	± 13.3 %
600	56.1	0.95	11.11	11.11	11.11	0.06	1.10	± 13.3 %
750	55.5	0.96	10.79	10.79	10.79	0.24	1.18	± 12.0 %
835	55.2	0.97	10.40	10.40	10.40	0.20	1.48	± 12.0 %
900	55.0	1.05	10.29	10.29	10.29	0.23	1.24	± 12.0 %
1750	53.4	1.49	8.49	8.49	8.49	0.37	0.85	± 12.0 %
1900	53.3	1.52	8.03	8.03	8.03	0.33	0.92	± 12.0 %
2300	52.9	1.81	7.81	7.81	7.81	0.30	1.01	± 12.0 %
2450	52.7	1.95	7.63	7.63	7.63	0.39	0.80	± 12.0 %
2600	52.5	2.16	7.25	7.25	7.25	0.37	0.90	± 12.0 %
3500	51.3	3.31	6.85	6.85	6.85	0.20	1.90	± 13.1 %
5200	49.0	5.30	4.75	4.75	4.75	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.65	4.65	4.65	0.35	1.90	± 13.1 %
5500	48.6	5.65	4.26	4.26	4.26	0.40	1.90	± 13.1 %
5600	48.5	5.77	3.98	3.98	3.98	0.45	1.90	± 13.1 %
5800	48.2	6.00	4.07	4.07	4.07	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4—SN:3933



September 29, 2015

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

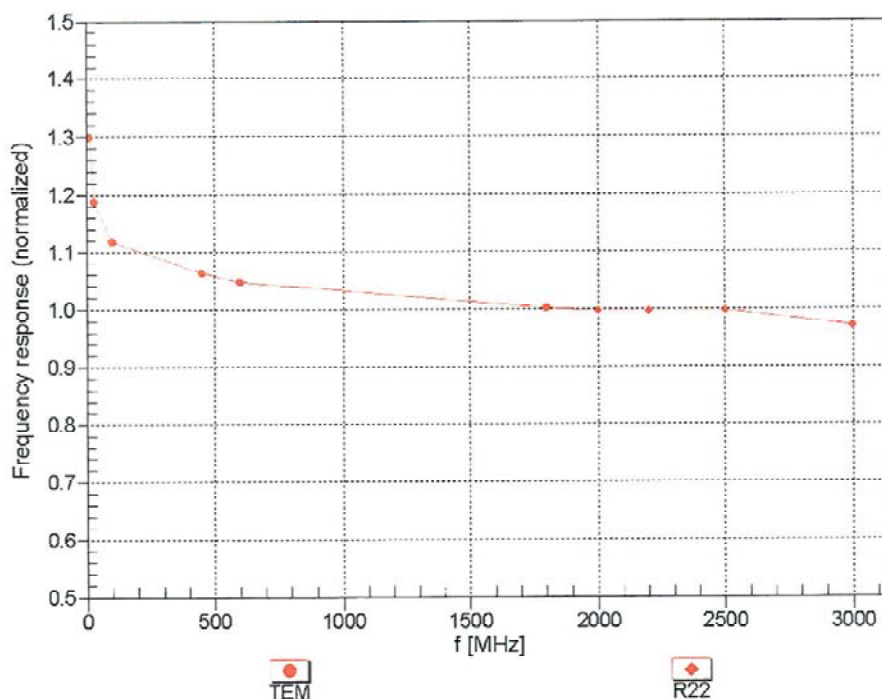Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4– SN:3933



September 29, 2015

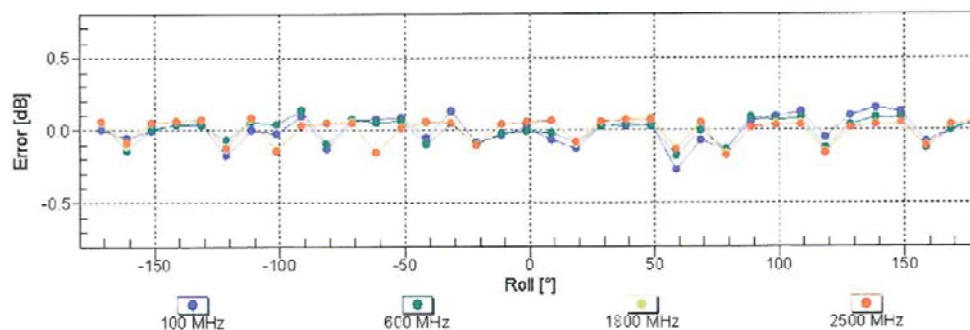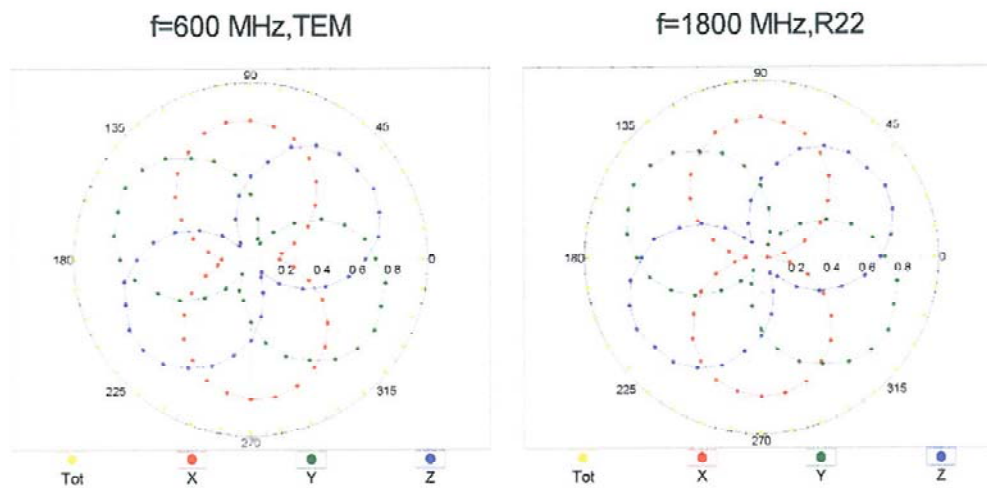Receiving Pattern (ϕ), $\theta = 0^\circ$ **Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)**

EX3DV4- SN:3933

September 29, 2015


Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

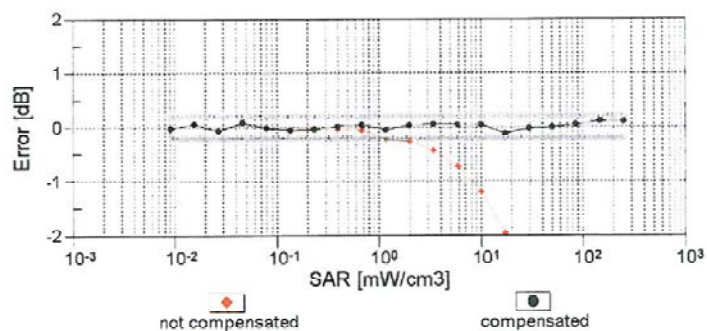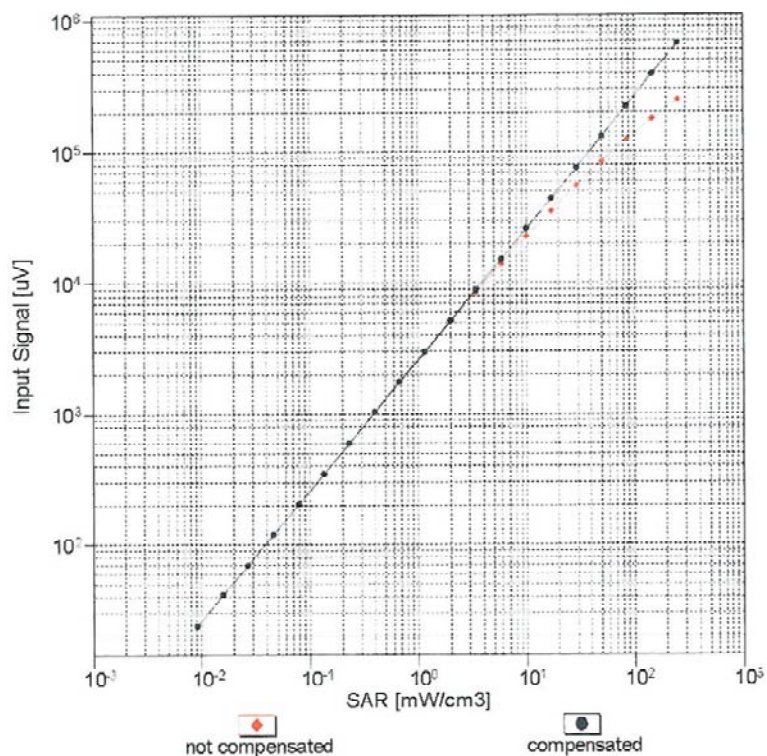Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


EX3DV4 - SN:3933

September 29, 2015

Conversion Factor Assessment

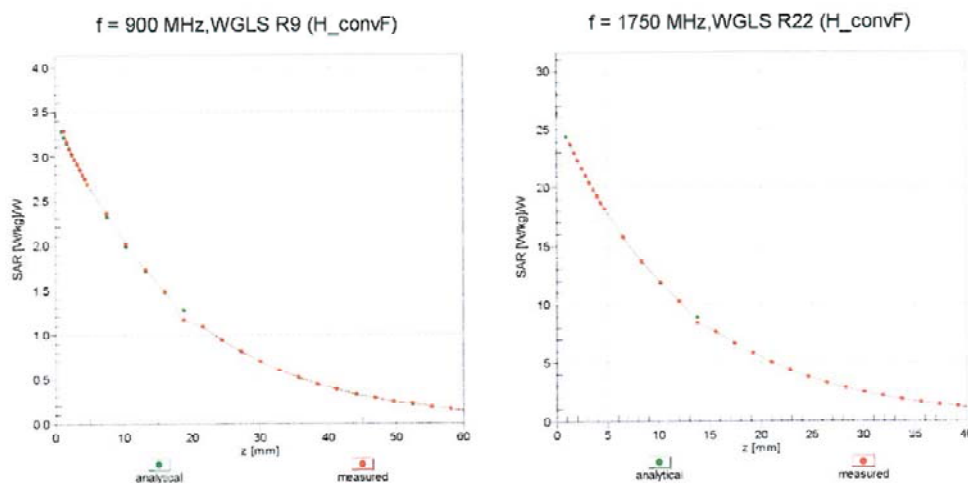

Deviation from Isotropy in Liquid

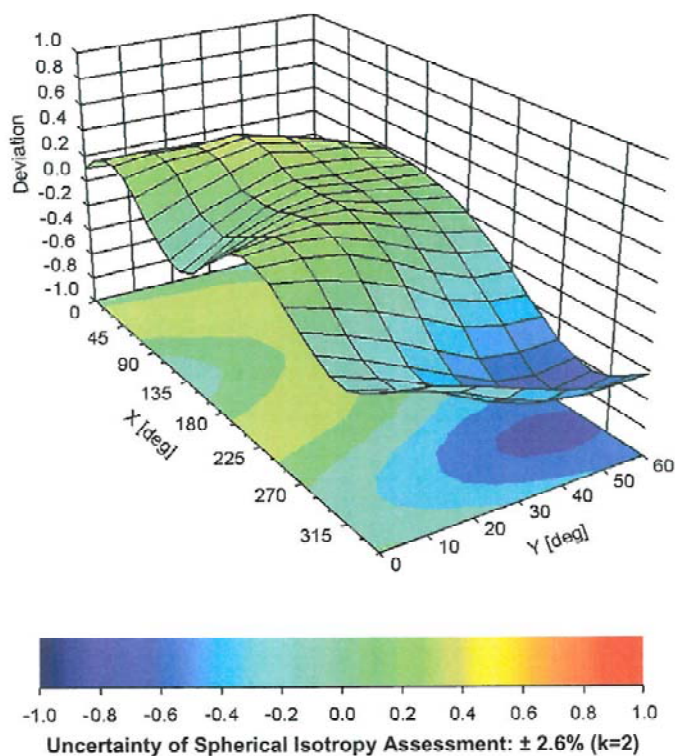Error (ϕ, θ), $f = 900 \text{ MHz}$ 

EX3DV4- SN:3933

September 29, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	78.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm