

Compliance Test Report for FCC

Report Number		ESTF150207-003			
Applicant	Company name	Core Communications Co., Ltd.			
	Address	3F. Hwang-geum building #253 Mapo-Dong, Mapo-Gu, Seoul (121-050), Korea			
	Telephone	822-3275-3330			
Product	Product name	VDSL RT			
	Model No.	CVL-V1002	Manufacturer	Core Communications Co., Ltd.	
	Serial No.	NONE	Country of origin	Korea	
Test date	2002-07-09 ~ 2002-07-09		Date of issue	2002-07-18	
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 2001 , ANSI C 63.4 2001				
Test item	☒ Conducted Emission	☐ Class A	☒ Class B	Test result	OK
	☒ Radiated Emission	☐ Class A	☒ Class B	Test result	OK
Measurement facility registration number		94696			
Tested by	Senior Engineer J.M. Yang		(Signature)		
Reviewed by	Director T.K. Lee		(Signature)		
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable				
* Note - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned					

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data	9
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11
7. Photographs of test setup	12
8. Photographs of EUT	14

Appendix 1. Spectral diagram

Appendix 2. Photographs of EUT in side PCB

Appendix 3. Block diagram of EUT

Appendix 4. Circuit Diagram

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : 3 rd Fl., Chungdam Bldg., 119-1 Chungdam-dong Kangnam-gu , Seoul, Korea
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

Branch Office : USA-ESTECH INC.
21801 Stevens Creek Blvd. Suite 2A Cupertino, CA95014

1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

2. Description of EUT

2.1 Summary of Equipment Under Test

Product : VDSL RT

Model Number : CVL-V1002

Serial Number : NONE

Manufacturer : Core Communications Co., Ltd.

Country of origin : Korea

Rating : Adapter(Input: AC 220V, Output:DC 5V, 1A)

Receipt Date : 2002-02-26

2.2 General descriptions of EUT

VDSL CPE, CVL-V1002, provides 1-port VDSL Bridge to enable next-generation simultaneous voice, video and data services including high-speed Internet access, video streaming Base Unit – 1-port VDSL Bridge.

● Performance

- . Up & Download speed : Max. 13Mbps at 1.5Km (24AWG, no noise condition)
- . Full-wire speed(full-duplex) operation on all ports.
- . Forwarding Mode : Store and Forward

3. Test Standards

Test Standard : FCC PART 15 (2001)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2001)


This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

4. Measurement Condition

4.1 EUT Operation.

- * The EUT was in the following operation mode during all testing
- * The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission
- * Using ping command between external Network, Transmission and Receiving test at between external Network

4.2 Configuration and Peripherals

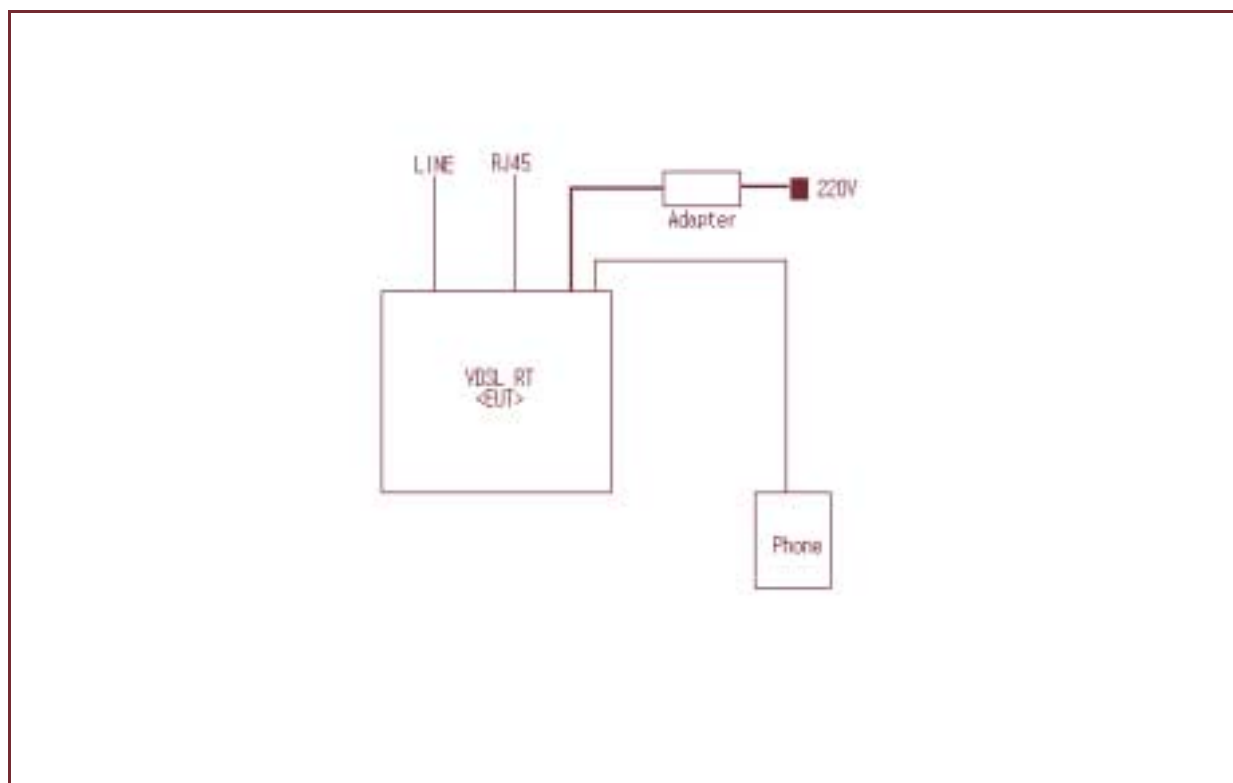

4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
VDSL RT	CVL-V1002	NONE	Core Communications Co., Ltd.	EUT
PHONE	SP-F214	KKAN529272	Samsung Electronics Co., Ltd.	—
ADAPTER	TLSA-SCPK001	NONE	TL Electronics	—

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
VDSL RT	10/100Base TX	External PC	10/100Base TX	25	N	—
VDSL RT	LINE	VDSL DSLAM	LINE	25	N	—
VDSL RT	PHONE	PHONE	—	2	N	—
VDSL RT	POWER	ADAPTER	—	2	N	—

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2001) & ANSI C 63.4 (2001). The test setup was made according to FCC Part 15 (2001) & ANSI C 63.4 (2001) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test set-up.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Receiver	ESPC	Rohde & Schwarz	845296/021	2003.6.21
Spectrum Analyzer	R3261B	ADVANTEST	1720302	2002.9.3
LogBicon Antenna	VULB 9160	S/B	3107	2003.6.7
Turn Table	2087	EMCO	2129	–
Antenna Mast	2070-01	EMCO	9702-203	–
Amplifier	310N	Sonoma Instrument	185817	2002.11.13
ANT Mast Controller	2090	EMCO	1535	–
Turn Table Controller	2090	EMCO	1535	–

5.2 Environmental Condition

Test Place : Open site (3m)
 Temperature (°C) : 30 °C
 Humidity (%) : 41 %

5.3 Test data

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB μ V/m)
50.00	13.50	V	1.0	12.57	1.0	40.0	27.10	-12.90
75.00	13.50	V	1.0	9.87	1.3	40.0	24.65	-15.35
100.00	26.50	V	1.0	10.24	1.5	43.5	38.21	-5.29
125.00	20.50	V	1.0	12.33	1.7	43.5	34.52	-8.98
150.01	19.50	H	2.0	13.90	1.9	43.5	35.28	-8.22
175.01	20.50	H	1.5	12.88	2.1	43.5	35.43	-8.07
200.00	19.50	H	1.6	10.38	2.2	43.5	32.06	-11.44
250.00	27.00	H	1.1	11.92	2.4	46.0	41.29	-4.71
275.00	24.50	H	1.0	12.64	2.5	46.0	39.68	-6.33
300.00	25.50	H	1.0	13.19	2.7	46.0	41.39	-4.61
325.00	23.50	H	1.0	13.76	2.8	46.0	40.03	-5.97
375.00	19.00	H	1.0	14.76	3.0	46.0	36.80	-9.21
775.00	11.00	H	1.1	21.56	4.6	46.0	37.12	-8.88
900.00	9.50	H	1.2	22.58	4.9	46.0	36.93	-9.07
Remark	H : Horizontal, V : Vertical							

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.45 to 30 MHz was measured in accordance to FCC Part 15 (2001) & ANSI C 63.4 (2001) The test setup was made according to FCC Part 15 (2001) & ANSI C 63.4 (2001) in a shielded. The EUT was placed on a non-conductive table at least 80 above the ground plan. A grounded vertical reference plane was positioned in a distance of 40cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0m.. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	ESH3-Z5	Rohde & Schwarz	838979/010	2003. 2. 1
LISN	NNLA8120A	Schwarzbeck	NONE	2003. 2. 1
TEST Receive	ESPC	Rohde & Schwarz	845296/021	2003.6.21
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	2003.7.4

6.2 Environmental Condition

Test Place : Shield Room

Temperature (°C) : 22 °C

Humidity (%) : 60 %

6.3 Test data

Frequency (MHz)	Reading (dB μ V)	Line (H/N)	Correction Factor		Limit (dB μ V)	Result (dB μ V)	Margin (dB μ V)
			Lisn (dB)	Cable (dB)			
0.450	40.15	H	0.08	0.2	48.00	40.40	-7.60
0.515	40.57	N	0.07	0.2	48.00	40.84	-7.16
0.709	36.09	N	0.08	0.2	48.00	36.37	-11.63
1.031	39.36	H	0.10	0.2	48.00	39.66	-8.34
1.098	38.88	H	0.10	0.2	48.00	39.19	-8.81
1.288	41.33	N	0.10	0.2	48.00	41.65	-6.35
2.323	35.81	H	0.13	0.3	48.00	36.24	-11.76
2.577	39.65	N	0.13	0.3	48.00	40.08	-7.92
3.994	34.06	N	0.17	0.3	48.00	34.53	-13.47
4.325	36.75	H	0.21	0.3	48.00	37.26	-10.74
5.808	34.91	H	0.27	0.3	48.00	35.52	-12.48
6.651	36.23	H	0.32	0.4	48.00	36.93	-11.07
Remark	H : Hot Line, N : Neutral Line						

Appendix 1. Spectral Diagram

* Hot Line


ESTECH
HOT

06 Jul 2002 14:58

Model: DVL-V1002
Manuf: Core Communications Co., Ltd.
Op Const: 220V
Operator: JMYang
Test Spec: CLASS B
Comment:

File: 019400_h.dat : New Measurement

Scan Settings			(1 Range)				
Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	MTime	Atten	OpRge
450kHz	30MHz	0.5%	10kHz	PK	20msec	Auto	60dB
Free Measurement		X QP					
		Meas Time:	1sec				
		Subranges:	25				
		Acc Margin:	50 dB				

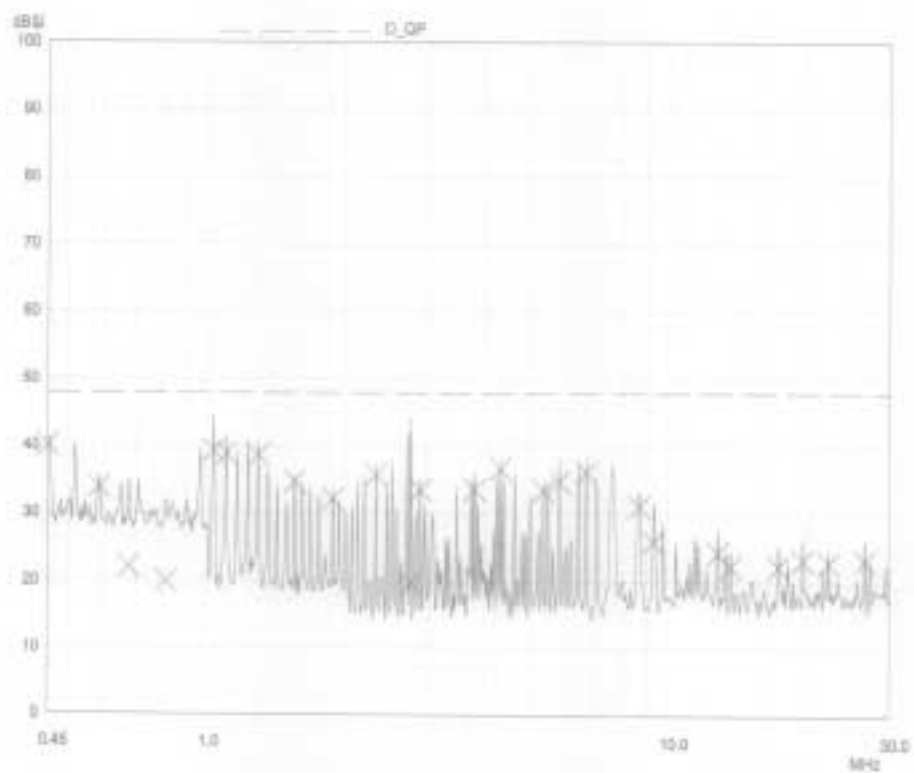

* Netural Line

ESTECH NEUTRAL

EUT: CVL-V1502
 Manuf: Core Communications Co., Ltd.
 Op Const: 230V
 Operator: JMYang
 Test Spec: CLASS B
 Comment:

File: 019400_n.dat: New Measurement

Scan Settings		(1 Range)		Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
450kHz	30MHz	0.6%	10kHz	PK	20msec	Auto	60dB
Final Measurement:		X GP					
		Meas Time:	1sec				
		Subranges:	25				
		Acc Margin:	60 dB				

