



Appendix for Test report

1 Appendix A: DTS (6 dB) Bandwidth

In this document, the "DTS6dBBW" refers to the measured "DTS (6 dB) Bandwidth" value. In this Appendix, the "fc(DTS6dBBW)" refers to the centre of the measured "DTS6dBBW". The introduction of the "fc(DTS6dBBW)" is due to that other measurements use it as the spectrum analyzer setting.


For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	DTS6dBBW[MHz]	Verdict
TM1	Ch0	2402	0.70	pass
	Ch19	2440	0.71	pass
	Ch39	2480	0.71	pass


Part II - Test Plots

2.1 TM1_Ch0@Ant 1

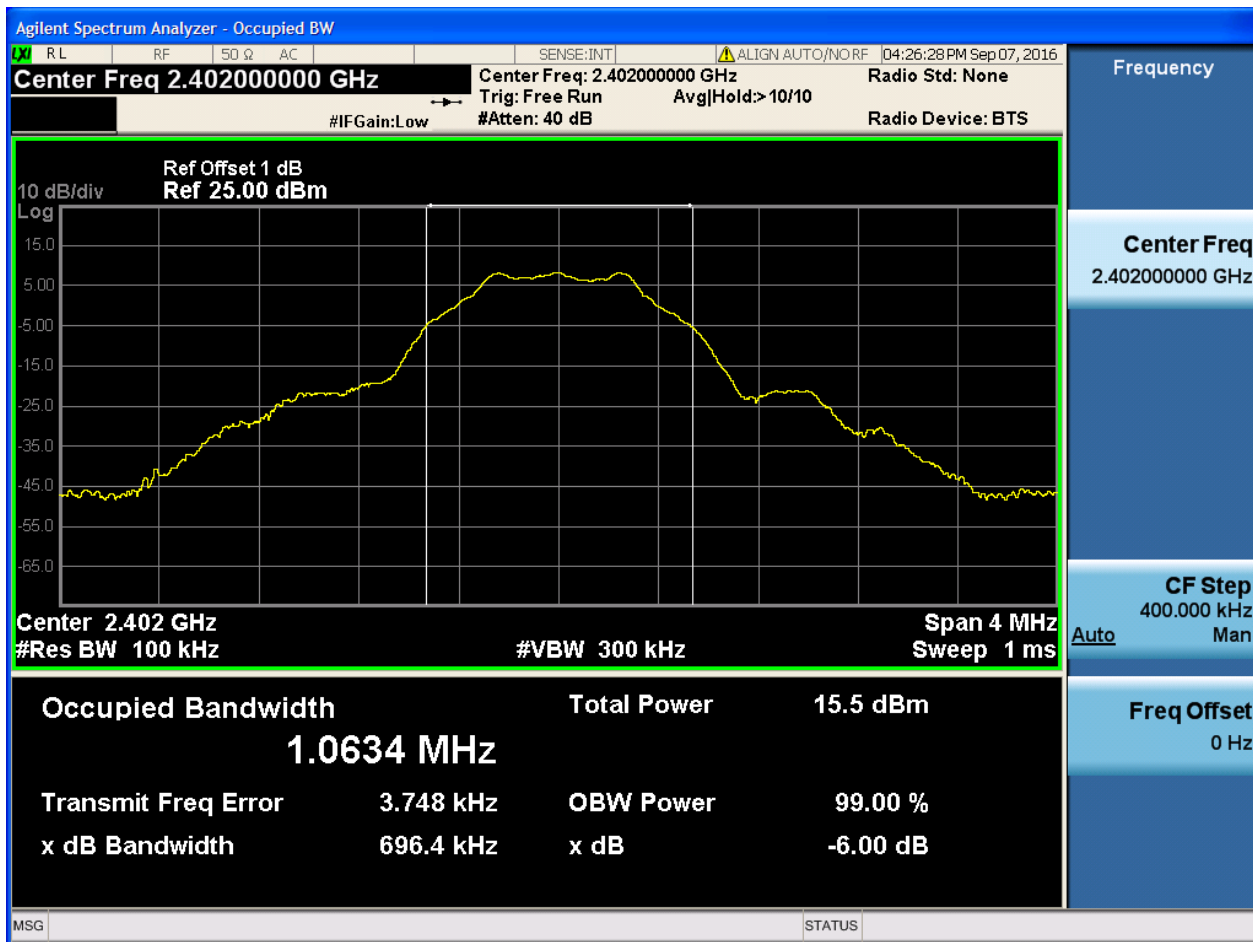




2.3 TM1_Ch19@Ant 1

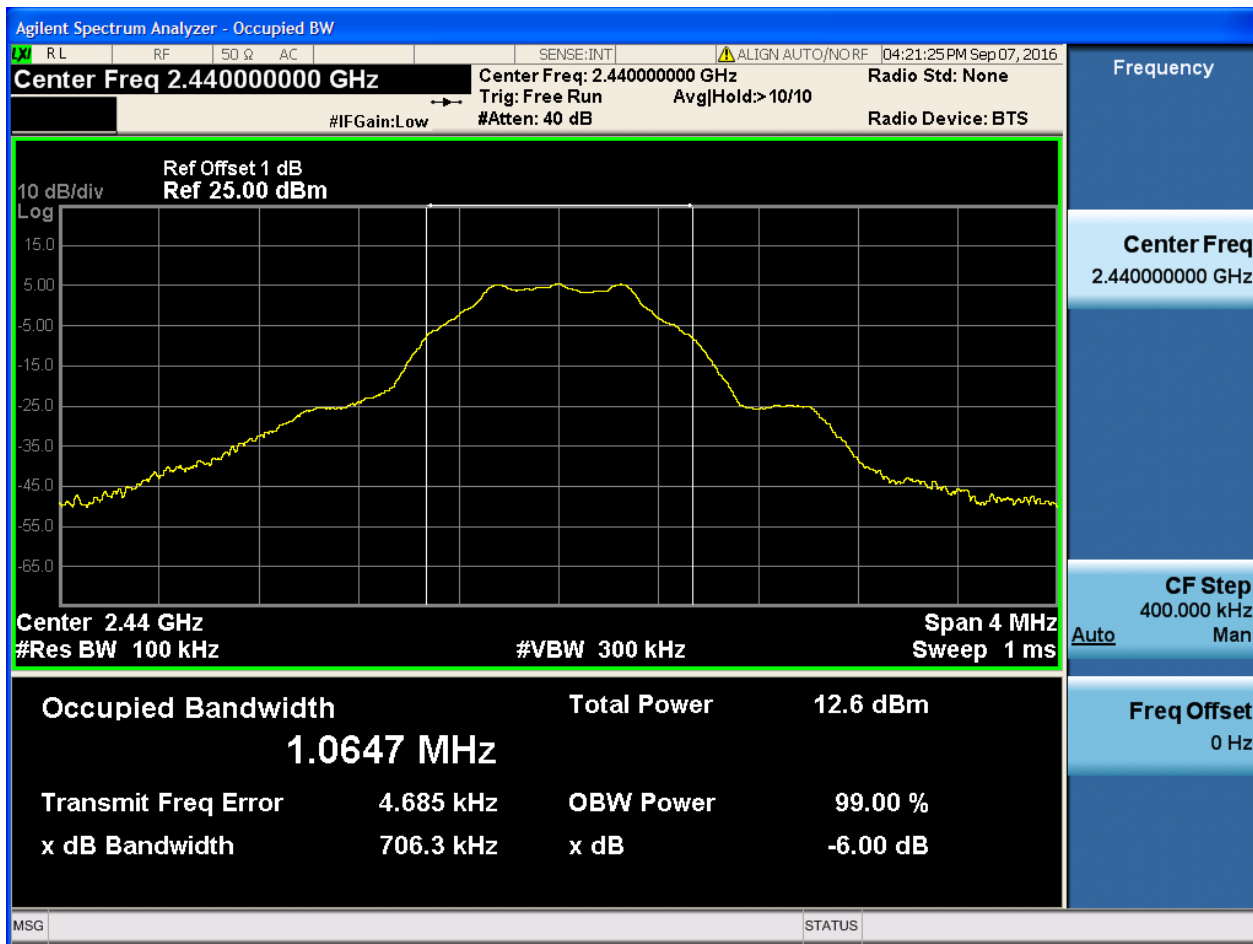



2.5 TM1_Ch39@Ant 1

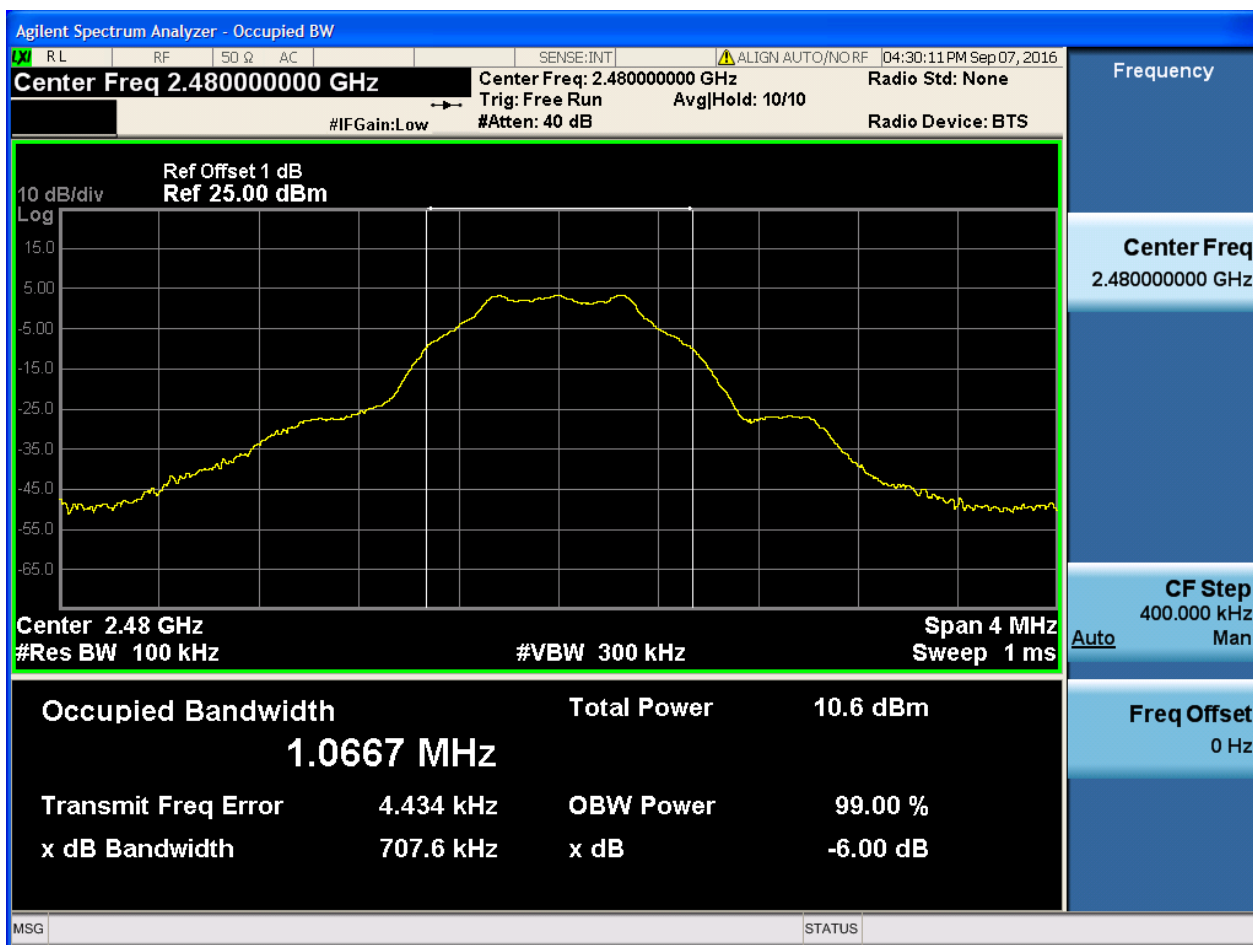

2 Appendix B: Occupied Bandwidth

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Occupied Bandwidth [MHz]	Verdict
TM1	Ch0	2402	1.04	pass
	Ch19	2440	1.04	pass
	Ch39	2480	1.05	pass




Part II - Test Plots

2.1 TM1_Ch0@Ant 1

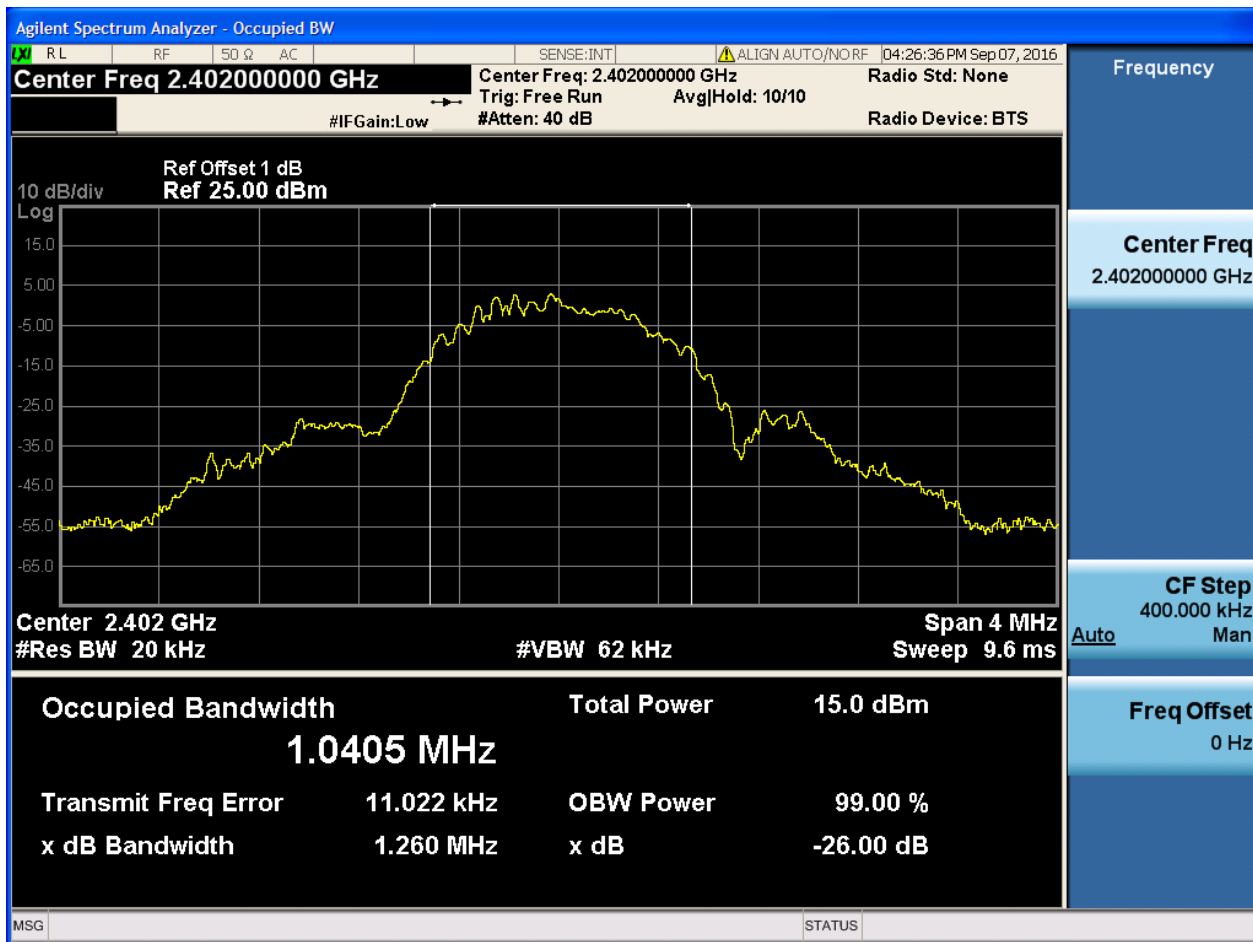




2.1 TM1_Ch19@Ant 1

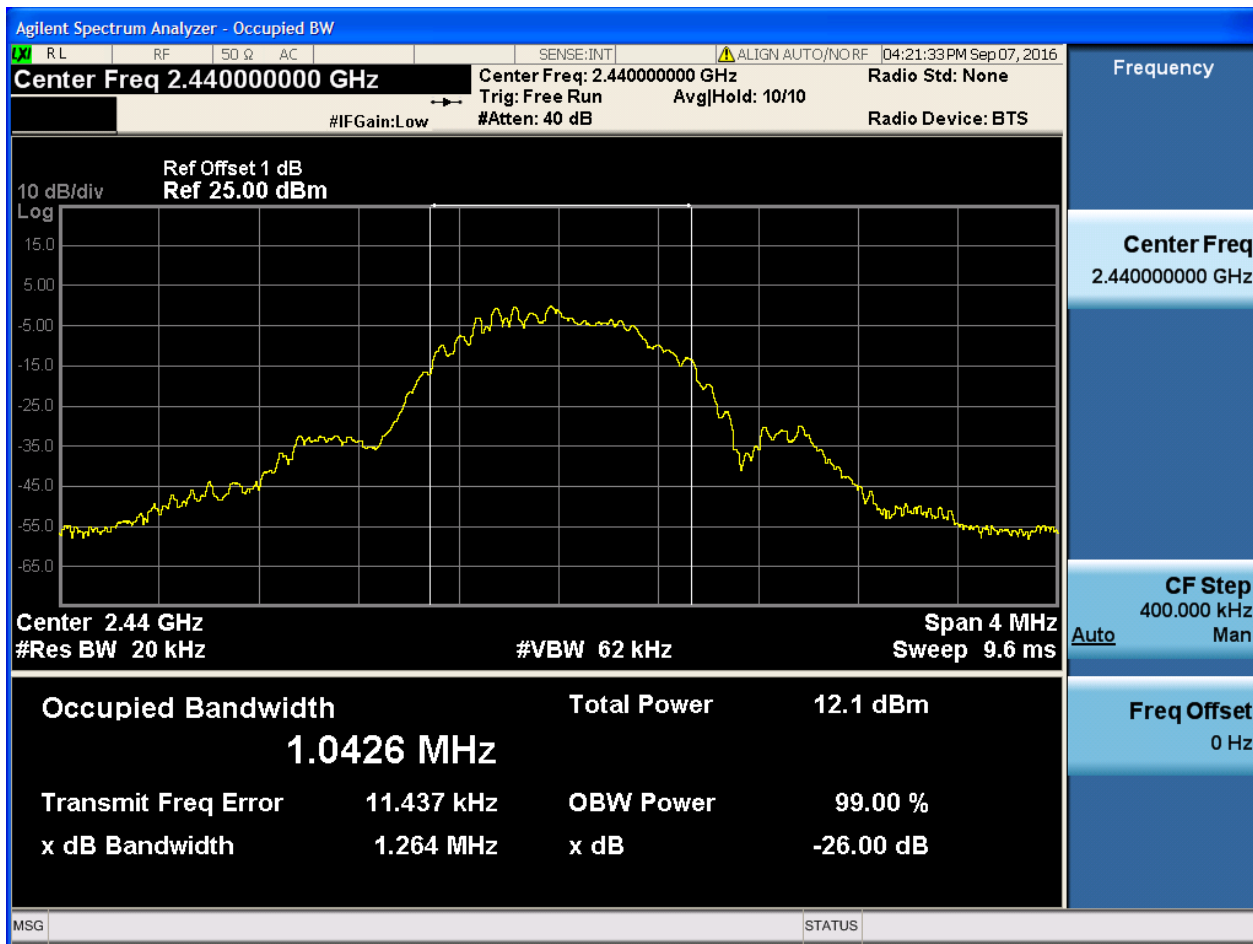



2.1 TM1_Ch39@Ant 1

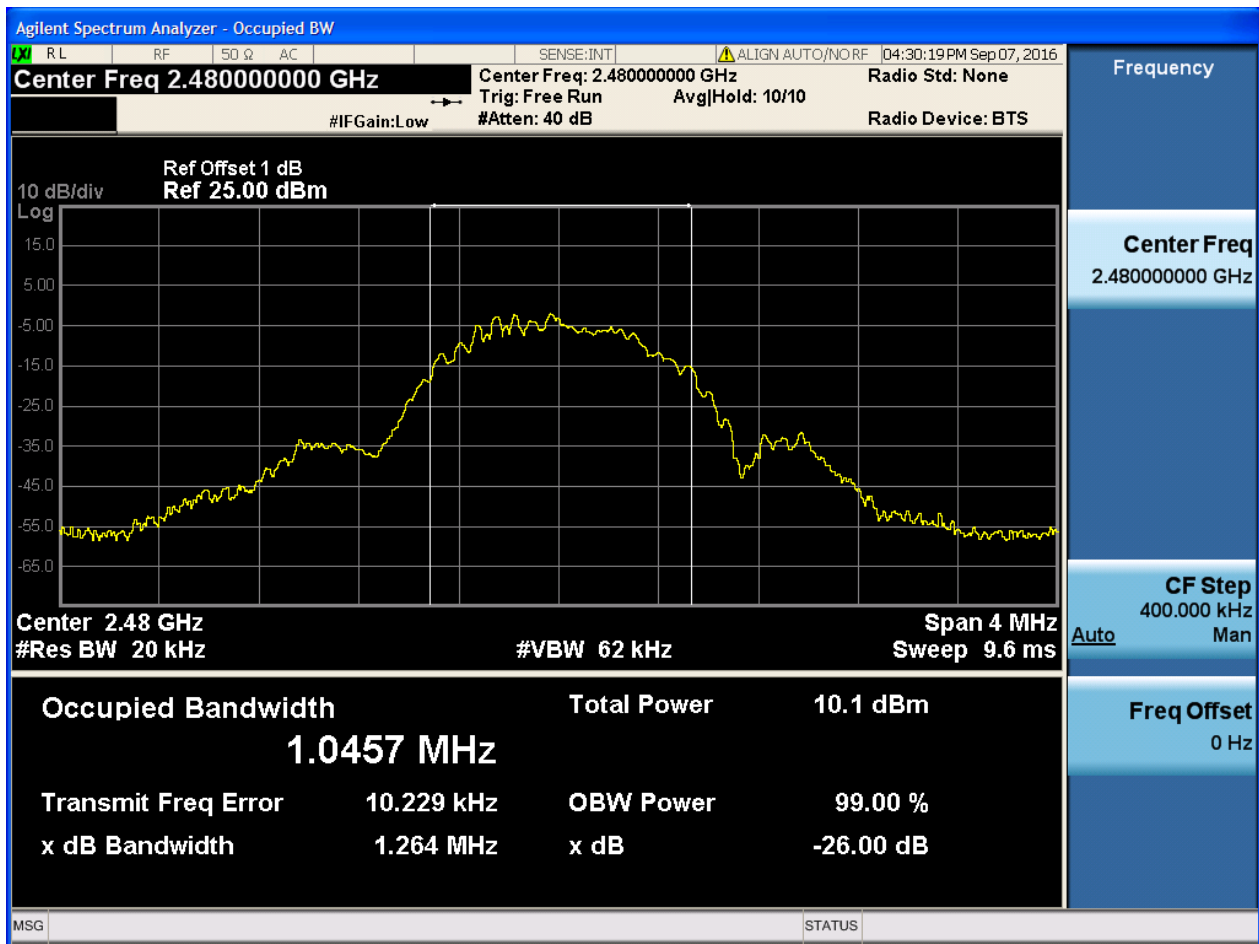




3 Appendix C: Duty Cycle

Part I - Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
TM1	CH0,CH19,CH39	60.4

Part II - Test Plots

2.1 TM1

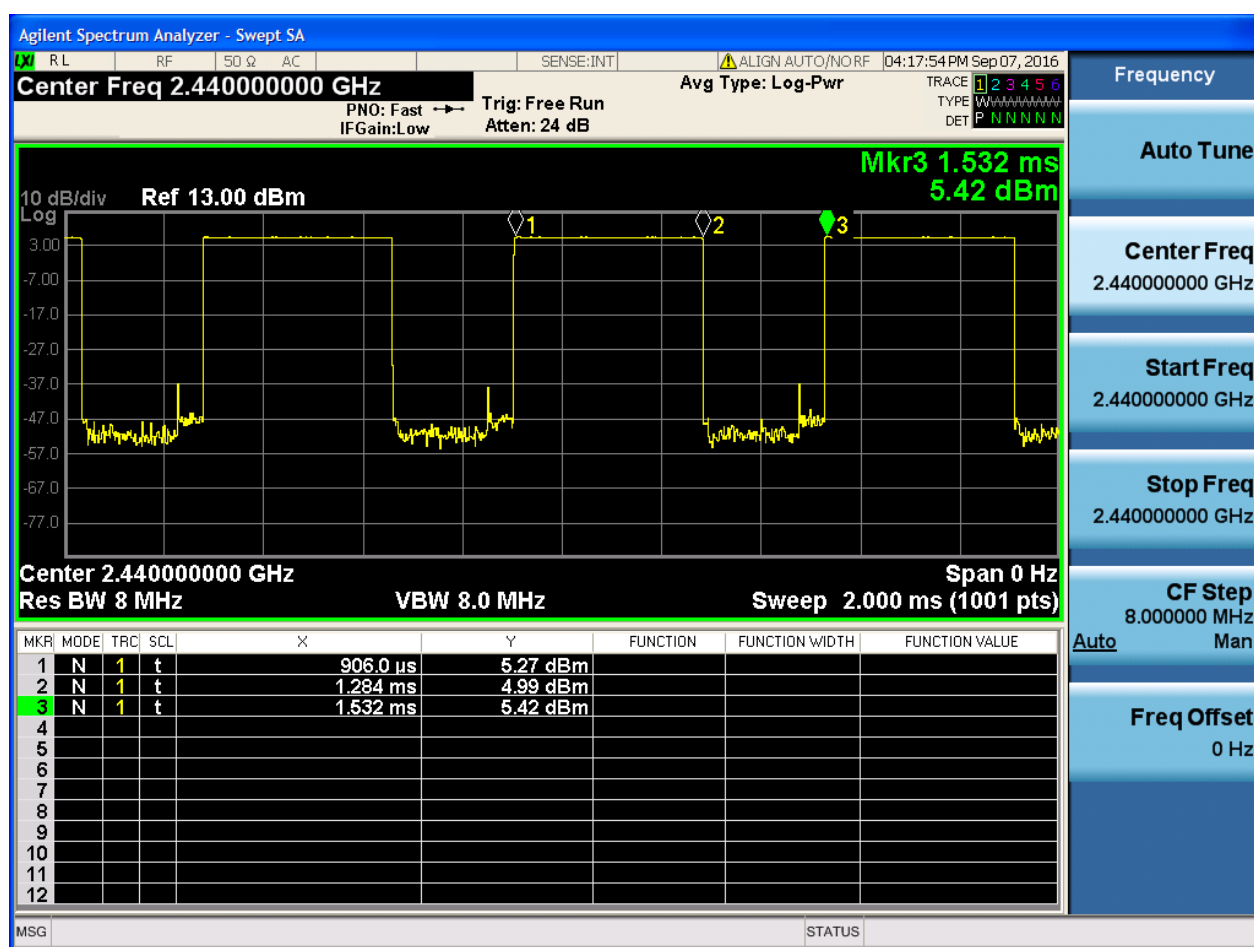

4 Appendix D: Maximum Conducted Average Output Power

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Power[dBm]	Verdict
TM1	Ch0	2402	8.87	pass
	Ch19	2440	5.99	pass
	Ch39	2480	4.01	pass



Part II - Test Plots

2.1 TM1_Ch0@Ant 1





2.3 TM1_Ch19@Ant 1





2.5 TM1_Ch39@Ant 1




5 Appendix E: Maximum Power Spectral Density Level

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	PD[MHz]	Verdict
TM1	Ch0	2402	-4.12	pass
	Ch19	2440	-6.88	pass
	Ch39	2480	-9.74	pass

Part II - Test Plots

2.1 TM1_Ch0@Ant 1

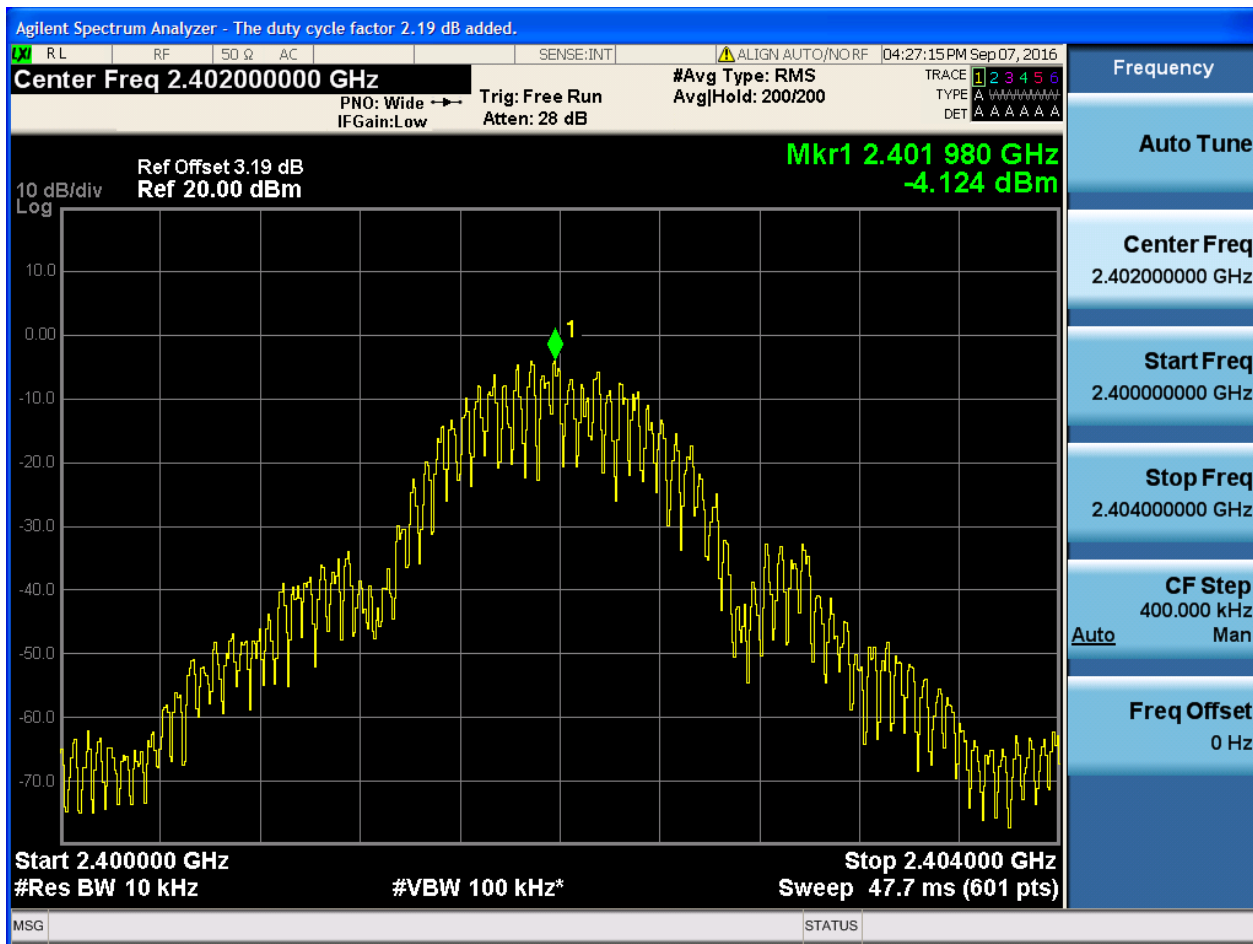




2.3 TM1_Ch19@Ant 1





2.5 TM1_Ch39@Ant 1

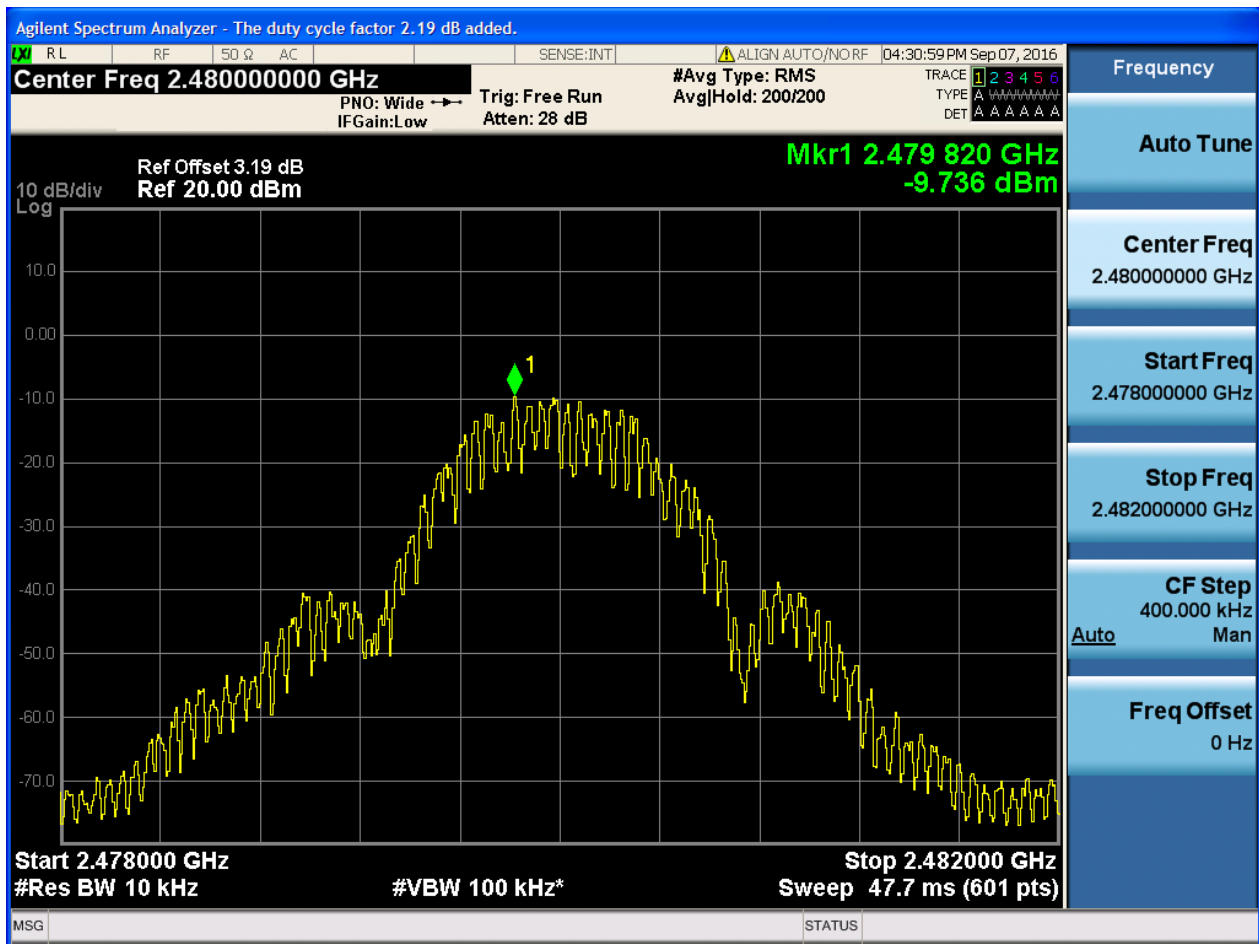

6 Appendix F: Band Edges Compliance


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
TM1	Ch0	2402	8.24	-49.41	pass
	Ch39	2480	3.33	-48.98	pass




Part II - Test Plots

2.1 TM1_Ch0@Ant 1

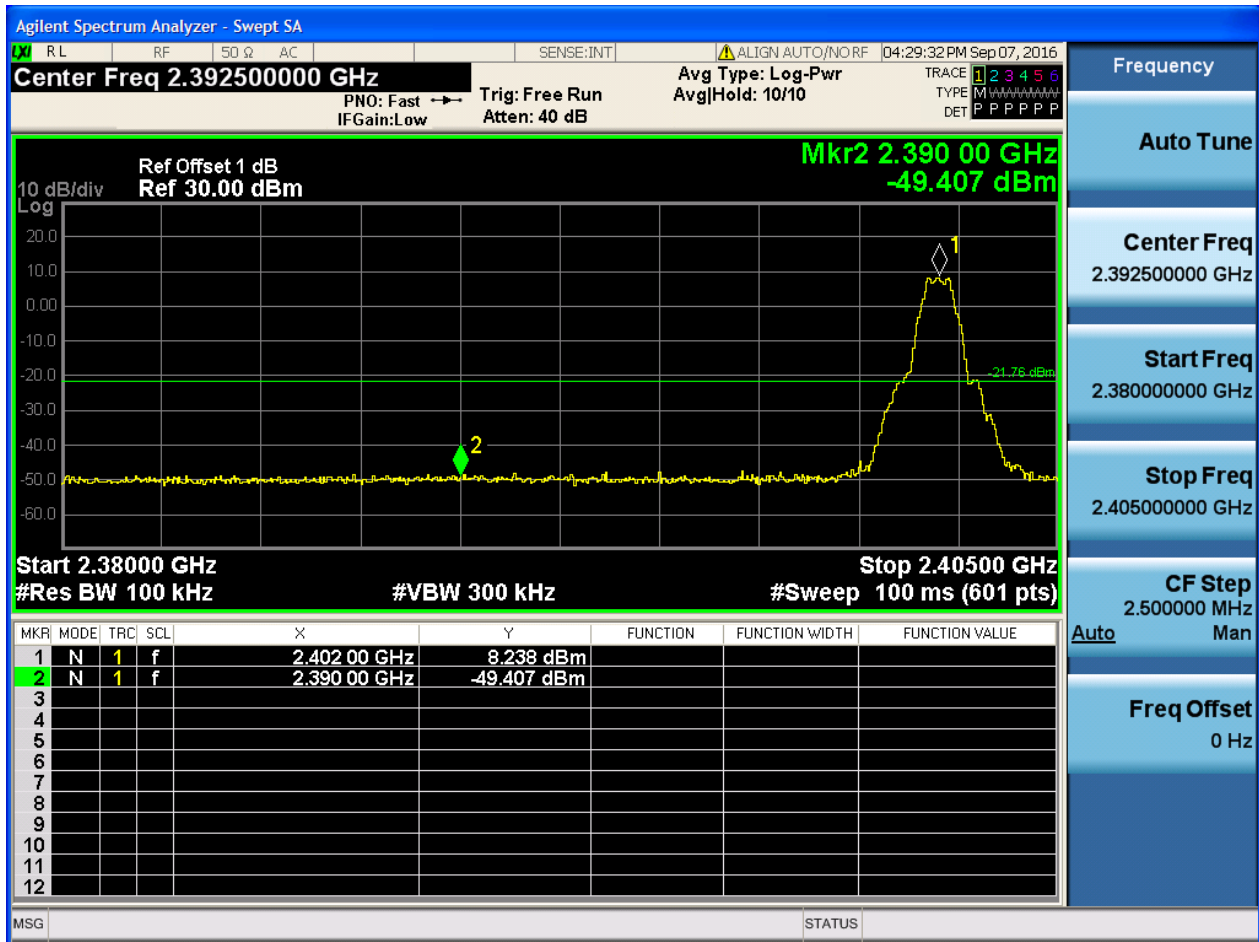



2.3 TM1_Ch39@Ant 1

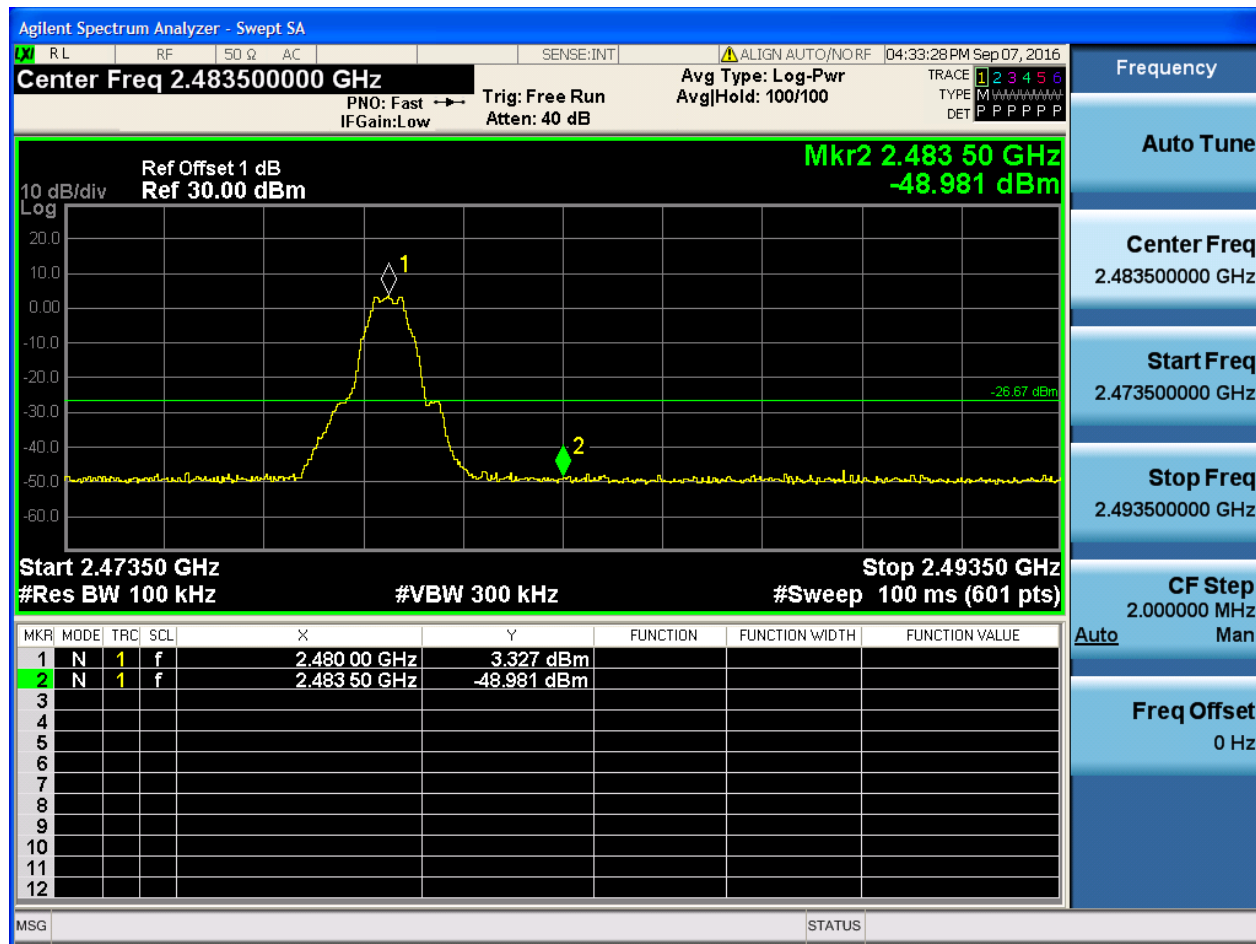

7 Appendix G: Unwanted Emissions into Non-Restricted Frequency

Bands

In this Appendix, the "Pref", which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the "Puw" refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW} [kHz])$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the "< Limit" denotes that "The Puw [dBm] is less than Pref[dBm]-30[dBm], see test plots for detailed".

Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Pref[dBm]	Puw[dBm]	Verdict
TM1	Ch0	2402	8.31	<limit	pass
	Ch19	2440	5.38	<limit	pass
	Ch39	2480	3.42	<limit	pass



Part II - Test Plots

2.1 TM1_Ch0@Ant 1


Pref:

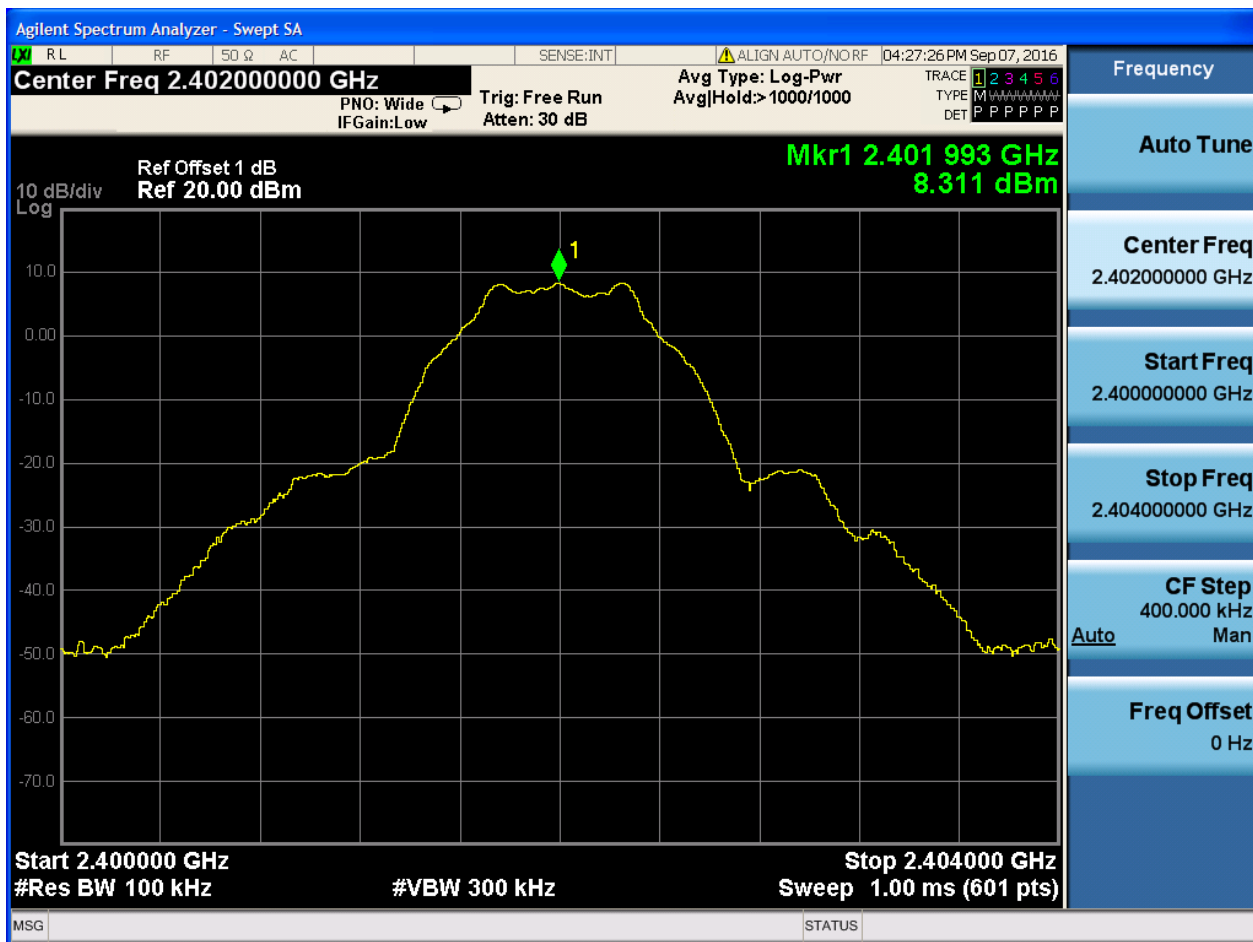






Puw:



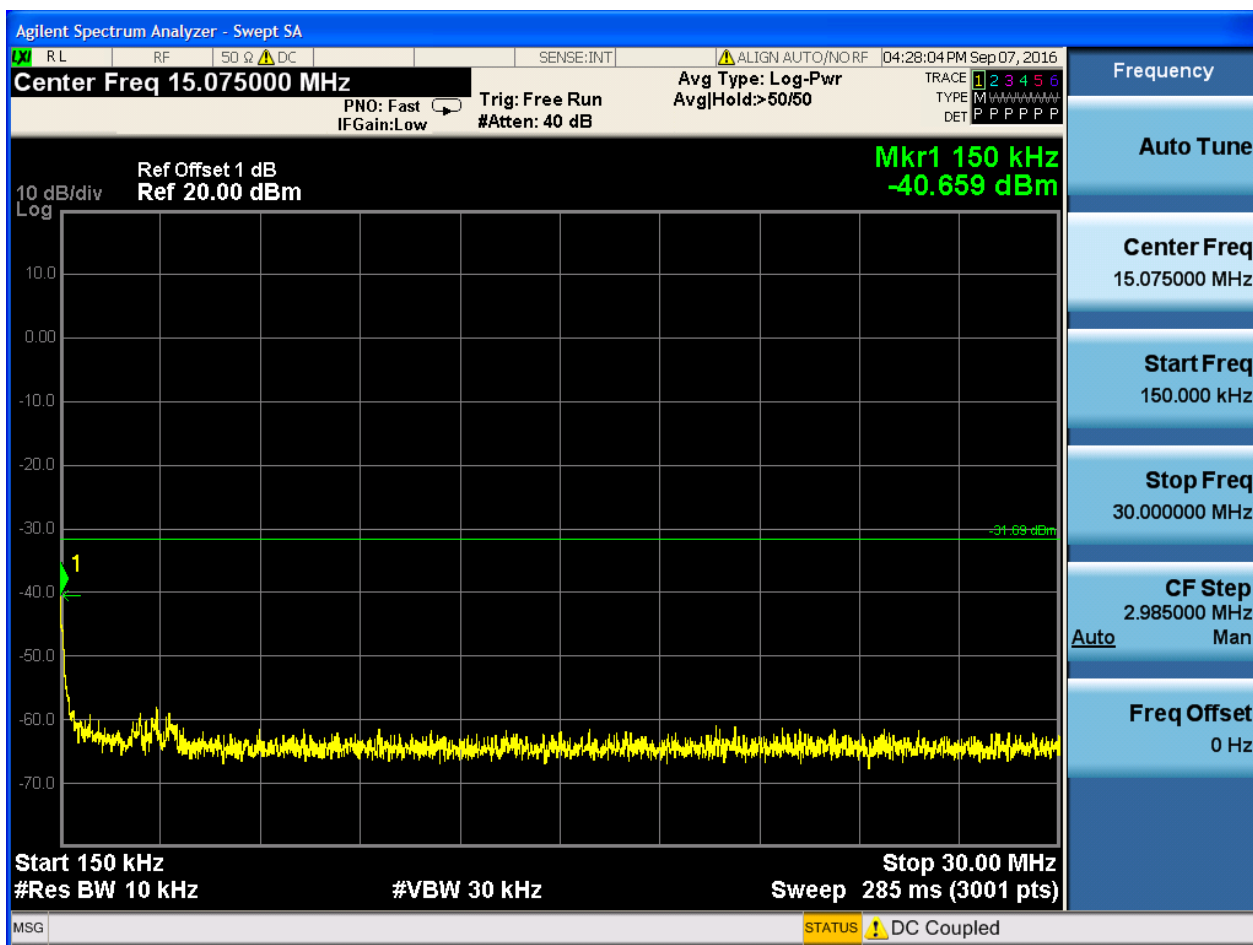

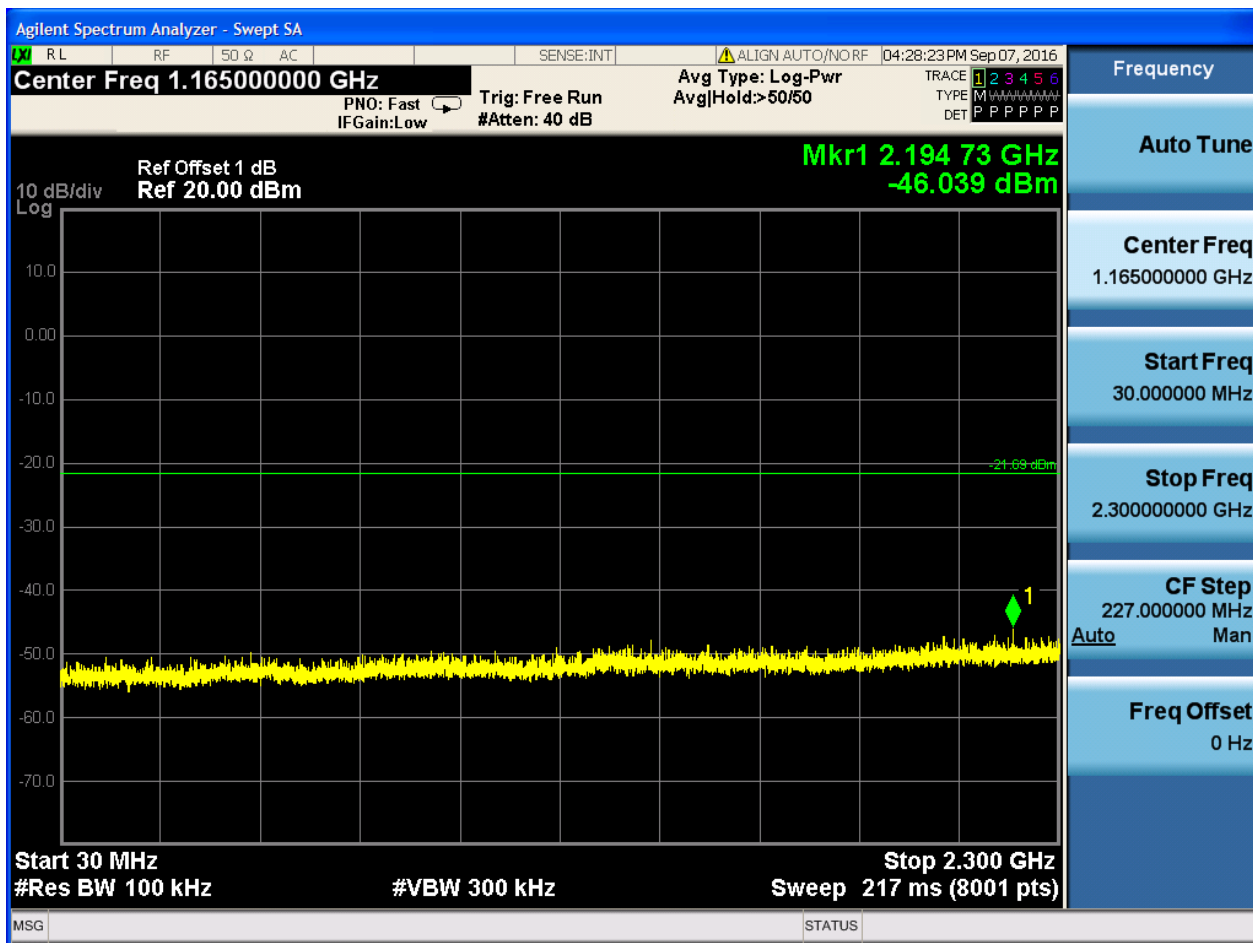

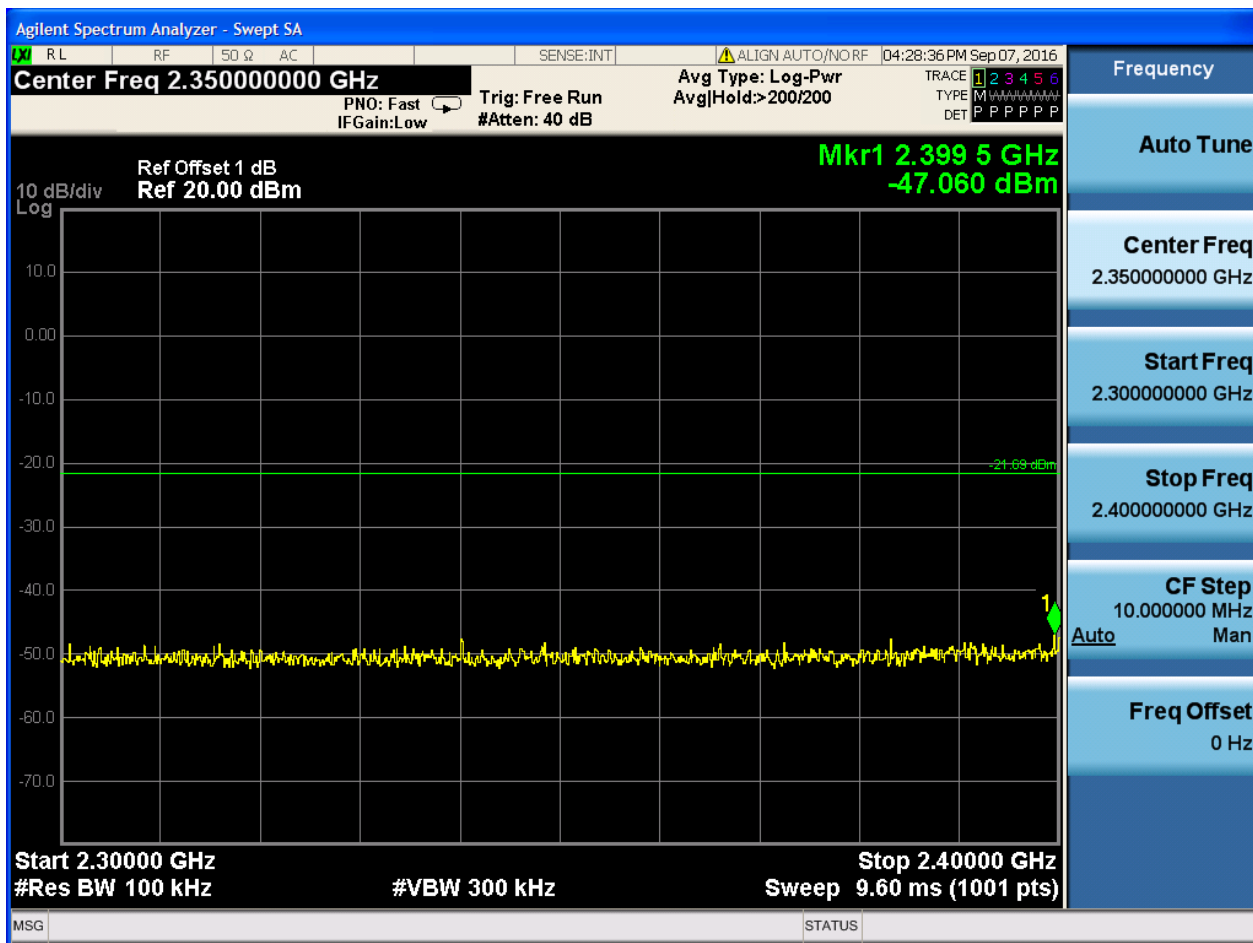

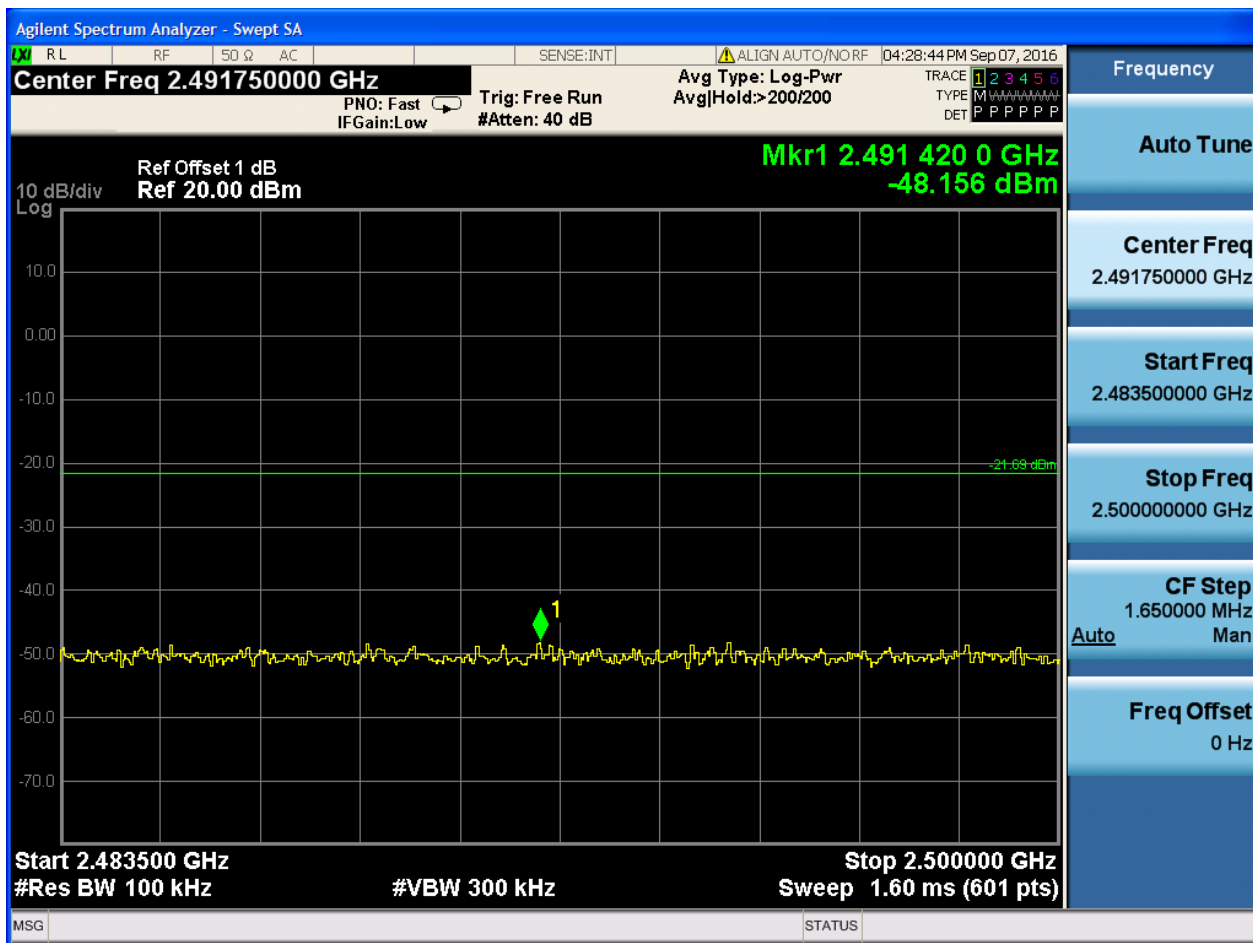




2.3 TM1_Ch19@Ant 1


Pref:








PuW:

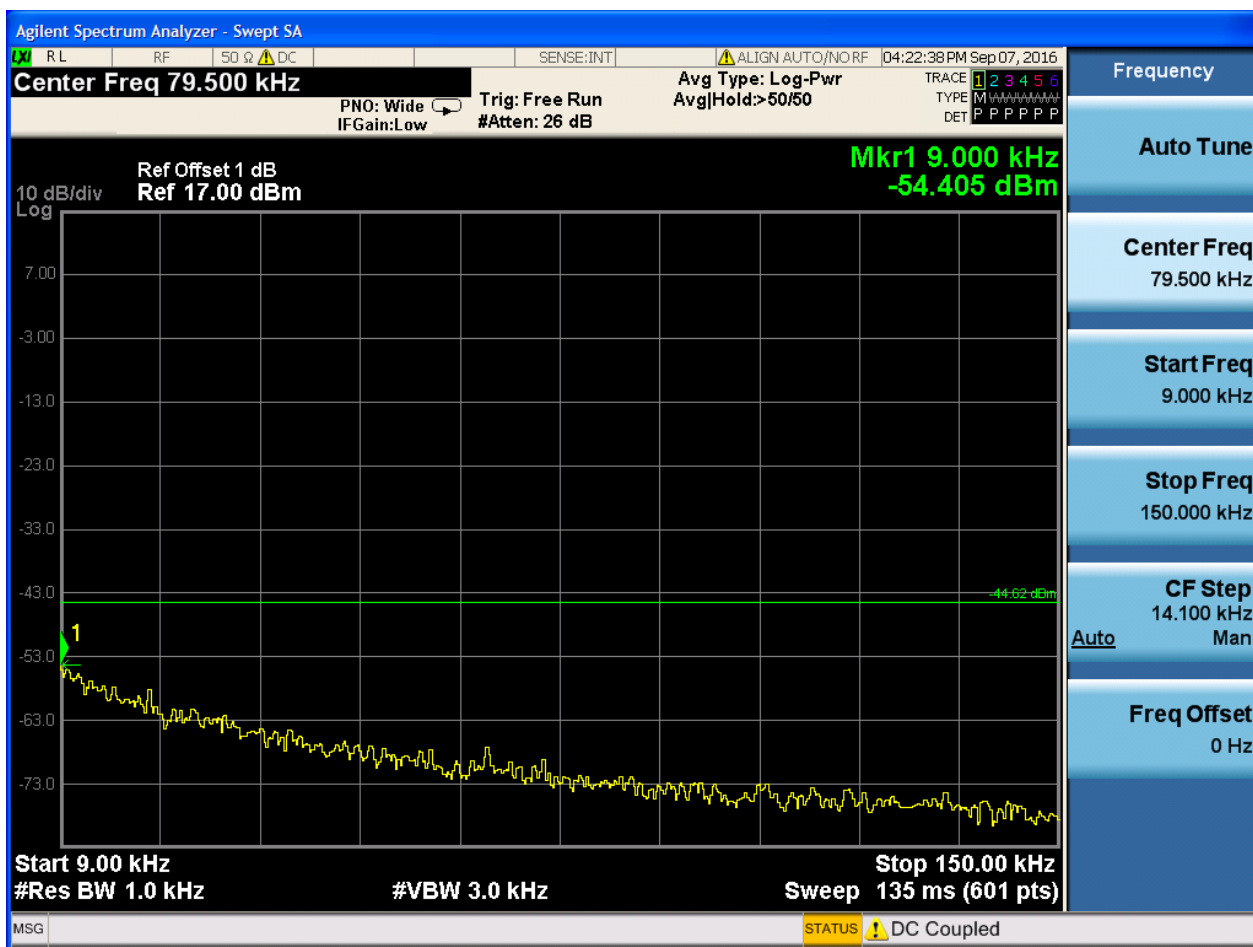



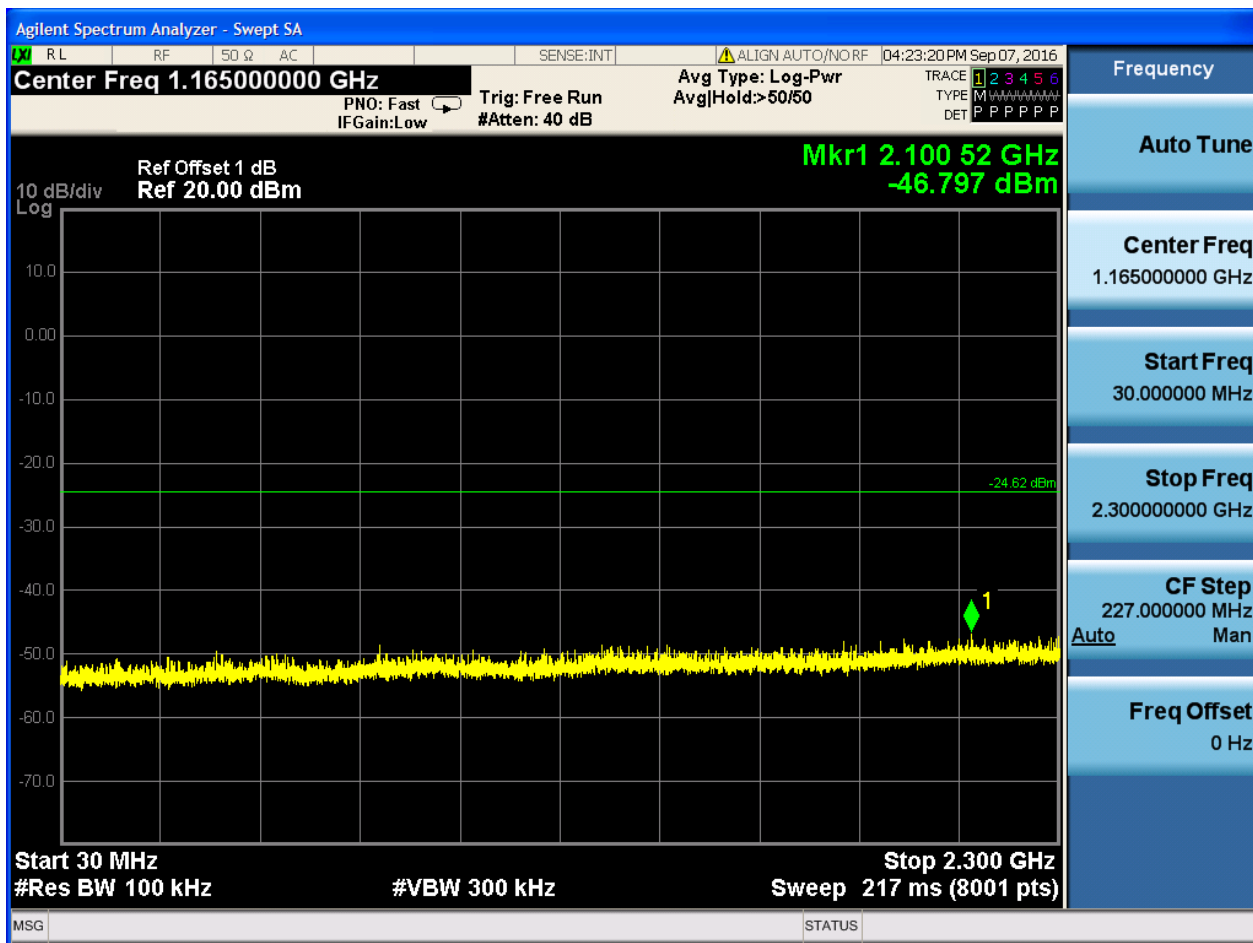

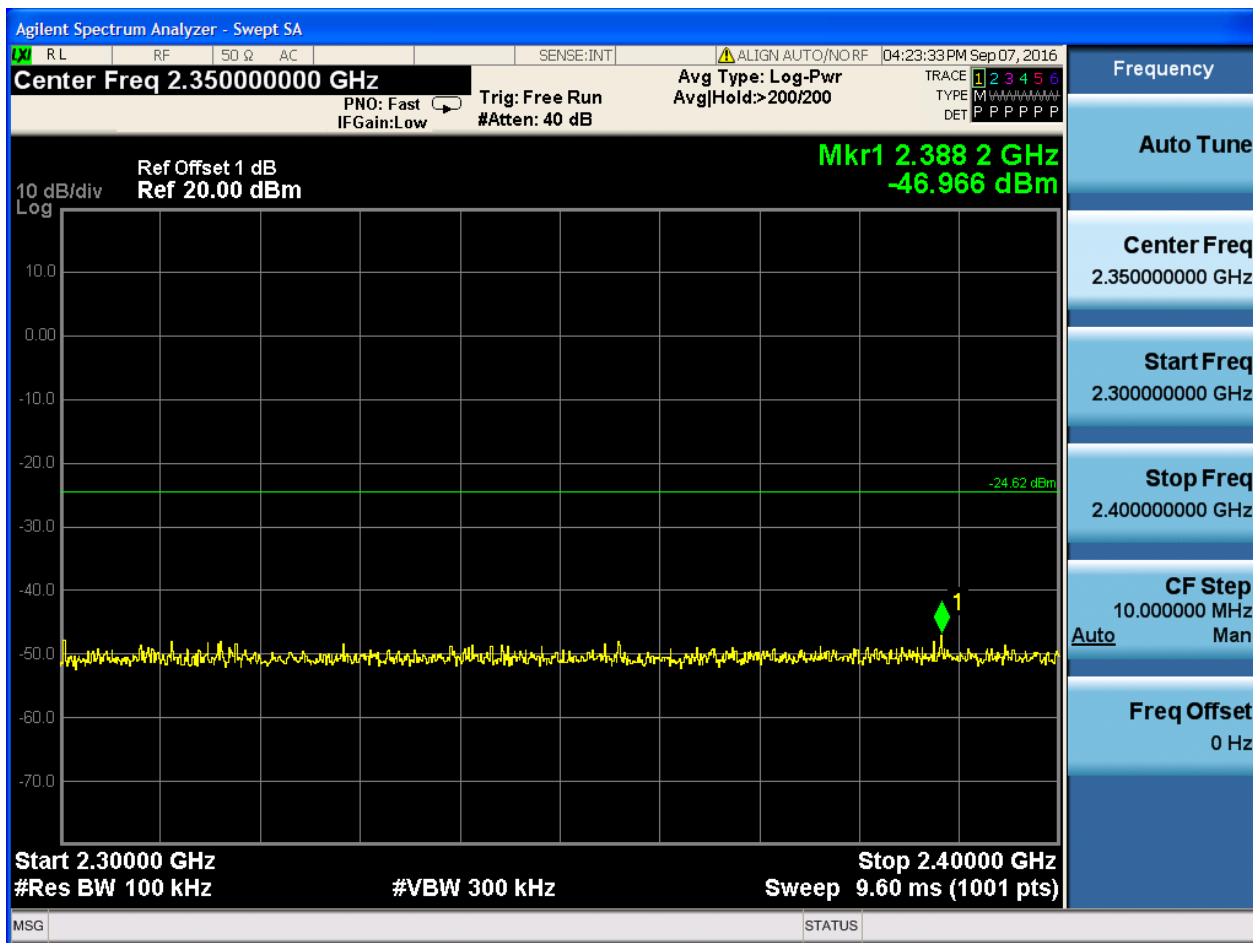

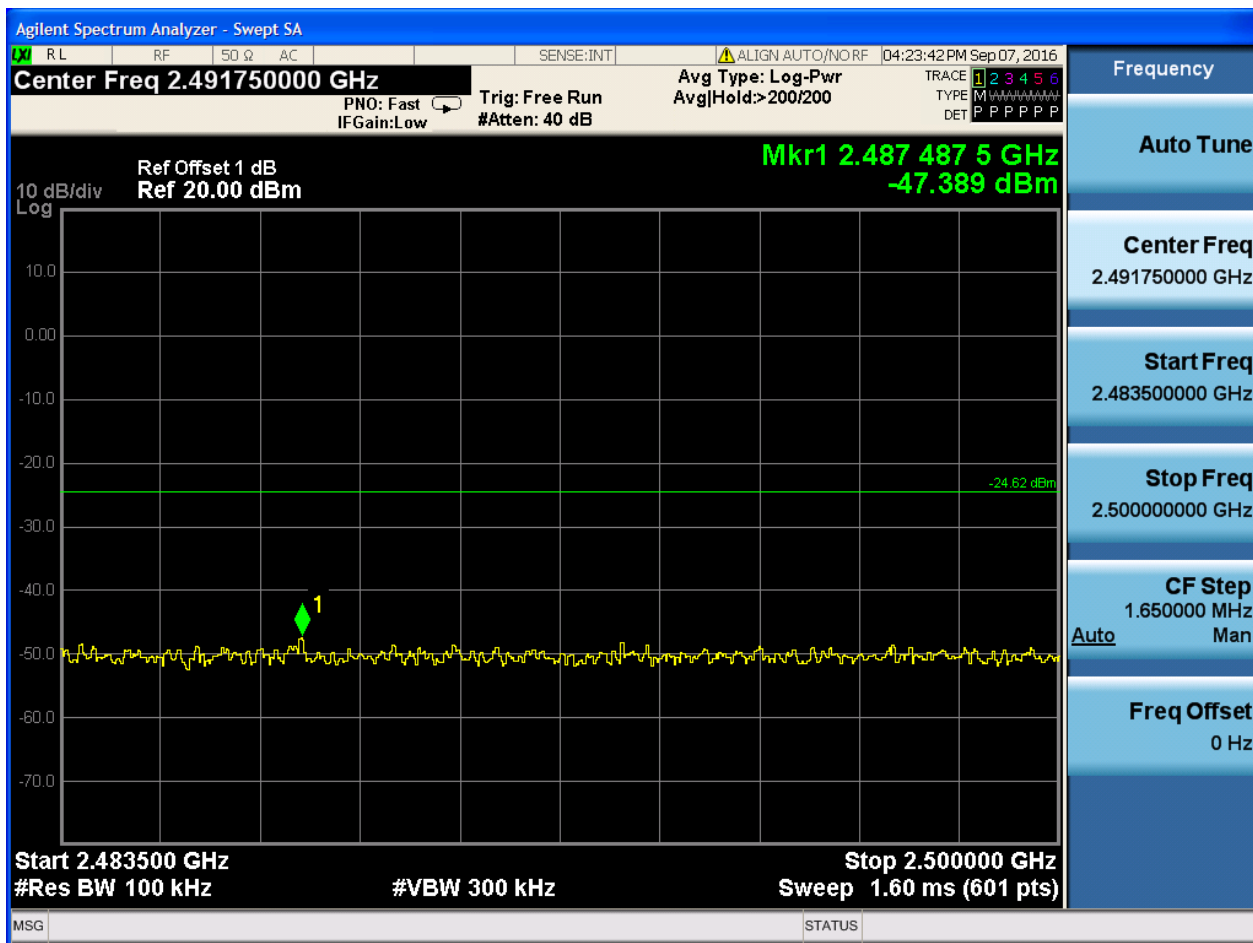






2.5 TM1_Ch39@Ant 1


Pref:

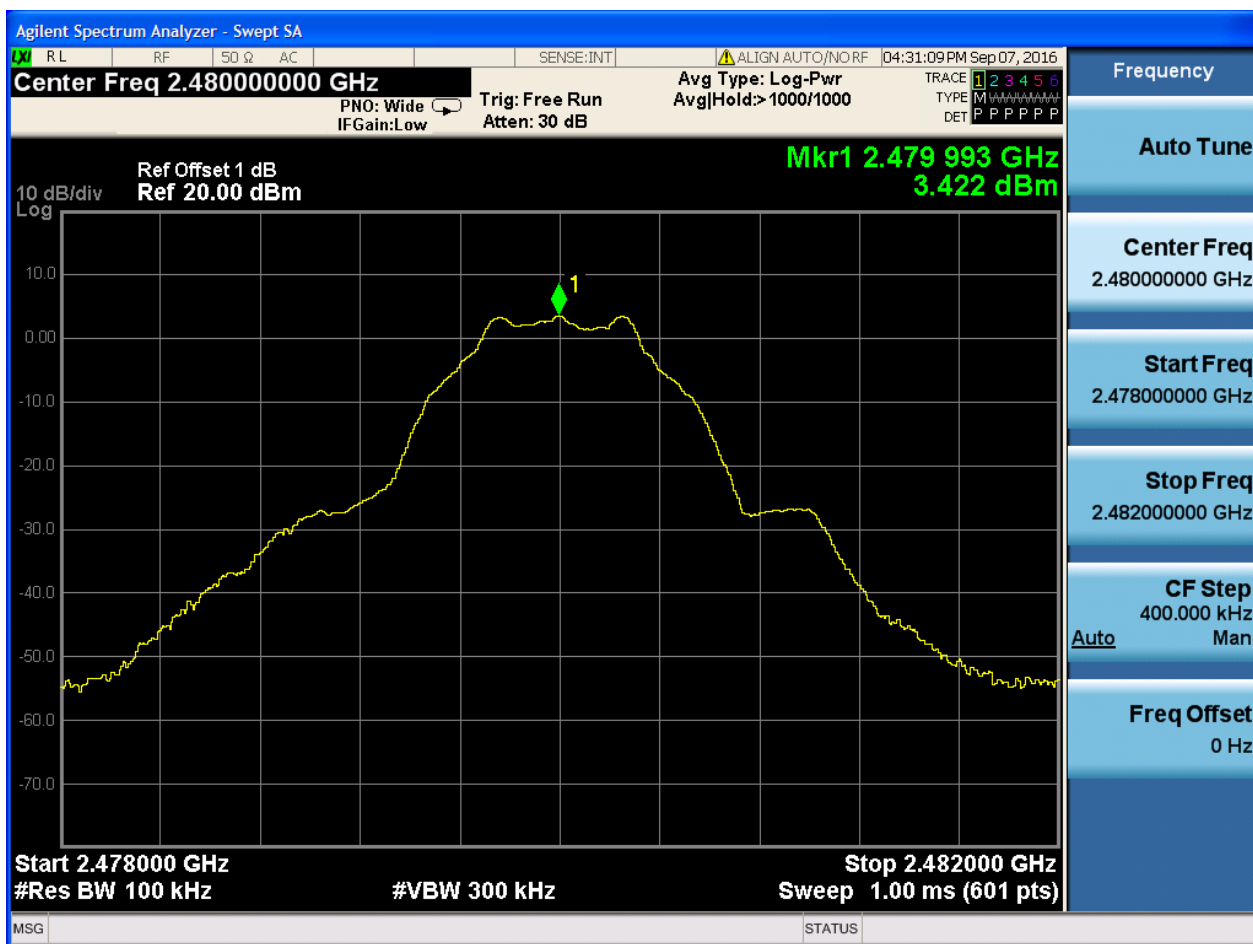






Puw:



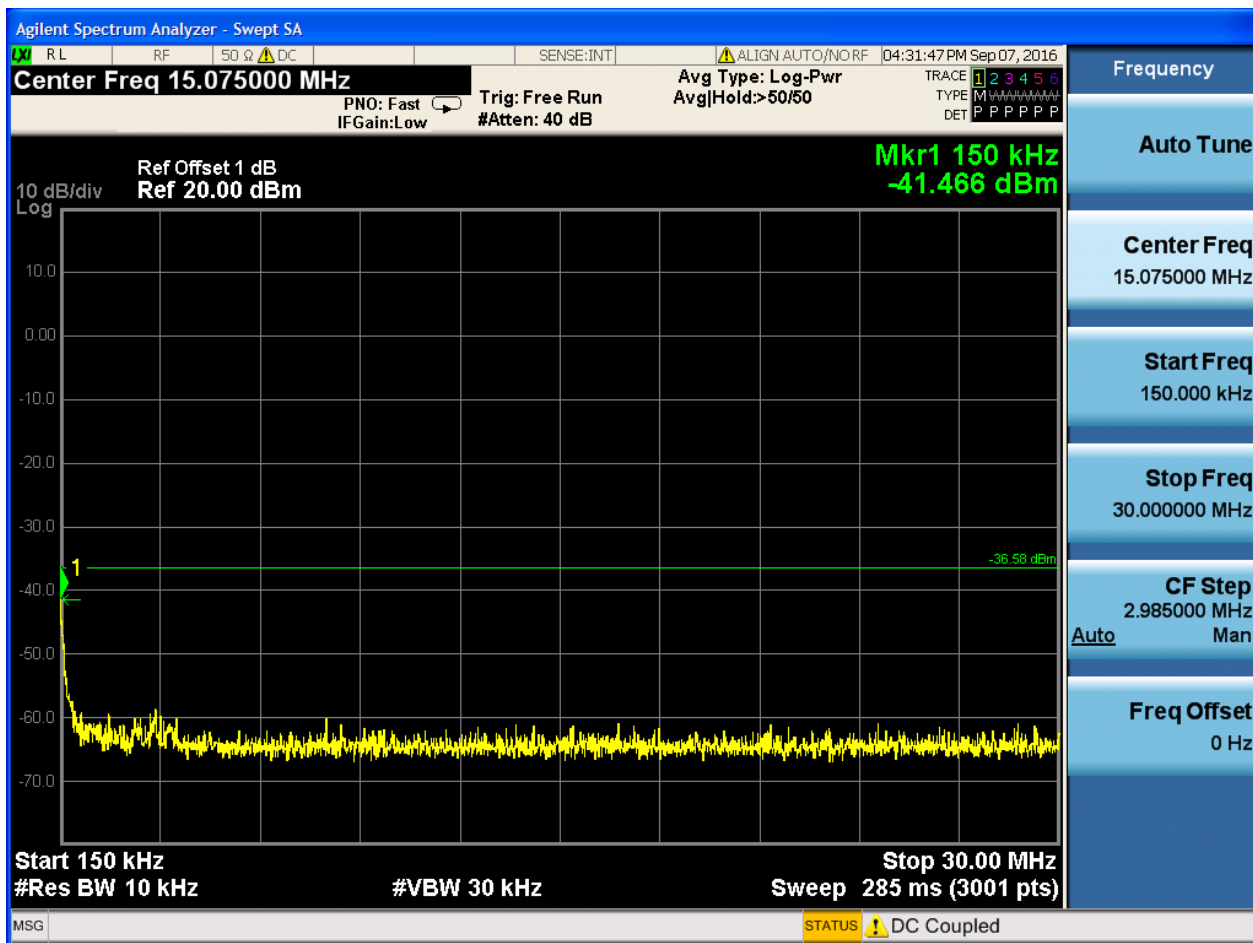

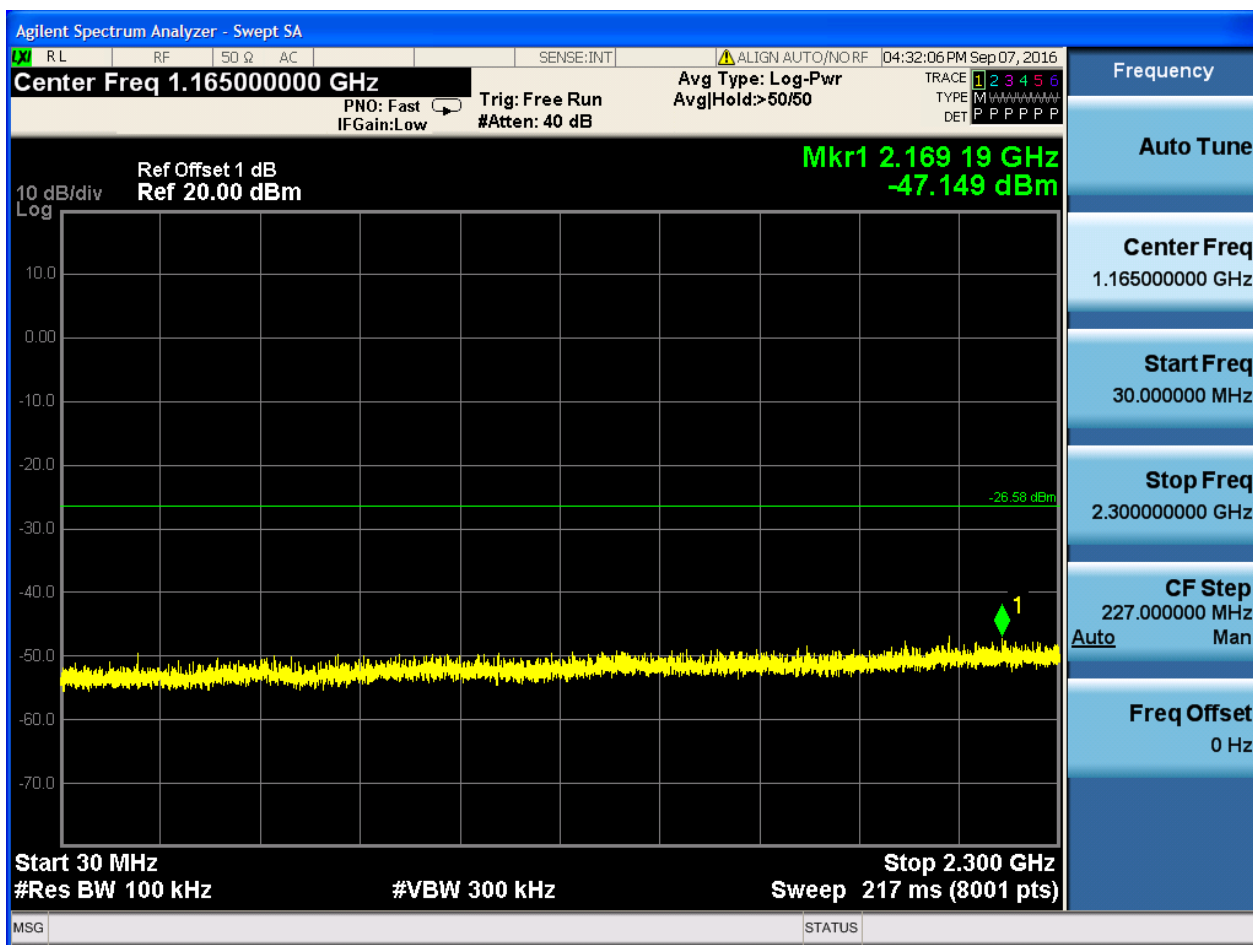

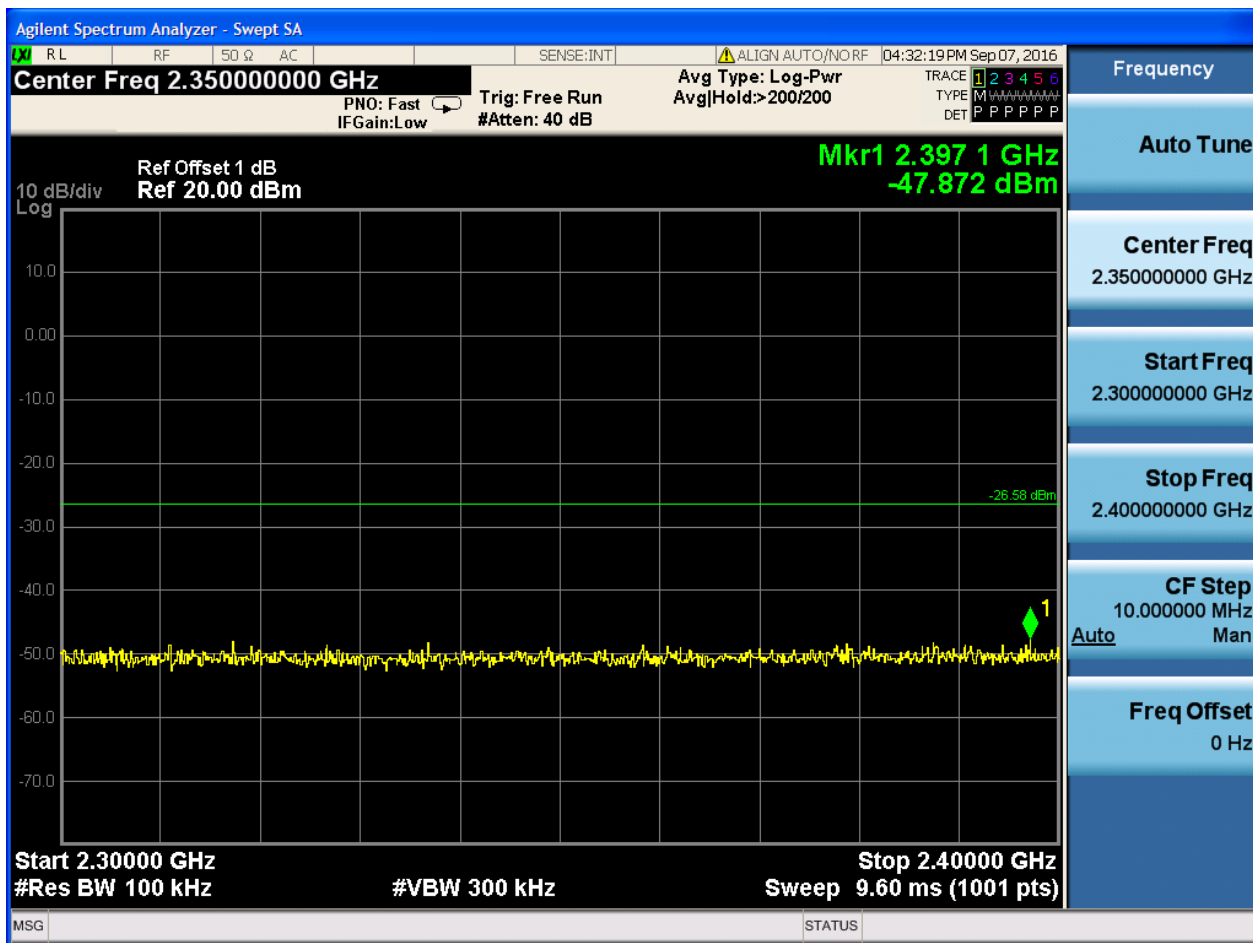

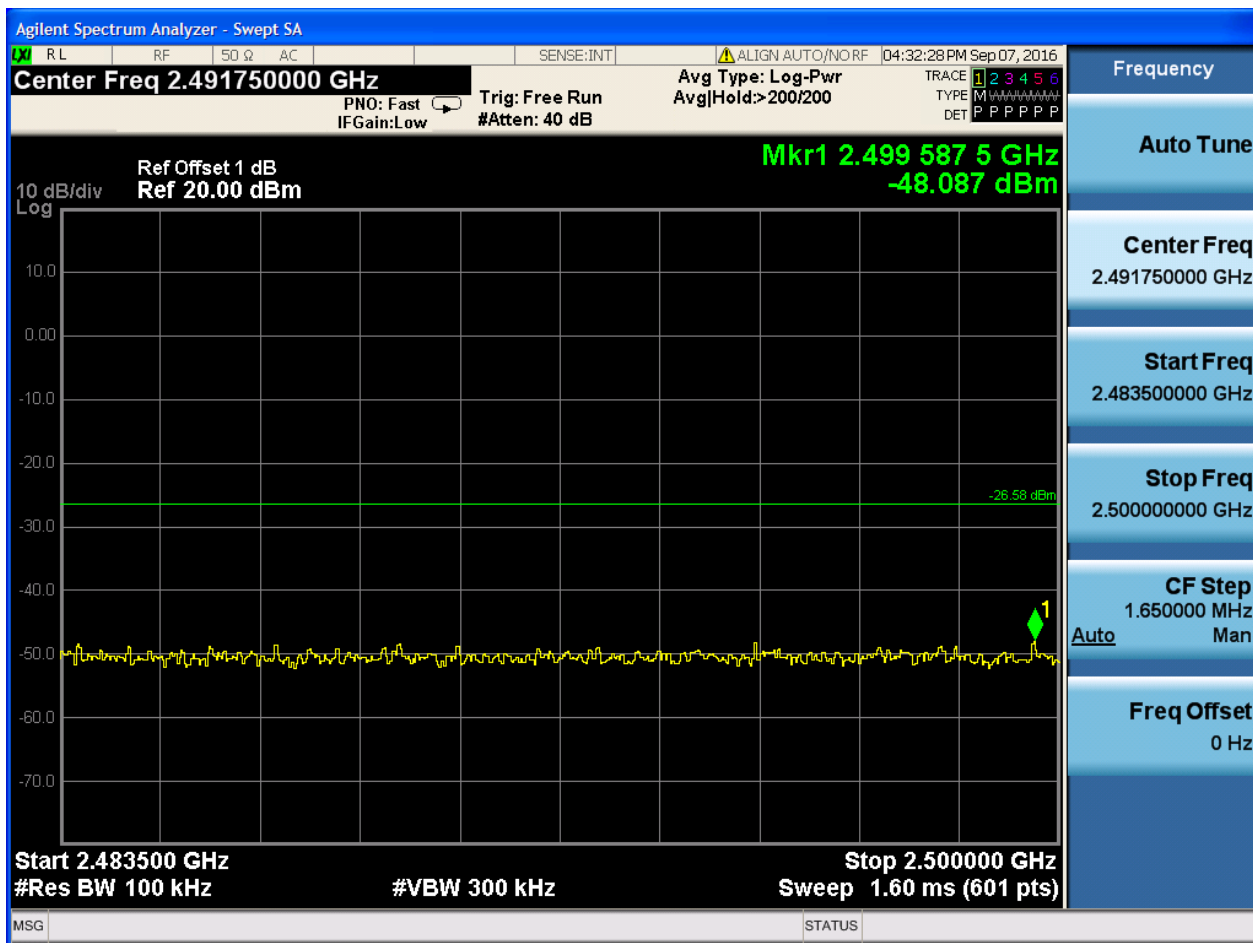



8 Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


8.1Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

8.2Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

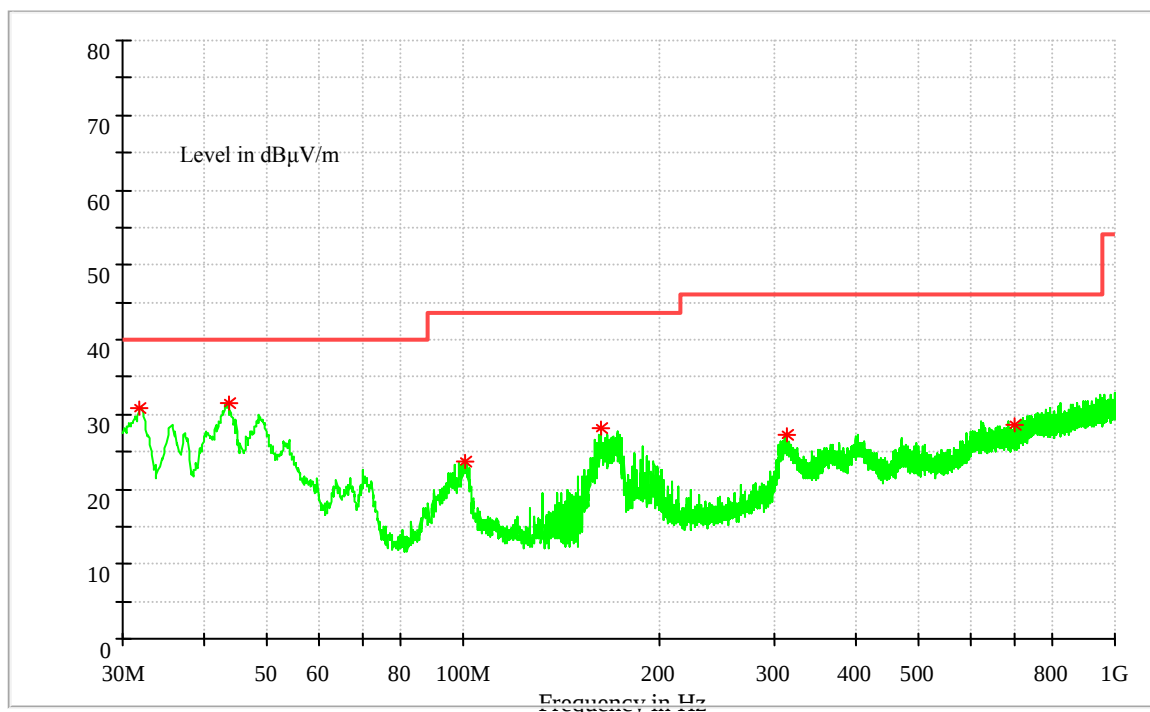

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Trans d. (dB)
31.94	30.92	40	9.08	100	H	243	14.8
43.58	31.42	40	8.58	100	V	326	15.3
100.68875	23.74	43.5	19.76	100	V	174	13.8
163.01125	28.17	43.5	15.33	100	V	257	10.7
313.84625	27.34	46	18.66	100	H	103	16
699.90625	28.63	46	17.37	100	V	98	23.1

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


2, Margin=Limit - Level

8.3Part 3: Testing Range of “1 GHz to 3 GHz”

- Note 1: The testing range of “1GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dBμV/m) and Average Limit (54 dBμV/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

8.3.1Test Mode: TM1

8.3.1.1 Channel 0

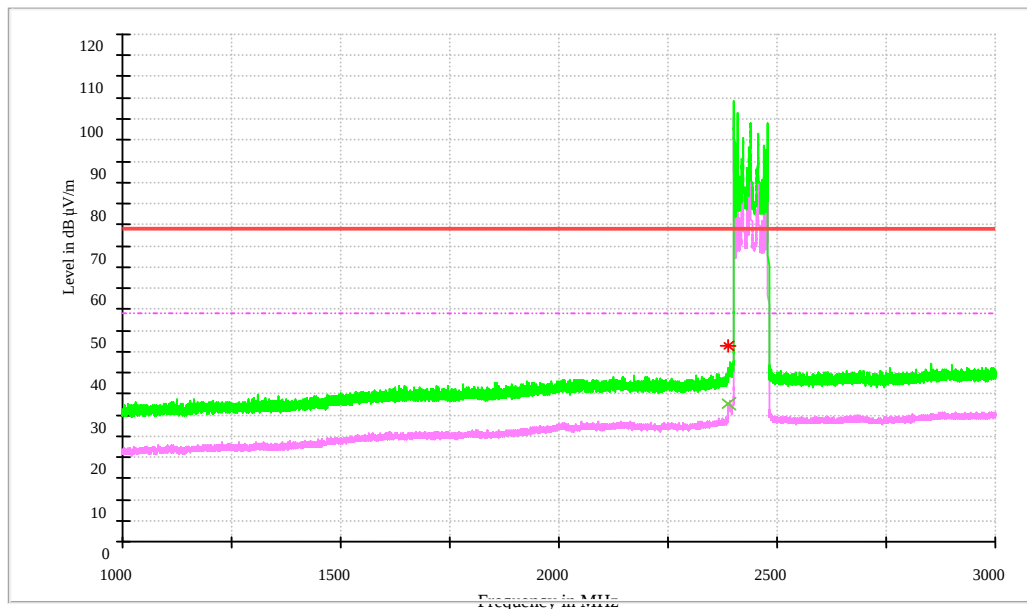

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h	Transd. (dB)
2390	32.57	54	21.43	153	H	222	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h (deg)	Transd. (dB)
2390	46.43	74	27.57	123	H	226	-7.6


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

8.3.1.2Channel 39

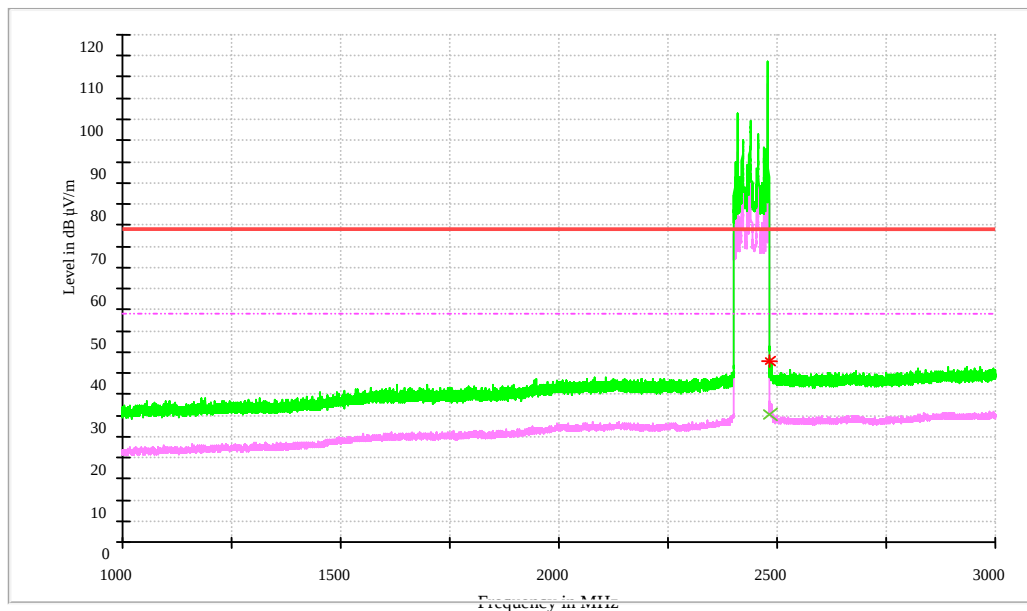

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h	Transd. (dB)
2483.5	30.00	54	24.00	108	H	100	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimut h (deg)	Transd. (dB)
2483.5	42.96	74	31.04	165	H	135	-5.4

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

8.4Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands far away from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

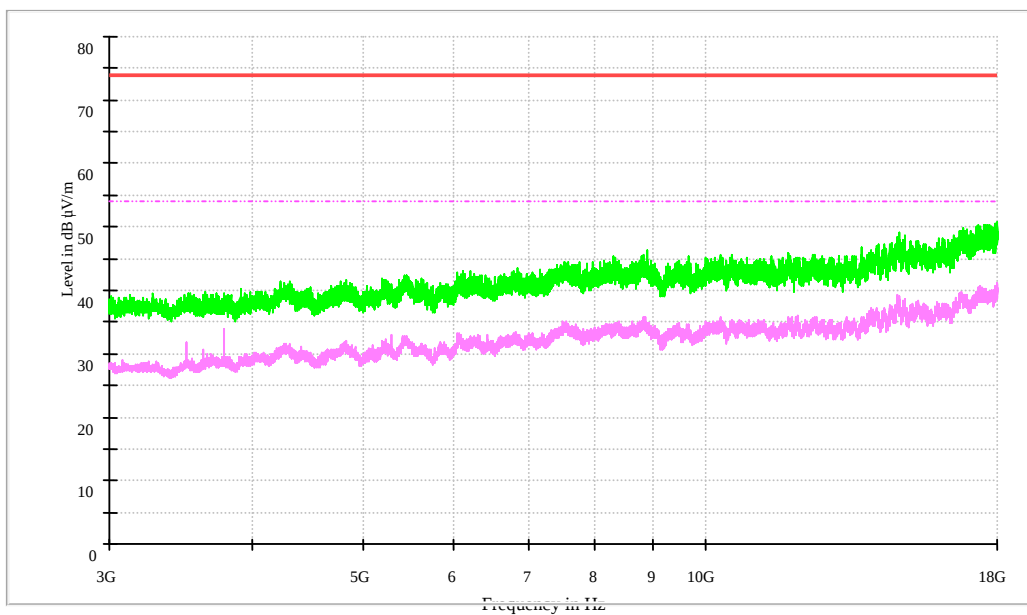




8.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

9 Appendix I: AC Power Line Conducted Emission

Note1: RBW =9 kHz, VBW = 30 kHz

Channel 39

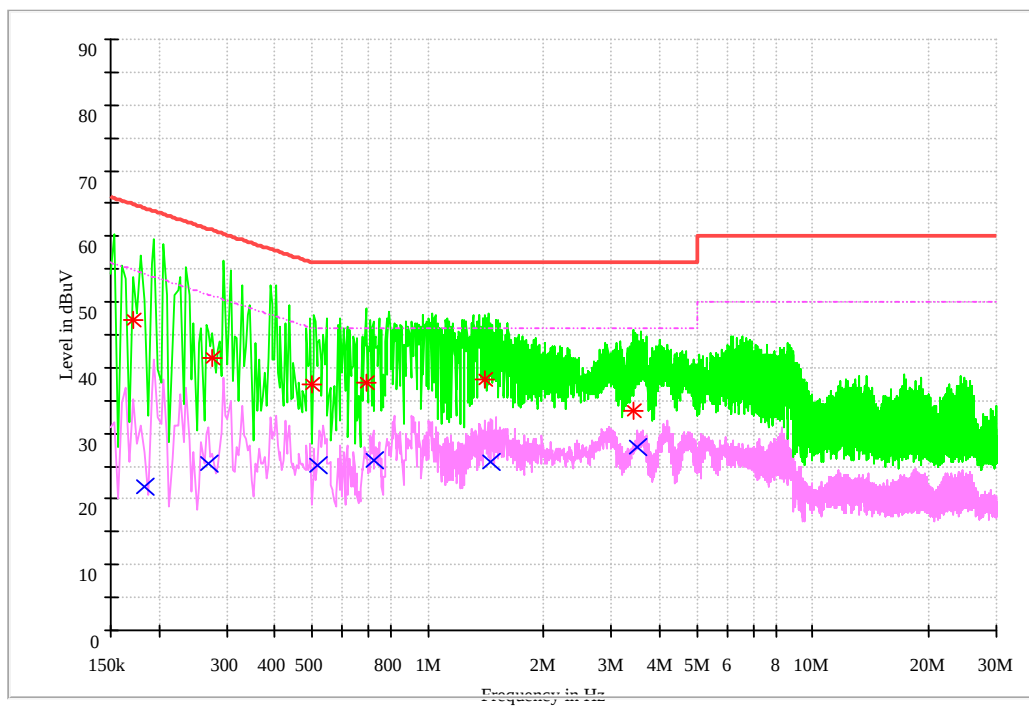

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.183617	21.77	54.32	9.7	32.55	L1	FLO
0.268904	25.30	51.15	9.7	25.85	N	FLO
0.515709	25.10	46.00	9.7	20.90	L1	FLO
0.723412	25.93	46.00	9.7	20.07	L1	FLO
1.454638	25.70	46.00	9.7	20.30	L1	FLO
3.512502	27.82	46.00	9.8	18.18	L1	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.171514	47.15	64.89	9.7	17.74	N	FLO
0.274216	41.44	60.99	9.7	19.55	N	FLO
0.498723	37.41	56.02	9.7	18.61	N	FLO
0.696370	37.62	56.00	9.7	18.38	N	FLO
1.406806	38.15	56.00	9.7	17.85	L1	FLO
3.414750	33.47	56.00	9.8	22.53	N	FLO

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END