


Appendix F

Conducted Emission at Power Port According to FCC Part 15.107

ADAPTER TPCA-053065E

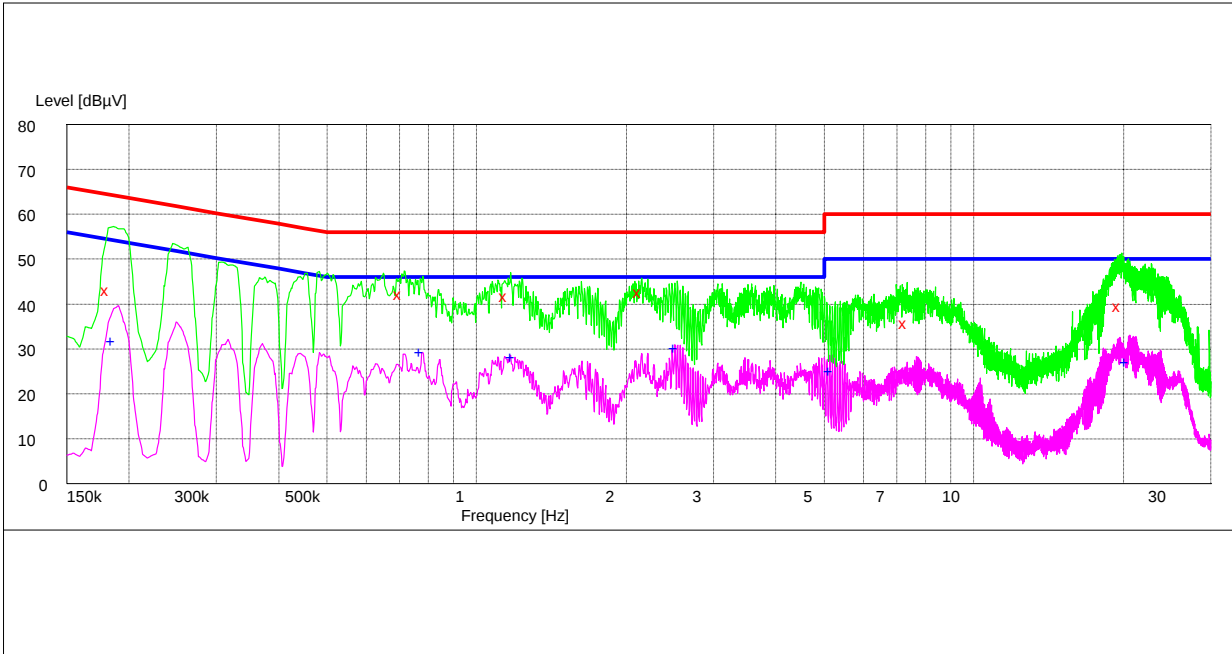


MEASUREMENT RESULT:QP DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.181500	43.30	10.1	64	20.7	N	FLO
0.703500	42.60	10.0	56	13.4	L3	FLO
1.149000	42.00	10.1	56	14.0	L3	FLO
2.134500	42.90	10.1	56	13.1	L3	FLO
7.305000	36.00	10.1	60	24.0	L3	FLO
19.666500	39.90	10.3	60	20.1	N	FLO

MEASUREMENT RESULT:AV DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.186000	32.00	10.1	54	22.0	N	FLO
0.775500	29.60	10.0	46	16.4	L3	FLO
1.185000	28.50	10.1	46	17.5	L3	FLO
2.517000	30.60	10.1	46	15.4	L3	FLO
5.158500	25.50	10.1	50	24.5	L3	FLO
20.386500	27.30	10.3	50	22.7	N	FLO

ADAPTER XQLCHW03

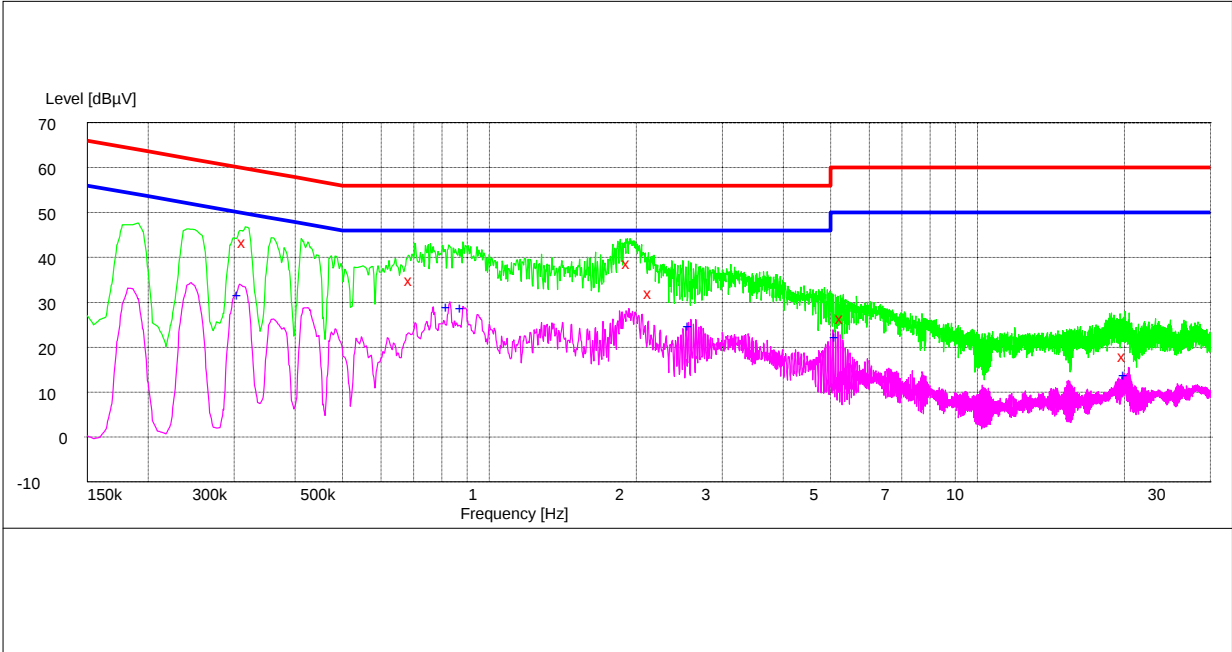

MEASUREMENT RESULT:QP DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.316500	43.70	10.1	60	16.3	L3	FLO
0.694500	35.20	10.0	56	20.8	L3	FLO
1.936500	39.00	10.1	56	17.0	L3	FLO
2.143500	32.30	10.1	56	23.7	L3	FLO
5.293500	26.90	10.2	60	33.1	L3	FLO
20.071500	18.40	10.3	60	41.6	L3	FLO

MEASUREMENT RESULT:AV DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.316500	44.30	10.2	50	5.7	L3	FLO
0.555000	31.50	10.0	46	14.5	L3	FLO
1.590000	28.40	9.9	46	17.6	L3	FLO
3.633000	26.40	10.1	46	19.6	L3	FLO
9.766500	34.50	10.9	50	15.5	L3	FLO
12.921000	29.50	11.6	50	20.5	L3	FLO