


Appendix A: 20dB Emission Bandwidth (EBW)

1 Result Table


EUT Conf.	EBW [MHz]	Verdict
TM1_DH5_Ch0	0.941	Pass
TM1_DH5_Ch39	0.942	Pass
TM1_DH5_Ch78	0.942	Pass
TM2_2DH5_Ch0	1.259	Pass
TM2_2DH5_Ch39	1.259	Pass
TM2_2DH5_Ch78	1.260	Pass
TM3_3DH5_Ch0	1.250	Pass
TM3_3DH5_Ch39	1.247	Pass
TM3_3DH5_Ch78	1.248	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

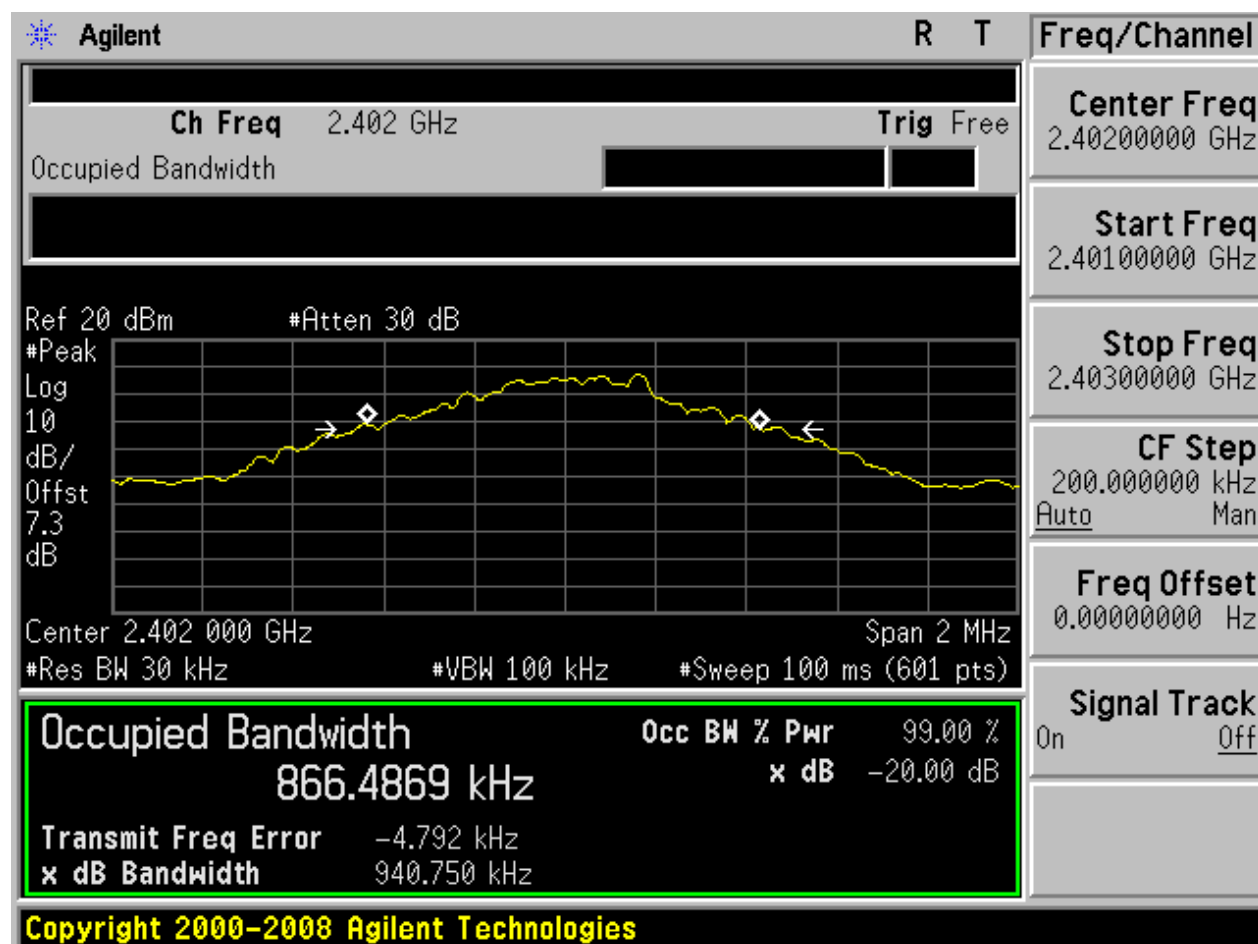


2.2 TM1_DH5_Ch39

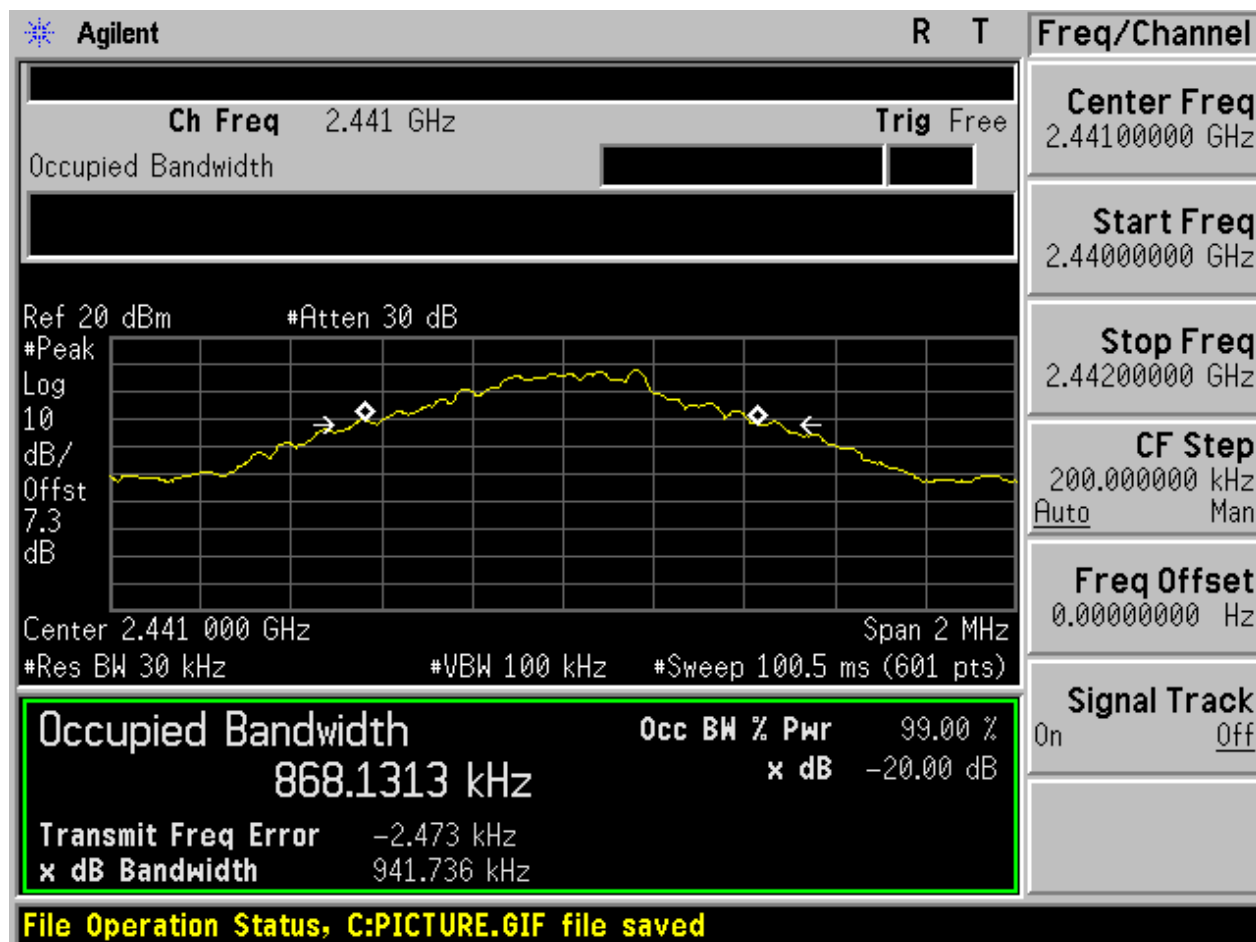


2.3 TM1_DH5_Ch78

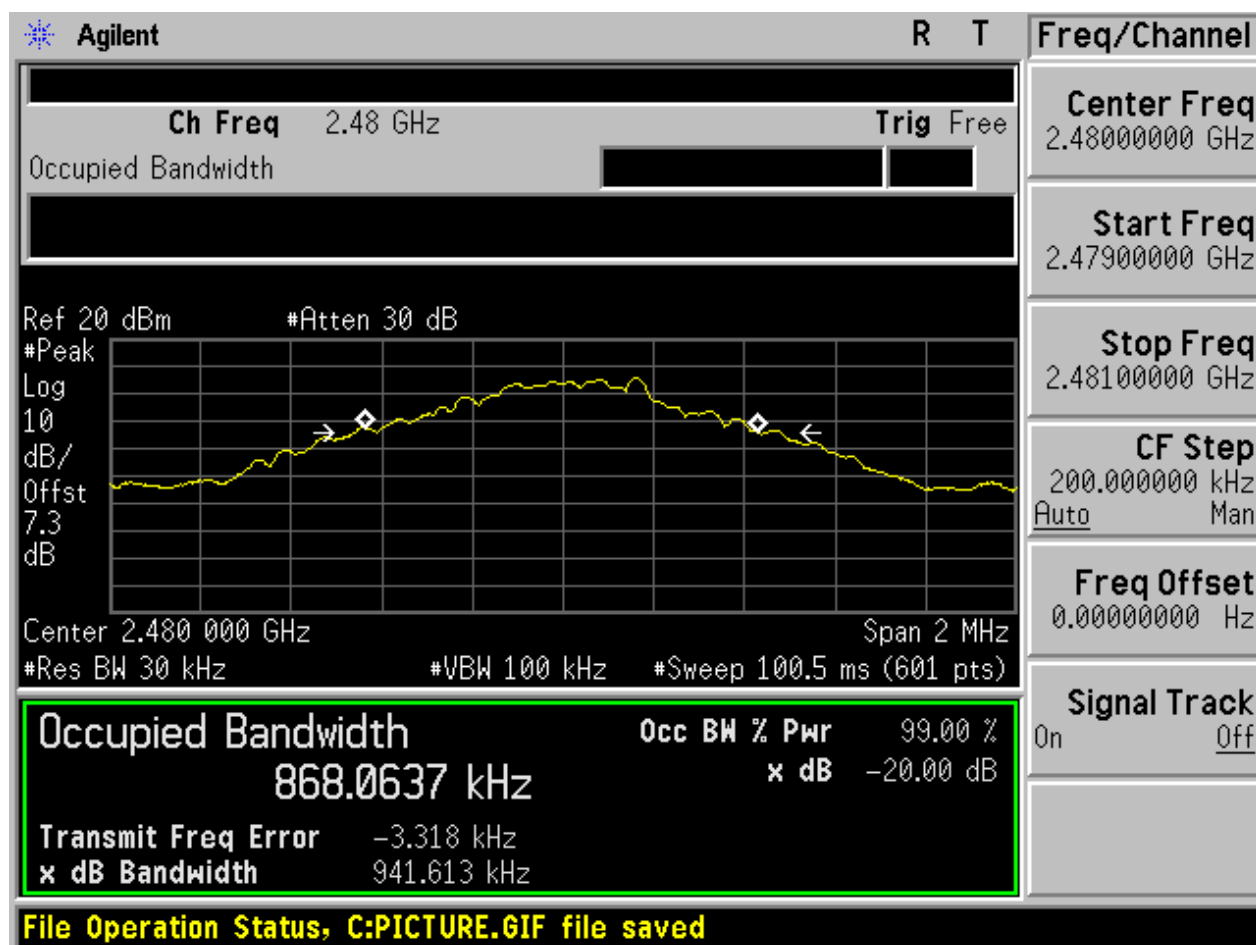

2.4 TM2_2DH5_Ch0

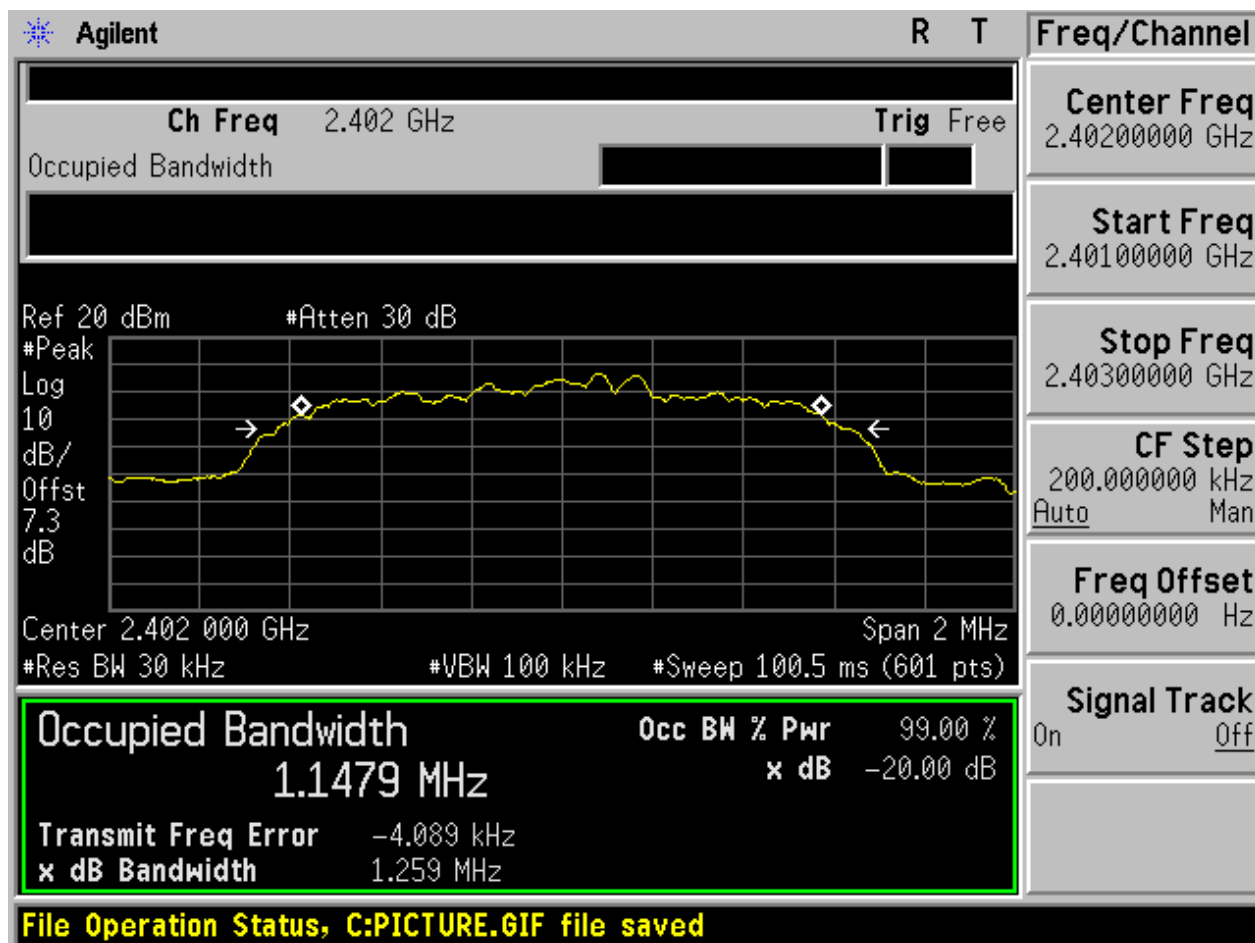


2.5 TM2_2DH5_Ch39

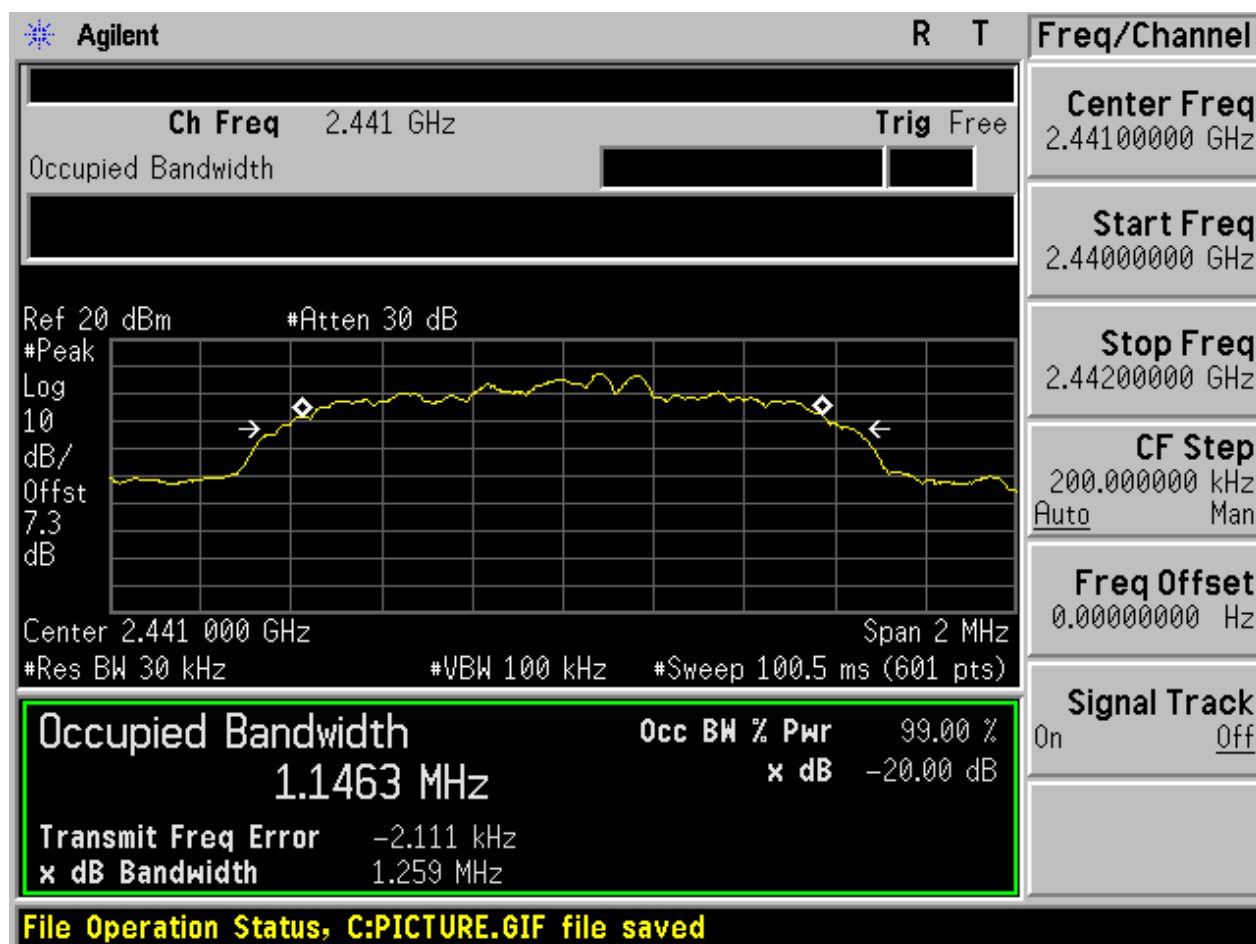


The screenshot displays the Agilent spectrum analyzer interface. The main display shows a signal trace with a peak marker at approximately 2.48 GHz. The trace is labeled with 'Ref 20 dBm' and '#Atten 30 dB'. The peak marker is labeled with 'Peak' and 'Log 10 dB/Offst 7.3 dB'. The trace is also labeled with 'Occupied Bandwidth' and '1.1467 MHz'. The trace is also labeled with 'Transmit Freq Error -2.648 kHz' and 'x dB Bandwidth 1.260 MHz'. The trace is also labeled with 'File Operation Status, C:PICTURE.GIF file saved'.

Parameter	Value
Center Freq	2.48 GHz
Trig	Free
Center Freq	2.4800000 GHz
Start Freq	2.47900000 GHz
Stop Freq	2.48100000 GHz
CF Step	200.000000 kHz
Auto	Man
Freq Offset	0.00000000 Hz
Span	2 MHz
#Res BW	30 kHz
#VBW	100 kHz
#Sweep	100.5 ms (601 pts)
Occupied Bandwidth	1.1467 MHz
Occ BW % Pwr	99.00 %
x dB	-20.00 dB
Transmit Freq Error	-2.648 kHz
x dB Bandwidth	1.260 MHz
File Operation Status	C:PICTURE.GIF file saved


2.7 TM3_3DH5_Ch0

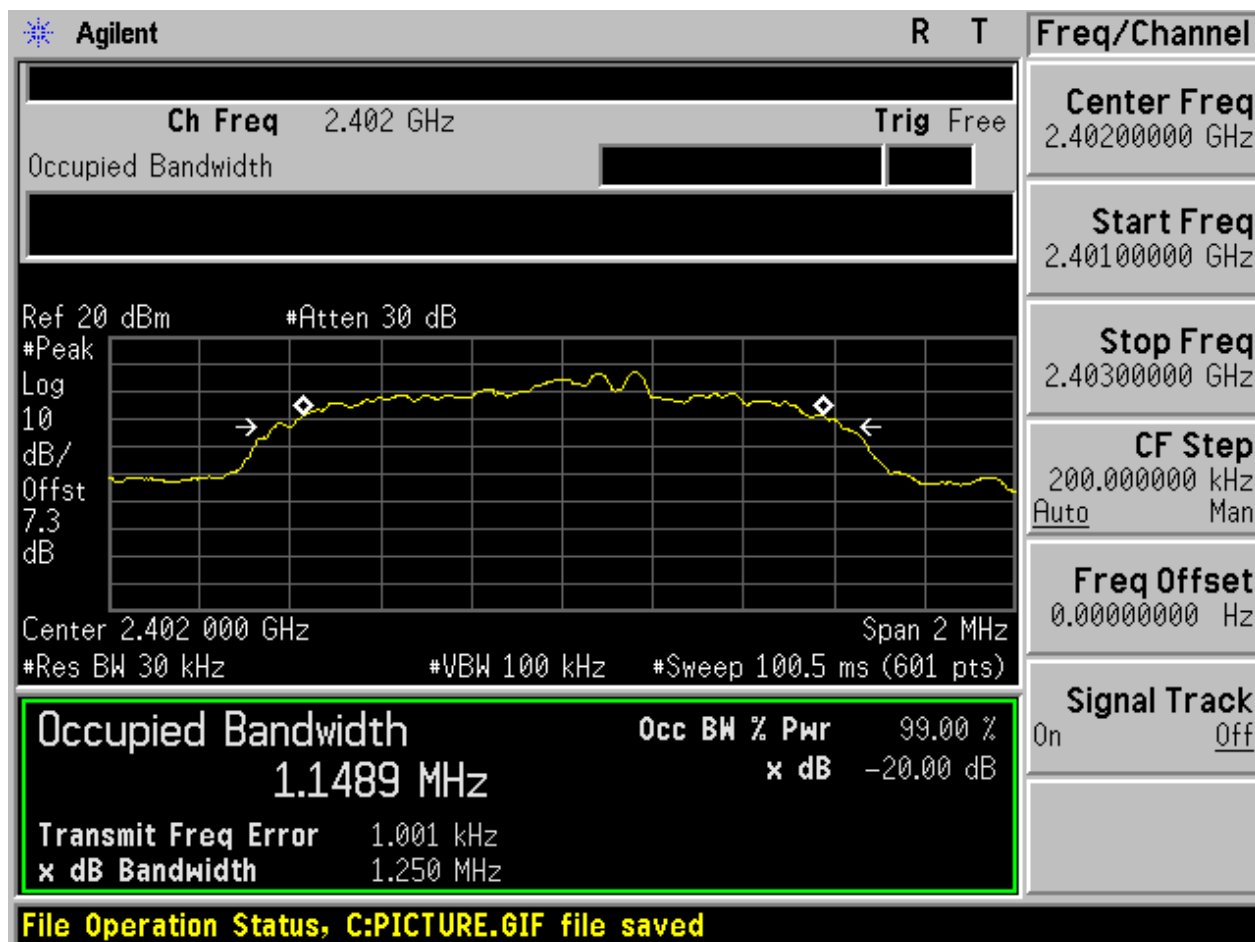

2.8 TM3_3DH5_Ch39

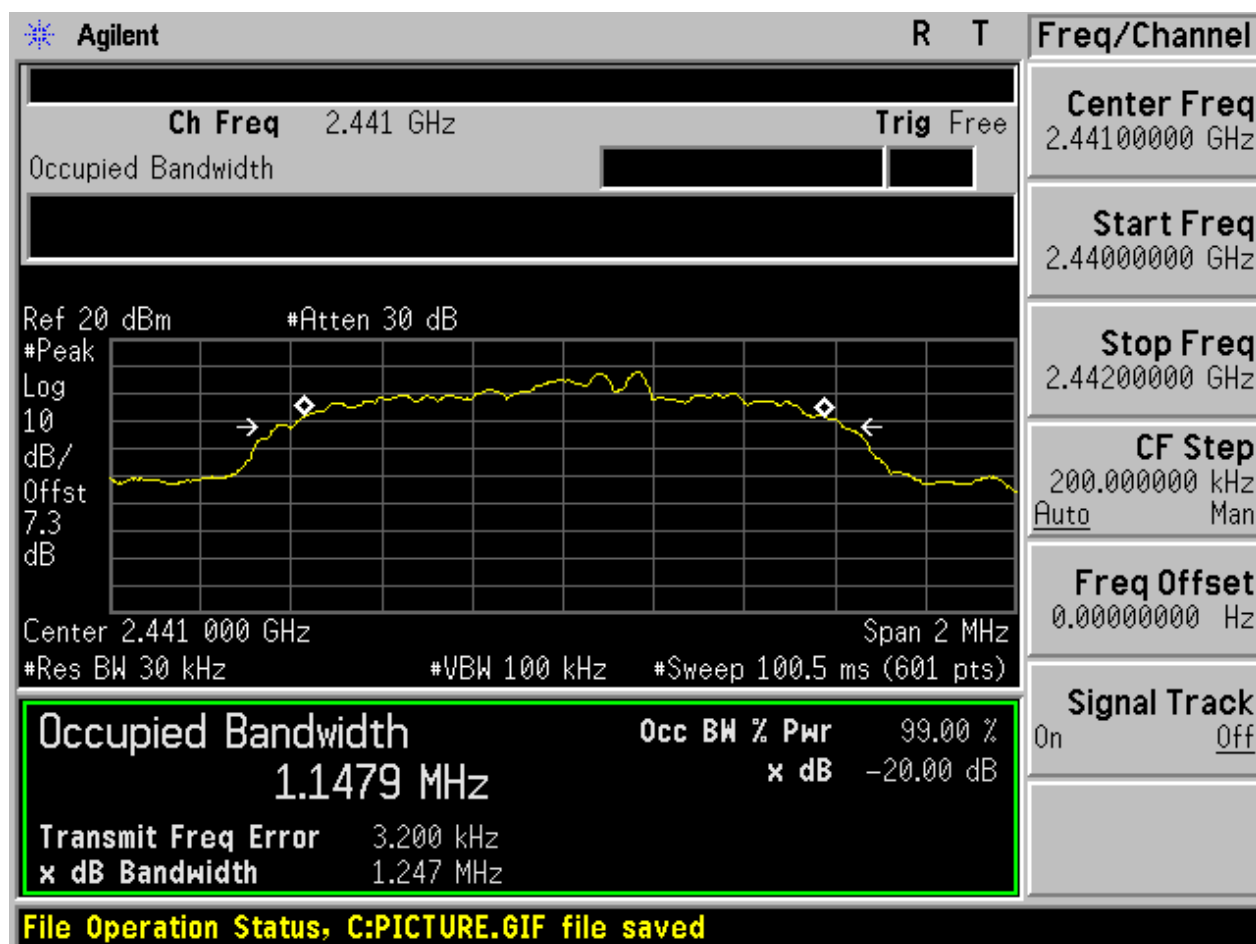

2.9 TM3_3DH5_Ch78

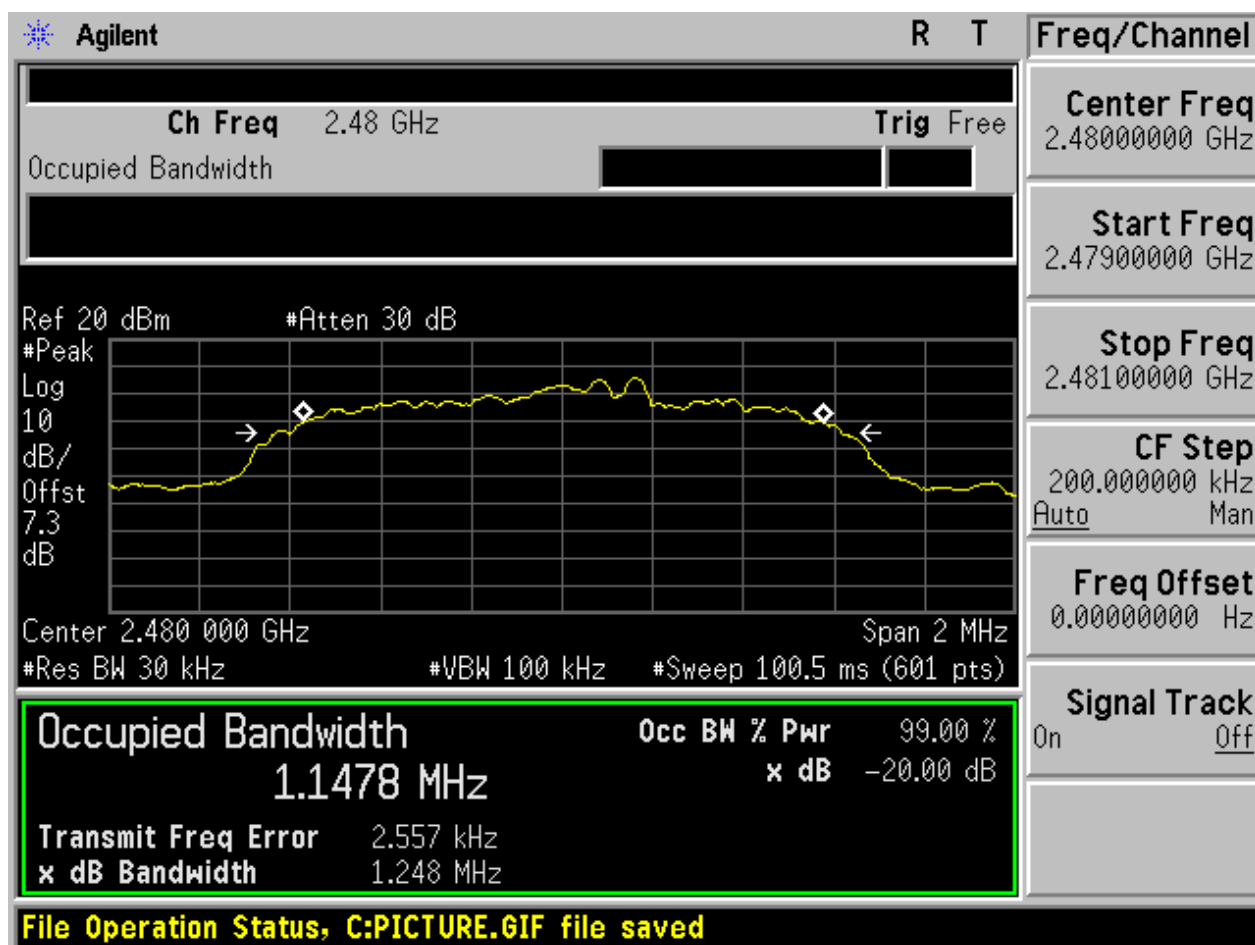

Appendix B: Carrier Frequency Separation




1 Result Table


EUT Conf.	Carrier Frequency Separation [MHz]	Verdict
TM1_DH5_Hop	0.950	Pass
TM2_2DH5_Hop	1.050	Pass
TM3_3DH5_Hop	1.000	Pass

2 Test Plot


2.1 TM1_DH5_Hop

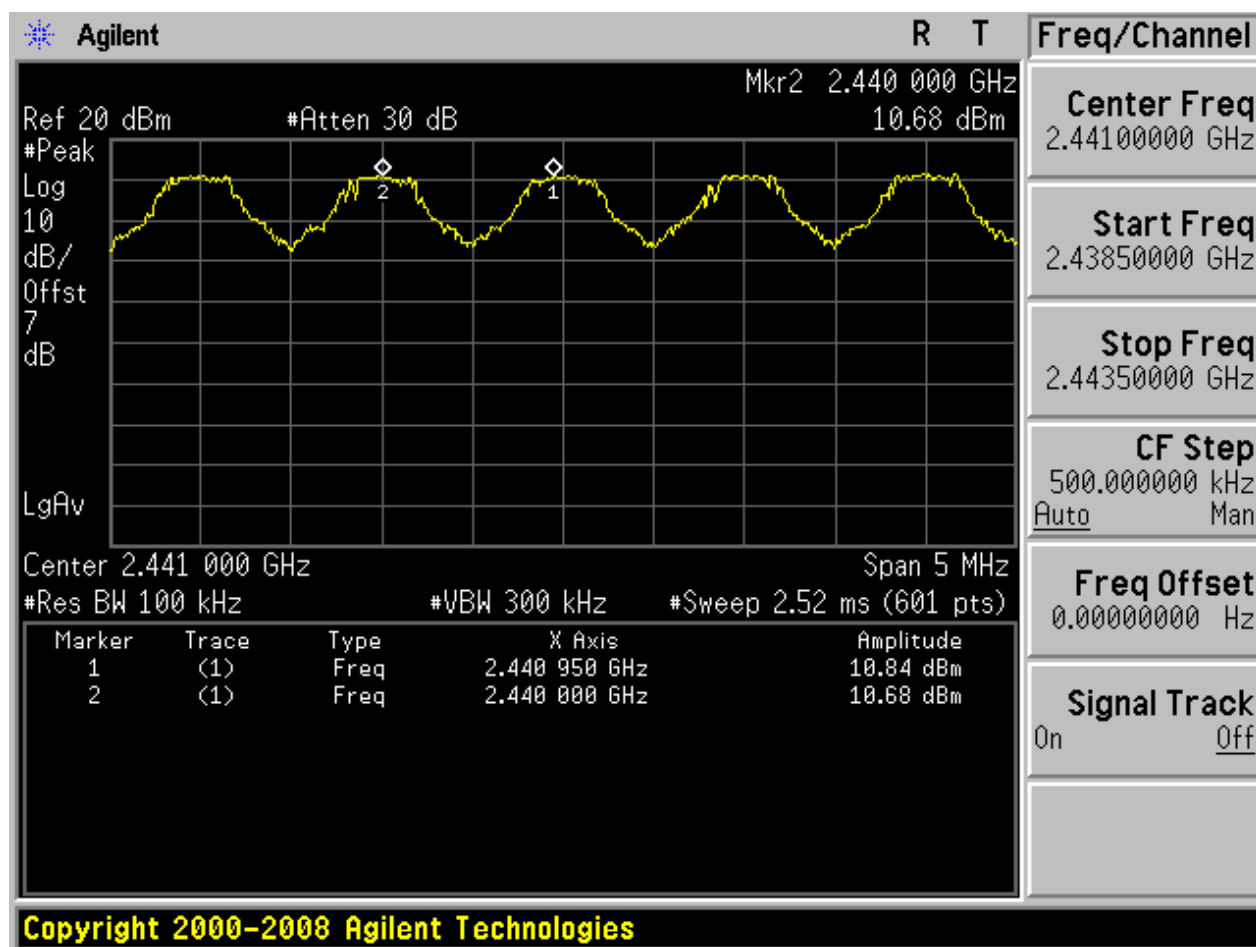

2.2 TM2_2DH5_Hop

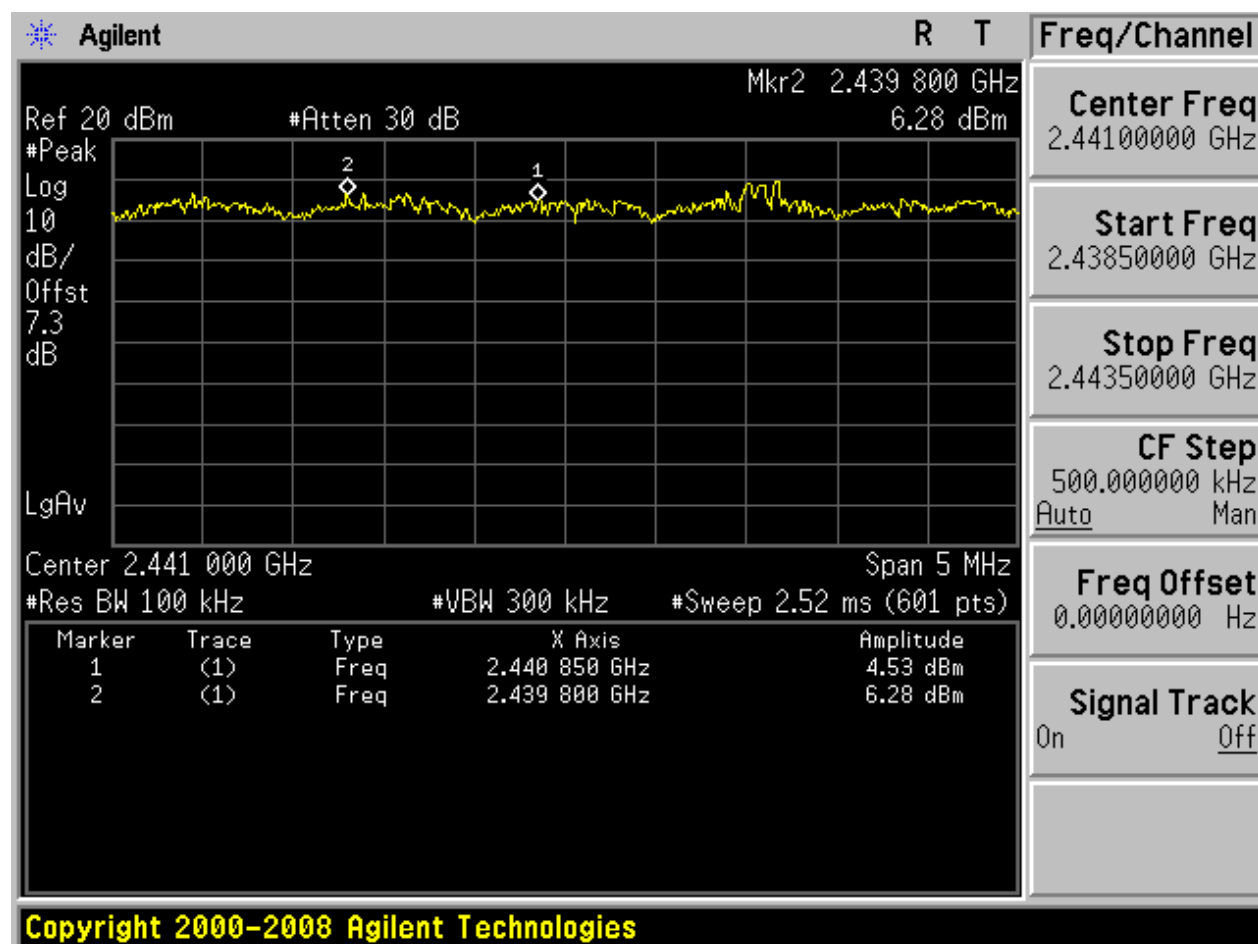

2.3 TM3_3DH5_Hop

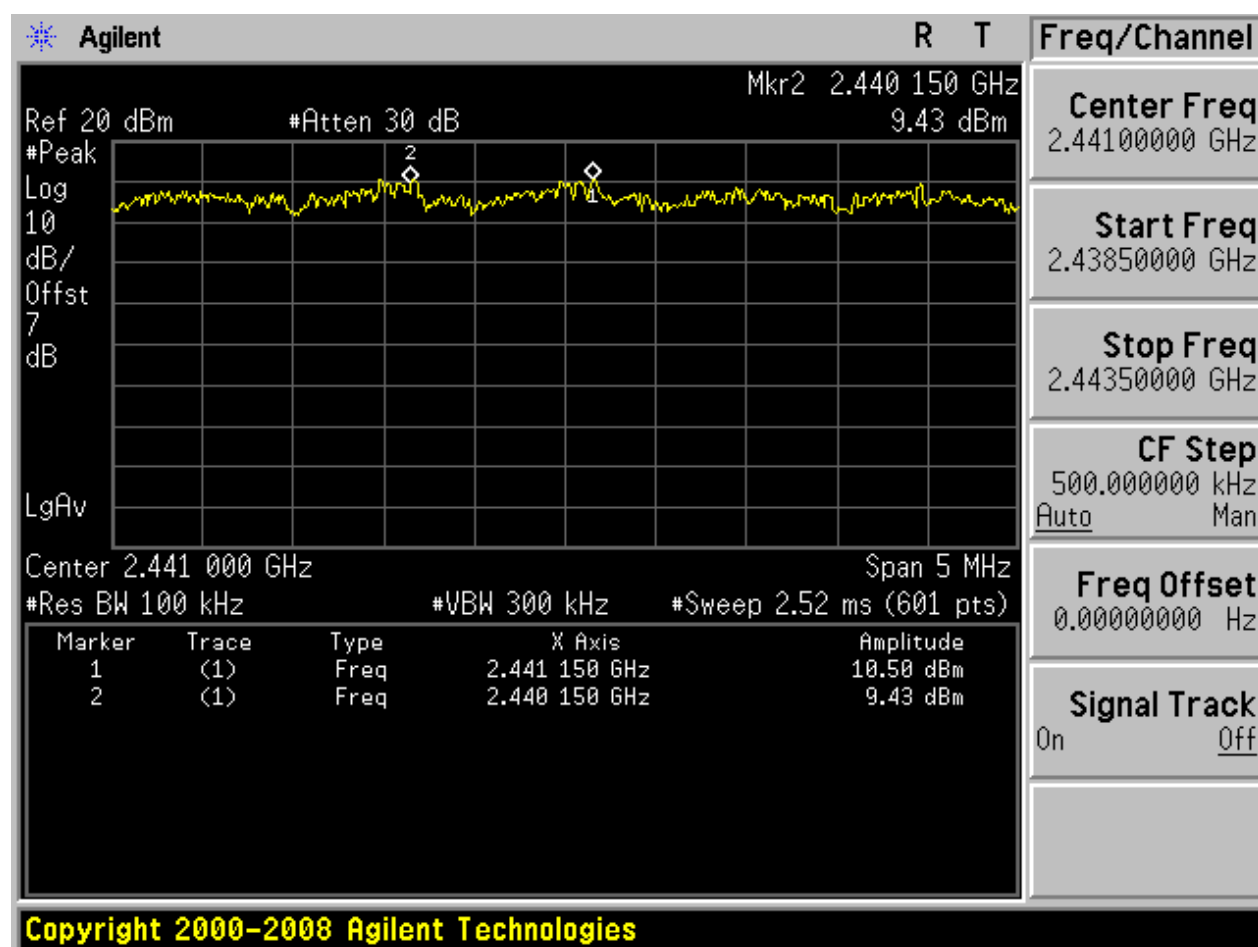

Appendix C: Number of Hopping Channel




1 Result Table

EUT Conf.	Number of Hopping Channel	Verdict
TM1_DH5_Hop	79	Pass
TM2_2DH5_Hop	79	Pass
TM3_3DH5_Hop	79	Pass




2 Test Plot


2.1 TM1_DH5_Hop

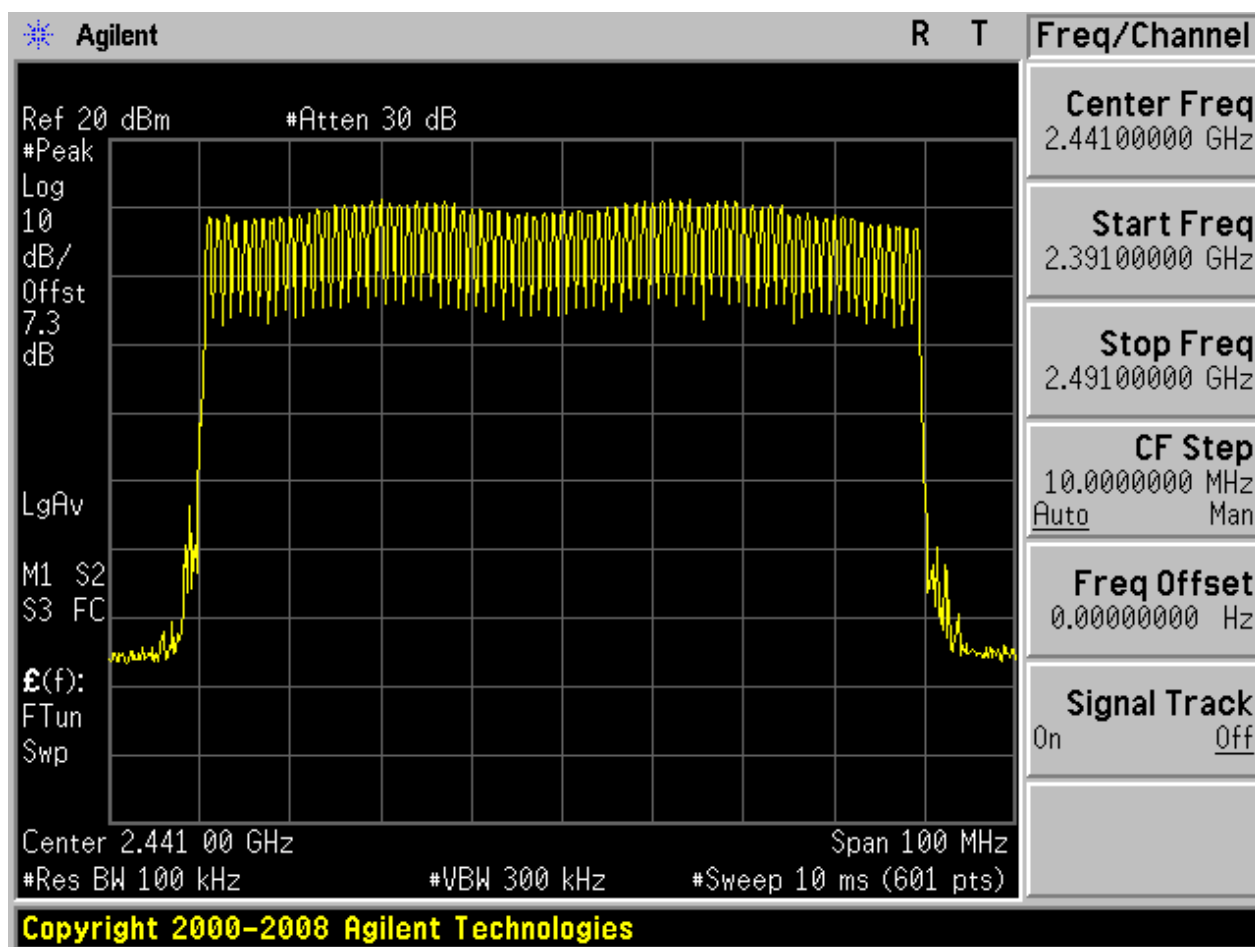

2.2 TM2_2DH5_Hop

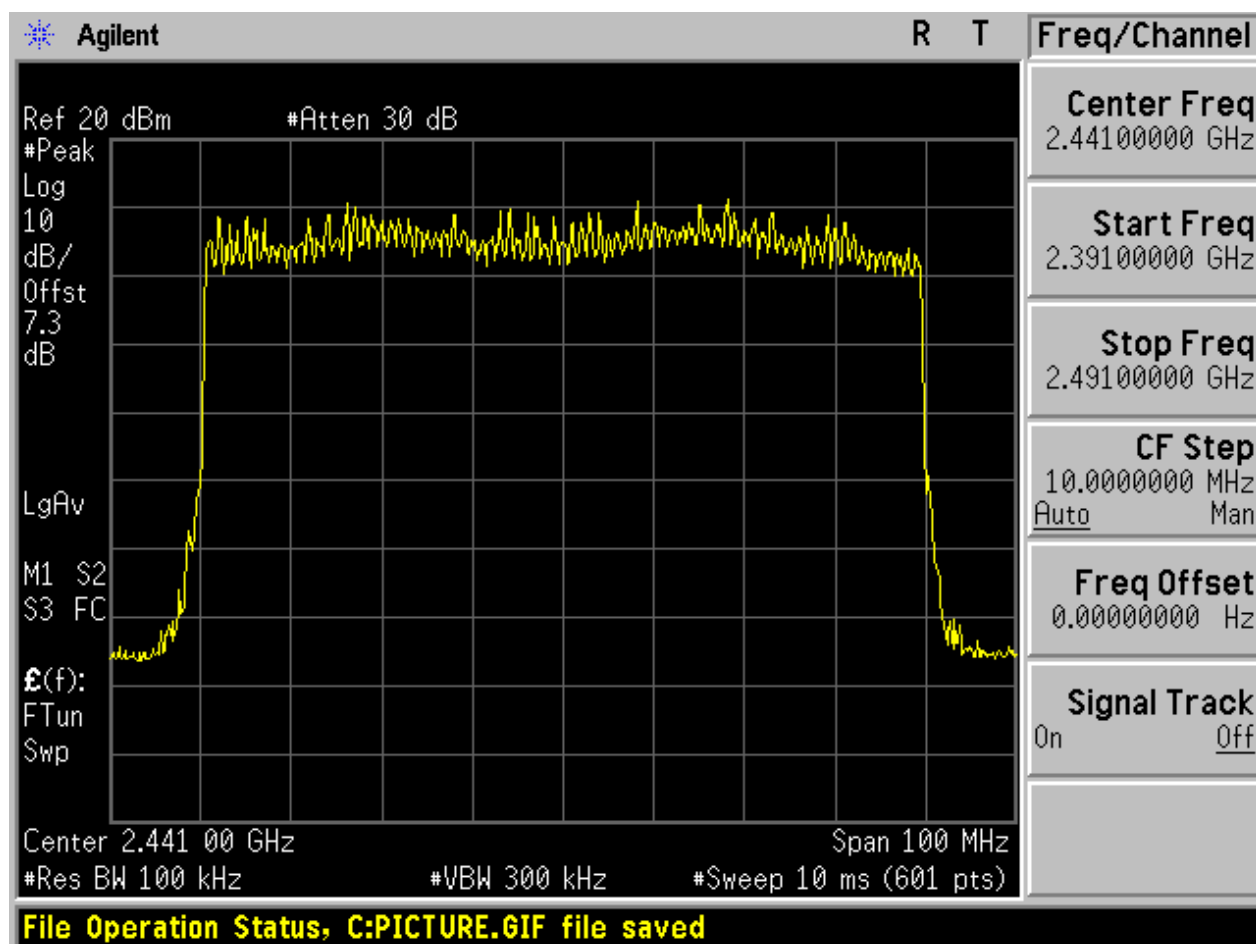

2.3 TM3_3DH5_Hop

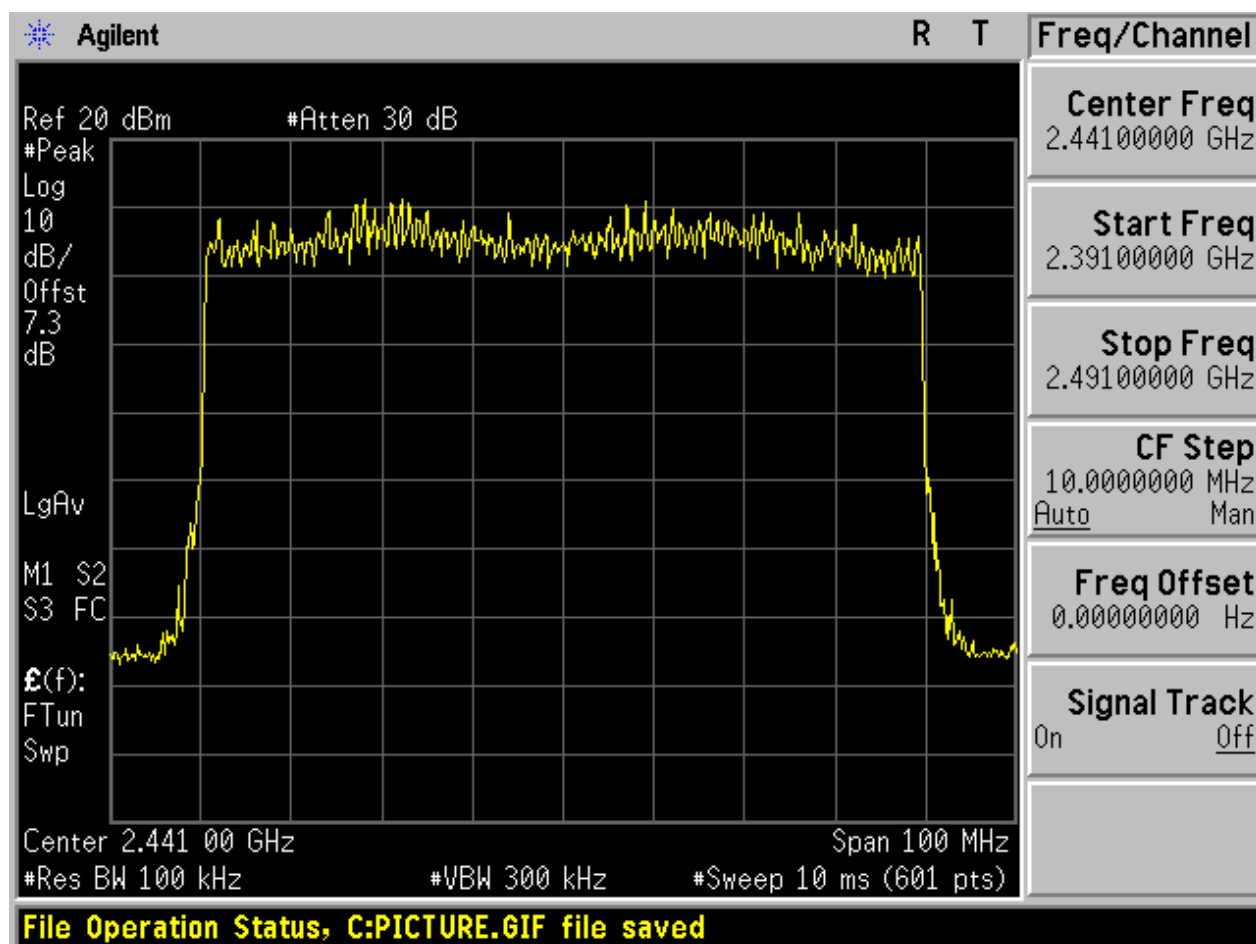

Appendix D: Time of Occupancy (Dwell Time)

1 Result Table

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:


- The duration for dwell time calculation: $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600 / 6 = 266.67 \text{ [ch*hop/s]}$;
- The hops per second on one channel: $266.67 \text{ [ch*hop/s]} / 79 \text{ [ch]} = 3.38 \text{ [hop/s]}$;
- The total hops for all channels within the dwell time calculation duration: $3.38 \text{ [hop/s]} * 31.6 \text{ [s*ch]} = 106.67 \text{ [hop*ch]}$;
- The dwell time for all channels hopping: $106.67 \text{ [hop*ch]} * \text{Burst Width [ms/hop/ch]}$.

EUT Conf.	Burst Width [ms/hop/ch]	Total Hops [hop*ch]	Dwell Time [s]	Verdict
TM1_DH5_Ch39	2.900	106.67	0.309	Pass
TM2_2DH5_Ch39	2.900	106.67	0.309	Pass
TM3_3DH5_Ch39	2.900	106.67	0.309	Pass


2 Test Plot

NOTE: The test plots are only for Burst Width measurements.


2.1 TM1_DH5_Ch39

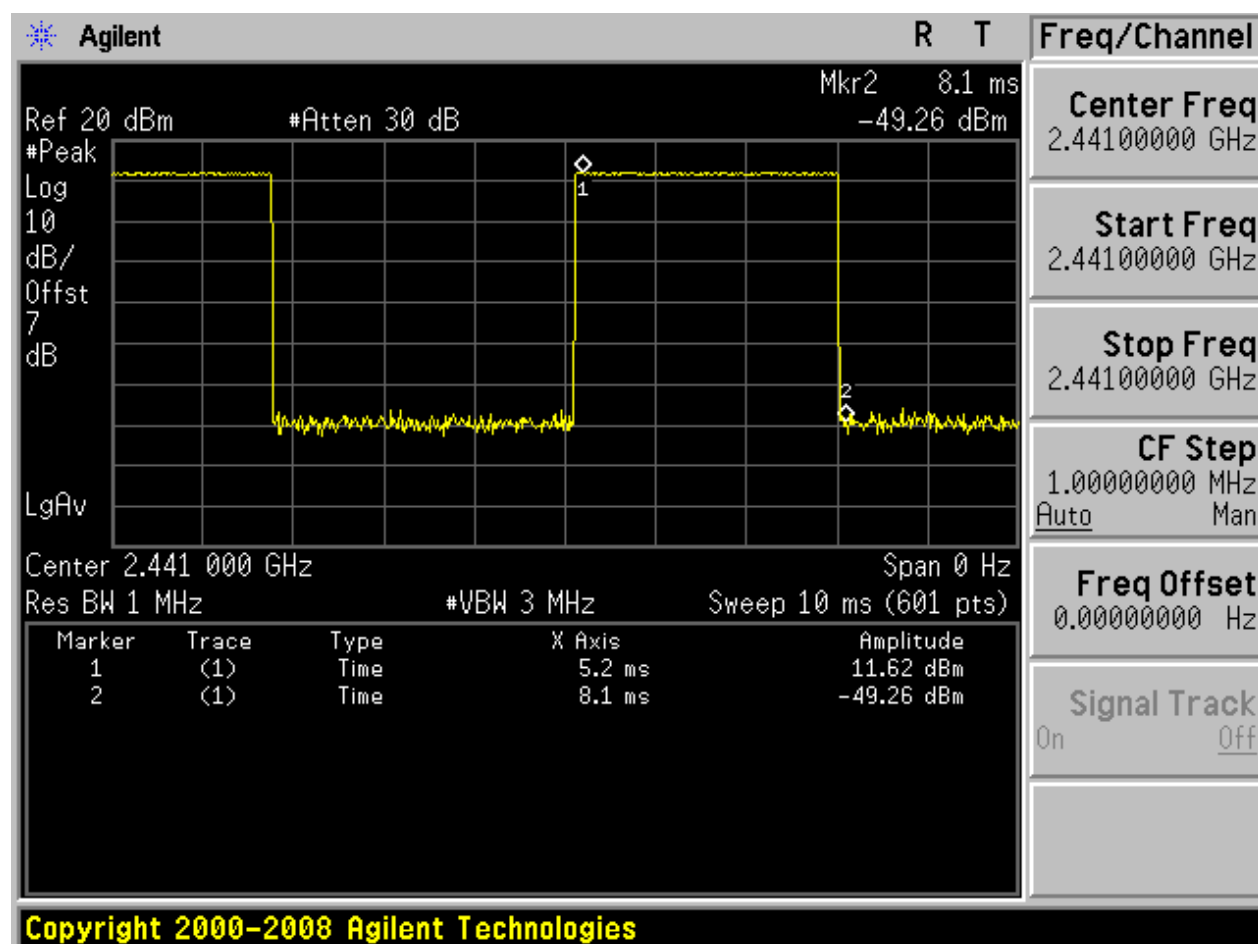

2.2 TM2_2DH5_Ch39

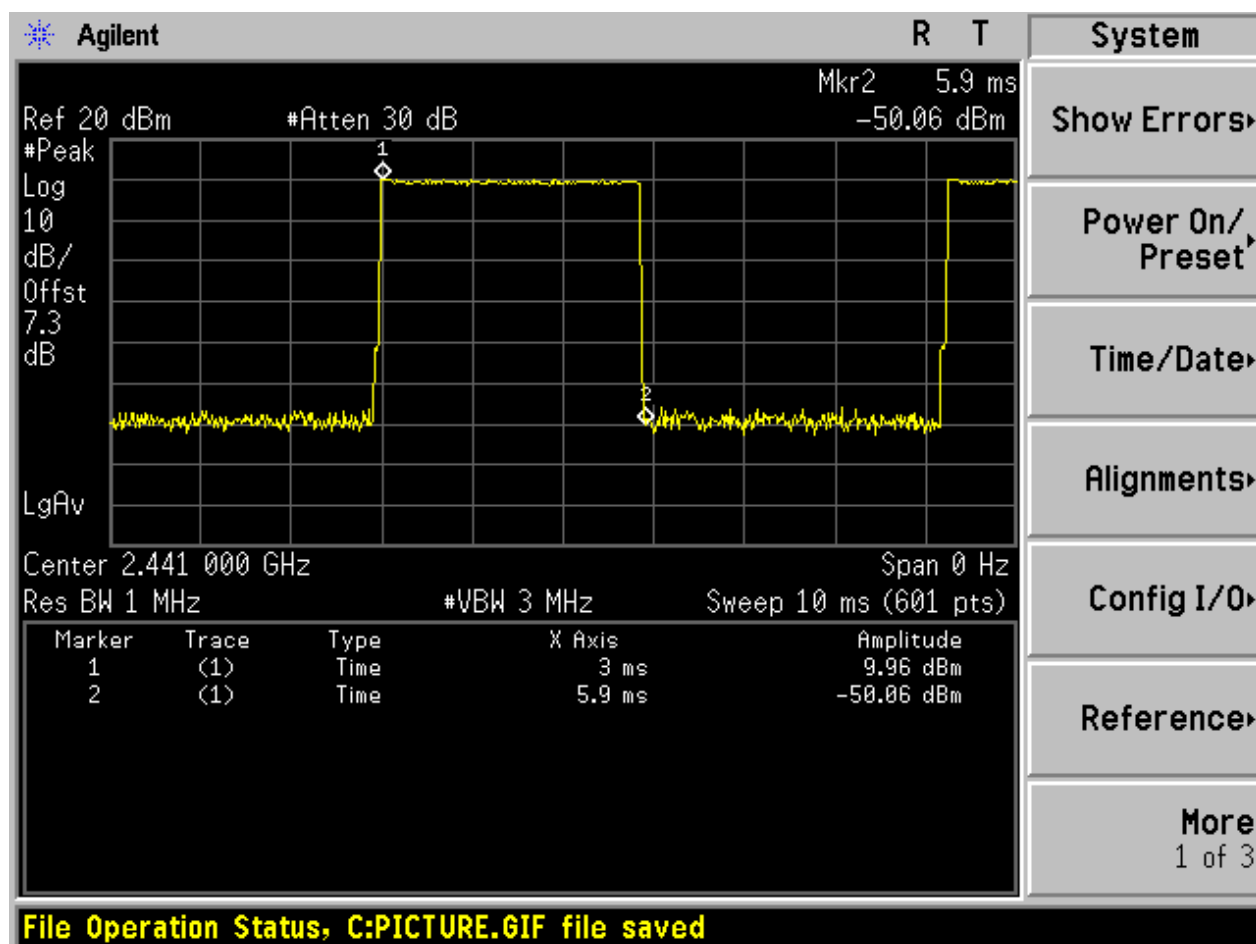

2.3 TM3_3DH5_Ch39

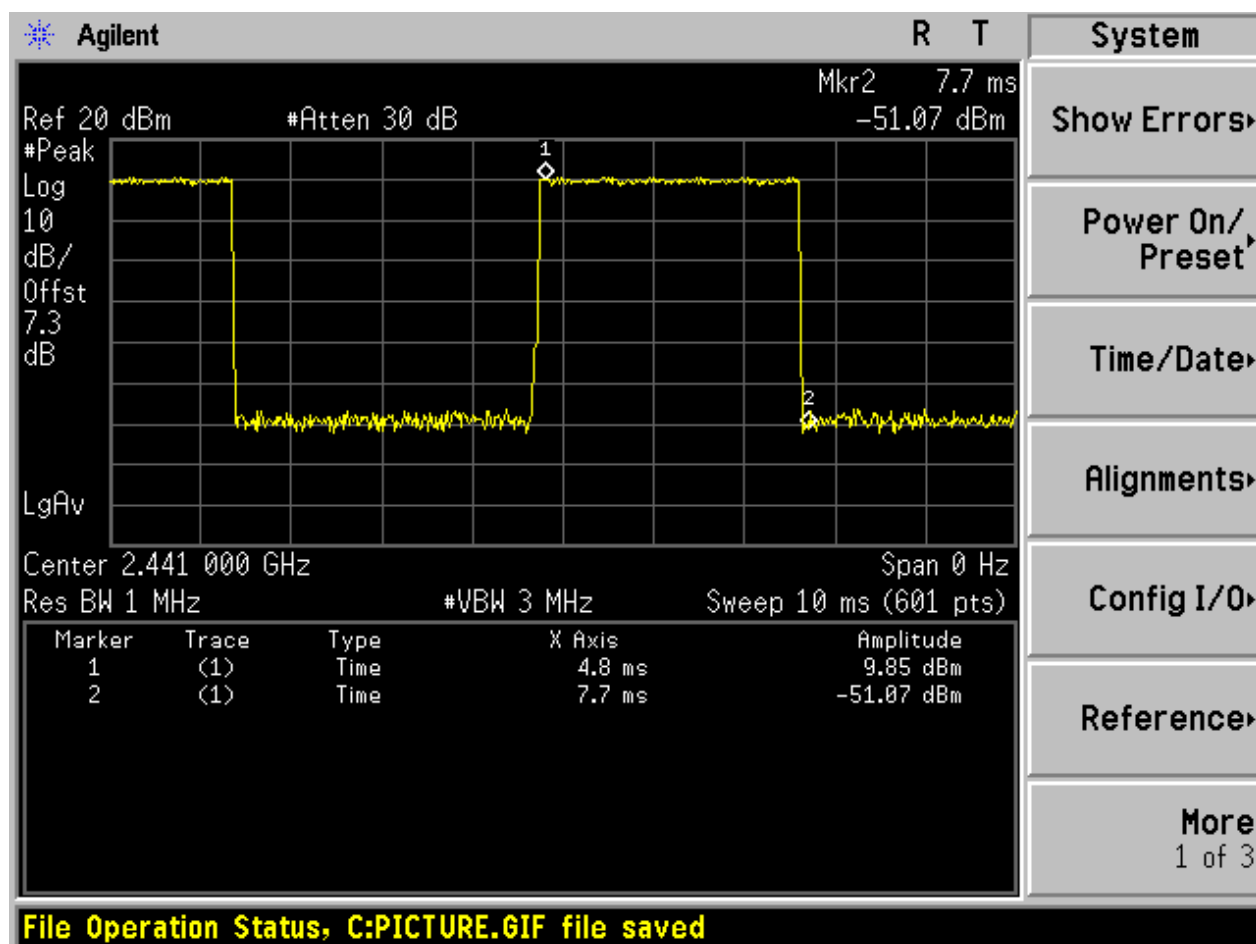


Appendix E: Maximum Peak Conducted Output Power

1 Result Table


EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	9.15	Pass
TM1_DH5_Ch39	9.86	Pass
TM1_DH5_Ch78	7.67	Pass
TM2_2DH5_Ch0	9.46	Pass
TM2_2DH5_Ch39	10.23	Pass
TM2_2DH5_Ch78	8	Pass
TM3_3DH5_Ch0	9.91	Pass
TM3_3DH5_Ch39	10.73	Pass
TM3_3DH5_Ch78	8.55	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

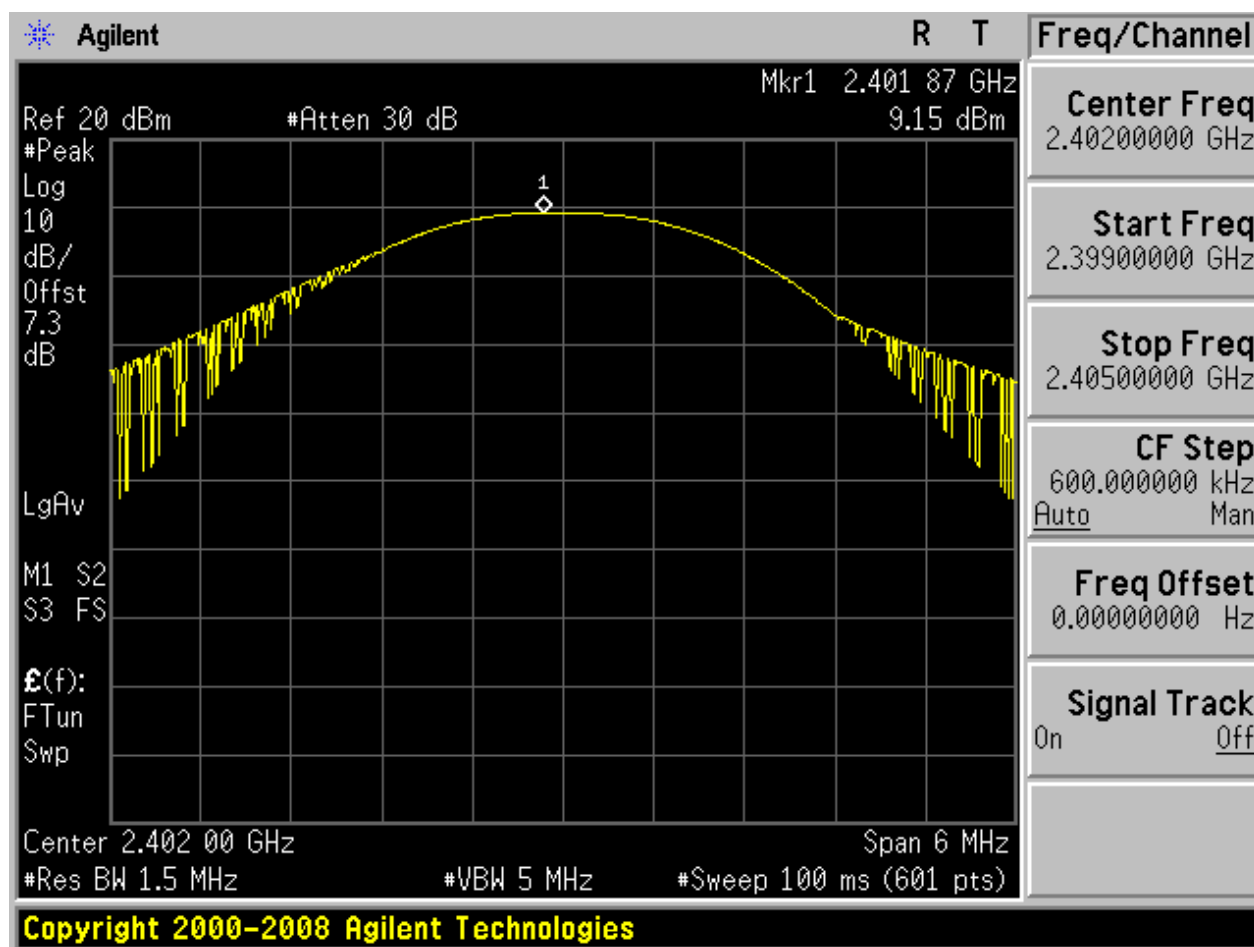


2.2 TM1_DH5_Ch39

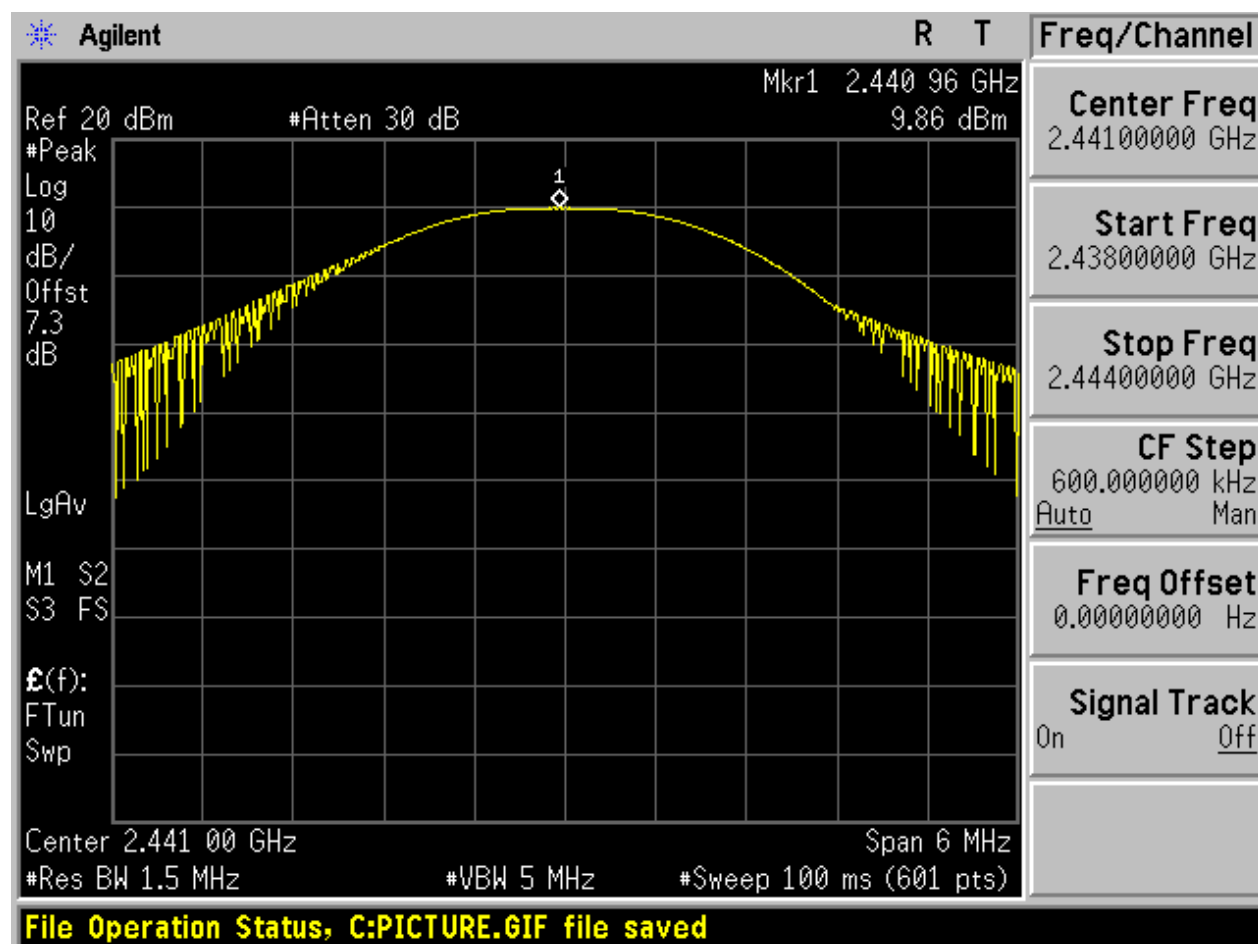


2.3 TM1_DH5_Ch78

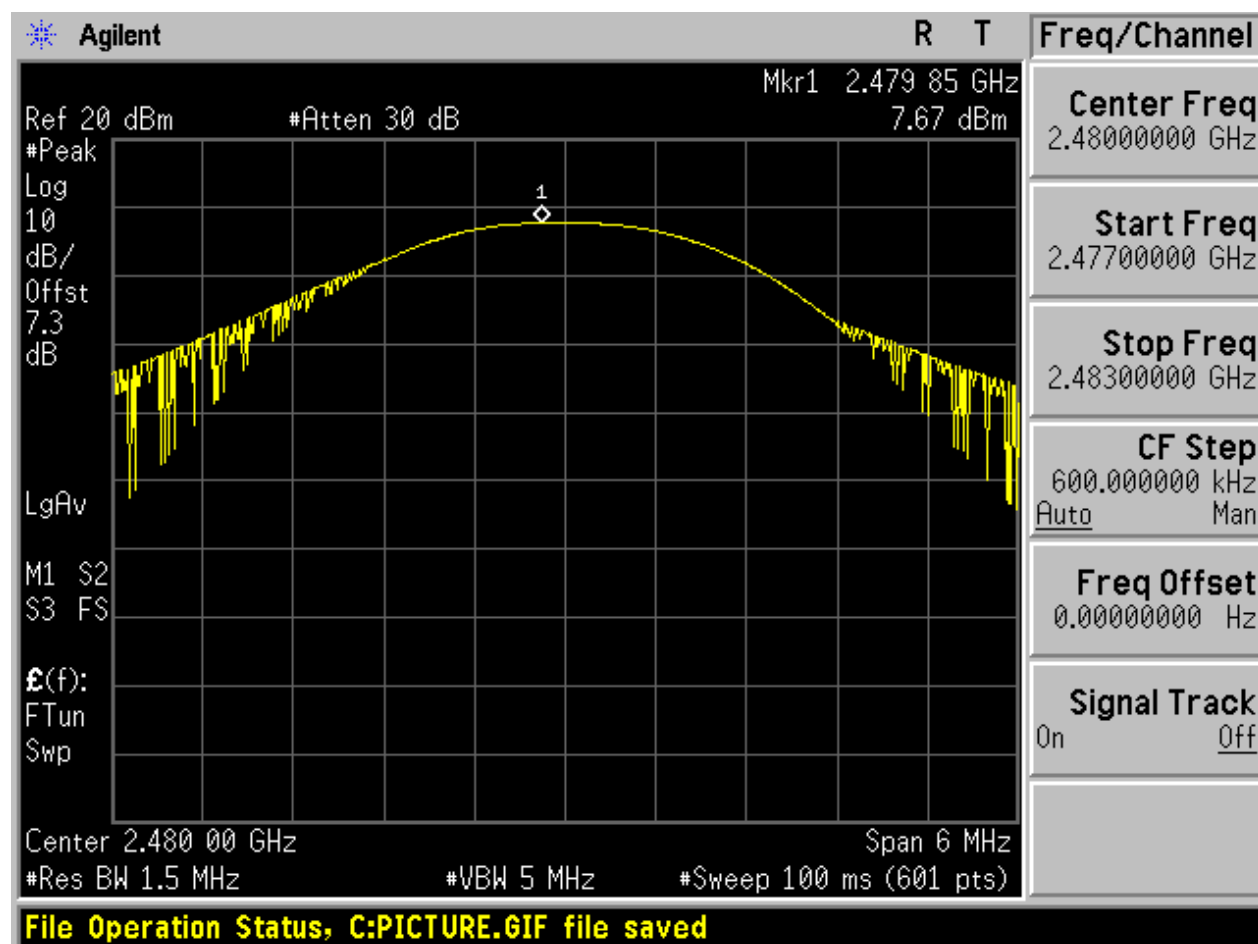


2.4 TM2_2DH5_Ch0

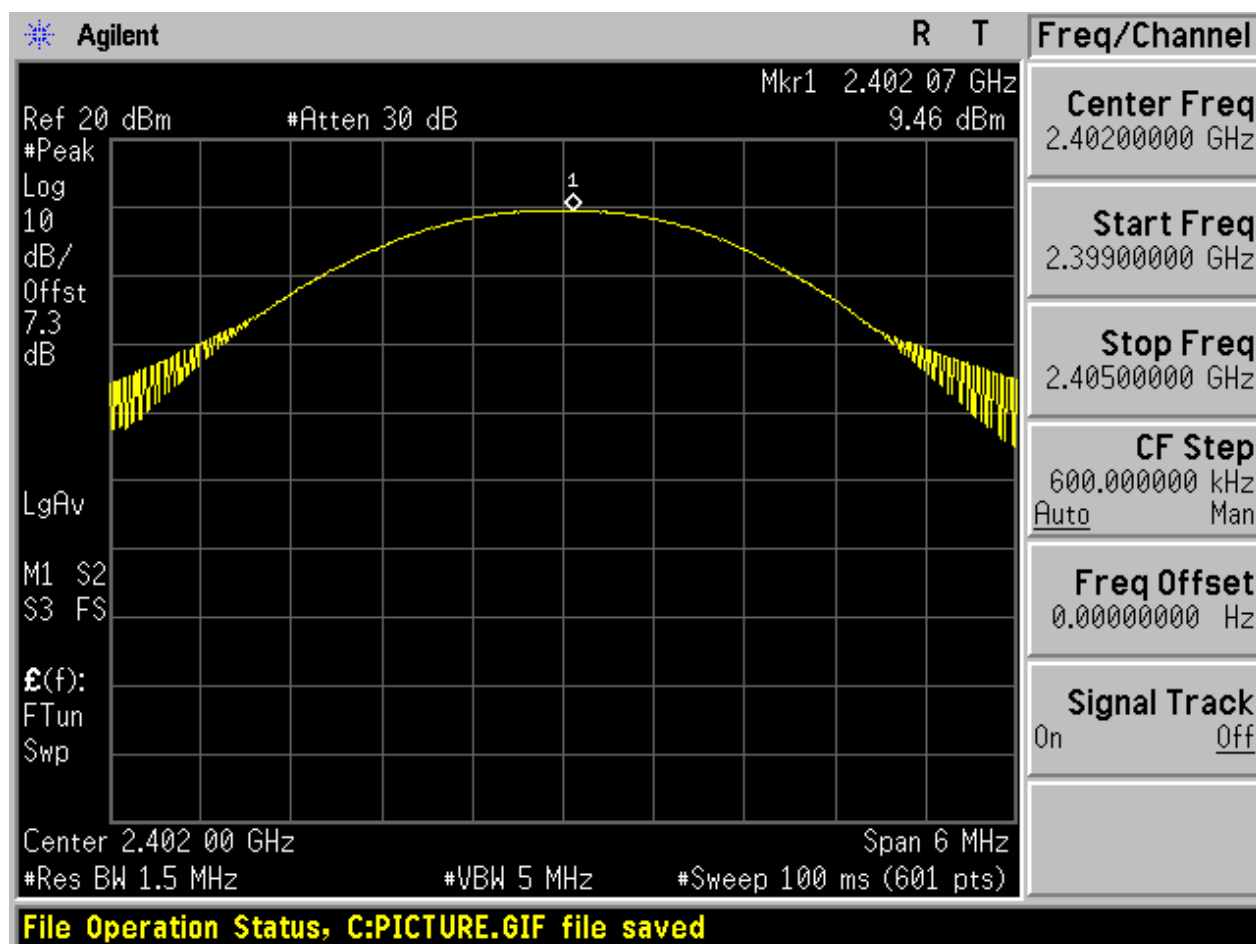


2.5 TM2_2DH5_Ch39

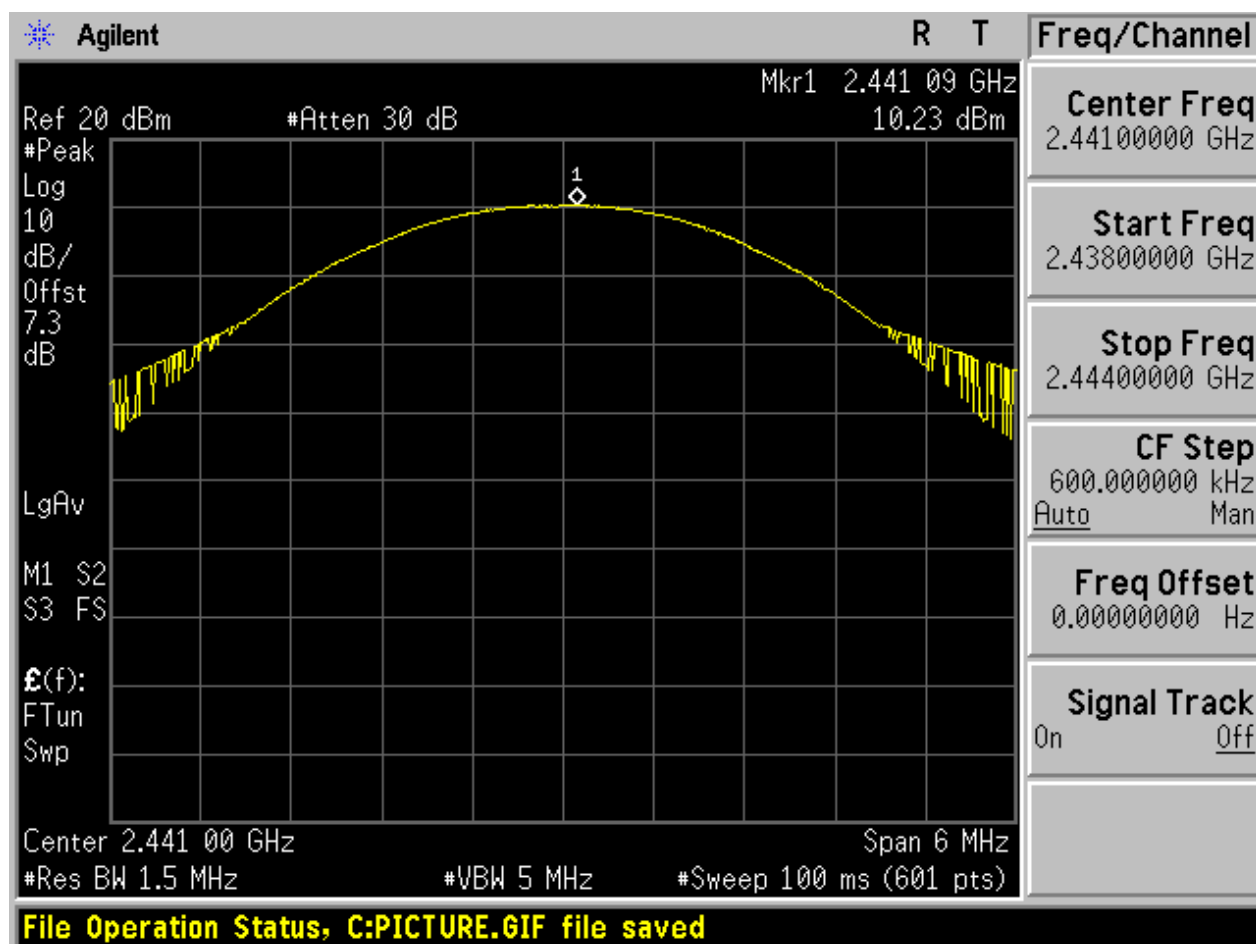


2.6 TM2_2DH5_Ch78

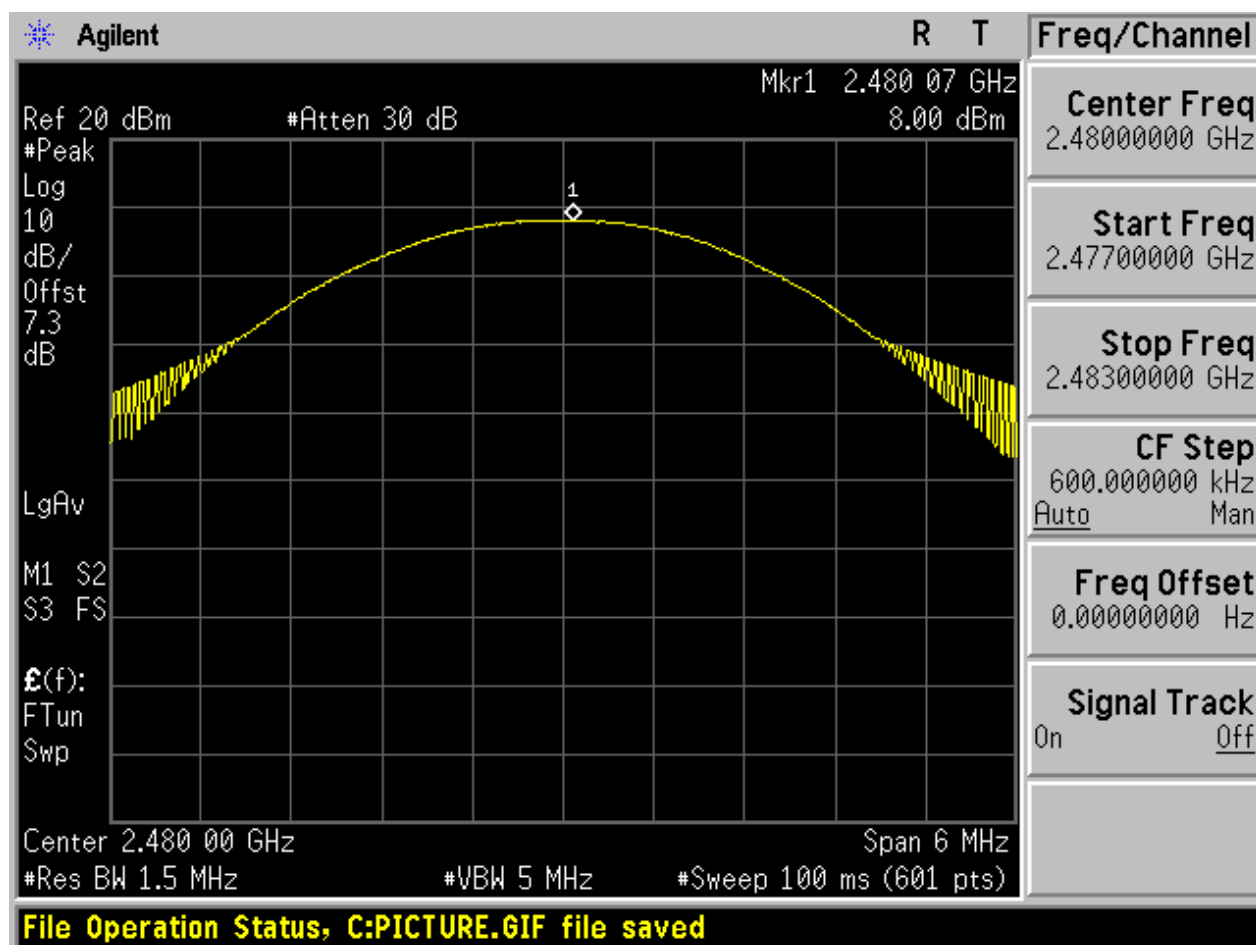


2.7 TM3_3DH5_Ch0

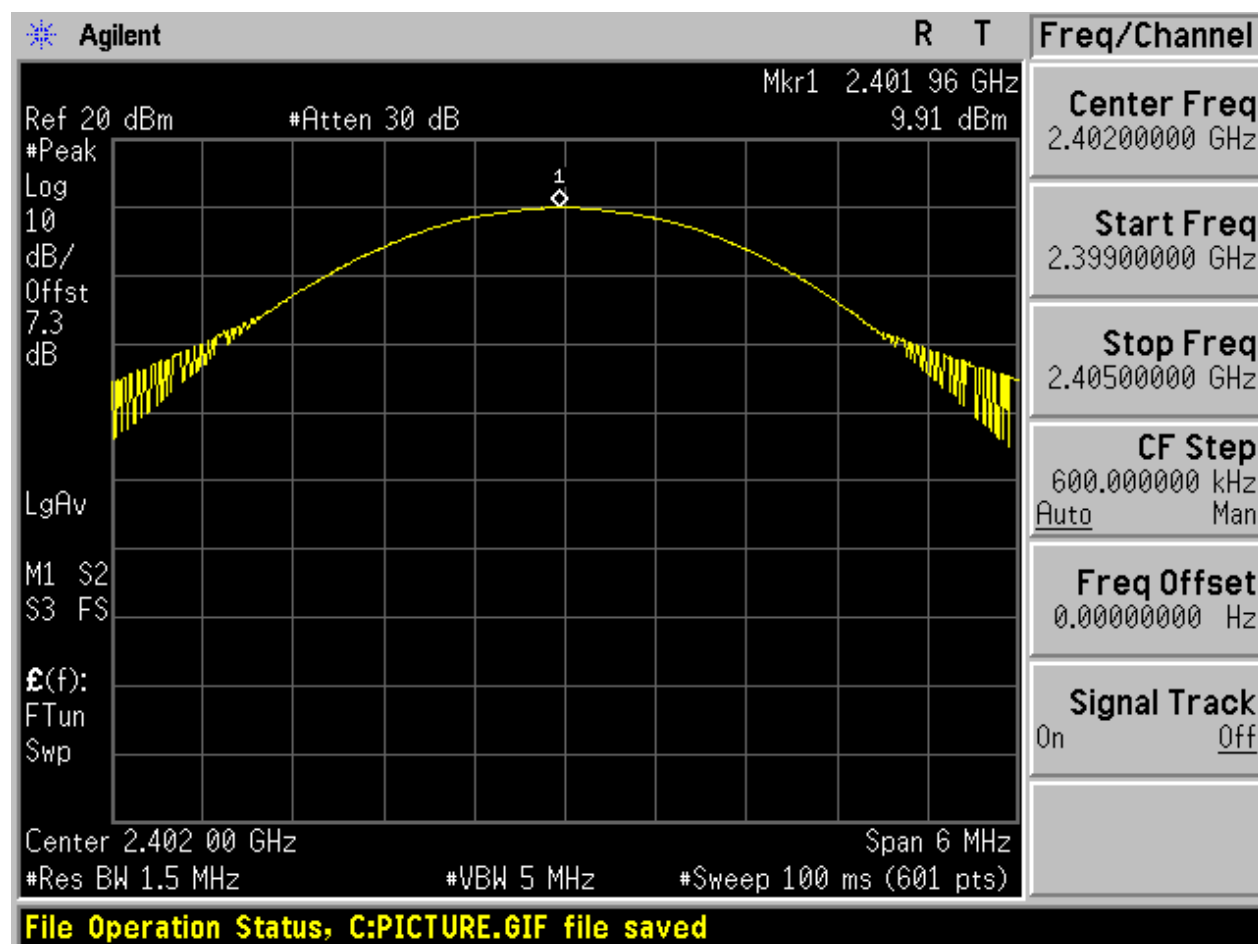

2.8 TM3_3DH5_Ch39

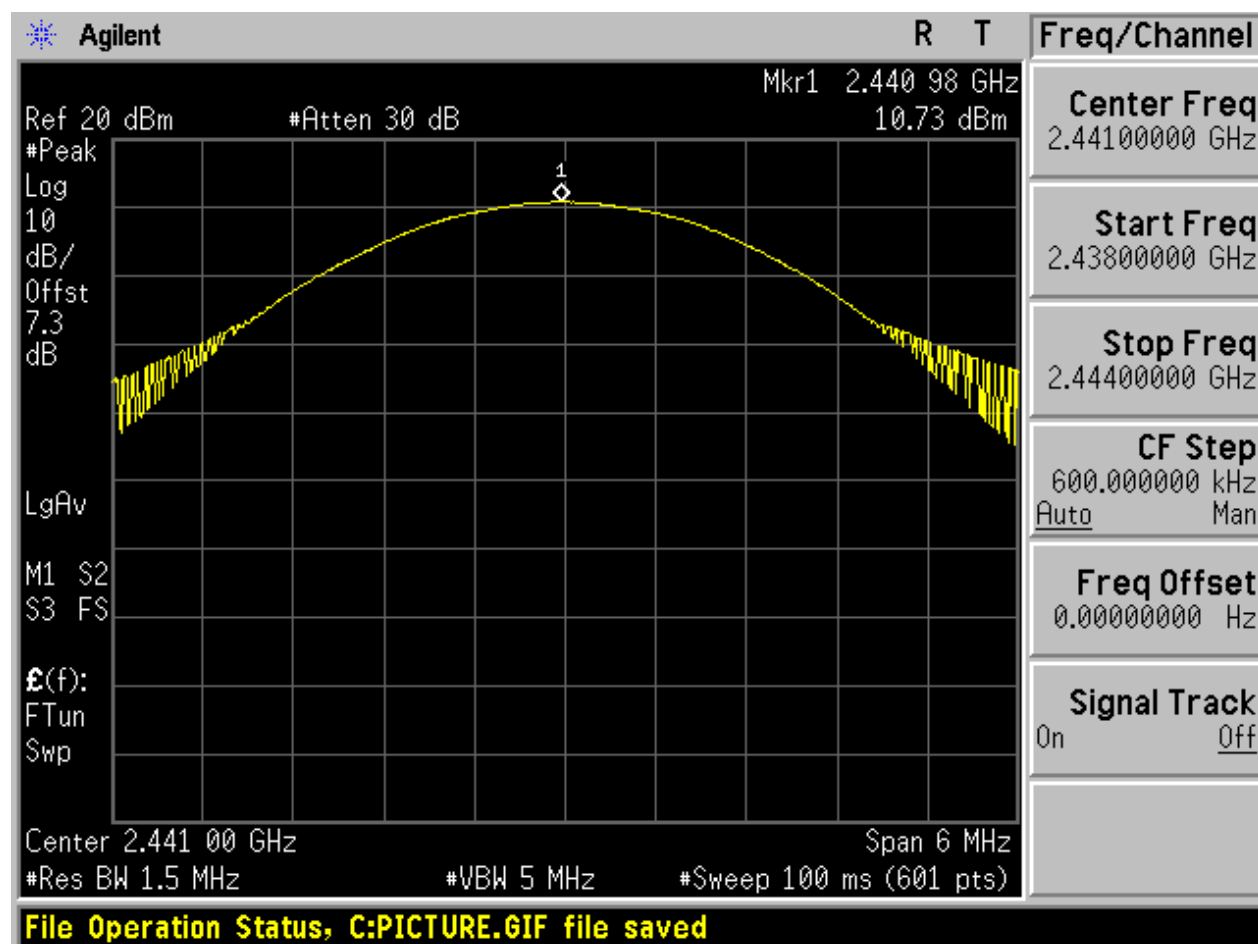

2.9 TM3_3DH5_Ch78

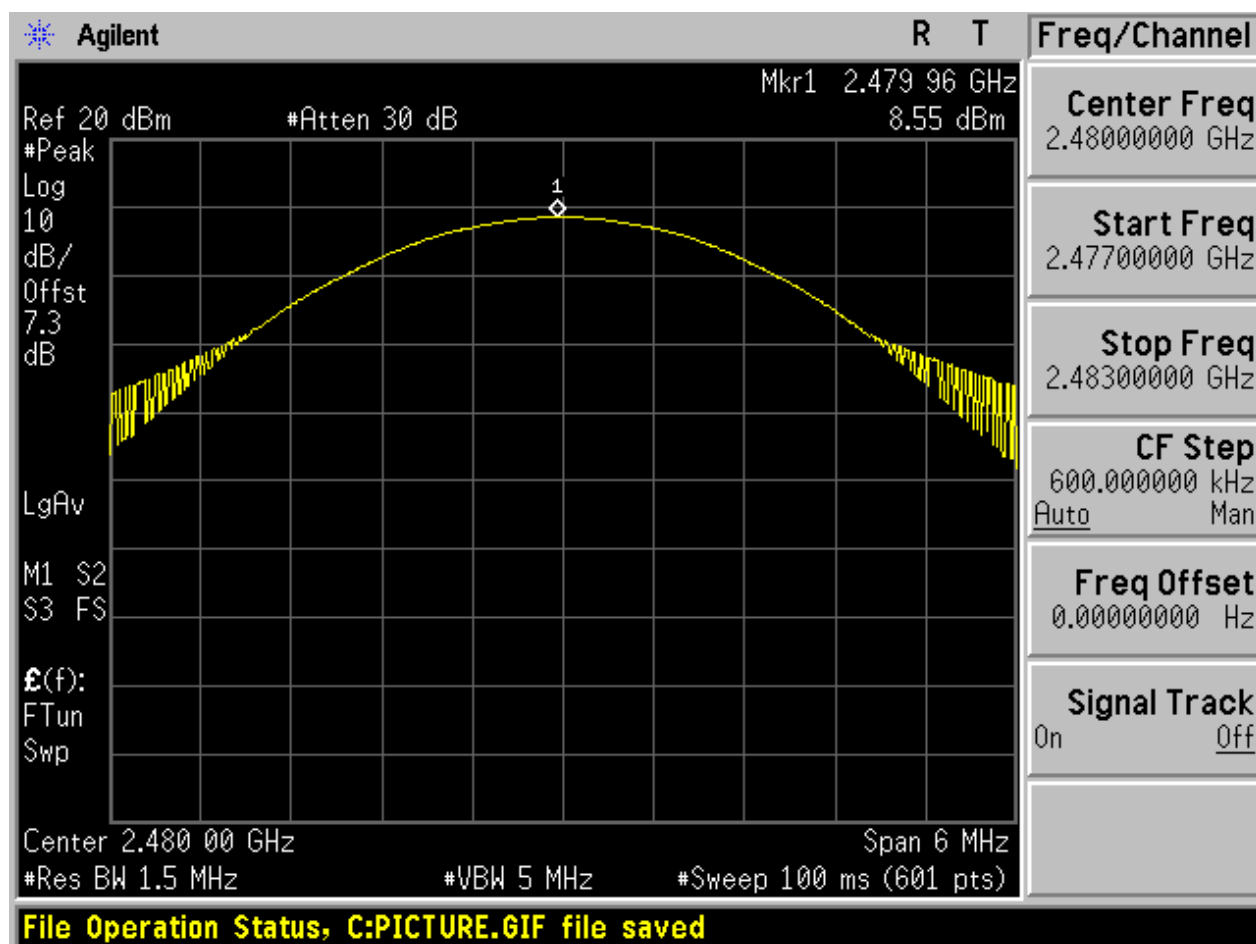

Appendix F: Band edge spurious emission


1 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Max. Spurious Level [dBm]	Frequency Hopping	Carrier Power [dBm]	Limit [dBm]	Result
TM1_DH5_Ch0	0	2402	-32.95	Off	8.90	-11.1	Pass
	-	-	-41.39	On	8.53	-11.47	Pass
TM1_DH5_Ch78	78	2480	-44.73	Off	7.39	-12.61	Pass
	-	-	-50.11	On	7.02	-12.98	Pass
TM2_2DH5_Ch0	0	2402	-35.66	Off	8.89	-11.11	Pass
	-	-	-36.77	On	7.76	-12.24	Pass
TM2_2DH5_Ch78	78	2480	-45.58	Off	7.38	-12.62	Pass
	-	-	-46.14	On	7.44	-12.56	Pass
TM3_3DH5_Ch0	0	2402	-34.76	Off	8.91	-11.09	Pass
	-	-	-38.95	On	8.85	-11.15	Pass
TM3_3DH5_Ch78	78	2480	-44.97	Off	7.25	-12.75	Pass
	-	-	-45.63	On	3.68	-16.32	Pass


2 Test Plot

2.1 TM1_DH5_Ch0

No hopping

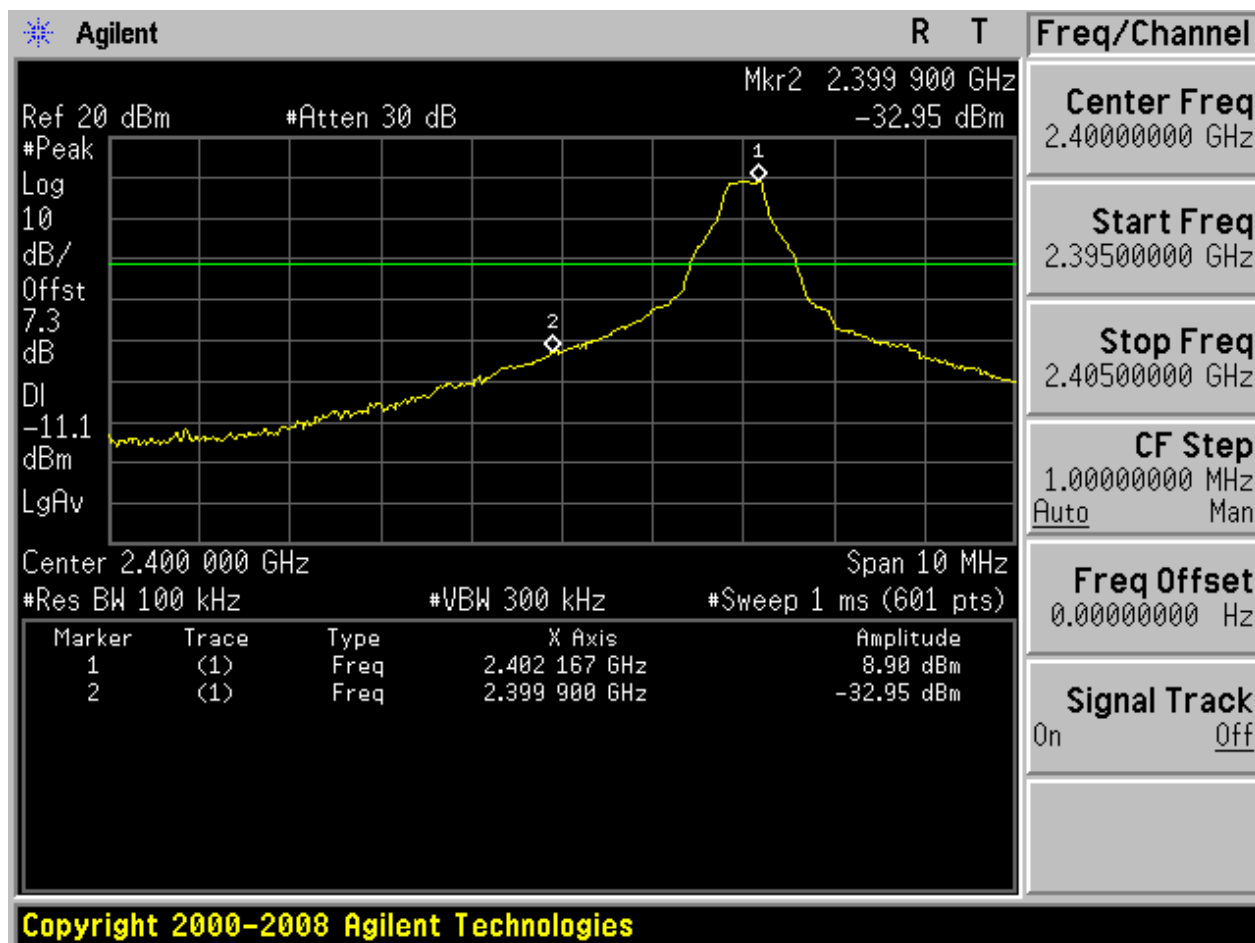


With hopping

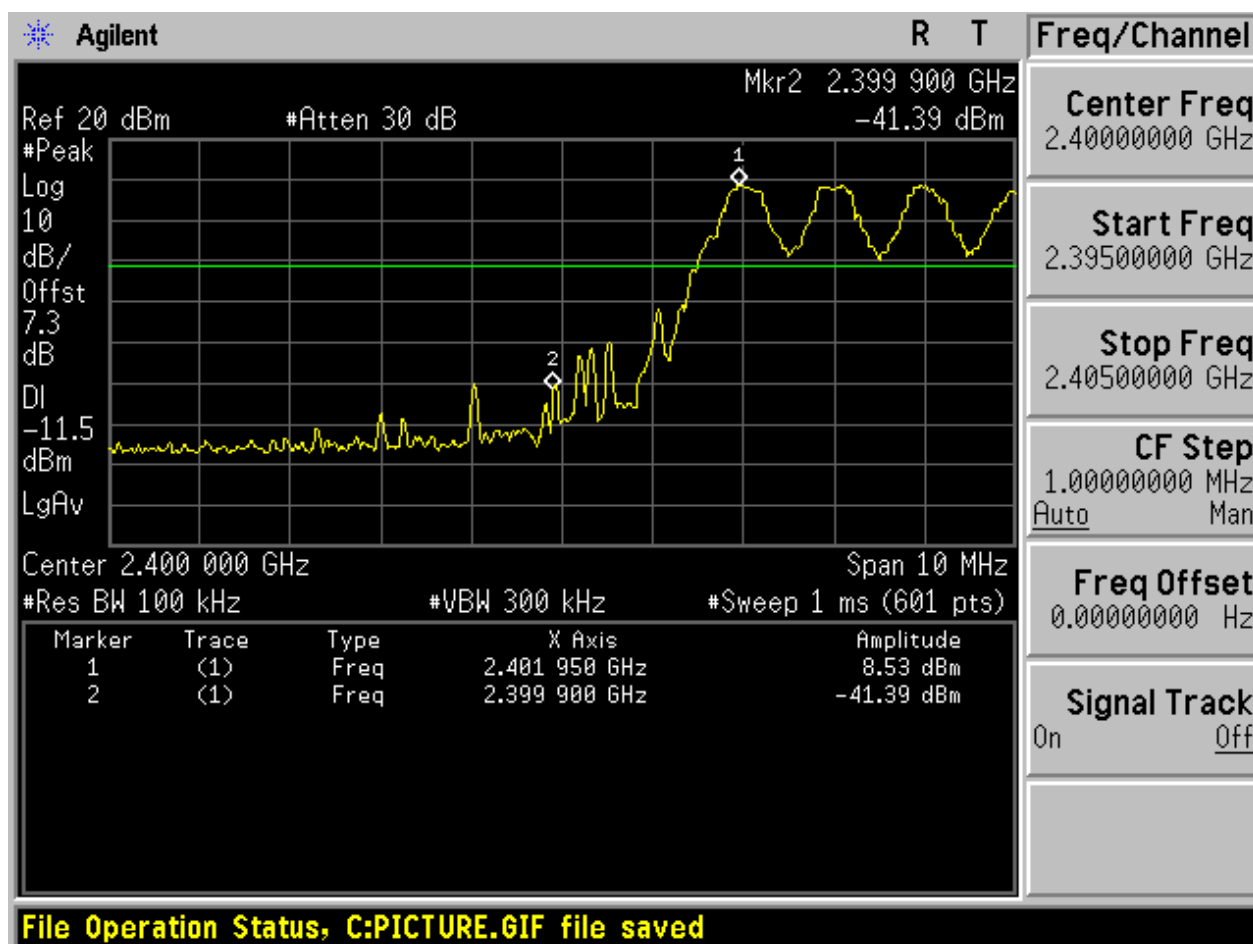


2.2 TM1_DH5_Ch78

No hopping

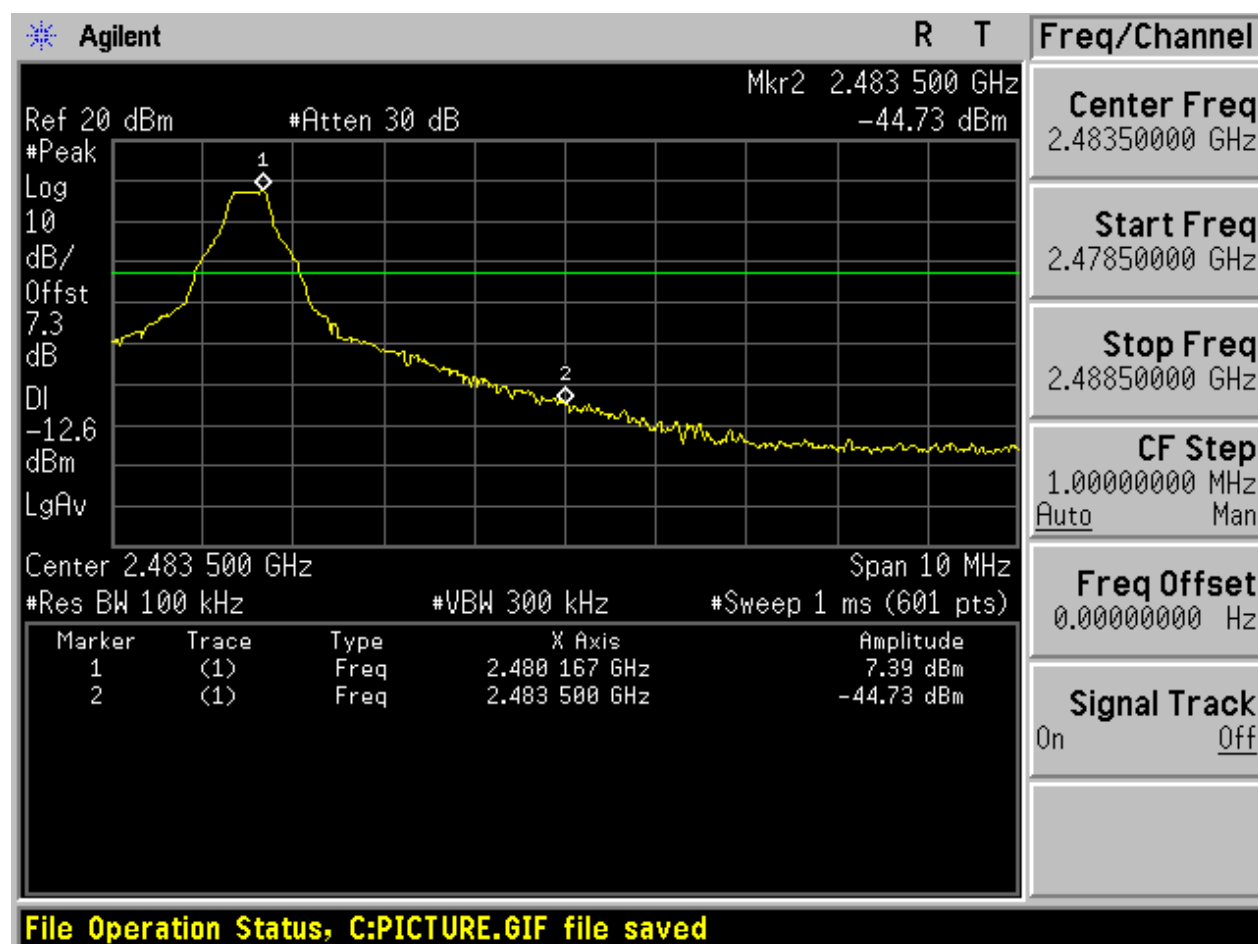


With hopping

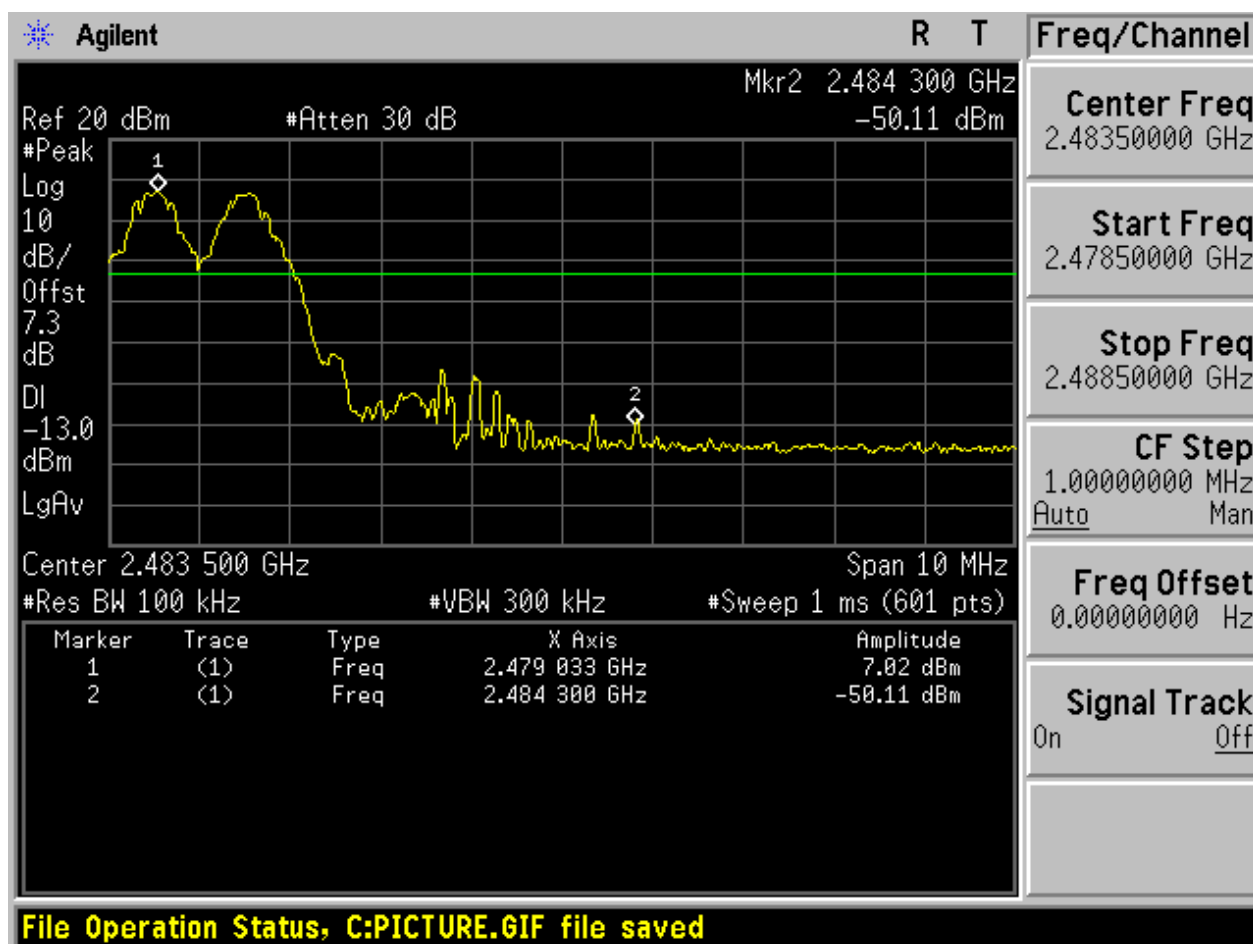


2.3 TM2_2DH5_Ch0

No hopping

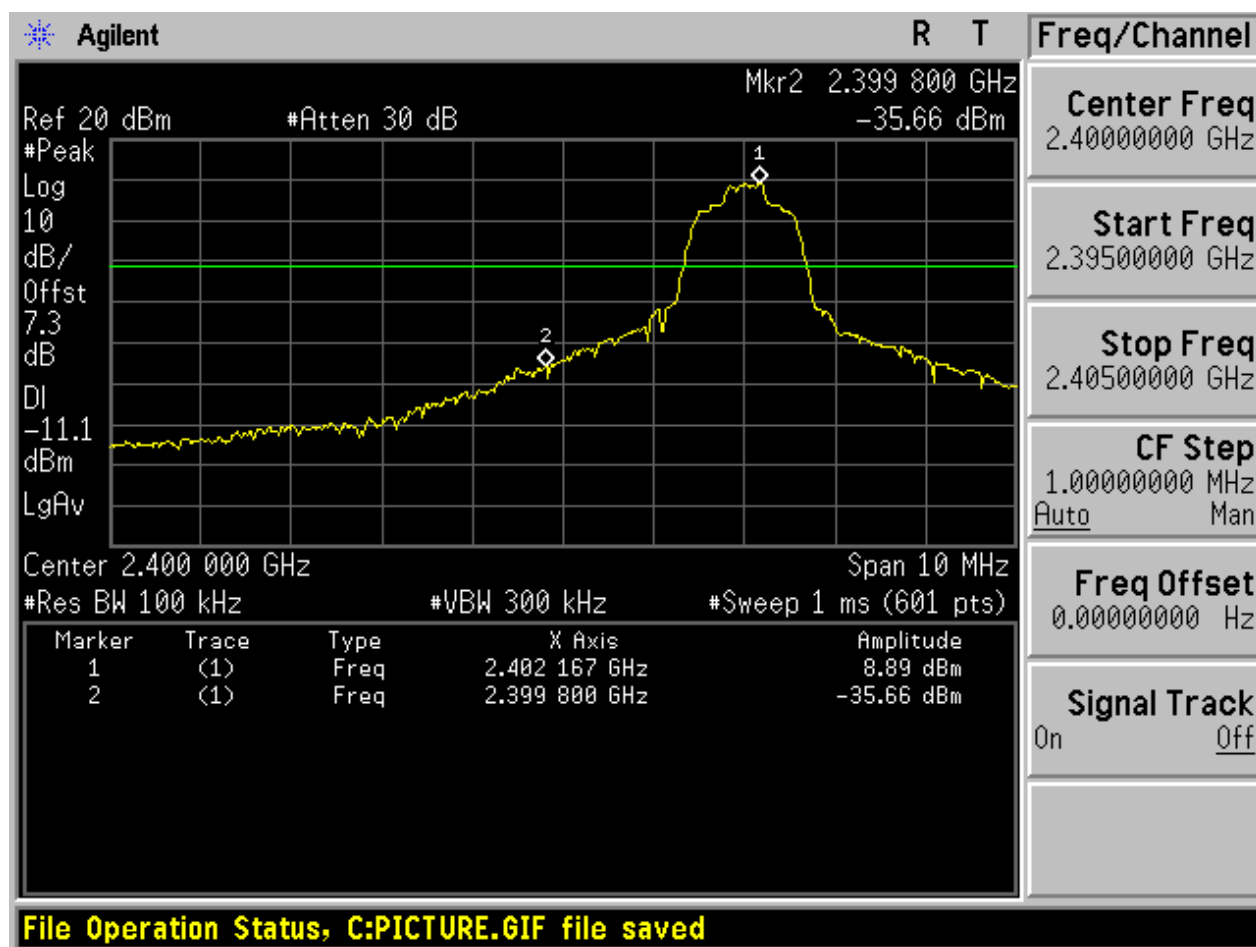


With hopping

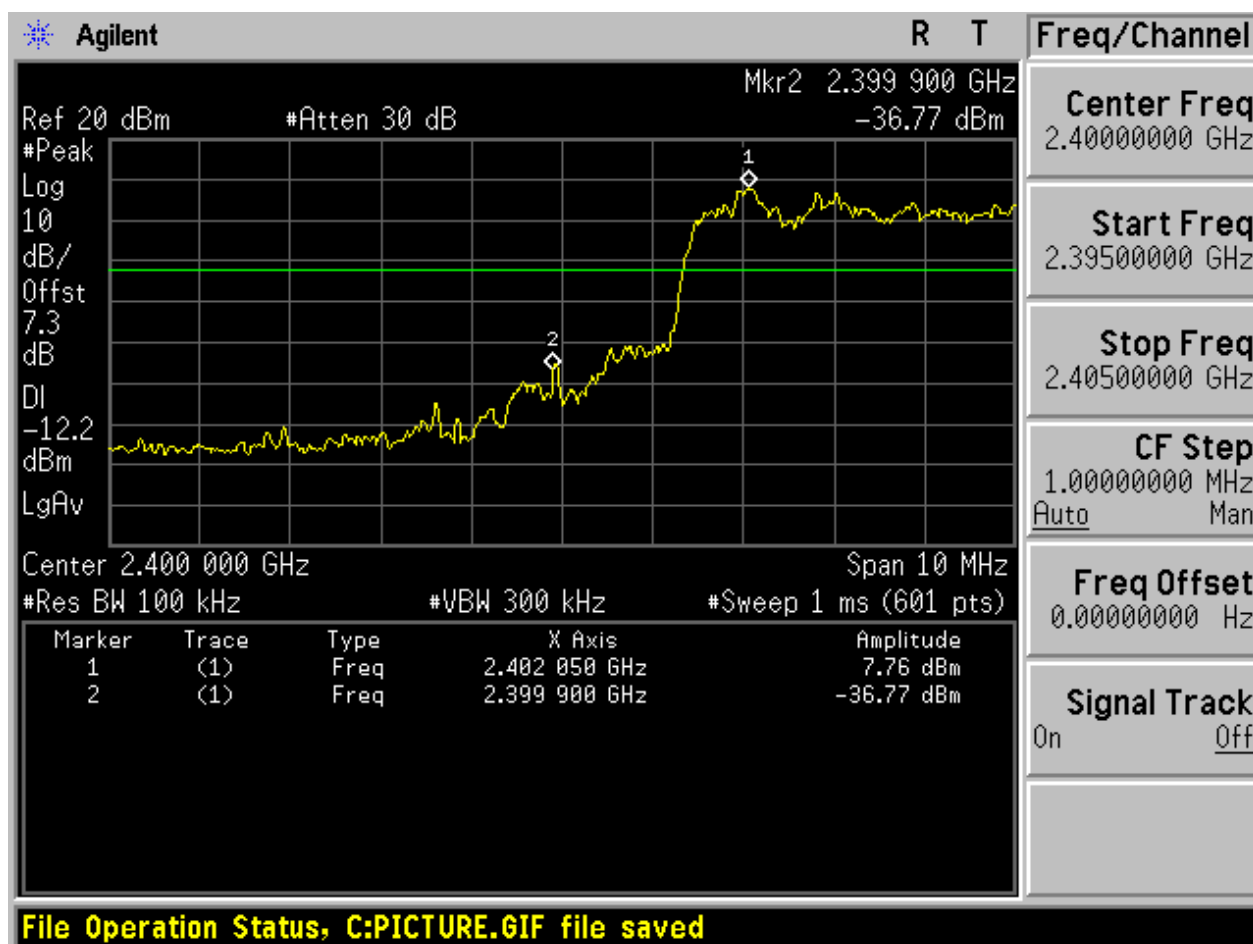


2.4 TM2_2DH5_Ch78

No hopping

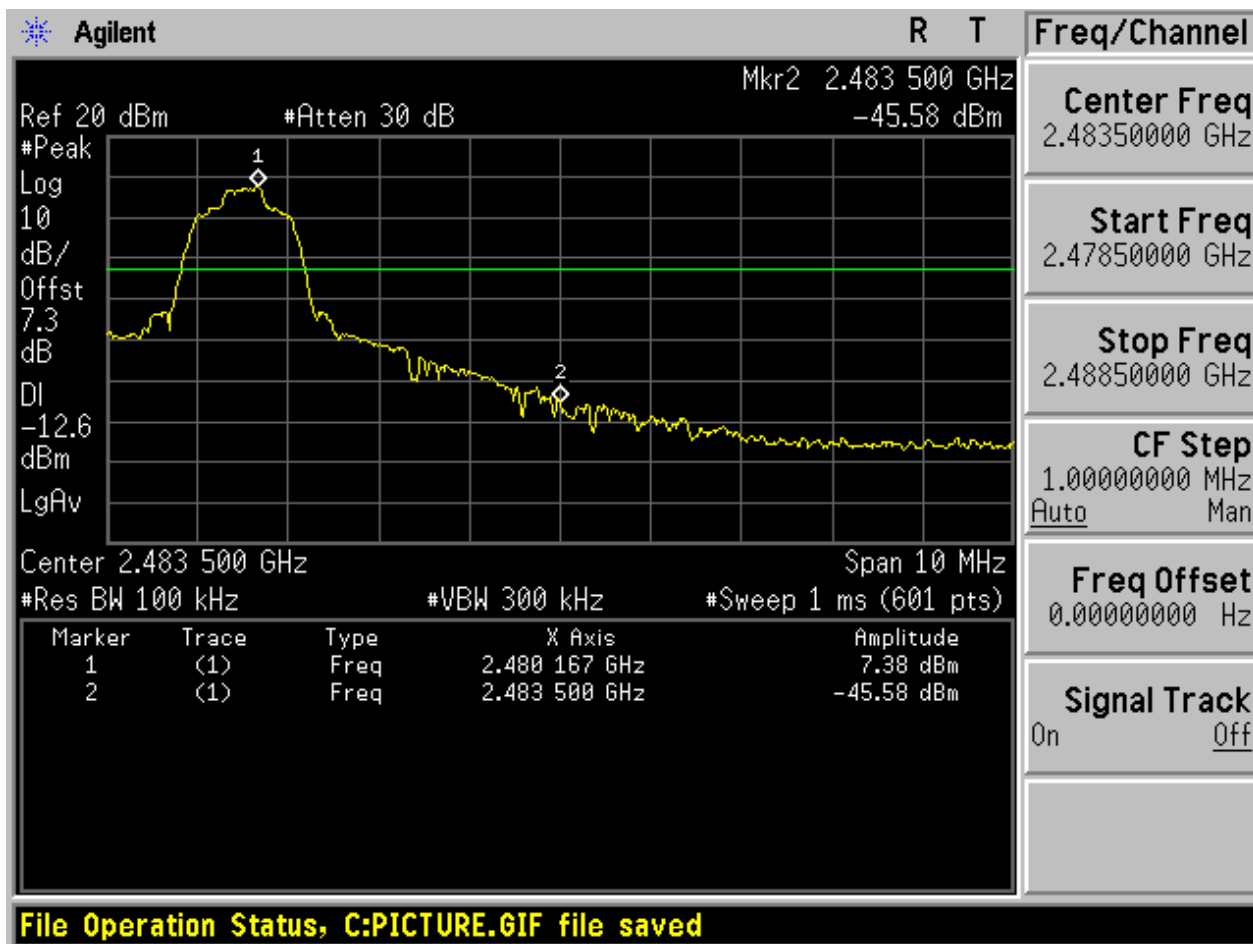


With hopping

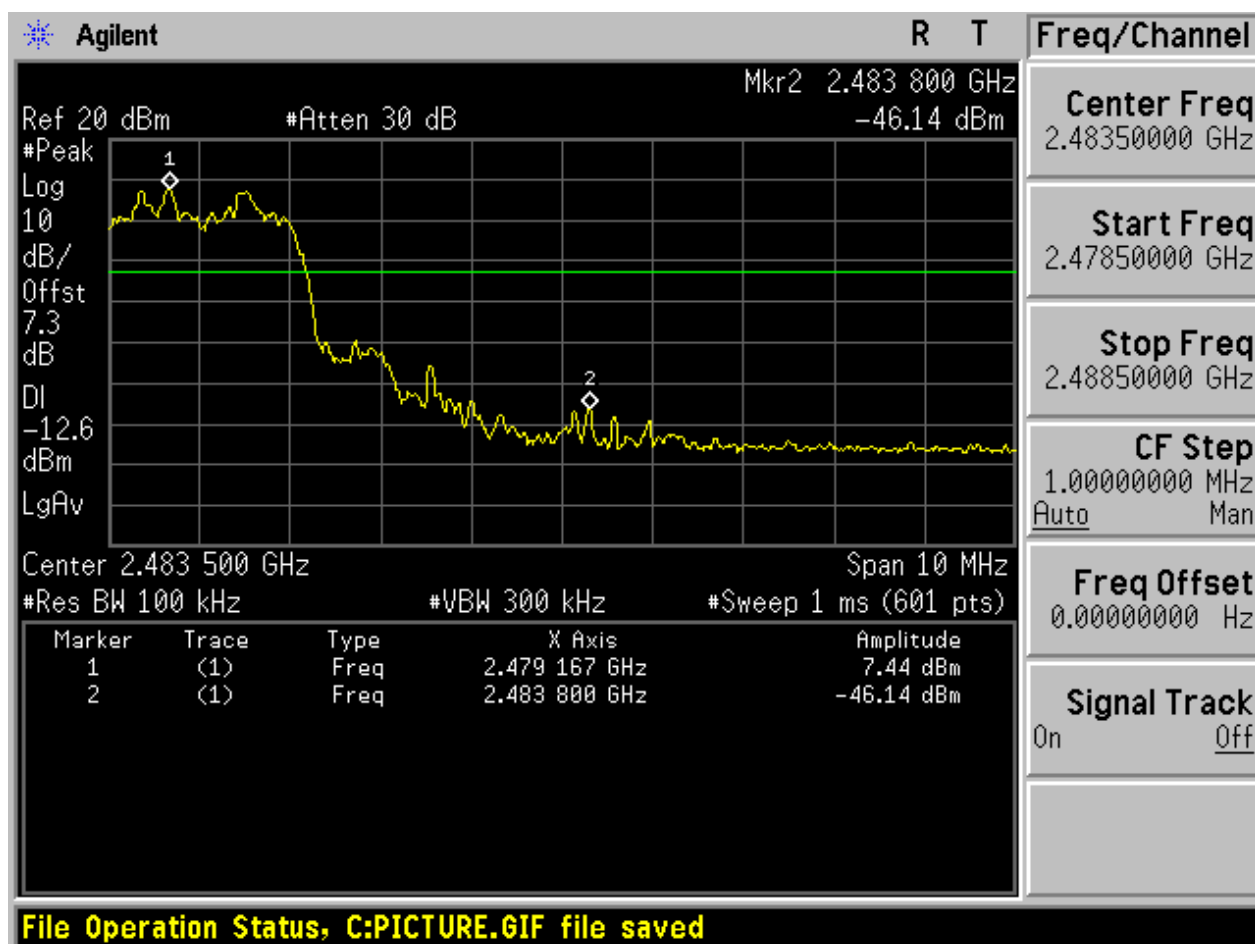


2.5 TM3_3DH5_Ch0

No hopping

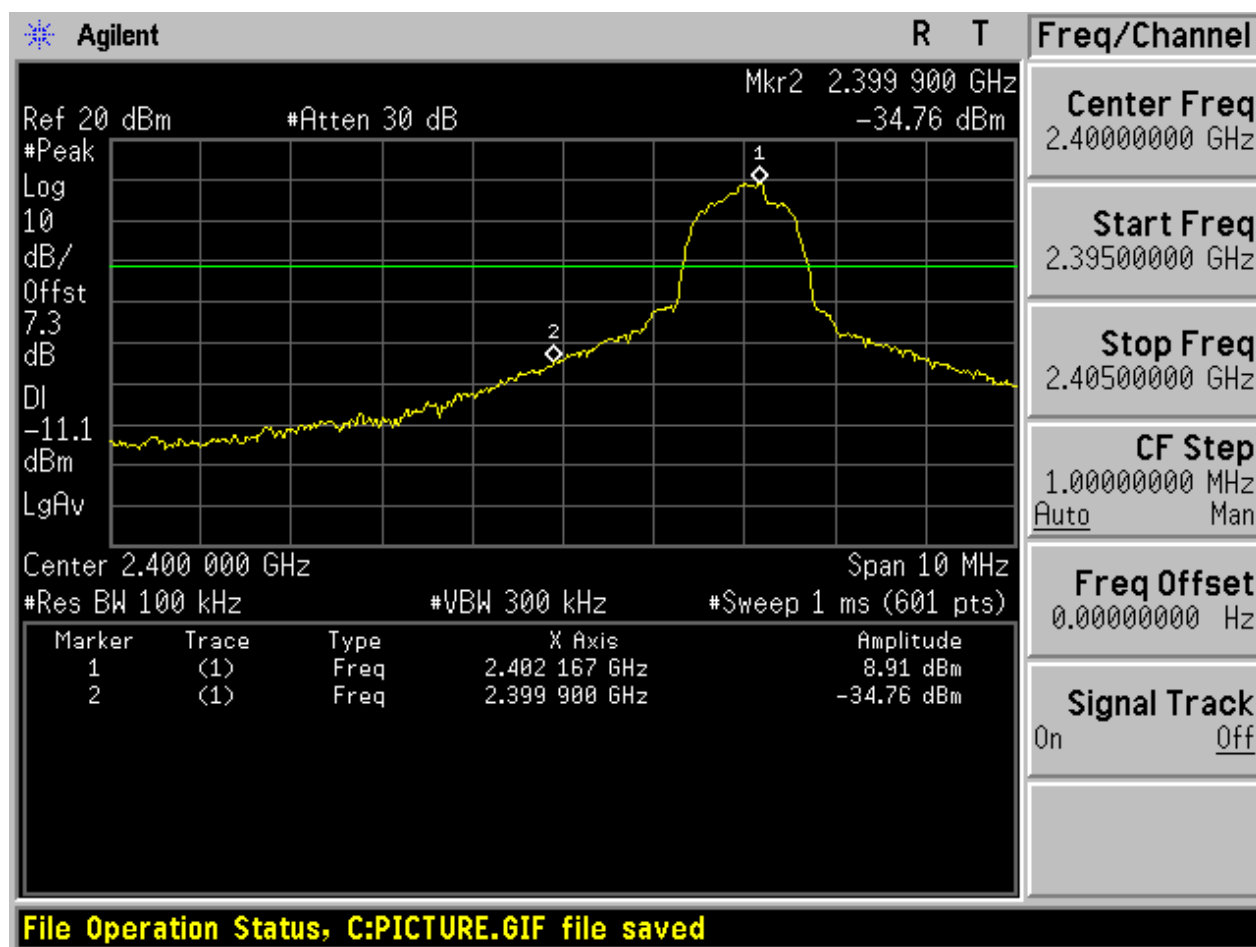


With hopping

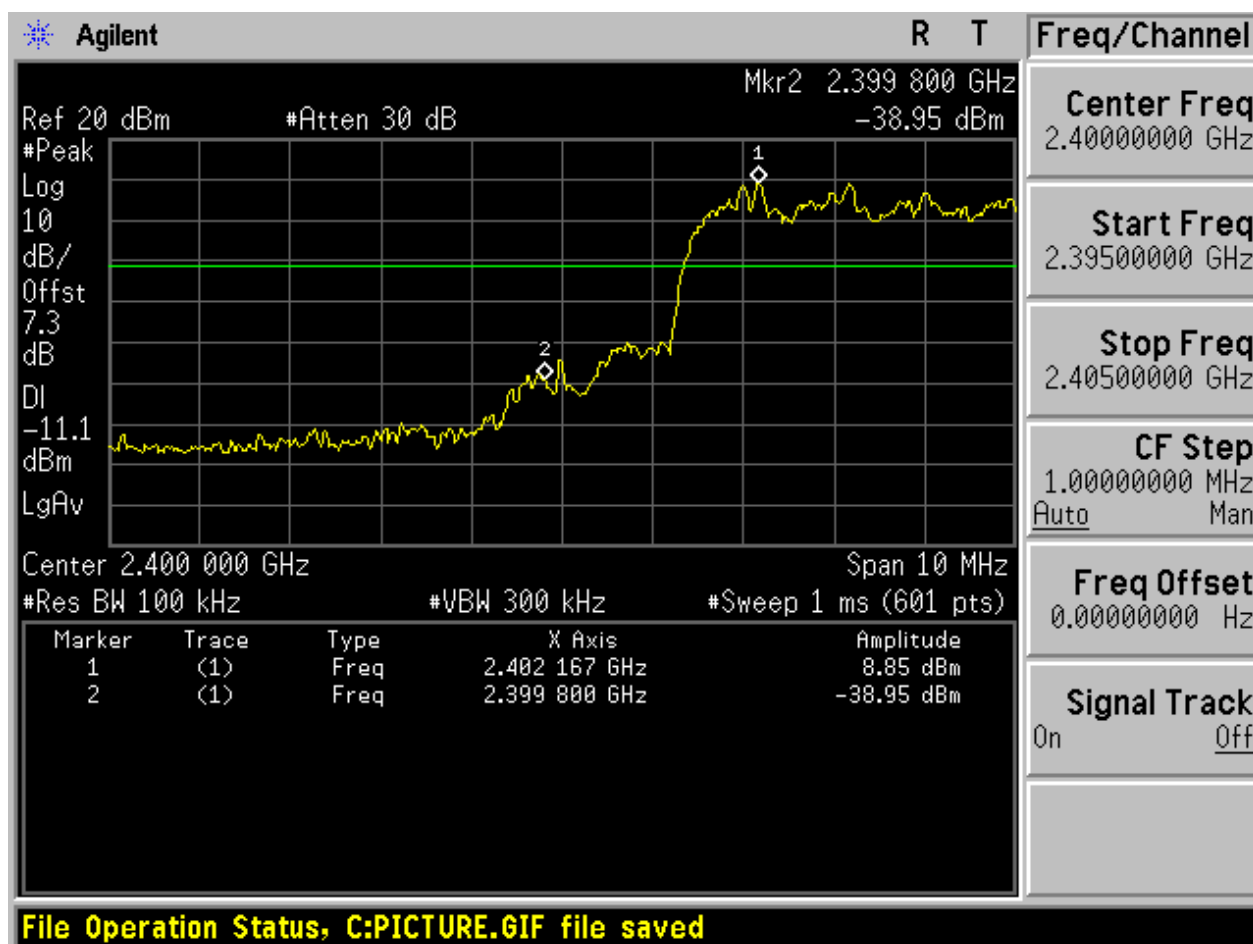


2.6 TM3_3DH5_Ch78

No hopping

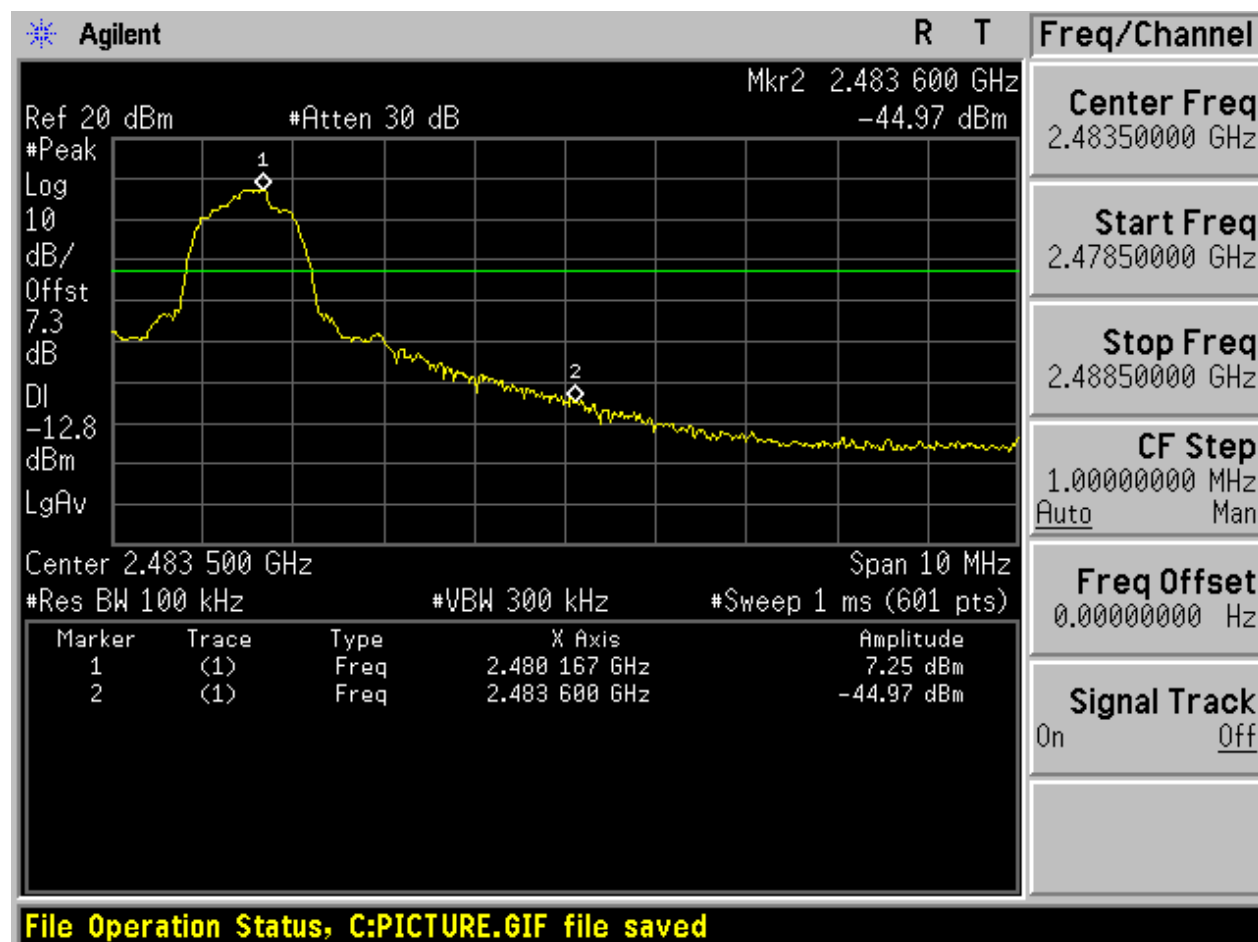

With hopping

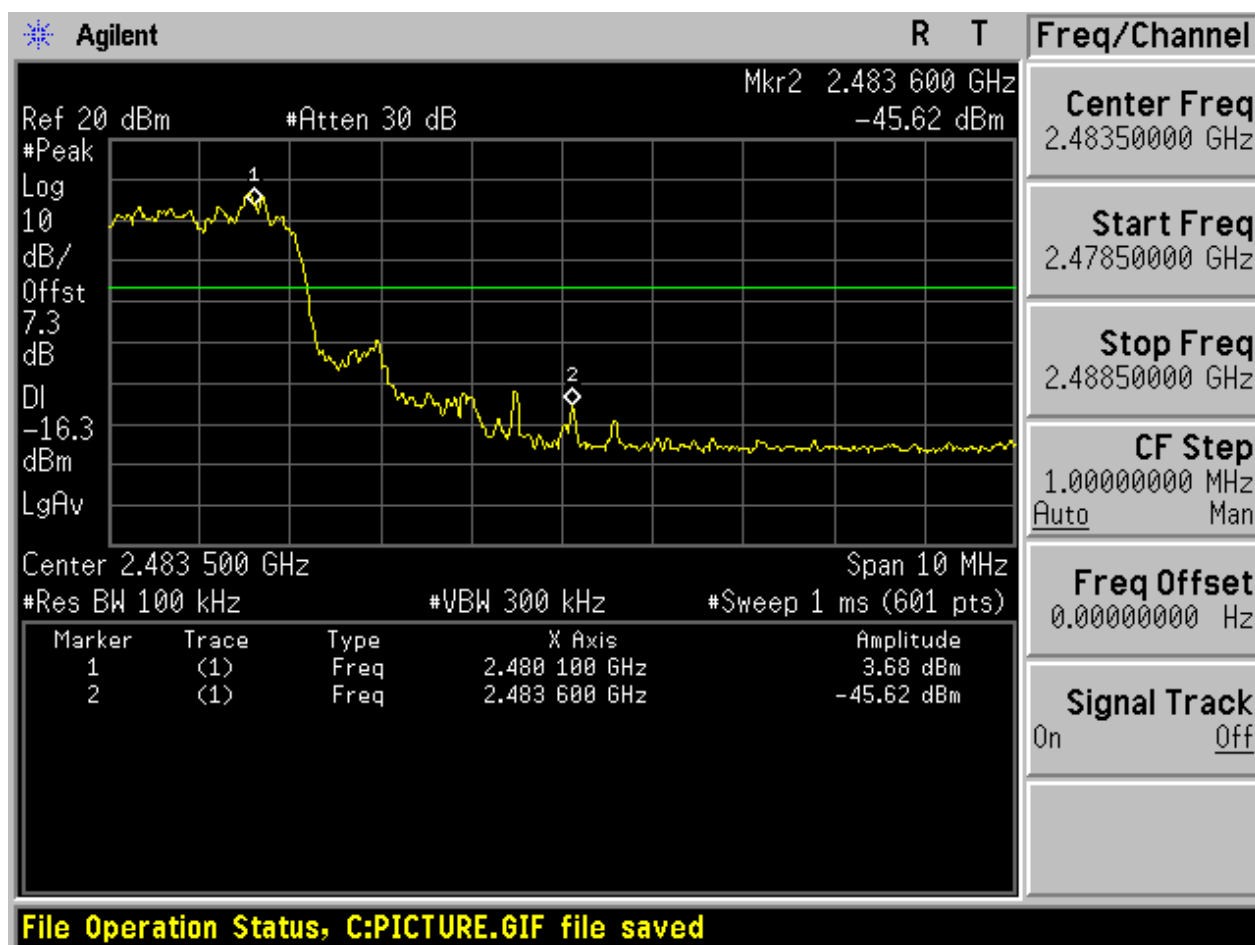

Appendix G: Conducted RF Spurious Emission

1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.

EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	8.77	< Limit	Pass
TM1_DH5_Ch39	9.51	< Limit	Pass
TM1_DH5_Ch78	7.32	< Limit	Pass
TM2_2DH5_Ch0	8.80	< Limit	Pass
TM2_2DH5_Ch39	9.51	< Limit	Pass
TM2_2DH5_Ch78	7.31	< Limit	Pass
TM3_3DH5_Ch0	8.82	< Limit	Pass
TM3_3DH5_Ch39	9.52	< Limit	Pass
TM3_3DH5_Ch78	7.31	< Limit	Pass


2 Test Plot


2.1 TM1_DH5_Ch0


2.1.1 Pref

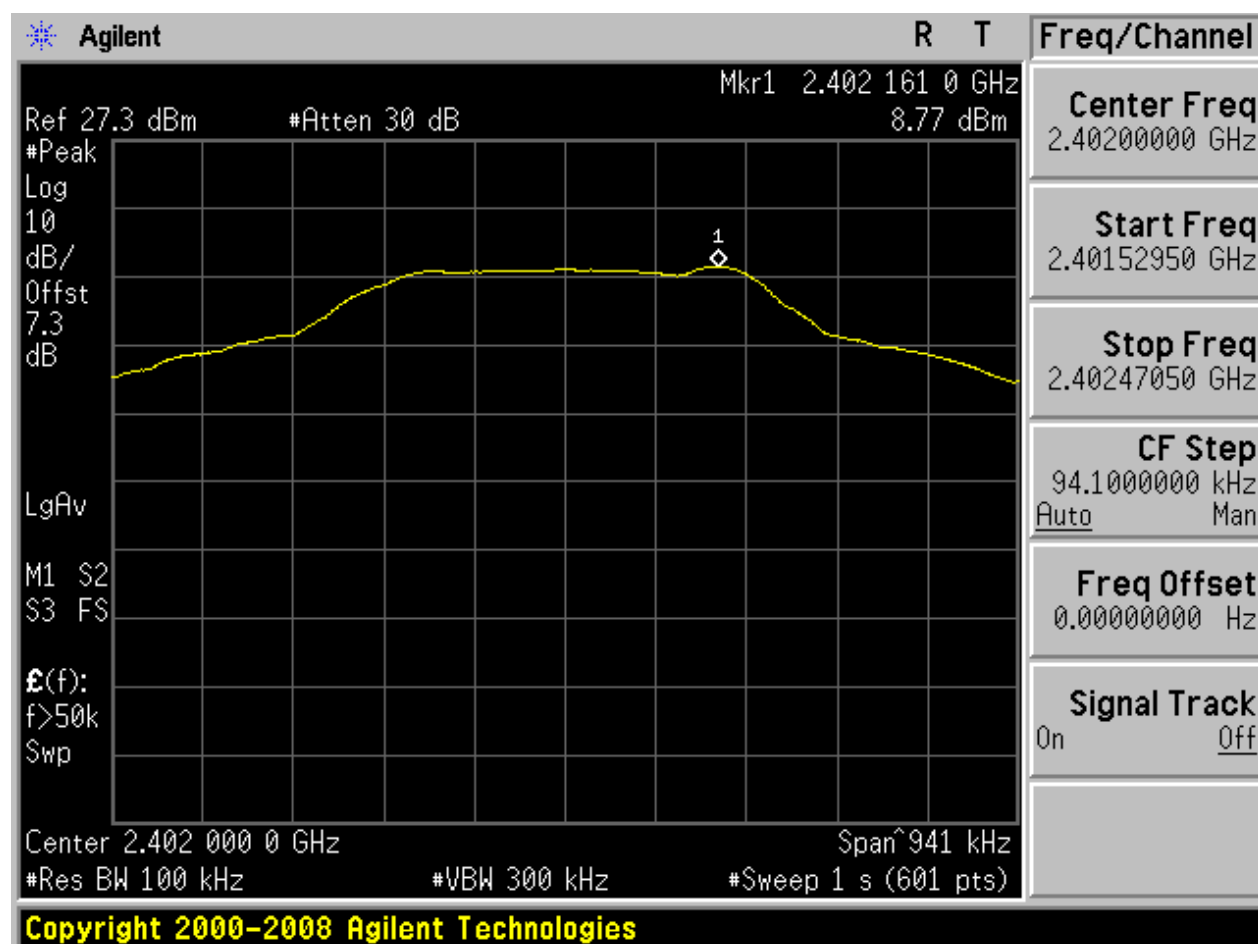



2.1.2 Puw

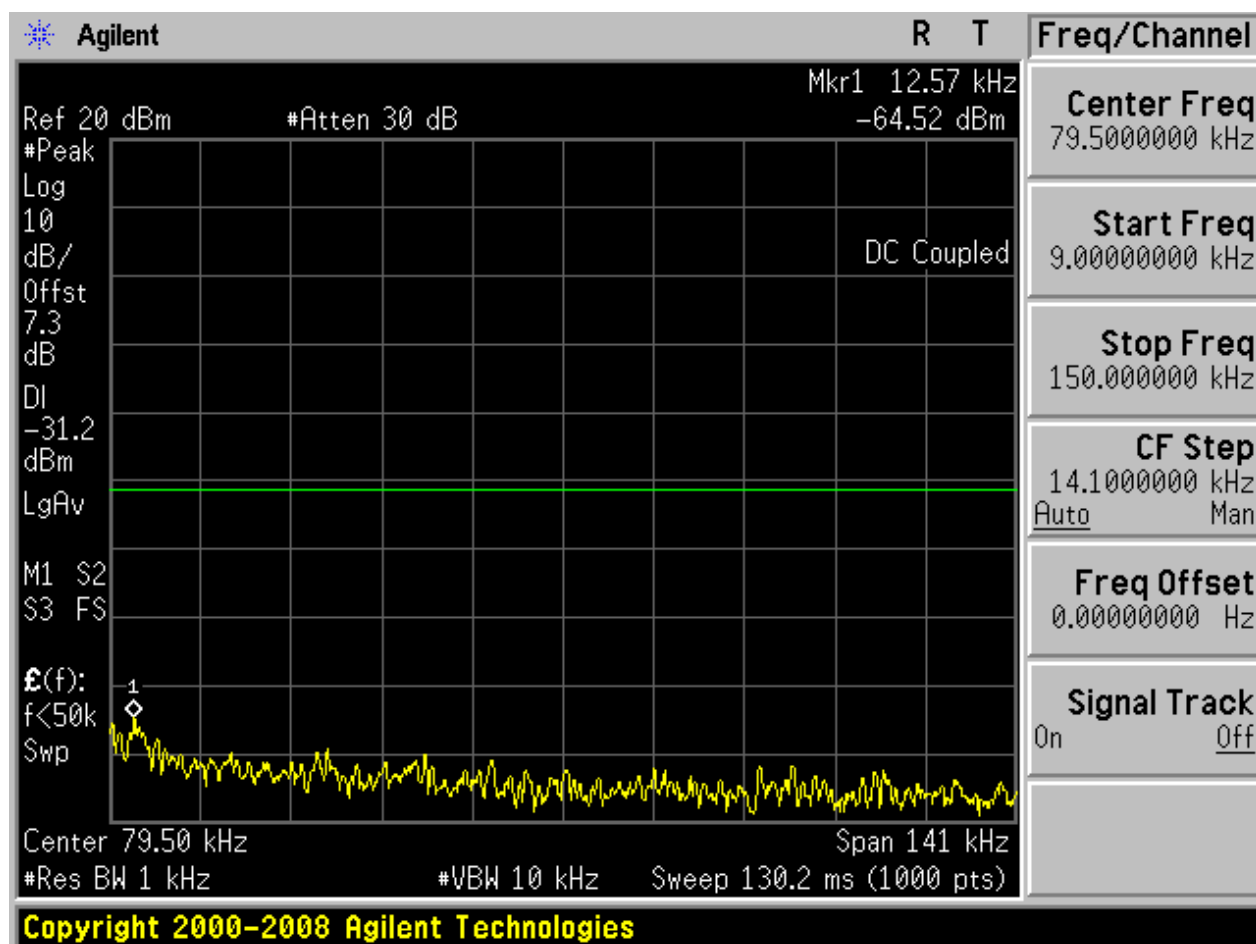


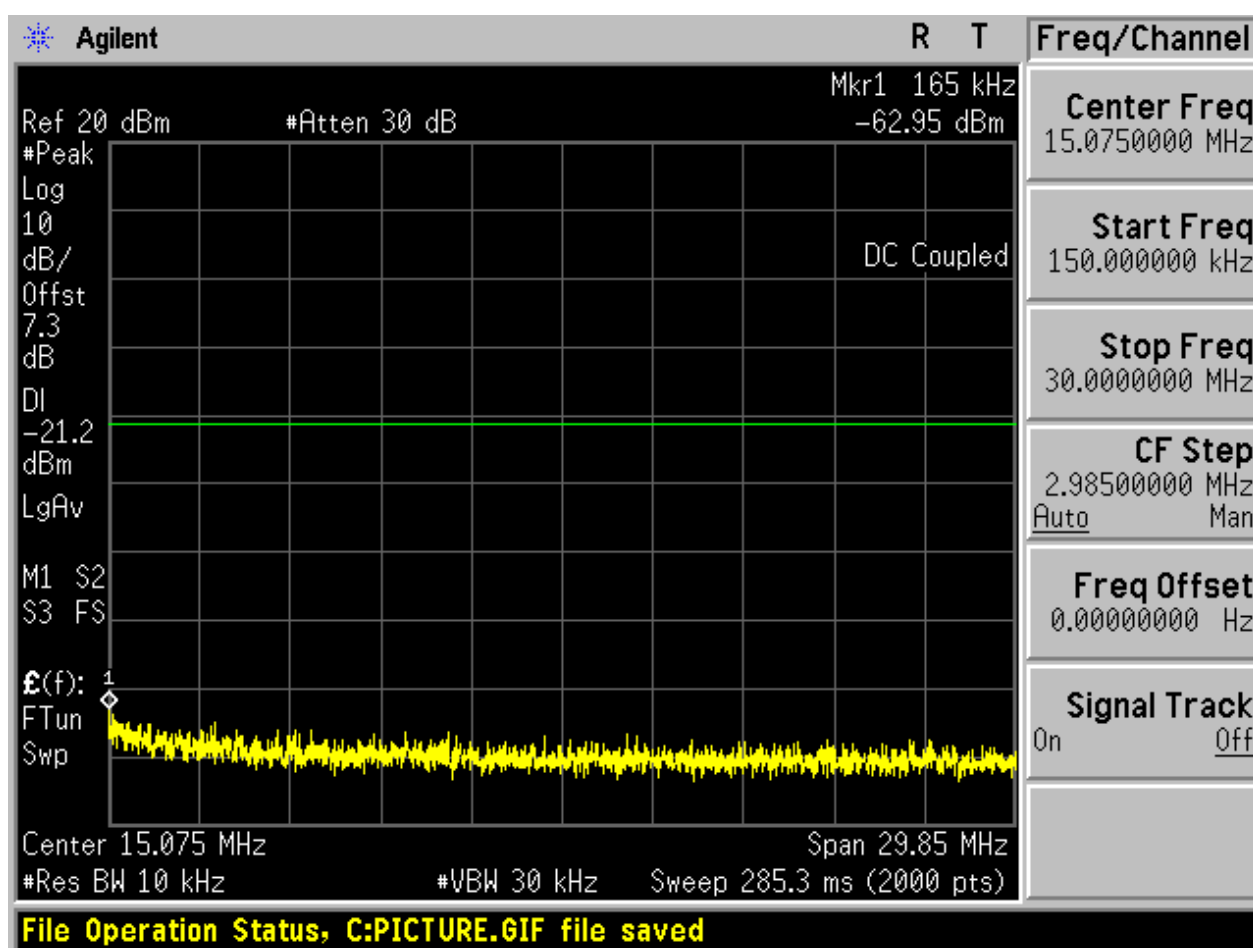

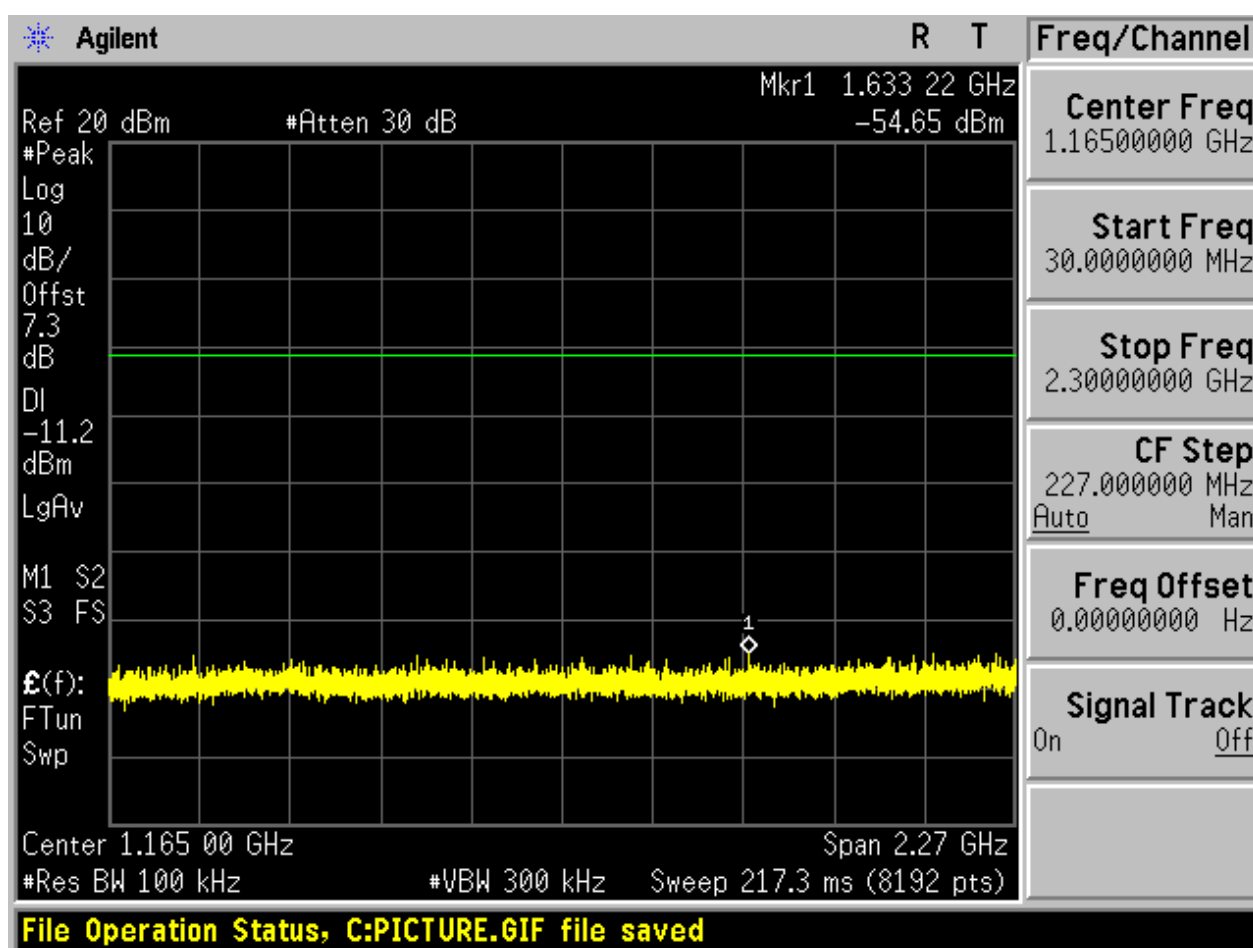

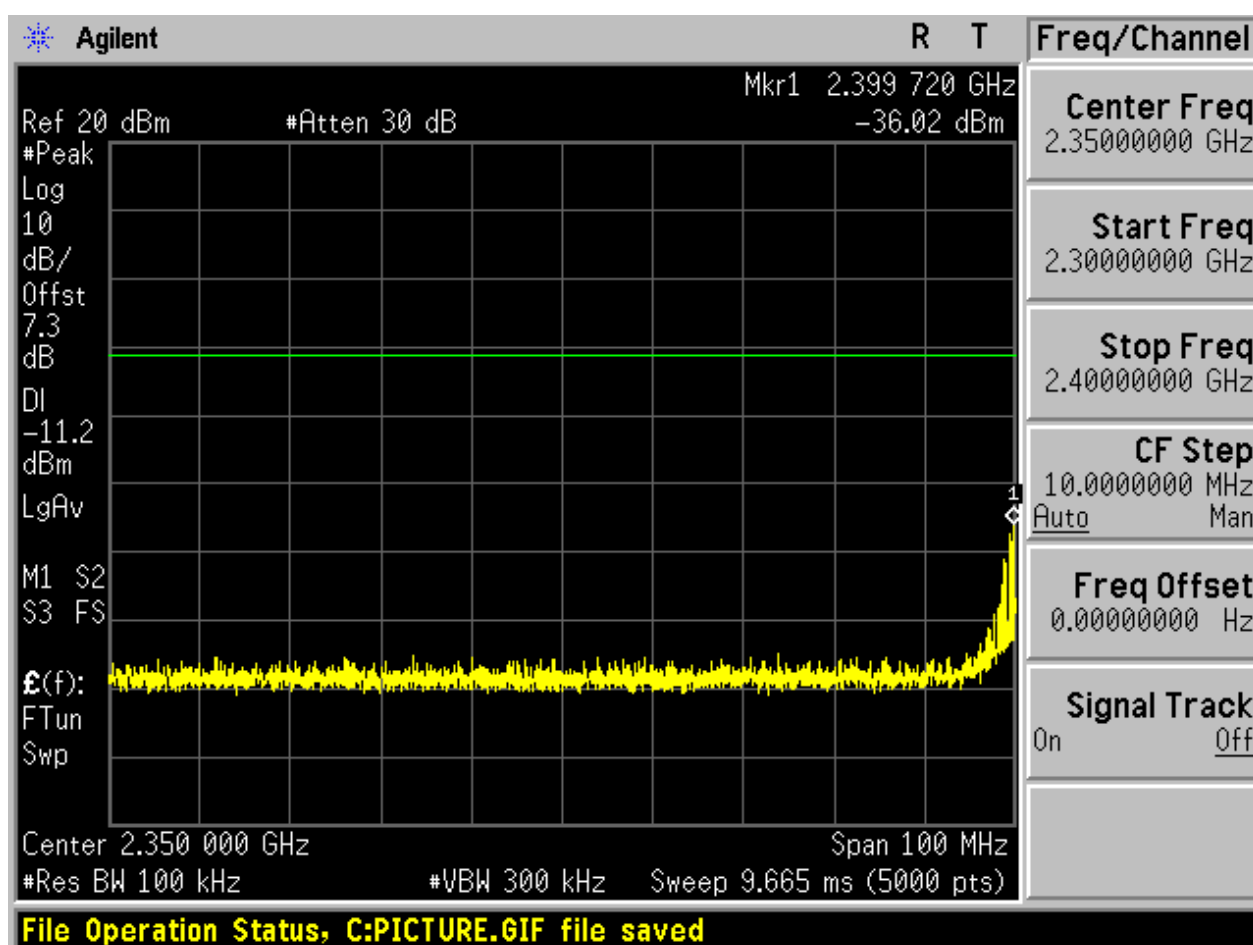


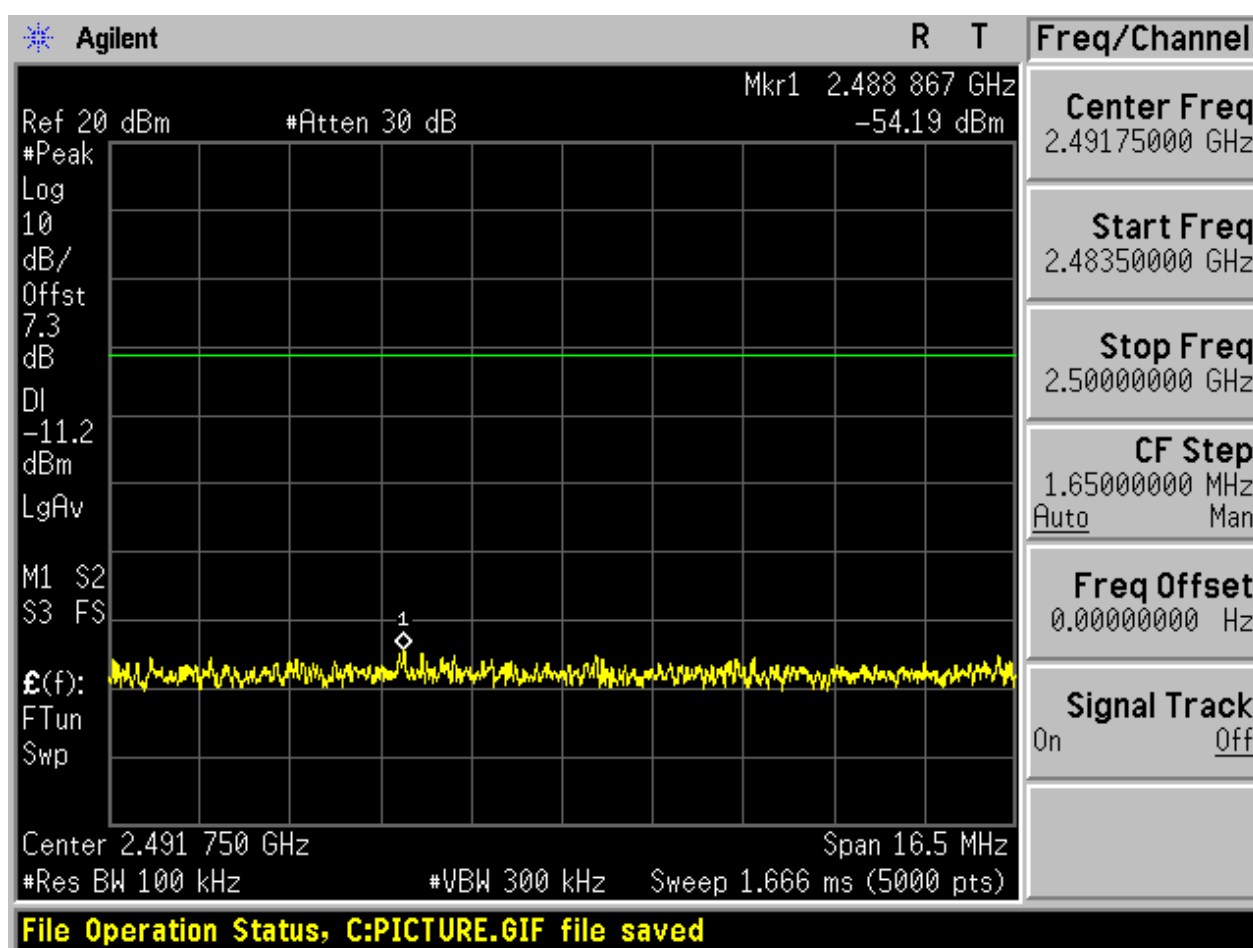

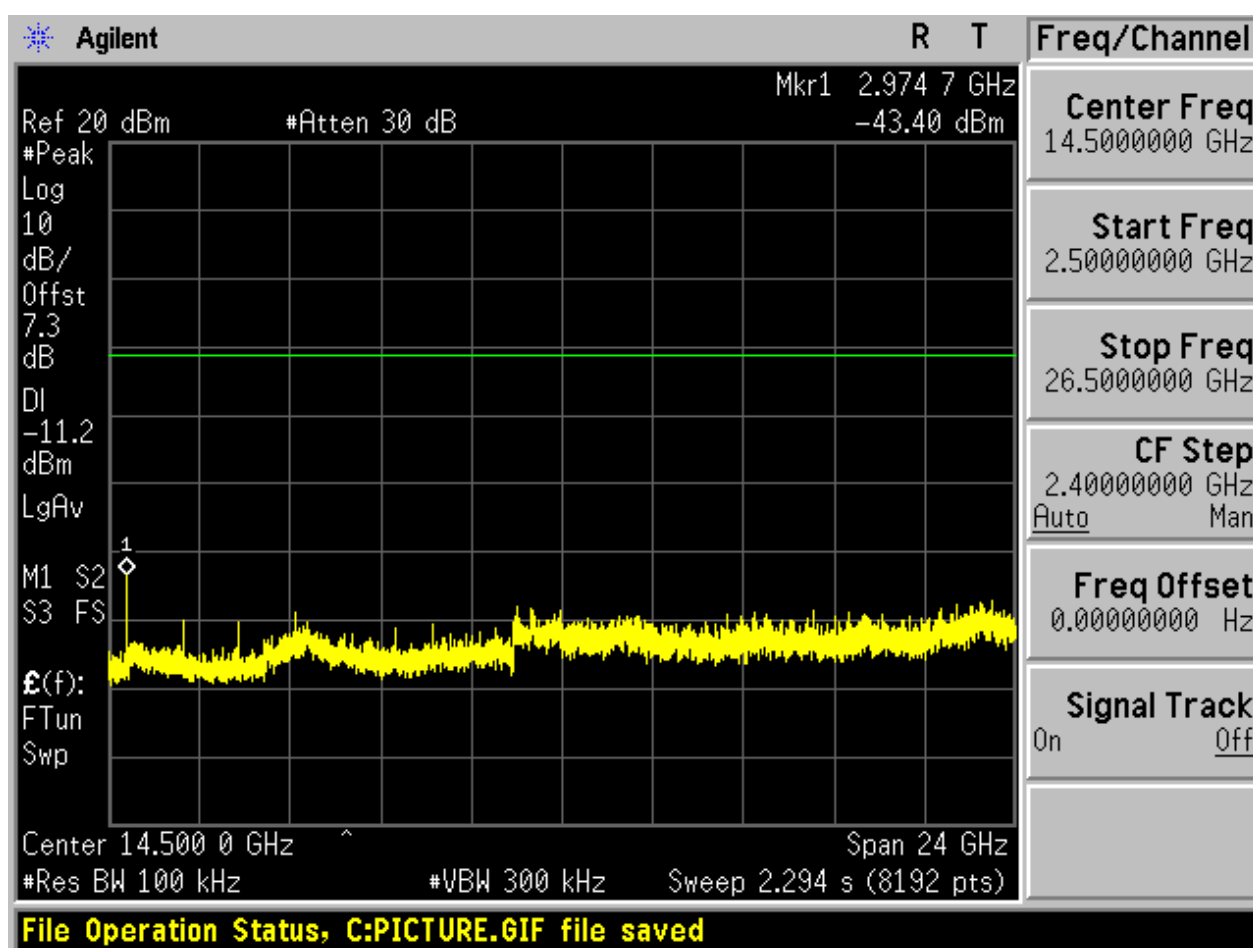



2.2 TM1_DH5_Ch39


2.2.1 Pref

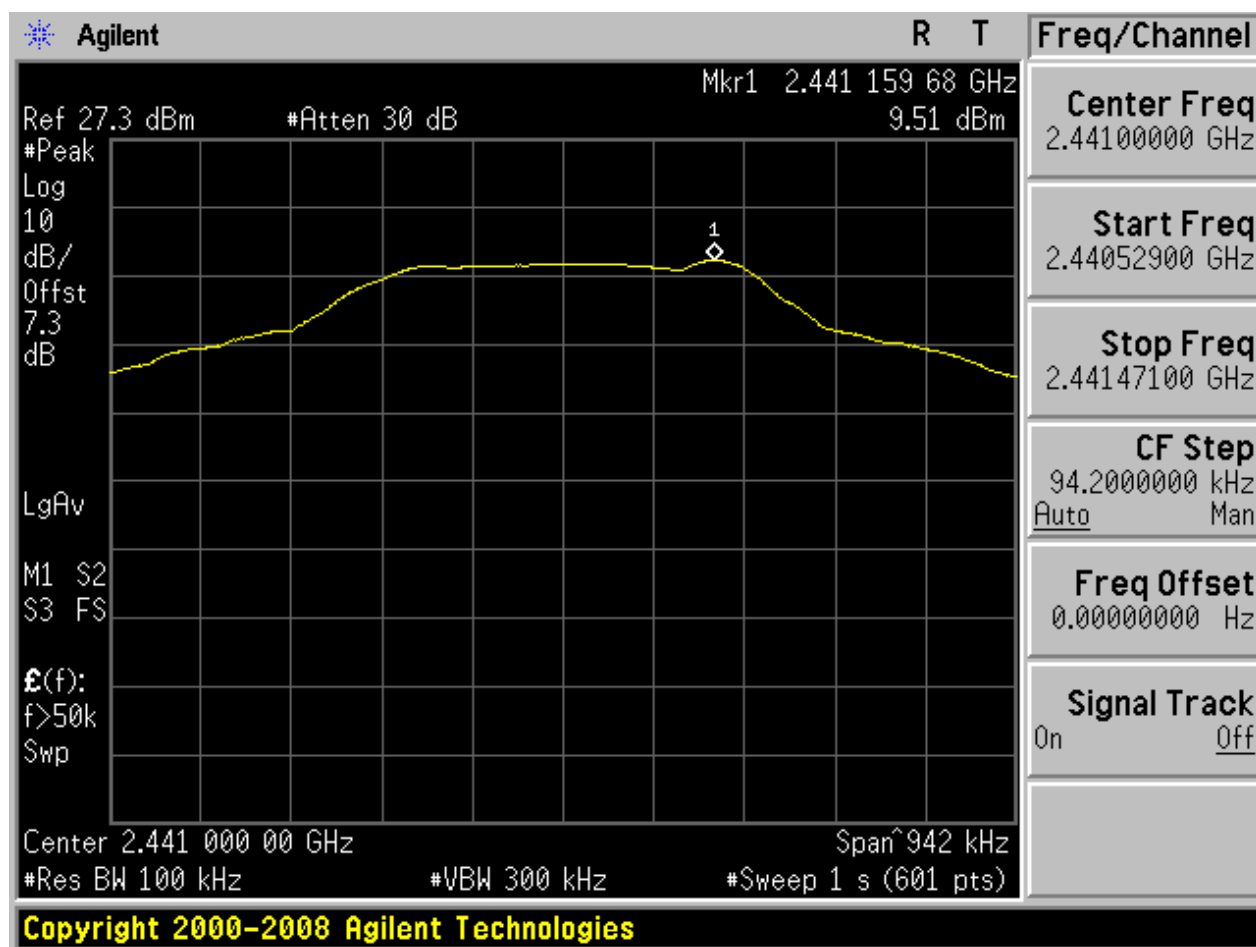



2.2.2 Puw

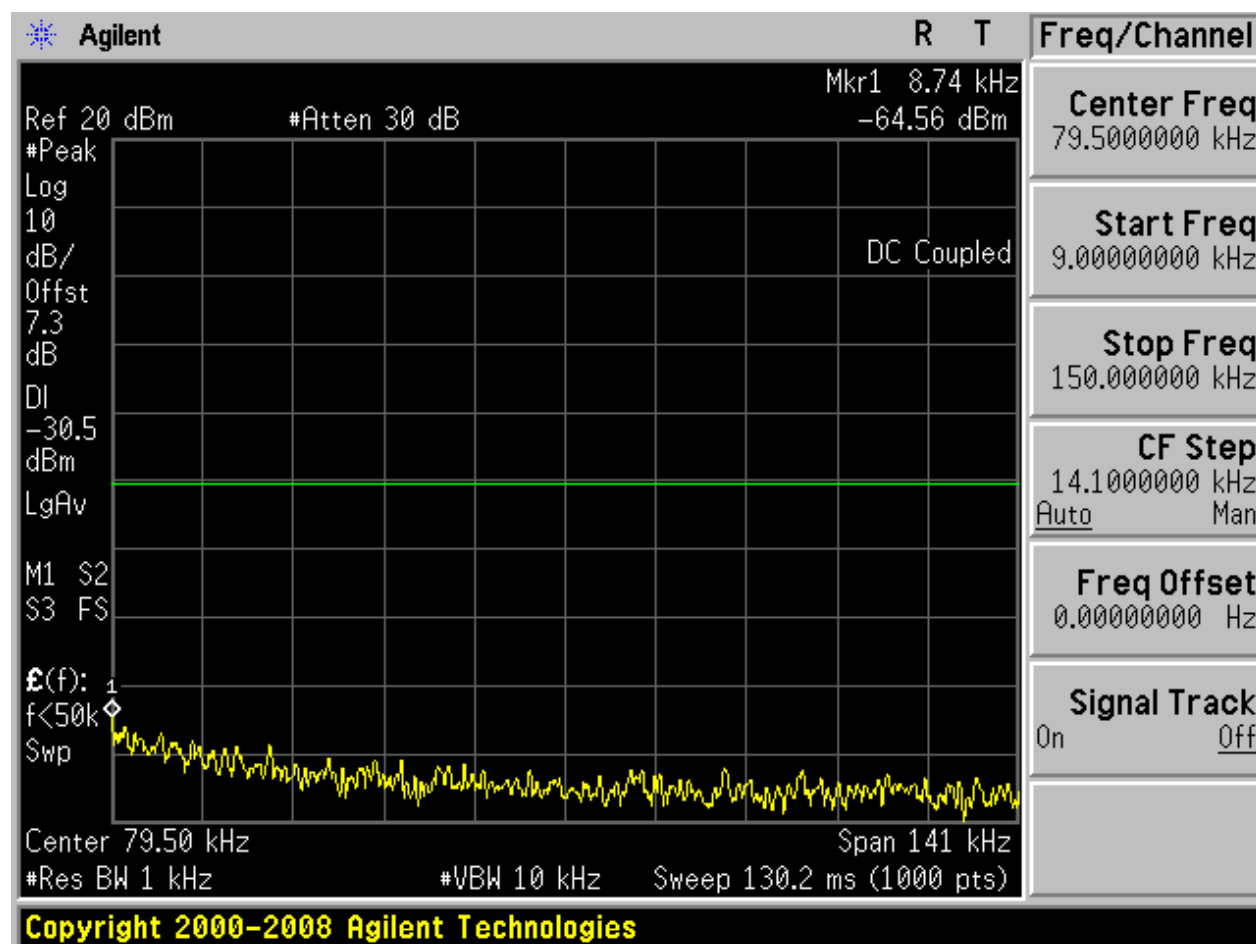


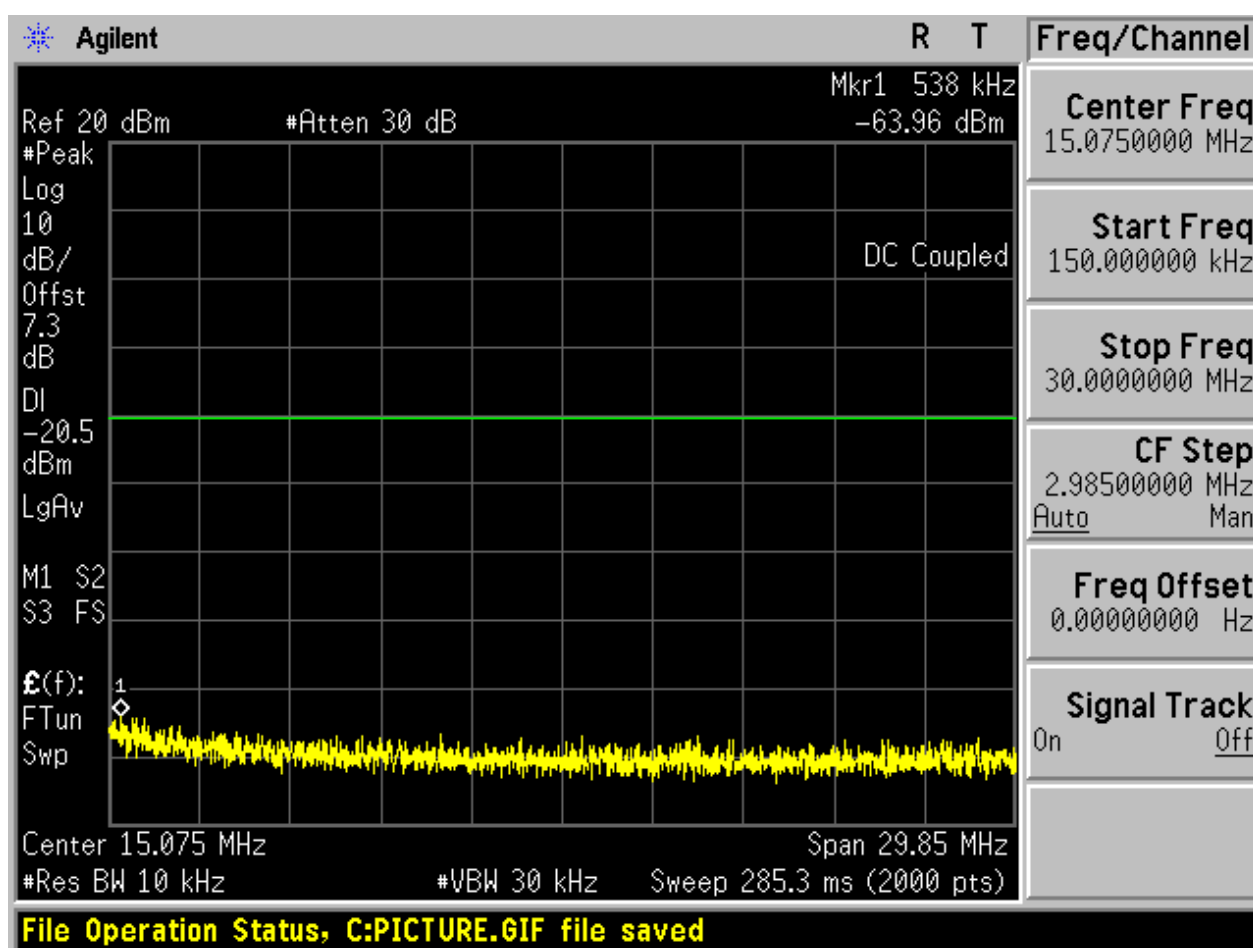

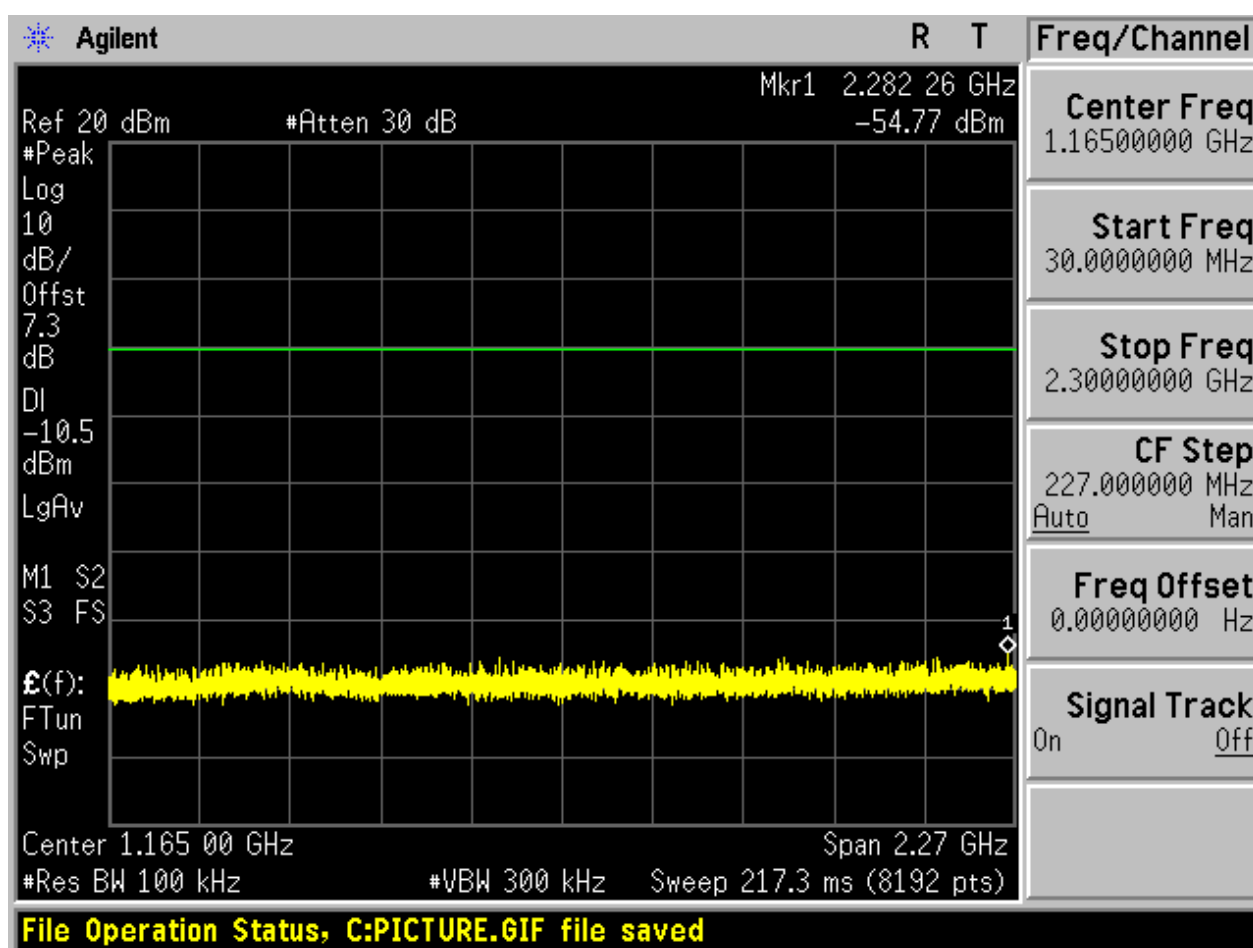

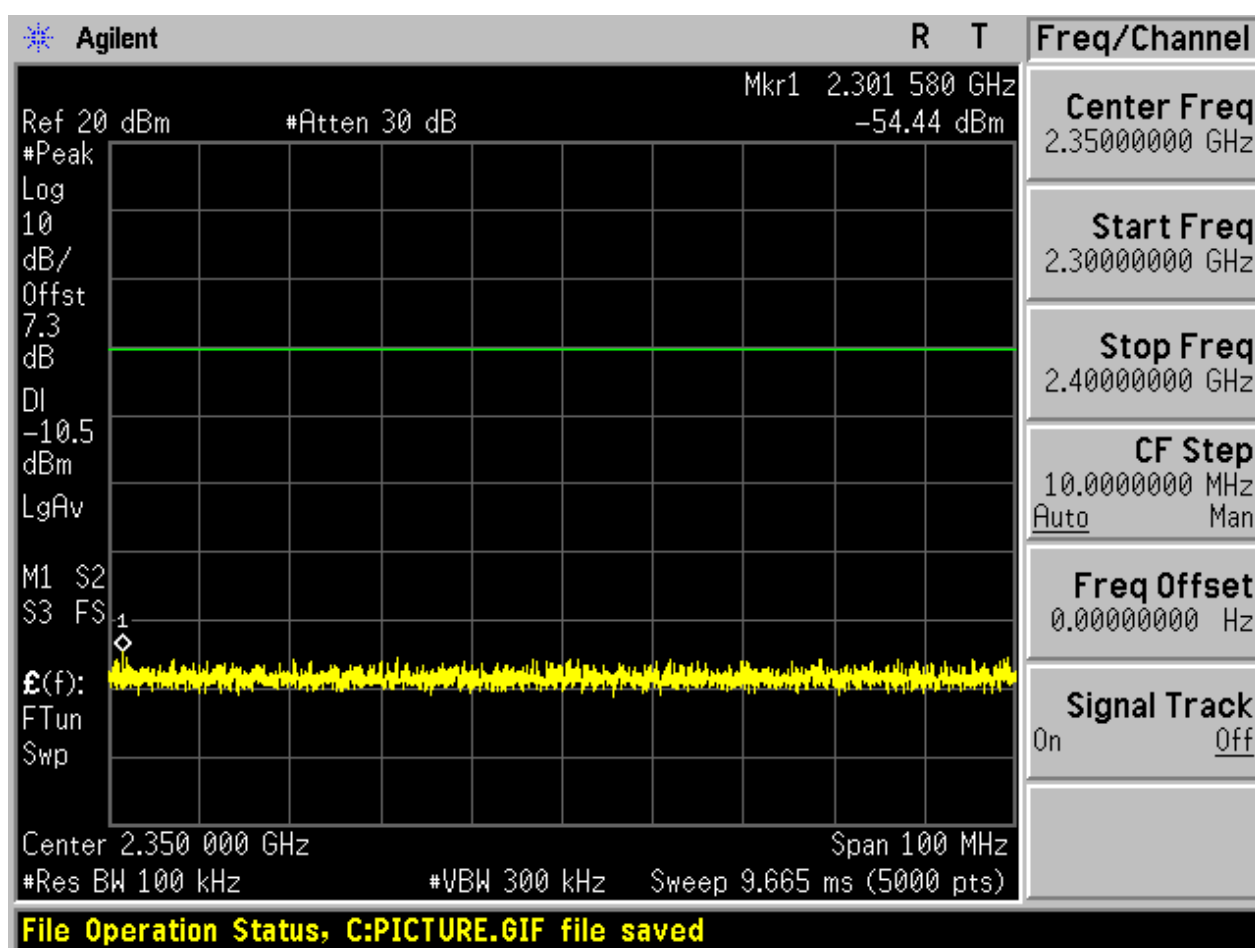


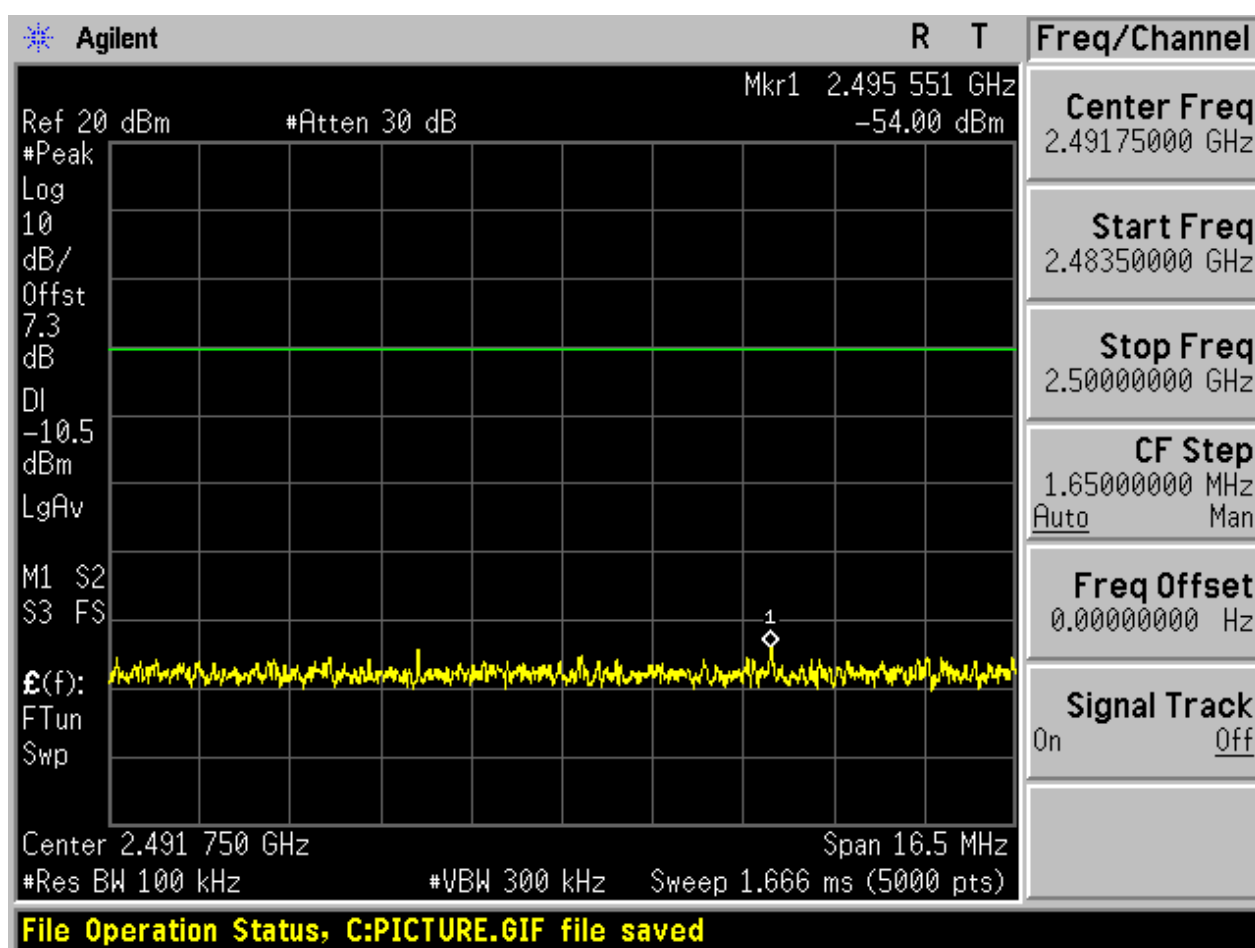

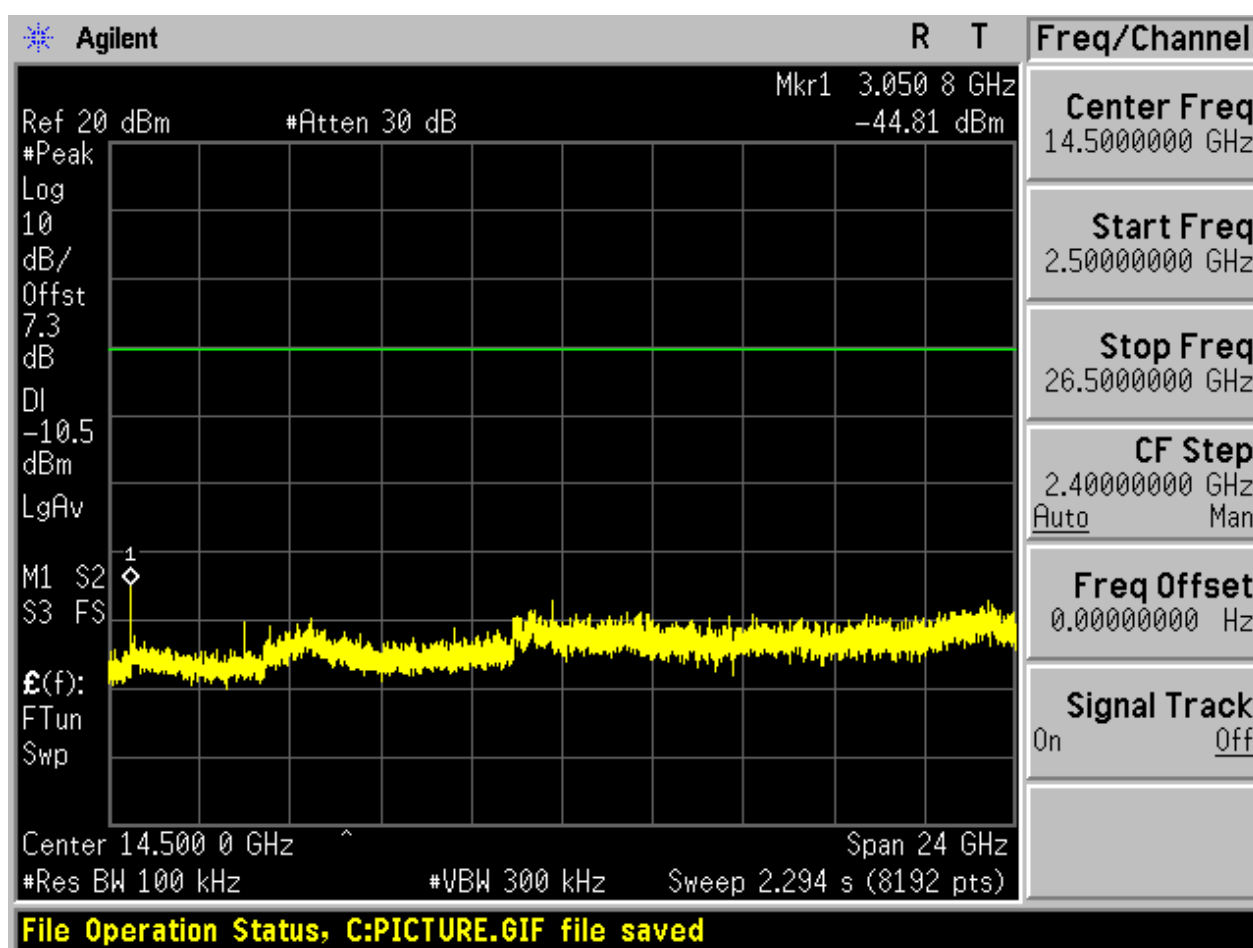



2.3 TM1_DH5_Ch78


2.3.1 Pref

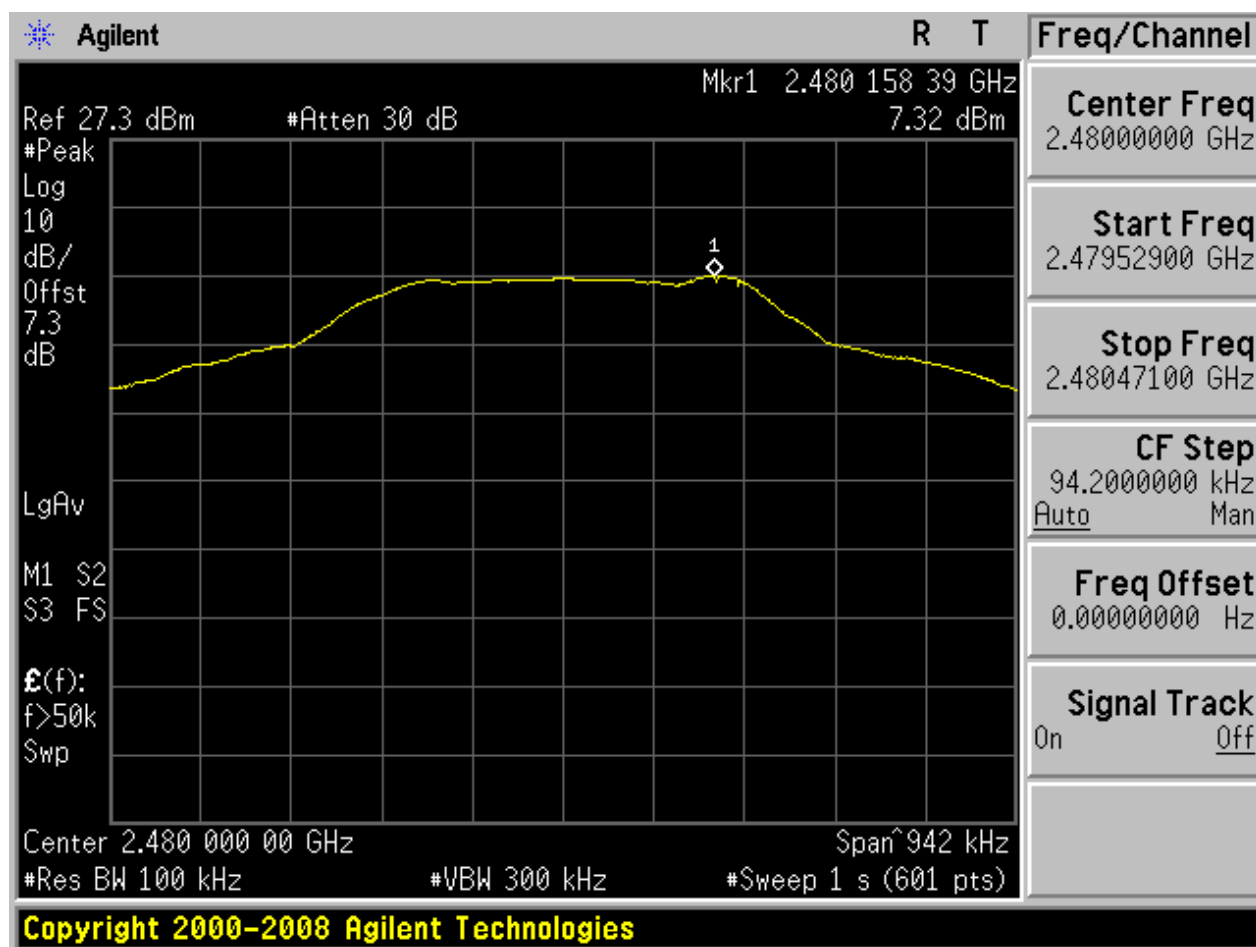



2.3.2 Puw

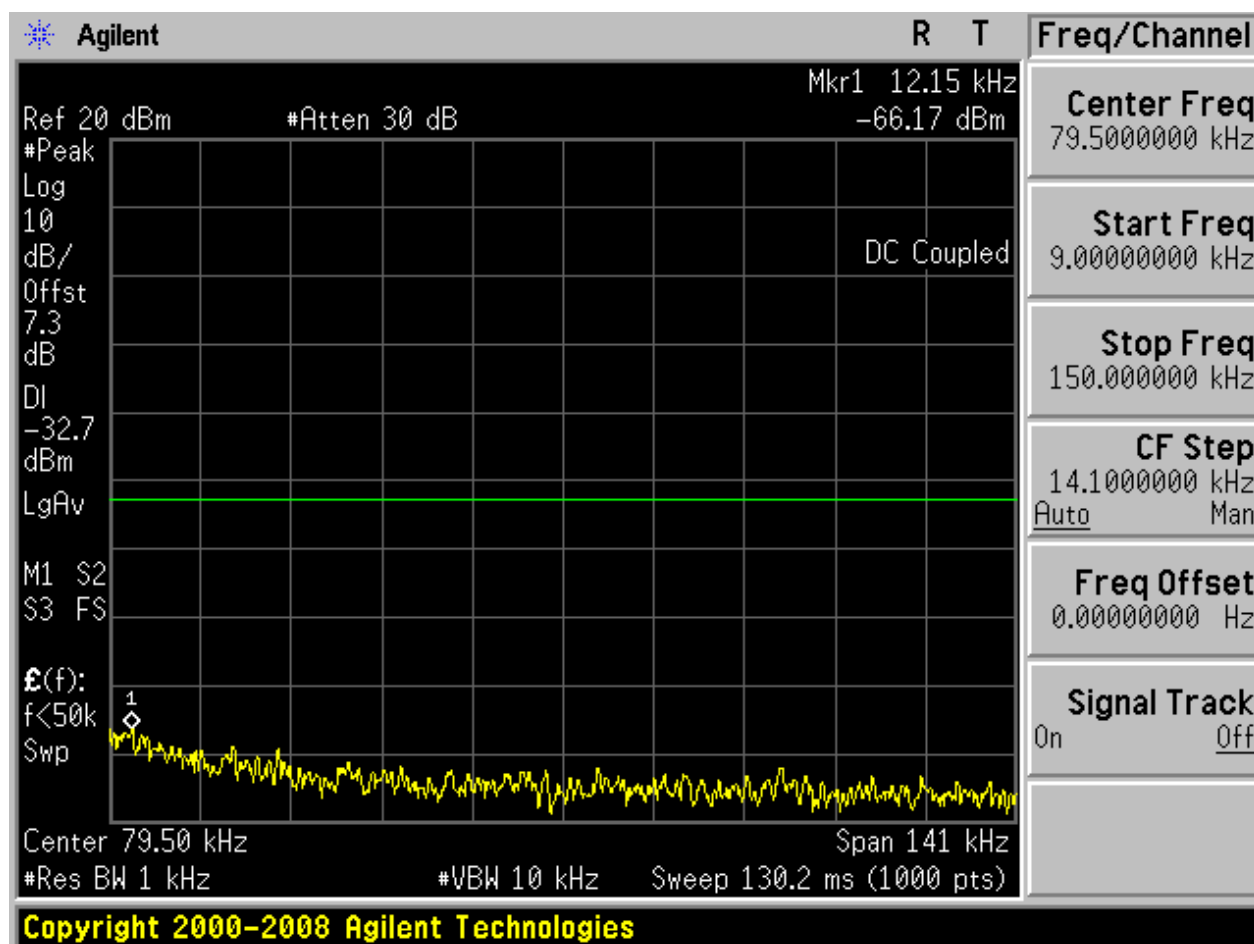


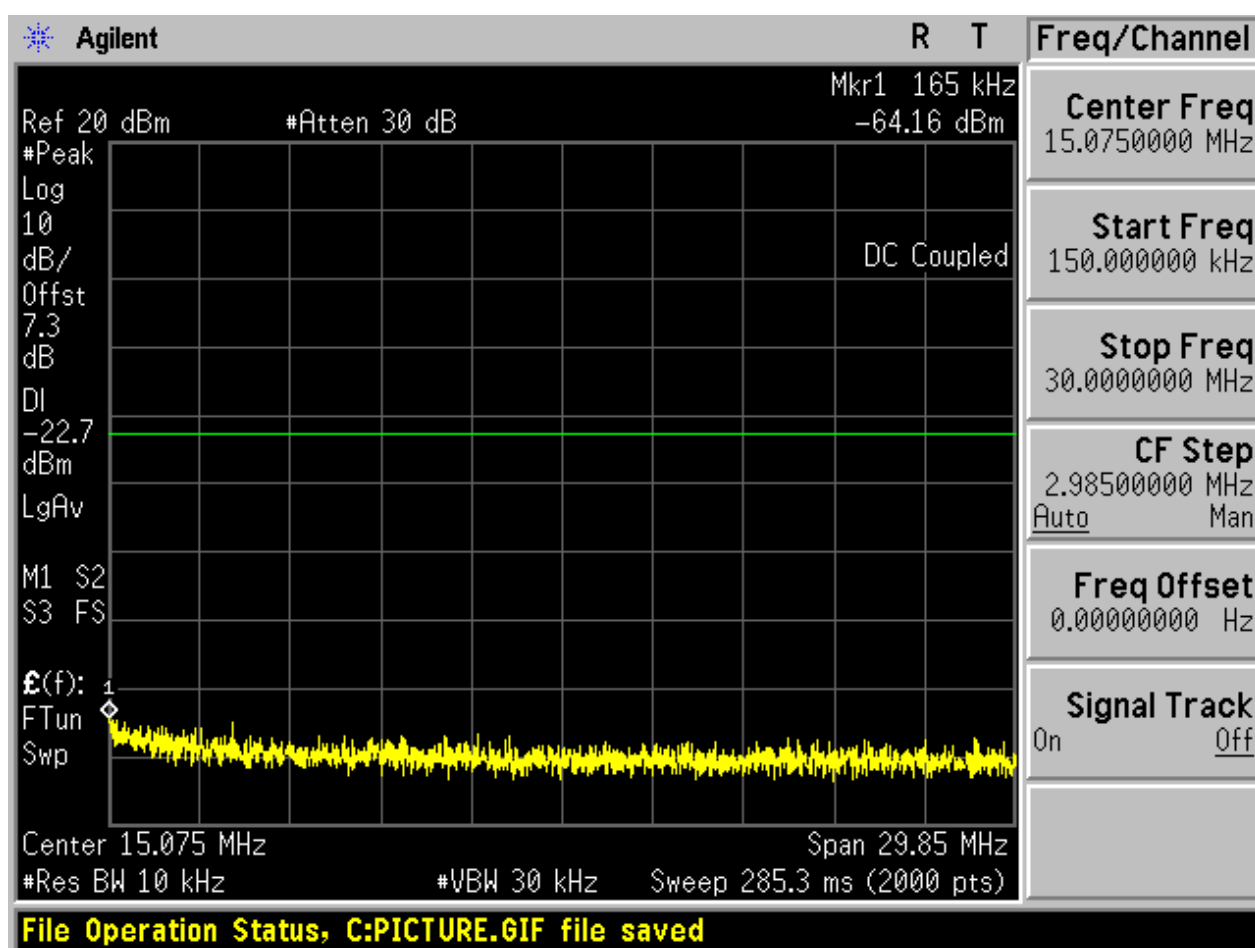

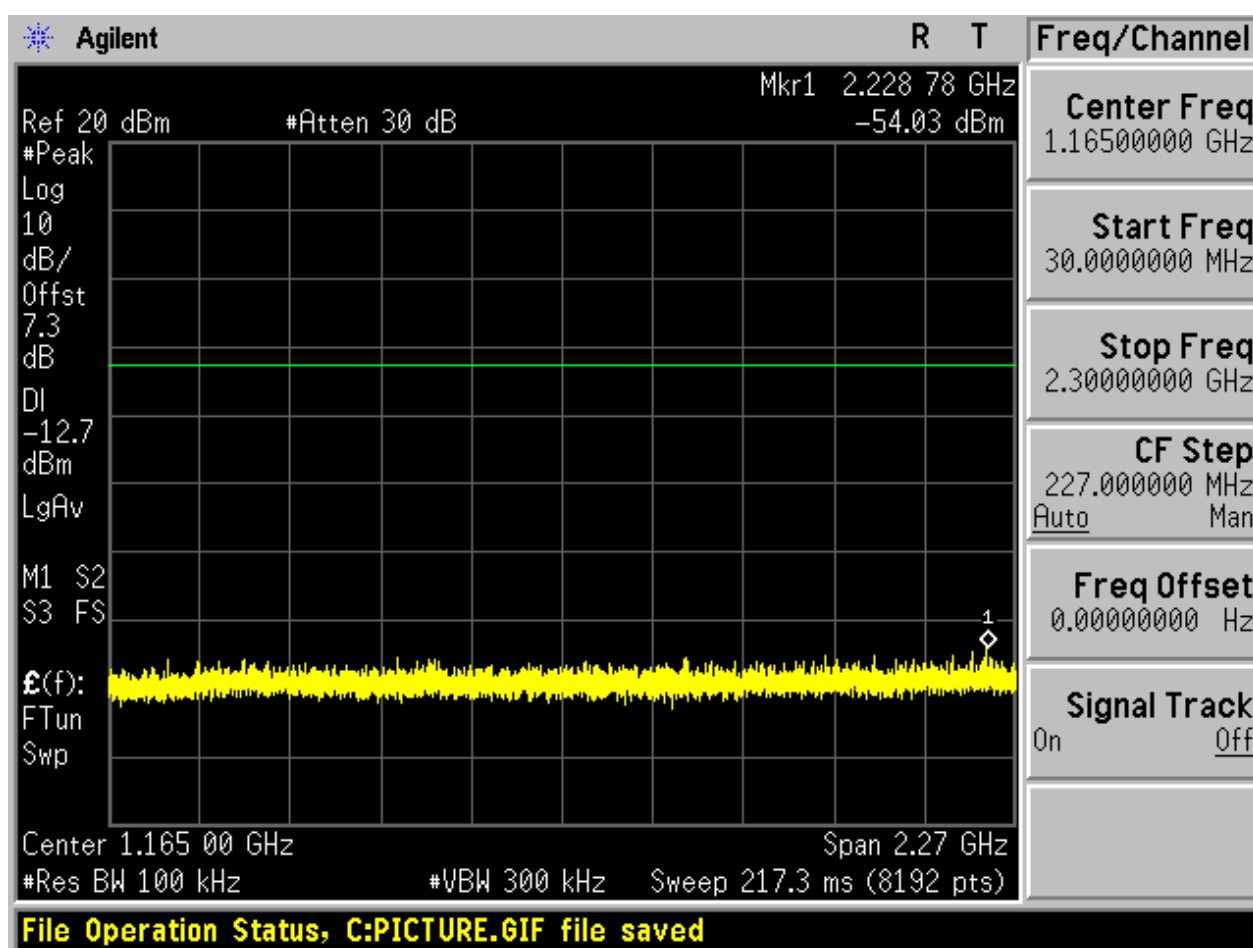

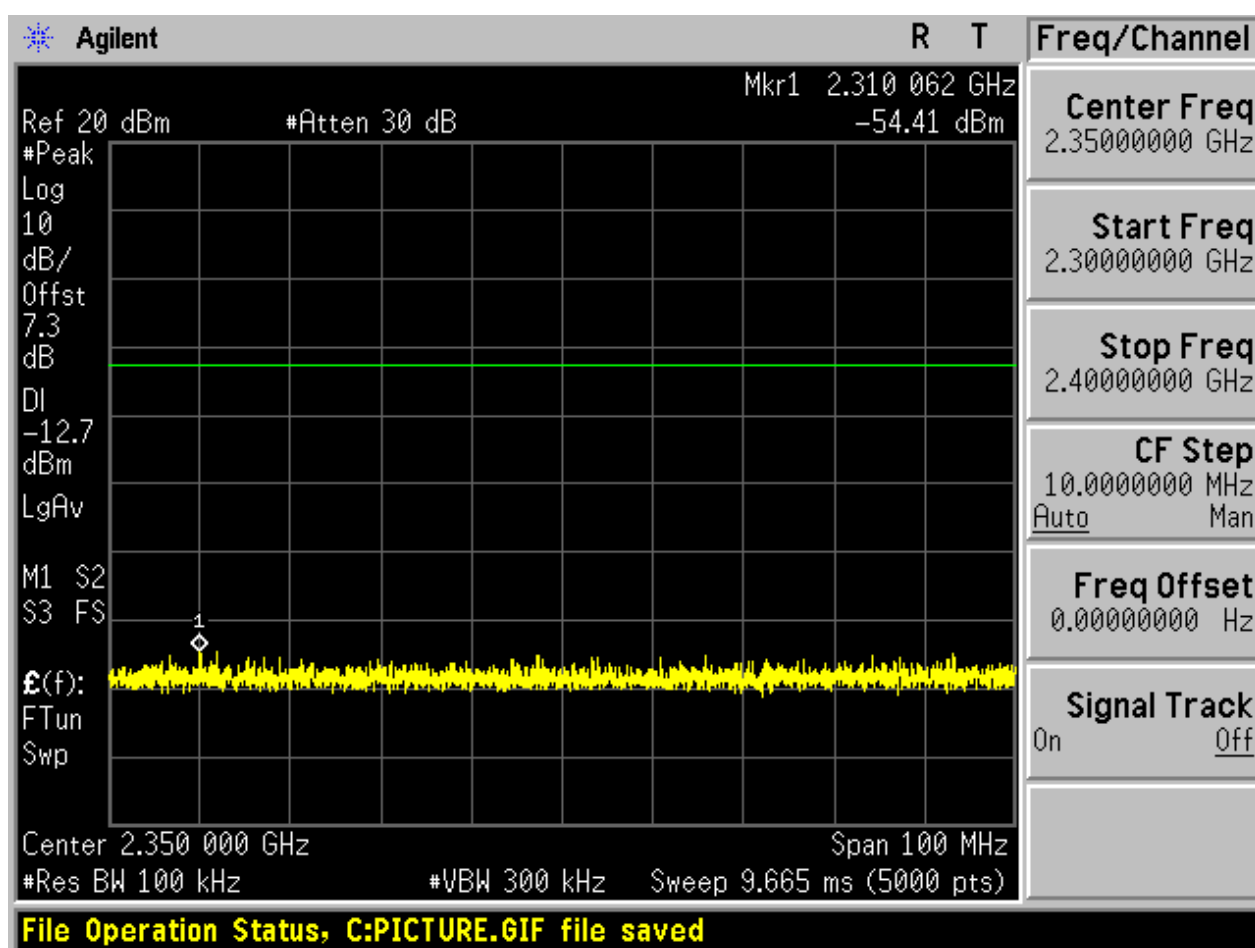


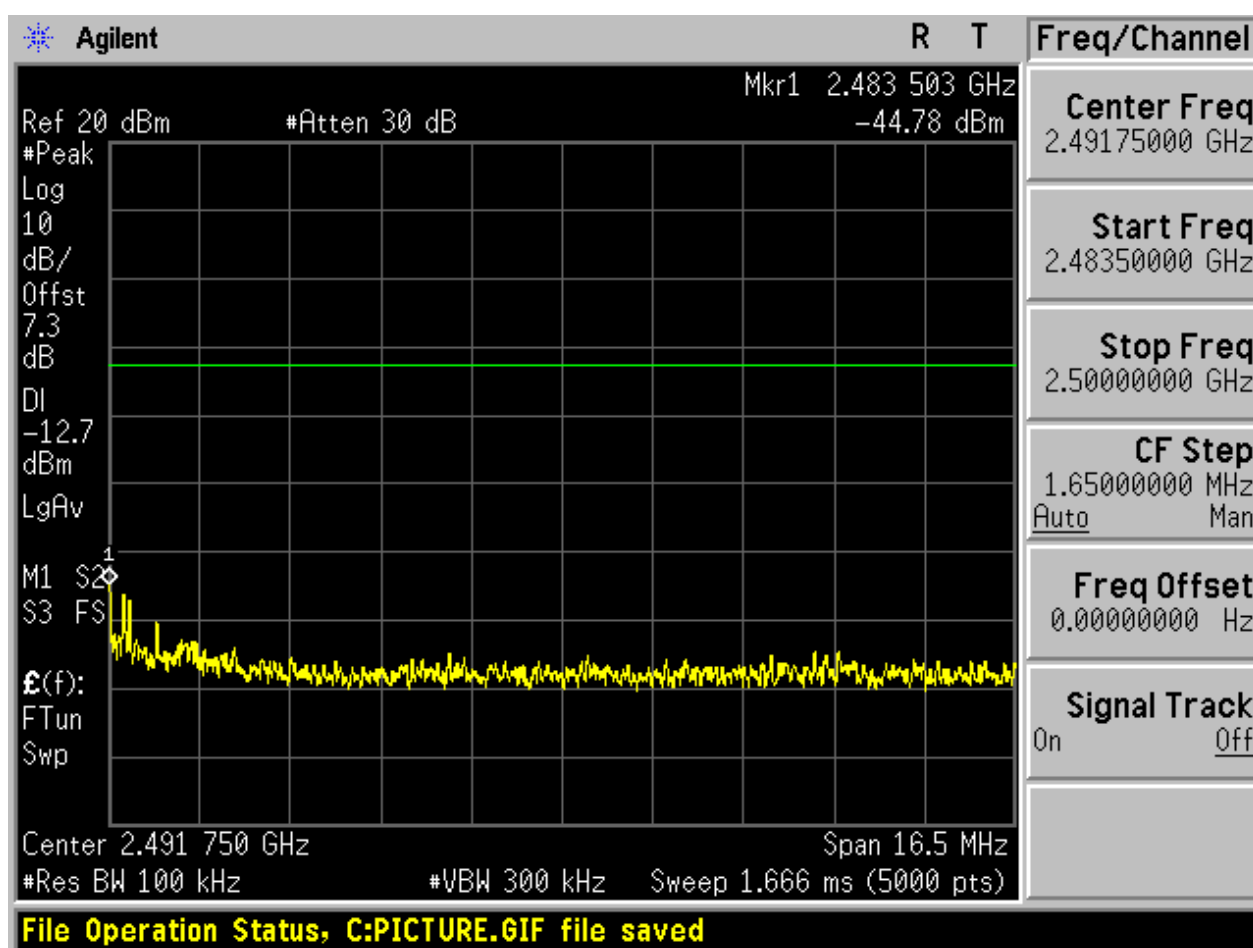

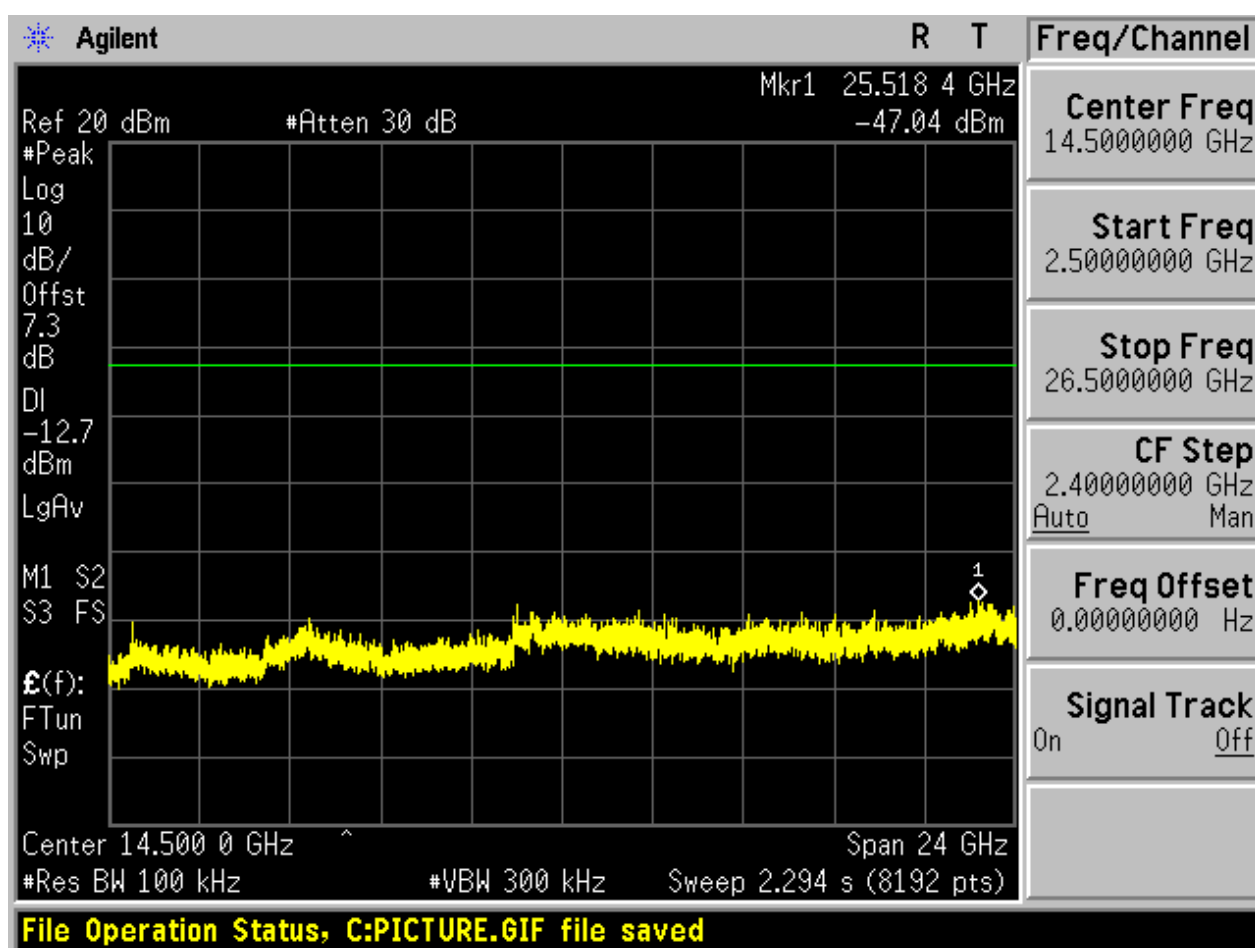



2.4 TM2_2DH5_Ch0


2.4.1 Pref

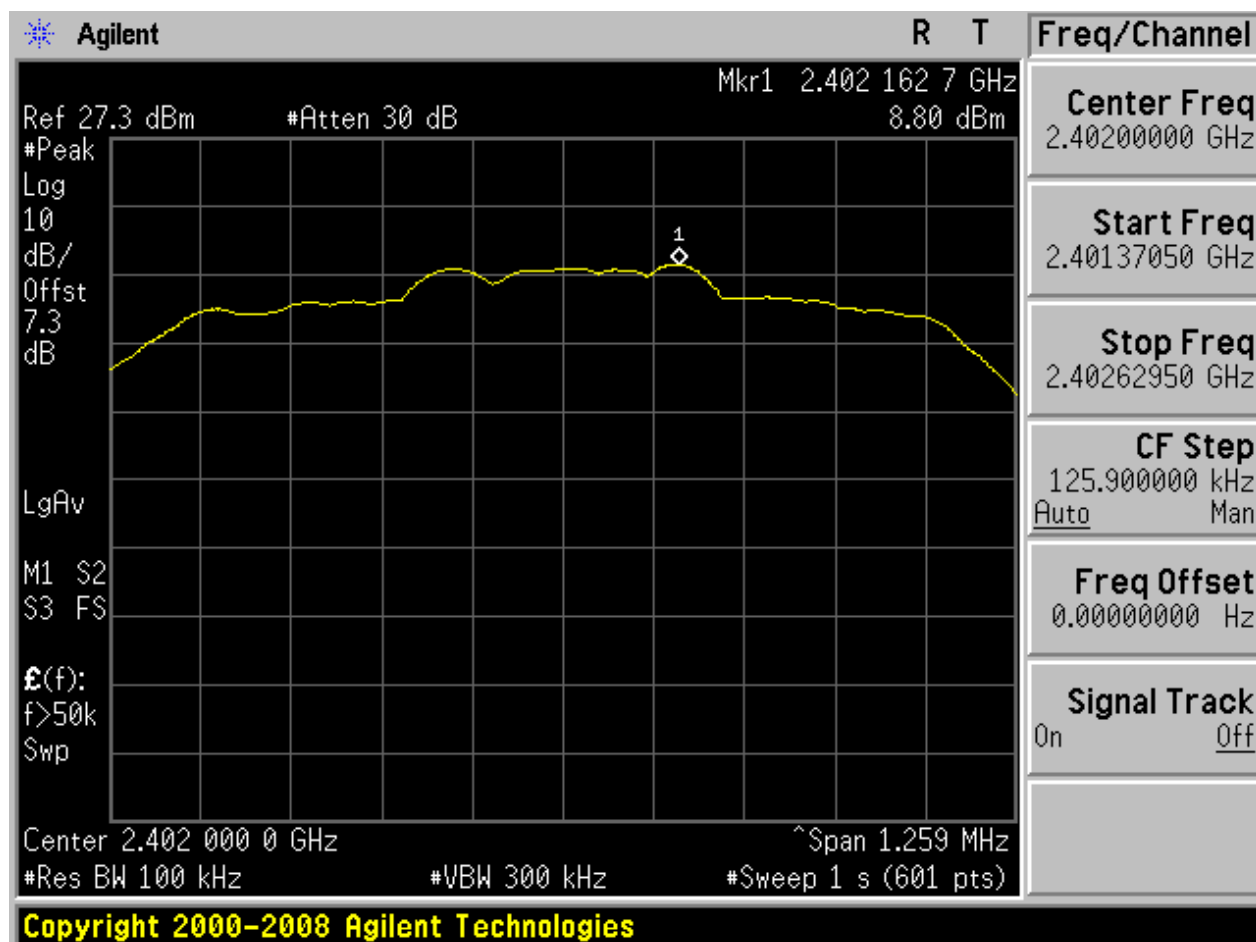



2.4.2 Puw

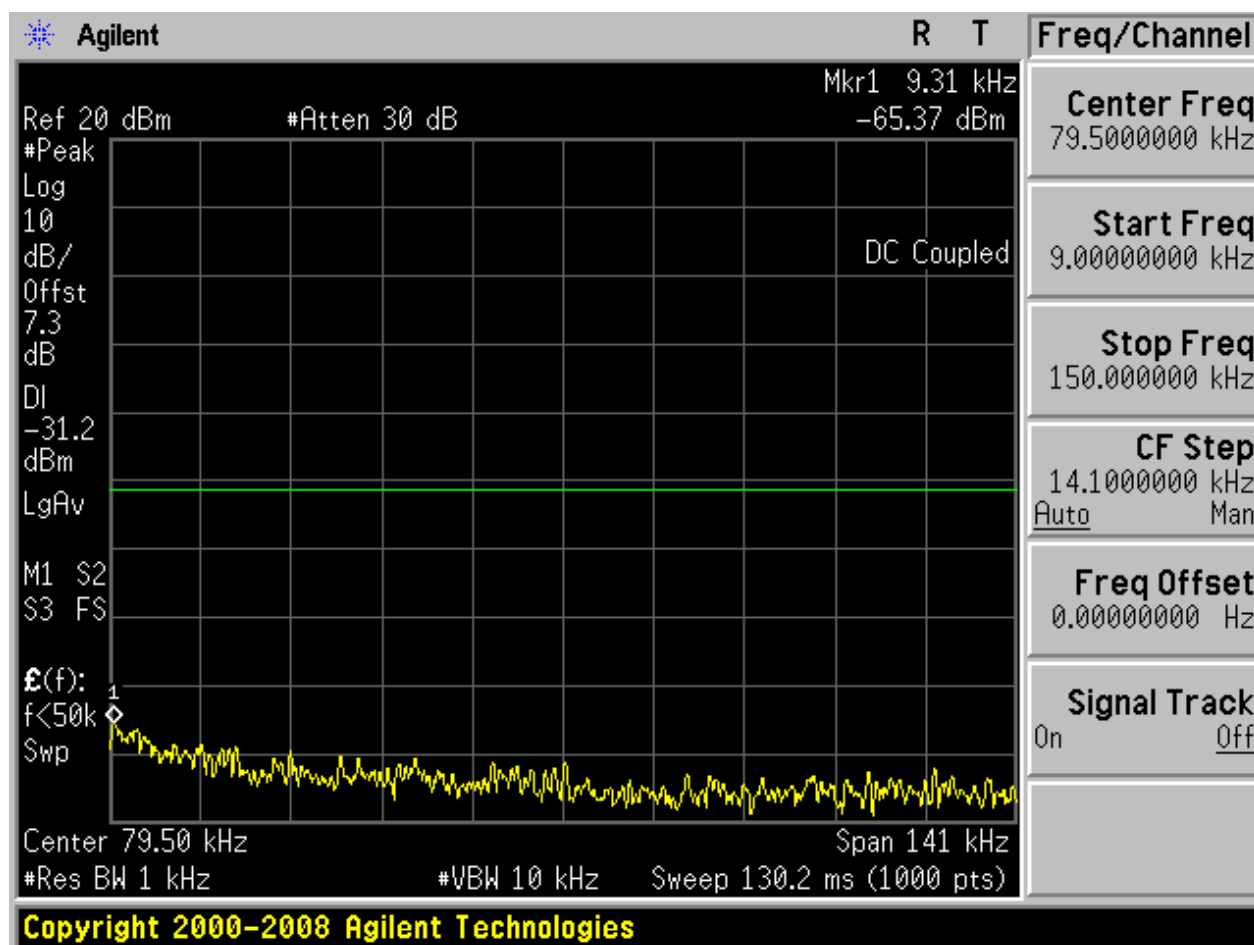


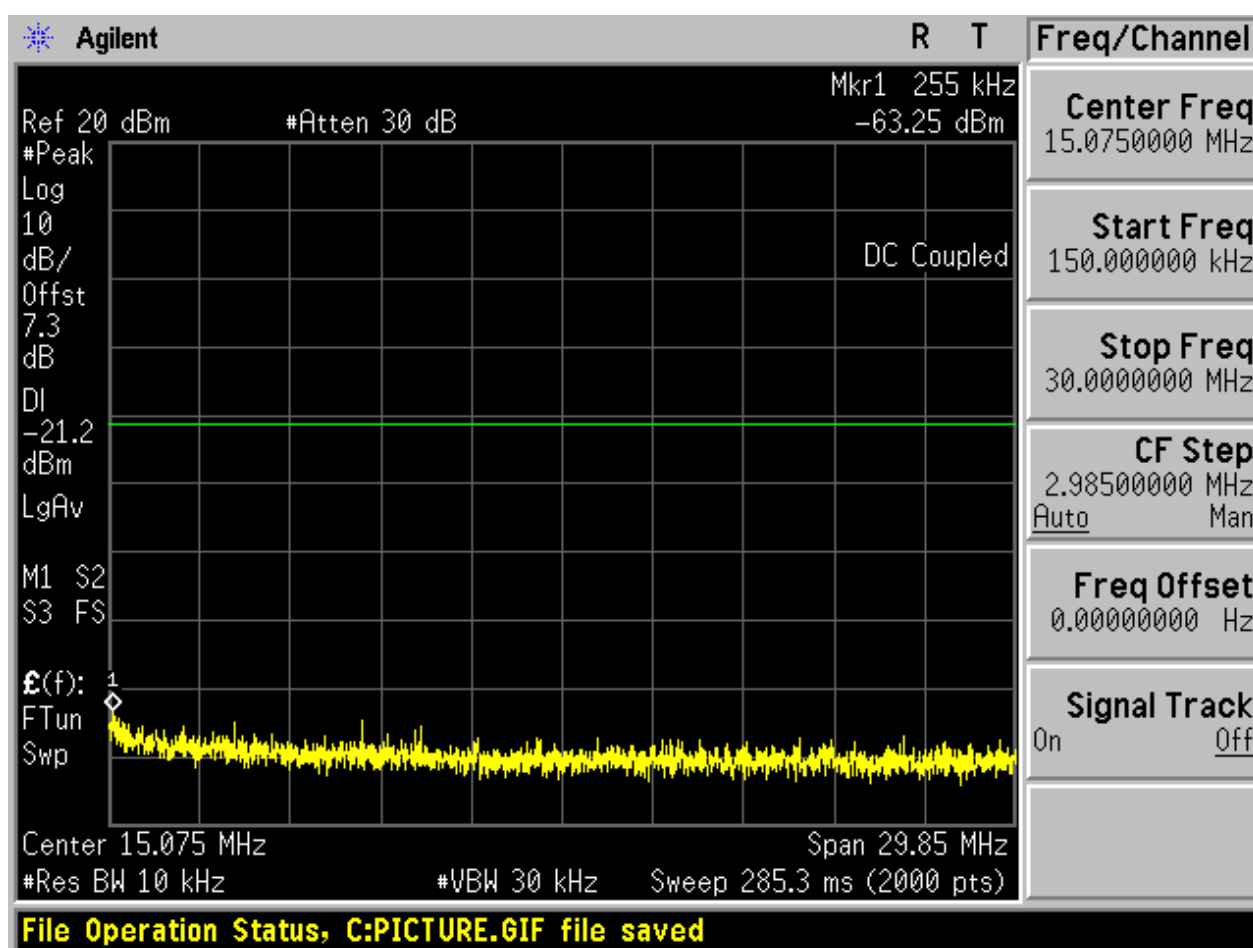

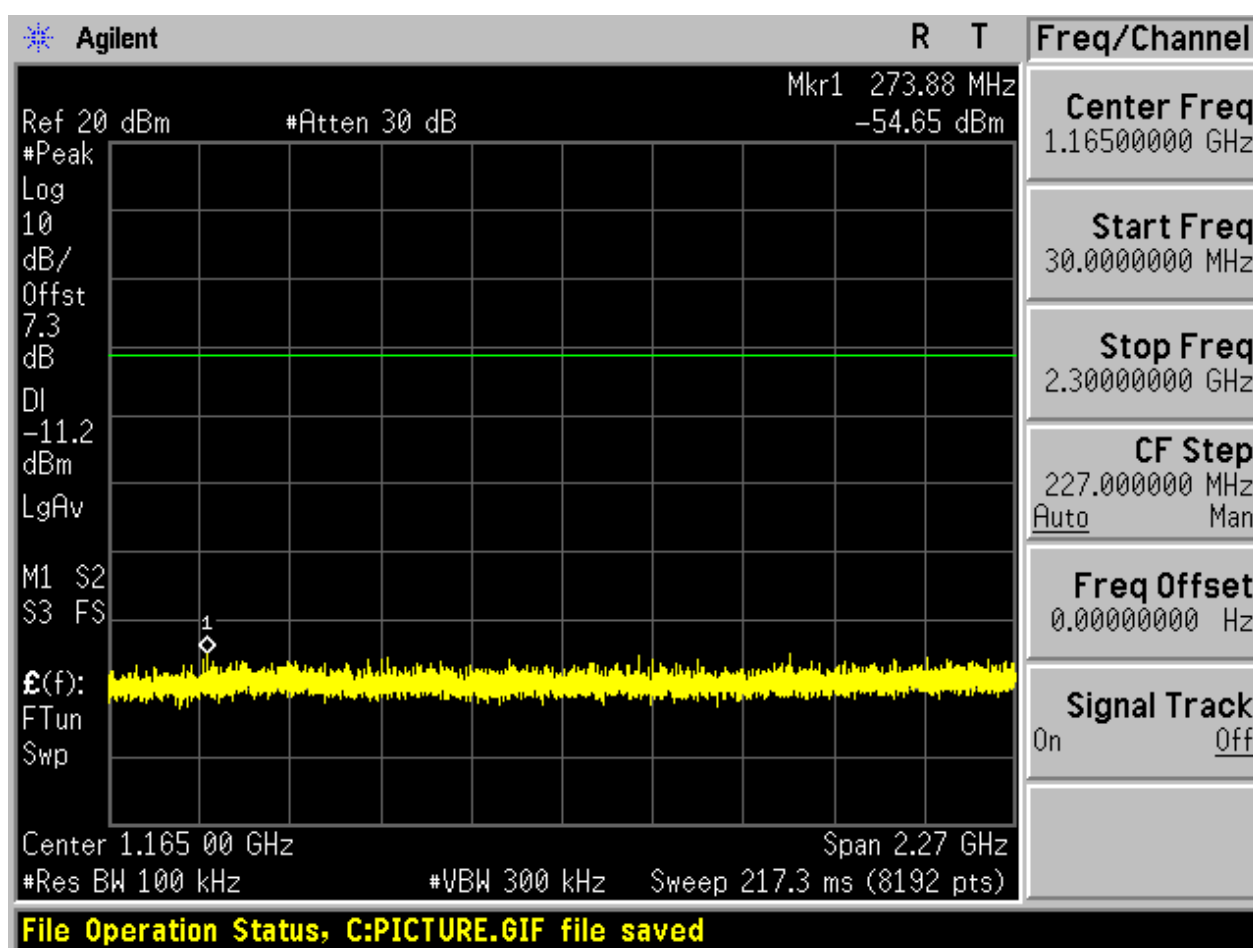

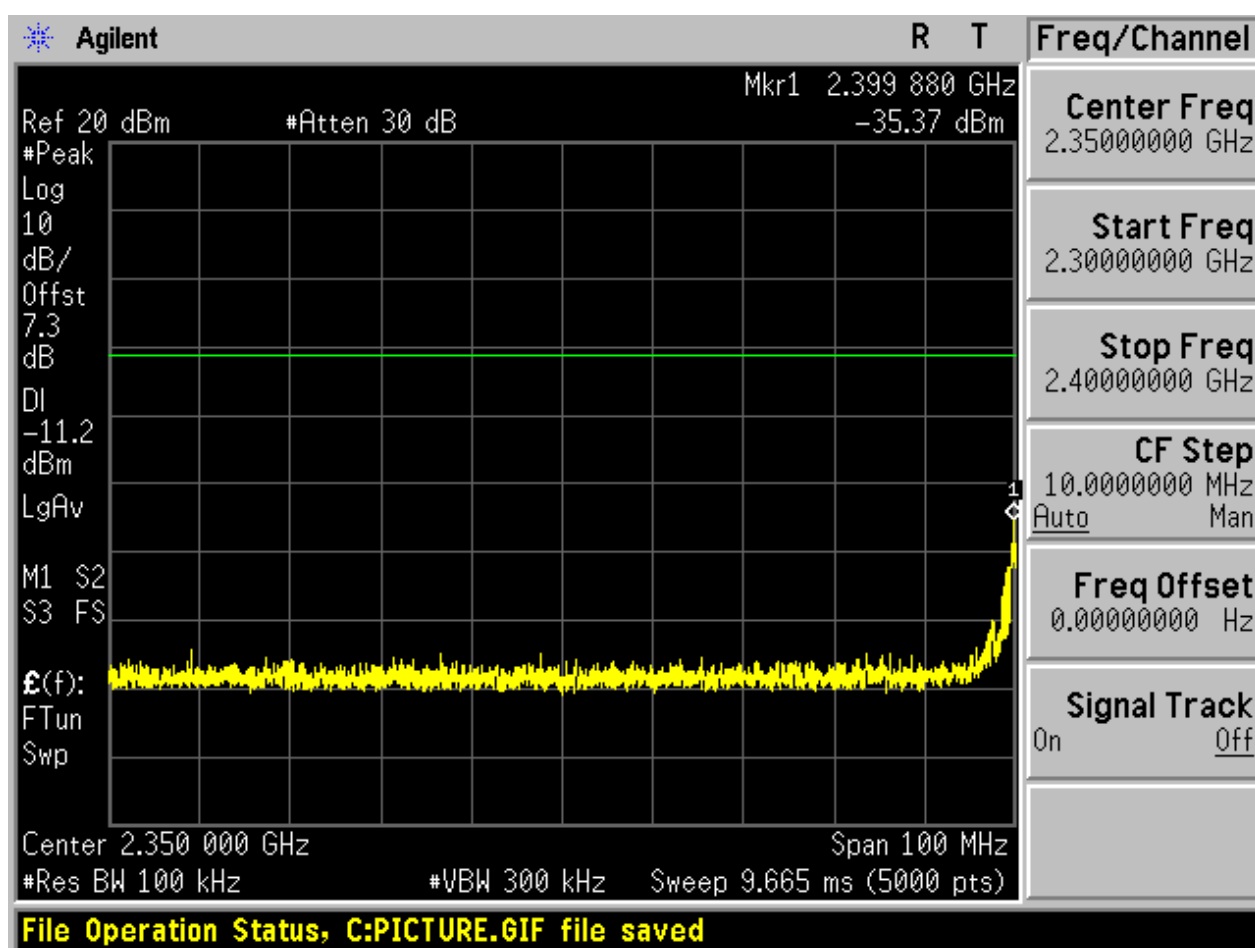


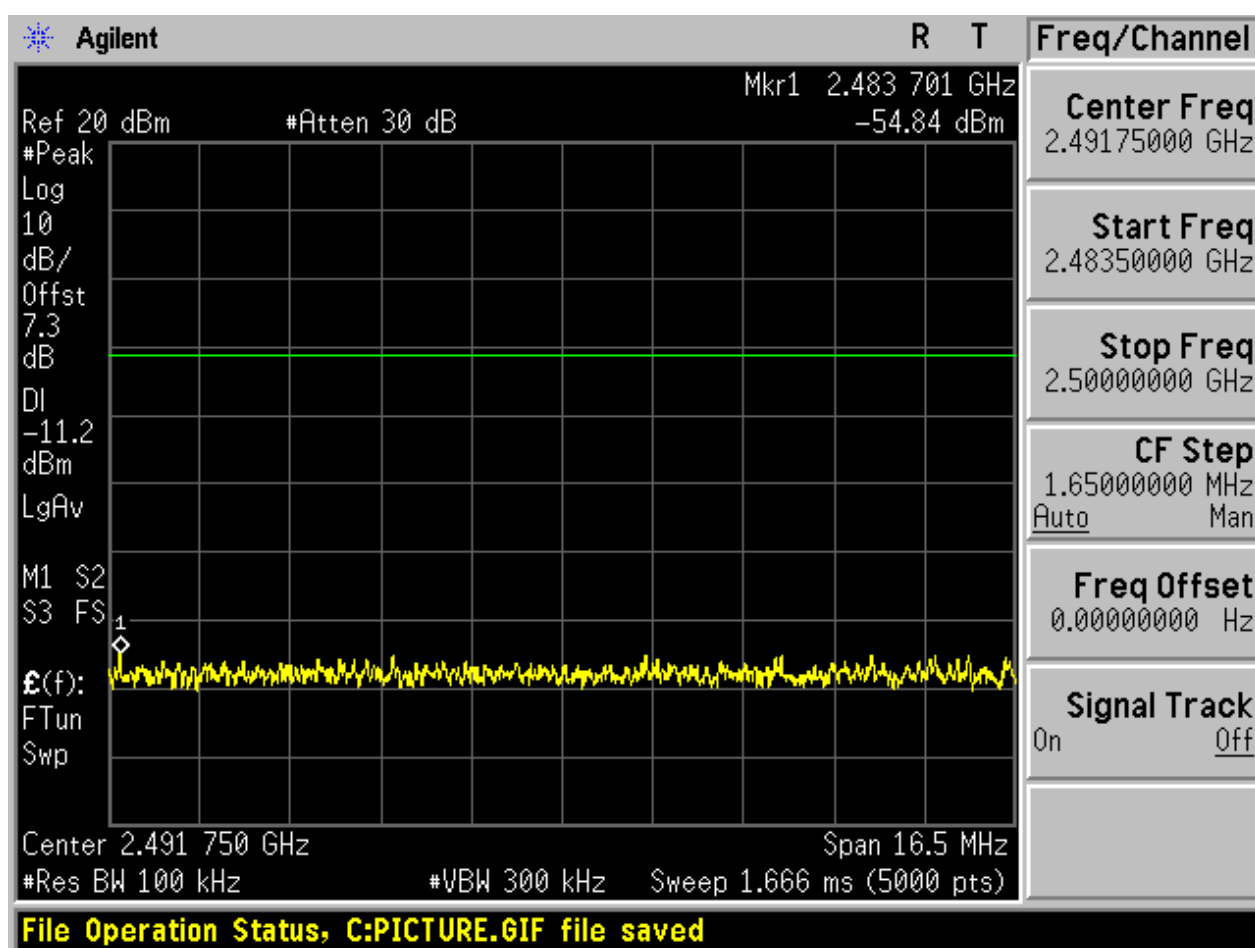

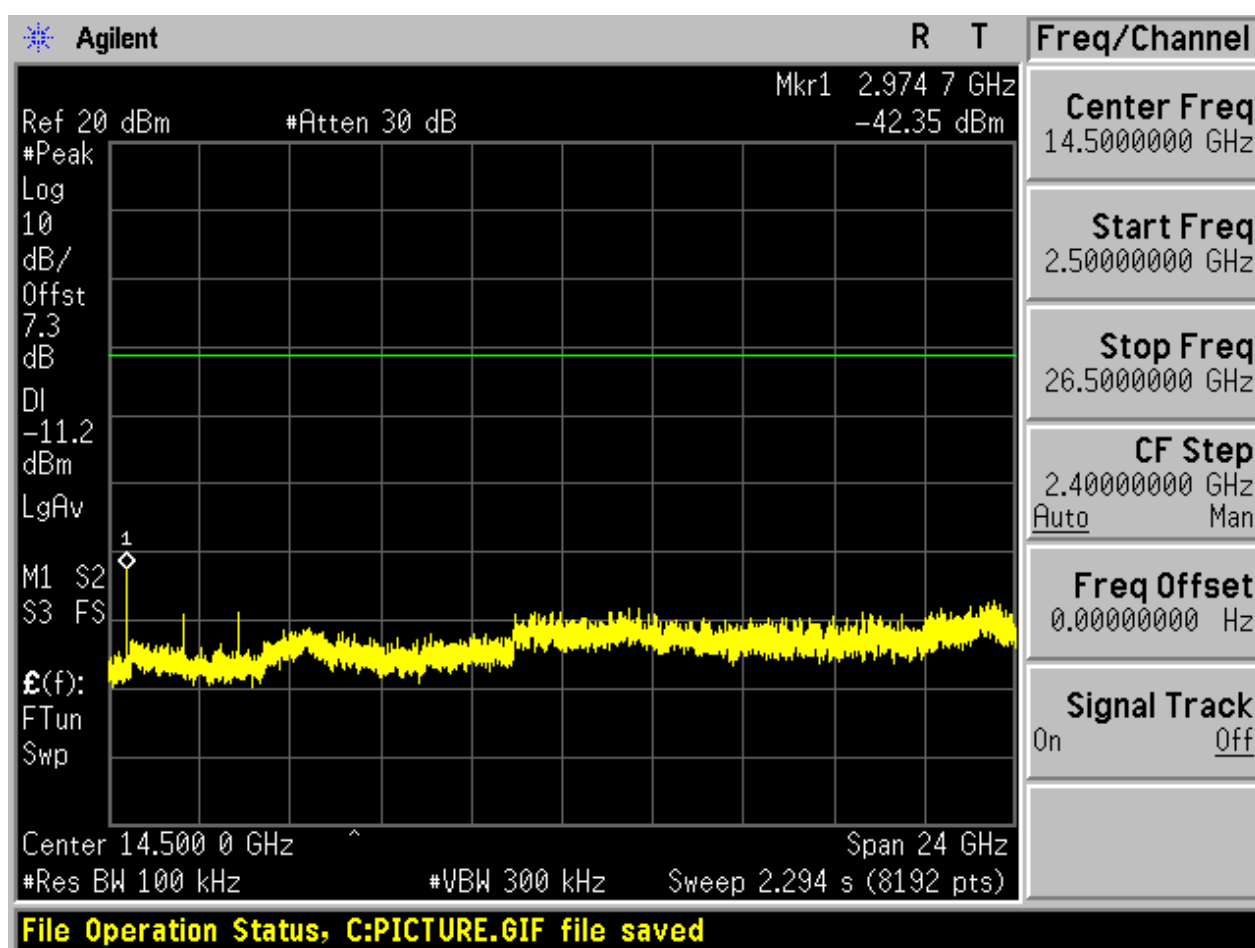



2.5 TM2_2DH5_Ch39


2.5.1 Pref

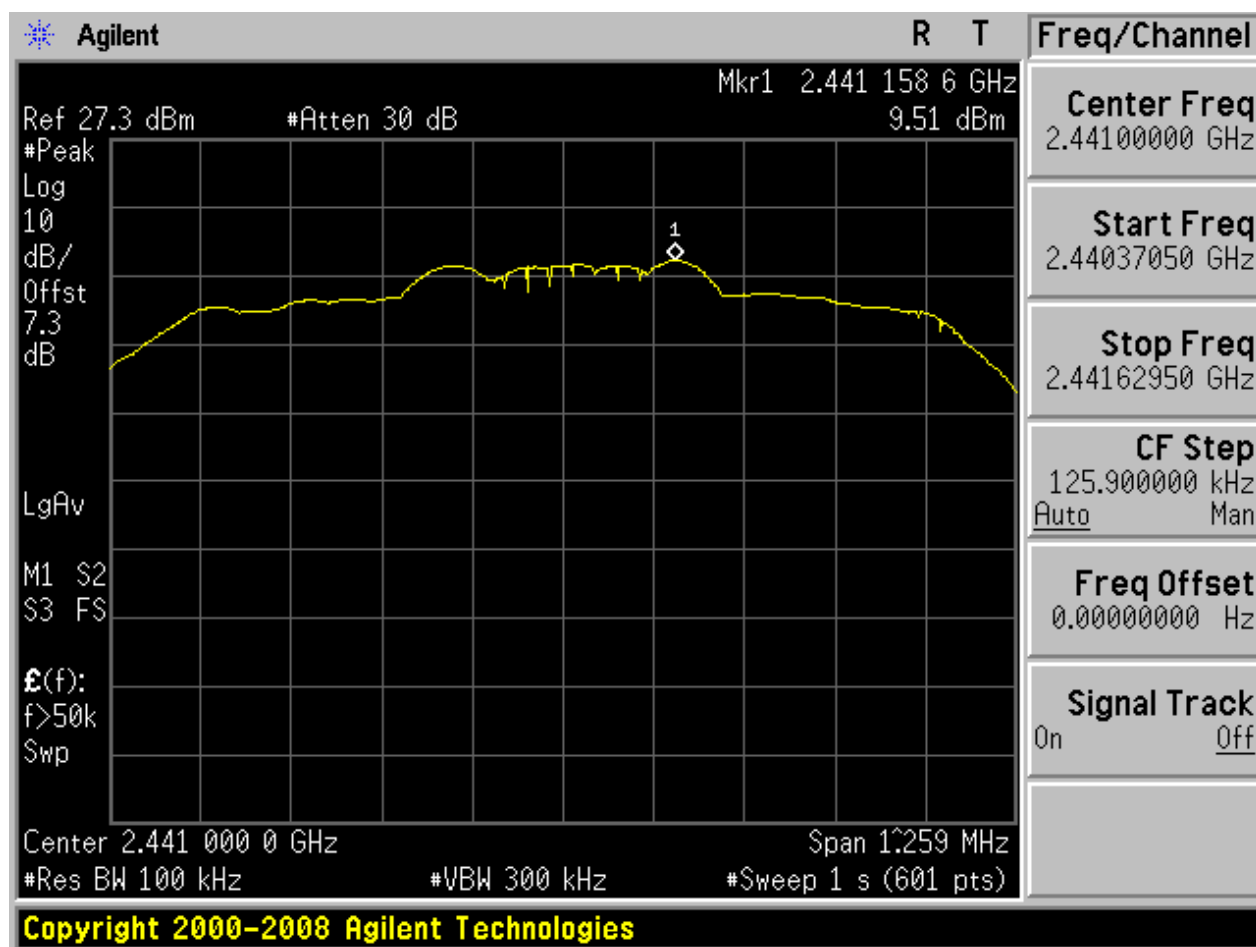



2.5.2 Puw

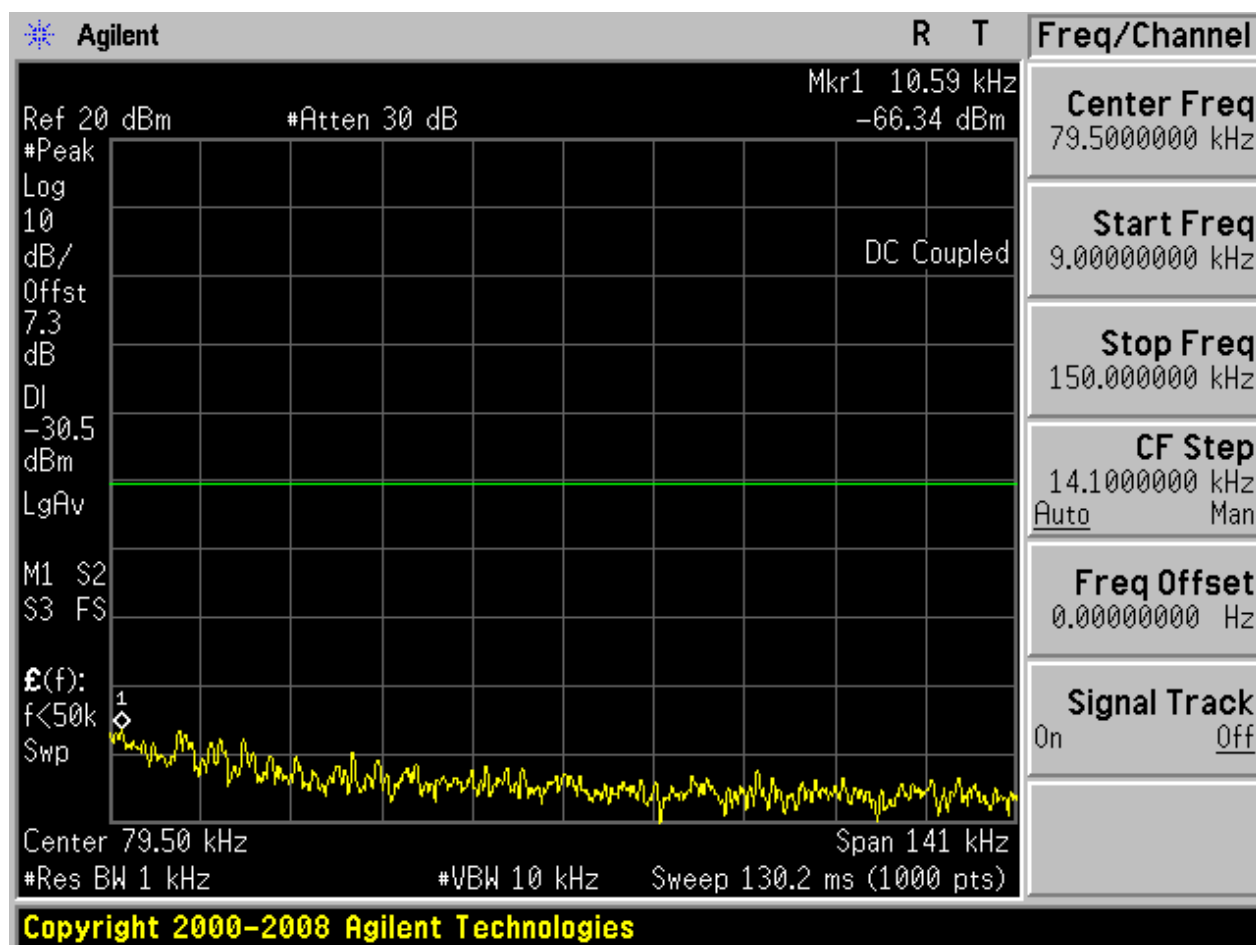


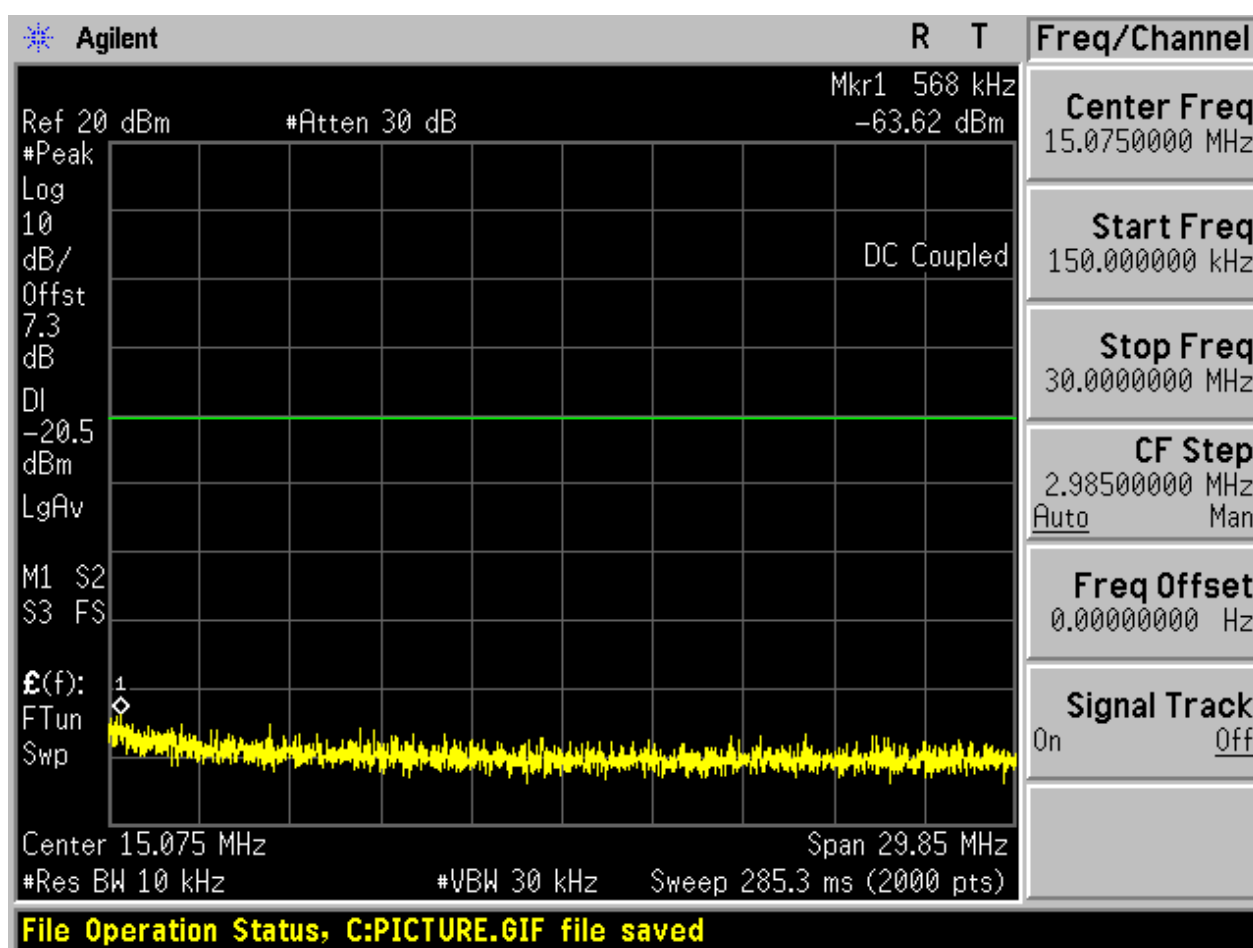

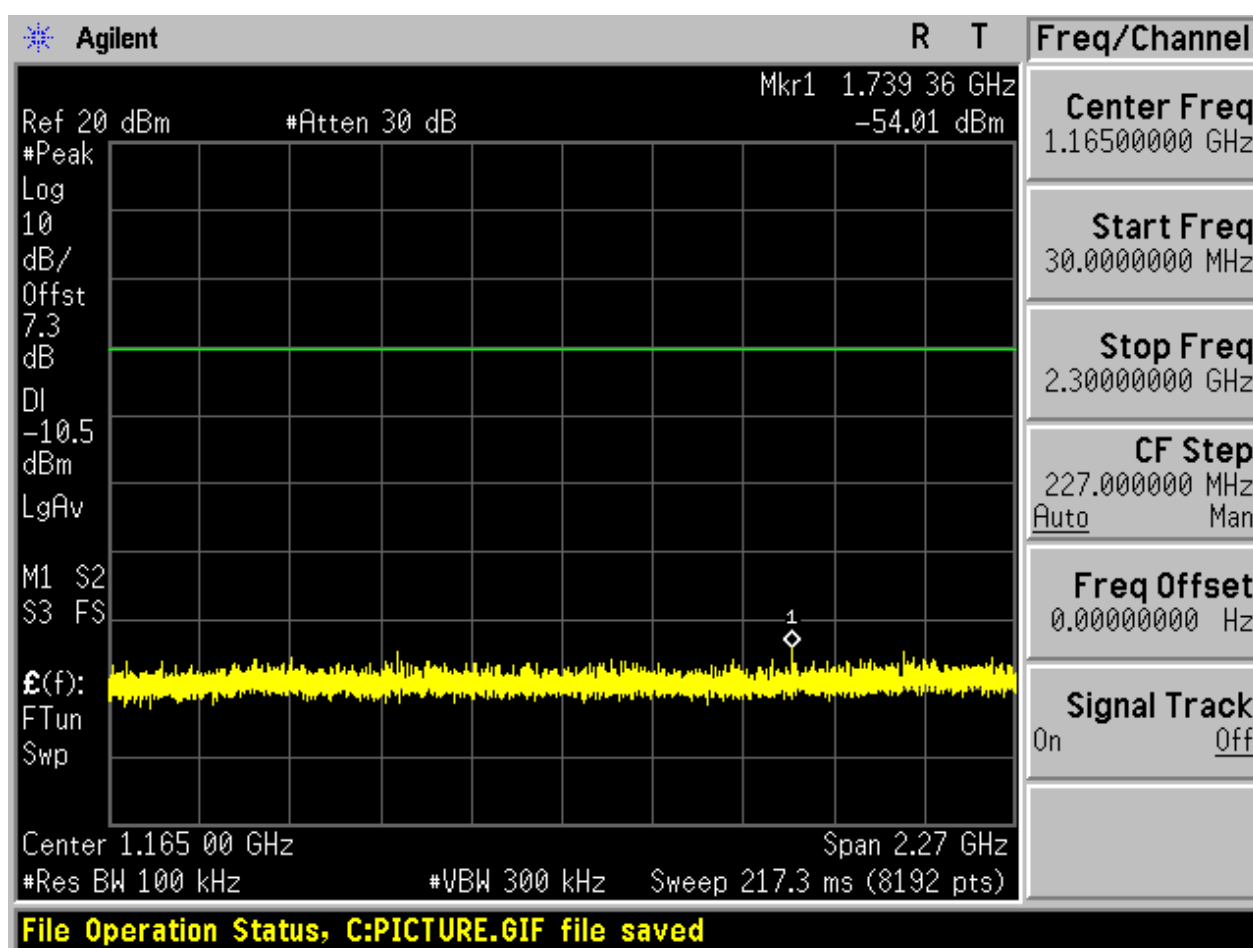

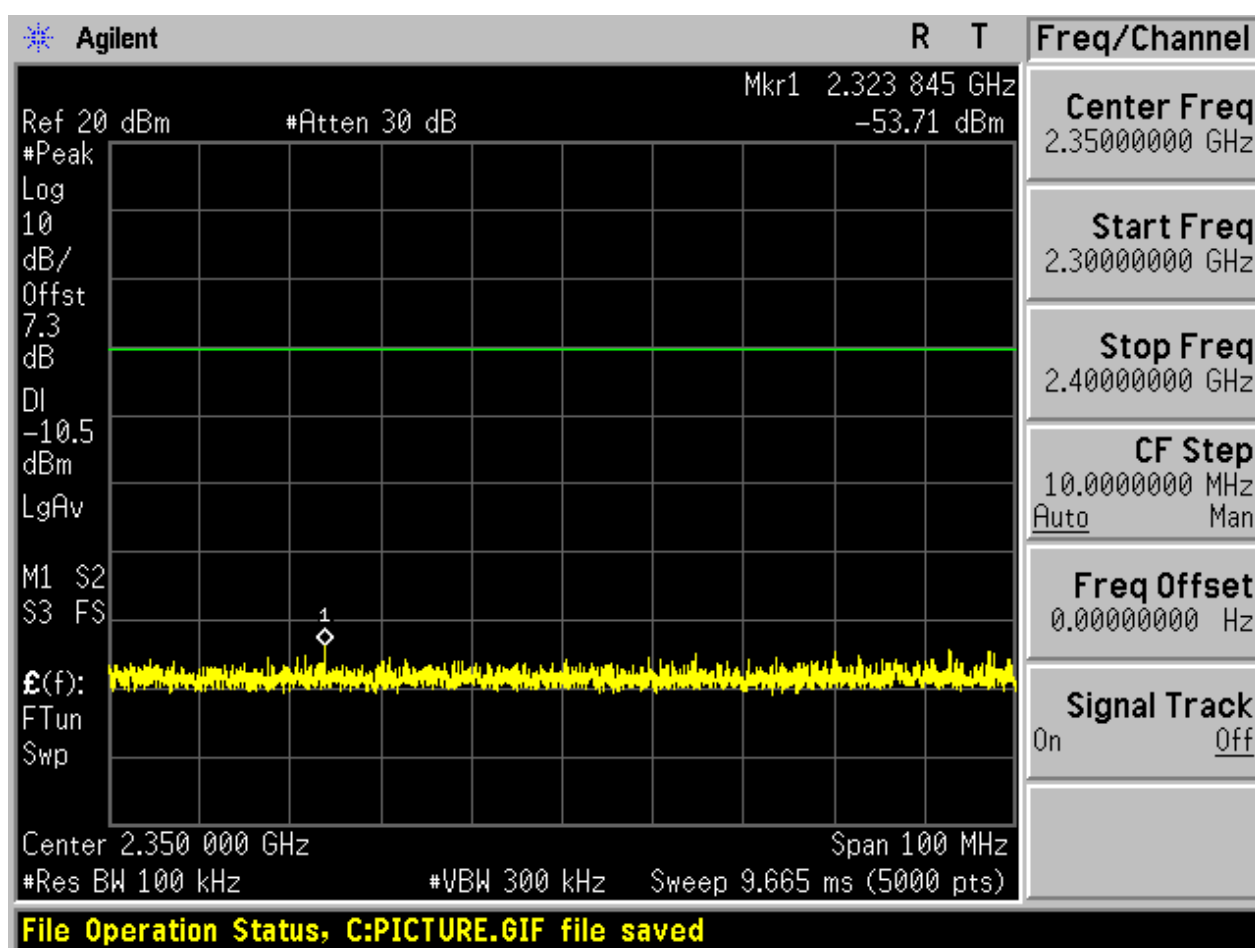


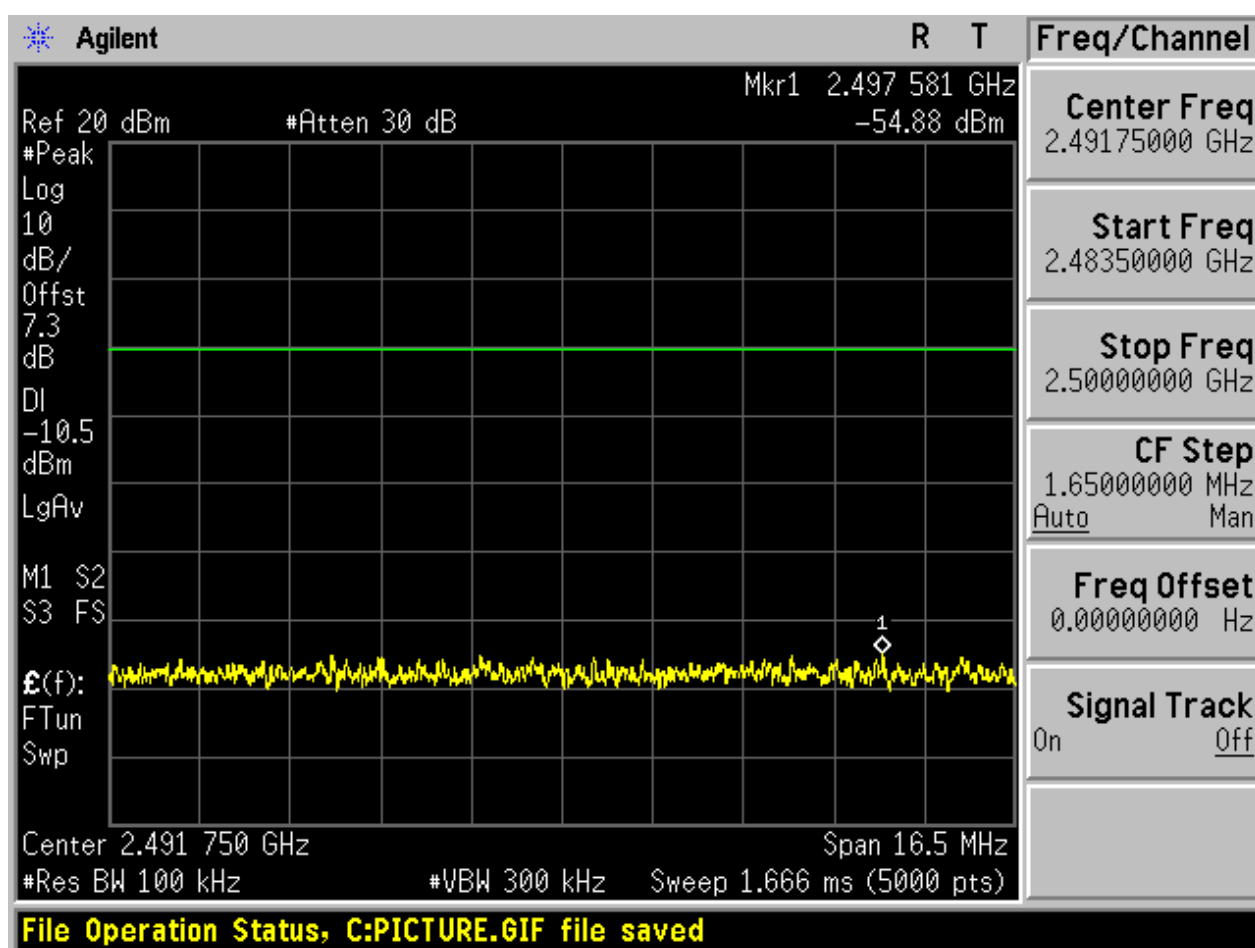

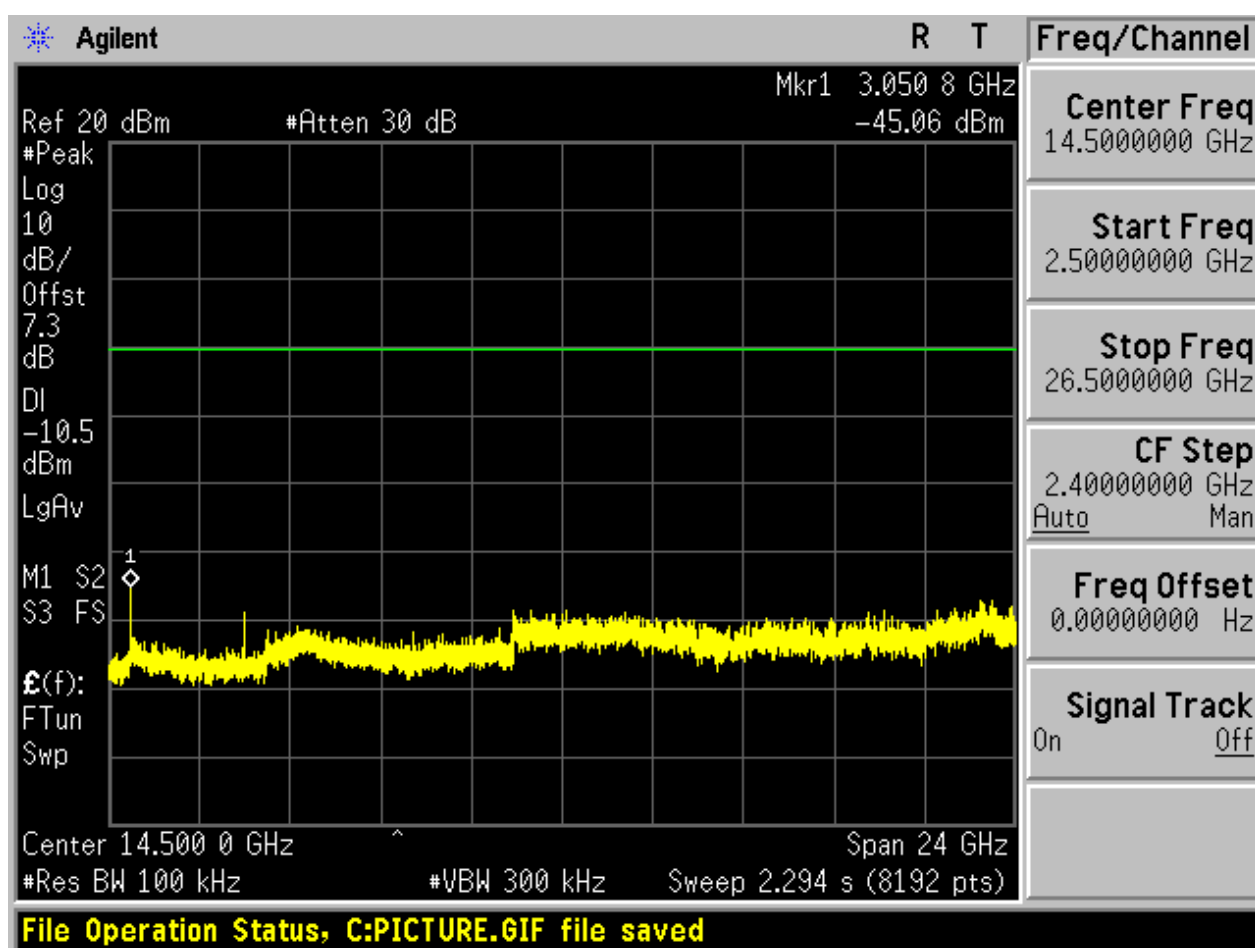



2.6 TM2_2DH5_Ch78


2.6.1 Pref

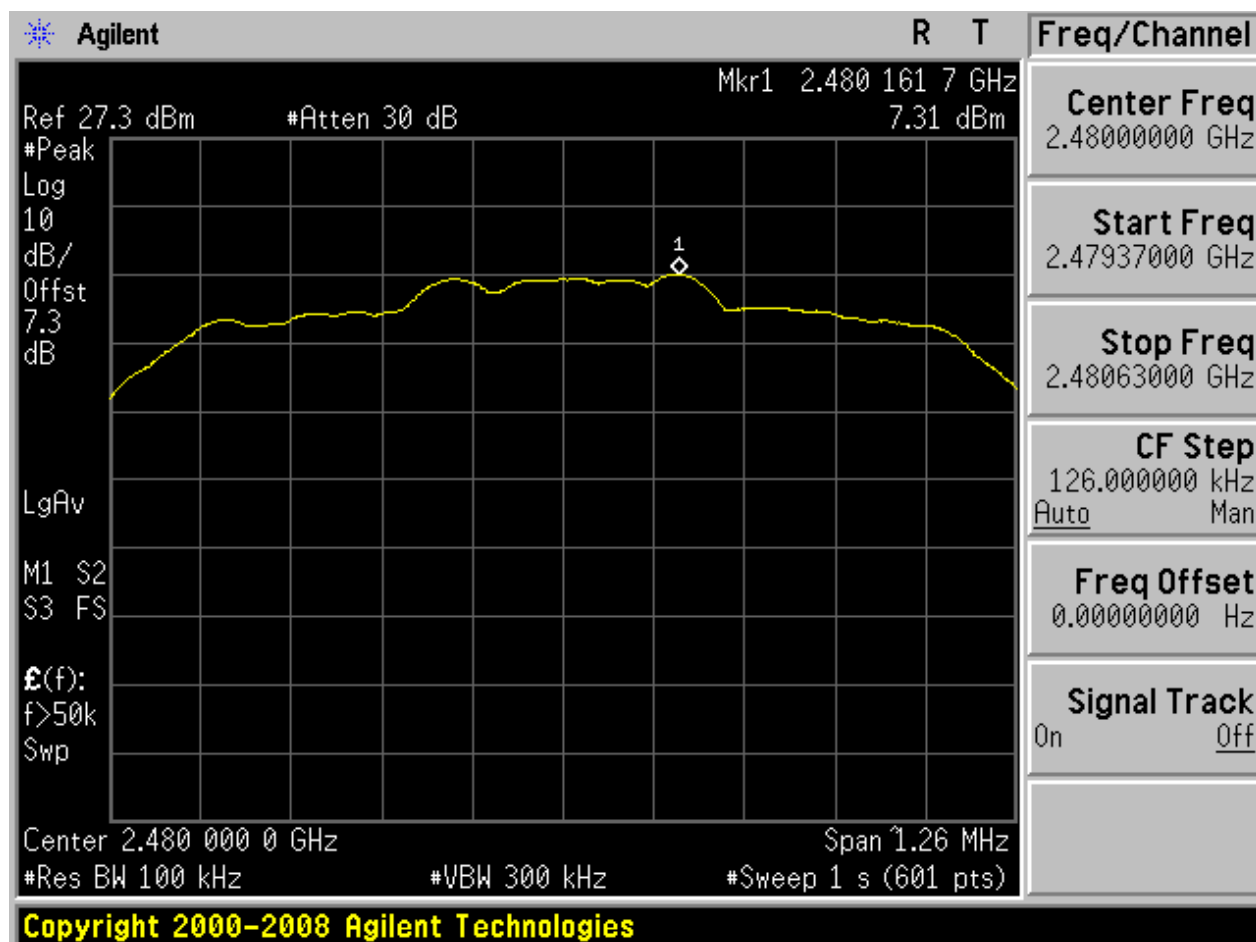



2.6.2 Puw

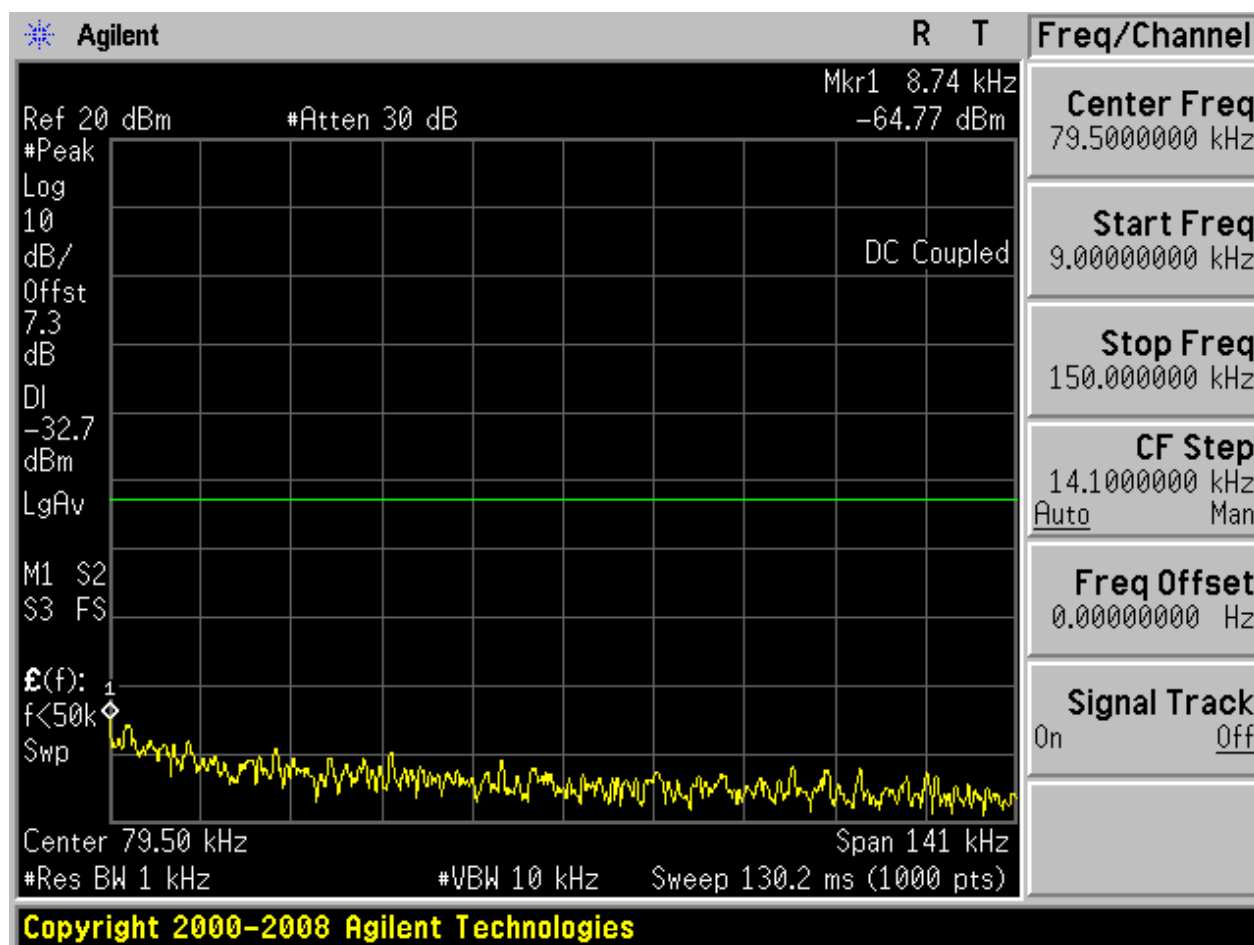


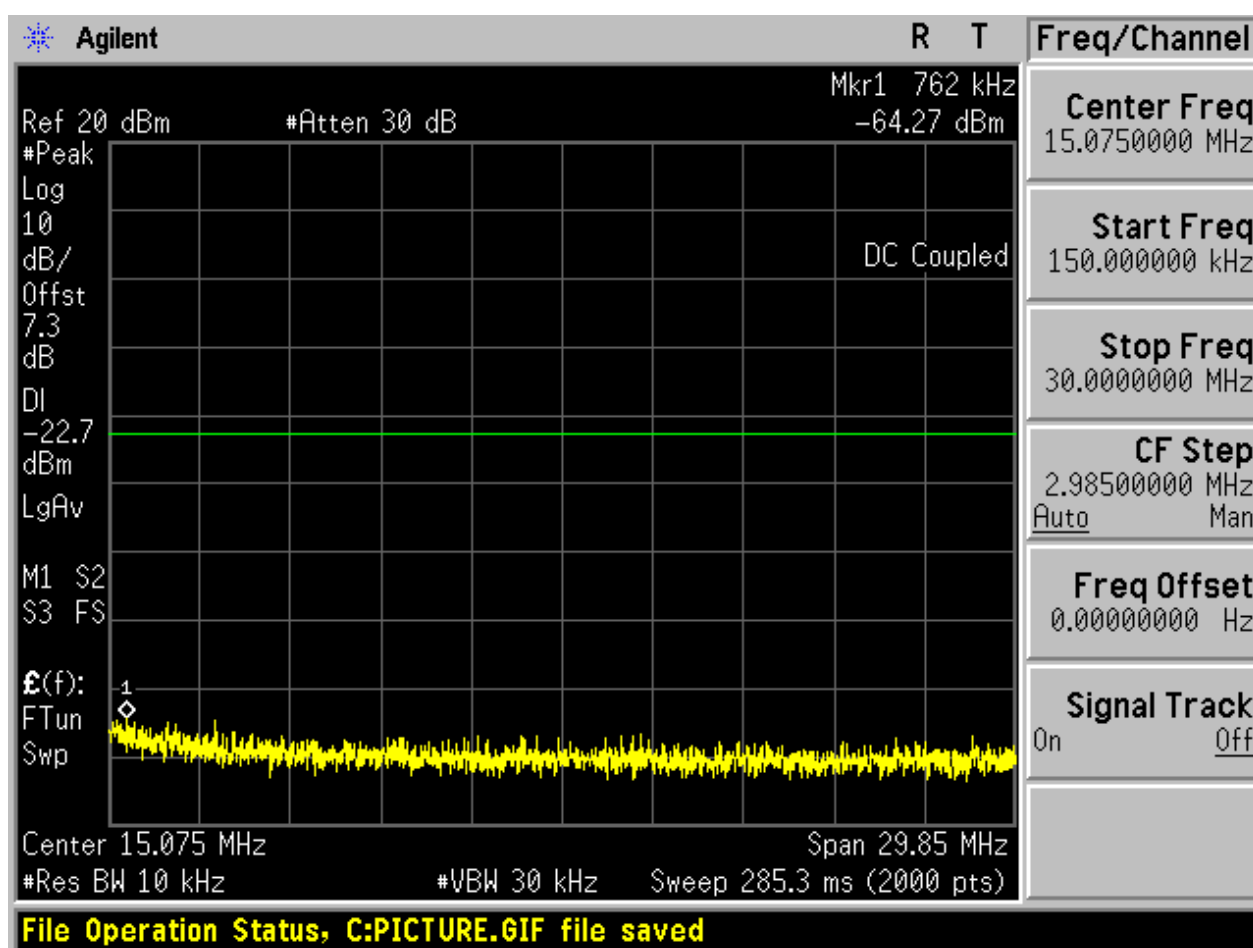

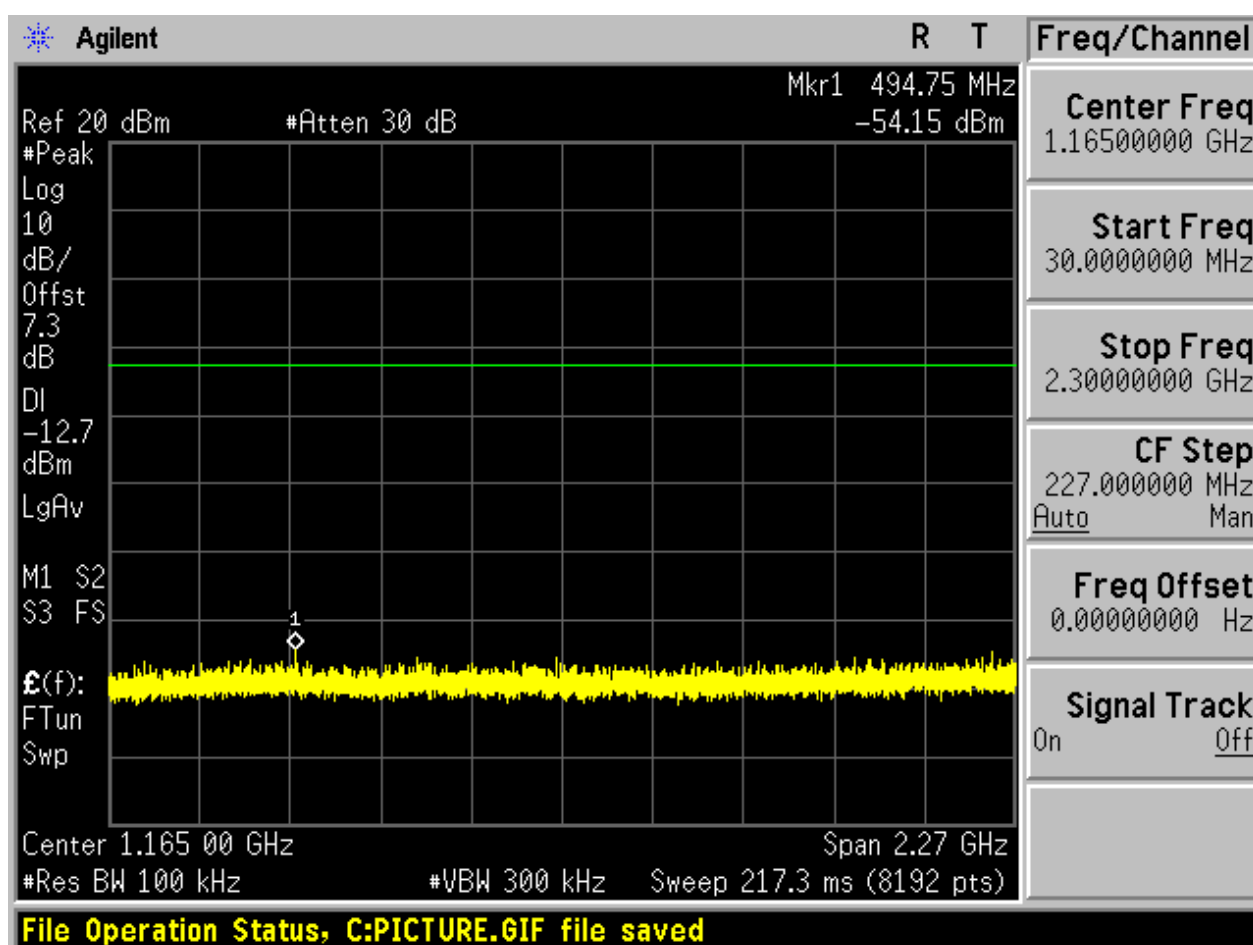

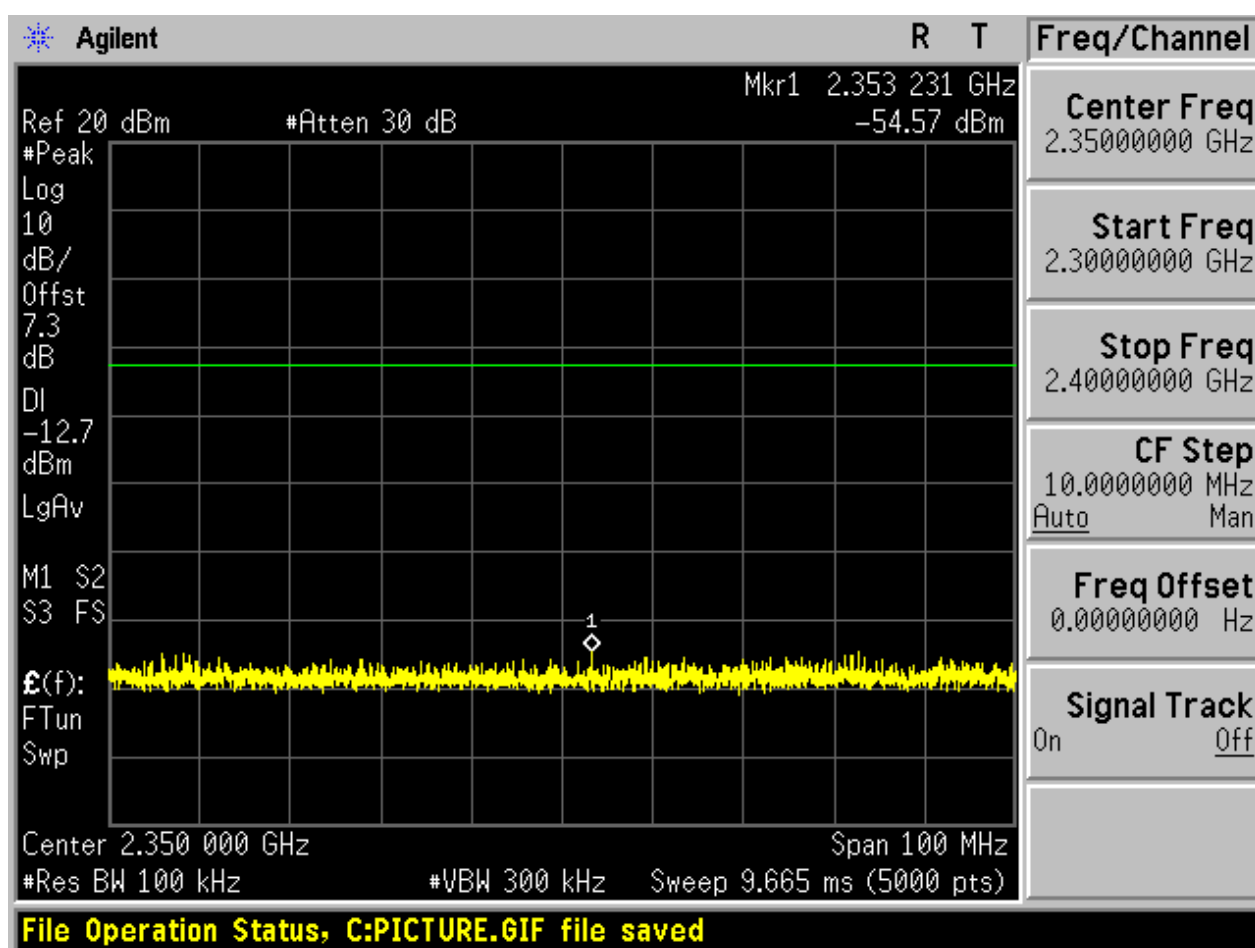


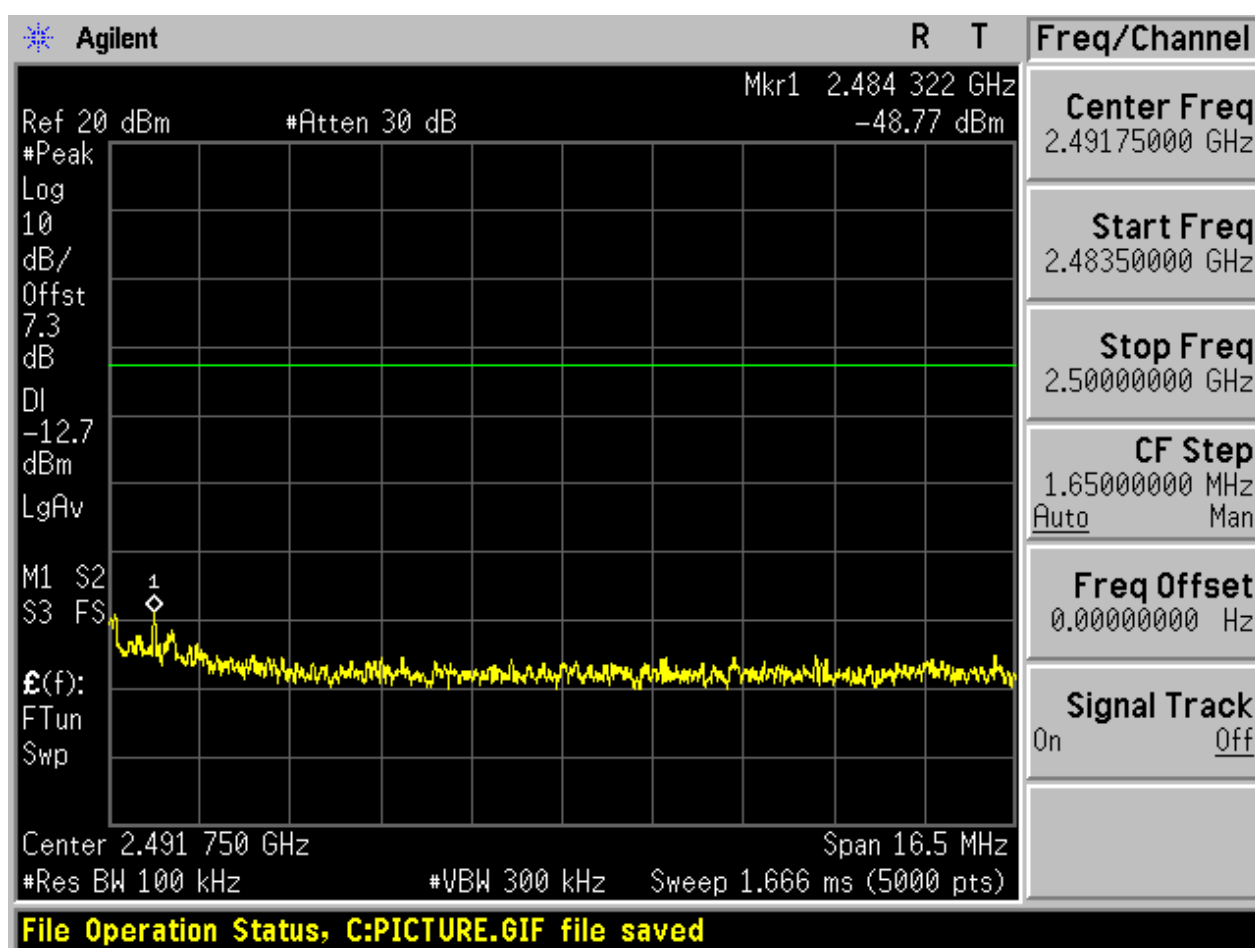

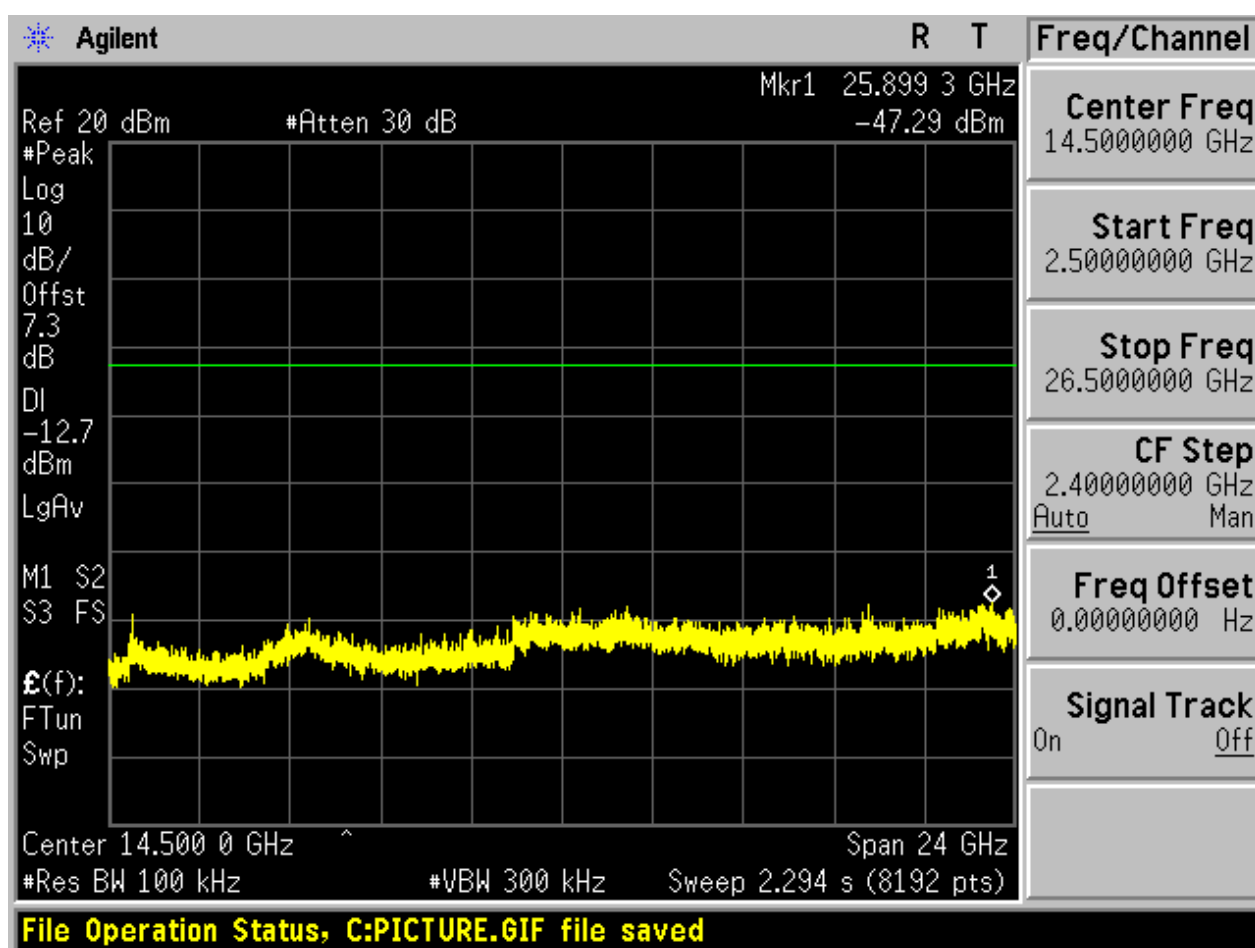



2.7 TM3_3DH5_Ch0


2.7.1 Pref

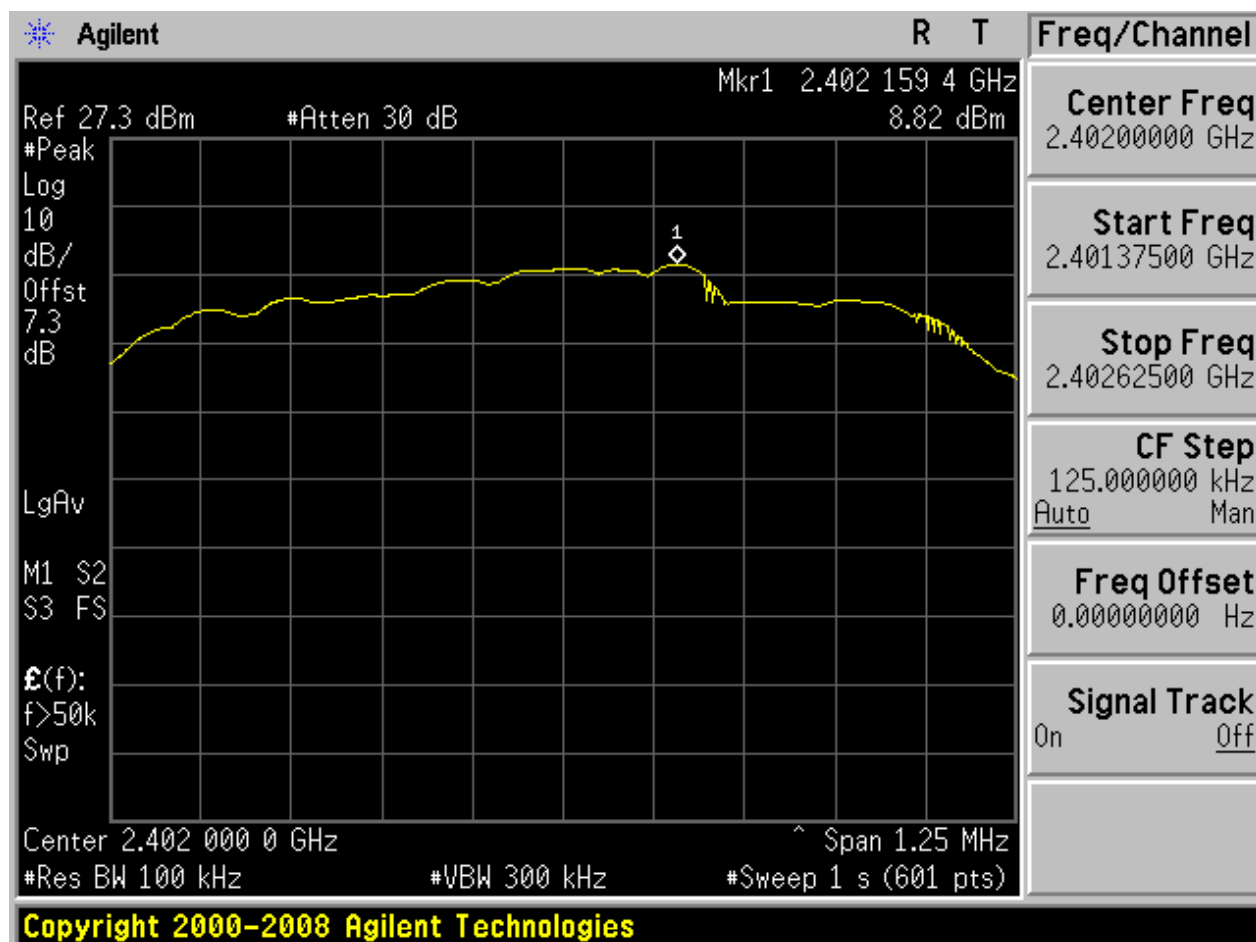



2.7.2 Puw

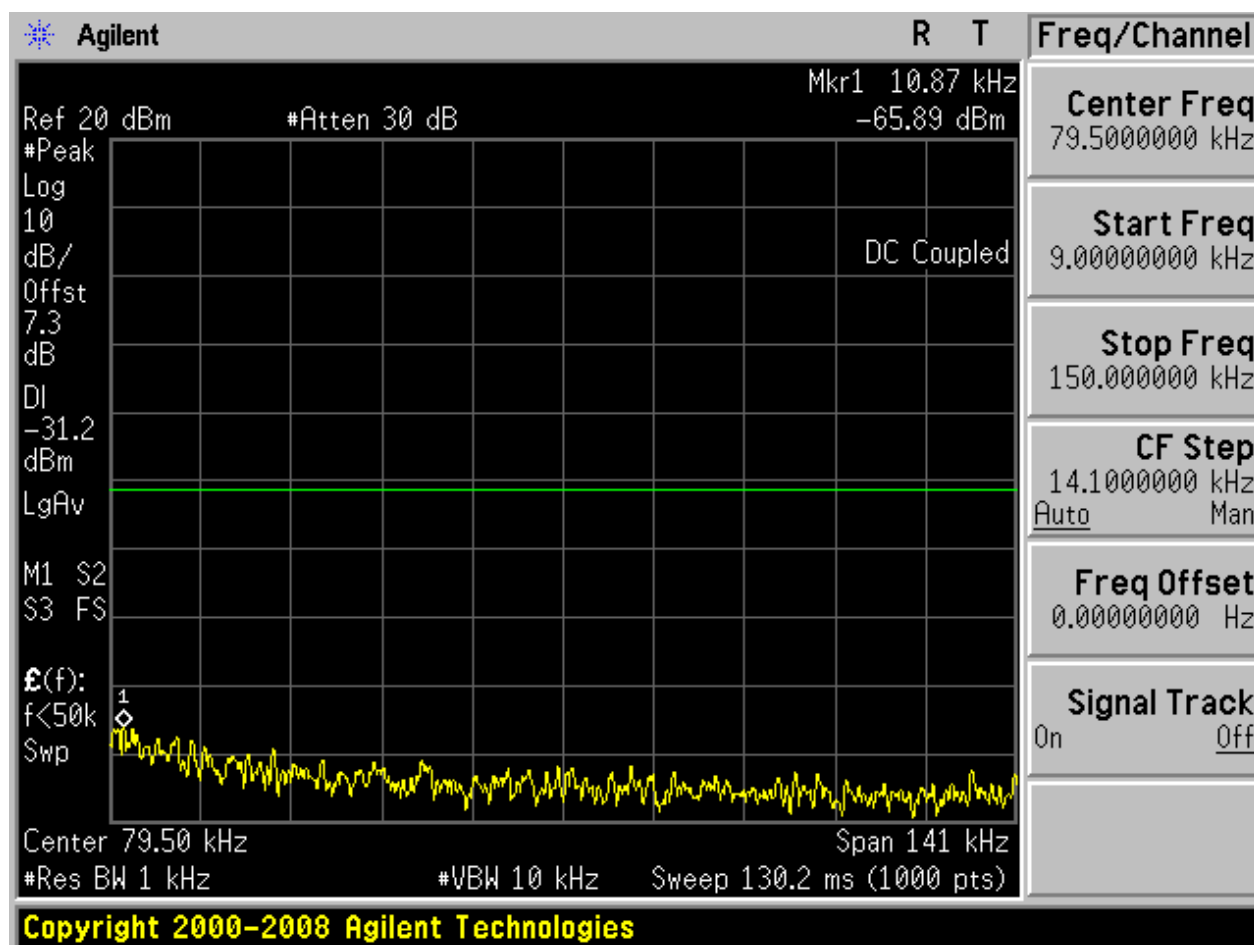


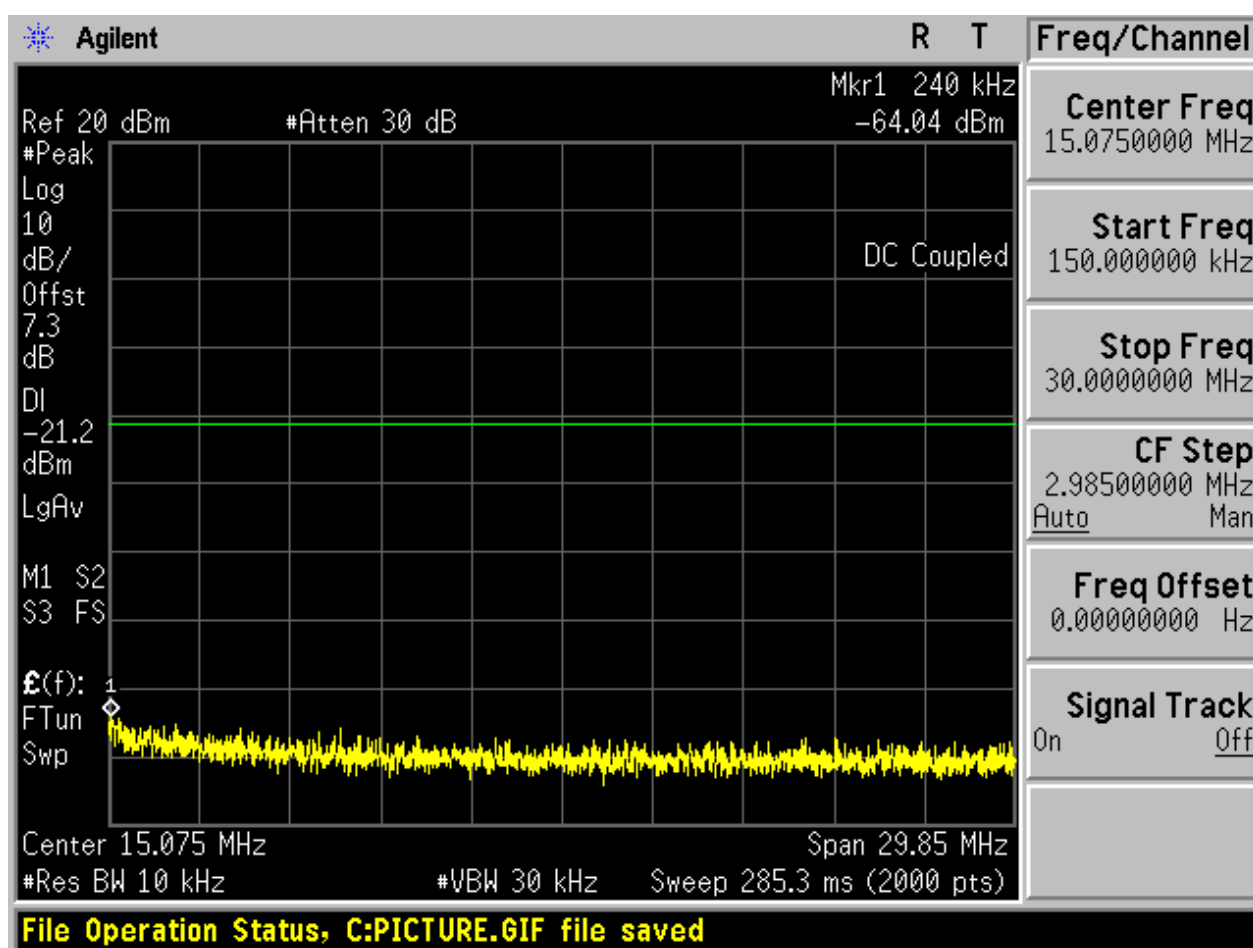

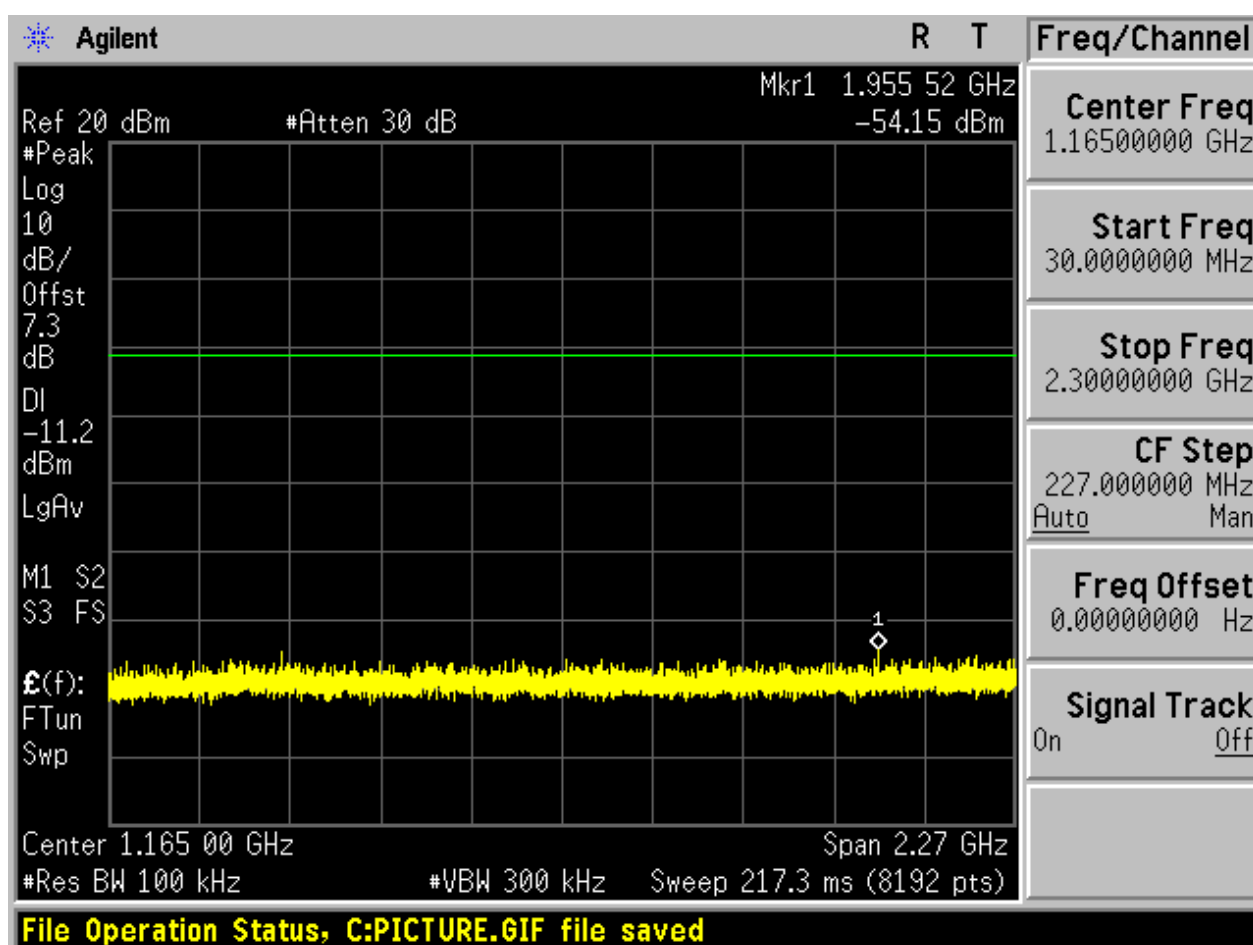

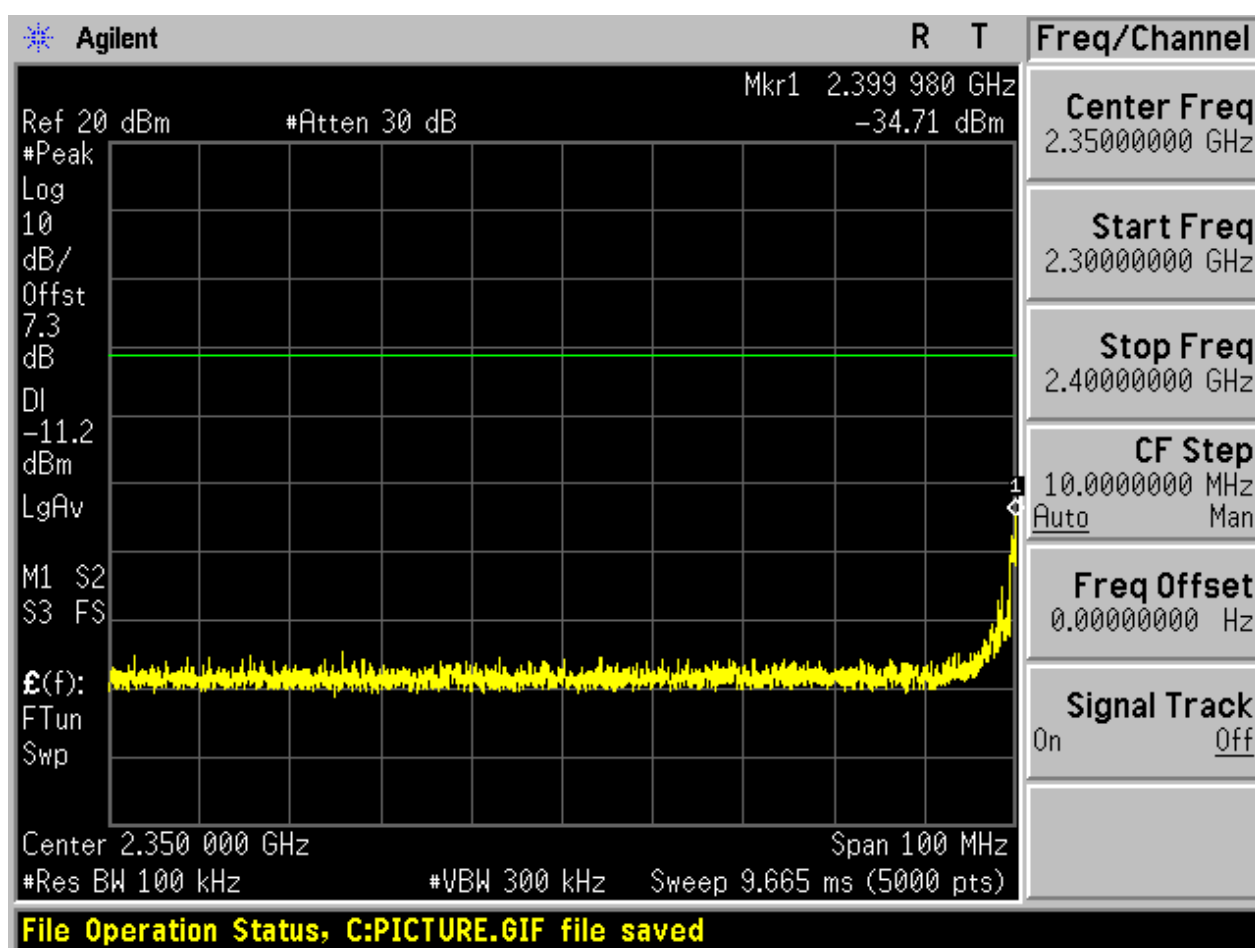


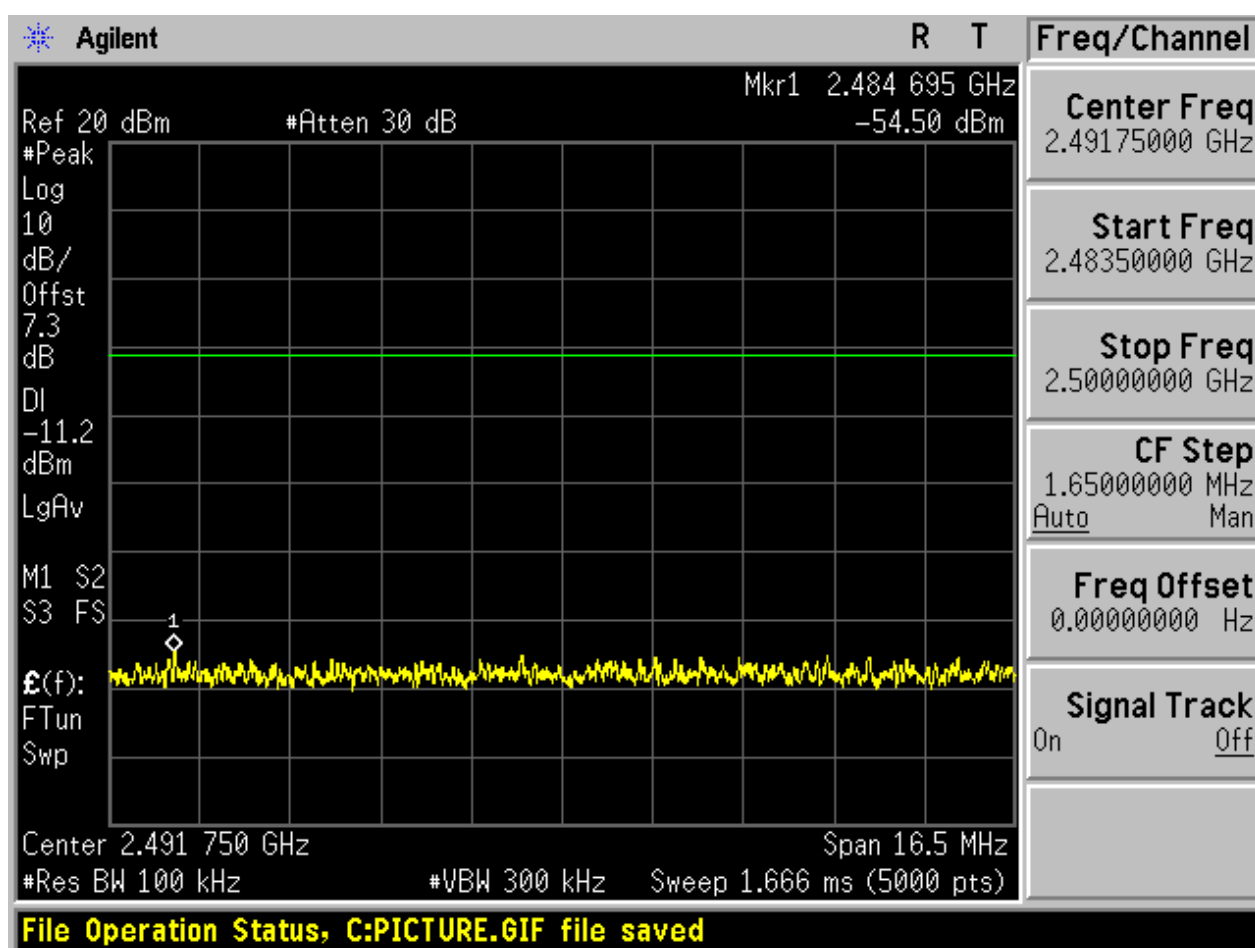

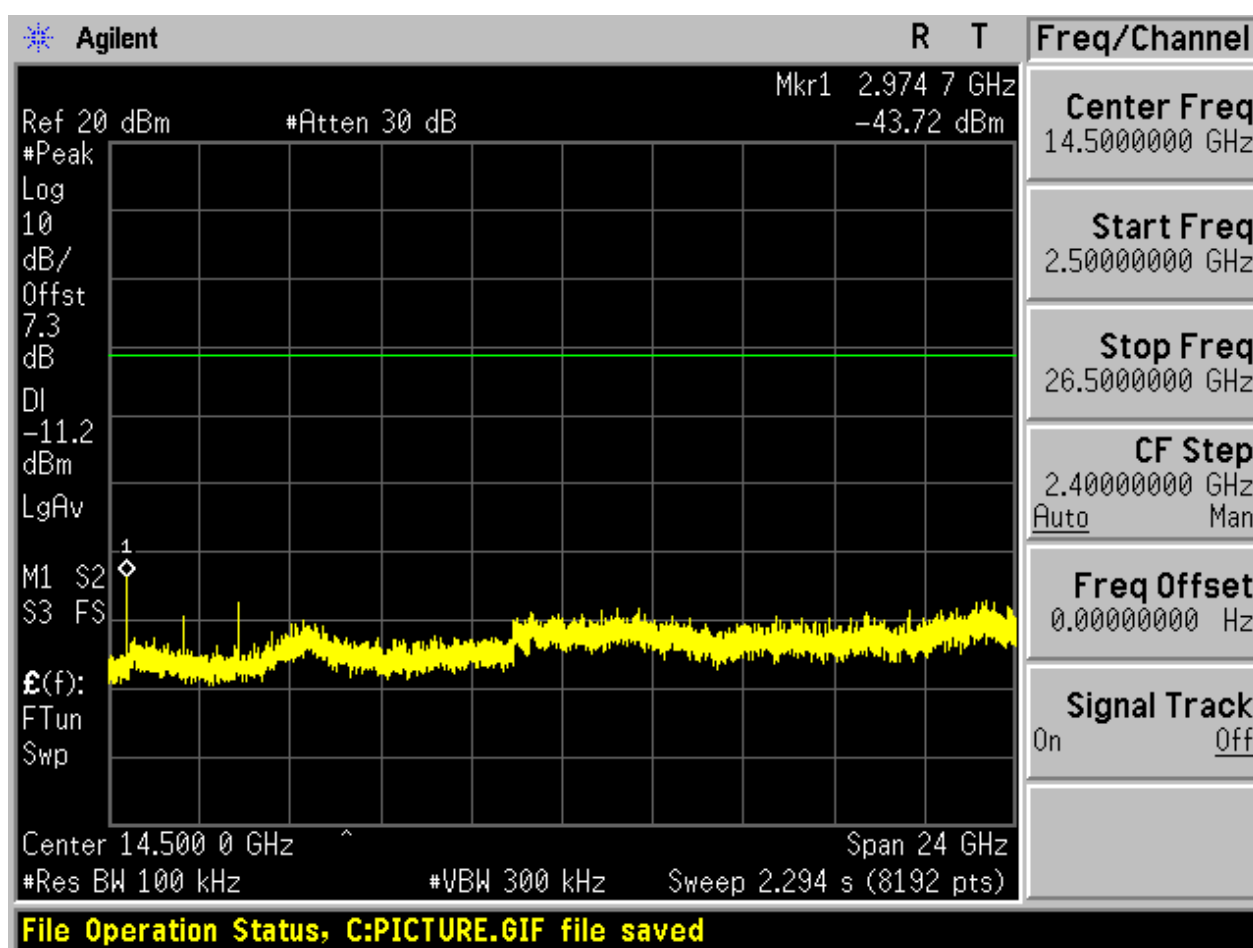



2.8 TM3_3DH5_Ch39


2.8.1 Pref

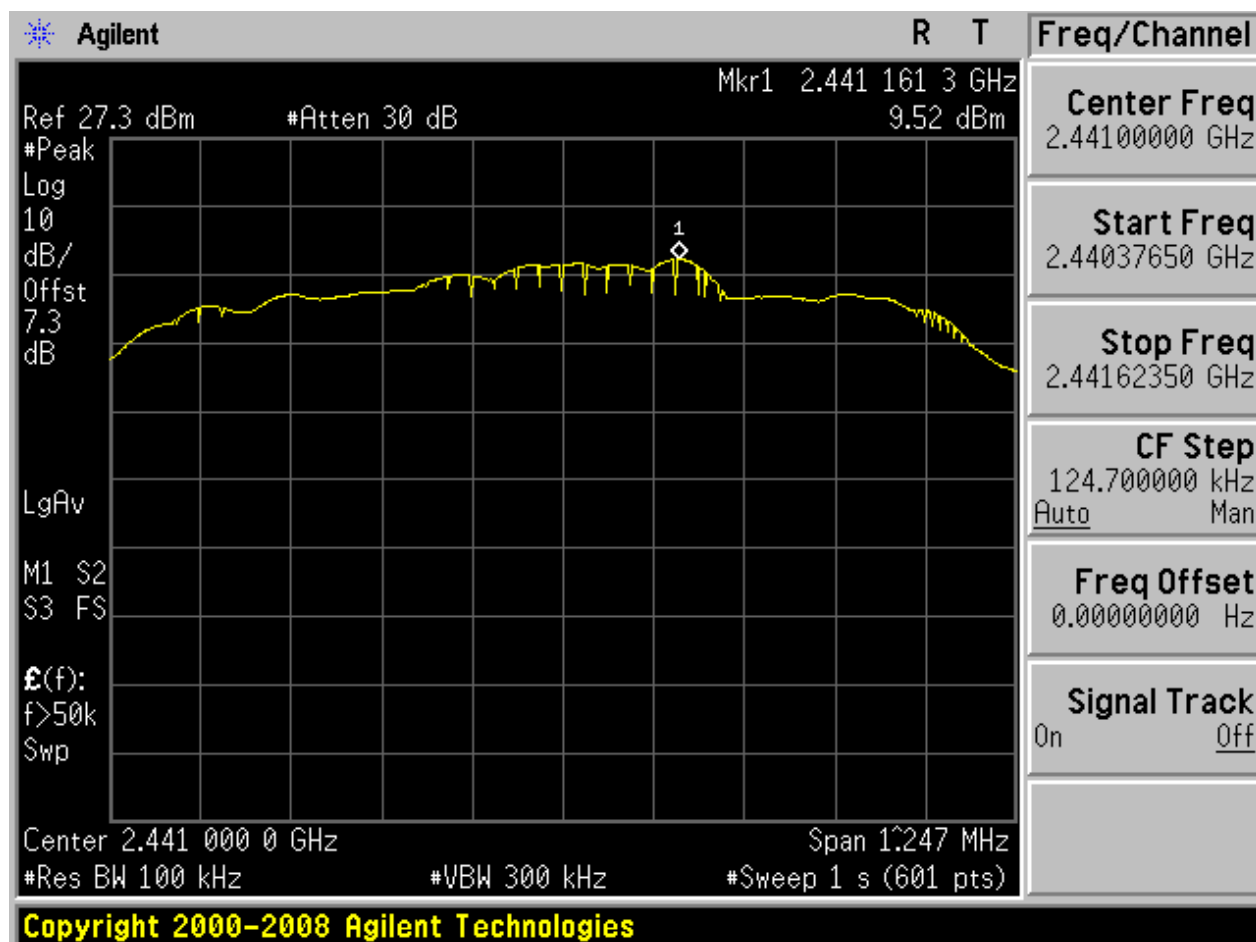



2.8.2 Puw

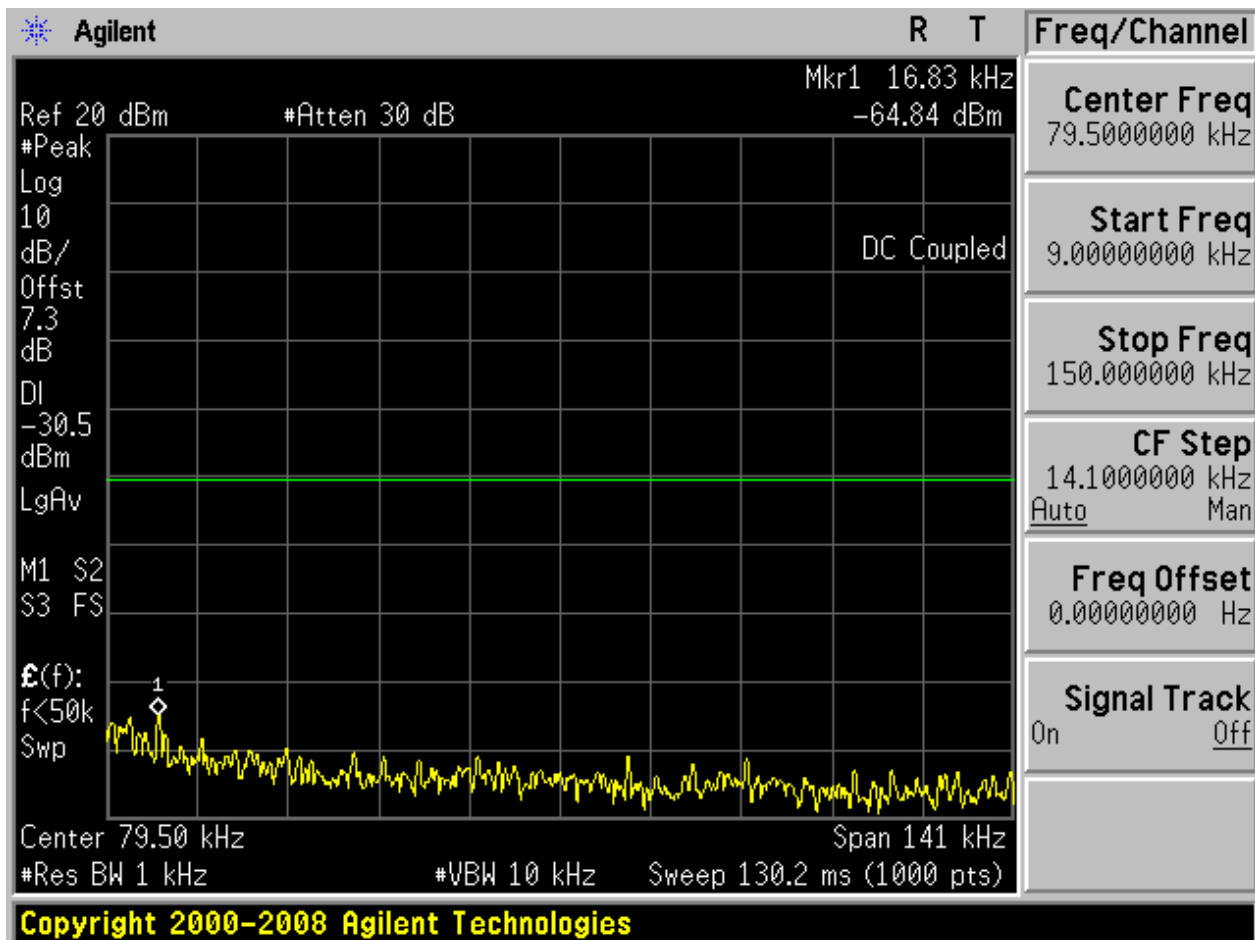


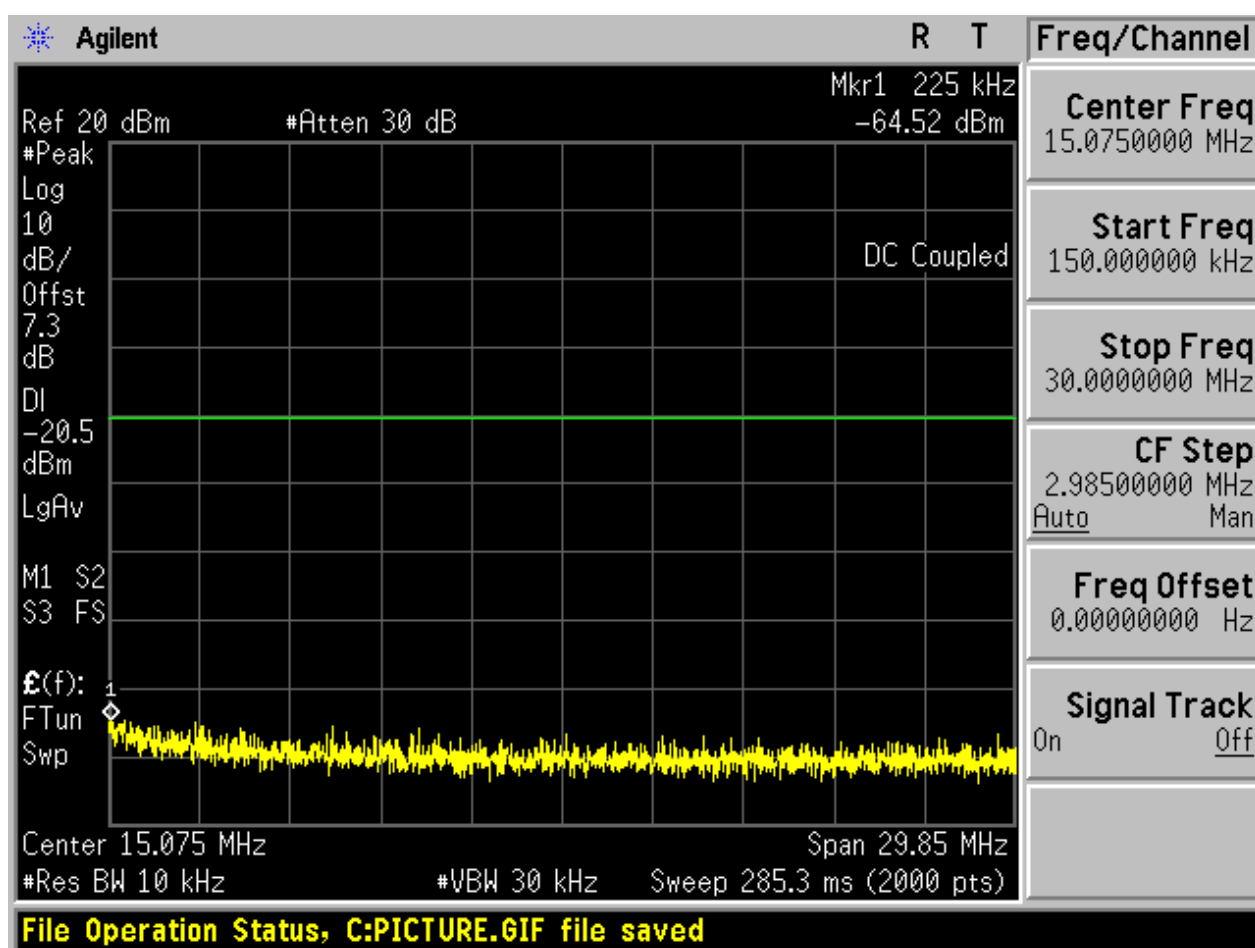

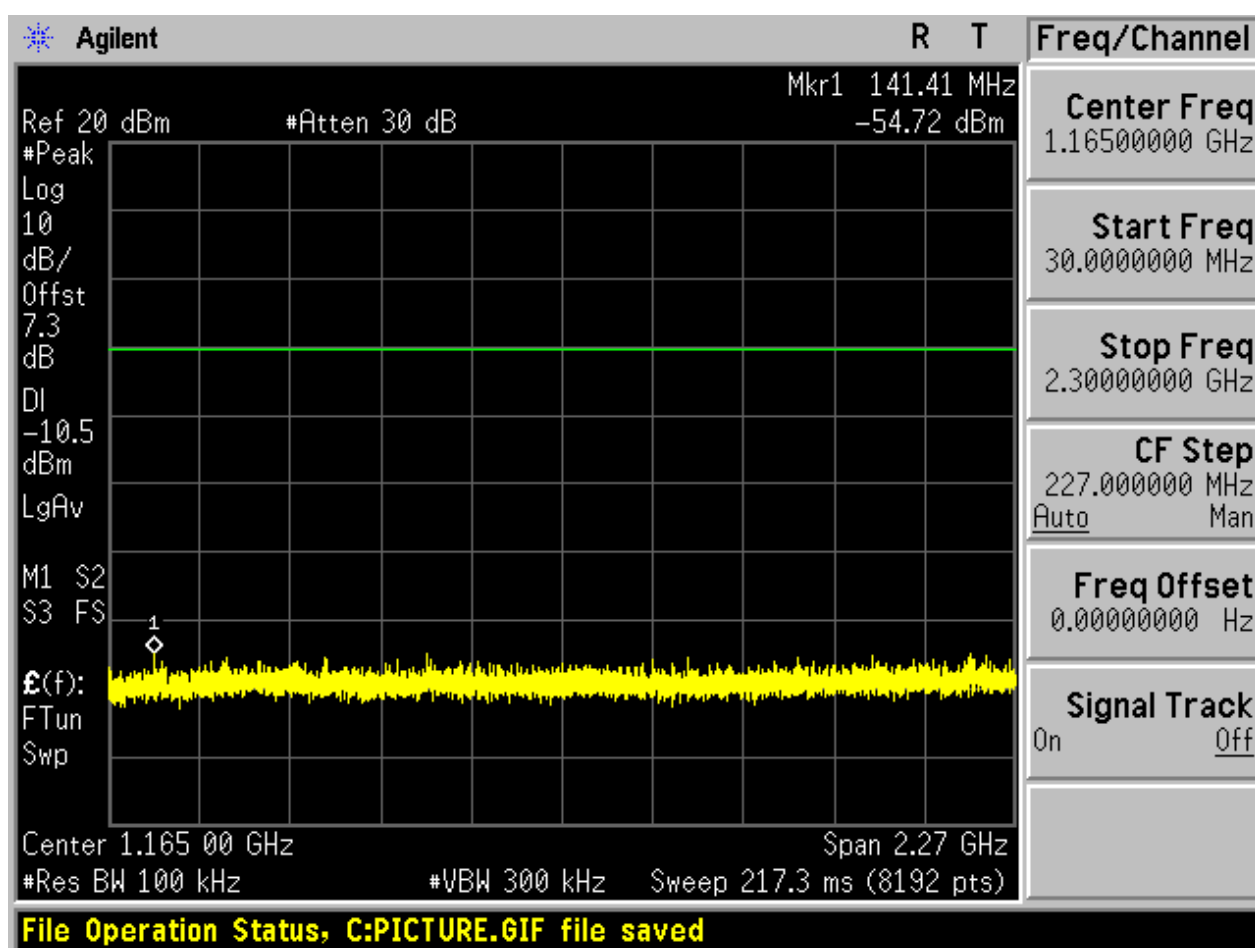

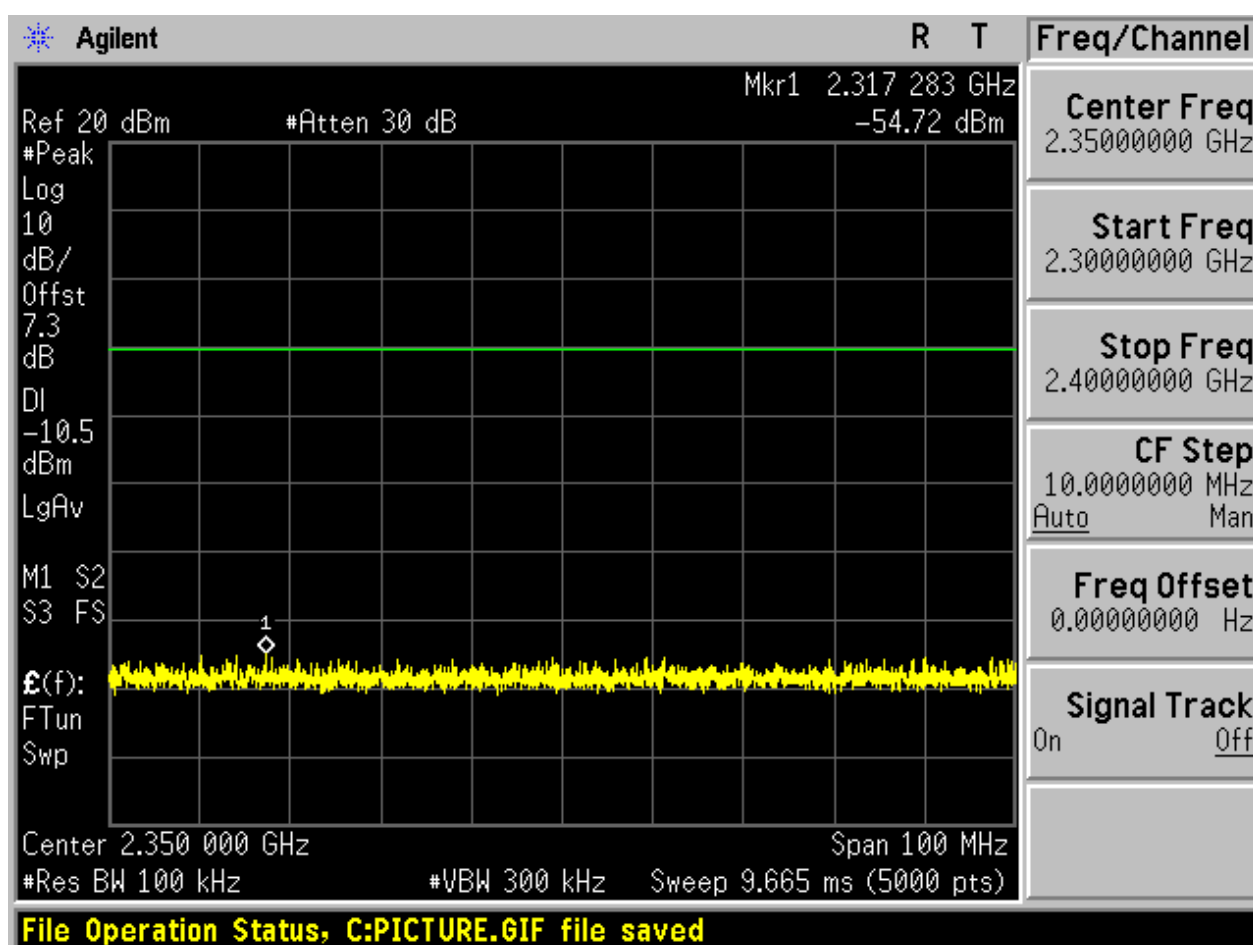


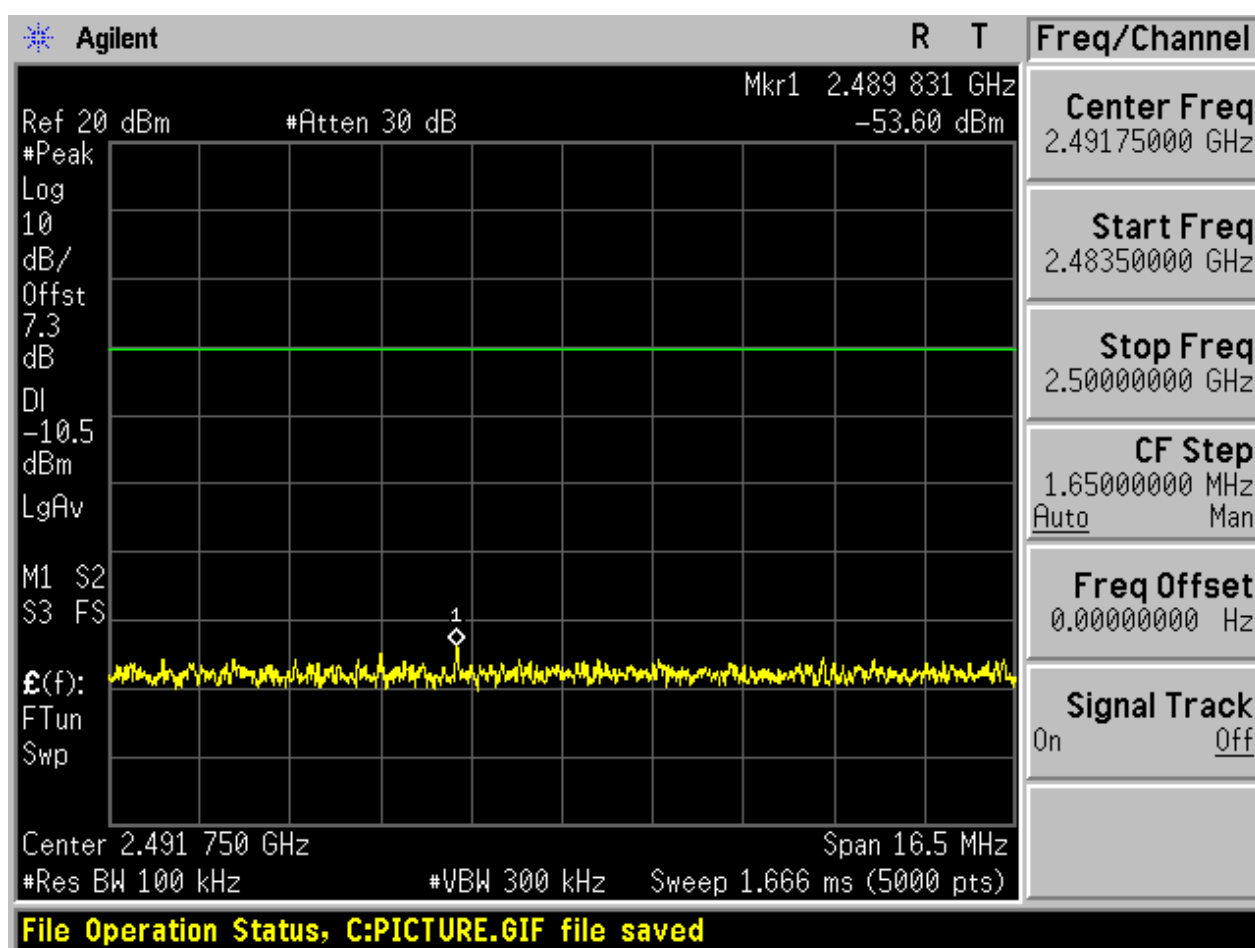

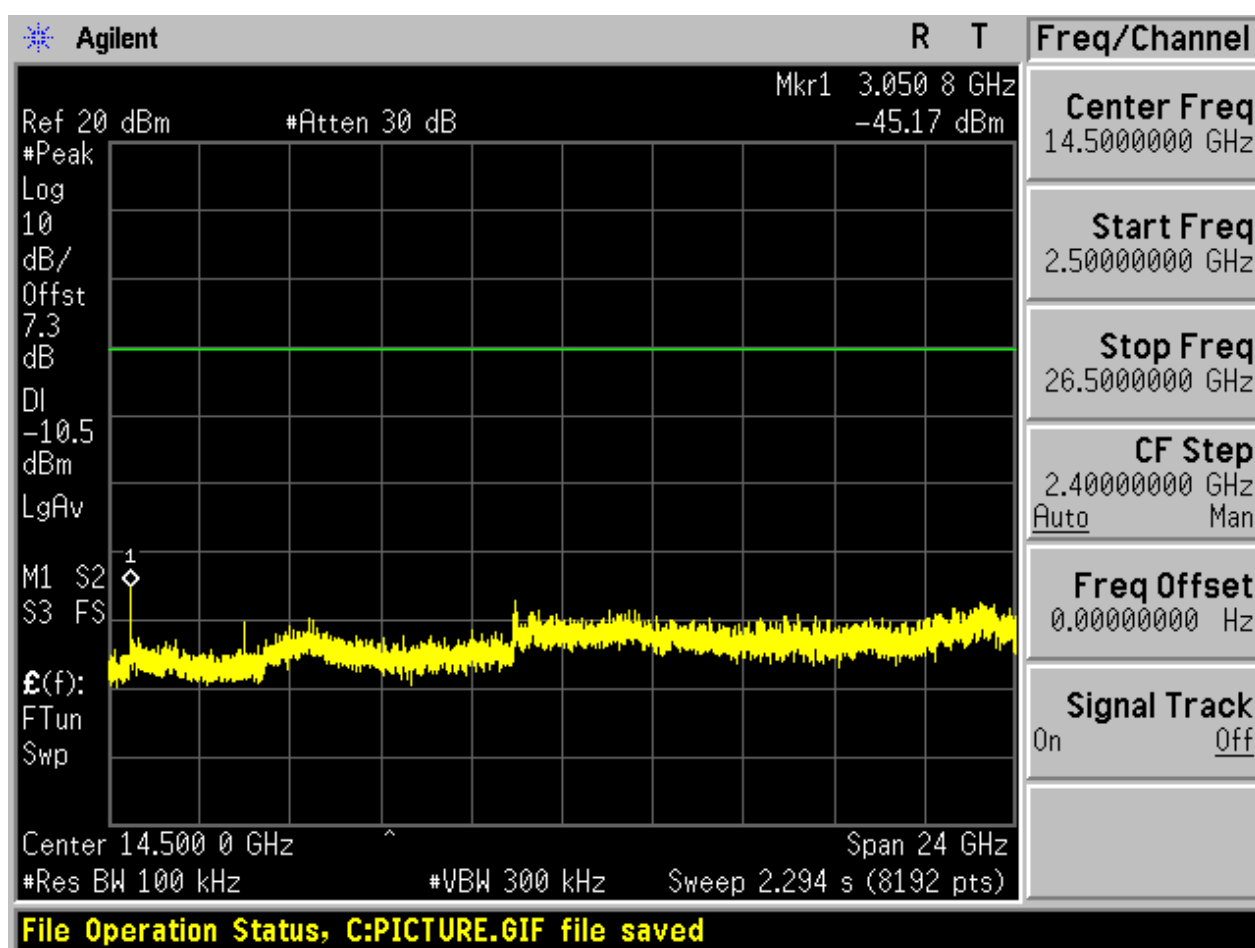



2.9 TM3_3DH5_Ch78


2.9.1 Pref

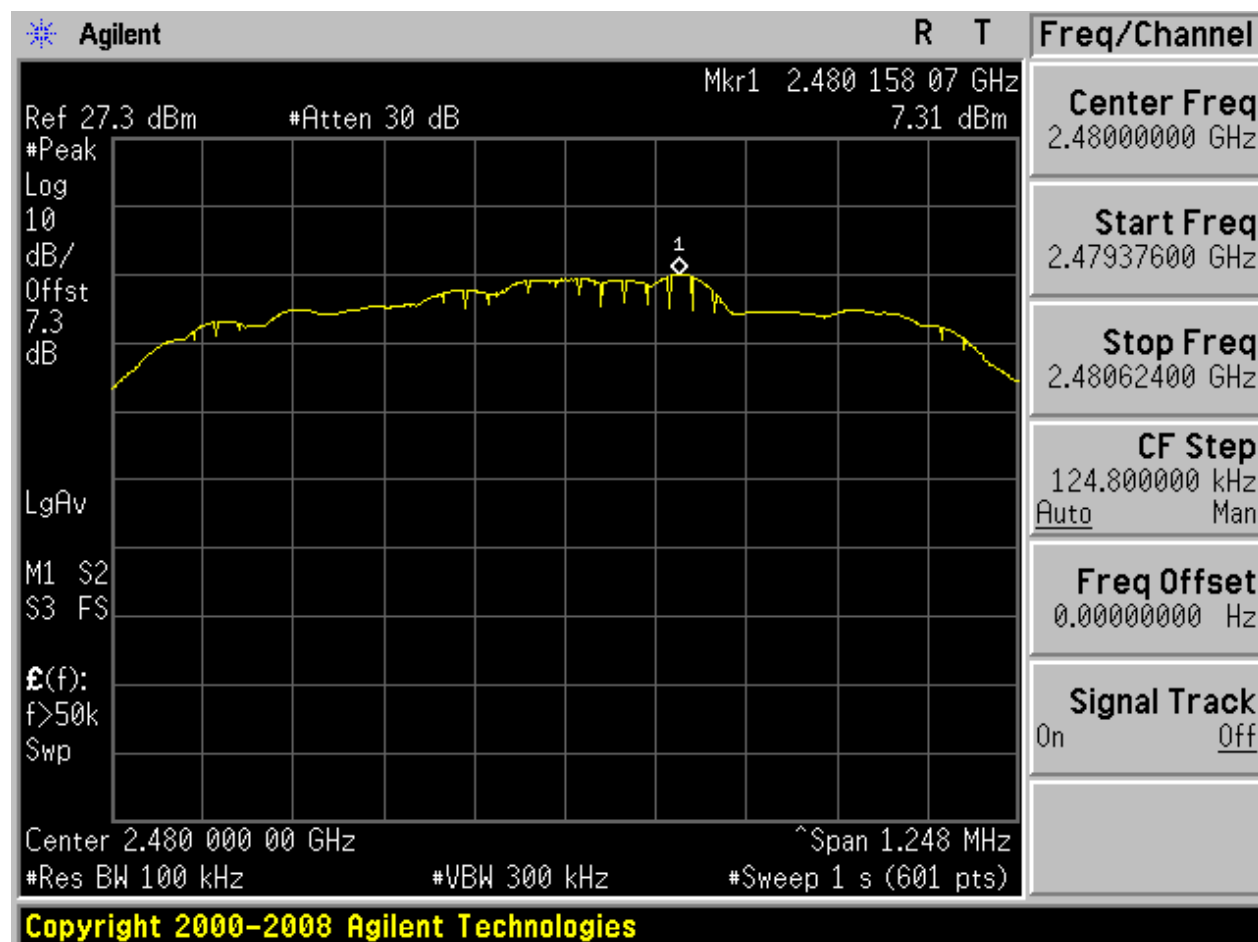



2.9.2 Puw

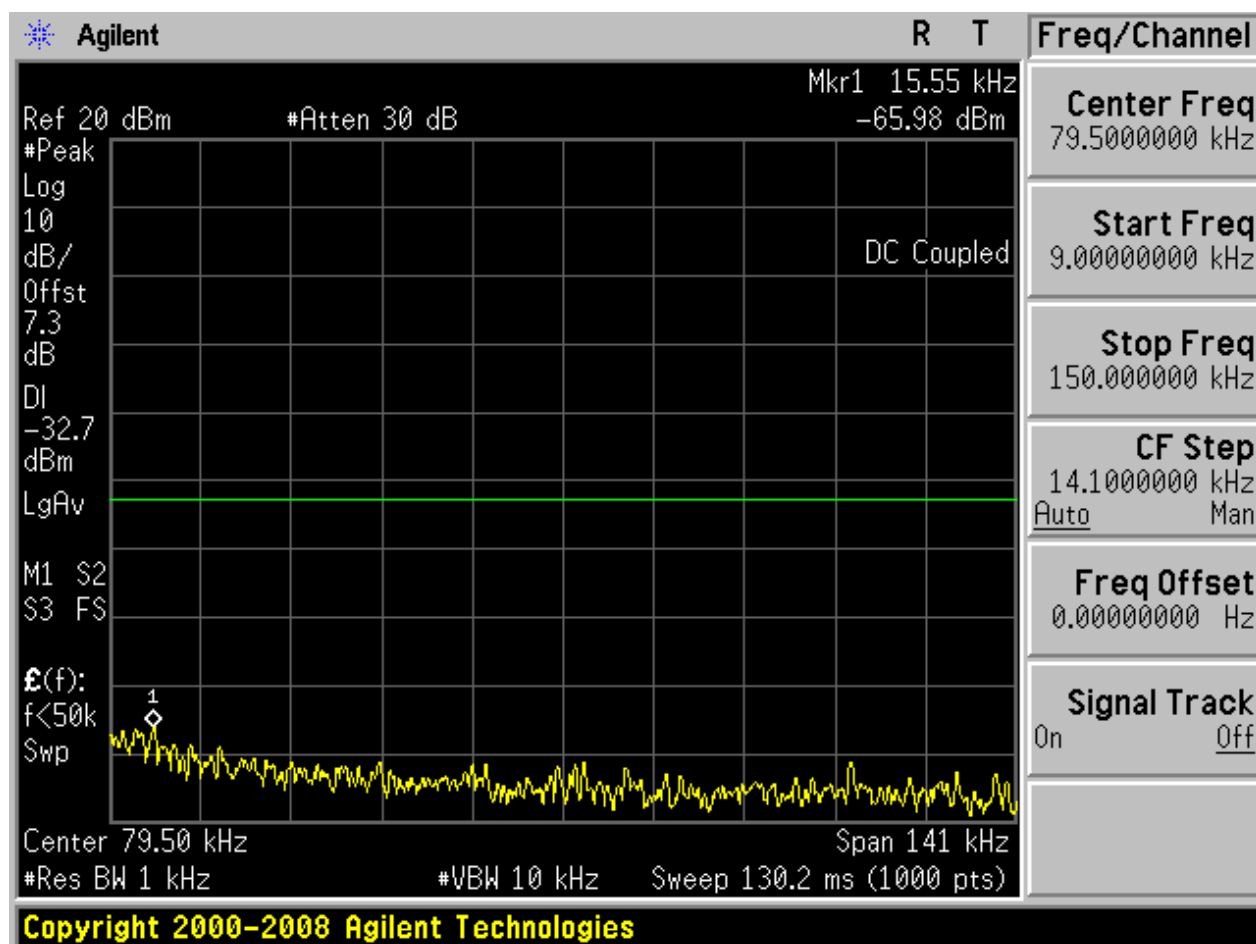


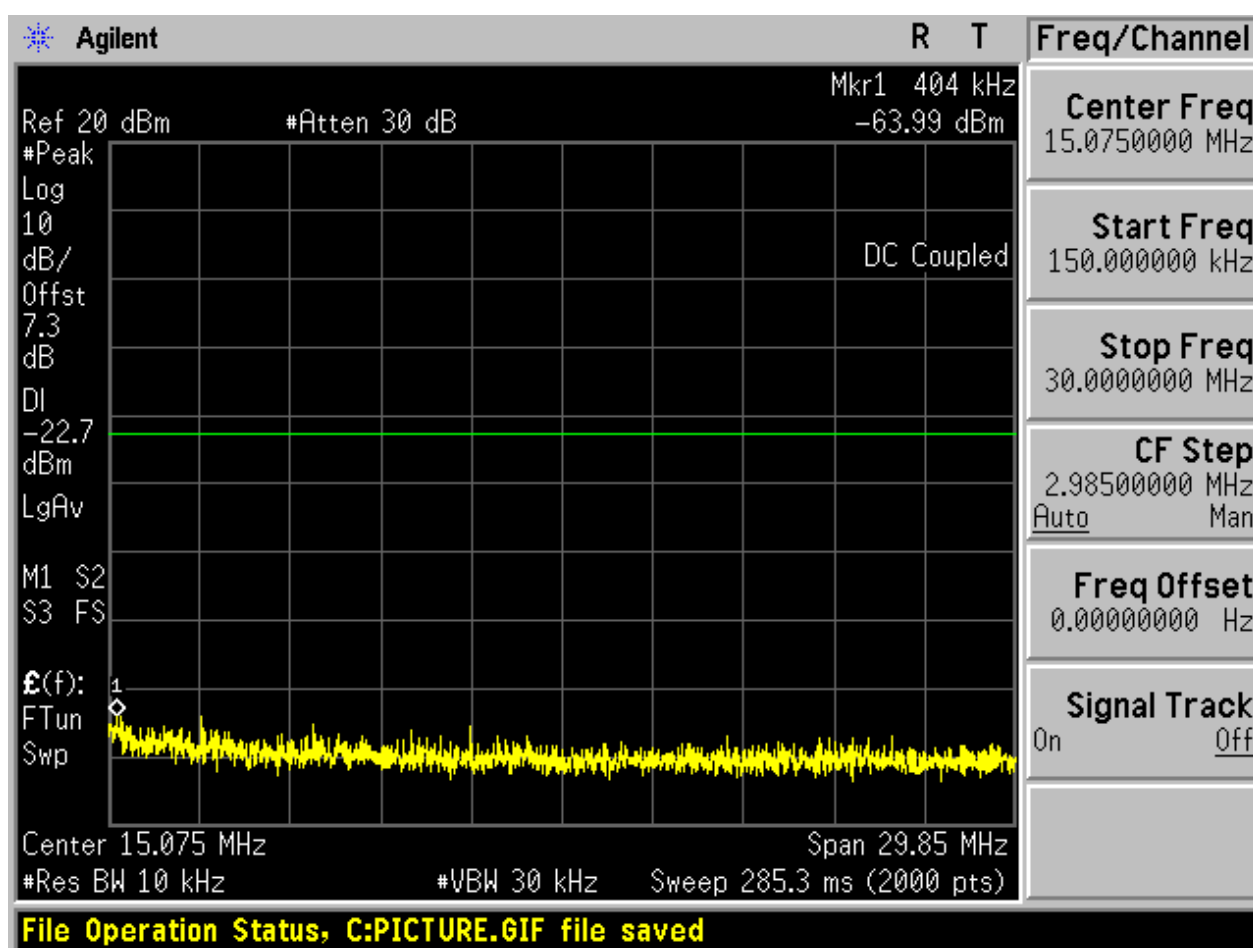

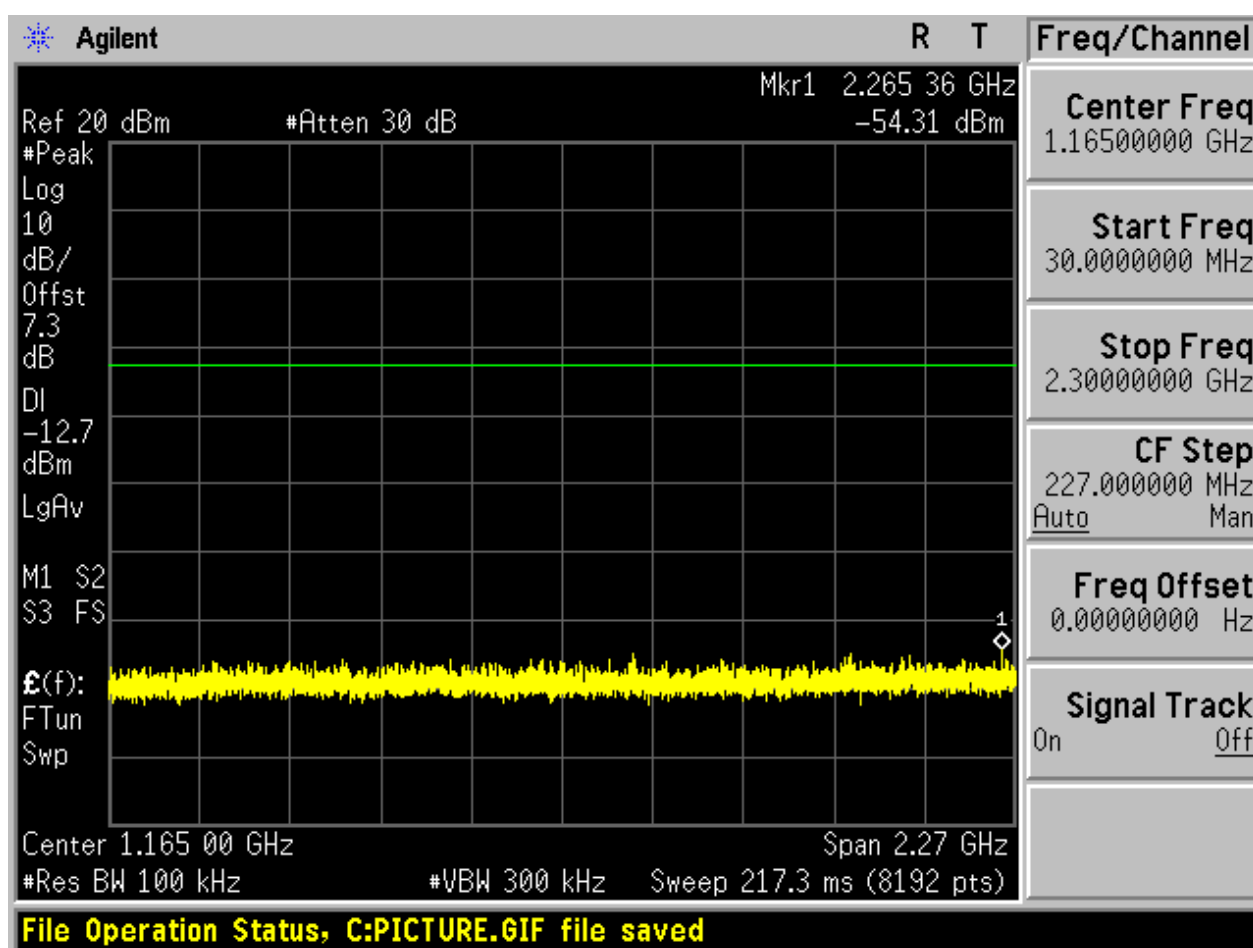

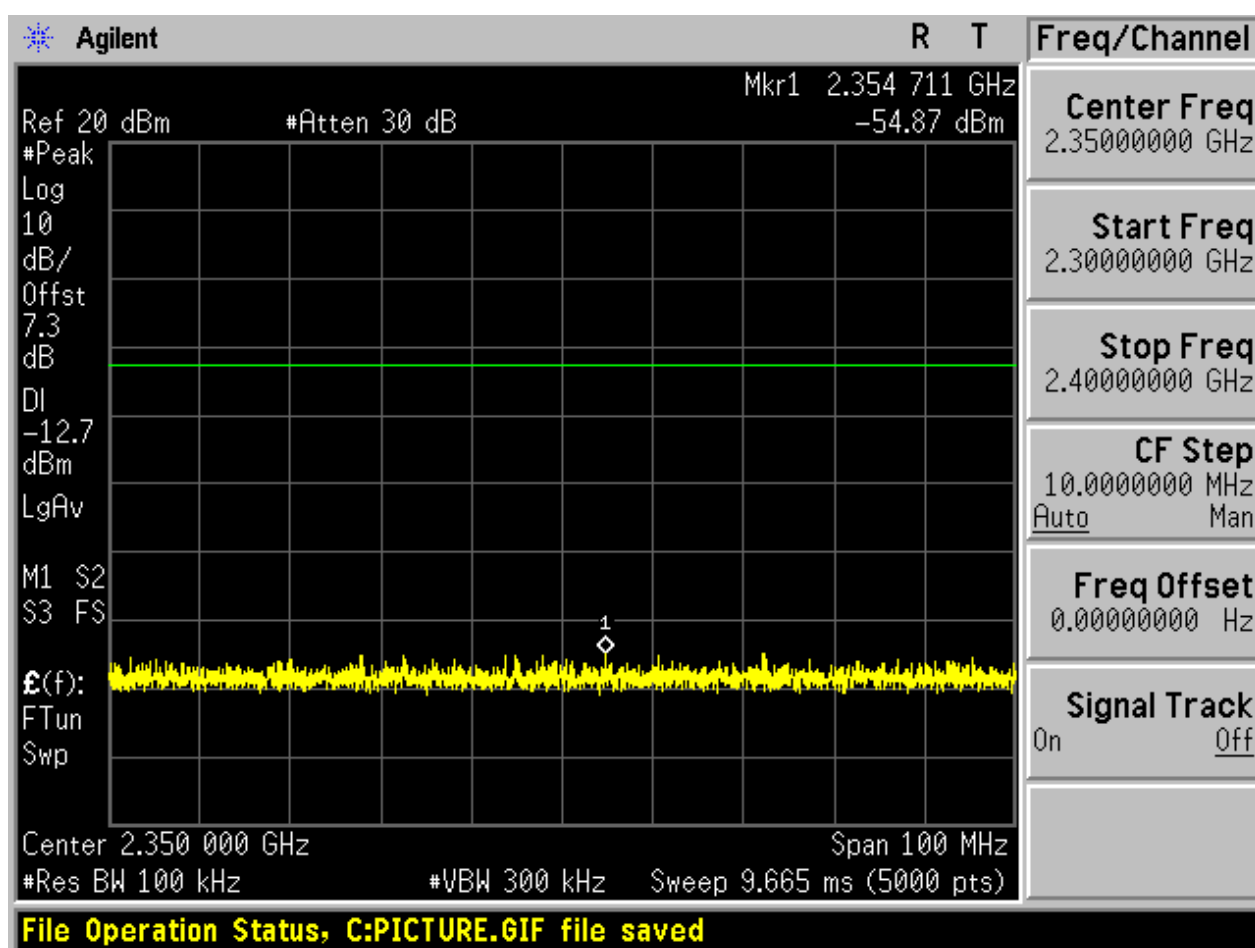

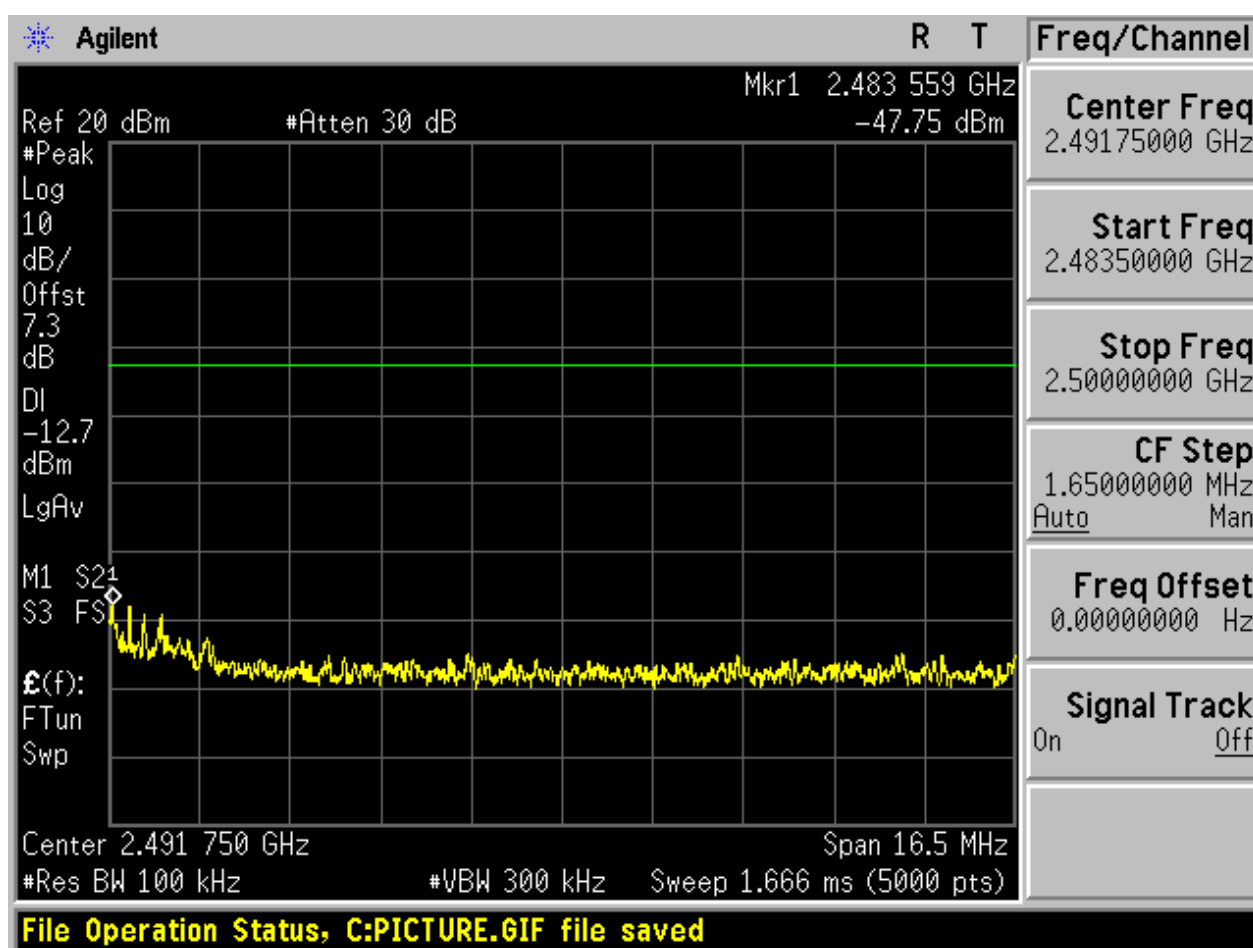

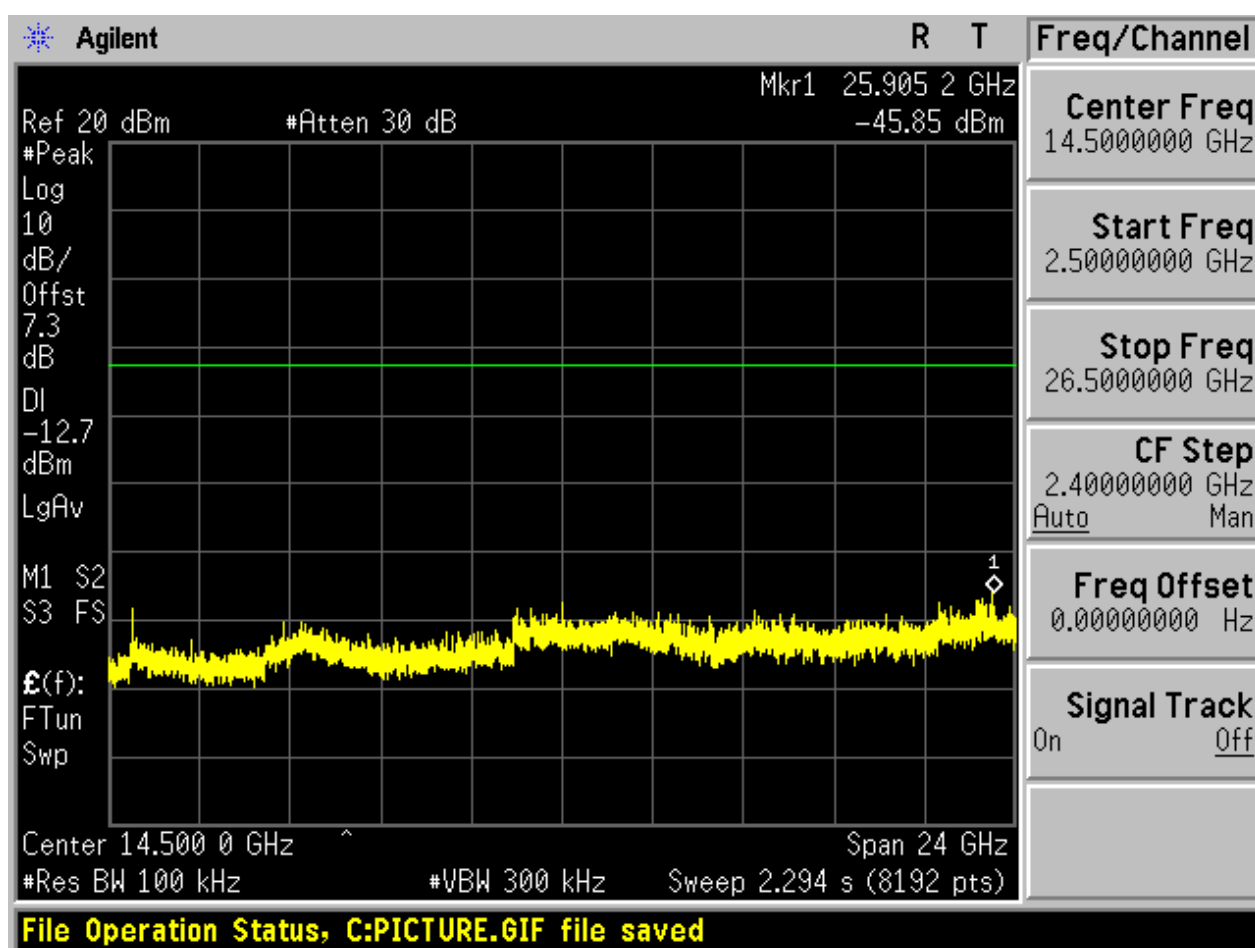

Appendix H: Radiated Emissions in the Restricted Bands

Note: We tested all modes, but the data presented below is the worst case.

1 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 4 parts according to the test site settings, which are:

- (Part 1): Test range of “9 KHz to 30 MHz”,
- (Part 2): Test range of “30 GHz to 1 GHz”,
- (Part 3): Test range of “1 GHz to 3 GHz”.
- (Part 4): Test range of “3 GHz to 18 GHz”,
- (Part 5): Test range of “18 GHz to 26.5 GHz”.

In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.

Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
1 GHz to 3 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worst Conf.)	< Limit	Pass
3 GHz to 18 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass

2 Result Plot


Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

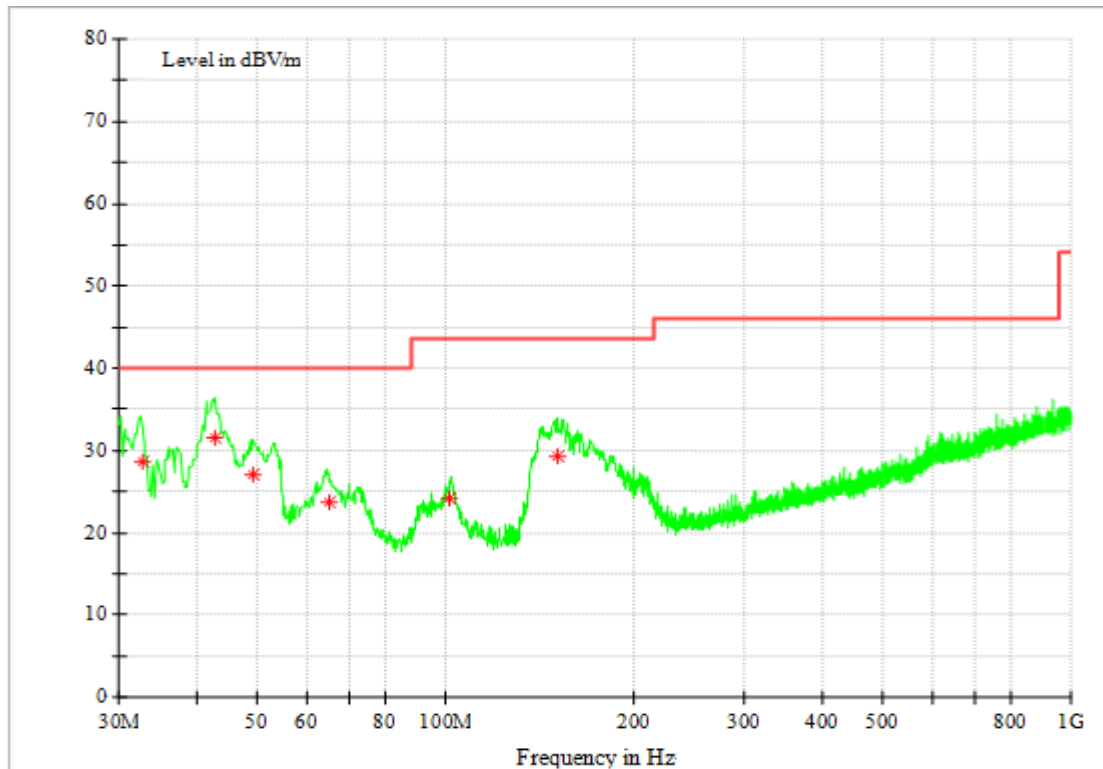

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
32.755680	28.55	40.00	11.45	100.0	V	-7.0	14.9
42.681600	31.48	40.00	8.52	106.0	V	267.0	15.2
49.215920	27.11	40.00	12.89	107.0	V	116.0	14.8
65.028240	23.74	40.00	16.26	200.0	V	287.0	11.6
101.749760	24.23	43.50	19.27	142.0	V	313.0	13.5
150.781920	29.27	43.50	14.23	100.0	V	205.0	9.9

Note:


Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

Part 3: Testing Range of “1GHz to 3GHz”

- Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Channel 0

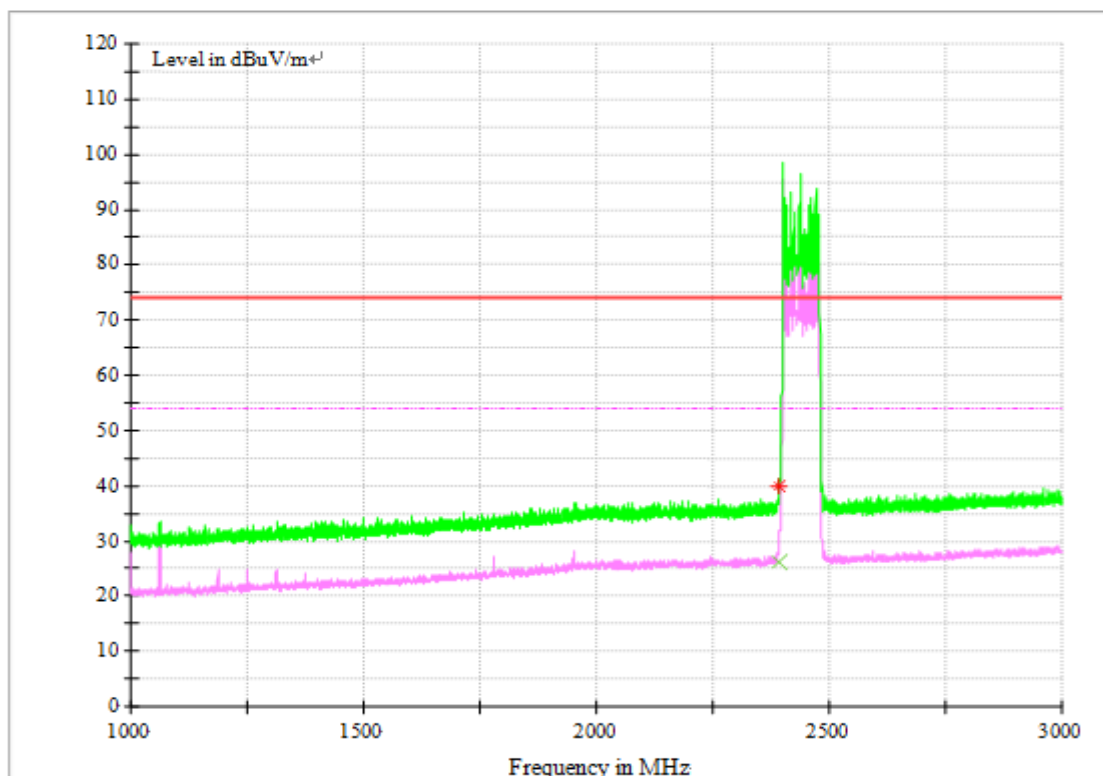

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390.000000	26.08	54.00	27.92	100.0	H	-8.0	-7.5

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390.000000	39.88	74.00	34.12	136.0	V	323.0	-7.3

Note2:

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

Channel 78

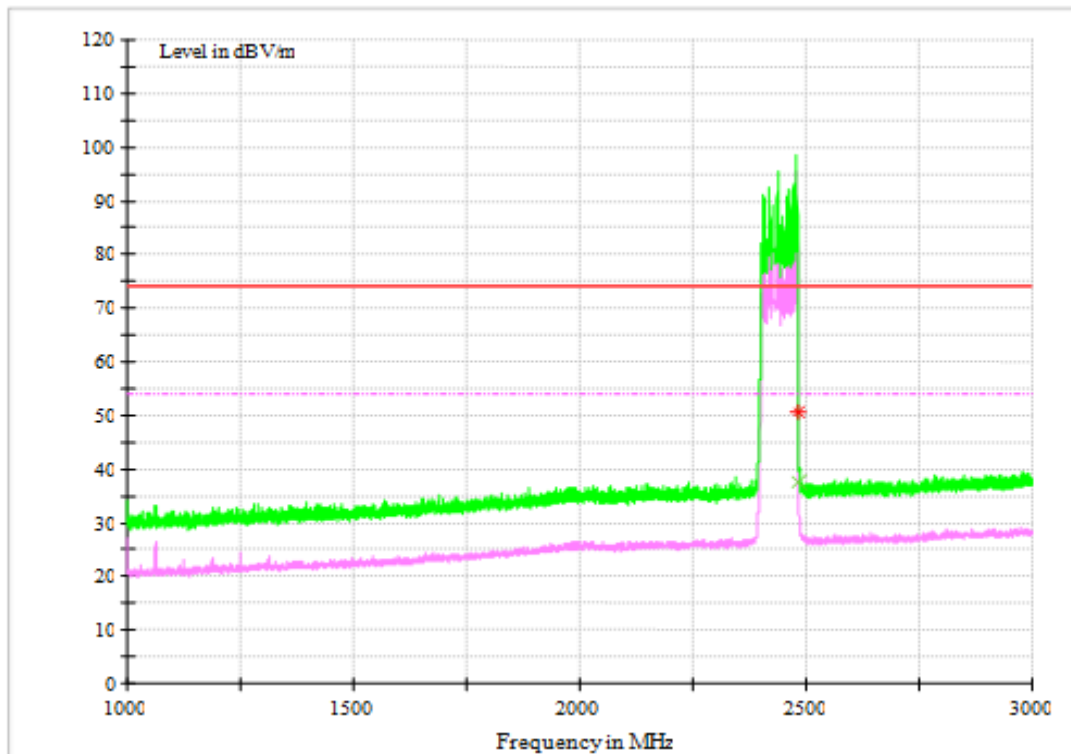

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.500000	37.60	54.00	16.40	107.0	H	190.0	4.7

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	50.69	74.00	23.31	155.0	H	210.0	4.8


Note2:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

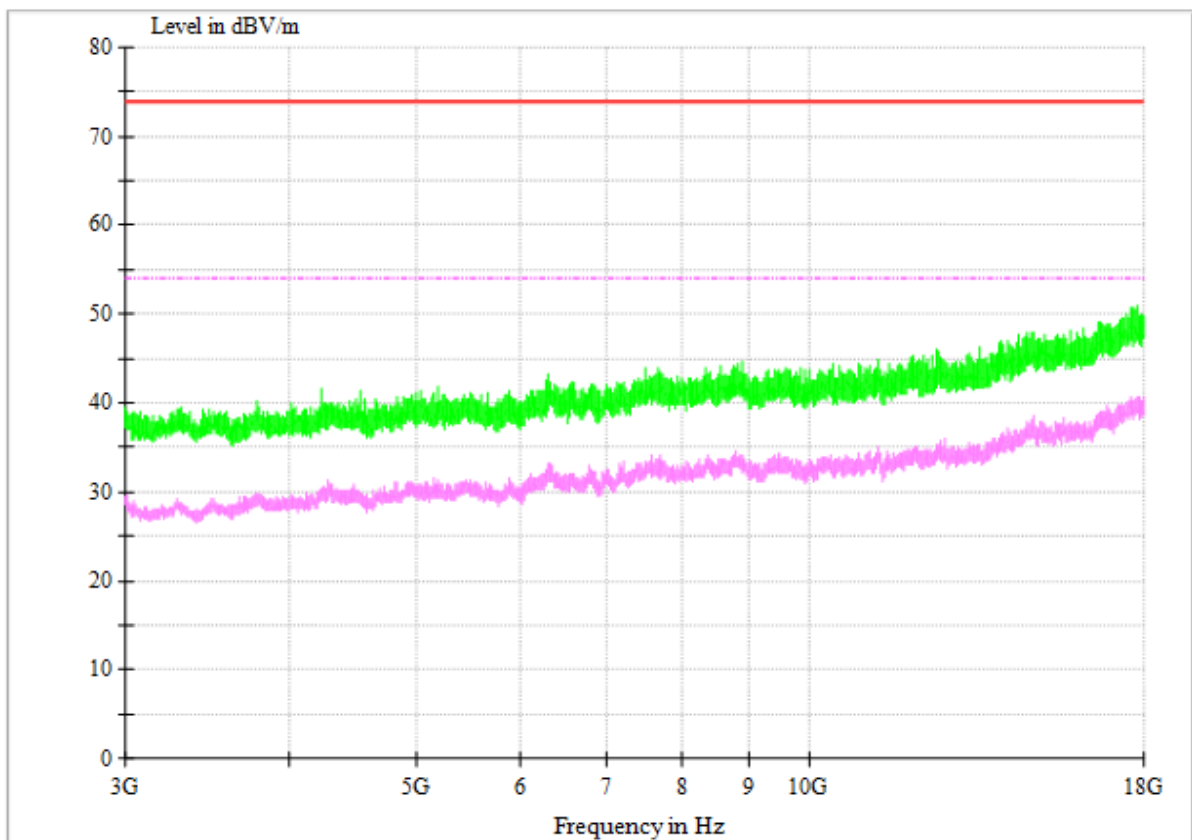

Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE1: No peak found in the Test Range of “18 GHz to 26.5GHz”

Appendix I: Receiver Spurious Emissions




1 Result Table

In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch39	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass

2 Result Plot

Channel 39

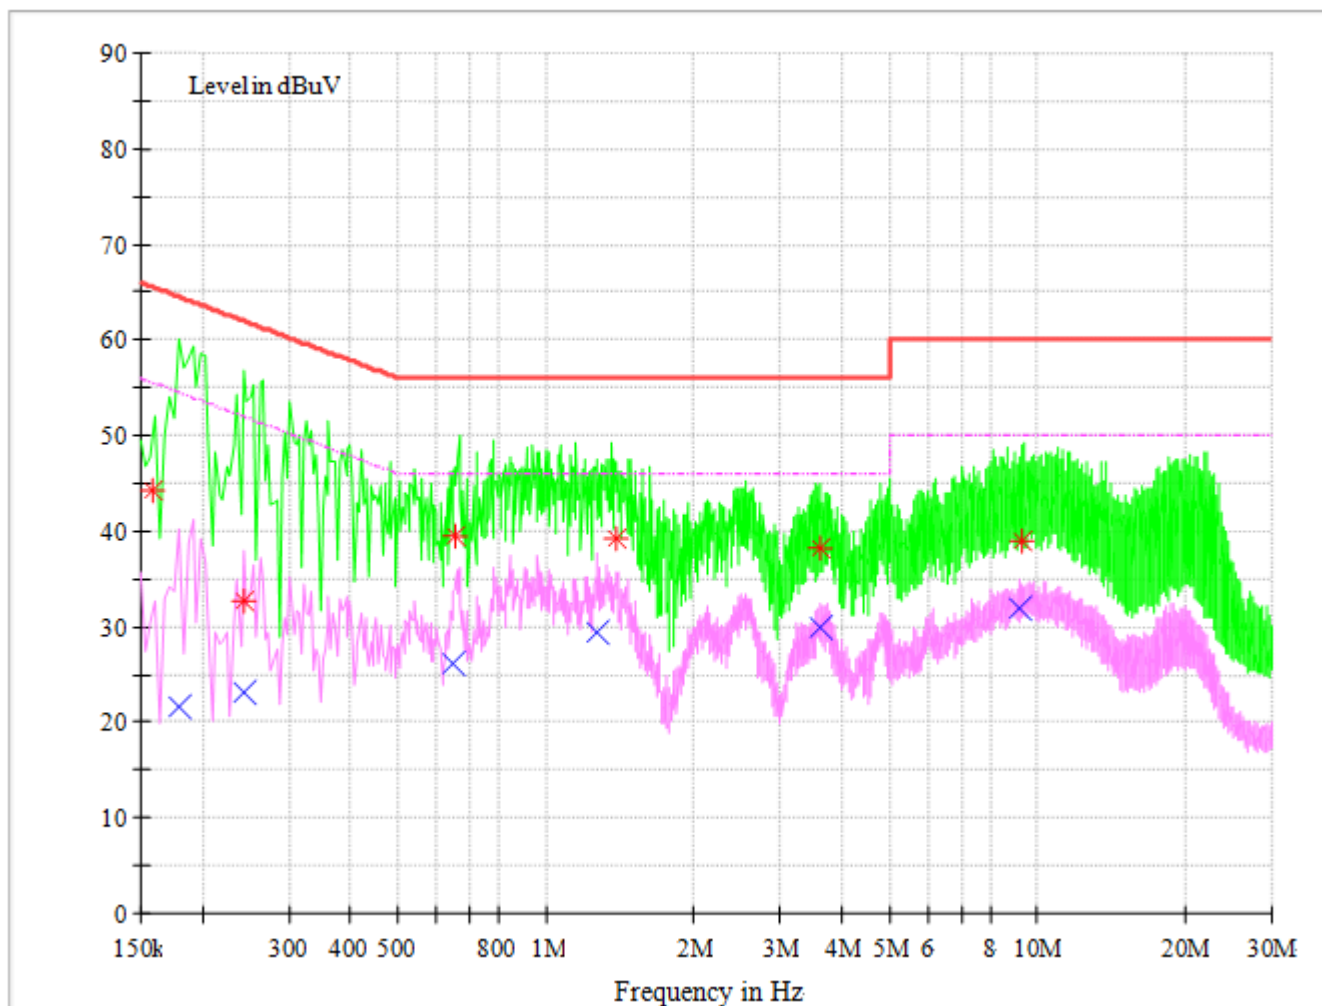

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.180528	21.64	54.46	9.7	32.82	N	FLO
0.242559	23.25	52.01	9.7	28.76	L1	FLO
0.644189	26.18	46.00	9.7	19.82	L1	FLO
1.273504	29.47	46.00	9.7	16.53	L1	FLO
3.638294	29.84	46.00	9.8	16.16	L1	FLO
9.213373	31.93	50.00	9.9	18.07	N	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.158648	44.24	65.53	9.7	21.29	N	FLO
0.242442	32.57	62.01	9.7	29.45	N	FLO
0.657378	39.40	56.00	9.7	16.60	L1	FLO
1.390445	39.13	56.00	9.7	16.87	L1	FLO
3.628054	38.13	56.00	9.8	17.87	L1	FLO
9.339348	38.92	60.00	9.9	21.08	N	FLO

Note2:

Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

END