



# FCC

# RF Test Report

**Product Name: Smart Phone**

**Model Number: HUAWEI CHC-U03**

**Report No: SYBH(Z-RF)011122014-2002**

**FCC ID: QISCHC-U03**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



## Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1 and 6369A-3.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.




**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt Sample:** 2014-12-16  
**Start Date of Test:** 2014-12-27  
**End Date of Test:** 2015-01-05

**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2015-01-05	Liu Chunlin	
	Date	Name	Signature

<b>Prepared by:</b>	2015-01-05	Wu Tingsi	
	Date	Name	Signature



### Modification Record

No.	Last Report No.	Modification Description
		First Report



**CONTENT**

1 General Information ..... 6

1.1 Applied Standard..... 6

1.2 Test Location..... 6

1.3 Test Environment Condition..... 6

2 Test Summary ..... 7

3 Description of the Equipment under Test (EUT) ..... 8

3.1 General Description ..... 8

3.2 EUT Identity ..... 8

3.3 Technical Description..... 9

4 General Test Conditions / Configurations ..... 10

4.1 Test Modes ..... 10

4.2 EUT Configurations..... 10

4.3 Test Environments ..... 11

4.4 Antenna requirements..... 11

4.5 Description of tests..... 12

4.6 Test Setups..... 14

4.7 Test Conditions ..... 17

5 Main Test Instruments ..... 19



## 1 General Information

### 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J 2013  
47 CFR FCC Part 15, Subpart C 2013

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v03r02  
ANSI C63.10-2009, American National Standard for Testing Unlicensed  
Wireless Devices.

### 1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3 Test Environment Condition

Ambient Temperature: 19.5to 25 °C  
Ambient Relative Humidity: 40 to 55 %  
Atmospheric Pressure: Not applicable

## 2 Test Summary

Test Item	FCC Part No.	Requirements	Test Result	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	Appendix A	<b>SYBH(Z-RF)01312 2014</b>
Occupied Bandwidth	---	---	Appendix B	<b>SYBH(Z-RF)01312 2014</b>
Maximum Conducted Average Output Power	15.247(b)(3)	For directional gain: < 30 dBm – (G[dBi] – 6 [dB]), Average; Otherwise: < 30 dBm, Average.	Appendix C	<b>SYBH(Z-RF)01312 2014</b>
Maximum Power Spectral Density Level	15.247(e)	For directional gain: < 8 dBm/3 kHz – (G[dBi] – 6 [dB]), Average. Otherwise: < 8 dBm/3 kHz, Average.	Appendix D	<b>SYBH(Z-RF)01312 2014</b>
Band Edges Compliance	15.247(d)	< -30 dBm/100 kHz if total peak power ≤ power limit.	Appendix E	<b>SYBH(Z-RF)01312 2014</b>
Unwanted Emissions into Non-Restricted Frequency Bands			Appendix F	<b>SYBH(Z-RF)01312 2014</b>
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209 (NOTE 1)	FCC Part 15.209 field strength limit;	Appendix G	<b>SYBH(Z-RF)01312 2014</b>
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	Appendix H	<b>SYBH(Z-RF)01312 2014</b>
<p>NOTE 1: According to KDB 558074, antenna-port conducted measurements are acceptable as an alternative to radiated measurements for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions will also be required.</p> <p>NOTE2: We do not test the WIFI all the test case refer to <b>SYBH(Z-RF)013122014</b> of HUAWEI CHC-U23</p>				

### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

HUAWEI CHC-U03 is subscriber equipment in the GSM/UMTS system. The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The UMTS frequency band is band I and band II and band IV and band V. The Mobile Phone implements such functions as RF signal receiving/transmitting, UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

The differences between HUAWEI CHC-U23 and HUAWEI CHC-U03:

Model	HUAWEI CHC-U23	HUAWEI CHC-U03
FCC Frequency-2G	GSM850/1900	GSM850/1900
FCC Frequency-3G	W850/1900/AWS	W850/1900/AWS
FCC ID	QISCHC-U23	QISCHC-U03
Dimensions	The same	The same
Appearance	The same	The same
SIM Card	Double	Single
main antenna	The same	The same
BT/Wi-Fi antenna	The same	The same
GPS antenna	The same	The same
Others	The same	The same

#### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

##### 3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main Board	HD1CHMUM	CHC-U03 V100R001C900B004

##### 3.2.2 Sub-Assembly

Name	Manufacture	Description
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100E2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A

Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100B2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V <input checked="" type="checkbox"/> 1A
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100A2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V <input checked="" type="checkbox"/> 1A
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100U2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V <input checked="" type="checkbox"/> 1A
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB444199EBC+ Rated capacity: 2550mAh Nominal Voltage: <input checked="" type="checkbox"/> +3.8V

### 3.3 Technical Description

Characteristics	Description	
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11g (20 MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth)	
TX/RX Operating Range	2412-2462 MHz band	$f_c = 2407 \text{ MHz} + N * 5 \text{ MHz}$ , where: - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth
Data Rate	802.11b	1 Mbps, 2 Mbps, 5.5 Mbps, 11 Mbps
	802.11g	6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54 Mbps
	802.11n (SISO)	MCS 0 to MCS 7
Modulation Type	DBPSK/DQPSK/CCK (DSSS), BPSK/QPSK/16QAM/64QAM (OFDM).	
Emission Designator	10M95G1D (for 802.11b mode), 16M4G7D (for 802.11g mod), 17M6G7D (for 802.11n mode)	
TX Power Control	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported	
Standby Mode	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported	
Equipment Type	<input type="checkbox"/> Stand-alone equipment, <input type="checkbox"/> Plug-in radio device, <input checked="" type="checkbox"/> Combined equipment	
Antenna	Description	Isotropic Antenna
	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated
	Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11b/g/n), <input type="checkbox"/> MIMO (for 802.11n): 2 Tx & 2 Rx, <input type="checkbox"/> Diversity (for 802.11b/g) : Tx & Rx
	Gain	-2 dBi (per antenna port, max.)
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.



Characteristics	Description			
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE:	<input type="checkbox"/> Other:

#### 4 General Test Conditions / Configurations

##### 4.1 Test Modes

NOTE: Worst cases for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11B	IEEE 802.11b with data rate of 1 Mbps using SISO mode.
11G	IEEE 802.11g with data rate of 6 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.

##### 4.2 EUT Configurations

###### 4.2.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, - All TX tests are performed at all TX antenna ports of the EUT, and - All RX tests are performed at all RX antenna ports of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

###### 4.2.2 Customized Configurations

Test Mode	RF Ch.	Antenna Port	TX Freq. [MHz]	Ch. BW [MHz]	Power Conf., per Port	Duty cycle [%]
11B	L	Ant 1	Ch No. 1 / 2412 MHz	20	170	98
11B	M	Ant 1	Ch No. 6 / 2437 MHz	20	170	98
11B	H	Ant 1	Ch No. 11 / 2462 MHz	20	170	98
11G	L	Ant 1	Ch No. 1 / 2412 MHz	20	160	95
11G	M	Ant 1	Ch No. 6 / 2437 MHz	20	160	95
11G	H	Ant 1	Ch No. 11 / 2462 MHz	20	160	95
11N20	L	Ant 1	Ch No. 1 / 2412 MHz	20	140	95

Test Mode	RF Ch.	Antenna Port	TX Freq. [MHz]	Ch. BW [MHz]	Power Conf., per Port	Duty cycle [%]
11N20	M	Ant 1	Ch No. 6 / 2437 MHz	20	140	95
11N20	H	Ant 1	Ch No. 11 / 2462 MHz	20	140	95

**4.3 Test Environments**

NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.8 VDC	Ambient

**4.4 Antenna requirements**

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antennas of the **CHC-U03** are **permanently attached**.

There are no provisions for connection to an external antenna.

**Conclusion:**

The **Smart Phone FCC ID: QISCHC-U03** unit complies with the requirement of §15.203.

**Ch. Frequency (MHz)**

Ch.	Frequency (MHz)
<b>01</b>	<b>2412</b>
.	.
.	.
<b>06</b>	<b>2437</b>
.	.
.	.
<b>11</b>	<b>2462</b>

**Frequency/ Channel Operations**

## 4.5 Description of tests

### 4.5.1 Bandwidth measurement

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz, then set the measured frequency number and test the bandwidth with spectrum analyzer.

### 4.5.2 Duty Cycle measurement

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz, then set the measured frequency number and test the Duty Cycle with spectrum analyzer.

### 4.5.3 Maximum Conducted Average Output Power

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

### 4.5.4 Band edge spurious emission

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, low frequency and measure the conducted band edge spurious separately.

### 4.5.5 Conducted RF spurious

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted spurious separately.

### 4.5.6 Power spectral density

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted power spectral density.

### 4.5.7 Radiated spurious emission & spurious in restricted band

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2009. The Radiated Disturbance measurements were made using a Rohde and Schwarz Test Receiver and control software.

A preliminary scan and a final scan of the emissions were made by using test script of software; the emissions were measured using a Quasi-Peak Detector below 1GHz, Peak Detector and AV Detector

above 1GHz. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, and the azimuth range of turntable was 0° to 360°. The receive antenna has two polarizations V and H.

A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other nonmetallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized.

The EUT communicates with the BTS simulator through Air interface. The EUT operated on the typical channel.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 kHz

Measurement bandwidth: 1000 MHz – 10<sup>th</sup> Carrier Frequency: 1 MHz

#### **4.5.8 Conducted Emission at Power Port**

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2009.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.


The EUT communicates with the BTS simulator through Air interface, the BTS simulator controls the Wireless Modem to transmitter the maximum power which defined in specification of product. The Wireless Modem operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

## 4.6 Test Setups

### 4.6.1 Test Setup 1


The WLAN component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

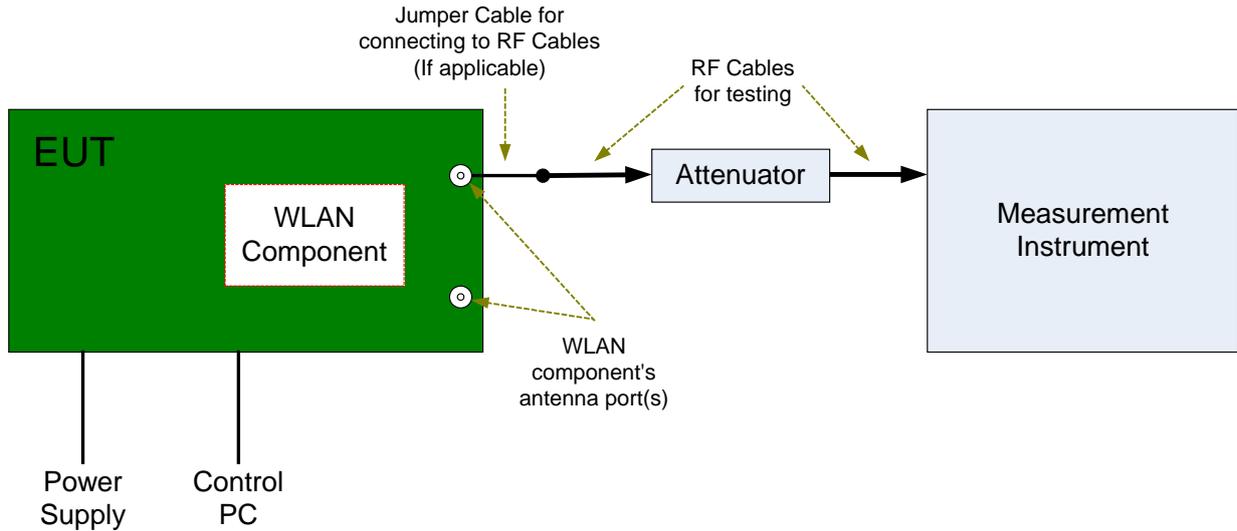


### 4.6.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

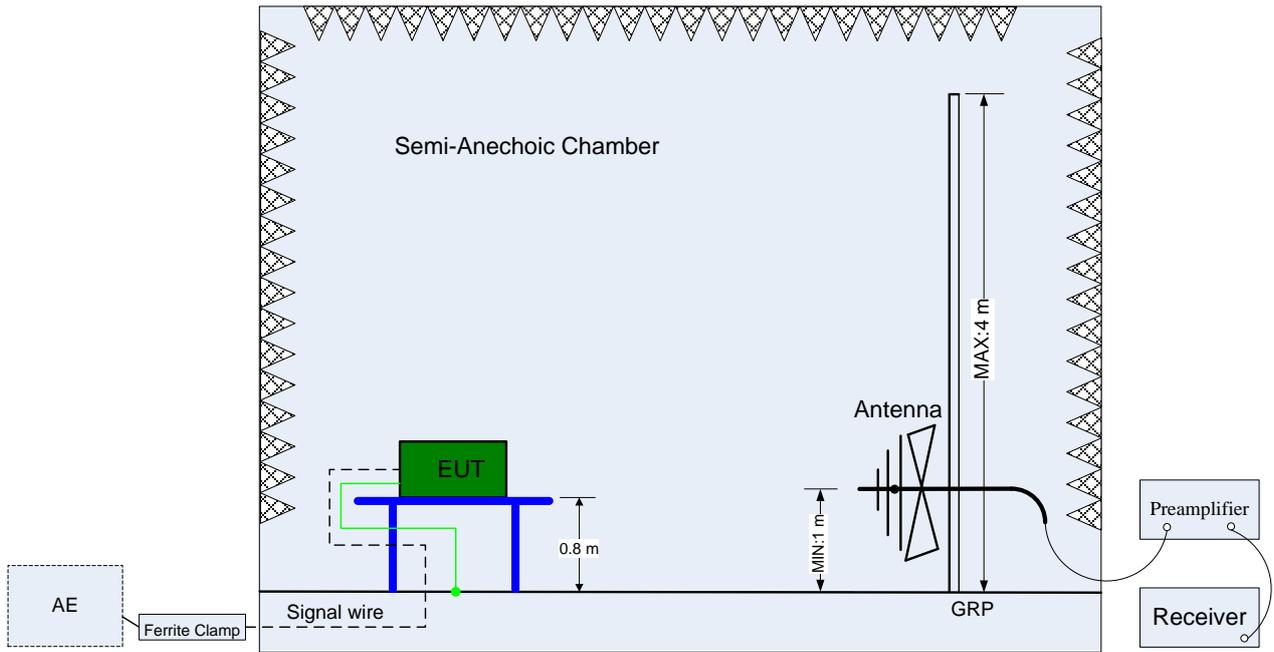

(Below 1 GHz)

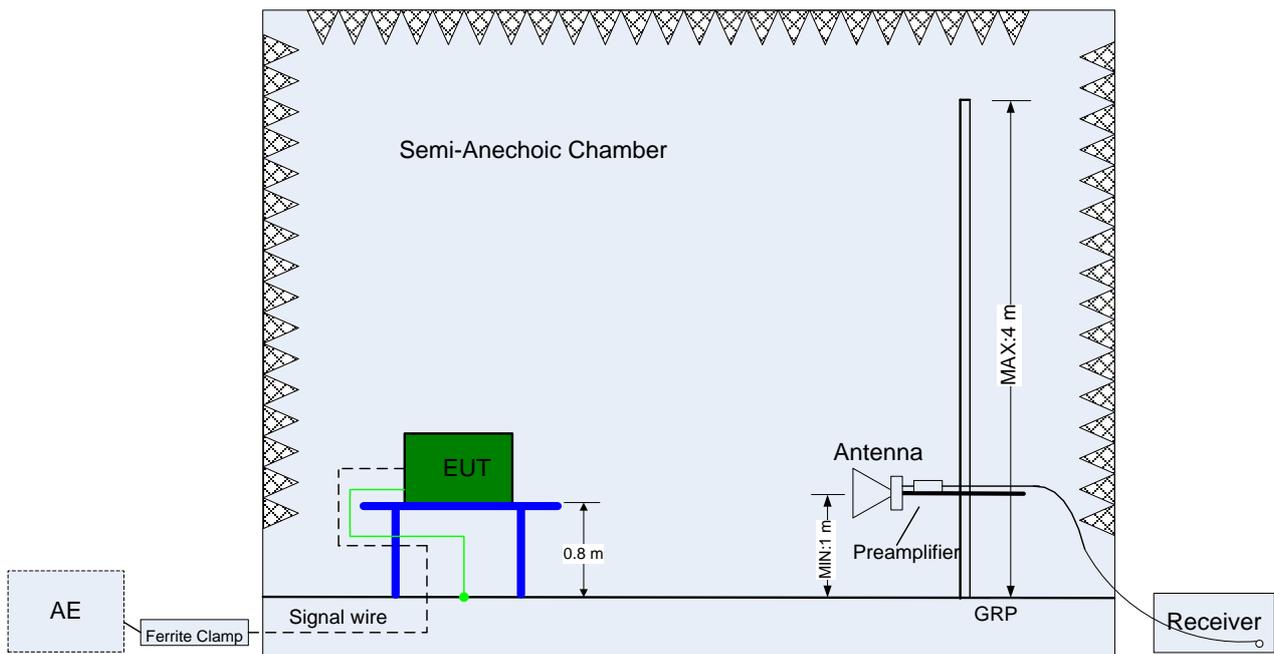


(Above 1 GHz)

### 4.6.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

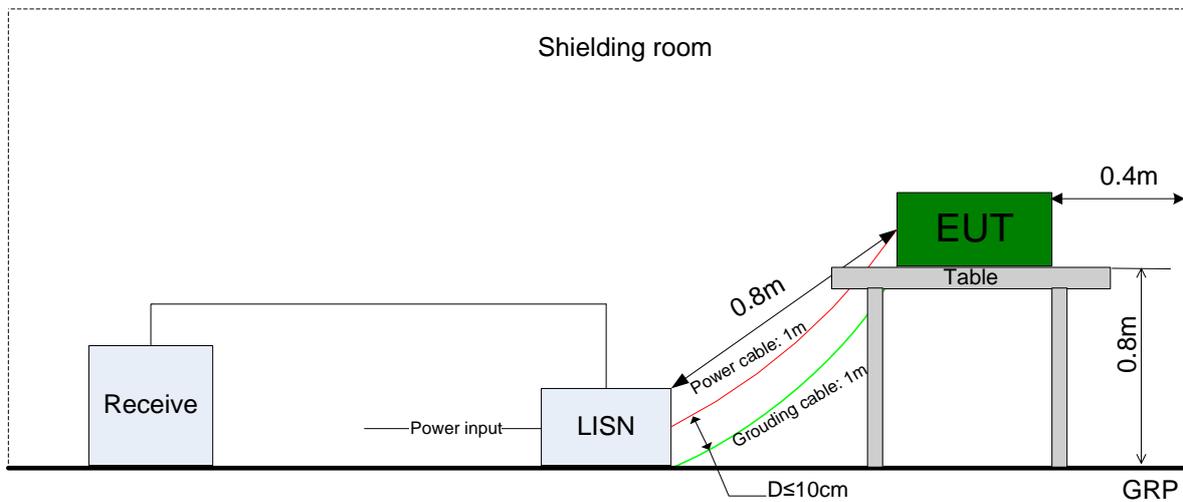

#### 4.7 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §8.2 Option 2.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Maximum Conducted Average Output Power	Measurement Method	FCC KDB 558074 §9.2 .2. 4
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Maximum Power Spectral Density Level	Measurement Method	FCC KDB 558074 §10.5
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Band Edges Compliance	Measurement Method	FCC KDB 558074 §13.0.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_H 11G_L, 11G_H 11N20_L, 11 N20_H
Unwanted Emissions into Non-Restricted Frequency Bands	Measurement Method	FCC KDB 558074 §11.0
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Unwanted Emissions into Restricted Frequency Bands (Radiated)	Measurement Method	ANSI C63.10; FCC KDB 558074 §12.1, Radiated
	Test Environment	NTNV
	Test Setup	Test Setup 2
	EUT Placement	<input type="checkbox"/> Flatwise, <input type="checkbox"/> Upright, <input type="checkbox"/> Hung
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
	EUT Configuration	11x_RX



---

Test Case	Test Conditions	
	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	Test Setup	Test Setup 3
	EUT Configuration	11B_L(Worst Conf.).

**5 Main Test Instruments**

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	A120714713	2014-08-07	2016-08-06
Wireless Communication Test set	Agilent	N4010A	MY49081592	2014-11-04	2015-11-03
Universal Radio Communication Tester	R&S	CMU200	117341	2014-02-25	2015-02-24
Spectrum Analyzer	Agilent	N9020A	MY52090652	2014-07-11	2015-07-10
Universal Radio Communication Tester	R & S	CMW500	126855	2013-08-08	2015-08-09
Spectrum Analyzer	Agilent	E4440A	MY48250119	2014-07-11	2015-07-10
Signal Analyzer	R&S	FSQ31	200021	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9030A	MY49431698	2014-11-04	2015-11-03
Temperature Chamber	WEISS	WKL64	56246002940010	2014-02-25	2015-02-24
Temperature Chamber	ESPEC	MW3030	06114003	2014-05-09	2015-05-08
Signal generator	Agilent	E8257D	MY51500314	2014-05-09	2015-05-08
Vector Signal Generator	R&S	SMU200A	104162	2014-11-04	2015-11-03
Test receiver	R&S	ESU26	100150	2014-05-09	2015-05-08
Spectrum analyzer	R&S	FSU3	200474	2014-11-04	2015-11-03
Spectrum analyzer	R&S	FSU43	100144	2014-11-04	2015-11-03
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2013-02-02	2015-02-01
Trilog Broadband Antenna (30M~3GHz)	SCHWARZ BECK	VULB 9163	9163-490	2013-02-02	2015-02-01
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2013-03-23	2015-03-22
Pyramidal Horn Antenna(18GHz-26-5GHz)	ETS-LIND GREN	3160-09	5140299	2013-03-05	2015-03-04
Artificial Mains Network	R&S	ENV4200	100134	2014-11-04	2015-11-03
Artificial Mains Network	R&S	ENV216	100382	2014-11-04	2015-11-03

END



# FCC

# RF Test Report

**Product Name: Smart Phone**

**Model Number: HUAWEI CHC-U23**

**Report No: SYBH(Z-RF)013122014-2002**

**FCC ID: QISCHC-U23**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

## Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1 and 6369A-3.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.




**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt Sample:** 2014-12-16  
**Start Date of Test:** 2014-12-27  
**End Date of Test:** 2015-01-05

**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2015-01-05	Liu Chunlin	
	Date	Name	Signature

<b>Prepared by:</b>	2015-01-05	Wu Tingsi	
	Date	Name	Signature



### Modification Record

No.	Last Report No.	Modification Description
		First Report



**CONTENT**

1 General Information ..... 6

    1.1 Applied Standard ..... 6

    1.2 Test Location ..... 6

    1.3 Test Environment Condition ..... 6

2 Test Summary ..... 7

3 Description of the Equipment under Test (EUT) ..... 8

    3.1 General Description ..... 8

    3.2 EUT Identity ..... 8

    3.3 Technical Description ..... 9

4 General Test Conditions / Configurations ..... 10

    4.1 Test Modes ..... 10

    4.2 EUT Configurations ..... 10

    4.3 Test Environments ..... 12

    4.4 Antenna requirements ..... 12

    4.5 Description of tests ..... 13

    4.6 Test Setups ..... 15

    4.7 Test Conditions ..... 18

5 Main Test Instruments ..... 20



## 1 General Information

### 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J 2013  
47 CFR FCC Part 15, Subpart C 2013

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v03r02  
ANSI C63.10-2009, American National Standard for Testing Unlicensed  
Wireless Devices.

### 1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3 Test Environment Condition

Ambient Temperature: 19.5to 25 °C  
Ambient Relative Humidity: 40 to 55 %  
Atmospheric Pressure: Not applicable



## 2 Test Summary

Test Item	FCC Part No.	Requirements	Test Result	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	$\geq 500$ kHz.	Appendix A	Pass
Occupied Bandwidth	---	---	Appendix B	Pass
Maximum Conducted Average Output Power	15.247(b)(3)	For directional gain: $< 30$ dBm – (G[dBi] – 6 [dB]), Average; Otherwise: $< 30$ dBm, Average.	Appendix C	Pass
Maximum Power Spectral Density Level	15.247(e)	For directional gain: $< 8$ dBm/3 kHz – (G[dBi] – 6 [dB]), Average. Otherwise: $< 8$ dBm/3 kHz, Average.	Appendix D	Pass
Band Edges Compliance	15.247(d)	$< -30$ dBm/100 kHz if total peak power $\leq$ power limit.	Appendix E	Pass
Unwanted Emissions into Non-Restricted Frequency Bands			Appendix F	Pass
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209 (NOTE 1)	FCC Part 15.209 field strength limit;	Appendix G	Pass
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	Appendix H	Pass
NOTE 1: According to KDB 558074, antenna-port conducted measurements are acceptable as an alternative to radiated measurements for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions will also be required.				

### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

HUAWEI CHC-U23 is subscriber equipment in the GSM/UMTS system. The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The UMTS frequency band is band I and band II and band IV and band V. The Mobile Phone implements such functions as RF signal receiving/transmitting, UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

#### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

##### 3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main Board	HD1CHMUM	CHC-U23 V100R001C900B004

##### 3.2.2 Sub-Assembly

Name	Manufacture	Description
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100E2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100B2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100A2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100U2W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB444199EBC+ Rated capacity: 2550mAh



		Nominal Voltage:  +3.8V
--	--	-------------------------

### 3.3 Technical Description

Characteristics	Description			
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11g (20 MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth)			
TX/RX Operating Range	2412-2462 MHz band	$f_c = 2407 \text{ MHz} + N * 5 \text{ MHz}$ , where: - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth		
Data Rate	802.11b	1 Mbps, 2 Mbps, 5.5 Mbps, 11 Mbps		
	802.11g	6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54 Mbps		
	802.11n (SISO)	MCS 0 to MCS 7		
Modulation Type	DBPSK/DQPSK/CCK (DSSS), BPSK/QPSK/16QAM/64QAM (OFDM).			
Emission Designator	10M95G1D (for 802.11b mode), 16M4G7D (for 802.11g mod), 17M6G7D (for 802.11n mode)			
TX Power Control	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported			
Standby Mode	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported			
Equipment Type	<input type="checkbox"/> Stand-alone equipment, <input type="checkbox"/> Plug-in radio device, <input checked="" type="checkbox"/> Combined equipment			
Antenna	Description	Isotropic Antenna		
	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated		
	Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3		
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11b/g/n), <input type="checkbox"/> MIMO (for 802.11n): 2 Tx & 2 Rx, <input type="checkbox"/> Diversity (for 802.11b/g) :           Tx &           Rx		
	Gain	-2 dBi (per antenna port, max.)		
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.		
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE:	<input type="checkbox"/> Other:



## 4 General Test Conditions / Configurations

### 4.1 Test Modes

NOTE: Worst cases for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11B	IEEE 802.11b with data rate of 1 Mbps using SISO mode.
11G	IEEE 802.11g with data rate of 6 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.

### 4.2 EUT Configurations

#### 4.2.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"> <li>- All TX tests are performed at all TX antenna ports of the EUT, and</li> <li>- All RX tests are performed at all RX antenna ports of the EUT.</li> </ul>
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

#### 4.2.2 Customized Configurations

Test Mode	RF Ch.	Antenna Port	TX Freq. [MHz]	Ch. BW [MHz]	Power Conf., per Port	Duty cycle [%]
11B	L	Ant 1	Ch No. 1 / 2412 MHz	20	170	98
11B	M	Ant 1	Ch No. 6 / 2437 MHz	20	170	98
11B	H	Ant 1	Ch No. 11 / 2462 MHz	20	170	98
11G	L	Ant 1	Ch No. 1 / 2412 MHz	20	160	95
11G	M	Ant 1	Ch No. 6 / 2437 MHz	20	160	95
11G	H	Ant 1	Ch No. 11 / 2462 MHz	20	160	95
11N20	L	Ant 1	Ch No. 1 / 2412 MHz	20	140	95
11N20	M	Ant 1	Ch No. 6 / 2437 MHz	20	140	95



---

Test Mode	RF Ch.	Antenna Port	TX Freq. [MHz]	Ch. BW [MHz]	Power Conf., per Port	Duty cycle [%]
11N20	H	Ant 1	Ch No. 11 / 2462 MHz	20	140	95



### 4.3 Test Environments

NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.8 VDC	Ambient

### 4.4 Antenna requirements

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antennas of the **CHC-U23** are **permanently attached**.  
There are no provisions for connection to an external antenna.

**Conclusion:**

The **Smart Phone FCC ID: QISCHC-U23** unit complies with the requirement of §15.203.

**Ch. Frequency (MHz)**

Ch.	Frequency (MHz)
<b>01</b>	<b>2412</b>
.	.
.	.
<b>06</b>	<b>2437</b>
.	.
.	.
<b>11</b>	<b>2462</b>

**Frequency/ Channel Operations**

## 4.5 Description of tests

### 4.5.1 Bandwidth measurement

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz, then set the measured frequency number and test the bandwidth with spectrum analyzer.

### 4.5.2 Duty Cycle measurement

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz, then set the measured frequency number and test the Duty Cycle with spectrum analyzer.

### 4.5.3 Maximum Conducted Average Output Power

- (a) Connect EUT test port to spectrum analyzer.
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

### 4.5.4 Band edge spurious emission

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, low frequency and measure the conducted band edge spurious separately.

### 4.5.5 Conducted RF spurious

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted spurious separately.

### 4.5.6 Power spectral density

- (a) Connect EUT test port to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted power spectral density.

### 4.5.7 Radiated spurious emission & spurious in restricted band

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2009. The Radiated Disturbance measurements were made using a Rohde and Schwarz Test Receiver and control software.

A preliminary scan and a final scan of the emissions were made by using test script of software; the emissions were measured using a Quasi-Peak Detector below 1GHz, Peak Detector and AV Detector

above 1GHz. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, and the azimuth range of turntable was 0° to 360°. The receive antenna has two polarizations V and H.

A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other nonmetallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized.

The EUT communicates with the BTS simulator through Air interface. The EUT operated on the typical channel.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 kHz

Measurement bandwidth: 1000 MHz – 10<sup>th</sup> Carrier Frequency: 1 MHz

#### **4.5.8 Conducted Emission at Power Port**

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2009.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.


The EUT communicates with the BTS simulator through Air interface, the BTS simulator controls the Wireless Modem to transmitter the maximum power which defined in specification of product. The Wireless Modem operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

## 4.6 Test Setups

### 4.6.1 Test Setup 1


The WLAN component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

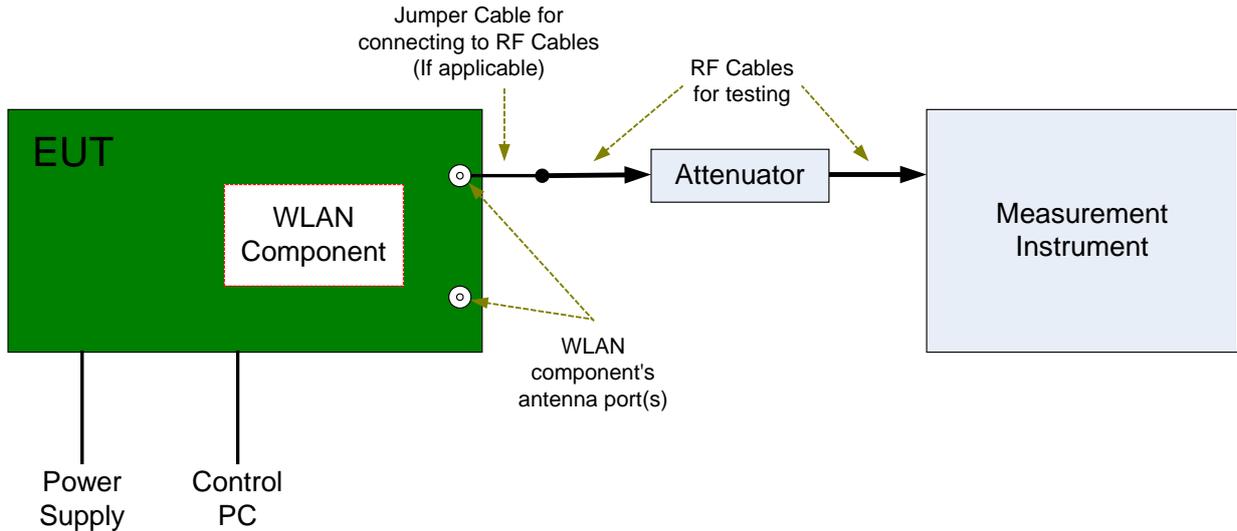


### 4.6.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

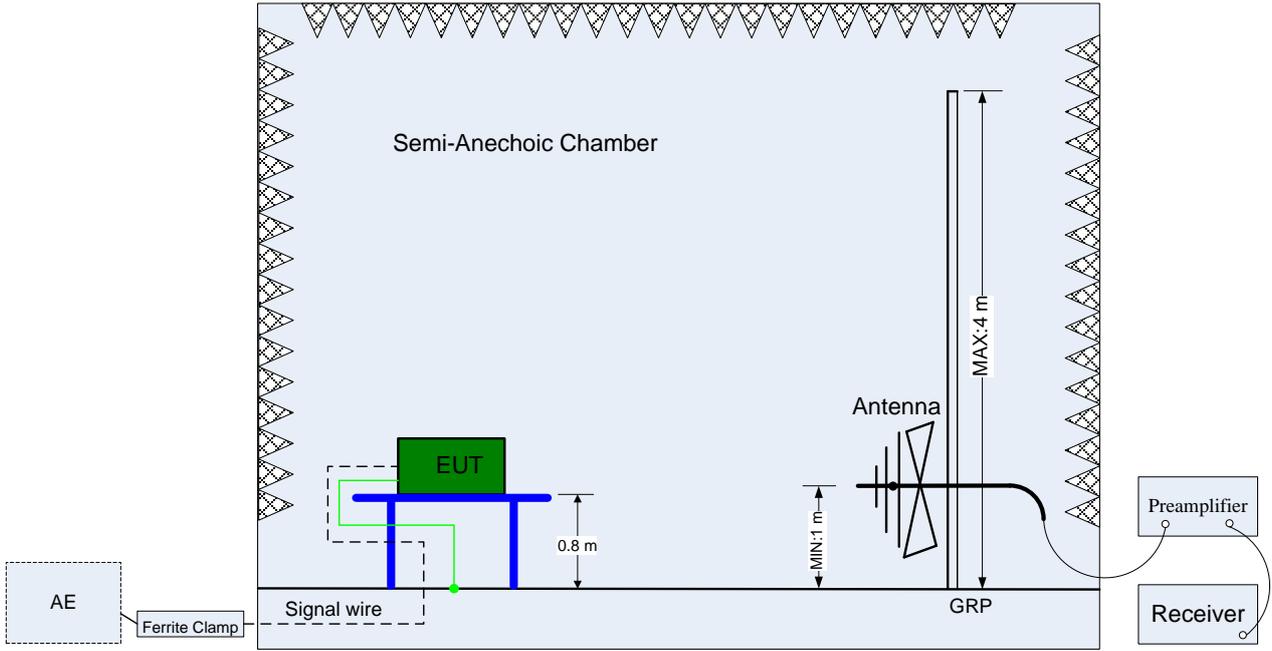

(Below 1 GHz)

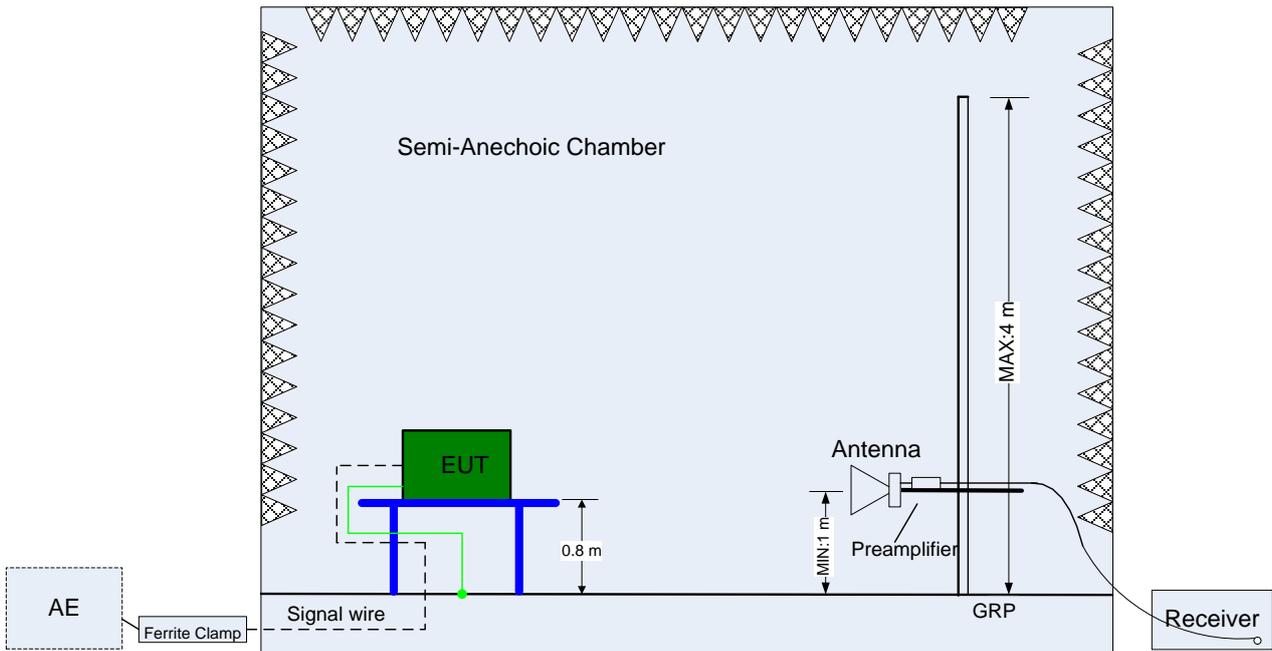


(Above 1 GHz)

### 4.6.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

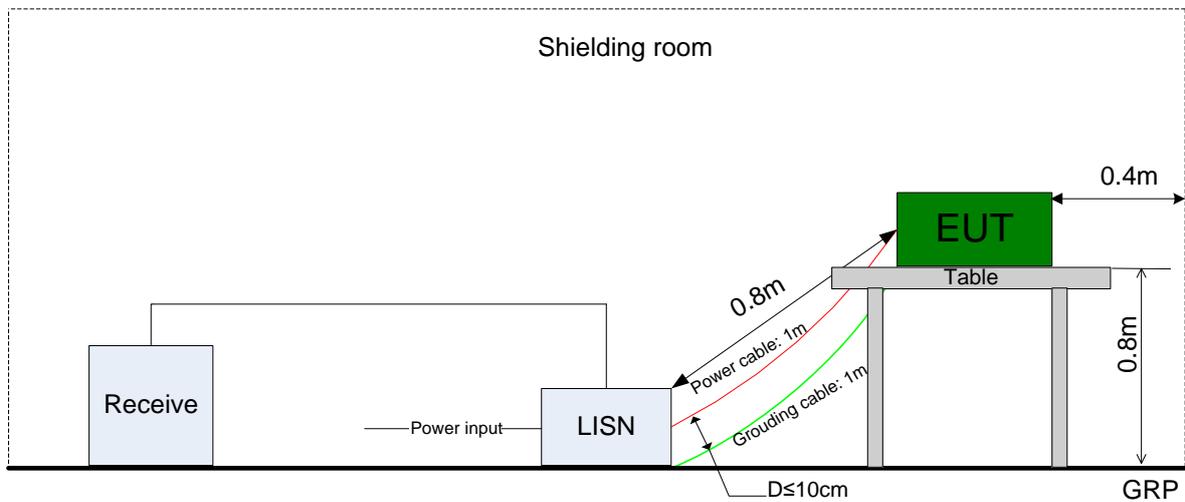

#### 4.7 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §8.2 Option 2.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Maximum Conducted Average Output Power	Measurement Method	FCC KDB 558074 §9.2 .2. 4
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Maximum Power Spectral Density Level	Measurement Method	FCC KDB 558074 §10.5
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Band Edges Compliance	Measurement Method	FCC KDB 558074 §13.0.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_H 11G_L, 11G_H 11N20_L, 11 N20_H
Unwanted Emissions into Non-Restricted Frequency Bands	Measurement Method	FCC KDB 558074 §11.0
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
Unwanted Emissions into Restricted Frequency Bands (Radiated)	Measurement Method	ANSI C63.10; FCC KDB 558074 §12.1, Radiated
	Test Environment	NTNV
	Test Setup	Test Setup 2
	EUT Placement	<input type="checkbox"/> Flatwise, <input type="checkbox"/> Upright, <input type="checkbox"/> Hung
	EUT Configuration	11B_L, 11B_M, 11B_H 11G_L, 11G_M, 11G_H 11N20_L, 11 N20_M, 11 N20_H
	EUT Configuration	11x_RX



---

Test Case	Test Conditions	
	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	Test Setup	Test Setup 3
	EUT Configuration	11B_L(Worst Conf.).

**5 Main Test Instruments**

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	A120714713	2014-08-07	2016-08-06
Wireless Communication Test set	Agilent	N4010A	MY49081592	2014-11-04	2015-11-03
Universal Radio Communication Tester	R&S	CMU200	117341	2014-02-25	2015-02-24
Spectrum Analyzer	Agilent	N9020A	MY52090652	2014-07-11	2015-07-10
Universal Radio Communication Tester	R & S	CMW500	126855	2013-08-08	2015-08-09
Spectrum Analyzer	Agilent	E4440A	MY48250119	2014-07-11	2015-07-10
Signal Analyzer	R&S	FSQ31	200021	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9030A	MY49431698	2014-11-04	2015-11-03
Temperature Chamber	WEISS	WKL64	56246002940010	2014-02-25	2015-02-24
Temperature Chamber	ESPEC	MW3030	06114003	2014-05-09	2015-05-08
Signal generator	Agilent	E8257D	MY51500314	2014-05-09	2015-05-08
Vector Signal Generator	R&S	SMU200A	104162	2014-11-04	2015-11-03
Test receiver	R&S	ESU26	100150	2014-05-09	2015-05-08
Spectrum analyzer	R&S	FSU3	200474	2014-11-04	2015-11-03
Spectrum analyzer	R&S	FSU43	100144	2014-11-04	2015-11-03
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2013-02-02	2015-02-01
Trilog Broadband Antenna (30M~3GHz)	SCHWARZ BECK	VULB 9163	9163-490	2013-02-02	2015-02-01
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2013-03-23	2015-03-22
Pyramidal Horn Antenna(18GHz-26-5GHz)	ETS-LIND GREN	3160-09	5140299	2013-03-05	2015-03-04
Artificial Mains Network	R&S	ENV4200	100134	2014-11-04	2015-11-03
Artificial Mains Network	R&S	ENV216	100382	2014-11-04	2015-11-03

END



# Appendix for Test report



## Appendix A: DTS (6 dB) Bandwidth

In this document, the "DTS6dBBW" refers to the measured "DTS (6 dB) Bandwidth" value. In this Appendix, the "fc(DTS6dBBW)" refers to the centre of the measured "DTS6dBBW". The introduction of the "fc(DTS6dBBW)" is due to that other measurements use it as the spectrum analyzer setting.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	DTS6dBBW[MHz]	Verdict
11B	L	2412	Ant 1	8.14	pass
11B	M	2437	Ant 1	8.13	pass
11B	H	2462	Ant 1	8.30	pass
11G	L	2412	Ant 1	16.53	pass
11G	M	2437	Ant 1	16.53	pass
11G	H	2462	Ant 1	16.54	pass
11N20	L	2412	Ant 1	17.72	pass
11N20	M	2437	Ant 1	17.72	pass
11N20	H	2462	Ant 1	17.74	pass




Part II - Test Plots

2.1 11B\_L@Ant 1






2.3 11B\_M@Ant 1

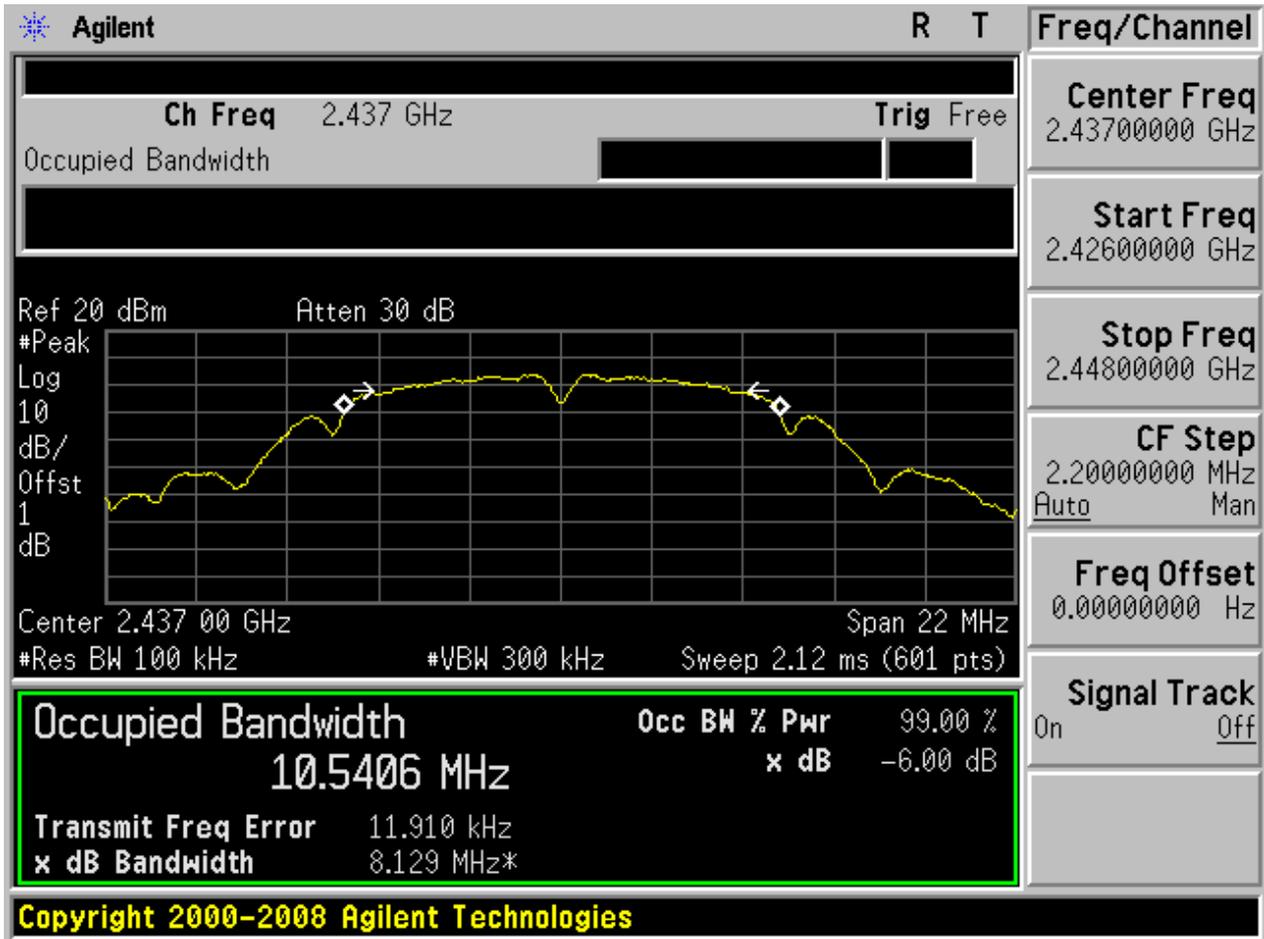




2.5 11B\_H@Ant 1

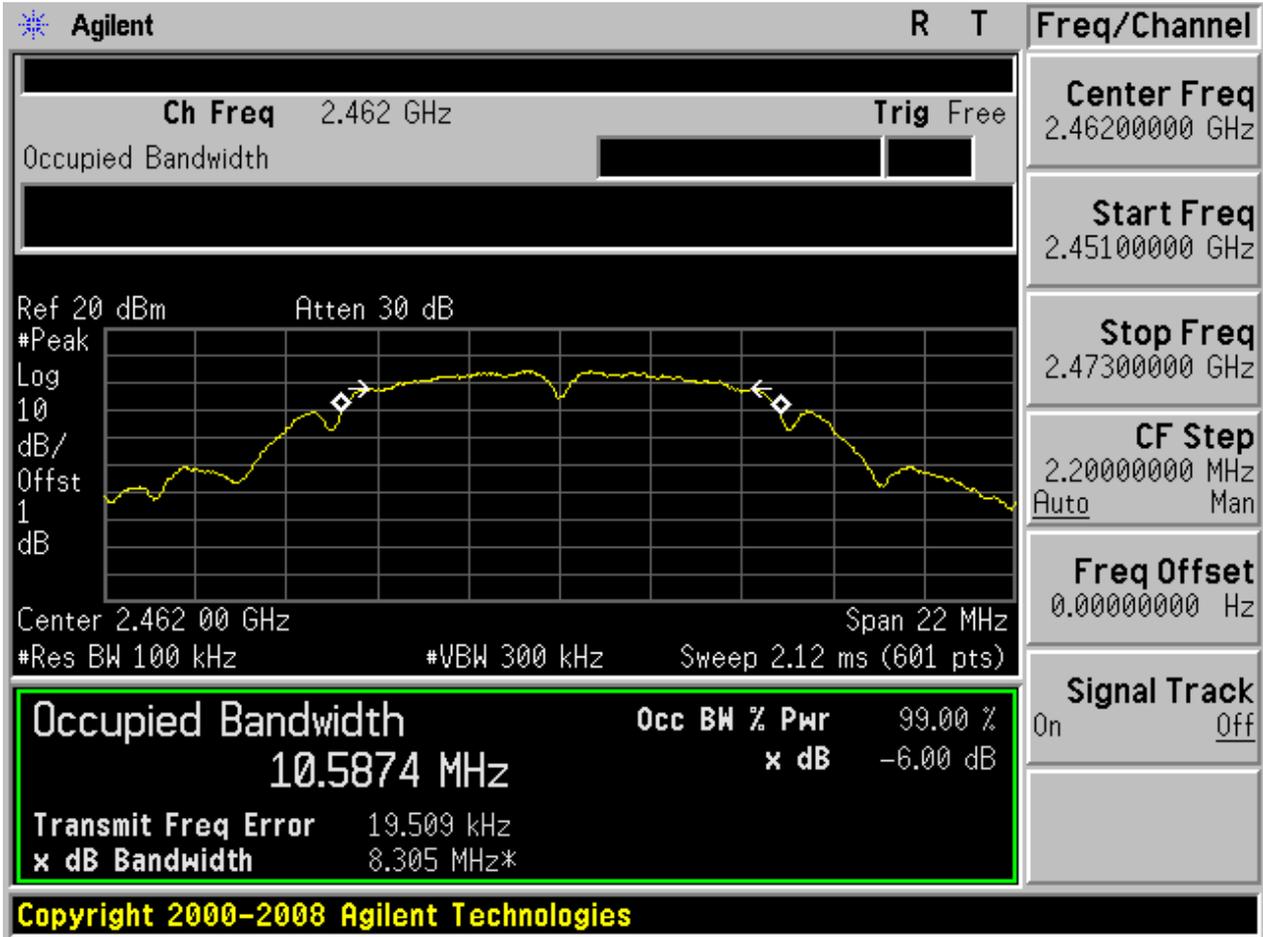




2.7 11G\_L@Ant 1

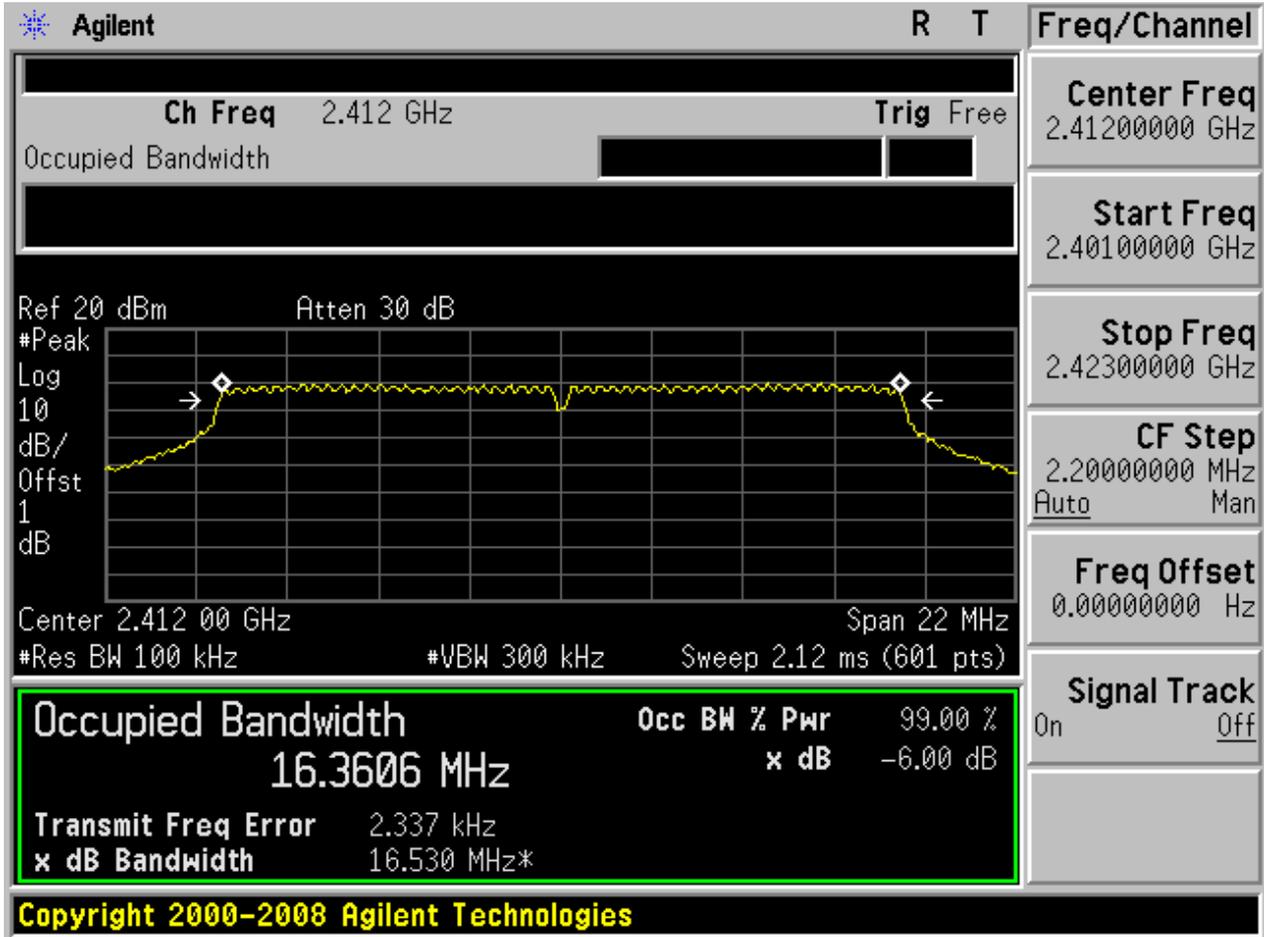




2.9 11G\_M@Ant 1

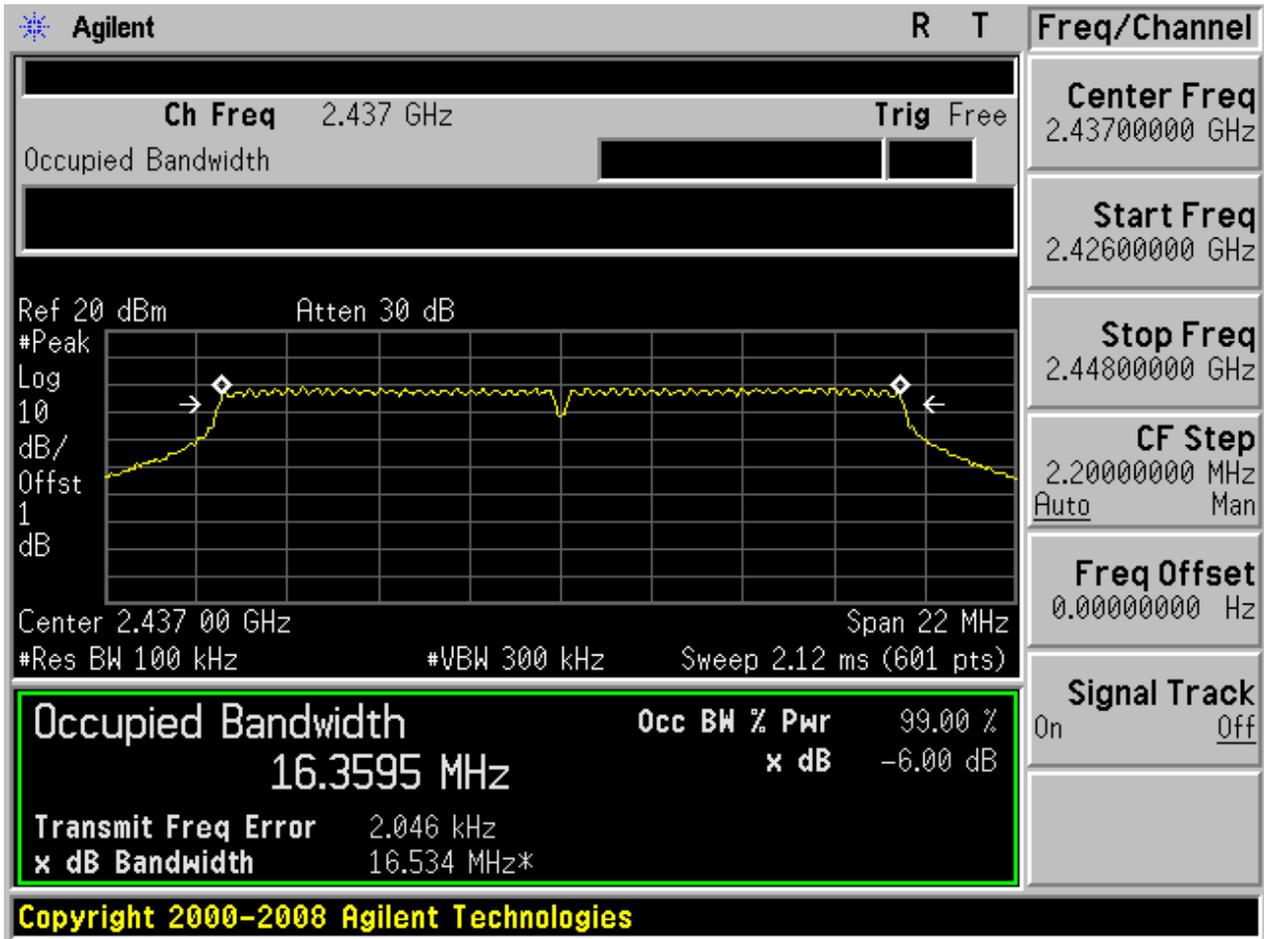




2.11 11G\_H@Ant 1

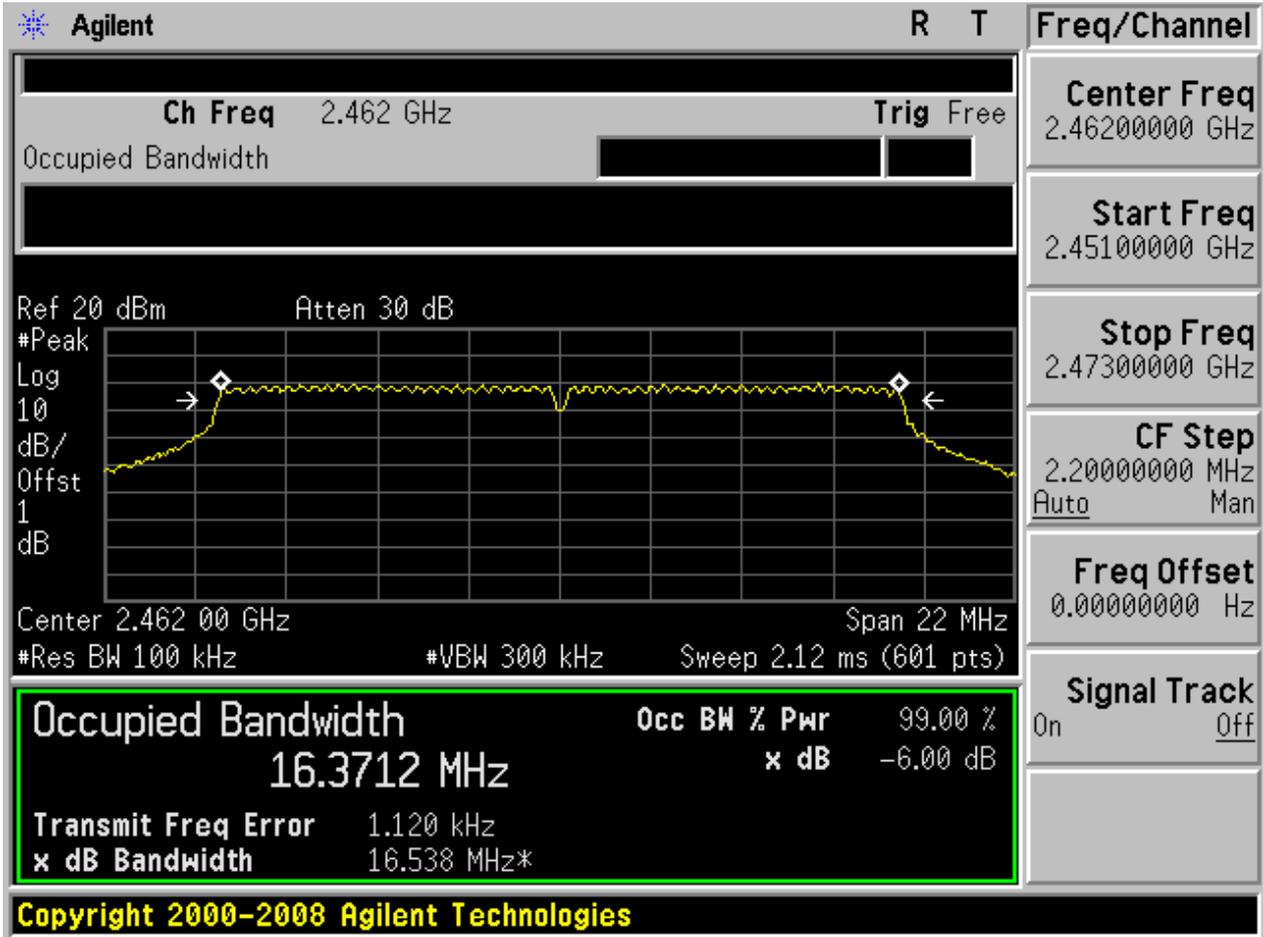




2.13 11N20\_L@Ant 1

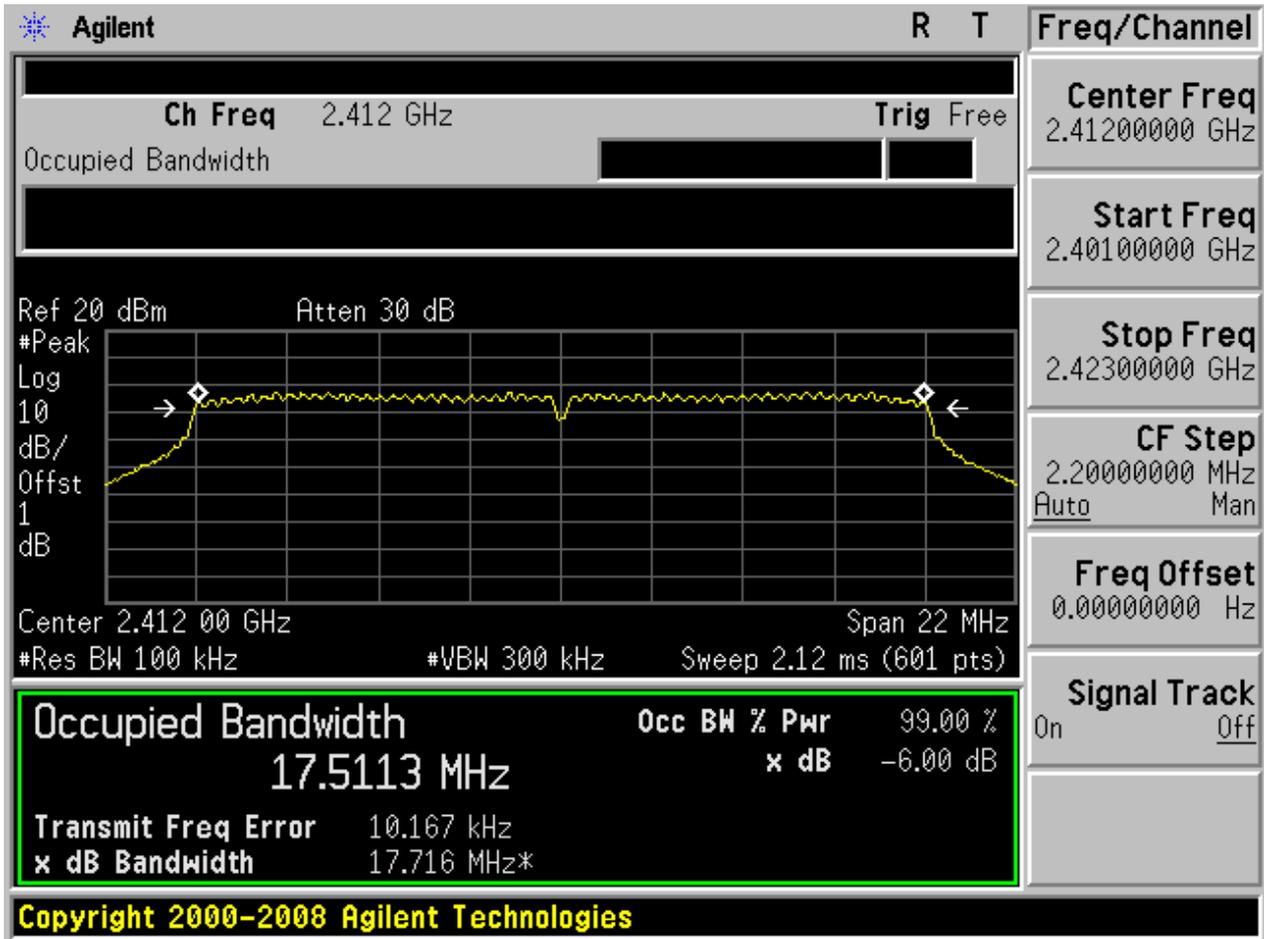




2.15 11N20\_M@Ant 1

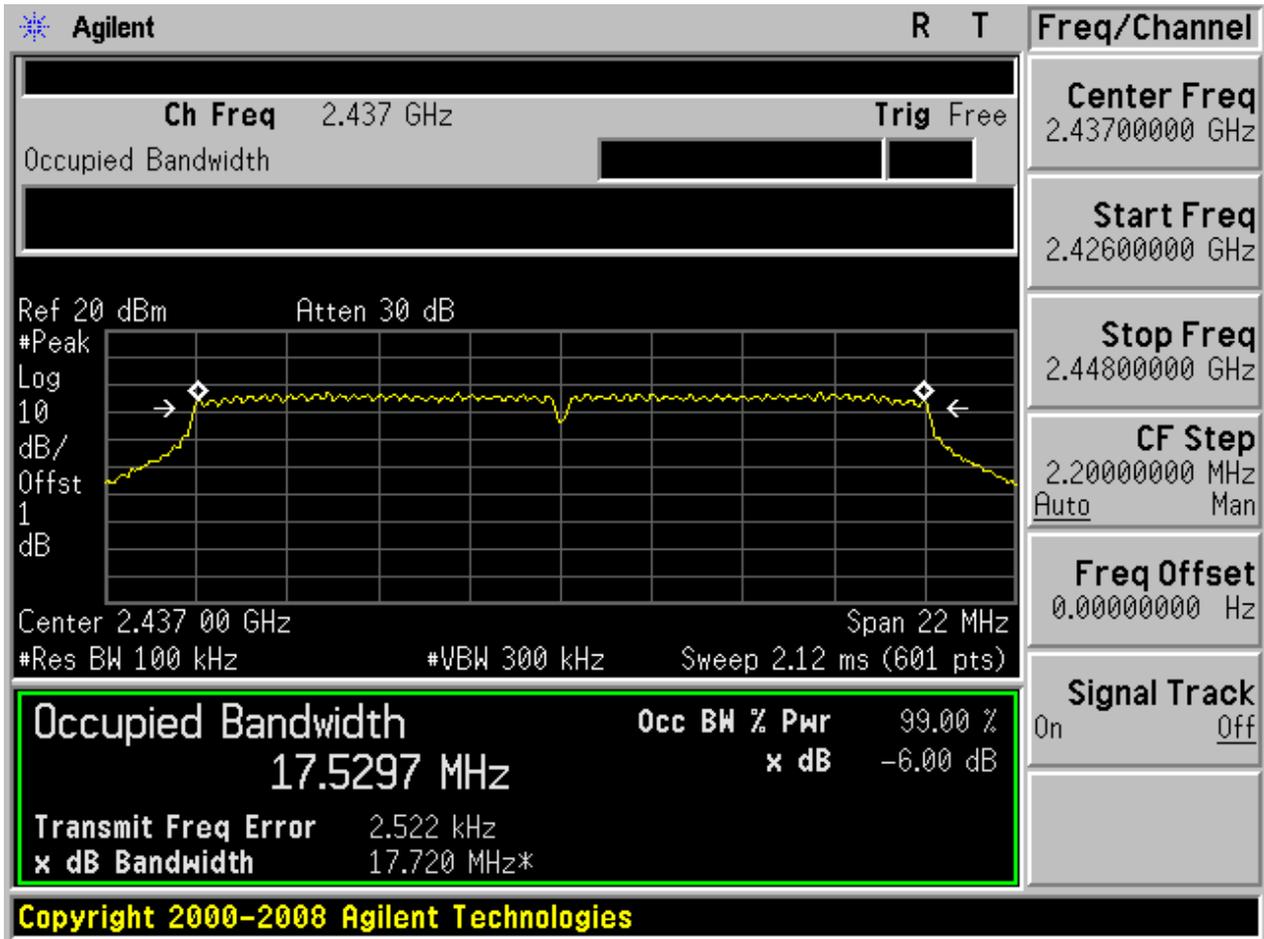



2.17 11N20\_H@Ant 1

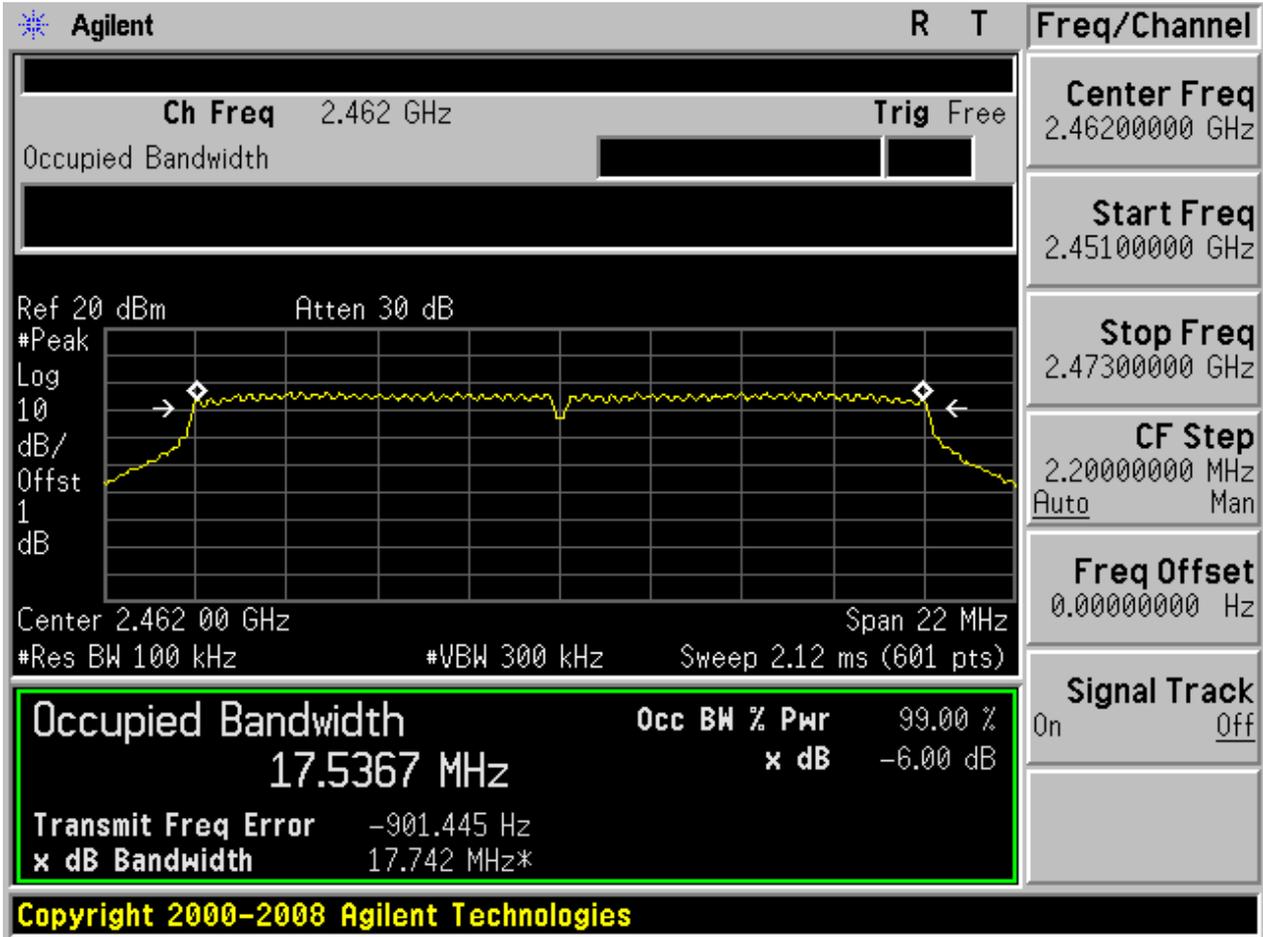



## Appendix B: Occupied Bandwidth


For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.

### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Occupied Bandwidth [MHz]	Verdict
11B	L	2412	Ant 1	10.49	pass
11B	M	2437	Ant 1	10.95	pass
11B	H	2462	Ant 1	10.60	pass
11G	L	2412	Ant 1	16.43	pass
11G	M	2437	Ant 1	16.41	pass
11G	H	2462	Ant 1	16.42	pass
11N20	L	2412	Ant 1	17.56	pass
11N20	M	2437	Ant 1	17.51	pass
11N20	H	2462	Ant 1	17.56	pass


Part II - Test Plots

2.1 11B\_L@Ant 1

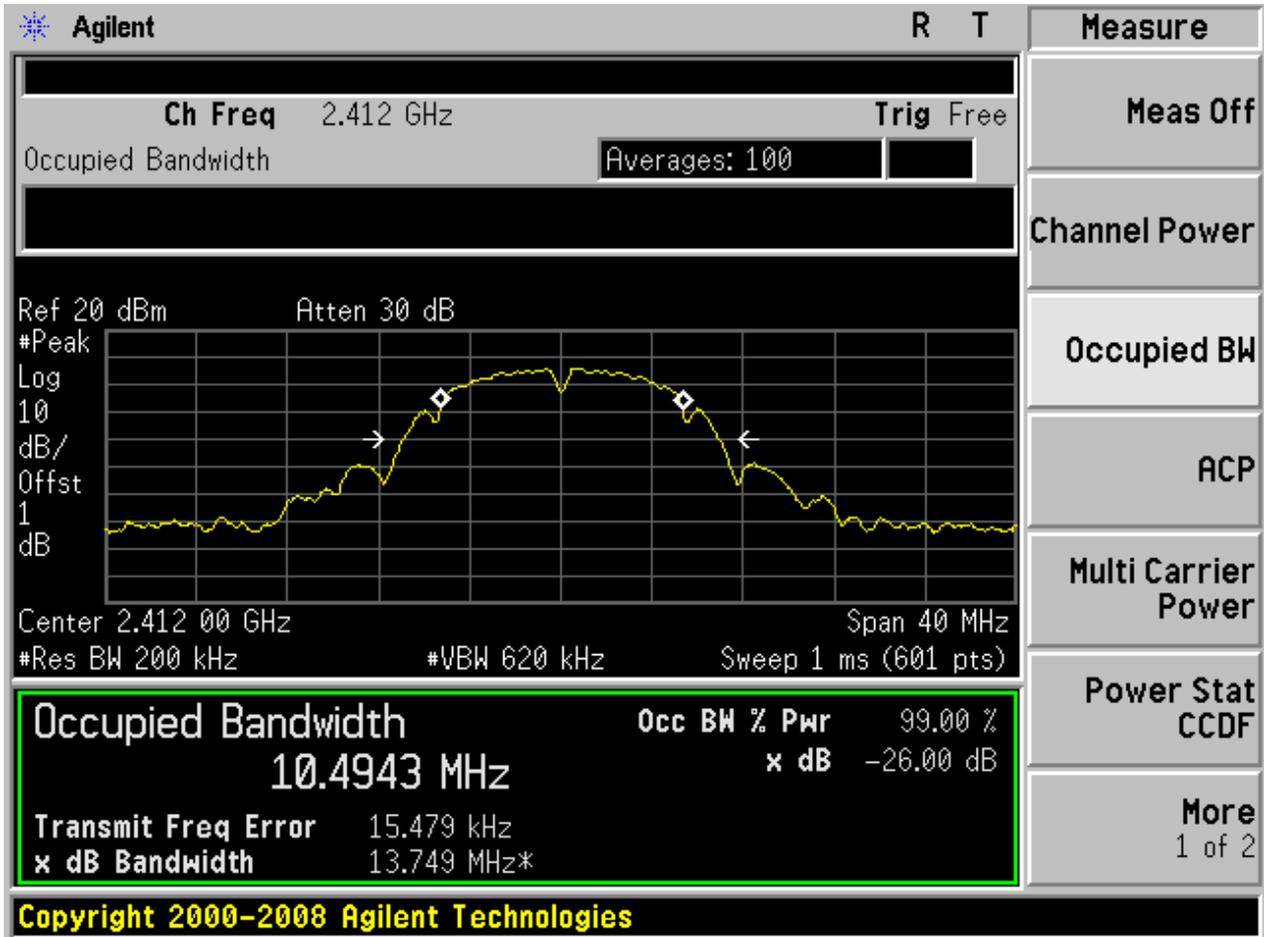




2.3 11B\_M@Ant 1

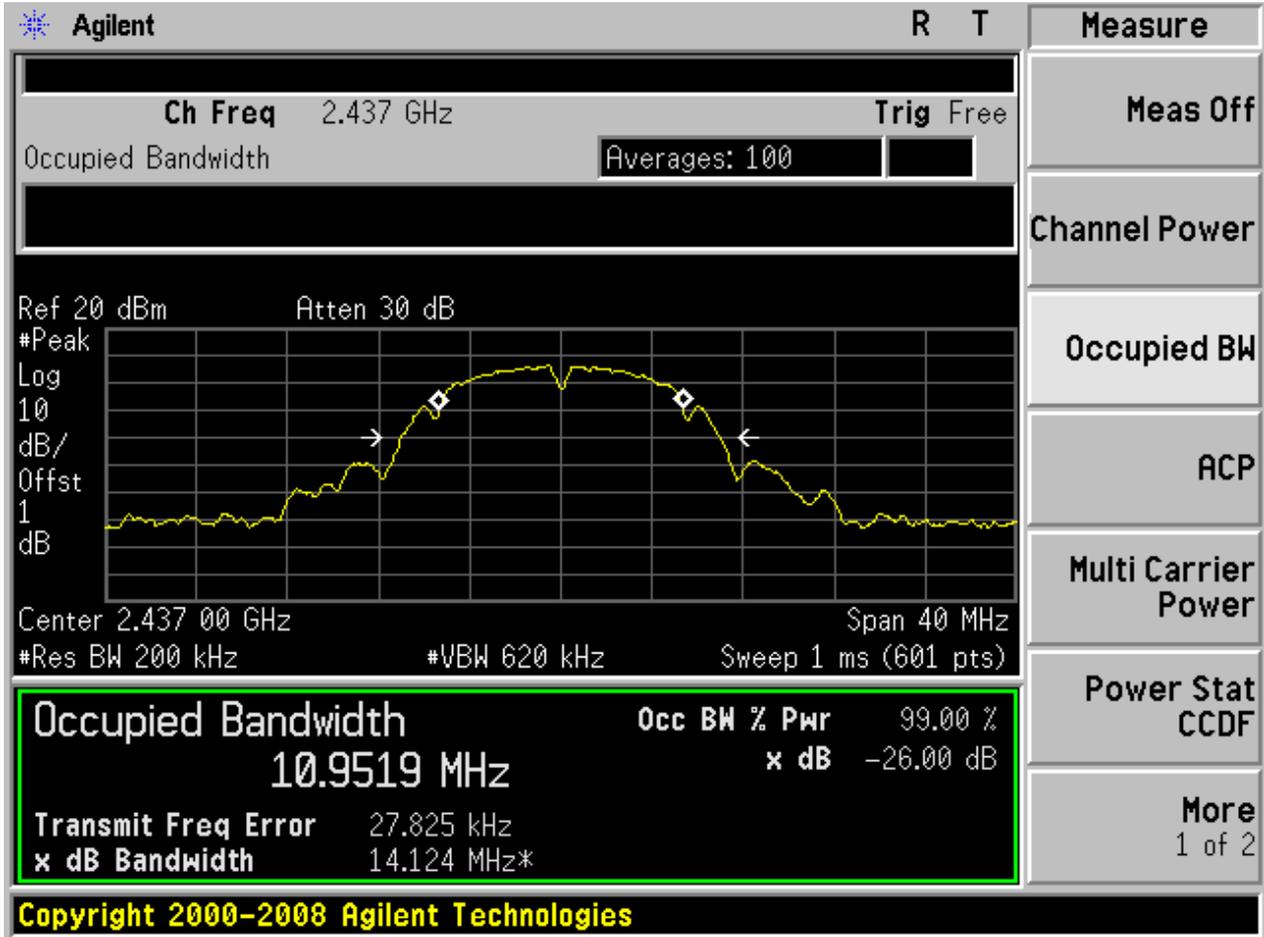




2.5 11B\_H@Ant 1

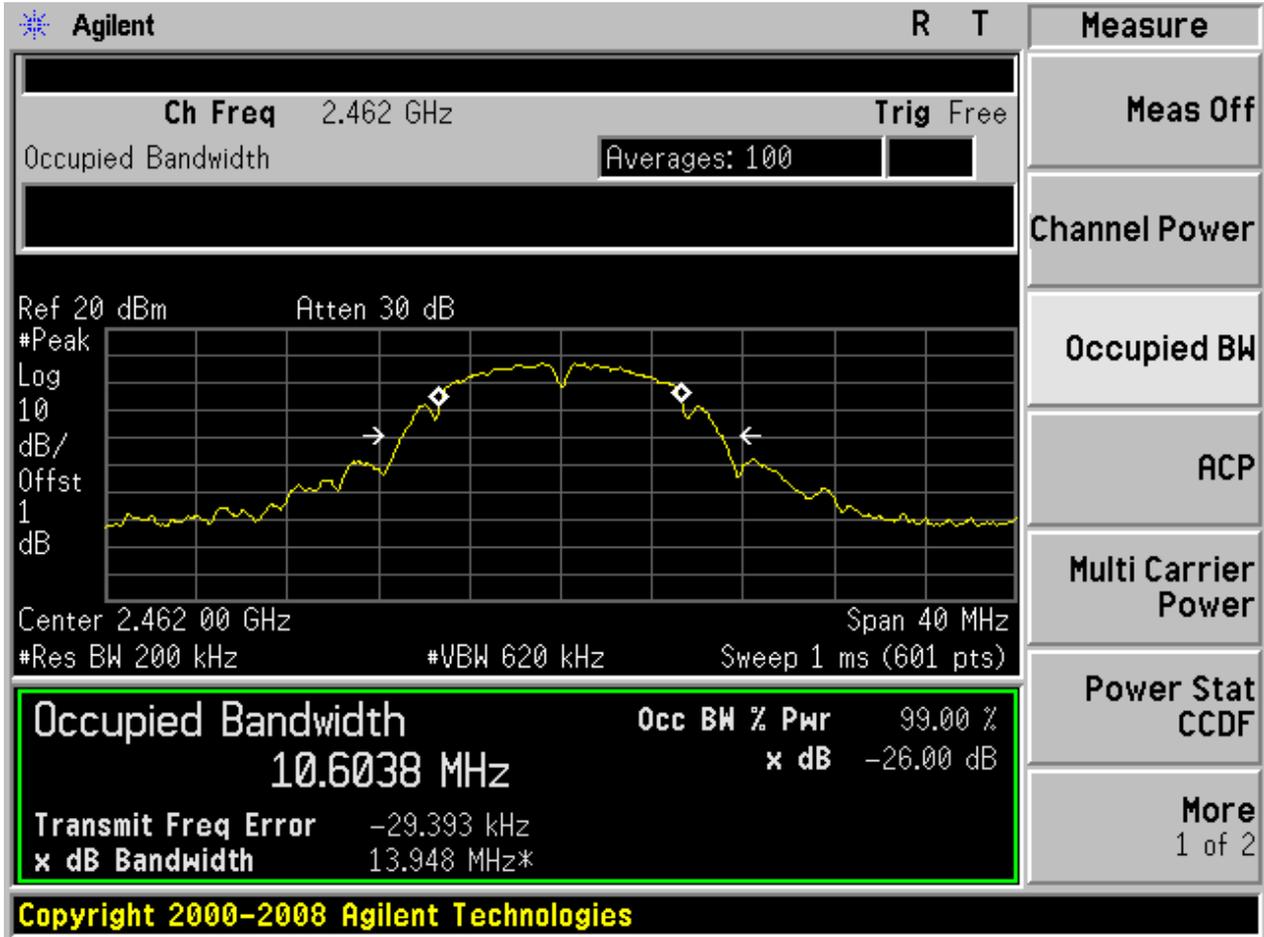




2.7 11G\_L@Ant 1

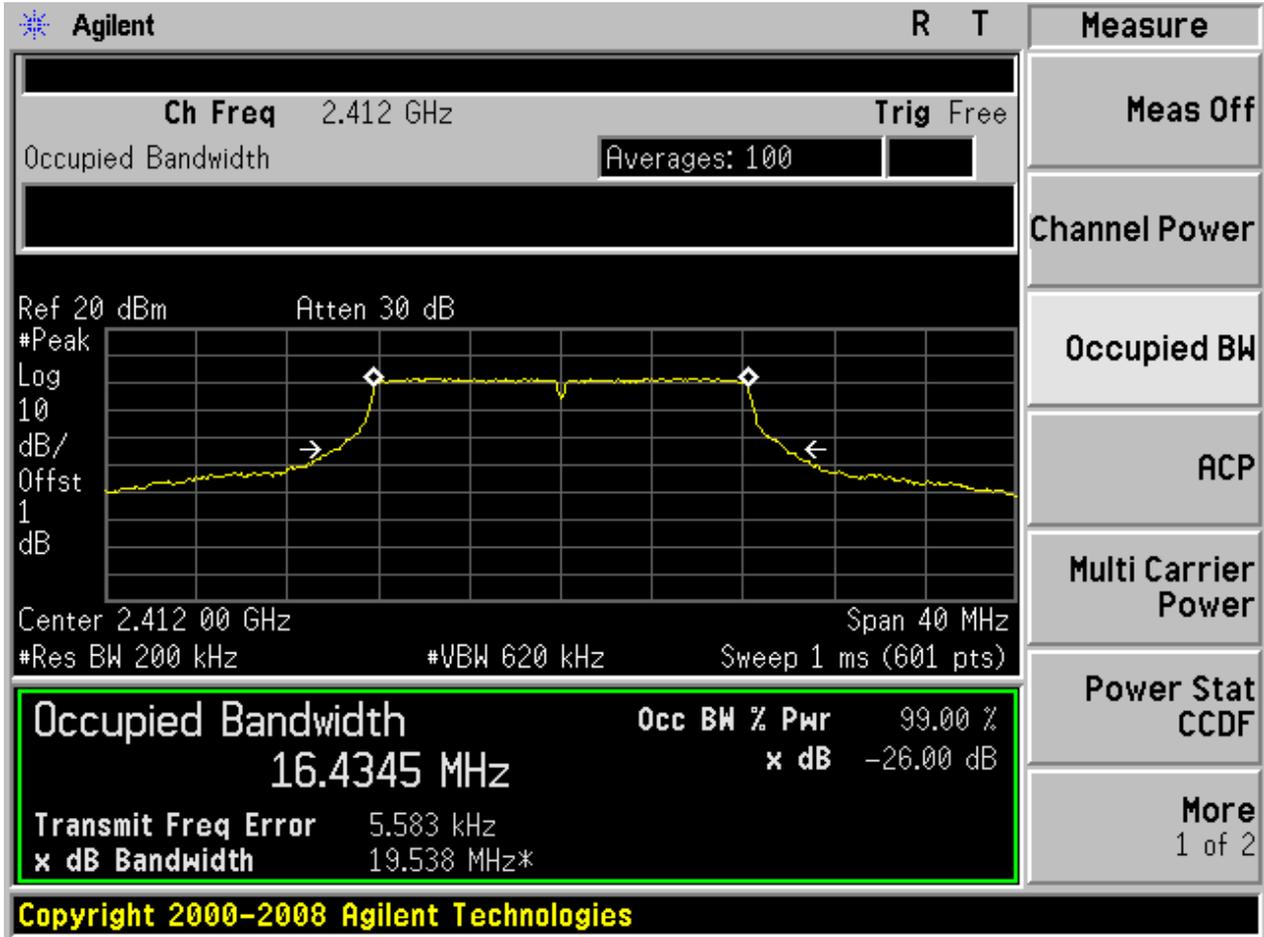




2.9 11G\_M@Ant 1

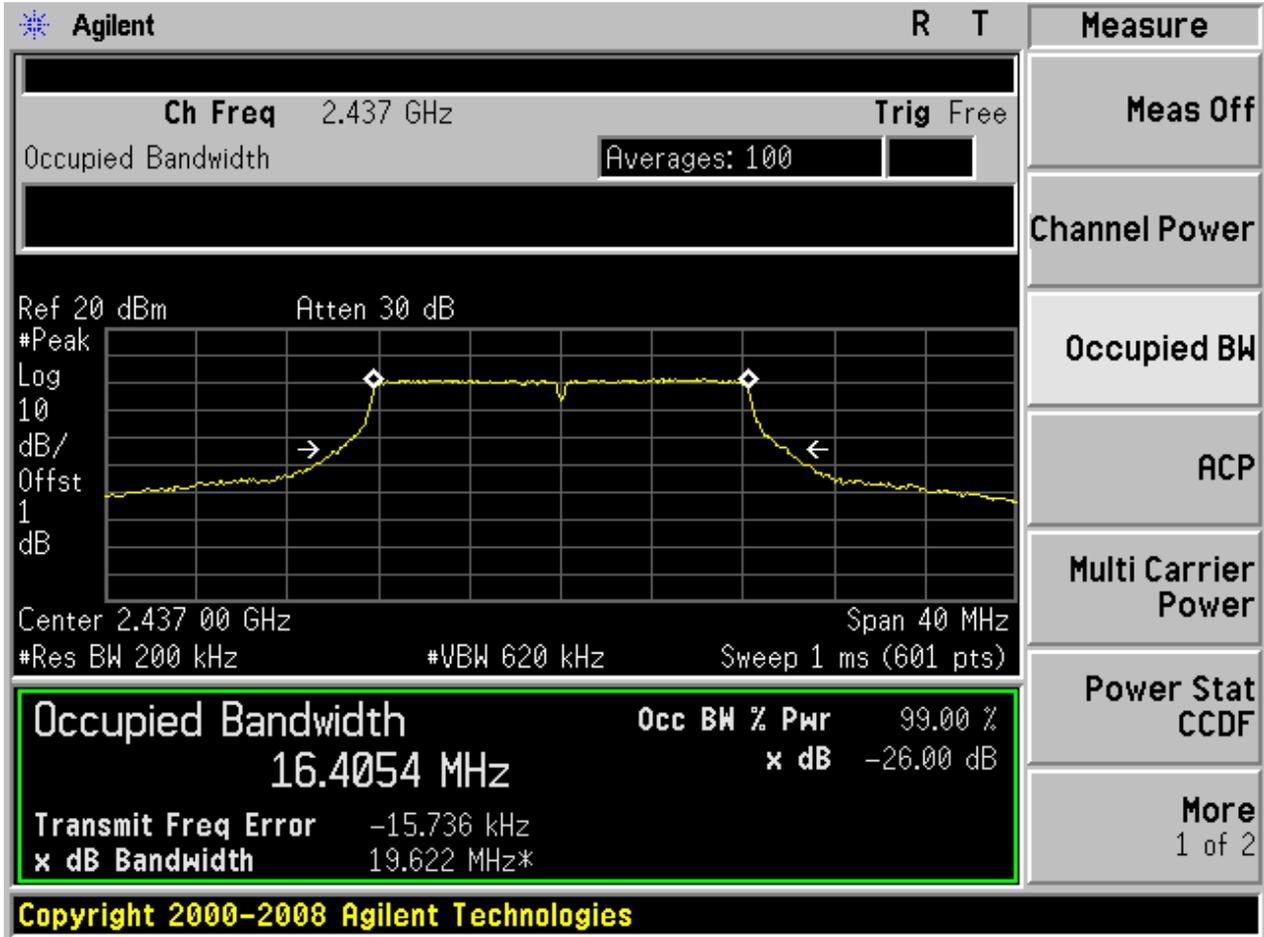




2.11 11G\_H@Ant 1

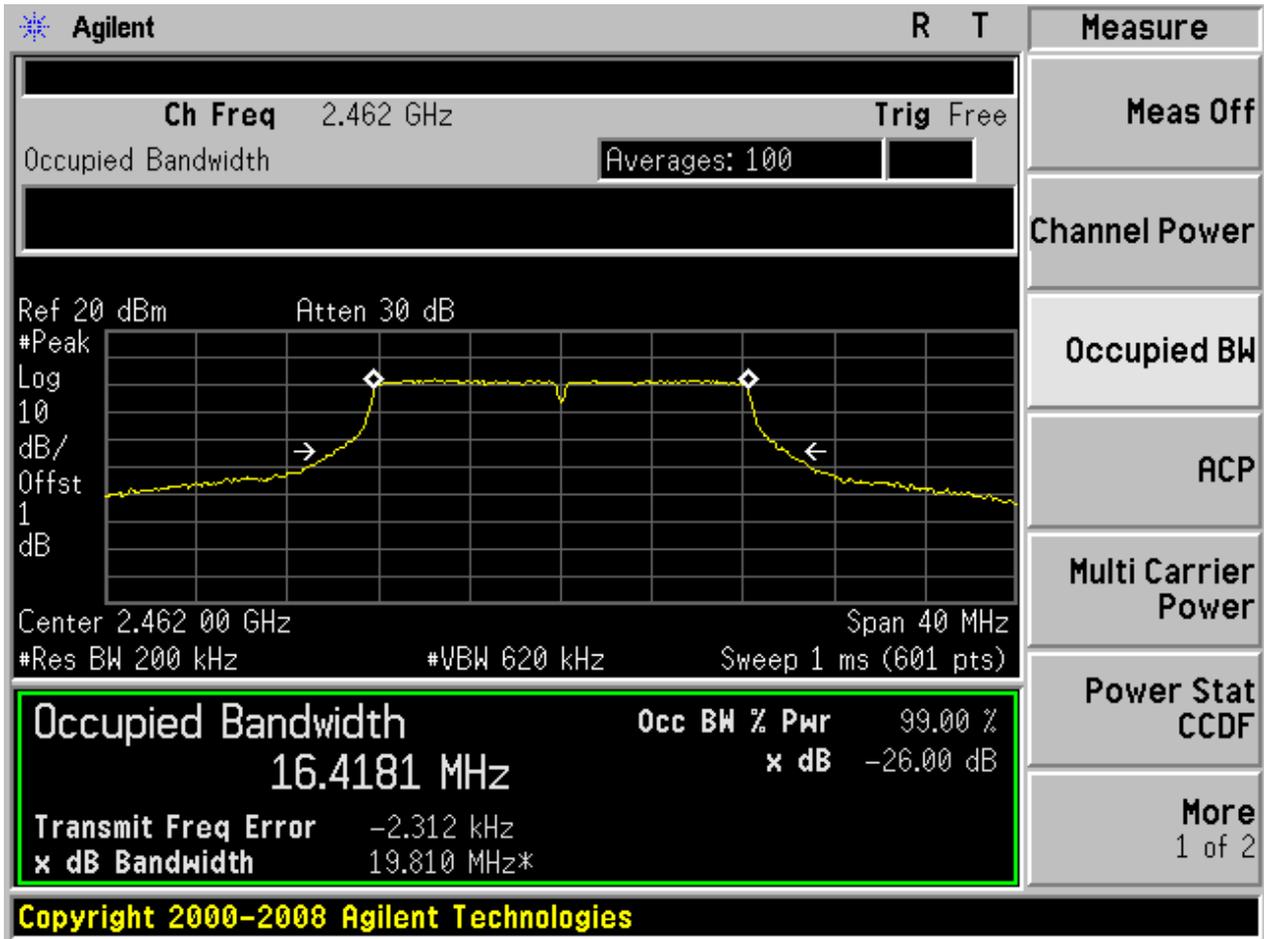




2.13 11N20\_L@Ant 1

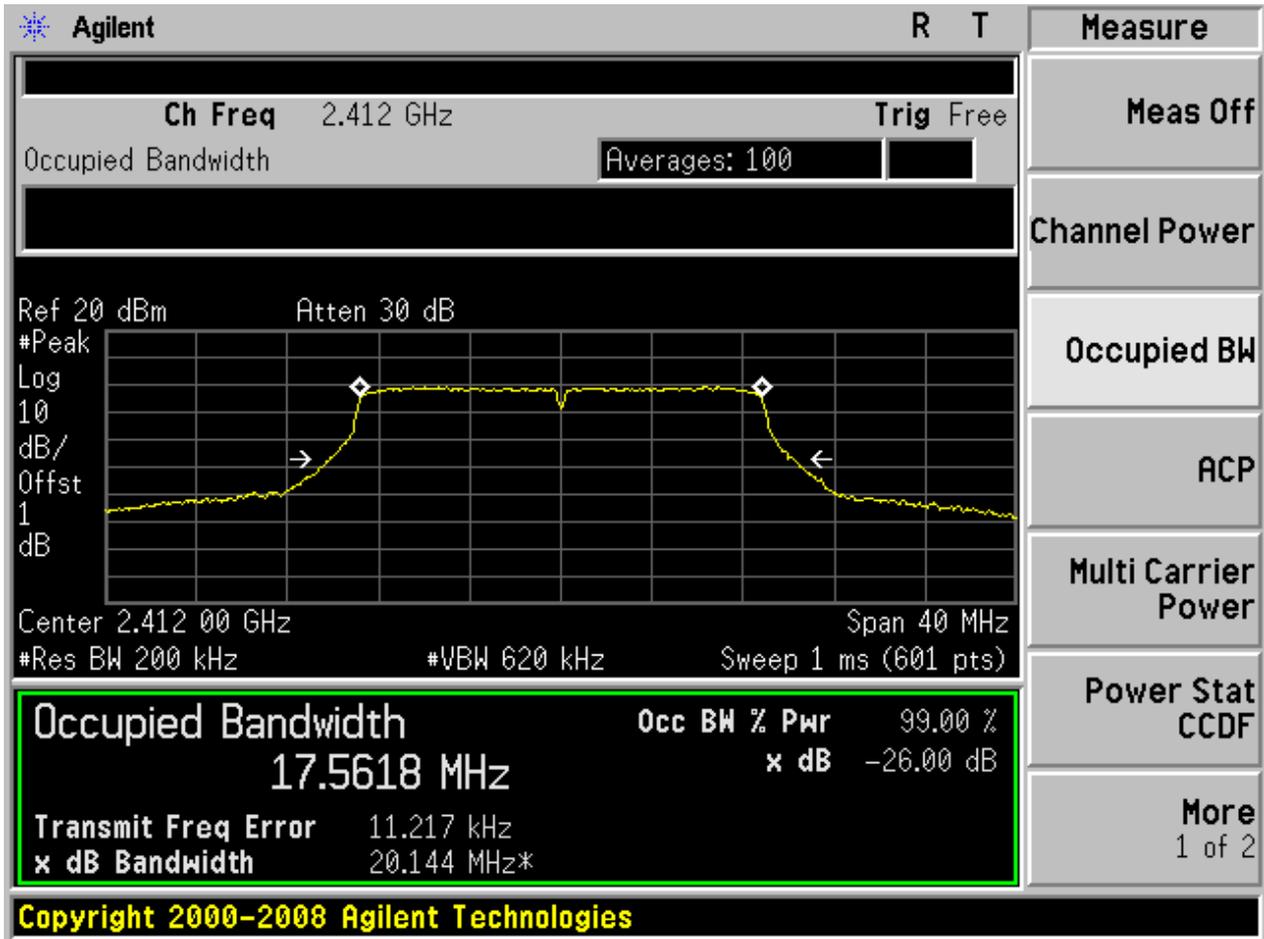

2.15 11N20\_M@Ant 1

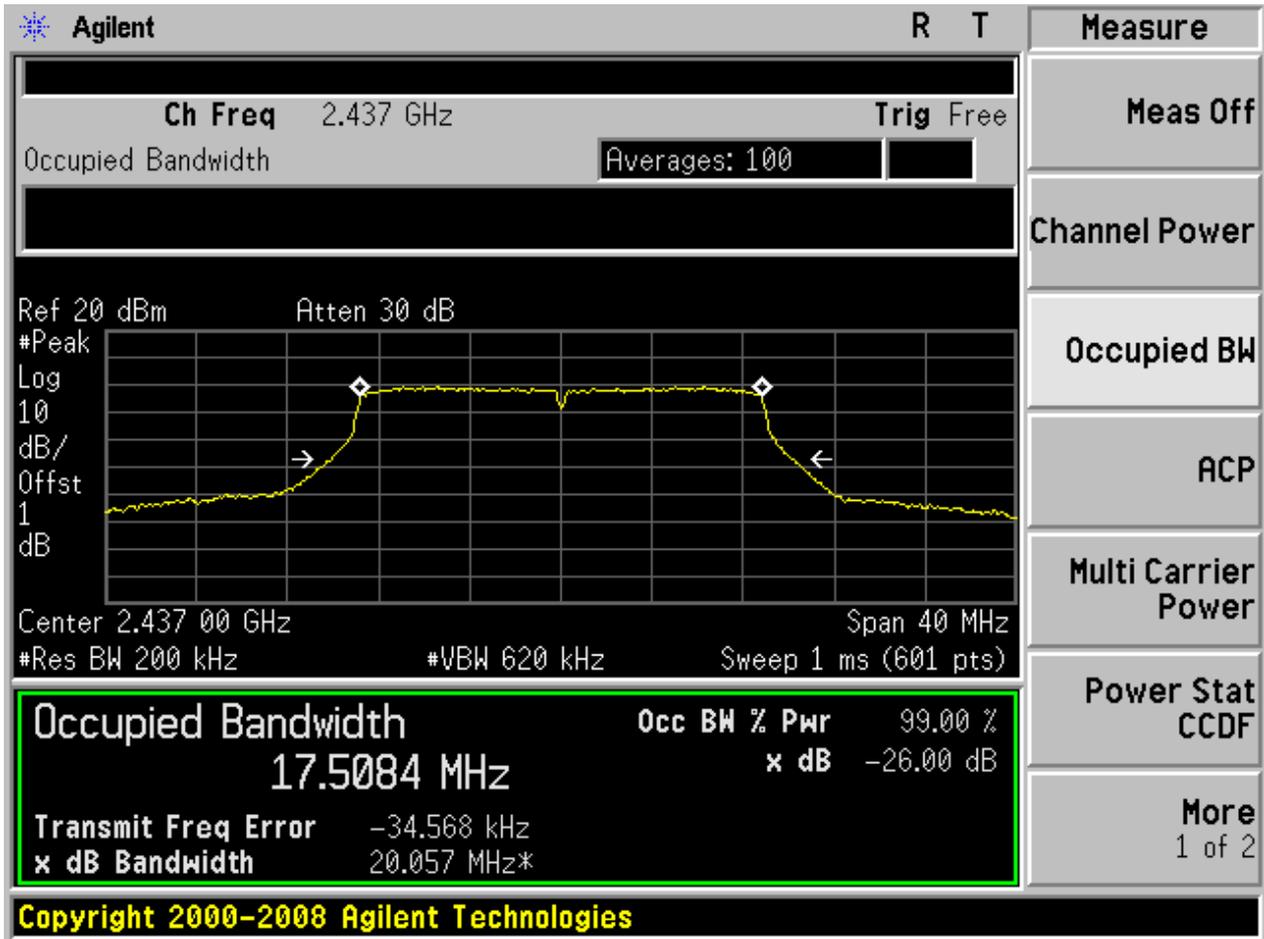



2.17 11N20\_H@Ant 1

Agilent R T Measure

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth Averages: 100

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/Offst 1 dB

Center 2.462 00 GHz Span 40 MHz

#Res BW 200 kHz #VBW 620 kHz Sweep 1 ms (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
<b>17.5615 MHz</b>	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>		-7.011 kHz
<b>x dB Bandwidth</b>		20.080 MHz*

Power Stat CCDF

More 1 of 2

Copyright 2000-2008 Agilent Technologies




## Appendix C: Maximum Conducted Average Output Power

### Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Ant	Power[dBm]	Verdict
11B	L	2412	Ant 1	18.35	pass
11B	M	2437	Ant 1	18.86	pass
11B	H	2462	Ant 1	19.48	pass
11G	L	2412	Ant 1	18.26	pass
11G	M	2437	Ant 1	17.77	pass
11G	H	2462	Ant 1	18.16	pass
11N20	L	2412	Ant 1	15.93	pass
11N20	M	2437	Ant 1	15.84	pass
11N20	H	2462	Ant 1	15.44	pass

Part II - Test Plots


2.1 11B\_L@Ant 1

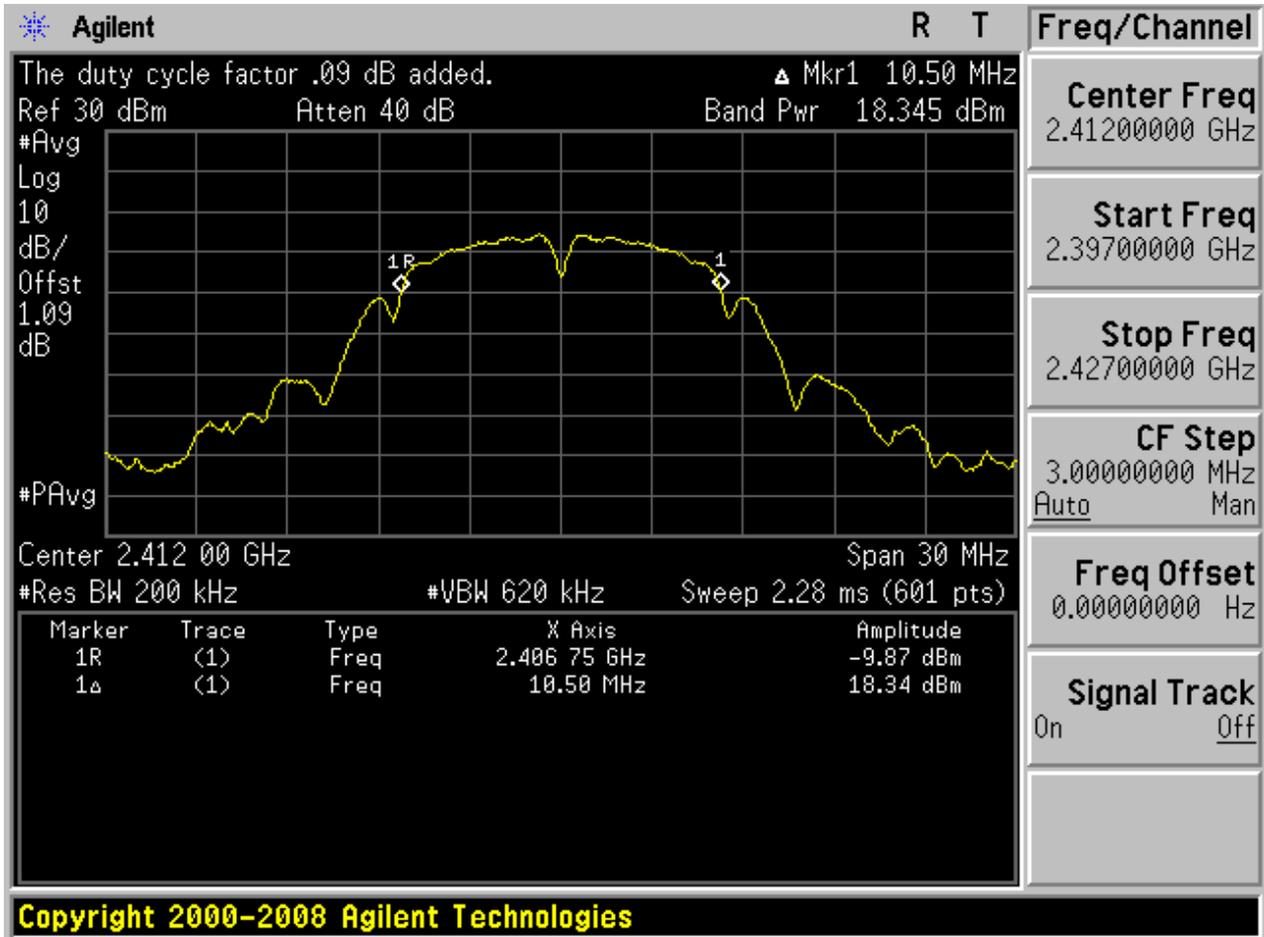

Copyright 2000-2008 Agilent Technologies




2.3 11B\_M@Ant 1

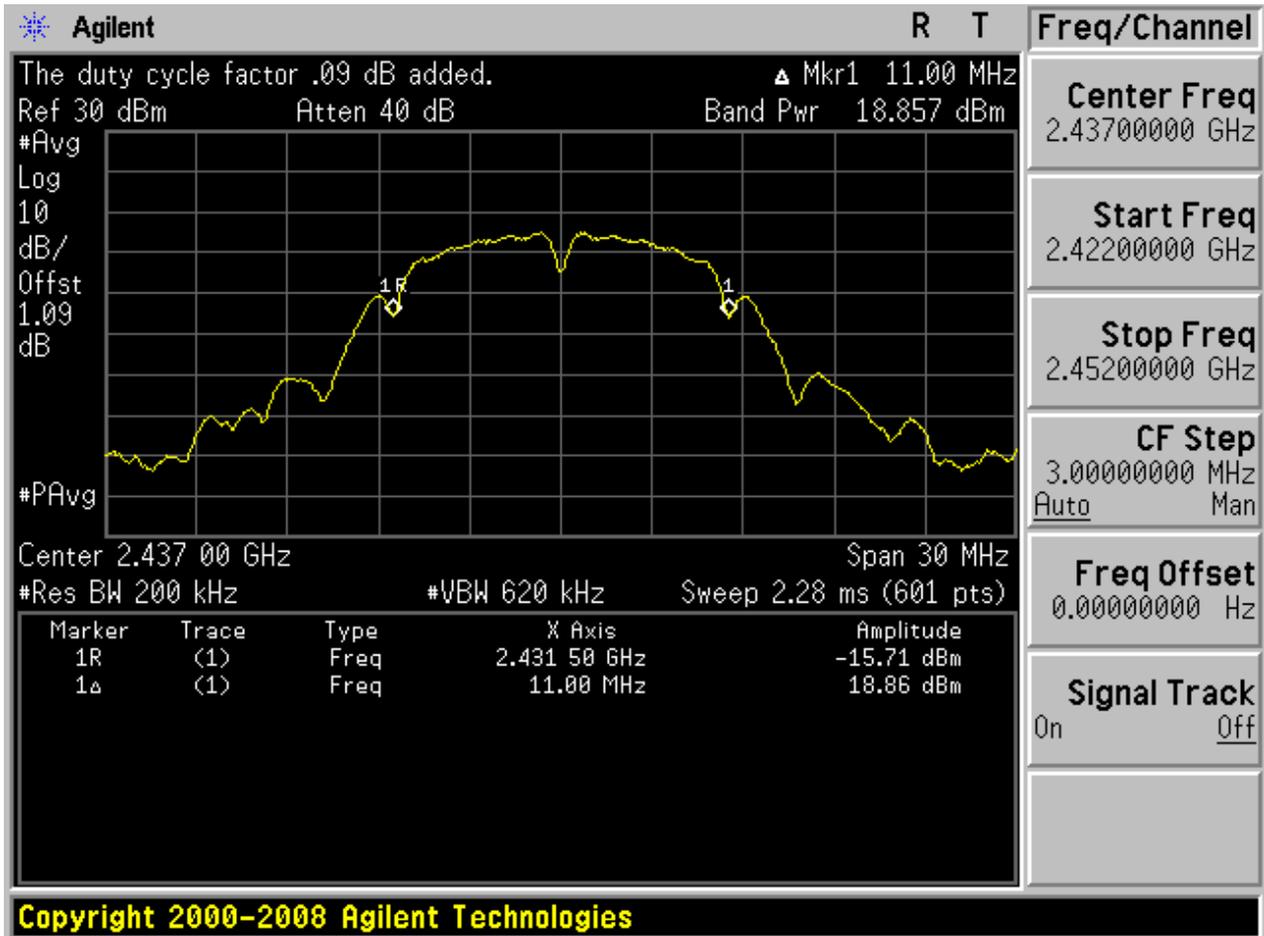




2.5 11B\_H@Ant 1

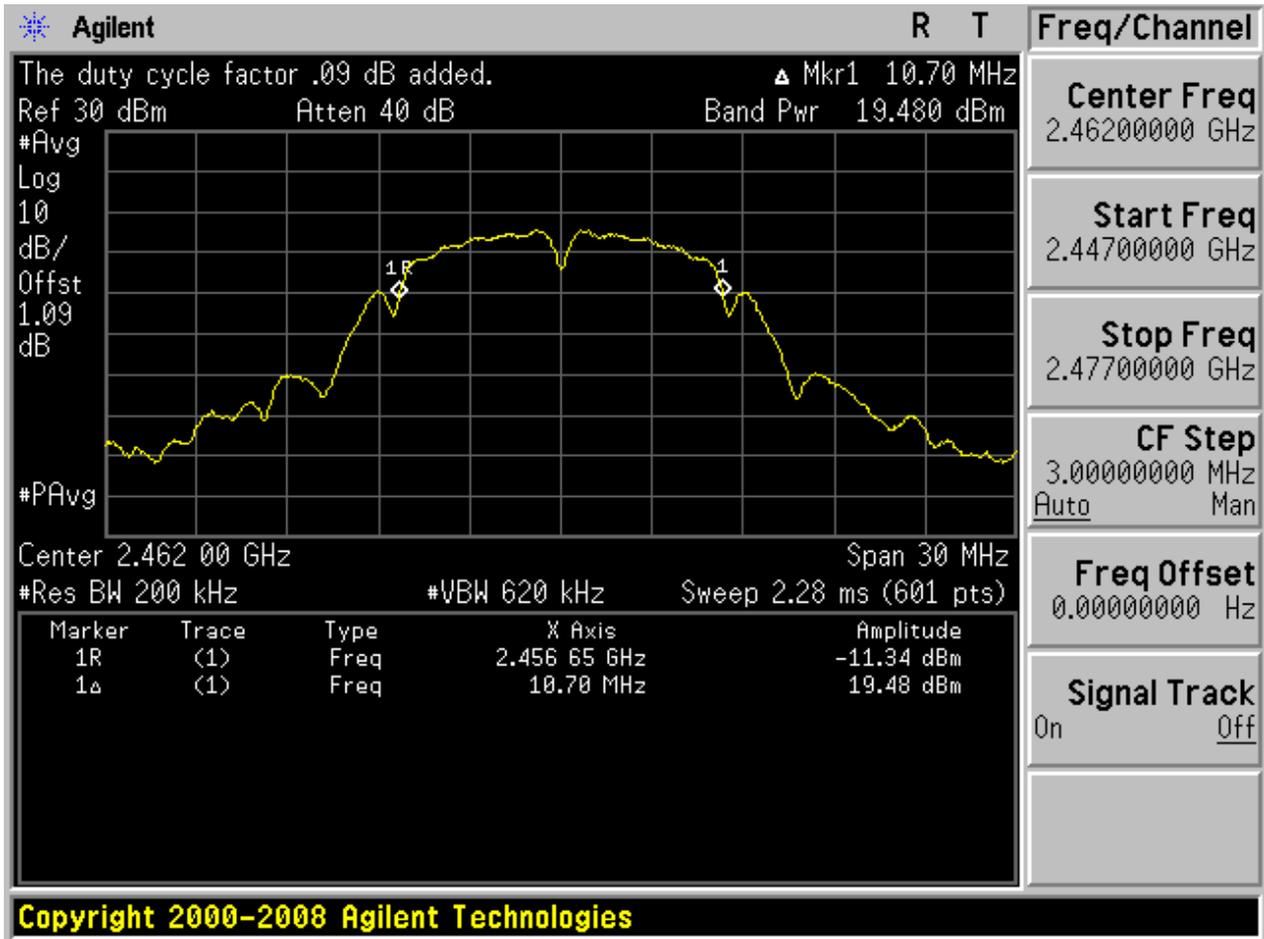




2.7 11G\_L@Ant 1

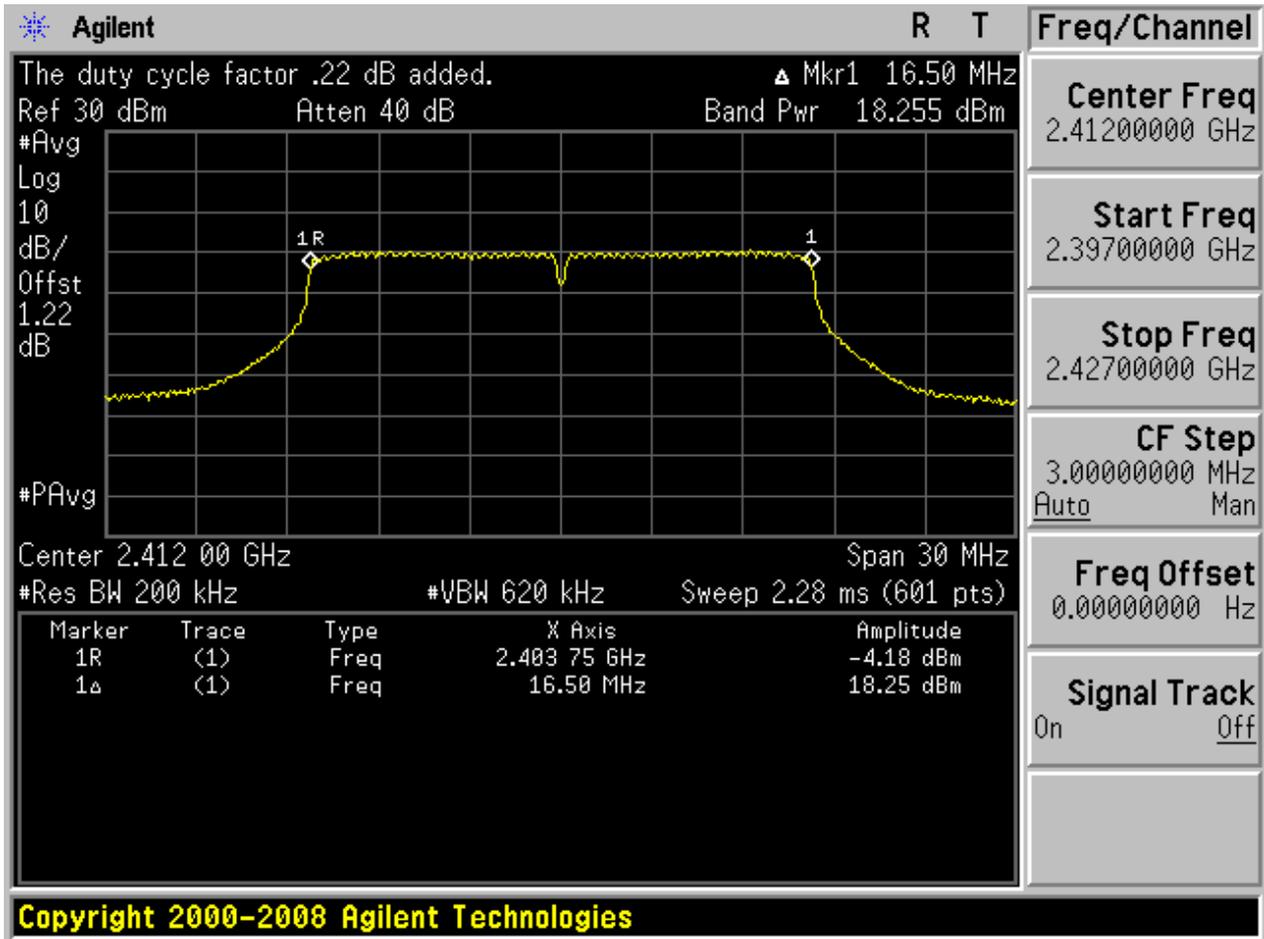




## 2.9 11G\_M@Ant 1

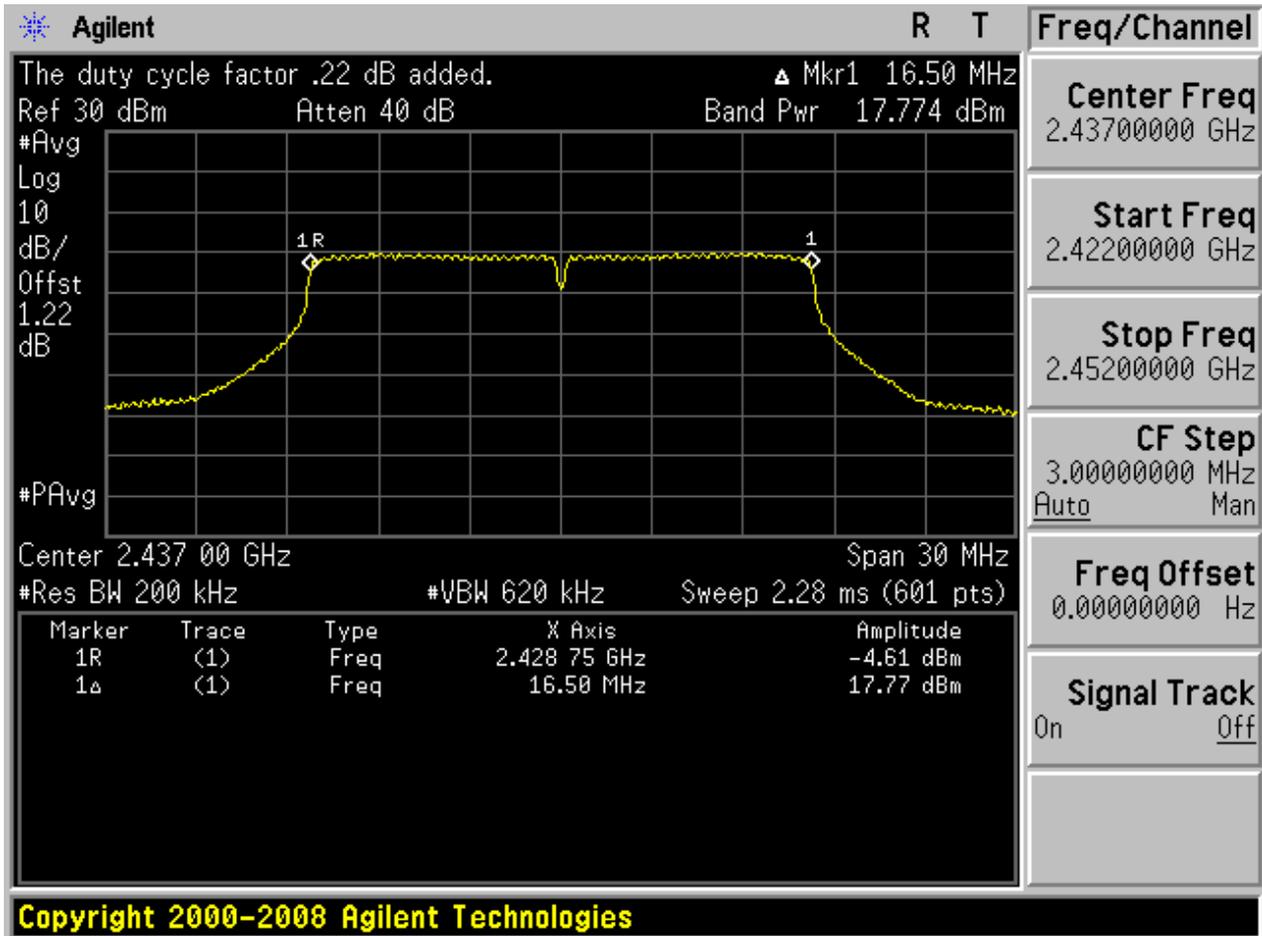




## 2.11 11G\_H@Ant 1

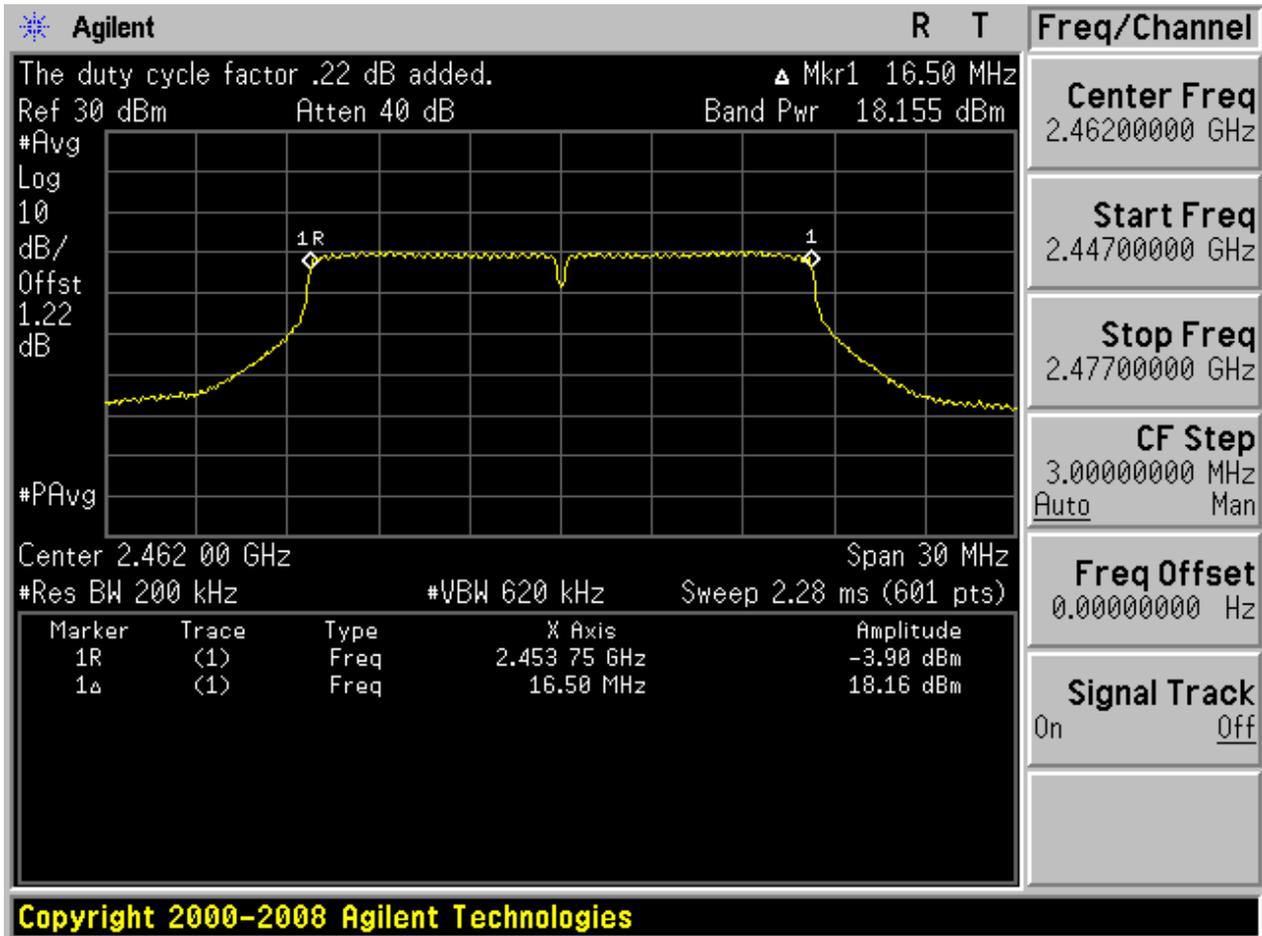




2.13 11N20\_L@Ant 1

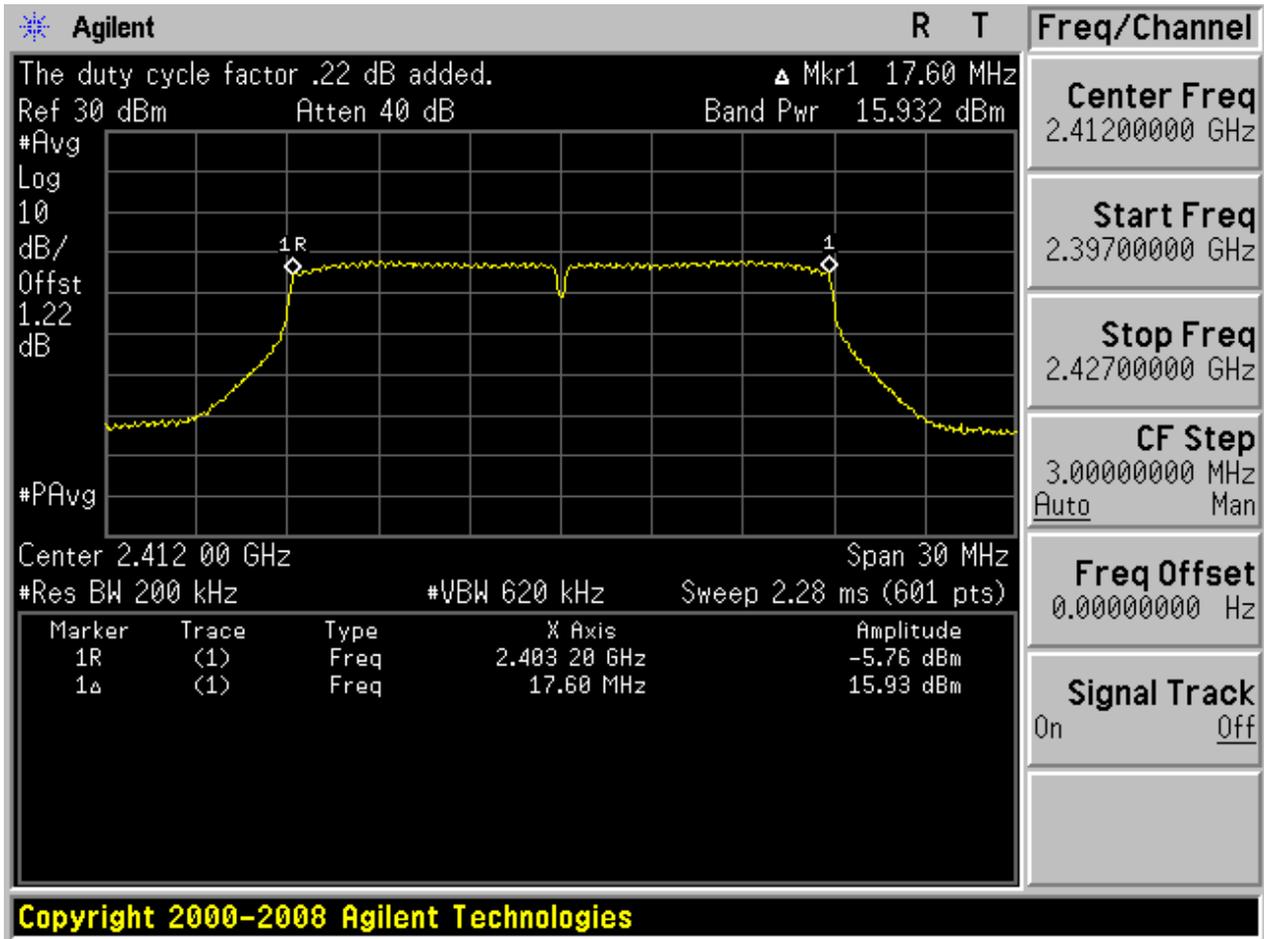




2.15 11N20\_M@Ant 1

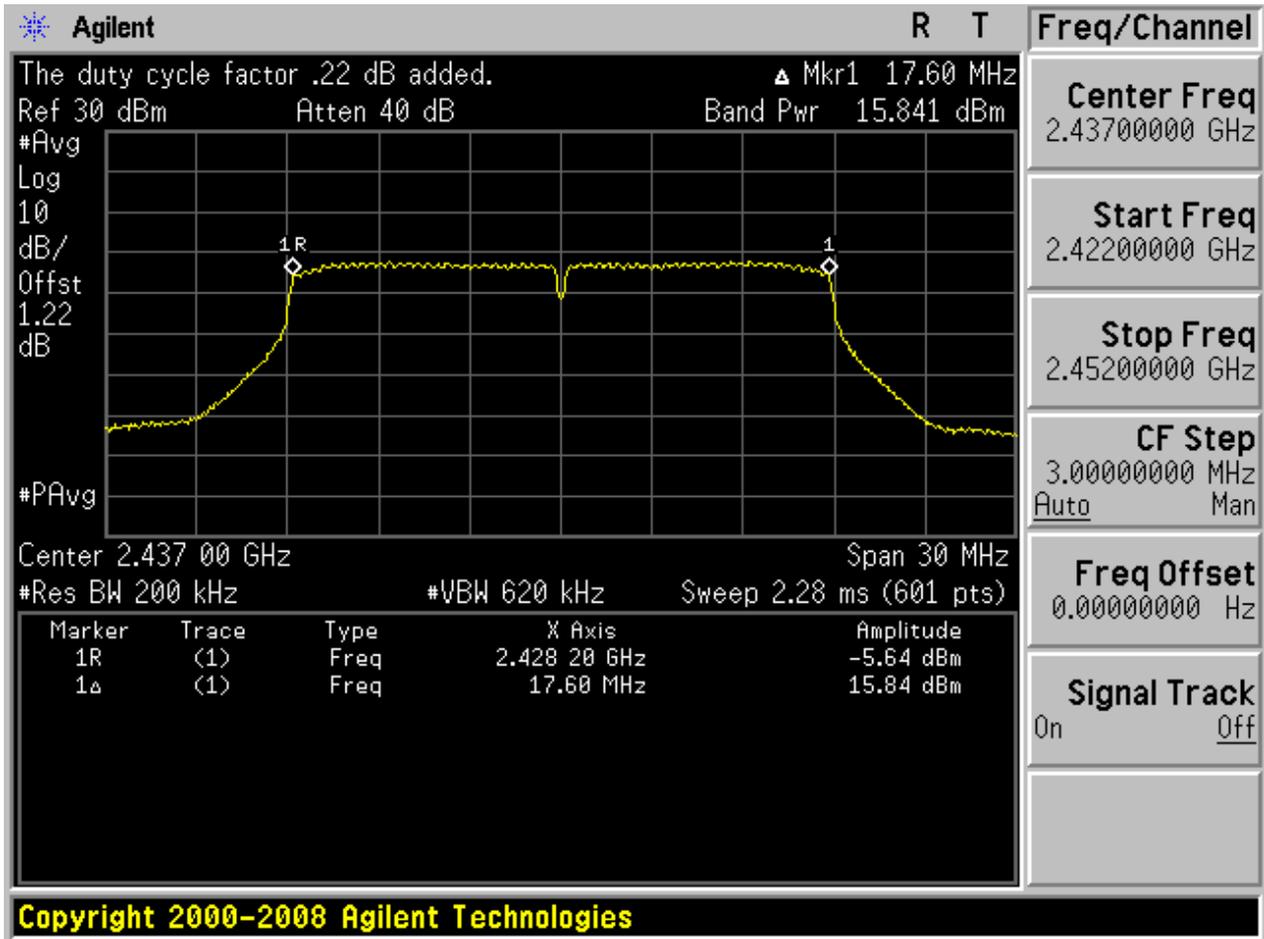



2.17 11N20\_H@Ant 1

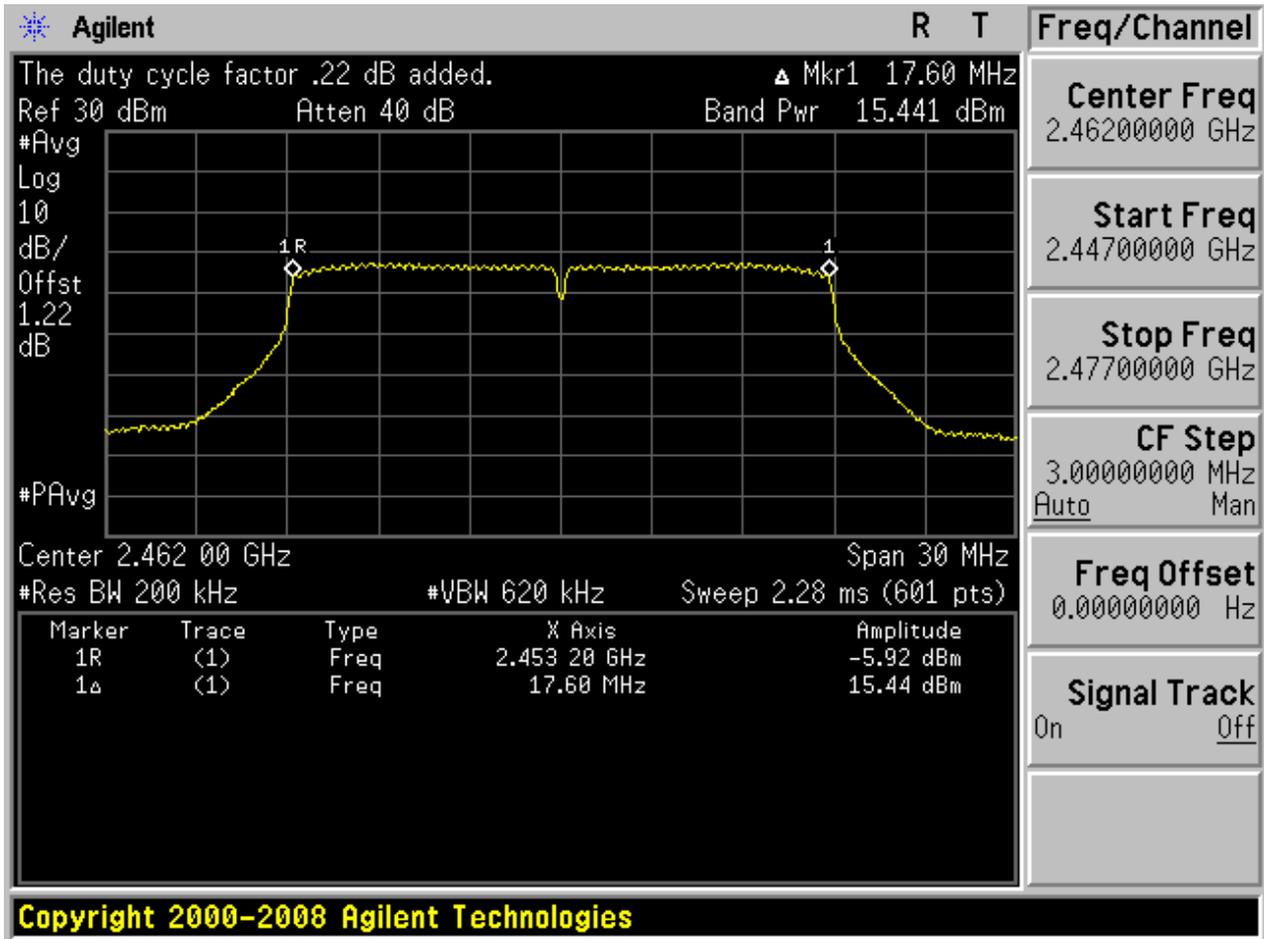

Copyright 2000-2008 Agilent Technologies




## Appendix D: Maximum Power Spectral Density Level

### Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Ant	PD[MHz]	Verdict
11B	L	2412	Ant 1	-8.32	pass
11B	M	2437	Ant 1	-7.87	pass
11B	H	2462	Ant 1	-7.34	pass
11G	L	2412	Ant 1	-11.48	pass
11G	M	2437	Ant 1	-11.98	pass
11G	H	2462	Ant 1	-11.65	pass
11N20	L	2412	Ant 1	-14.09	pass
11N20	M	2437	Ant 1	-14.22	pass
11N20	H	2462	Ant 1	-14.53	pass

Part II - Test Plots


2.1 11B\_L@Ant 1

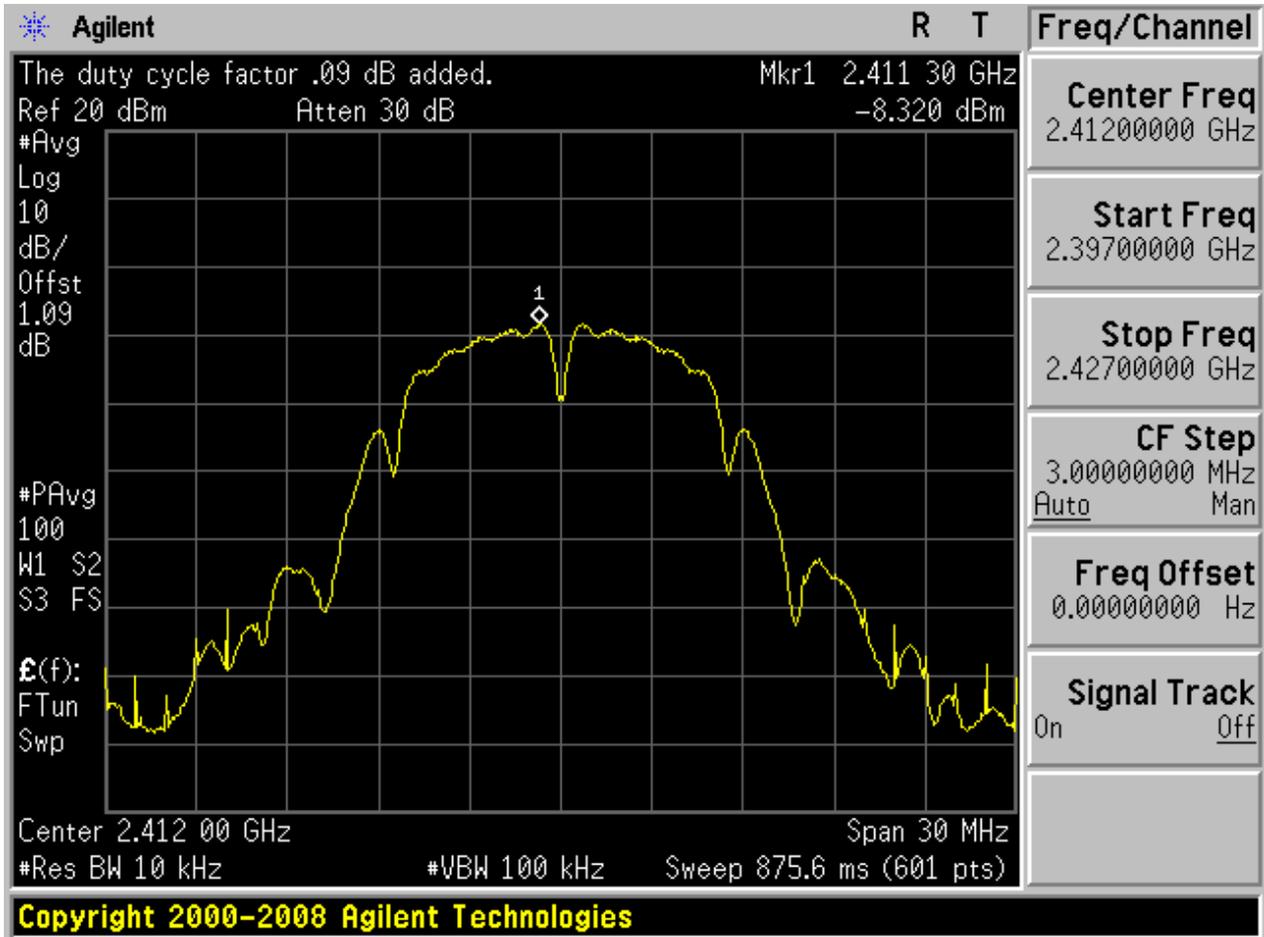

2.3 11B\_M@Ant 1

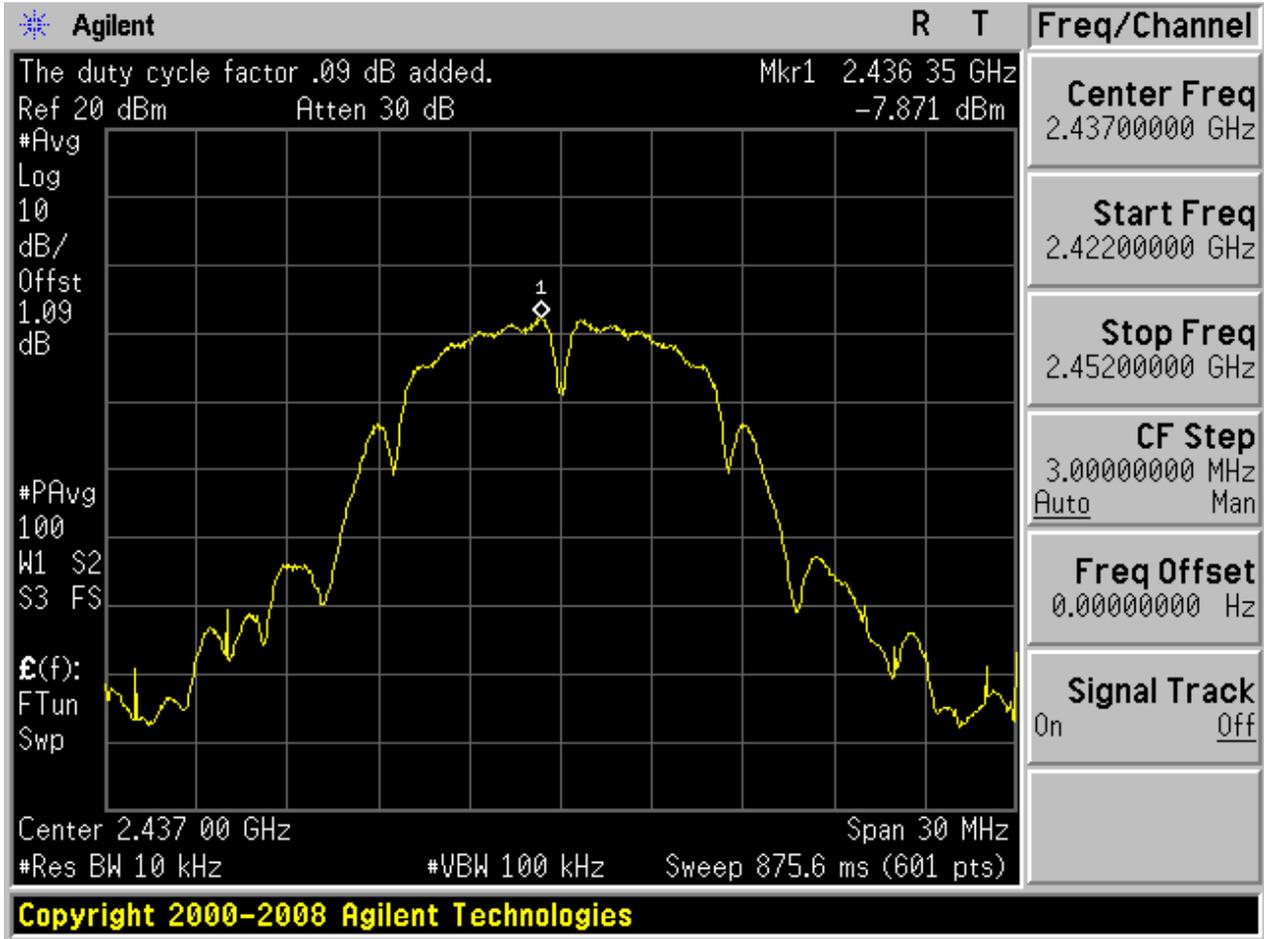


2.5 11B\_H@Ant 1

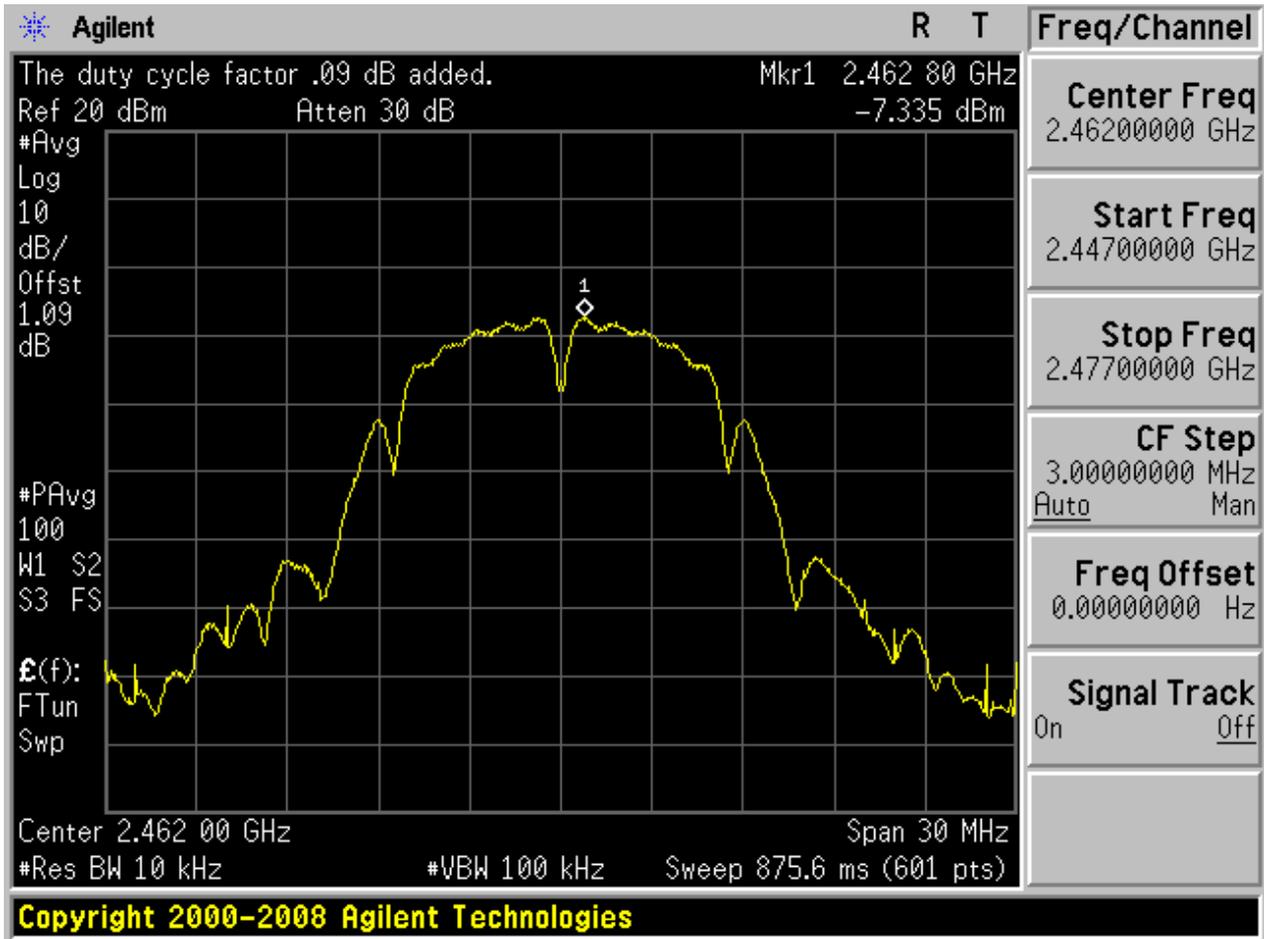




2.7 11G\_L@Ant 1

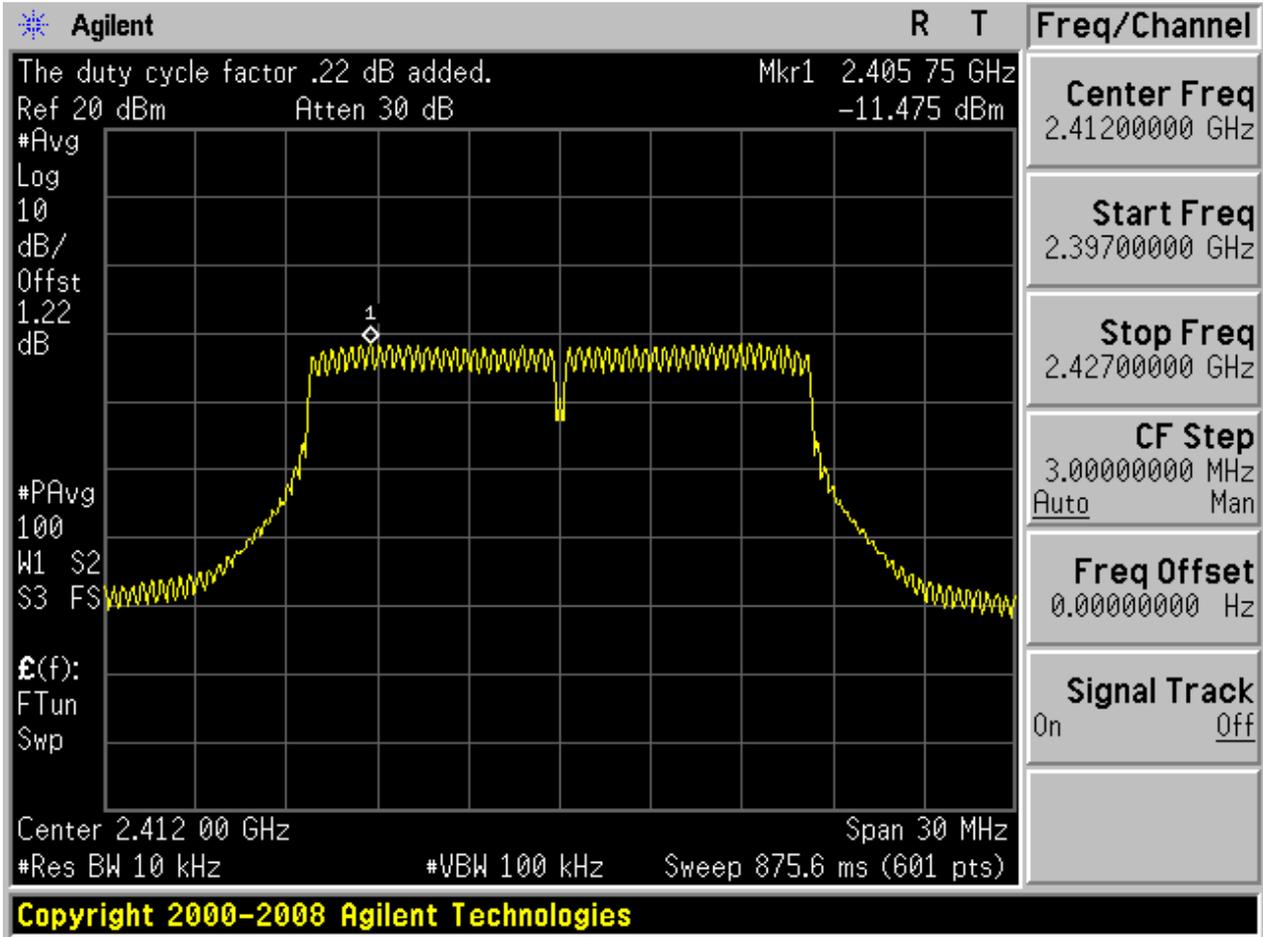




2.9 11G\_M@Ant 1

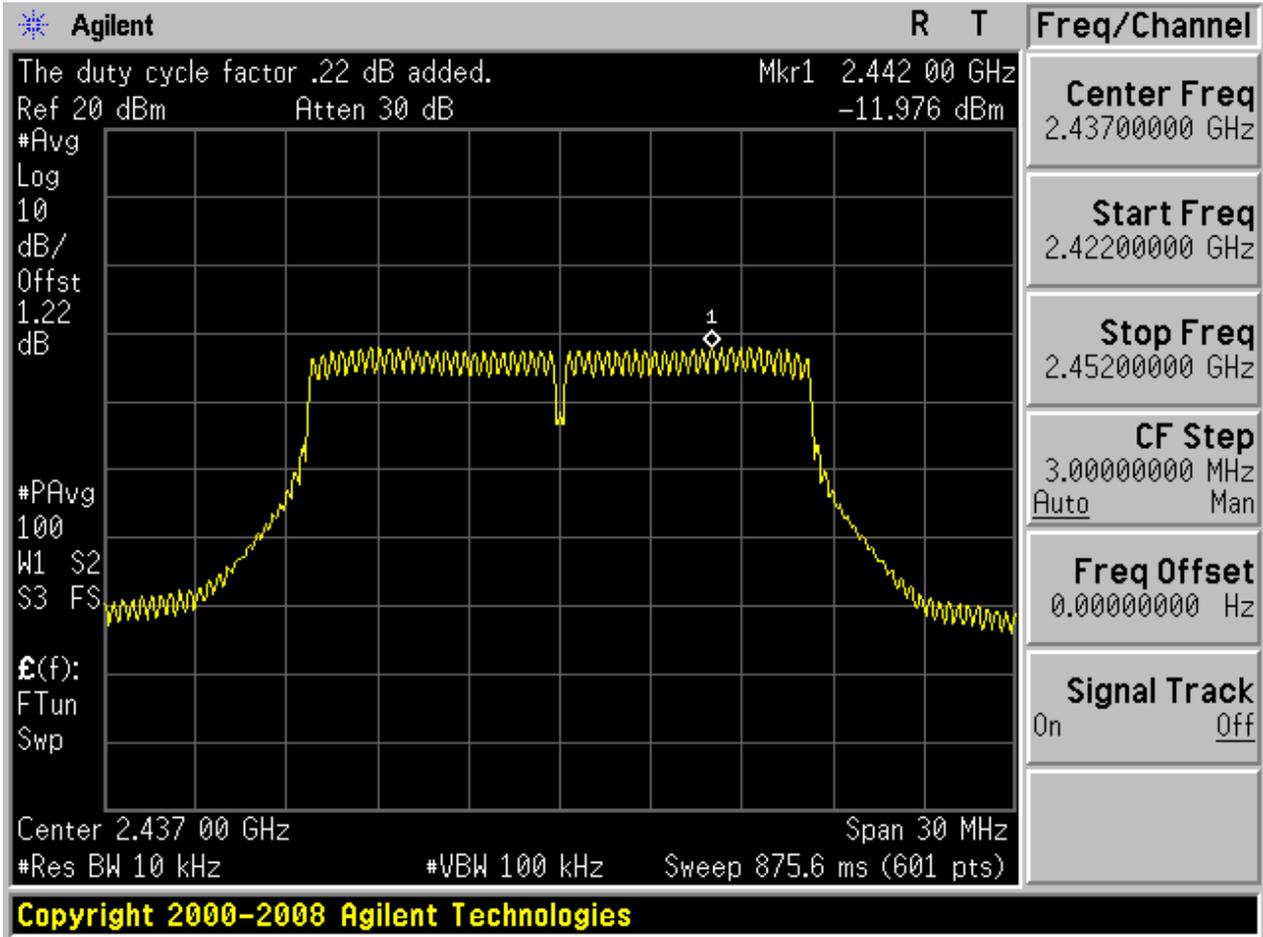




2.11 11G\_H@Ant 1

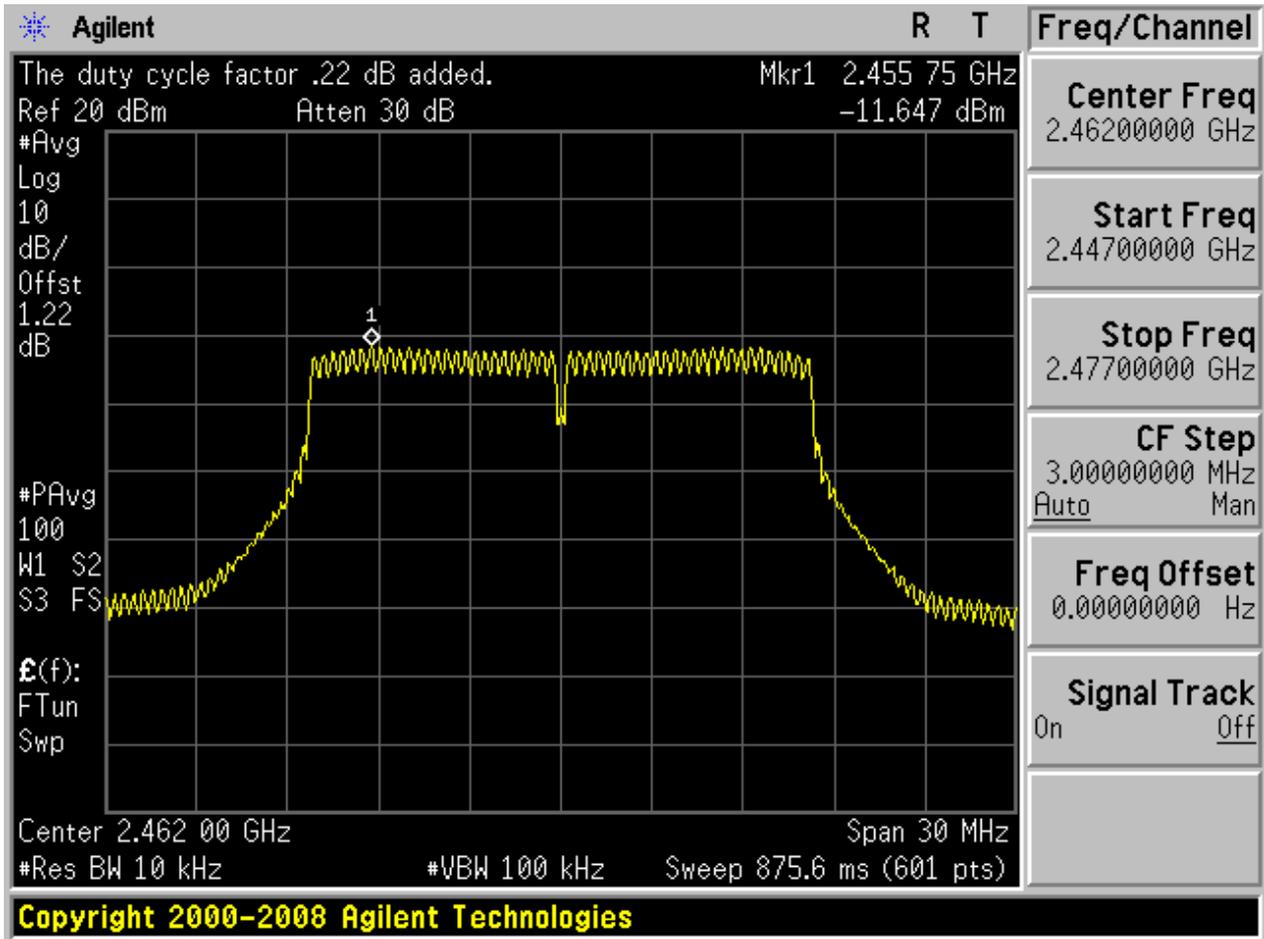




2.13 11N20\_L@Ant 1

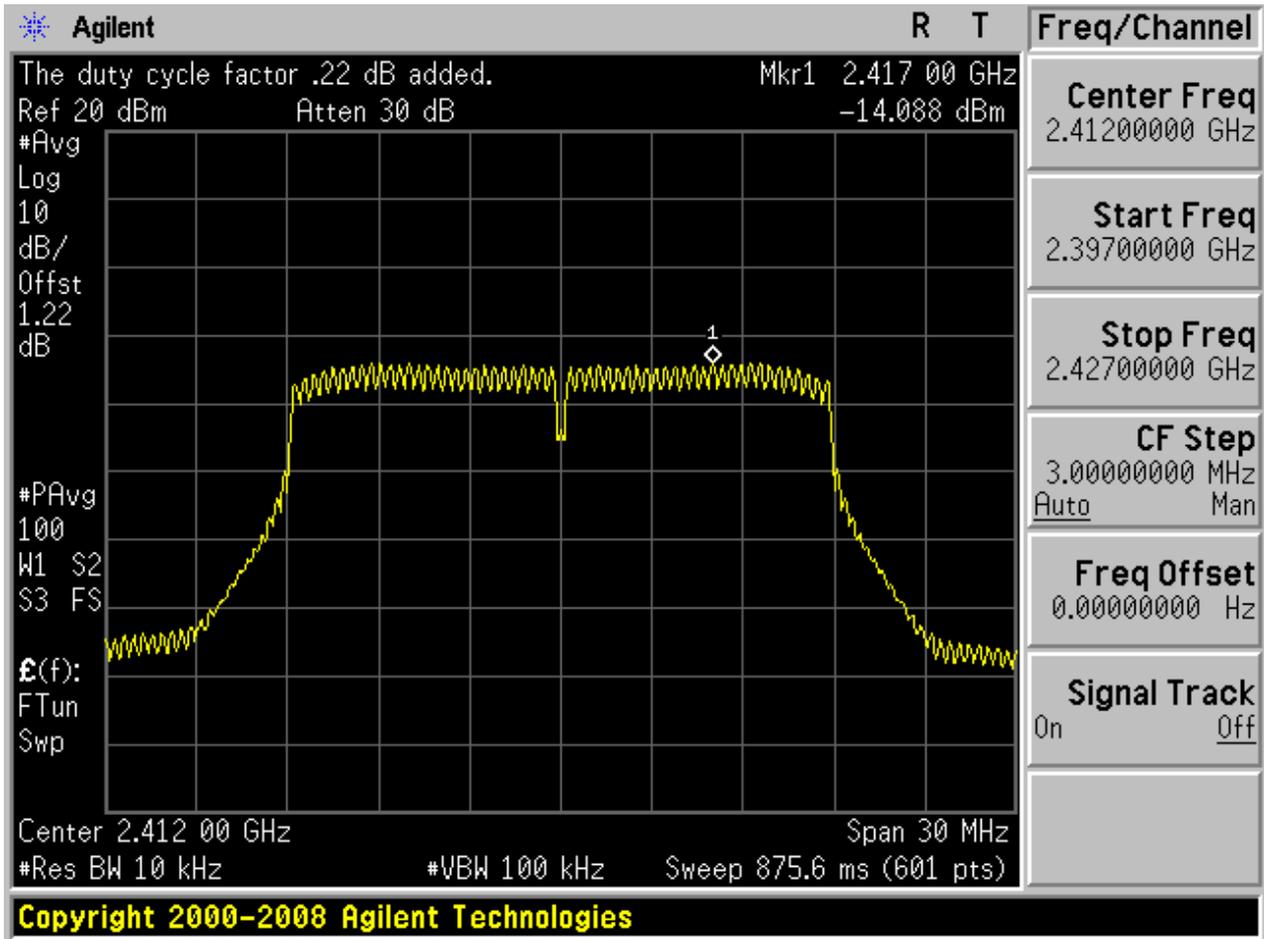




2.15 11N20\_M@Ant 1

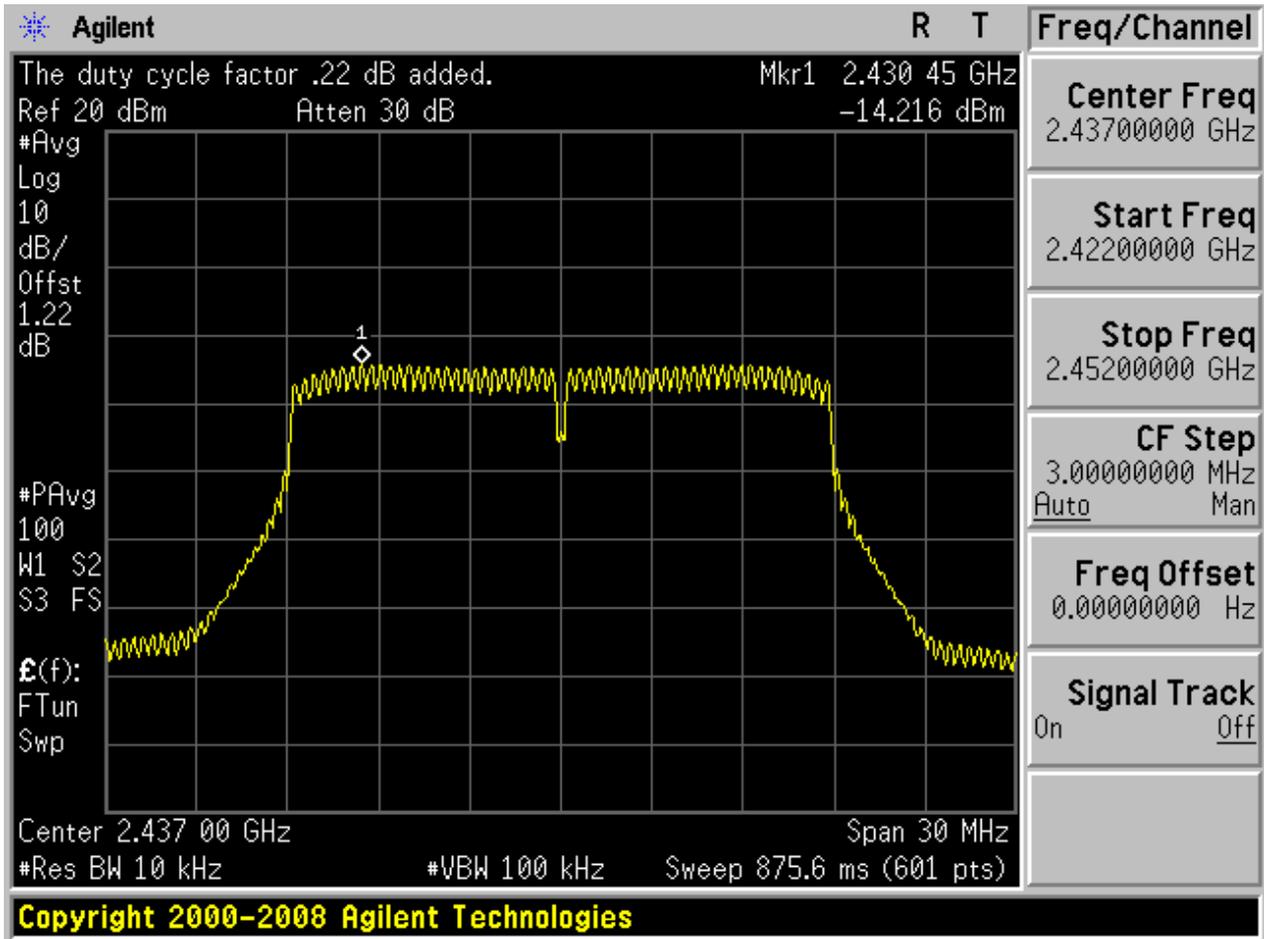



2.17 11N20\_H@Ant 1

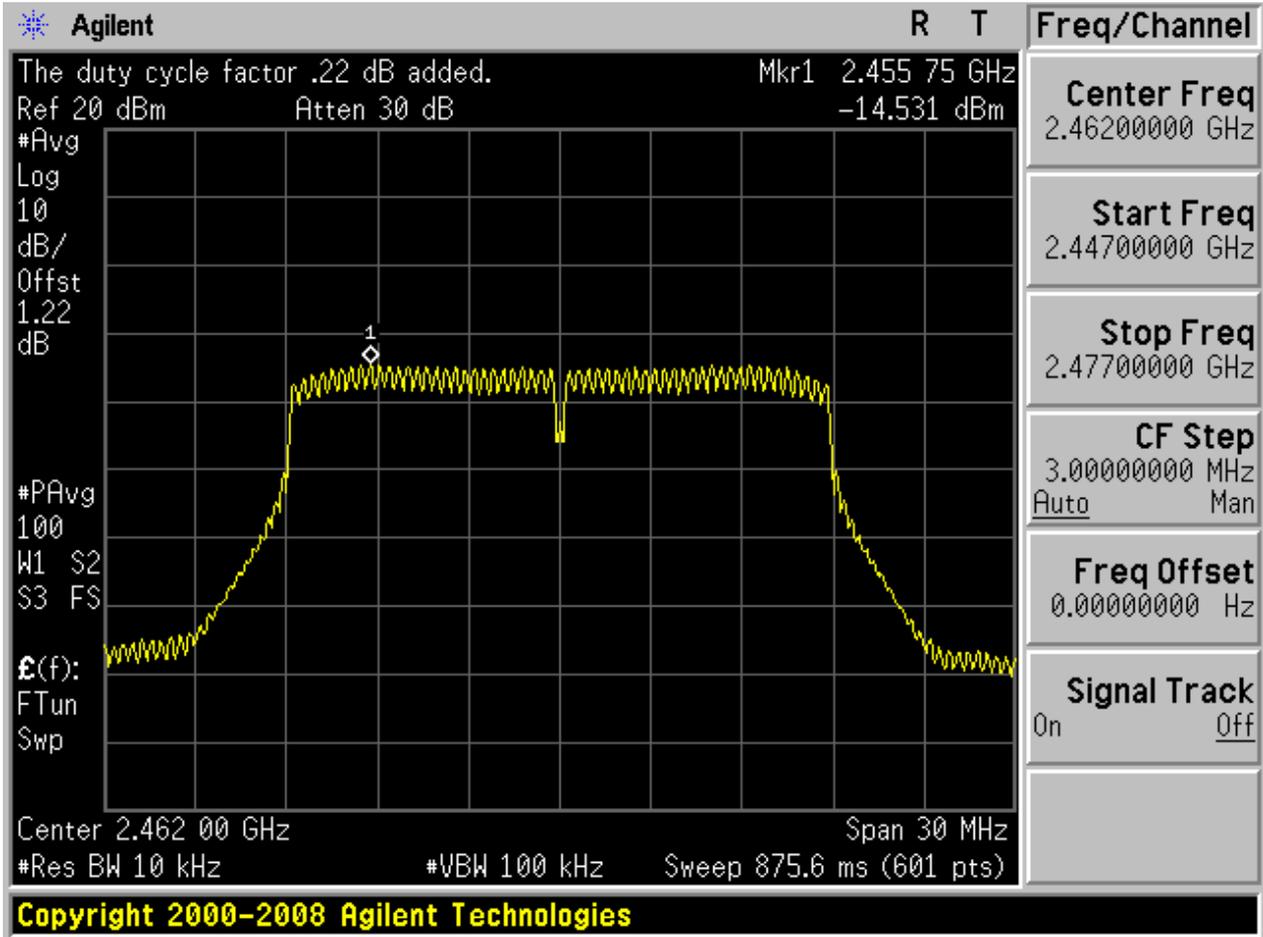




## Appendix E: Band Edges Compliance

### Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Ant	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
11B	L	2412	Ant 1	9.88	-47.14	pass
11B	H	2462	Ant 1	11.03	-47.01	pass
11G	L	2412	Ant 1	7.26	-39.74	pass
11G	H	2462	Ant 1	6.87	-40.89	pass
11N20	L	2412	Ant 1	4.91	-43.46	pass
11N20	H	2462	Ant 1	4.61	-45.56	pass

Part II - Test Plots

2.1 11B\_L@Ant 1

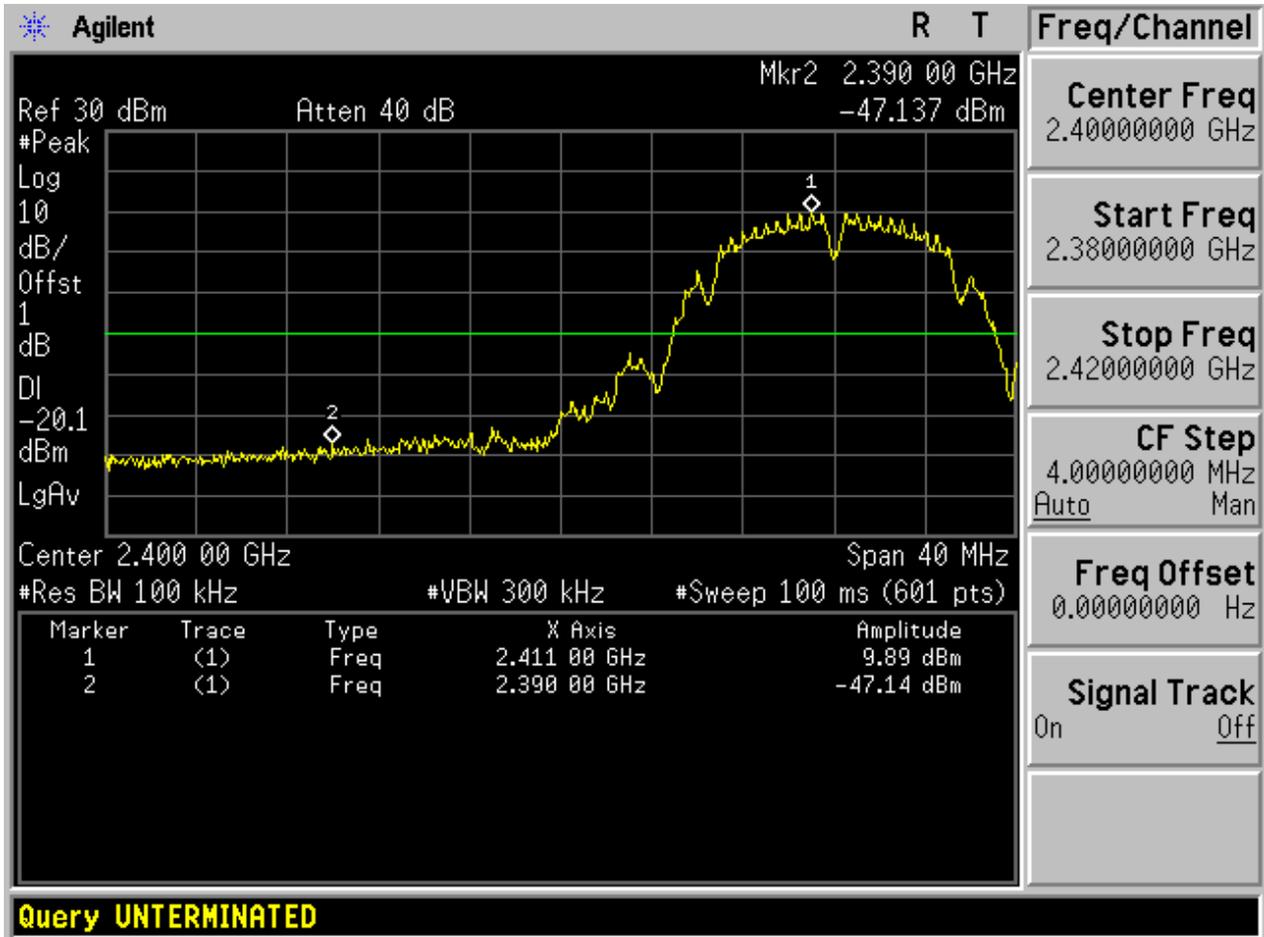


2.3 11B\_H@Ant 1

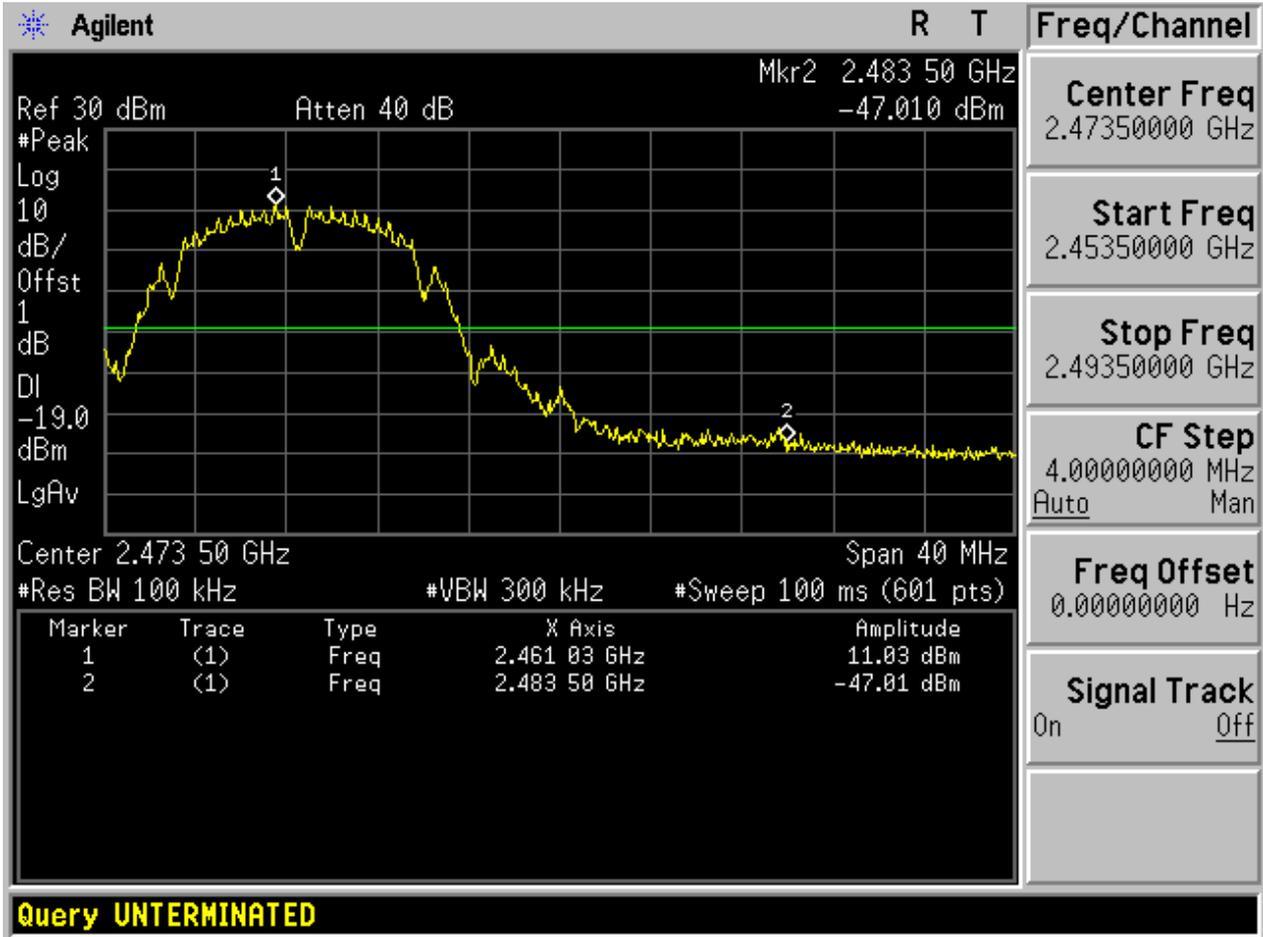

Query UNTERMINATED




2.5 11G\_L@Ant 1

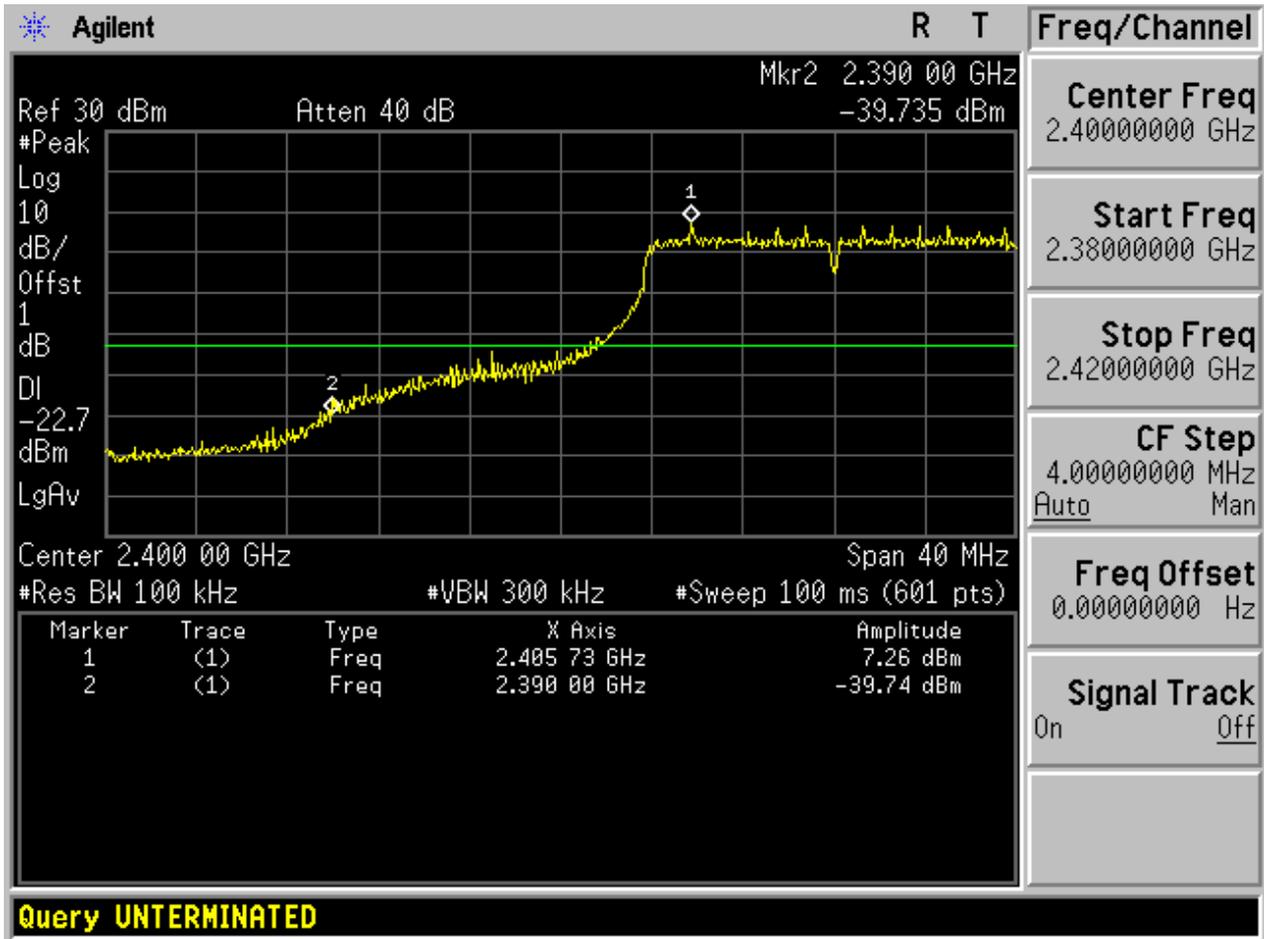




2.7 11G\_H@Ant 1

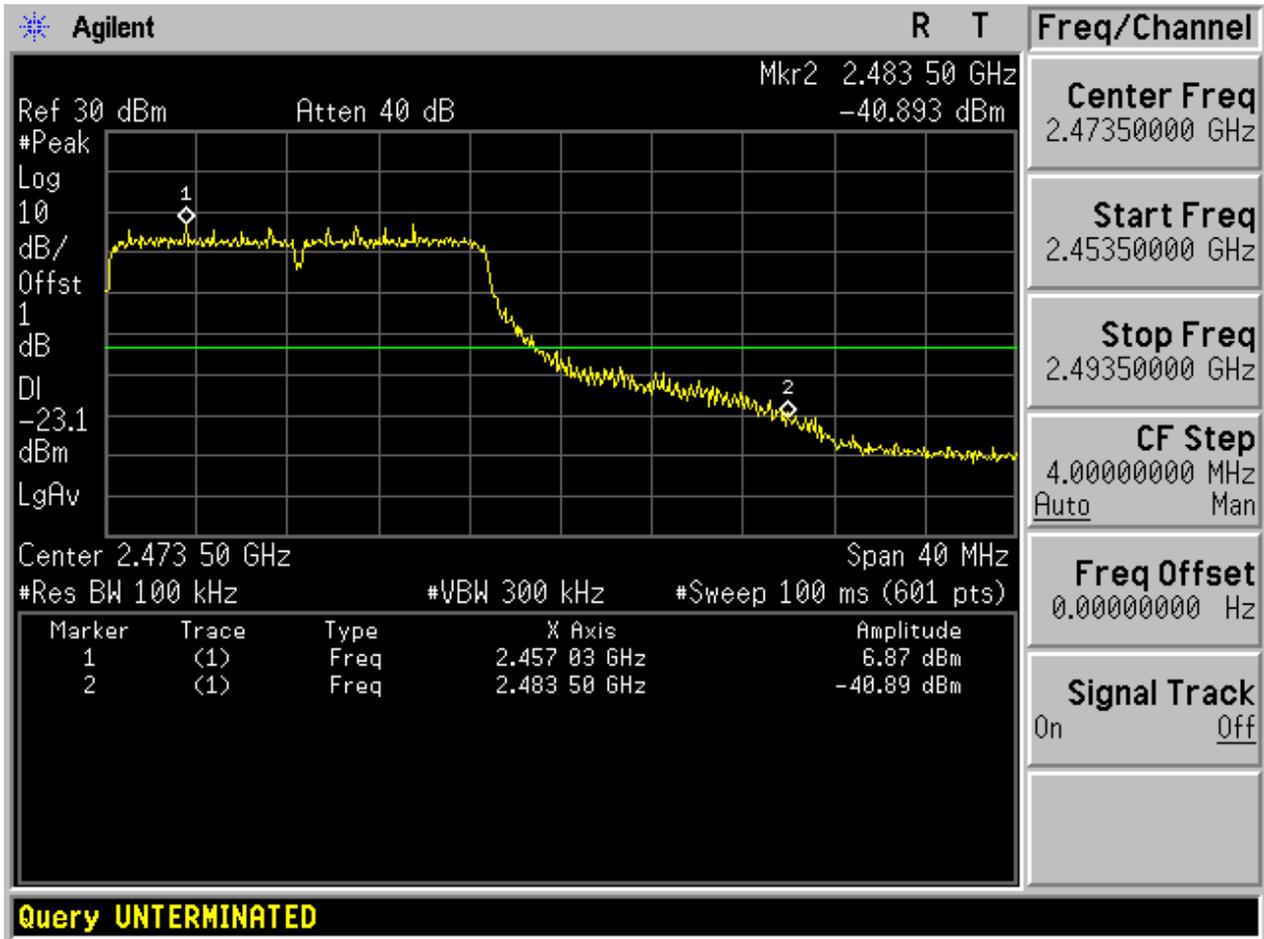




2.9 11N20\_L@Ant 1

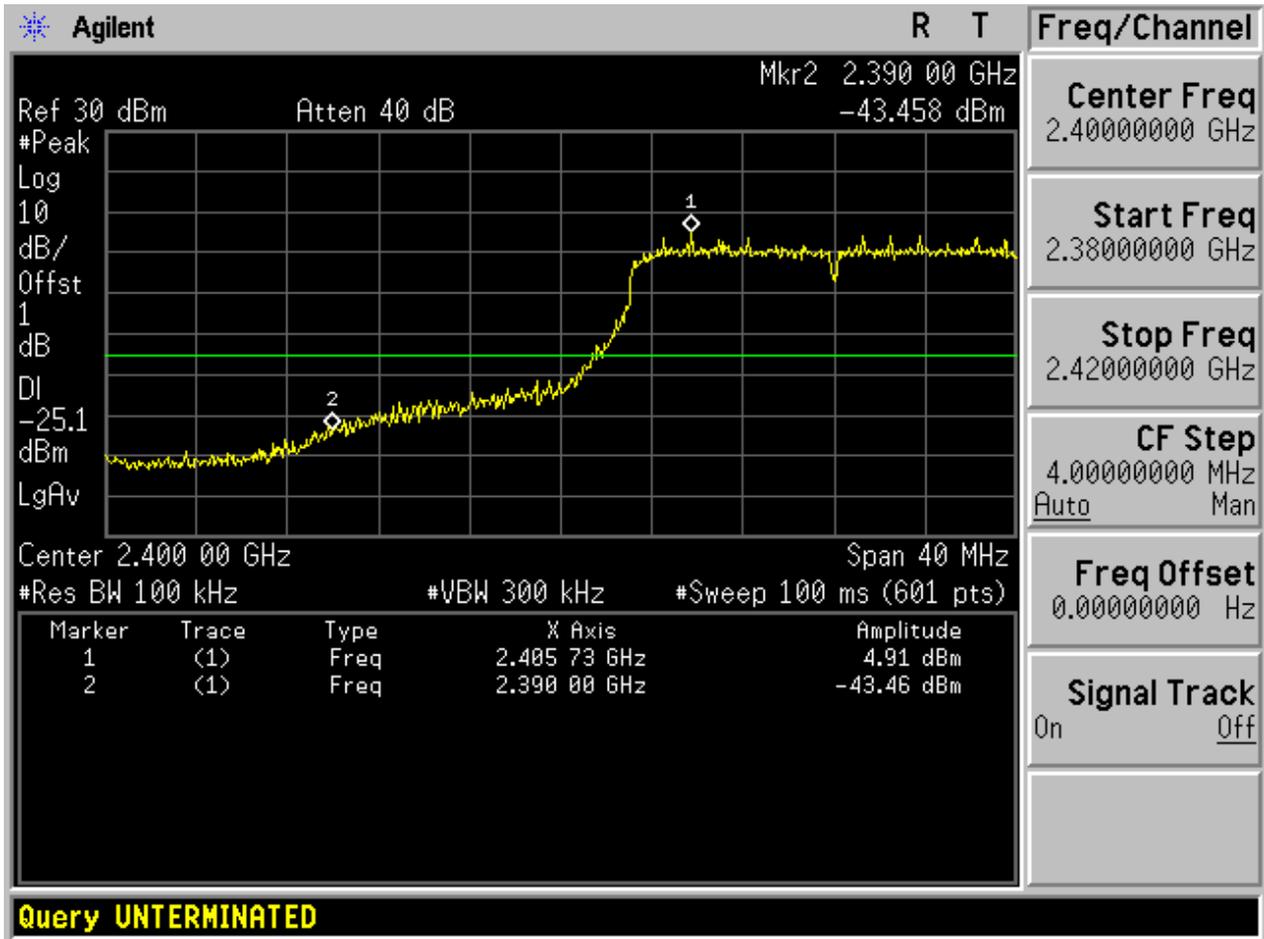

2.11 11N20\_H@Ant 1

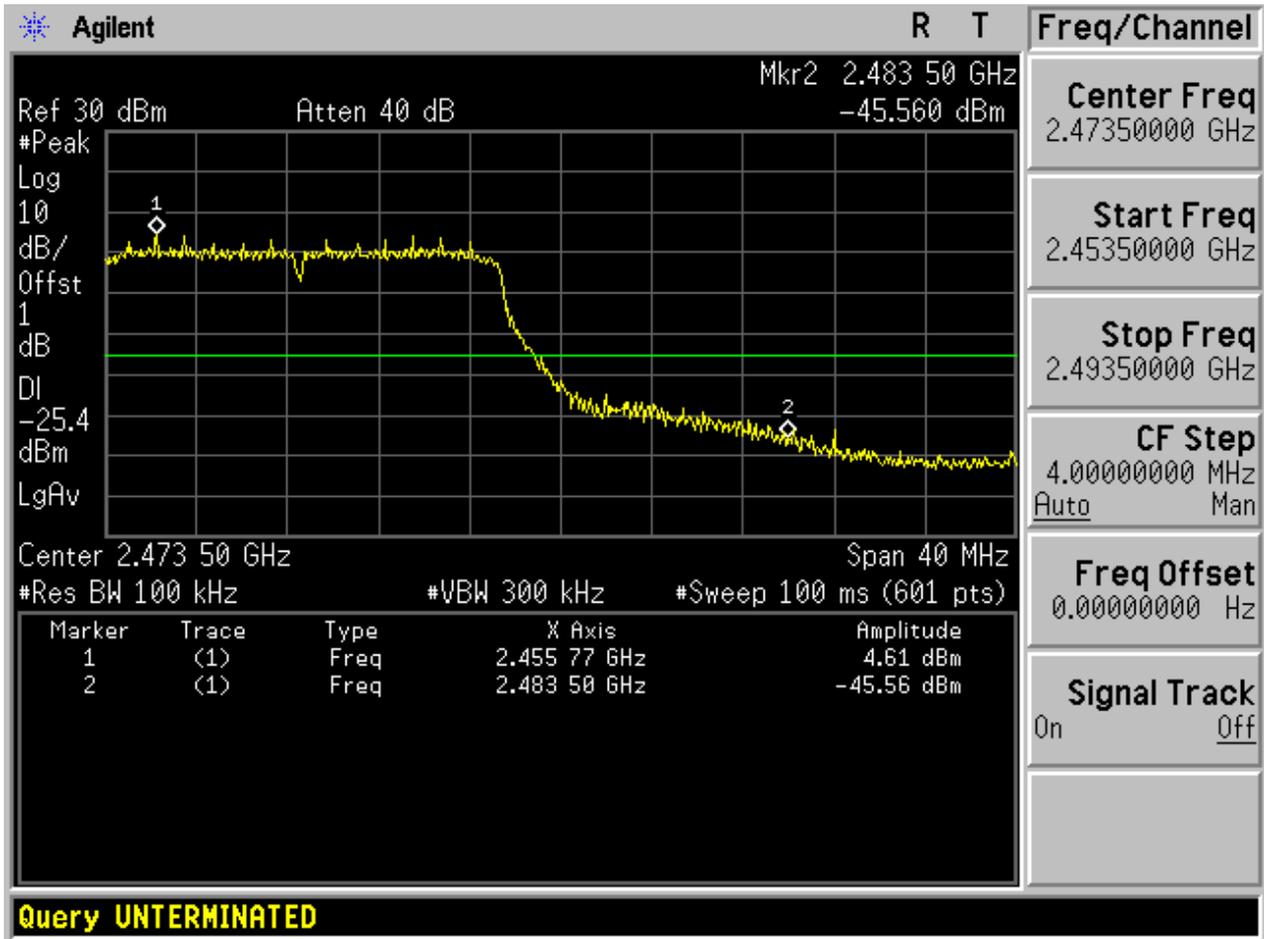

## Appendix F: Unwanted Emissions into Non-Restricted Frequency

### Bands

In this Appendix, the "Pref", which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the "Puw" refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the "< Limit" denotes that "The Puw [dBm] is less than Pref[dBm]-20[dBm], see test plots for detailed".

#### Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Ant	Pref[dBm]	Puw[dBm]	Verdict
11B	L	2412	Ant 1	10.50	<limit	pass
11B	M	2437	Ant 1	10.81	<limit	pass
11B	H	2462	Ant 1	11.52	<limit	pass
11G	L	2412	Ant 1	7.51	<limit	pass
11G	M	2437	Ant 1	6.66	<limit	pass
11G	H	2462	Ant 1	7.11	<limit	pass
11N20	L	2412	Ant 1	5.23	<limit	pass
11N20	M	2437	Ant 1	5.12	<limit	pass
11N20	H	2462	Ant 1	4.70	<limit	pass




Part II - Test Plots


2.1 11B\_L@Ant 1


Pref:

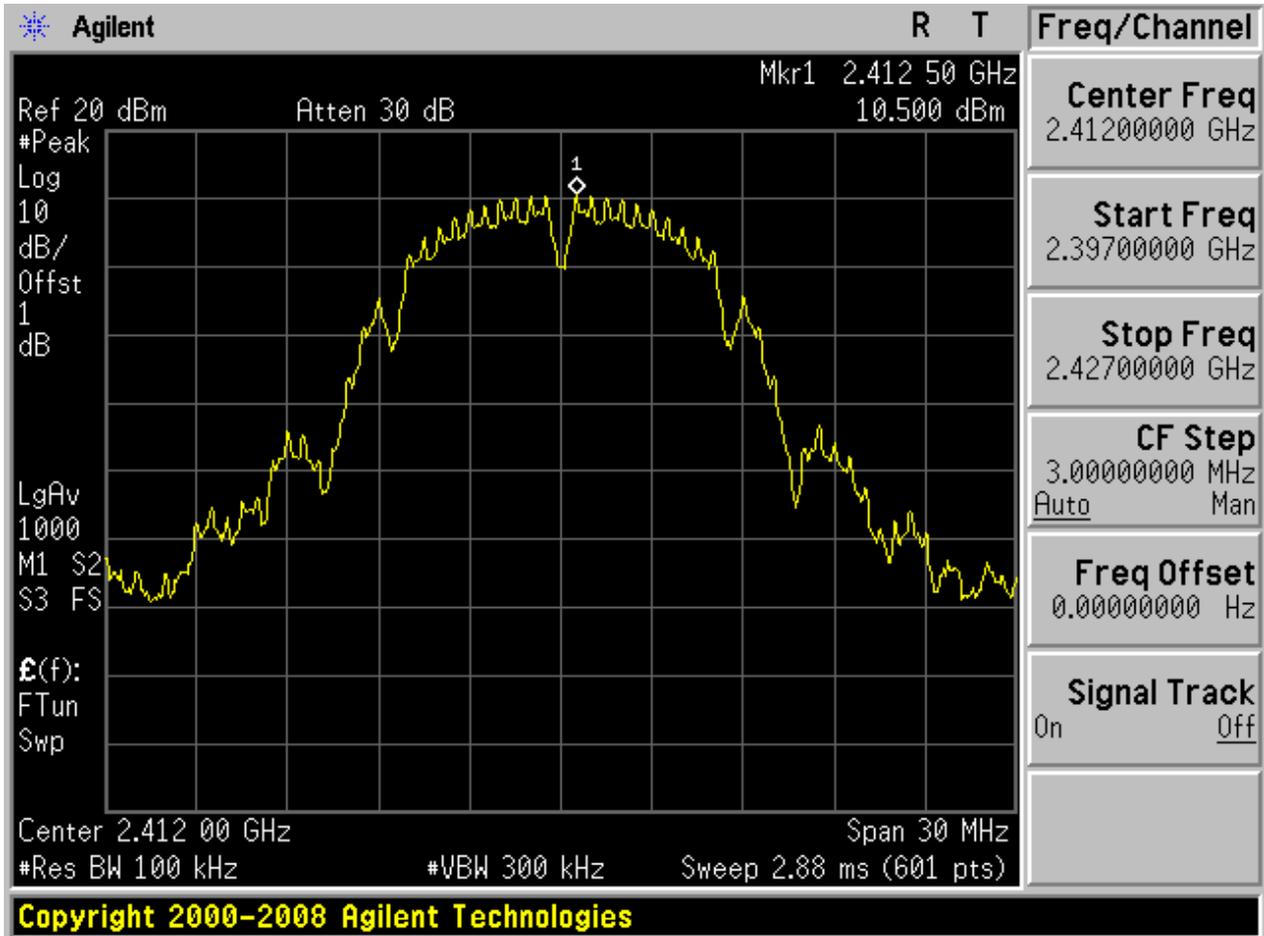



Puw:

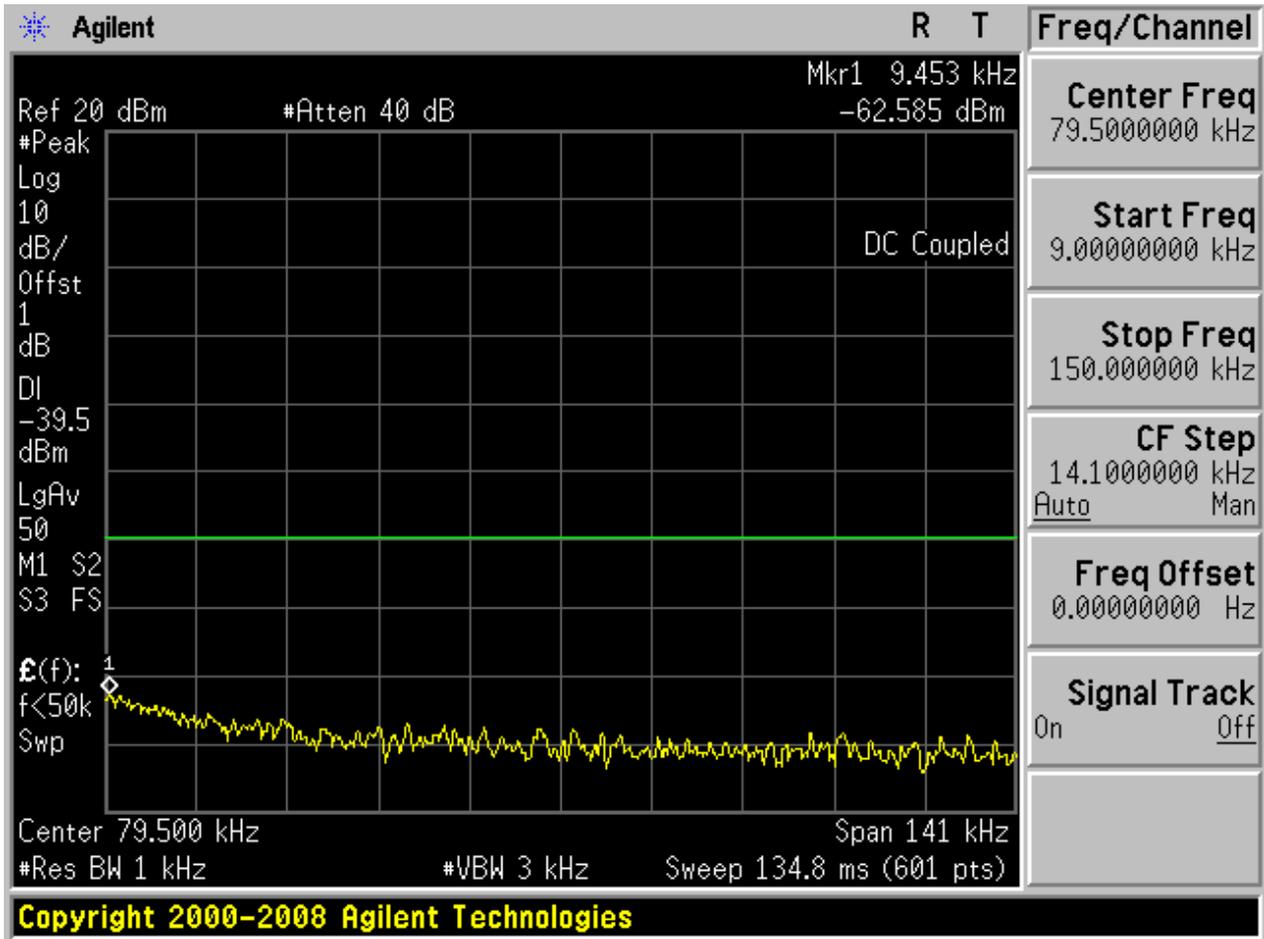


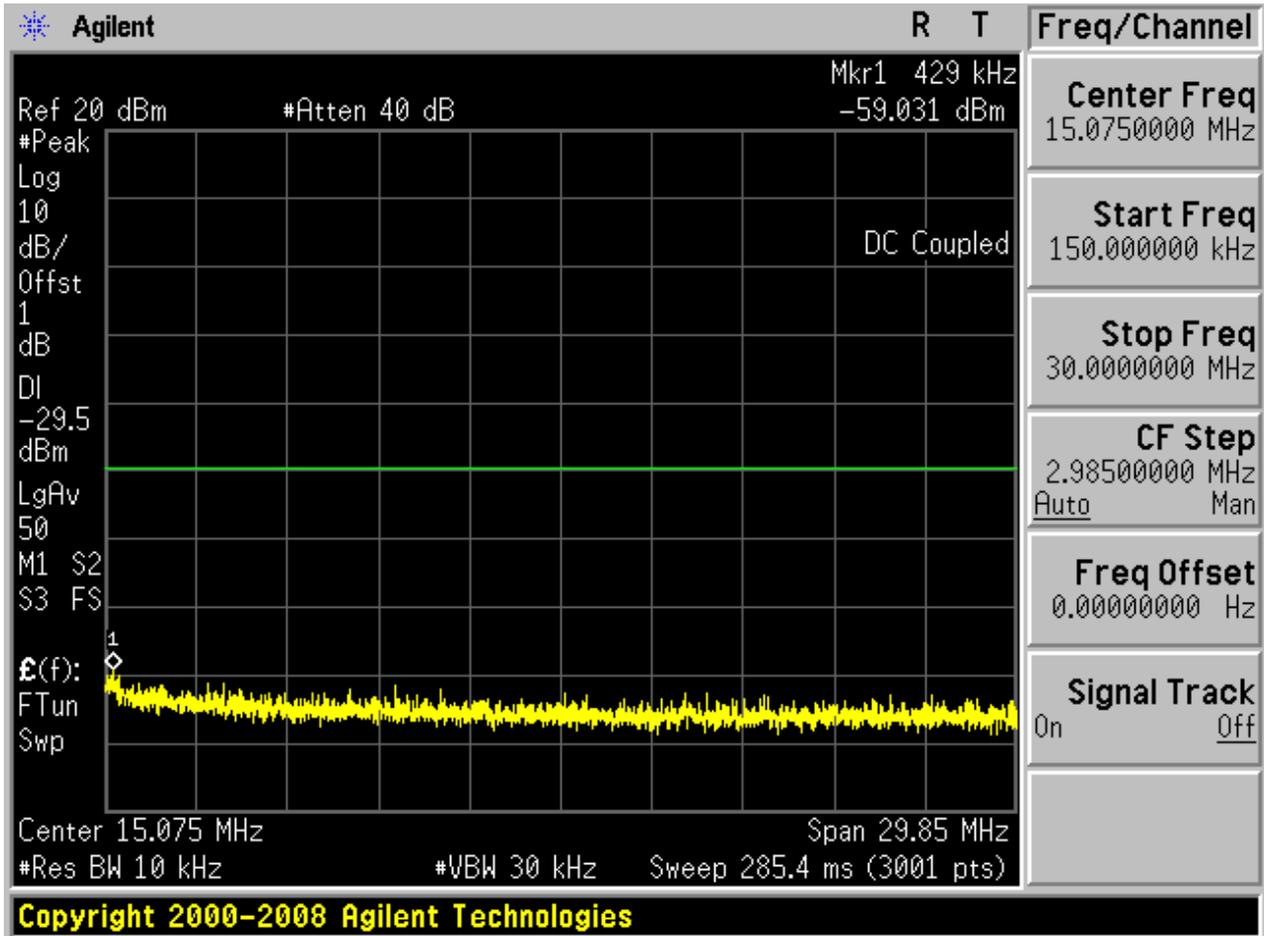

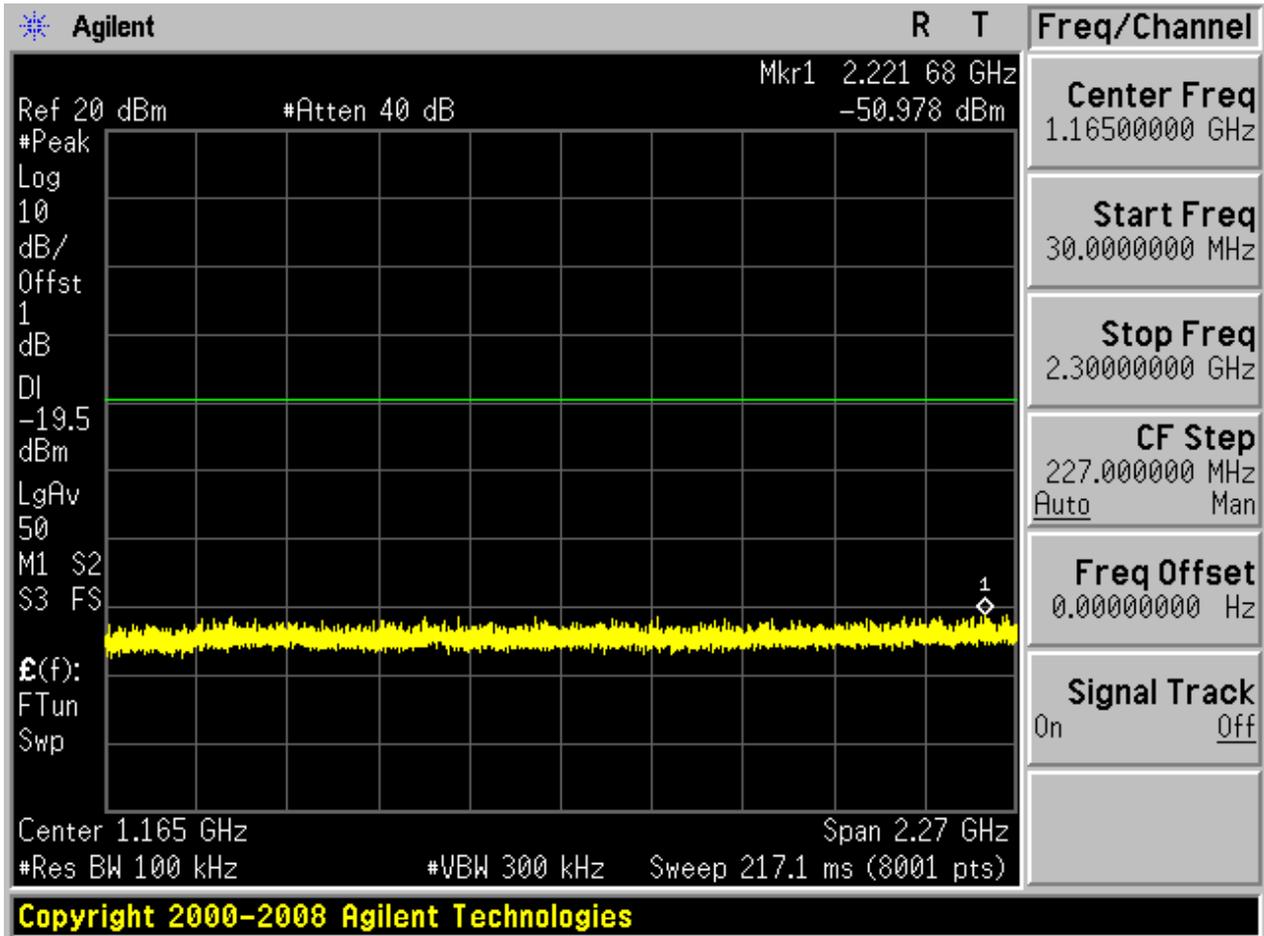

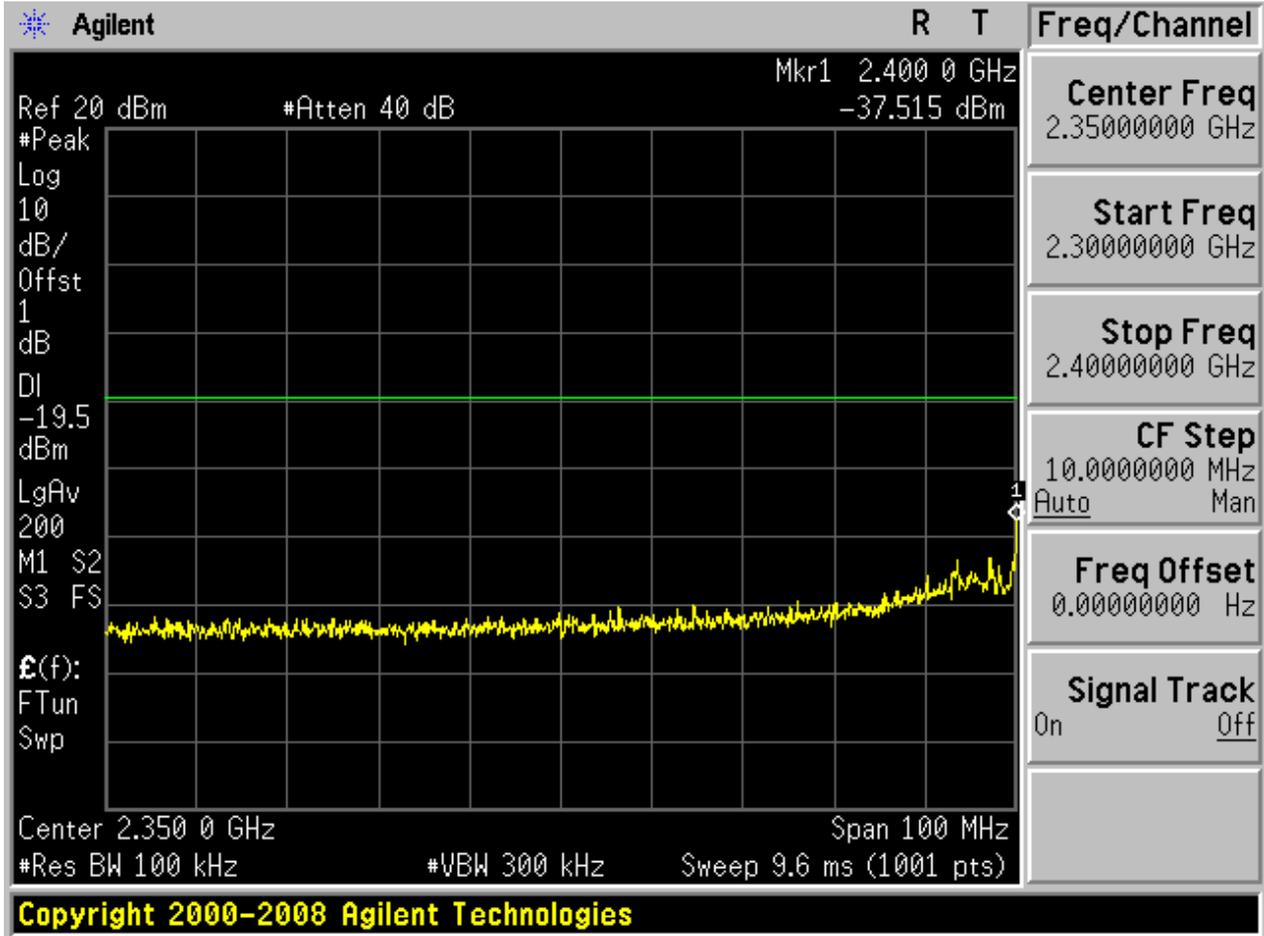


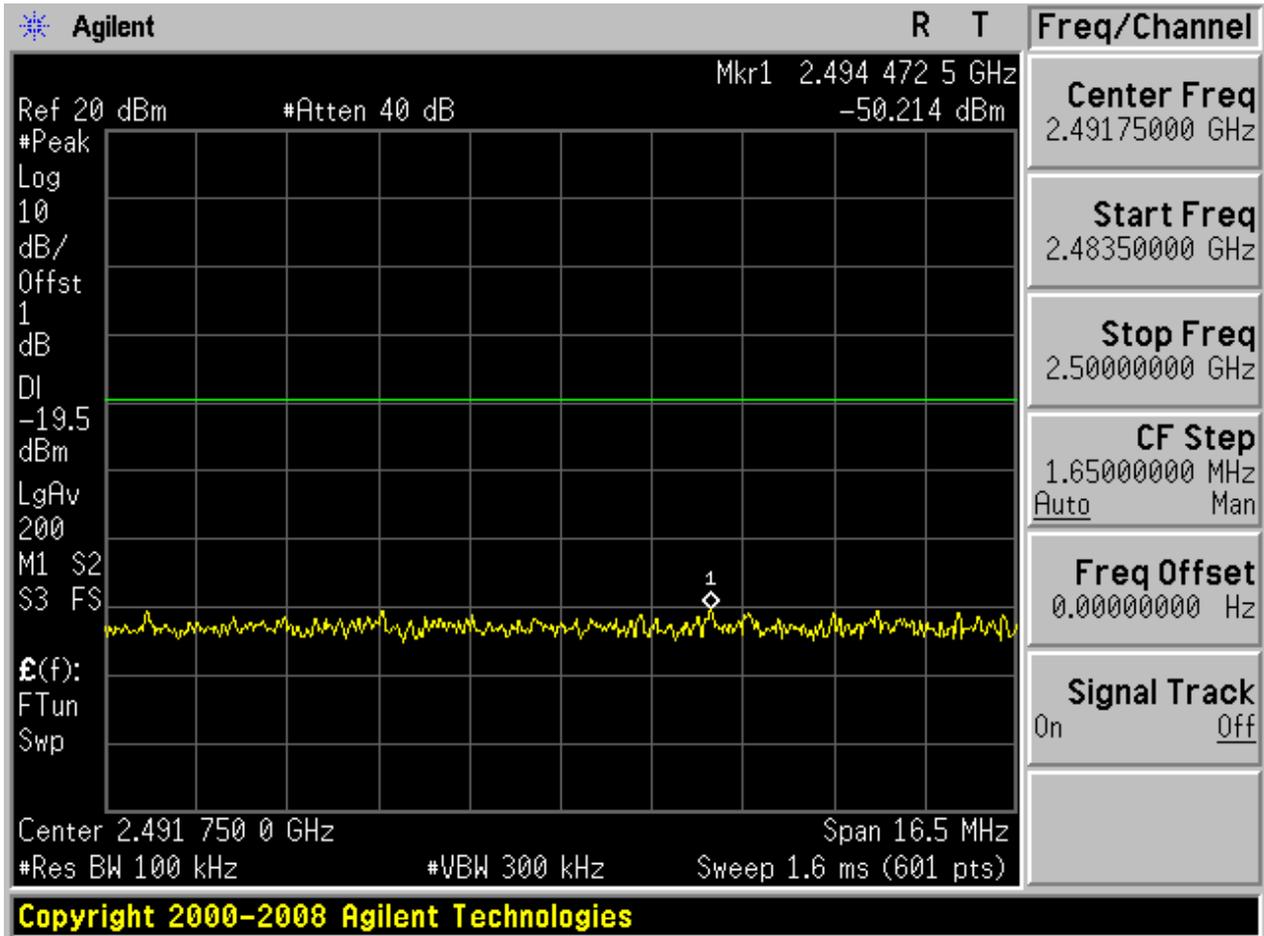

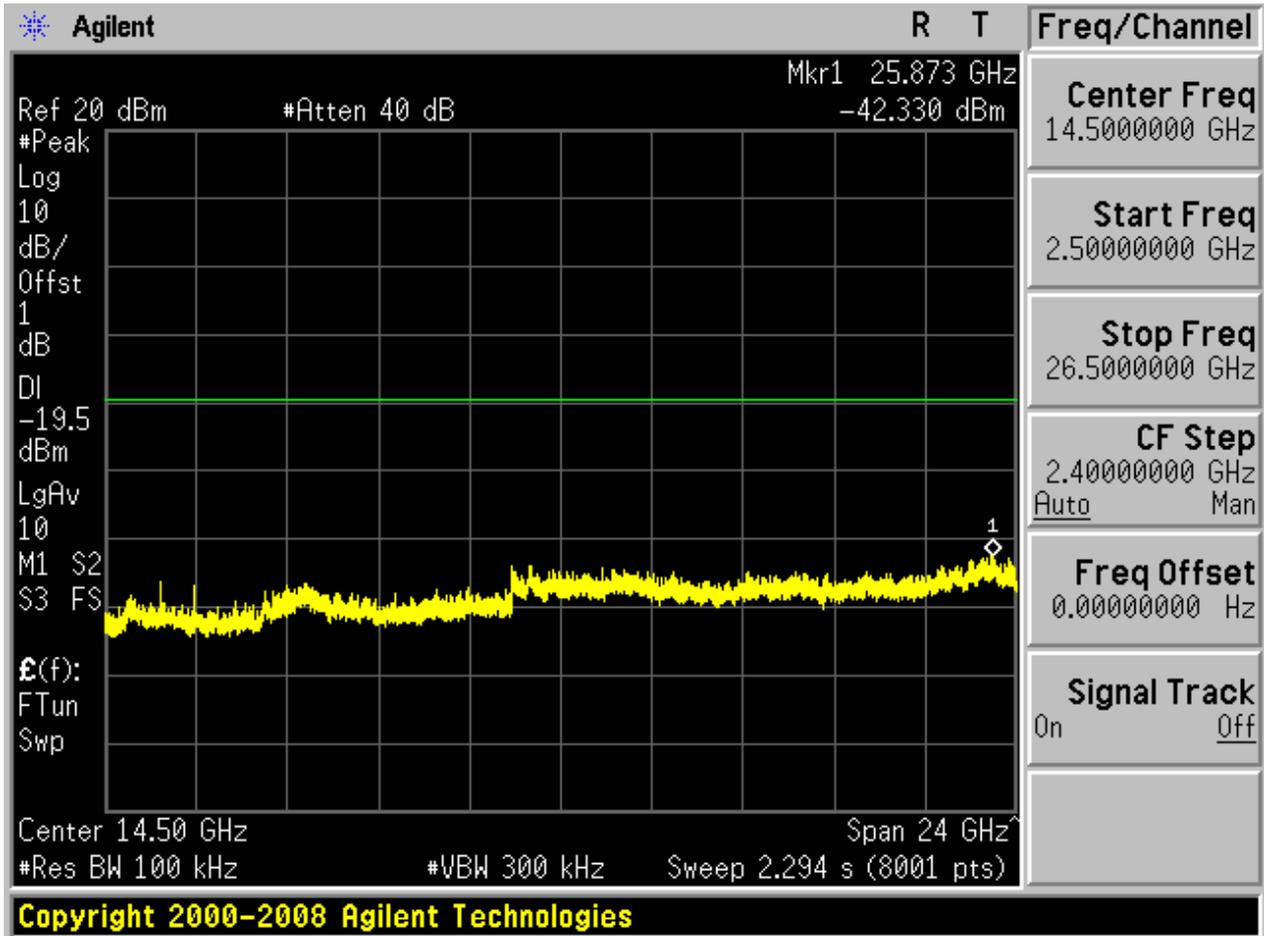


2.3 11B\_M@Ant 1


Pref:

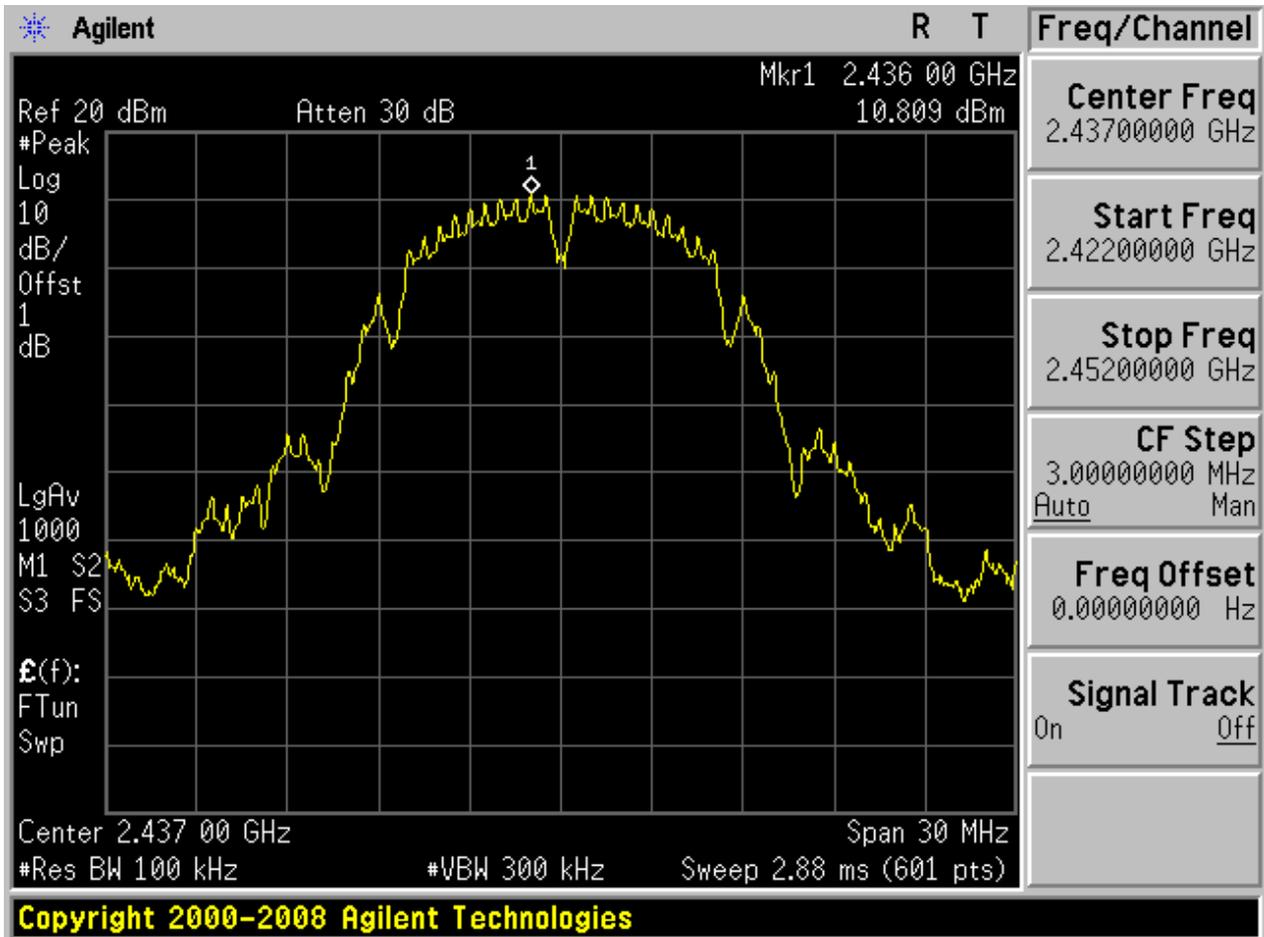






Puw:

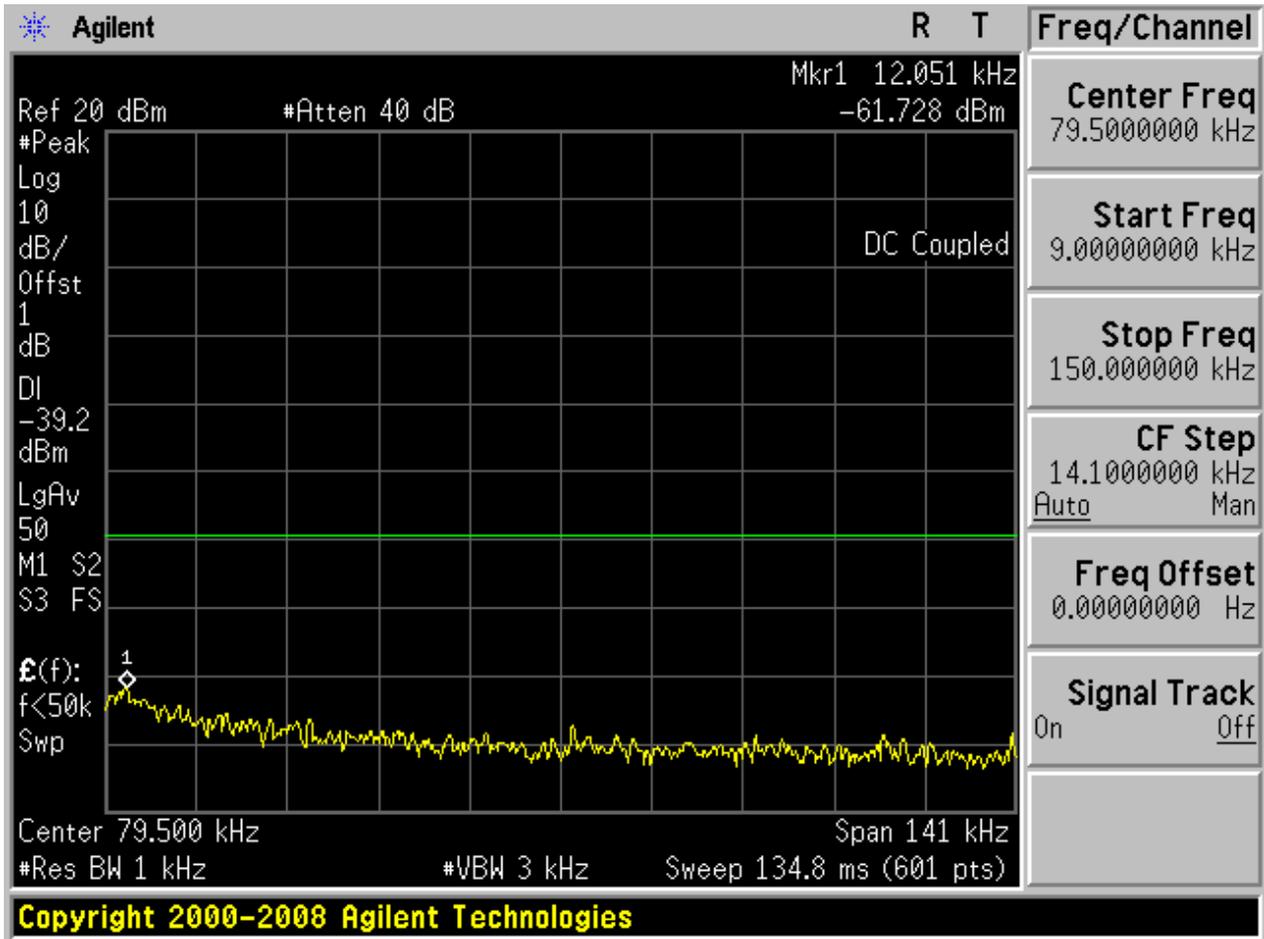


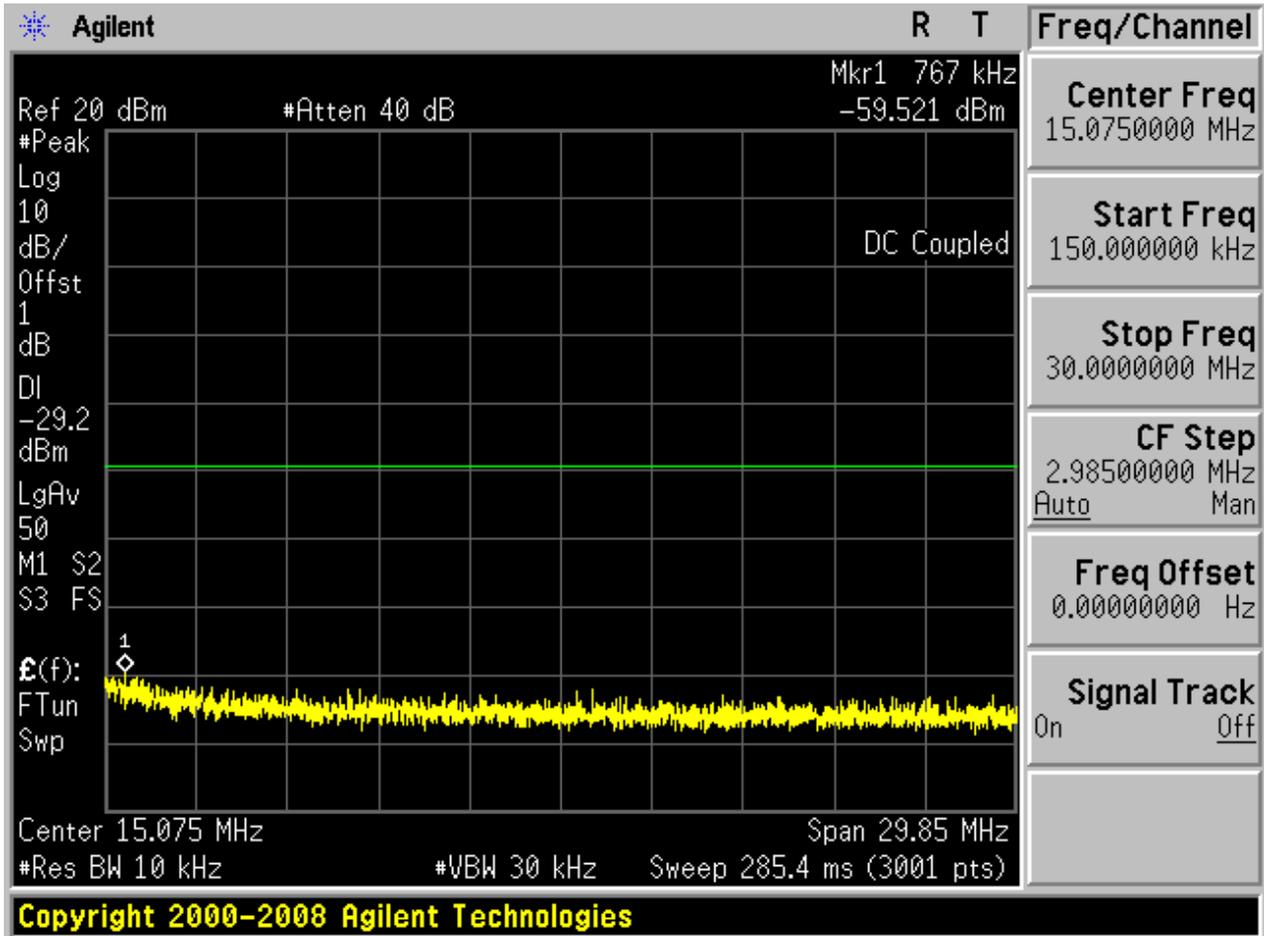

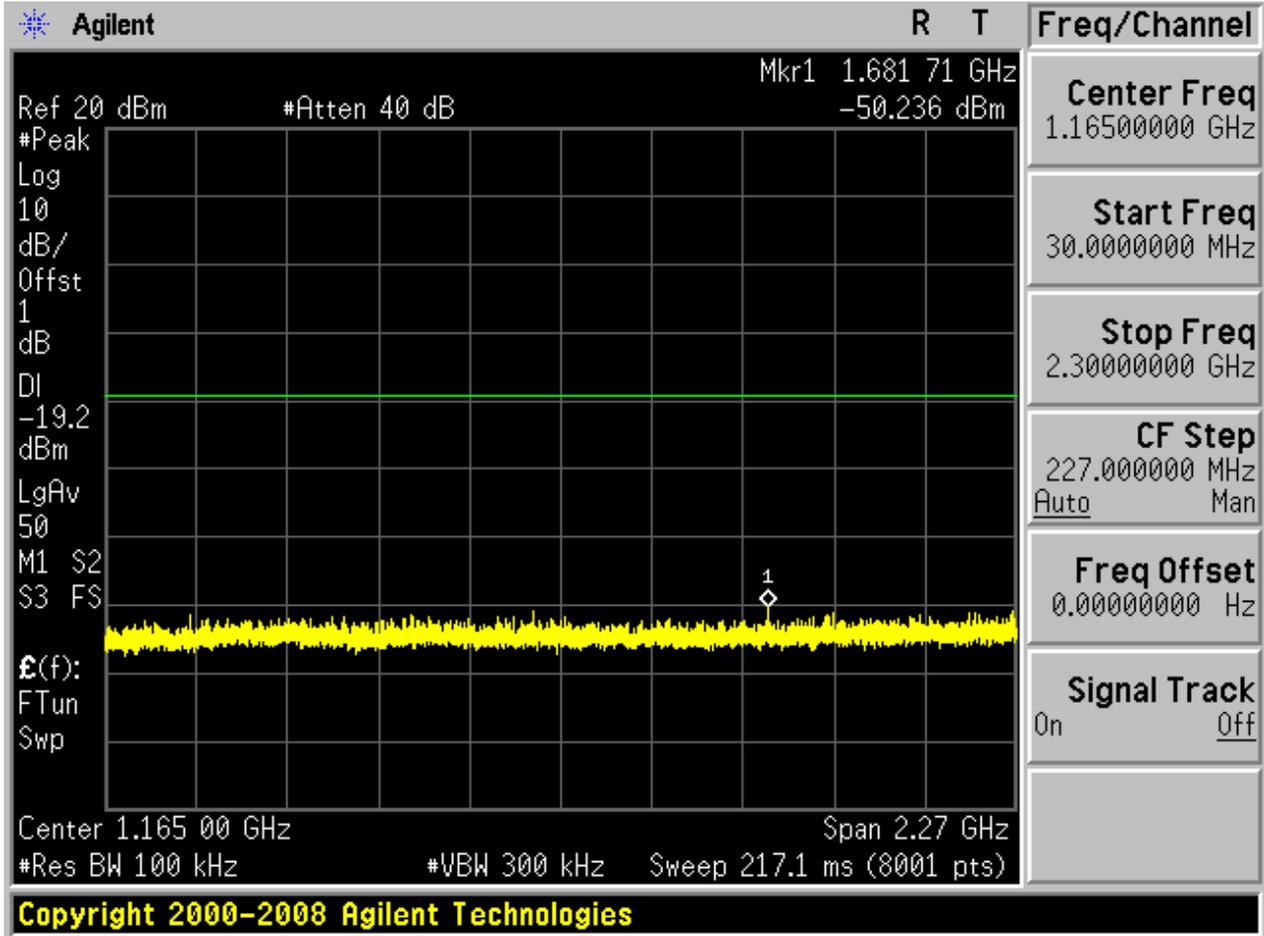

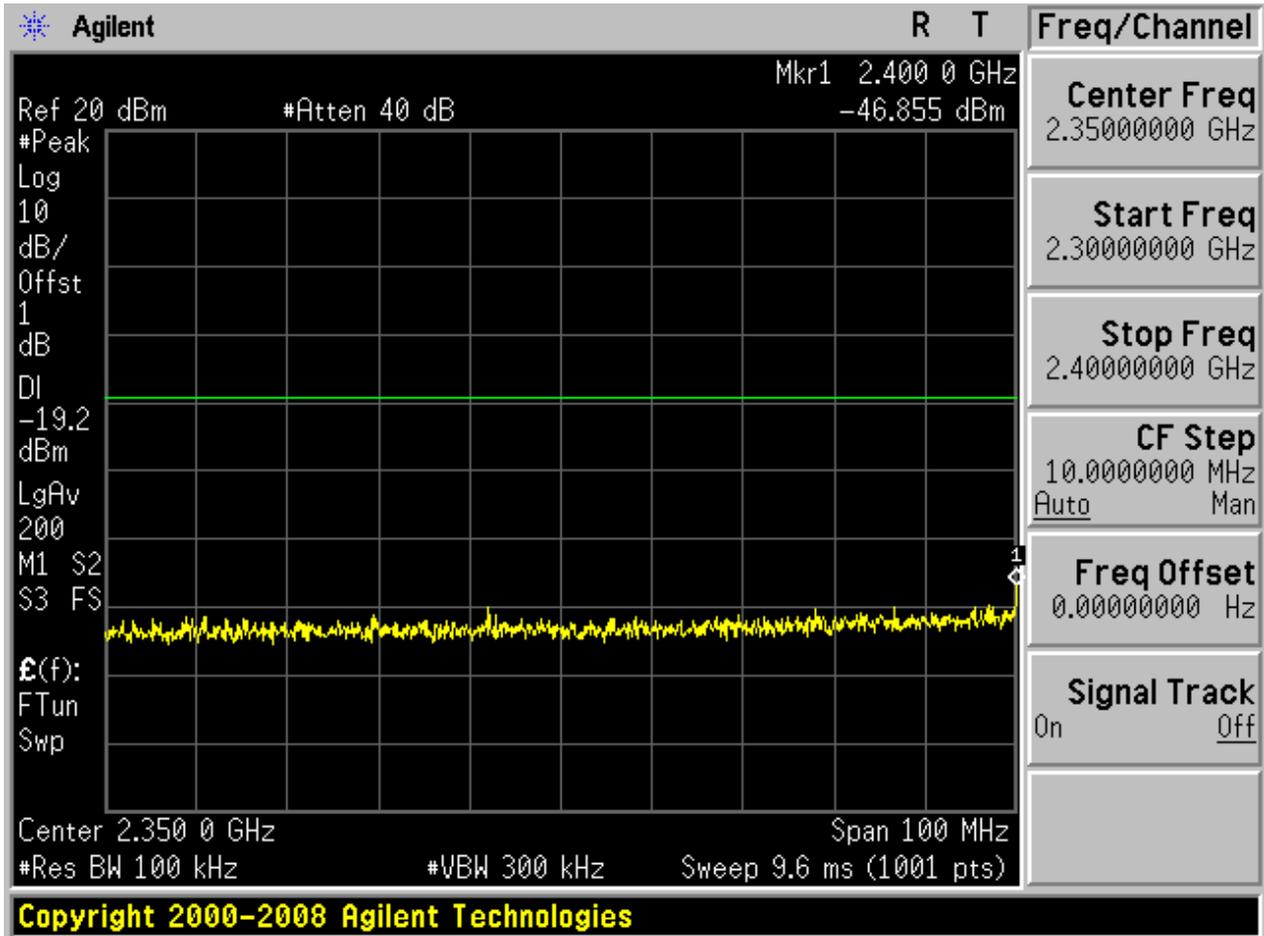

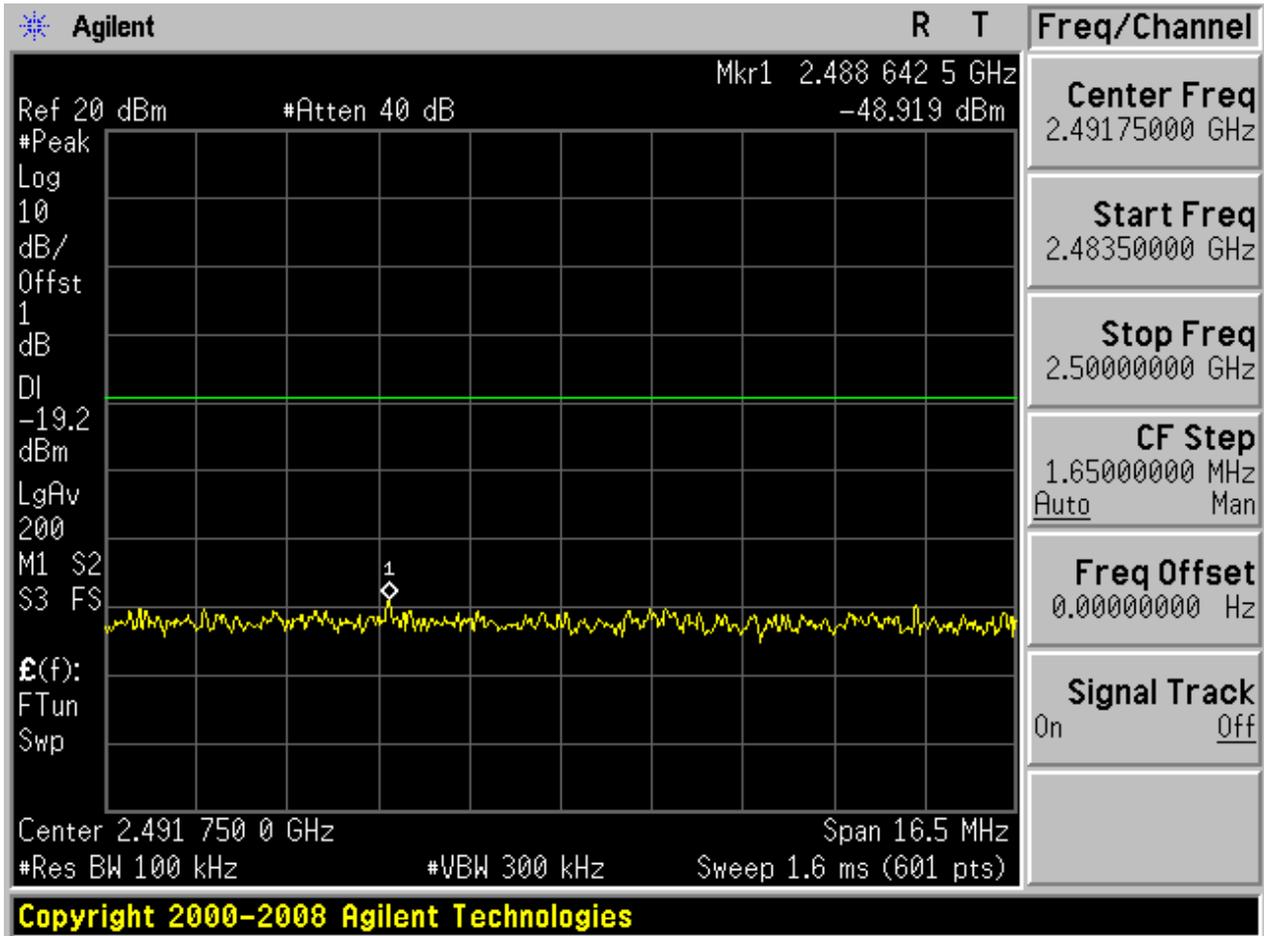


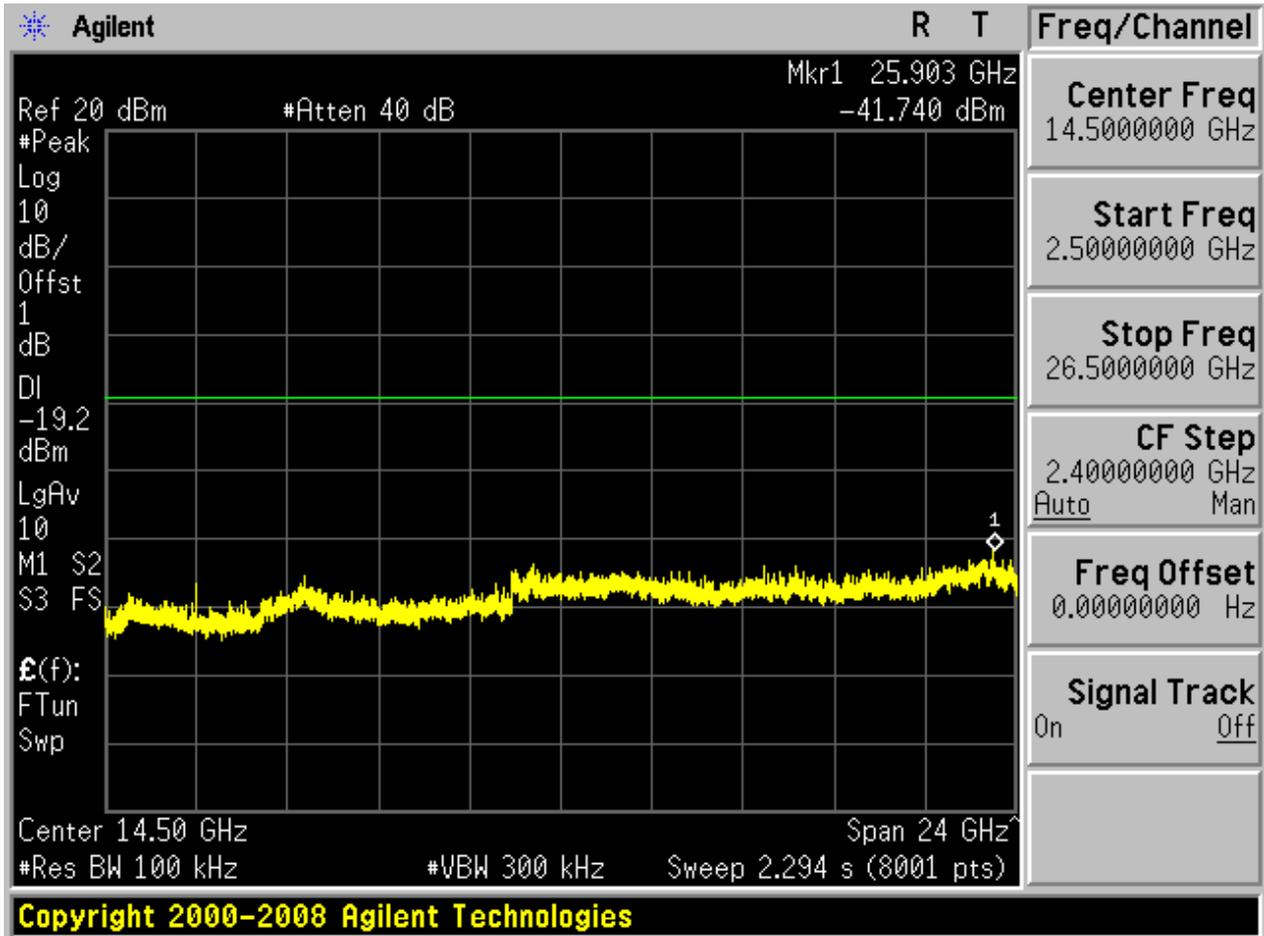




2.5 11B\_H@Ant 1


Pref:

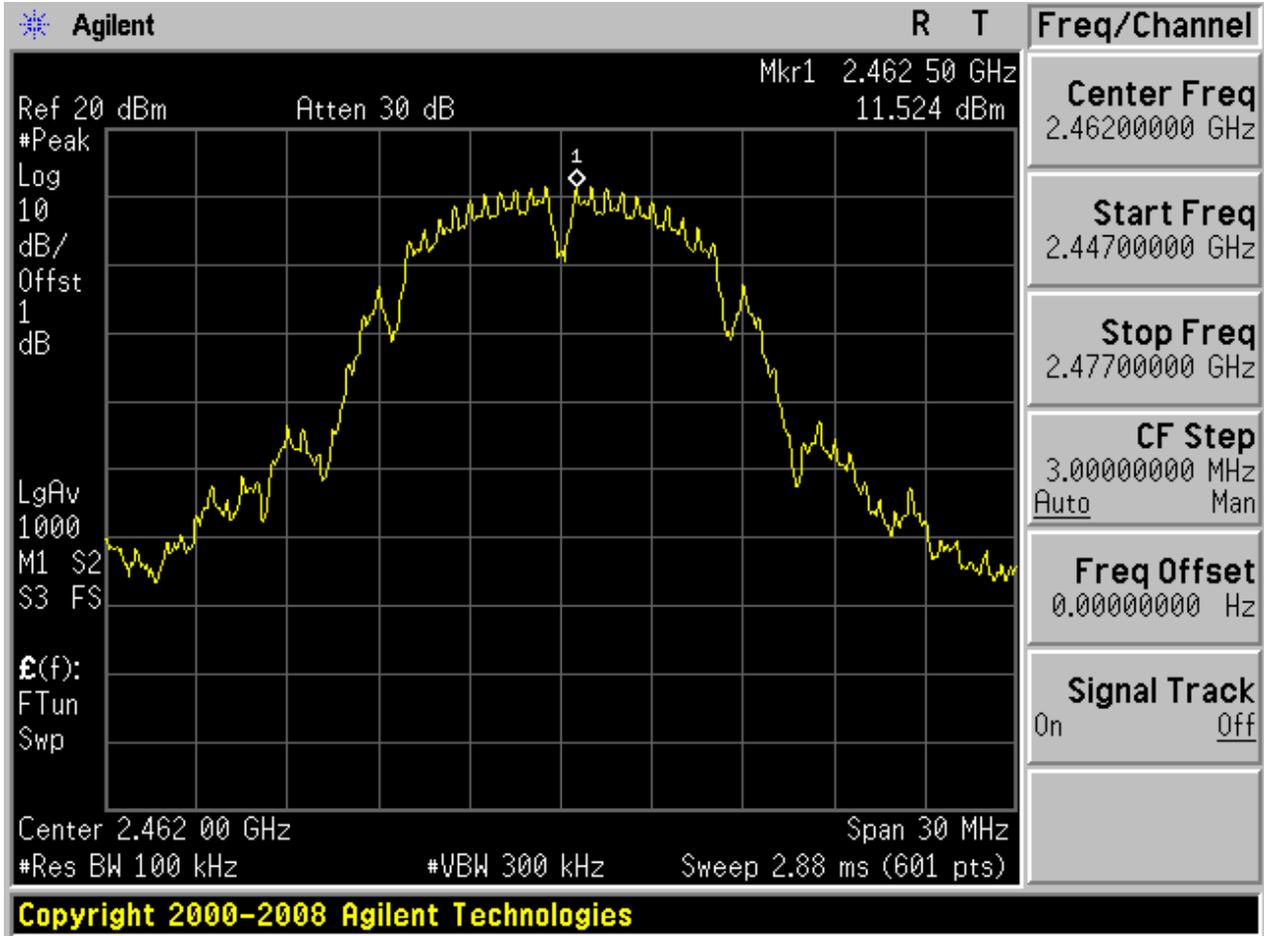






Puw:

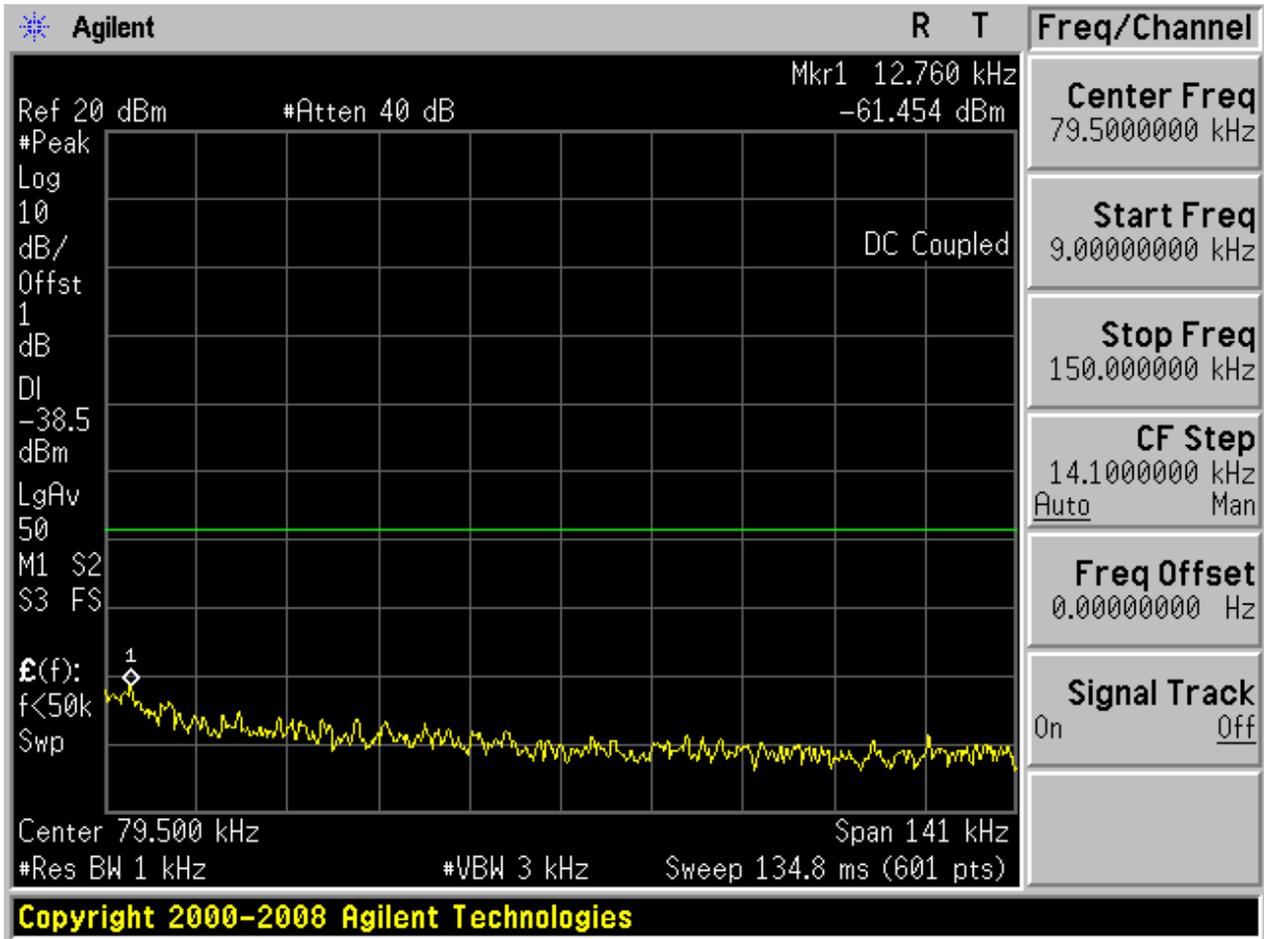


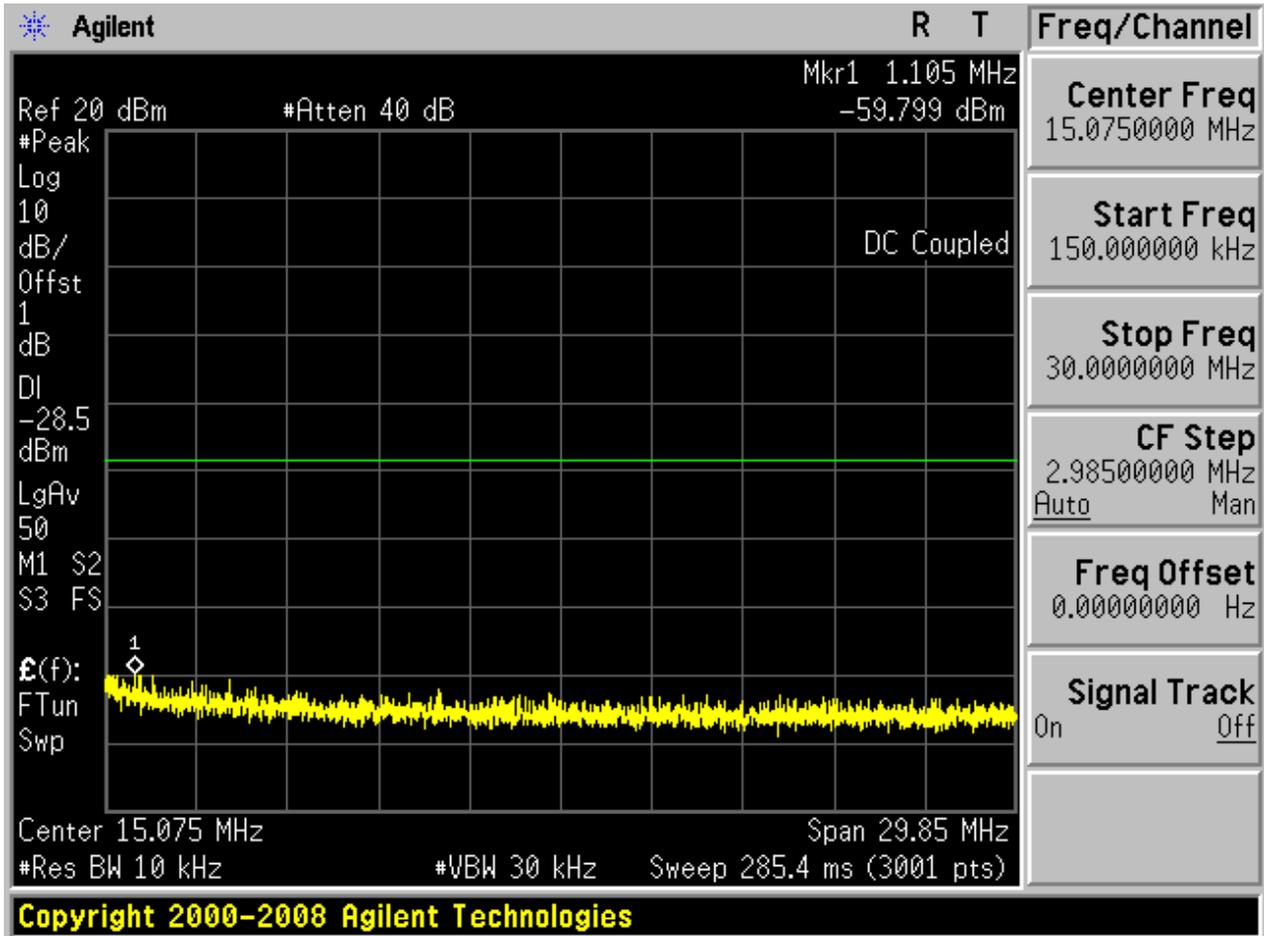

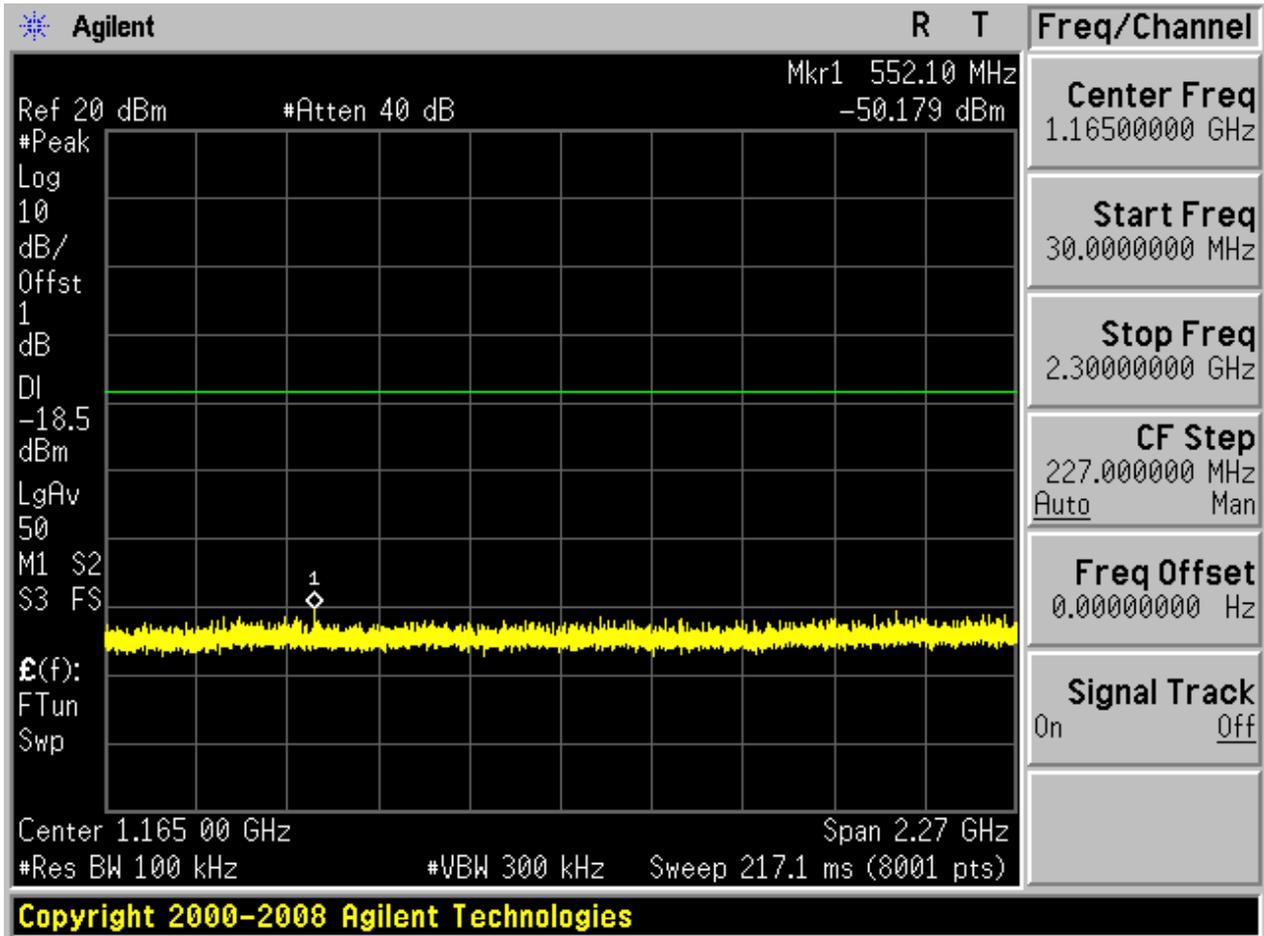

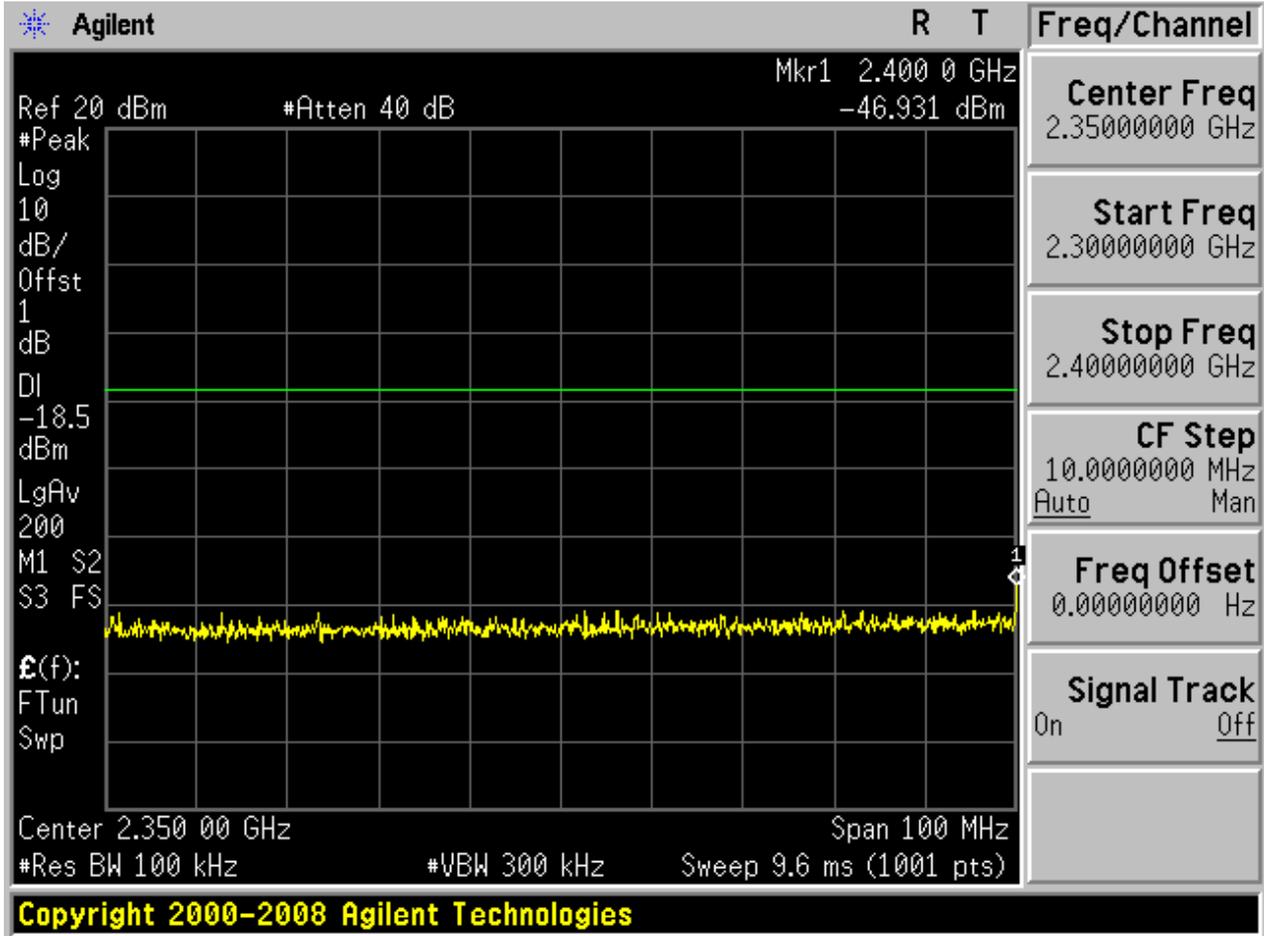

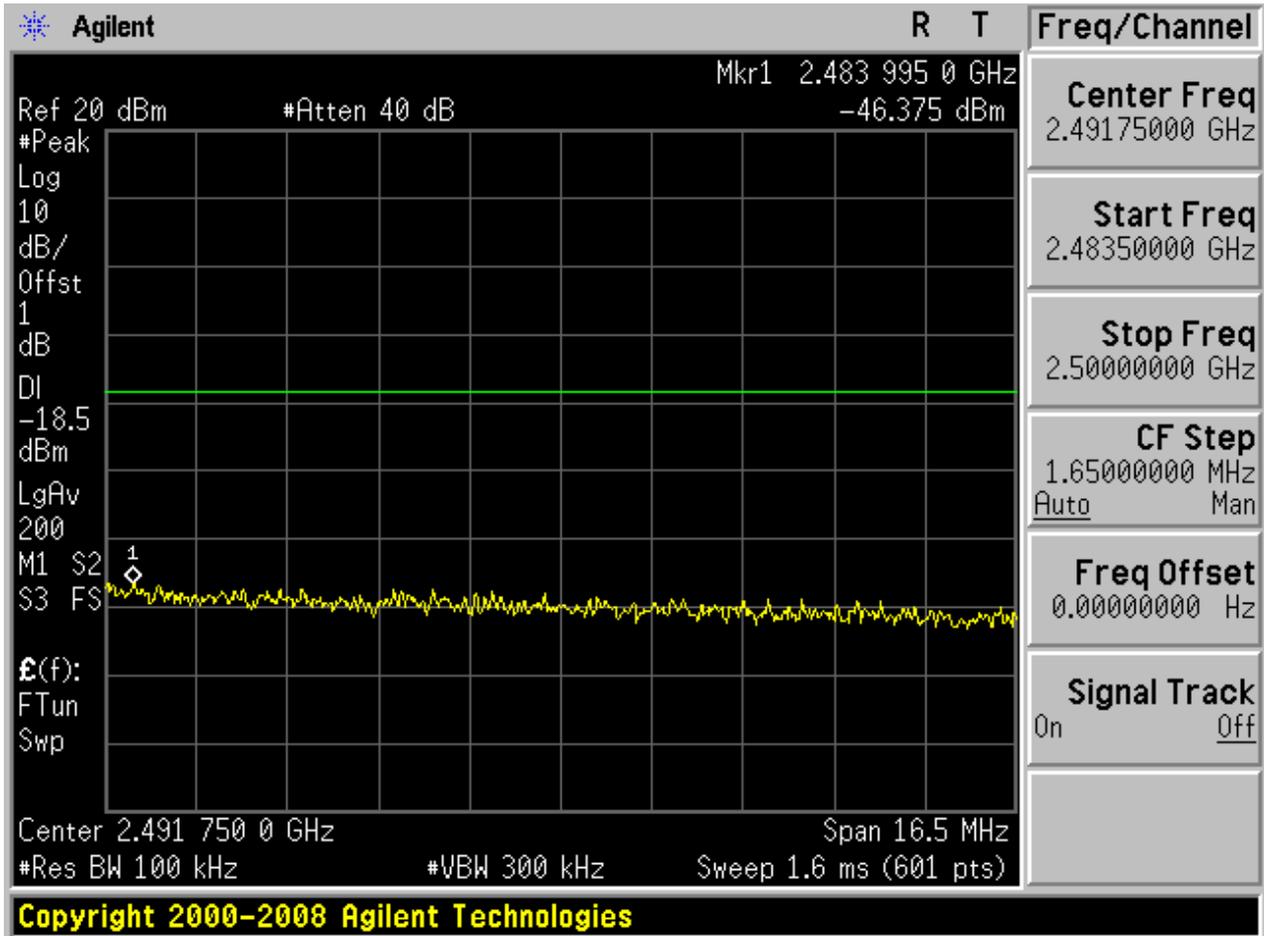


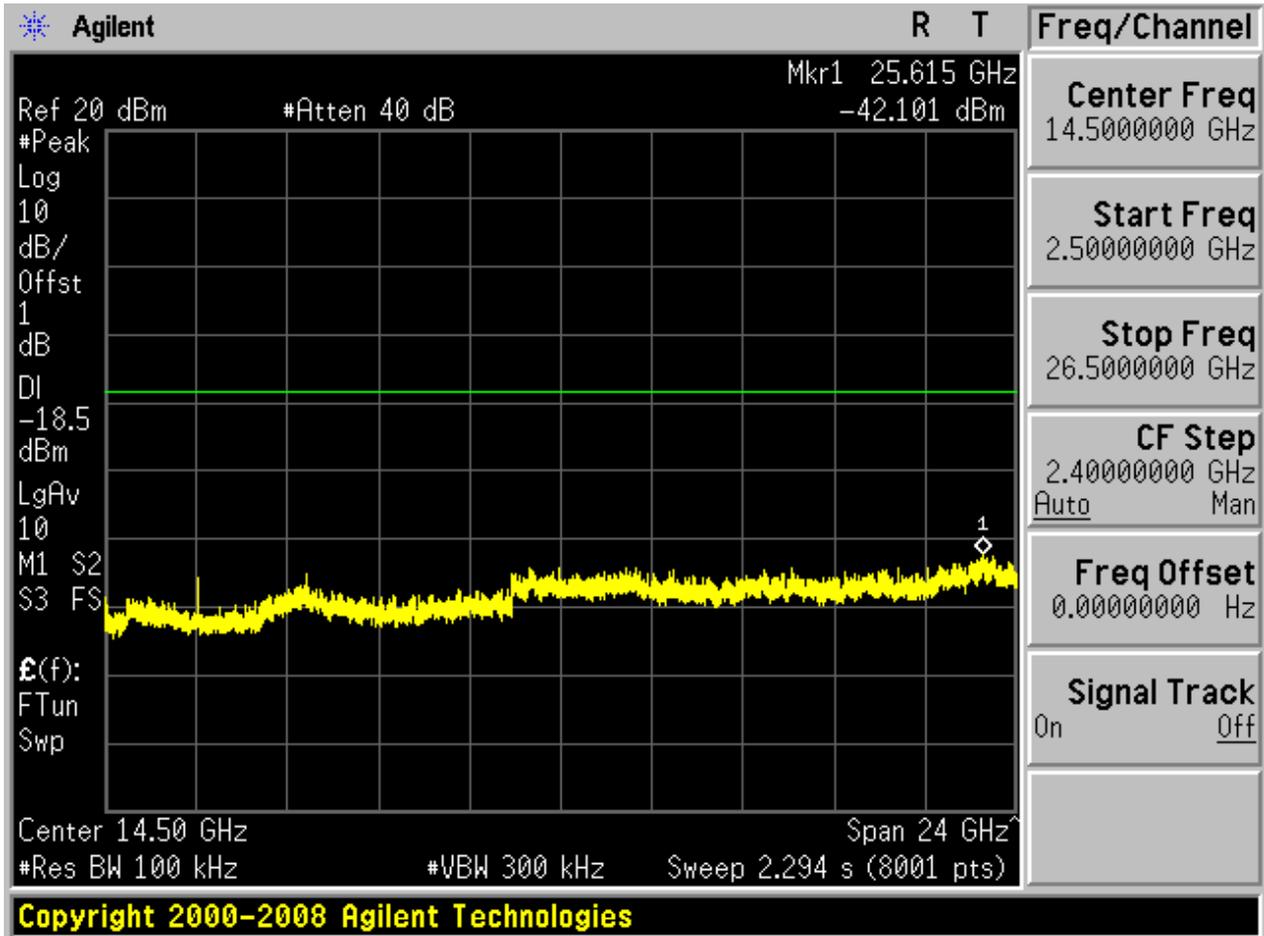




2.7 11G\_L@Ant 1


Pref:

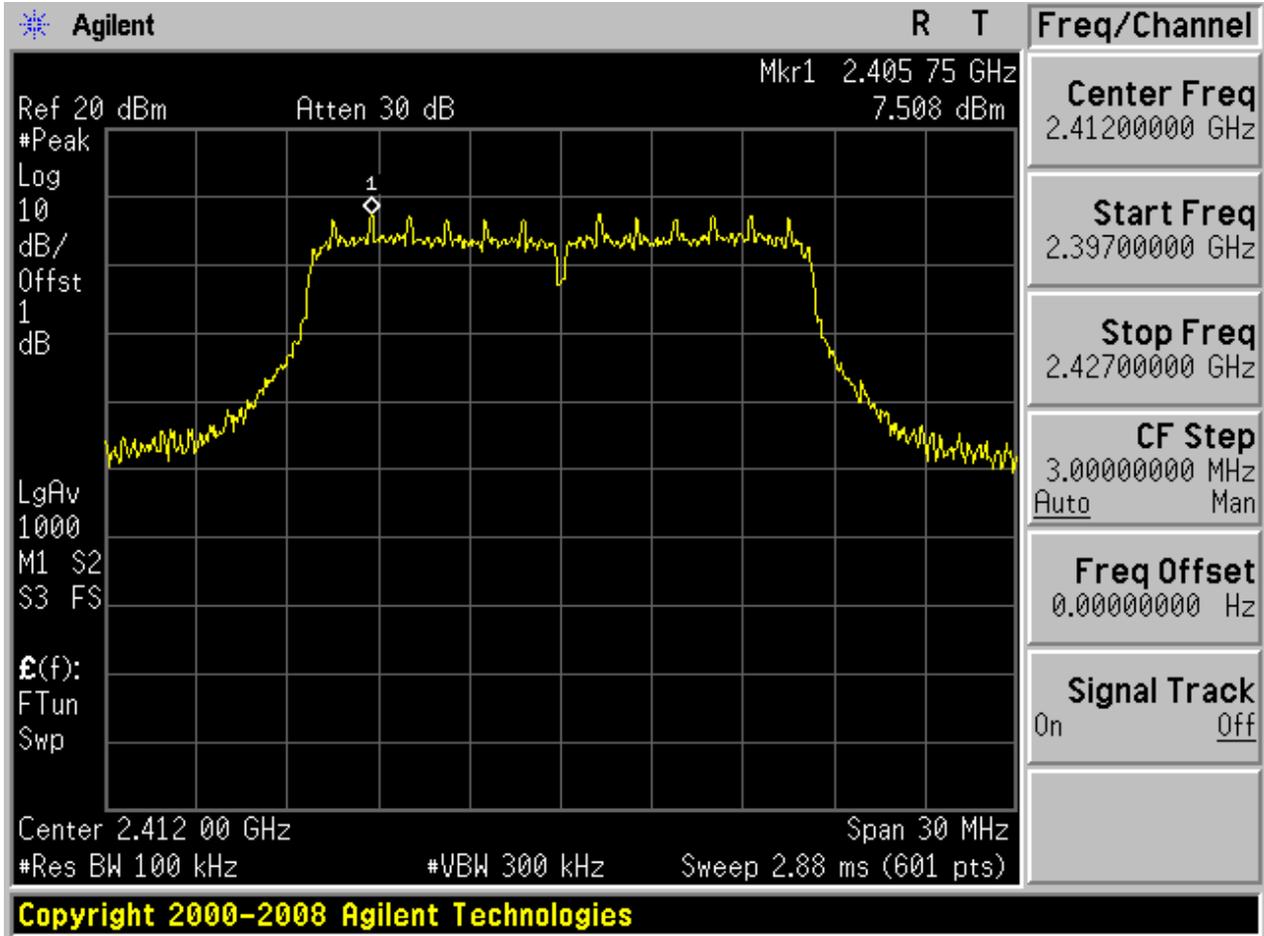






Puw:

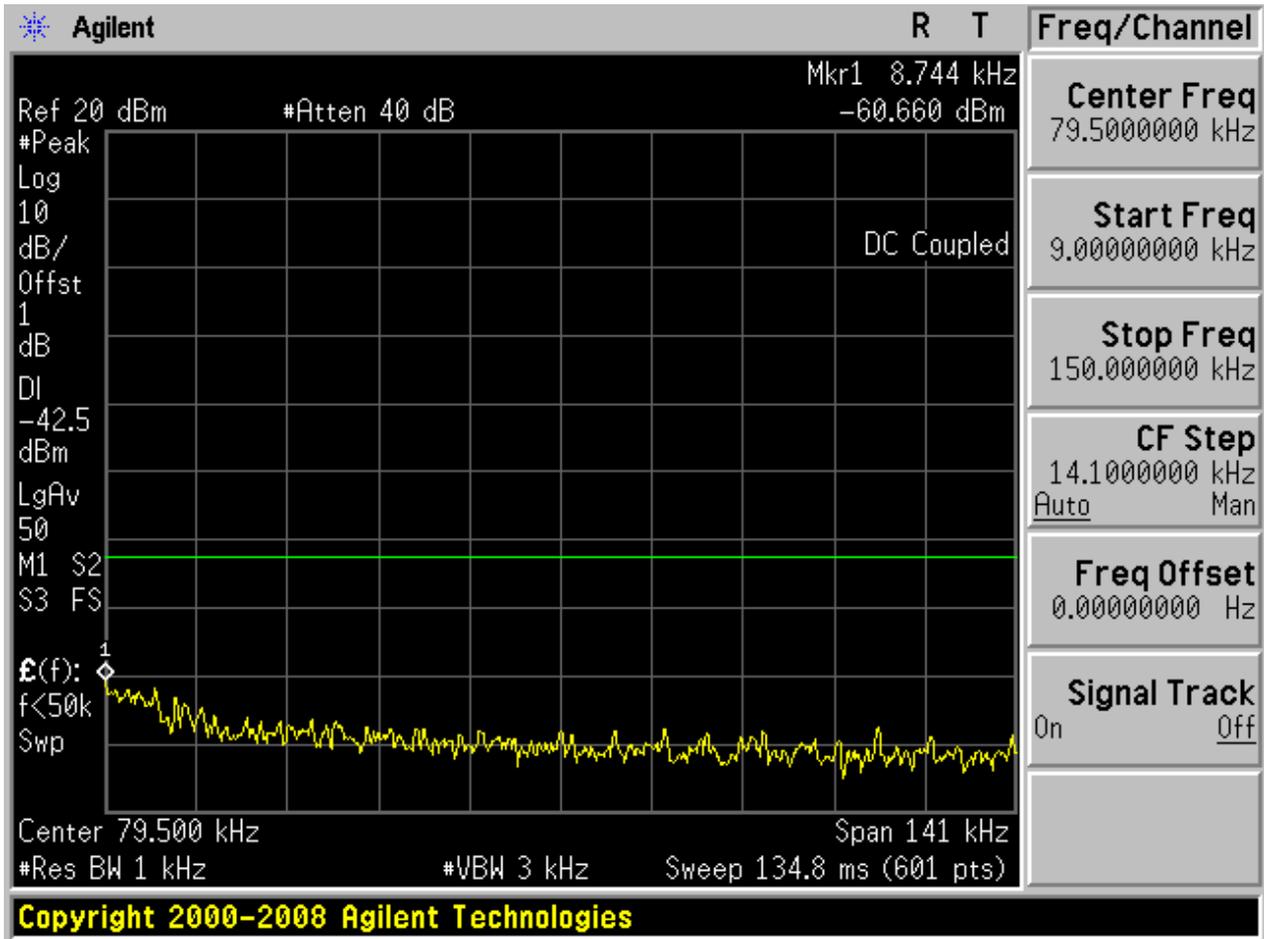


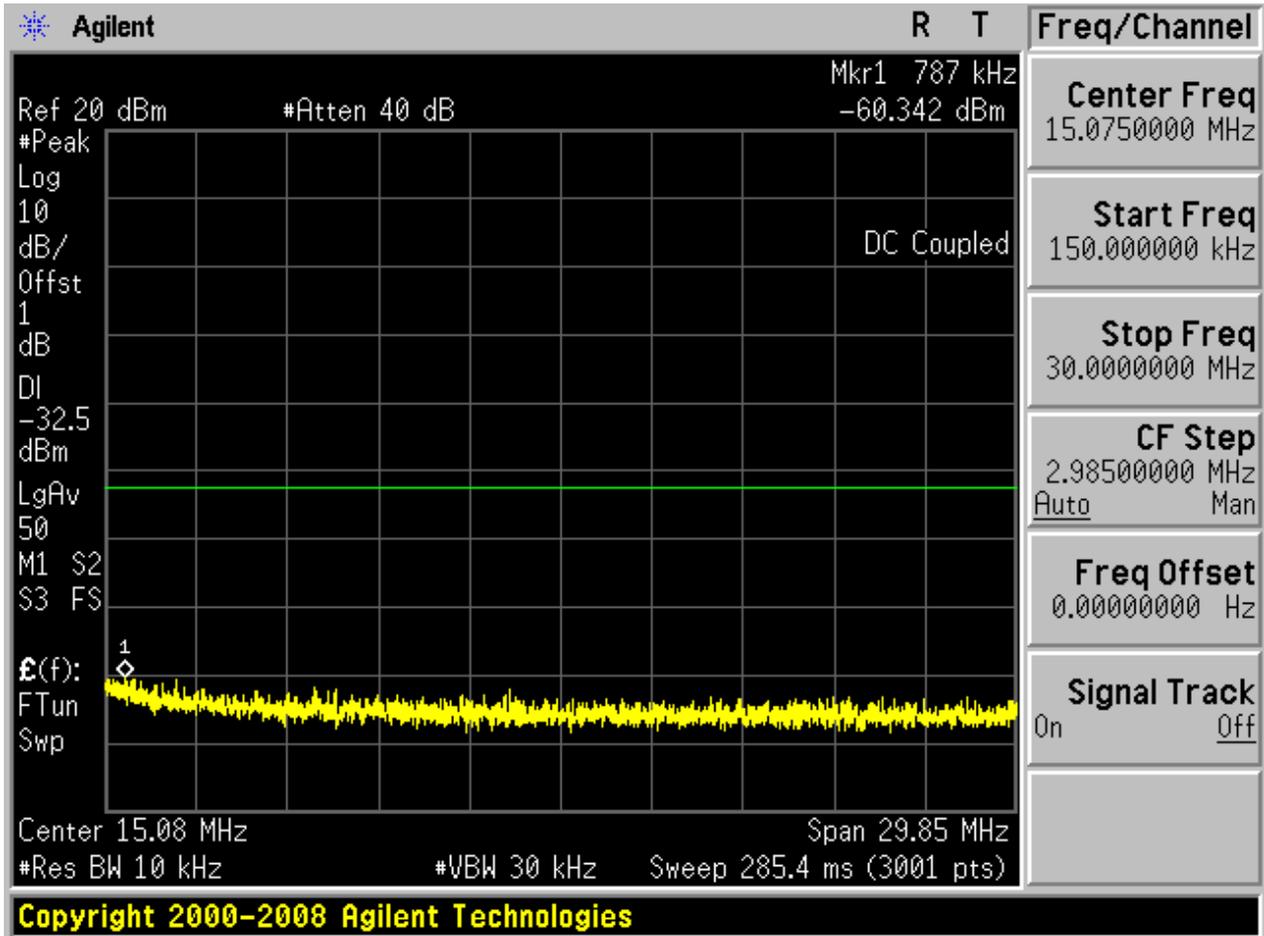

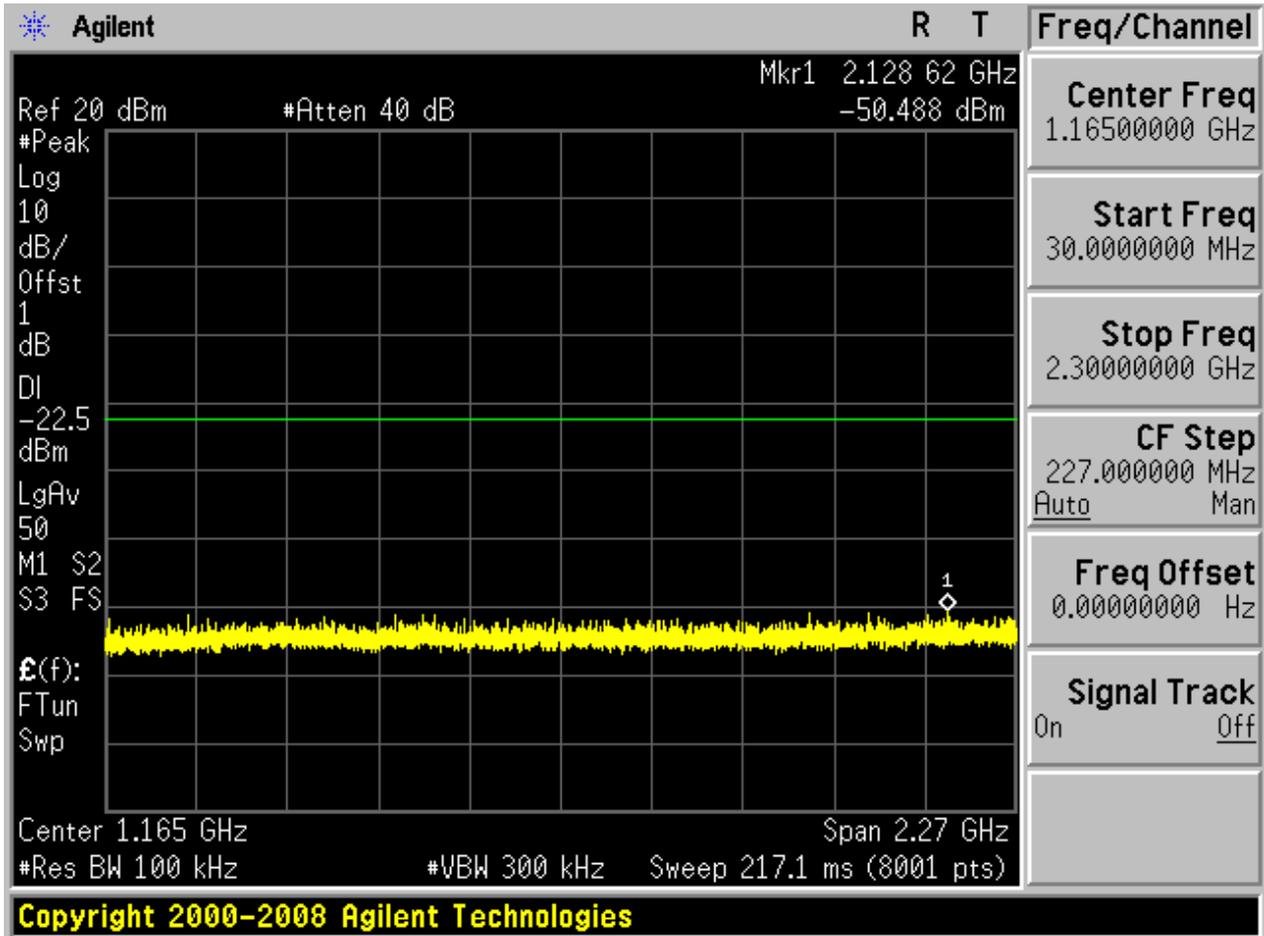

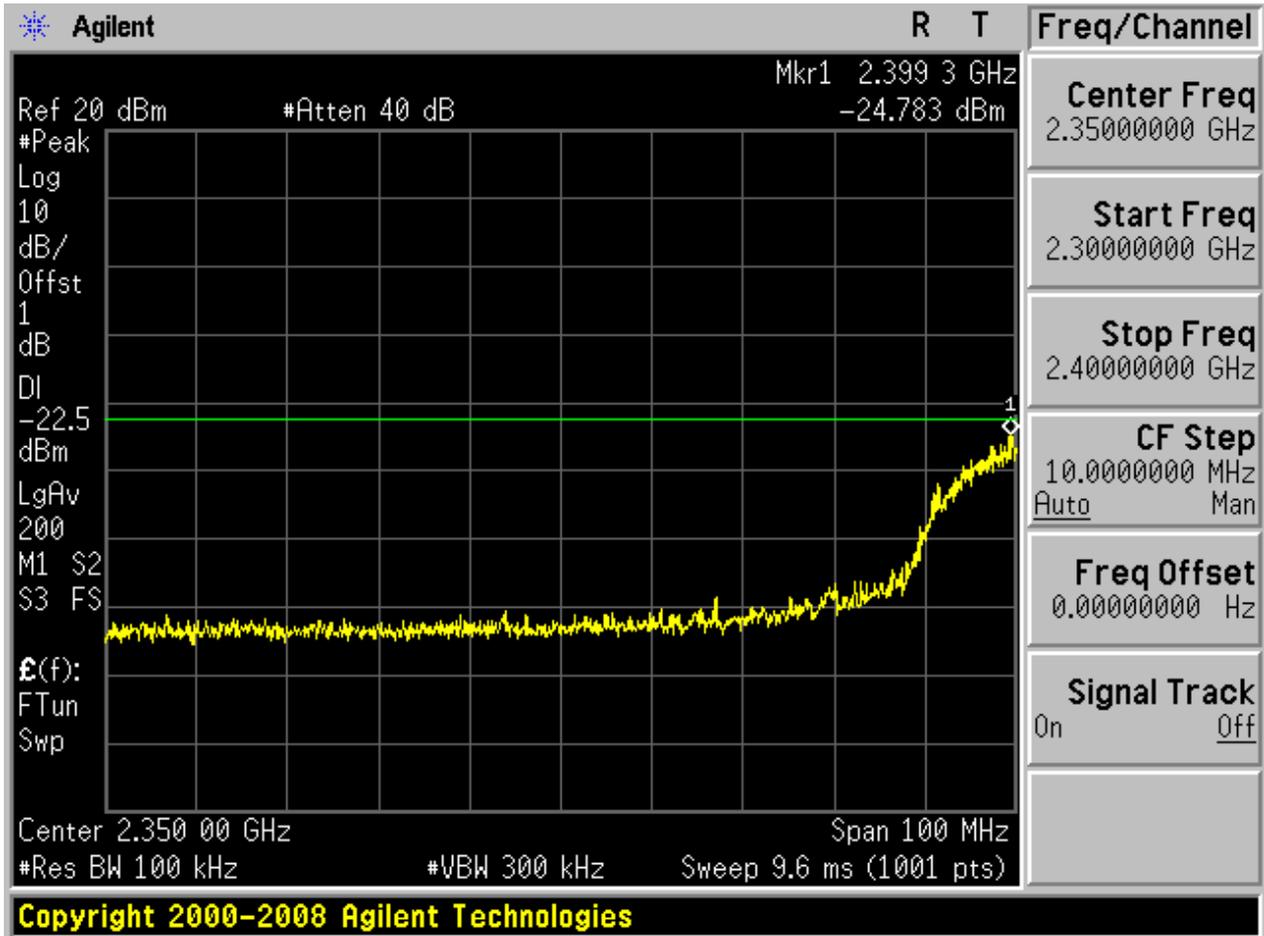

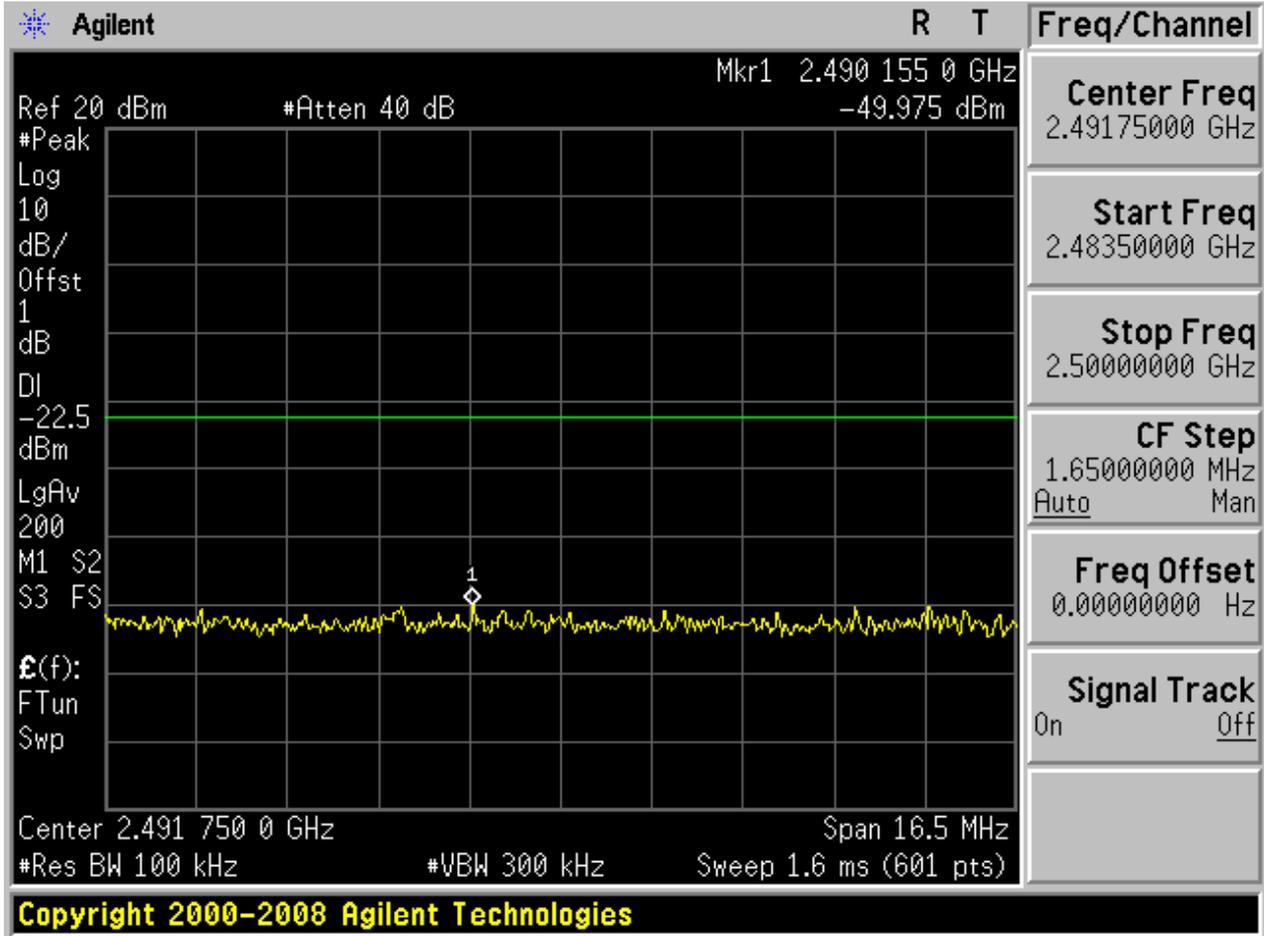


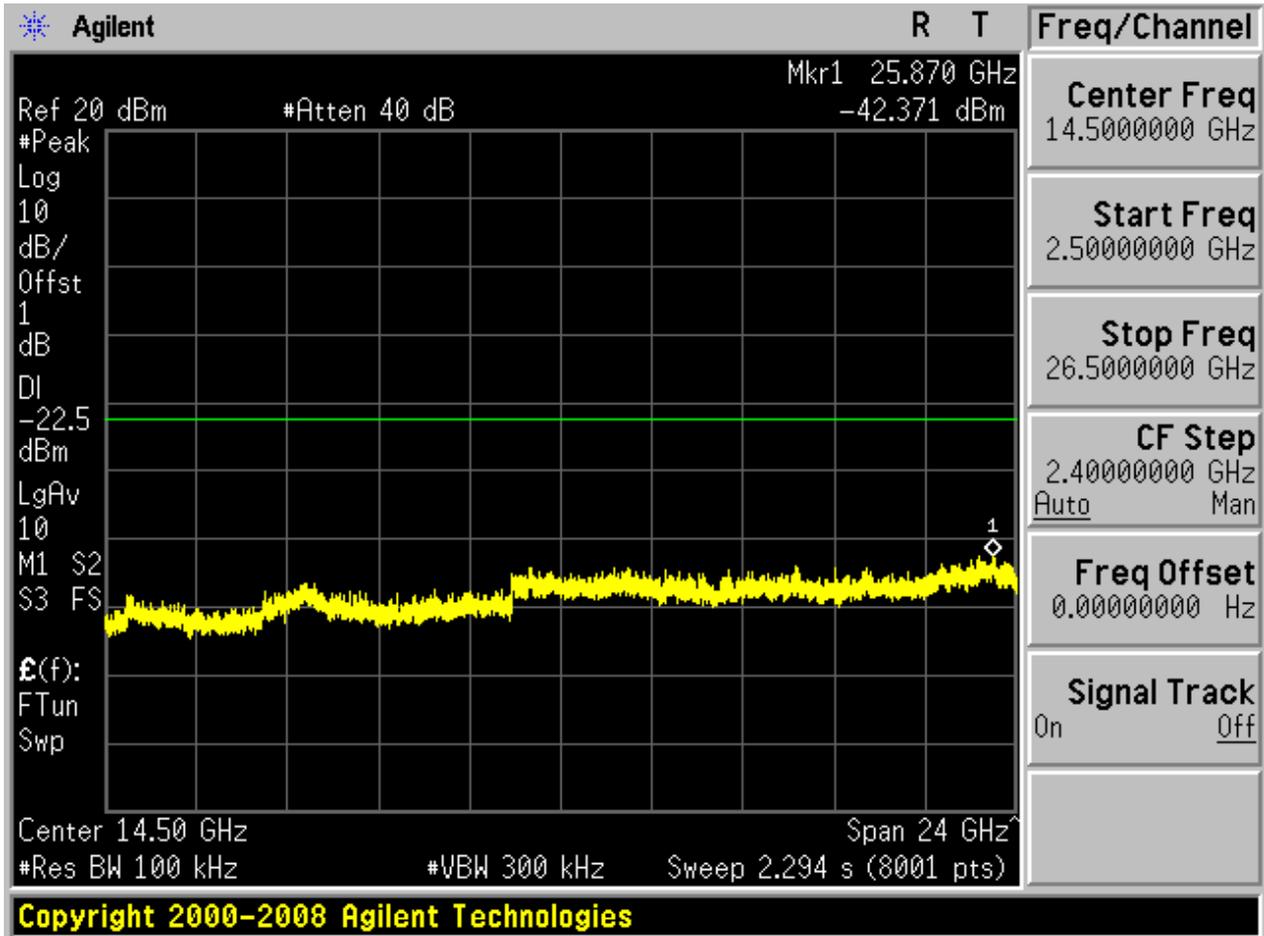




2.9 11G\_M@Ant 1


Pref:

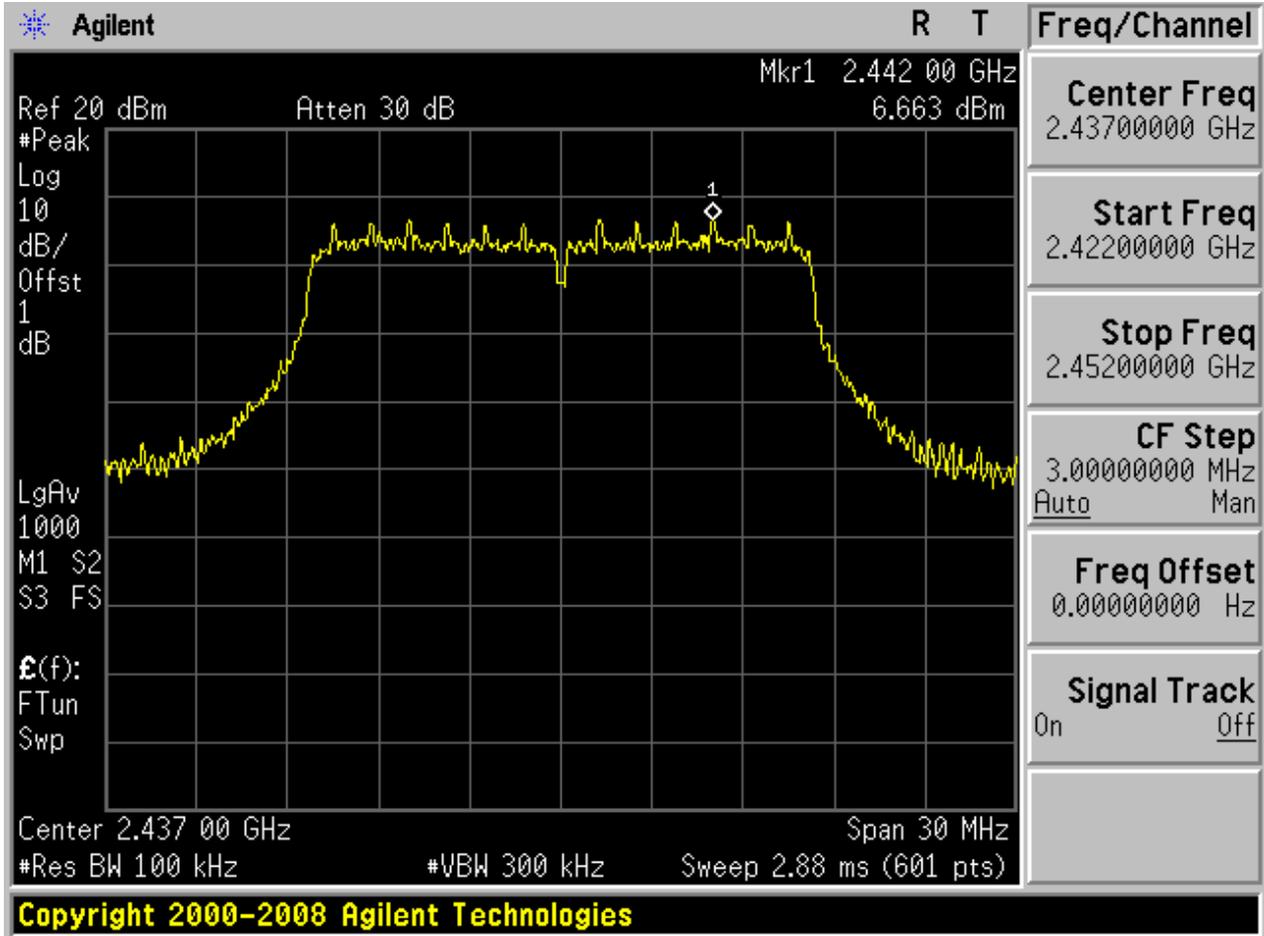






Puw:

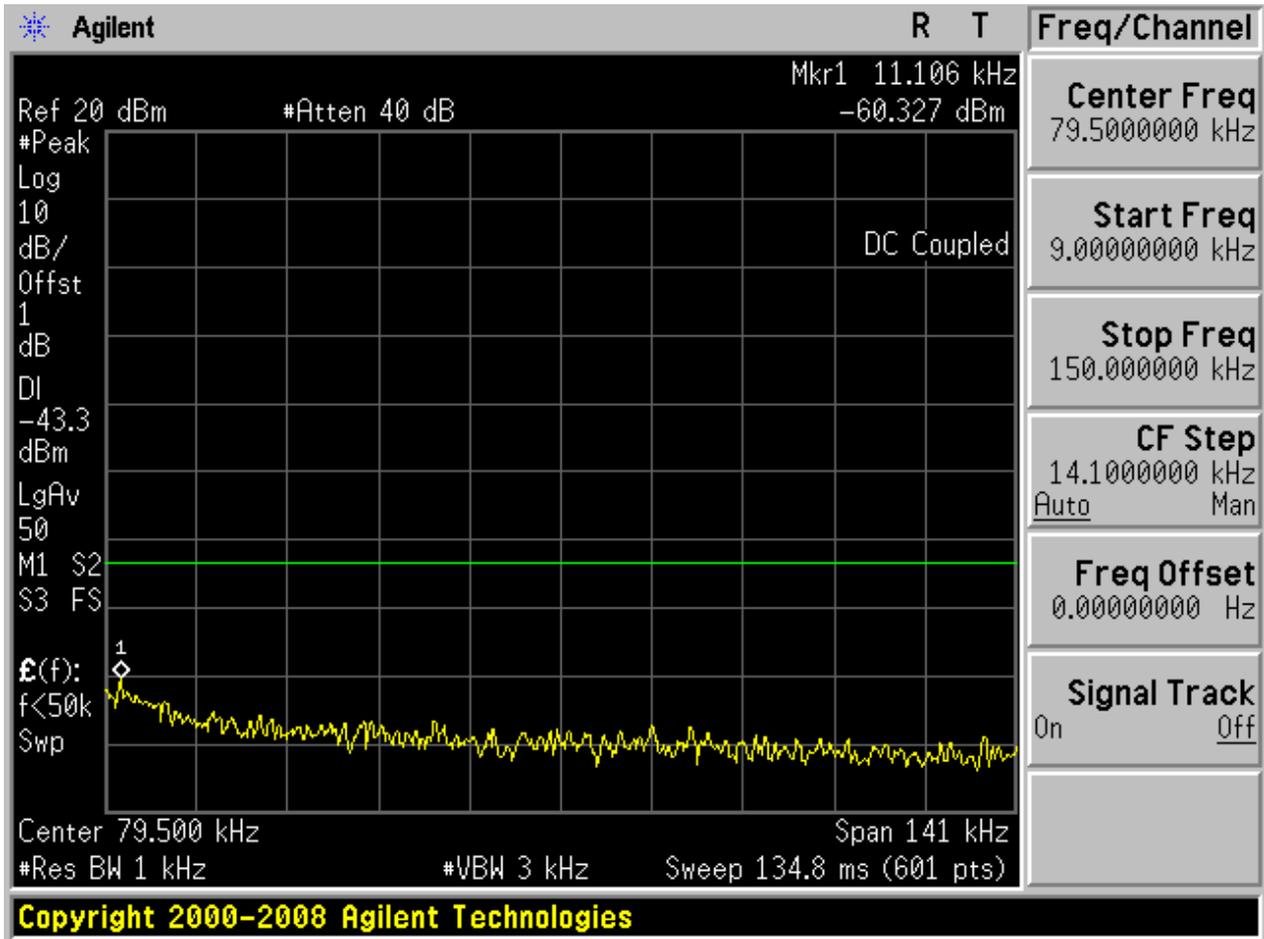

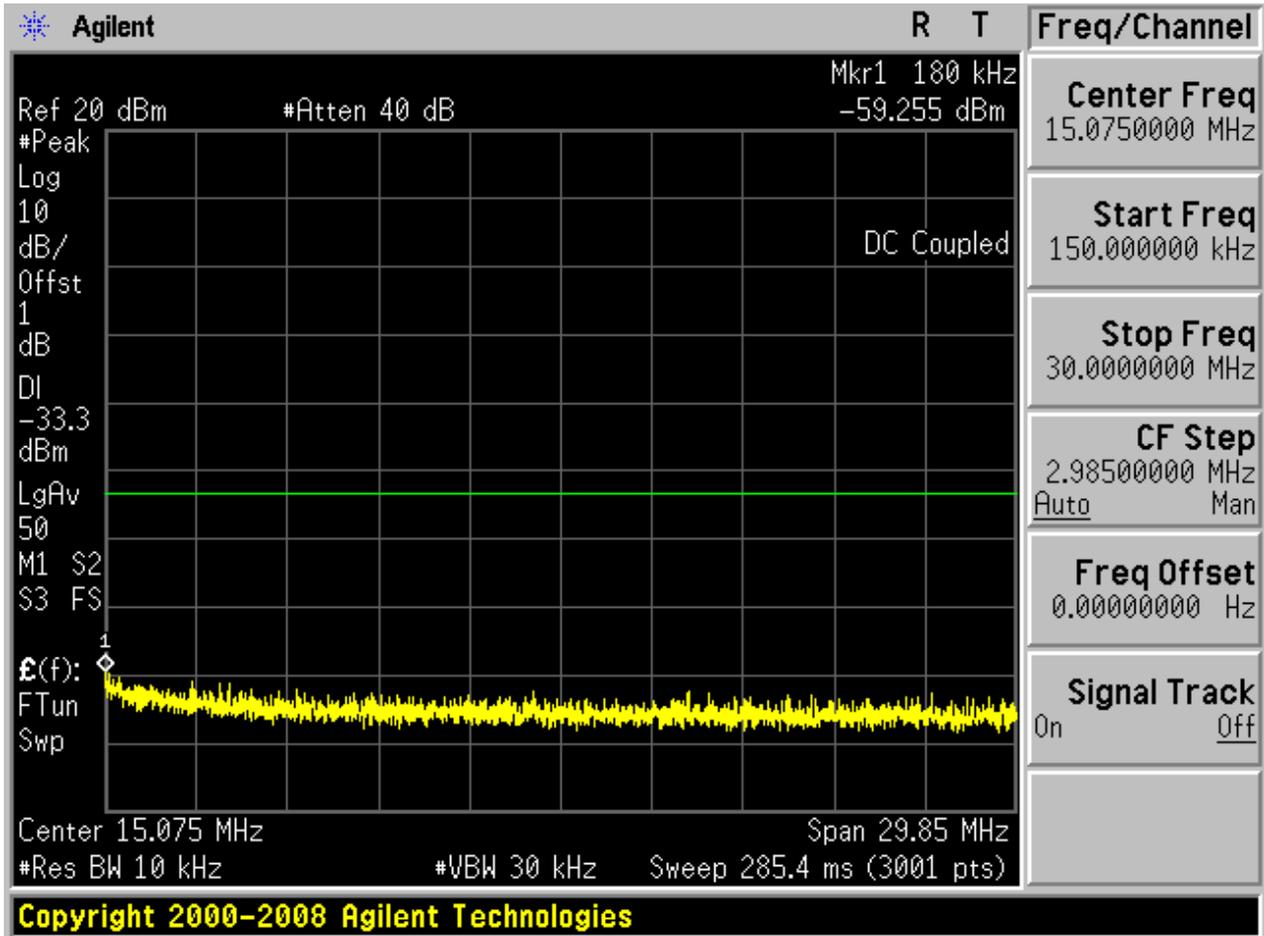


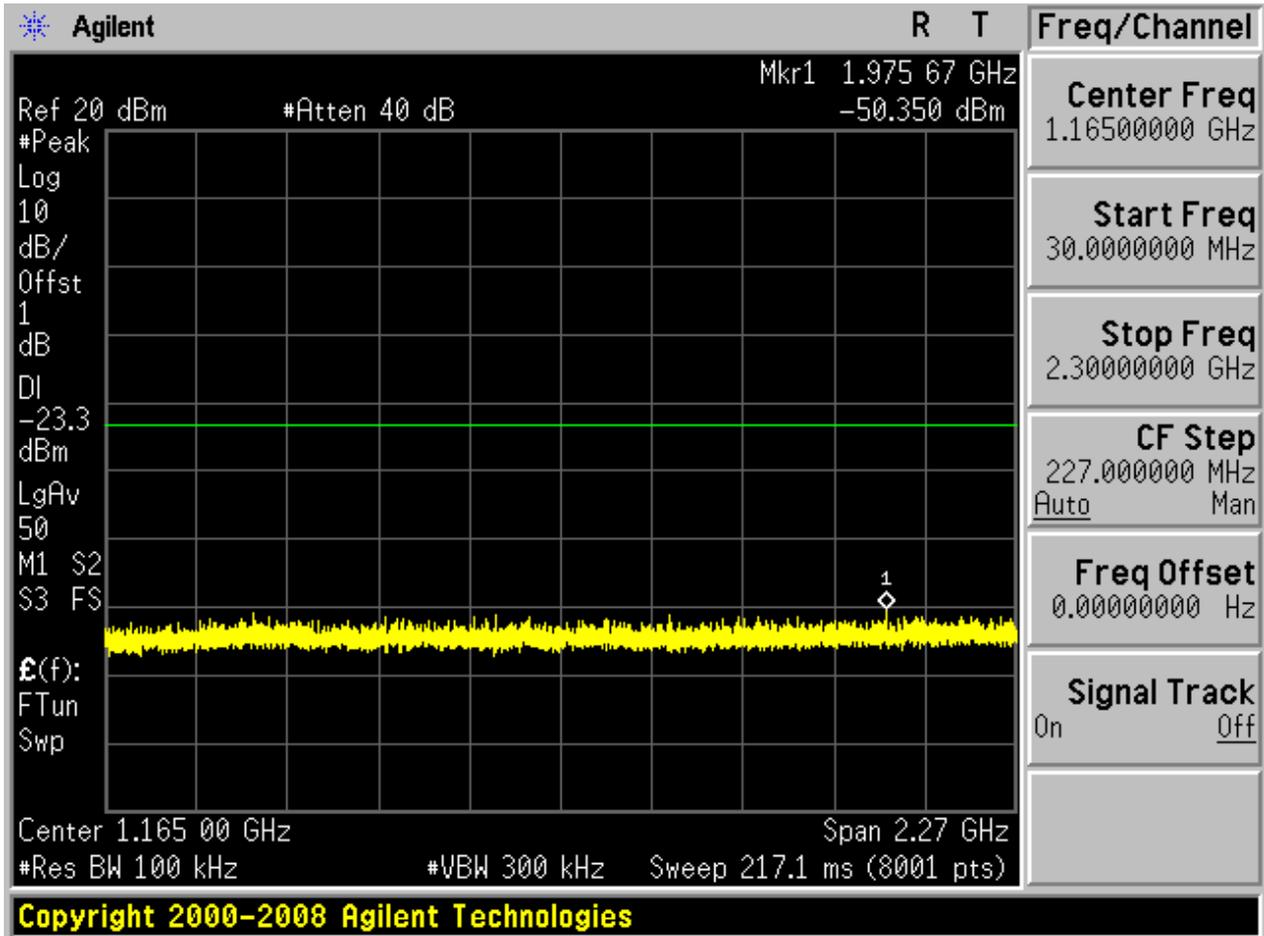

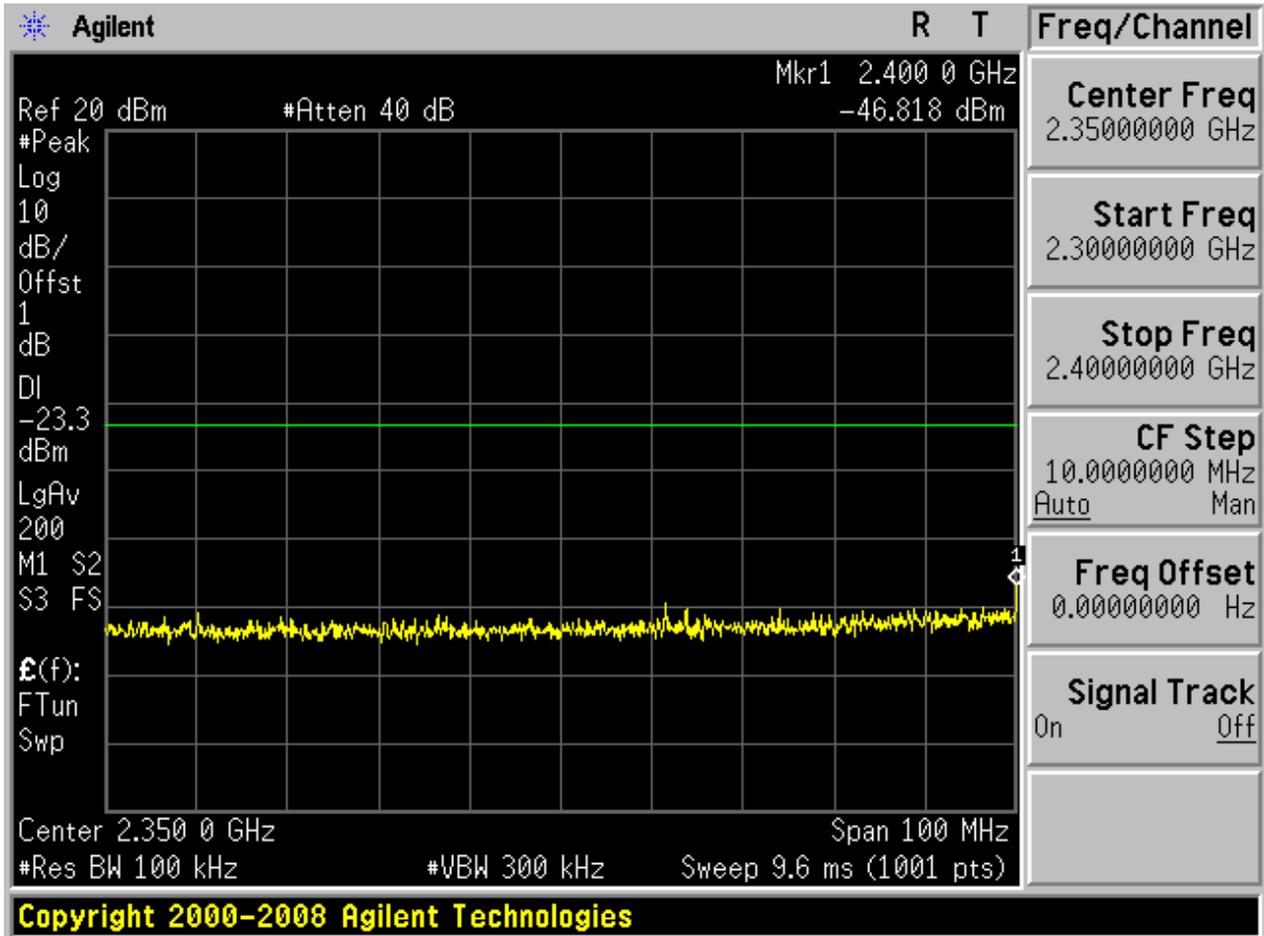

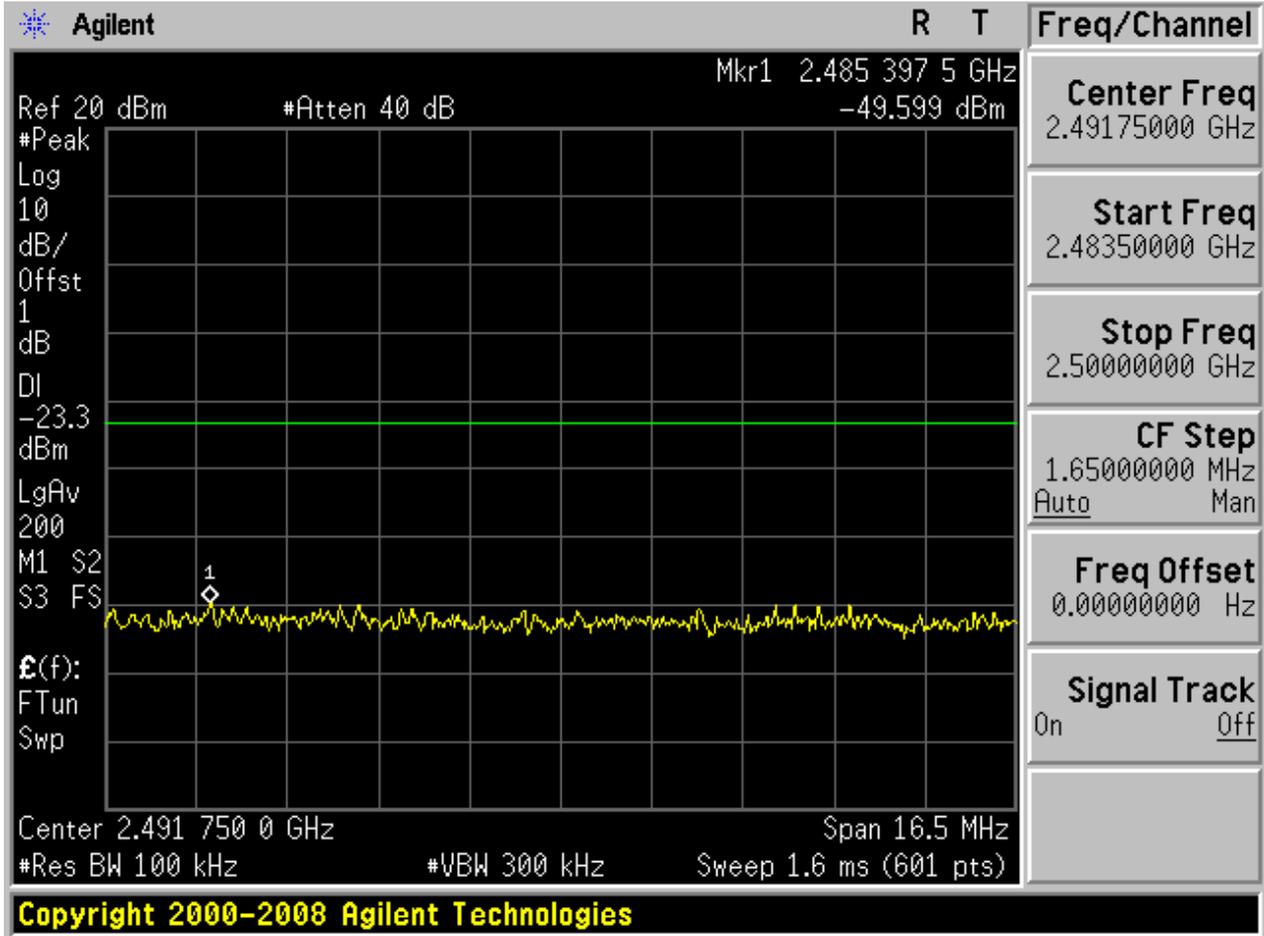


Copyright 2000-2008 Agilent Technologies

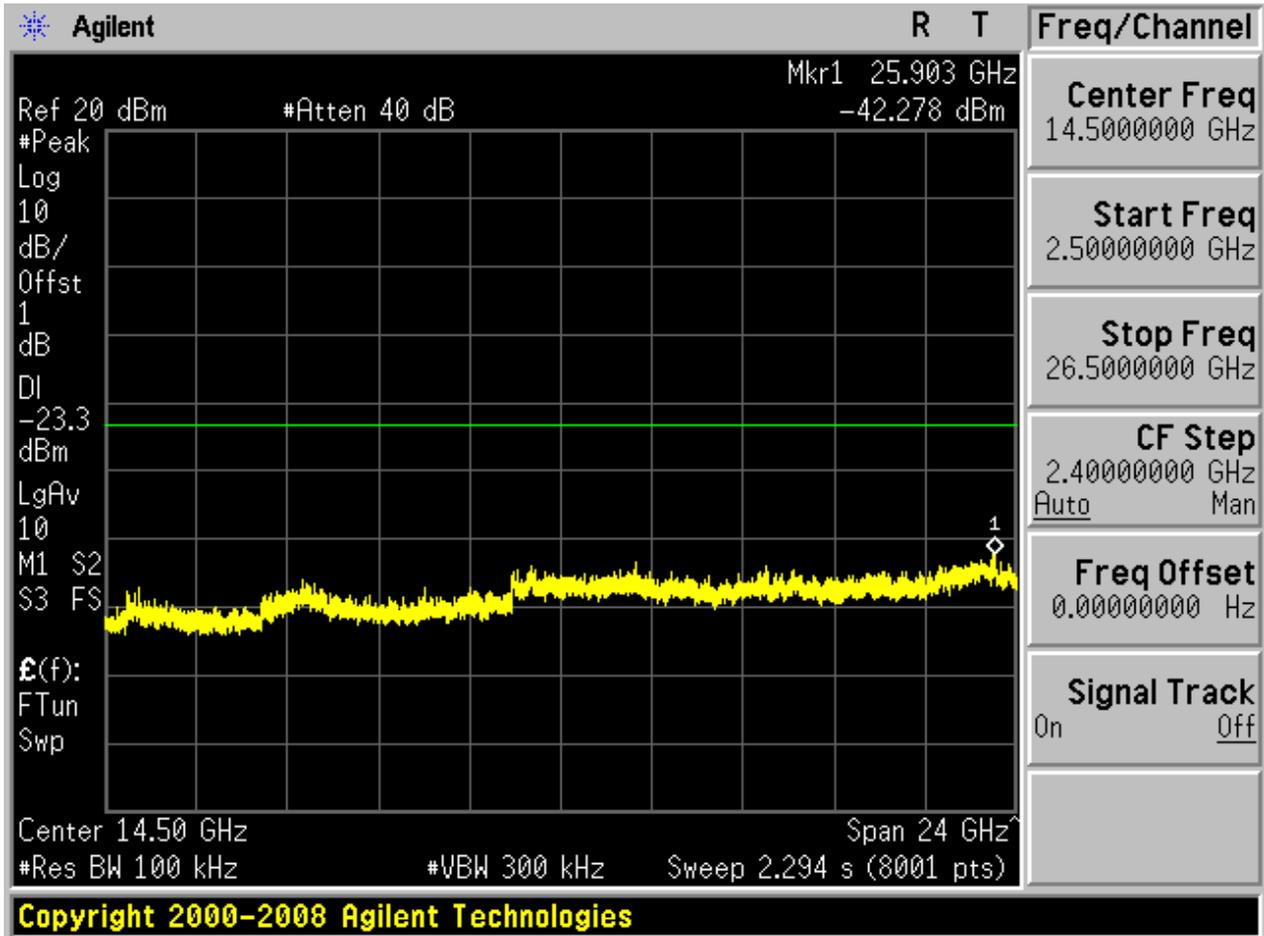




2.11 11G\_H@Ant 1


Pref:

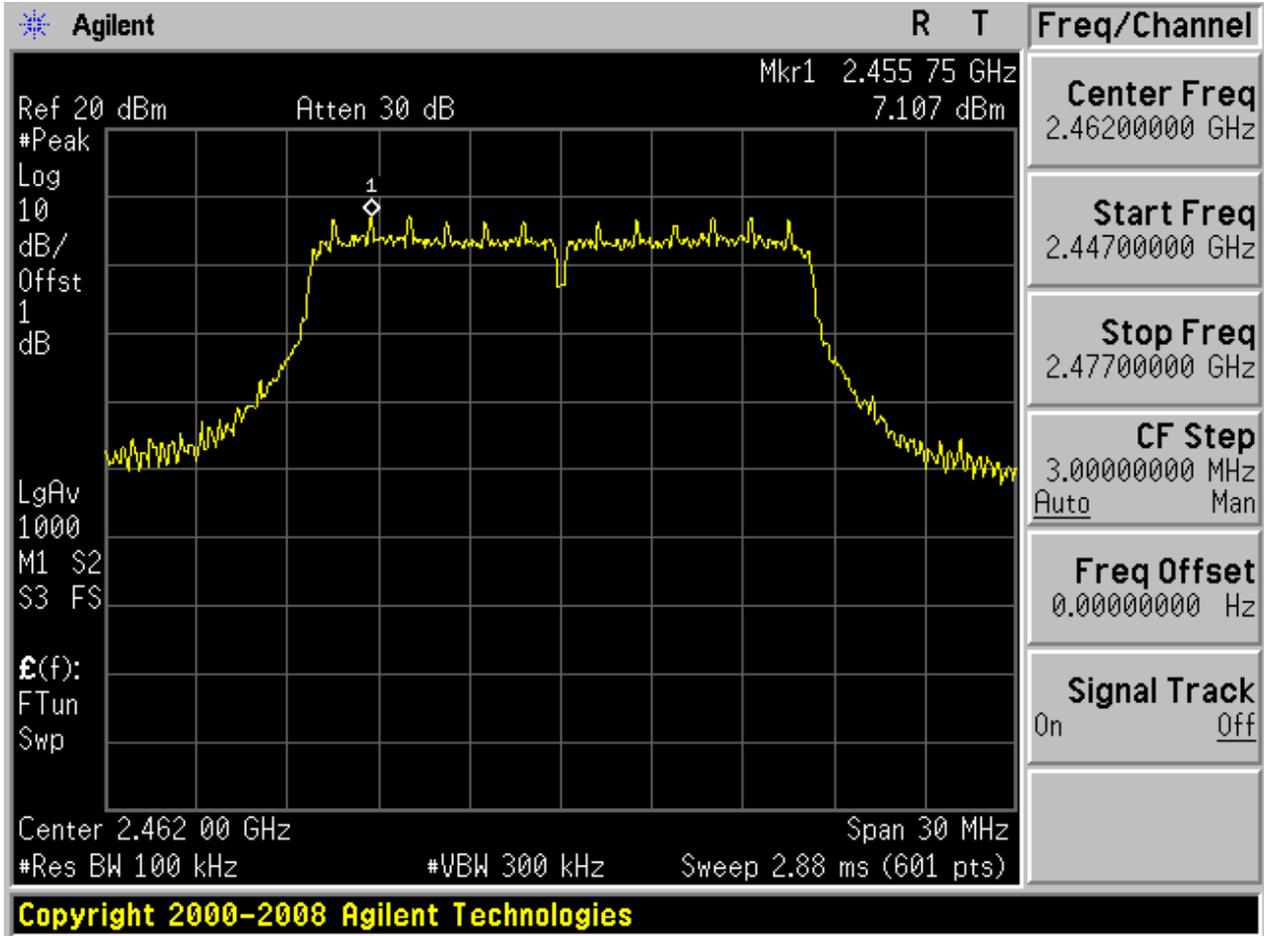






Puw:

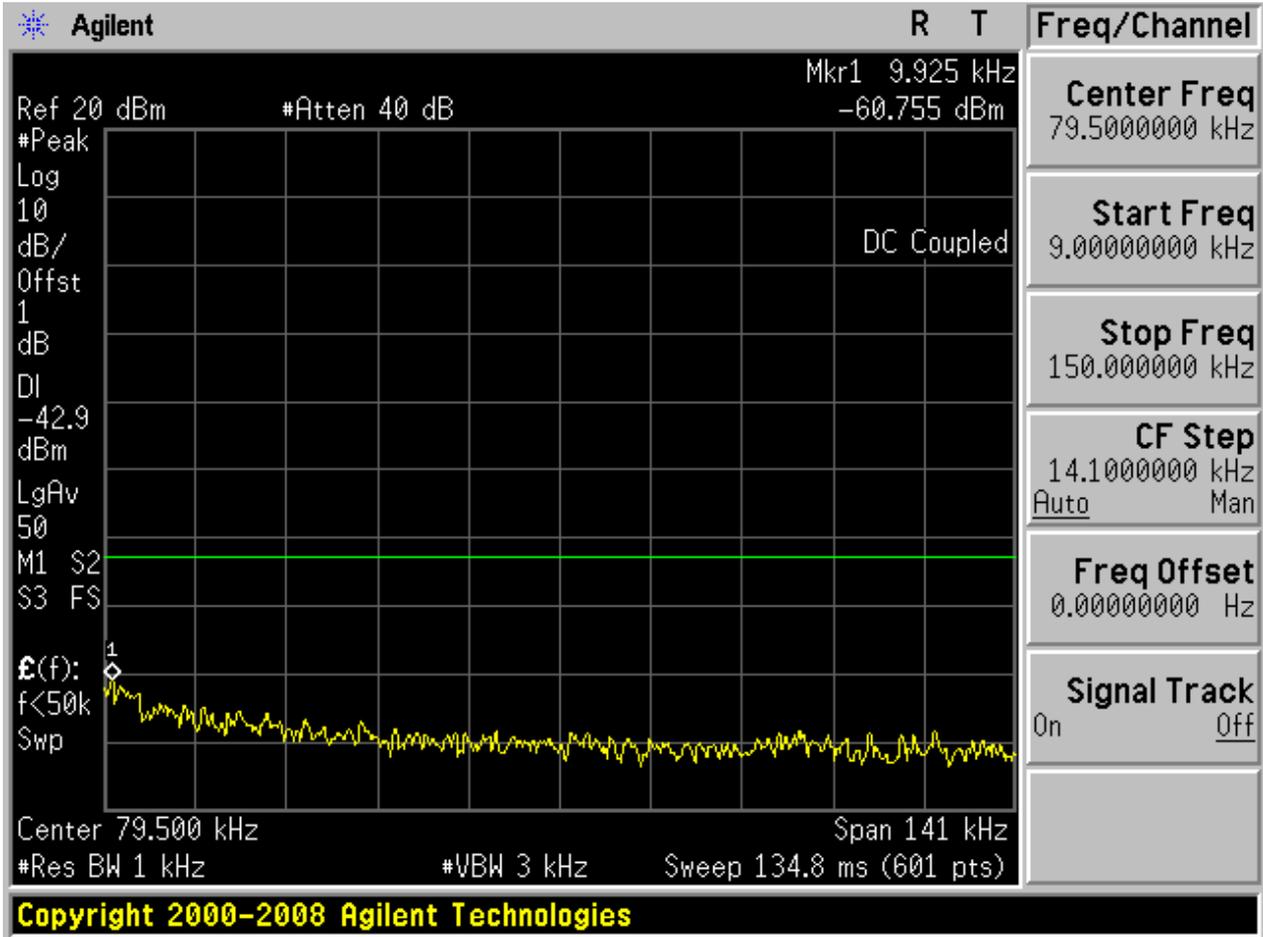


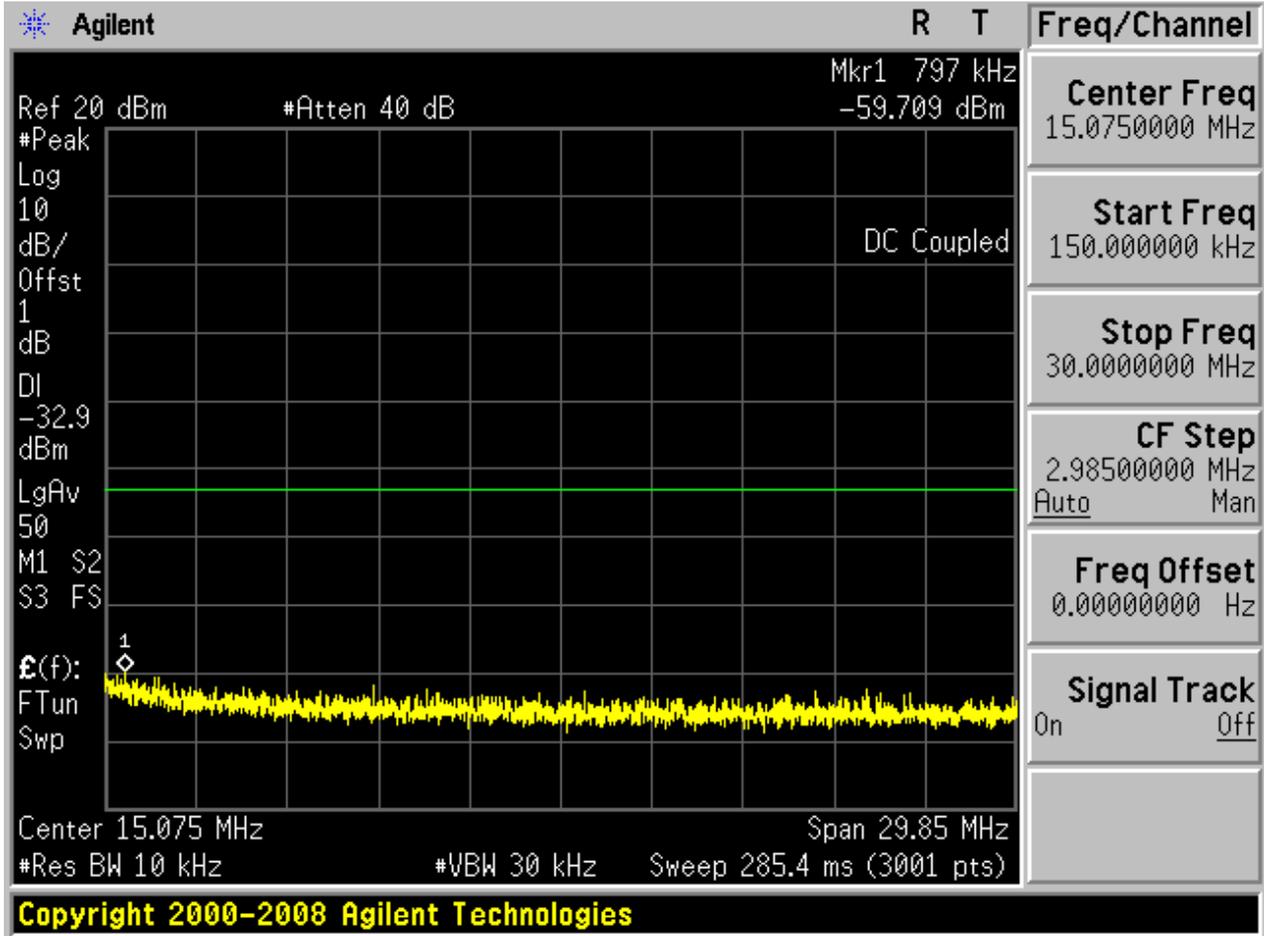

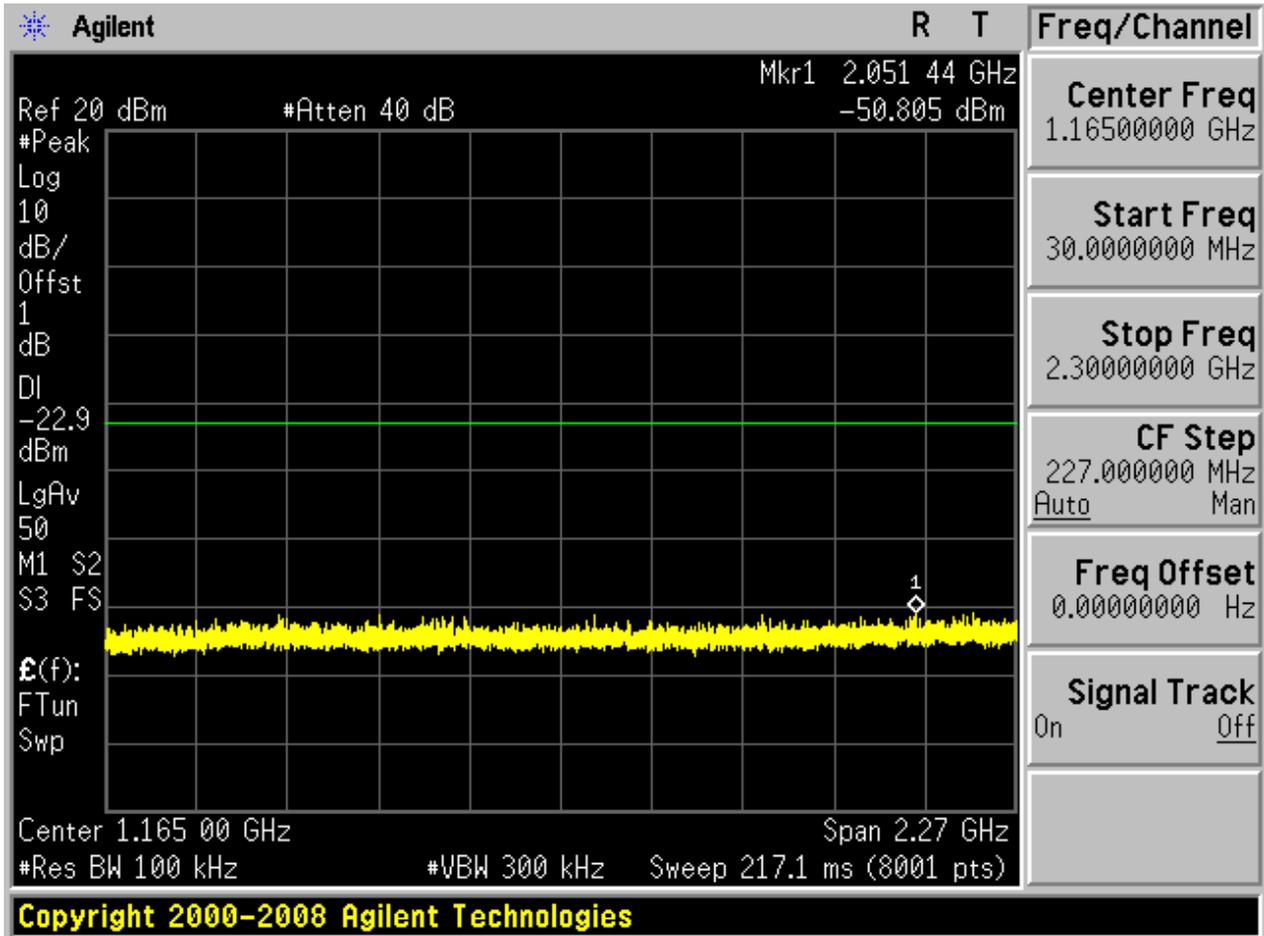

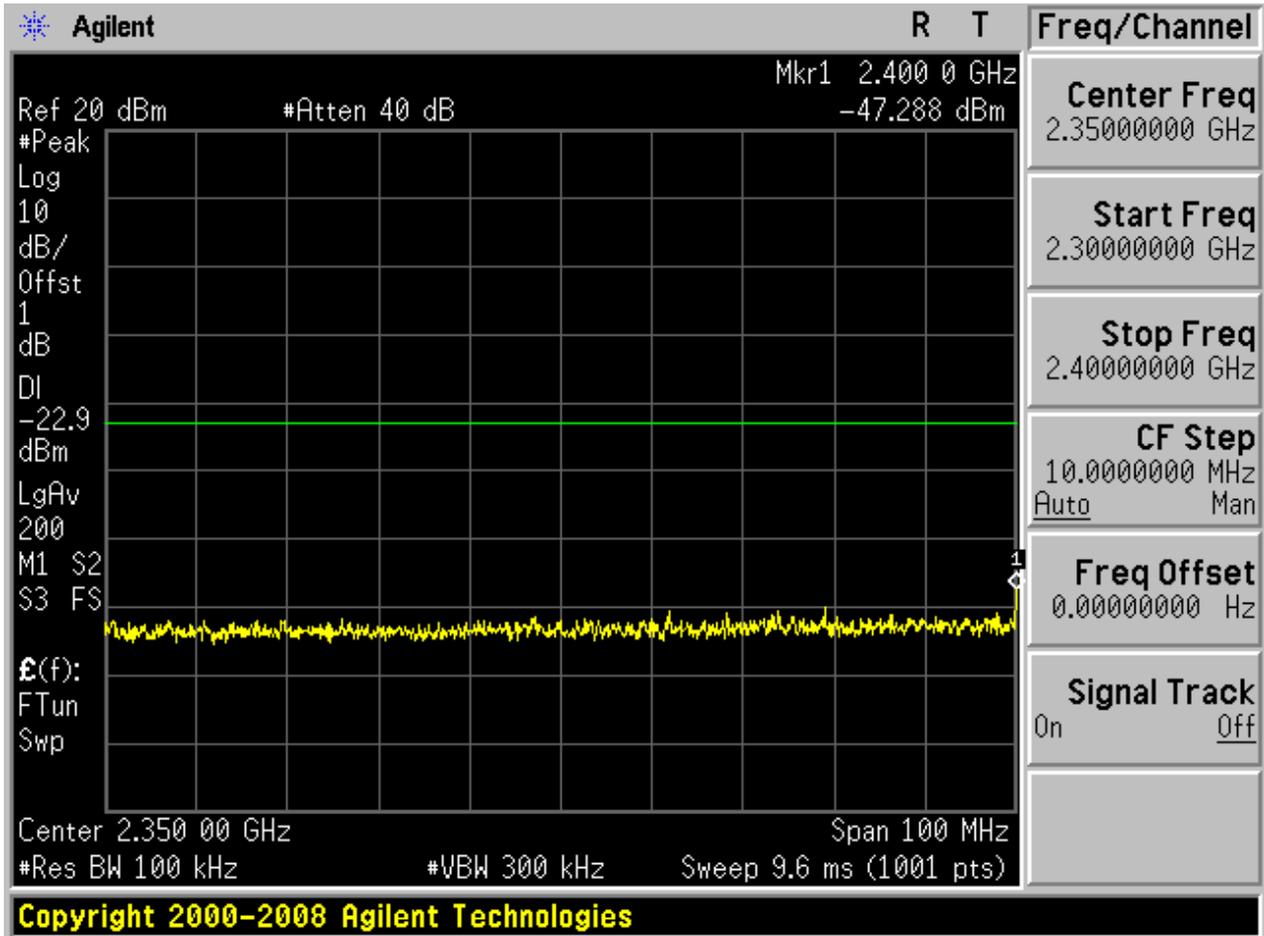

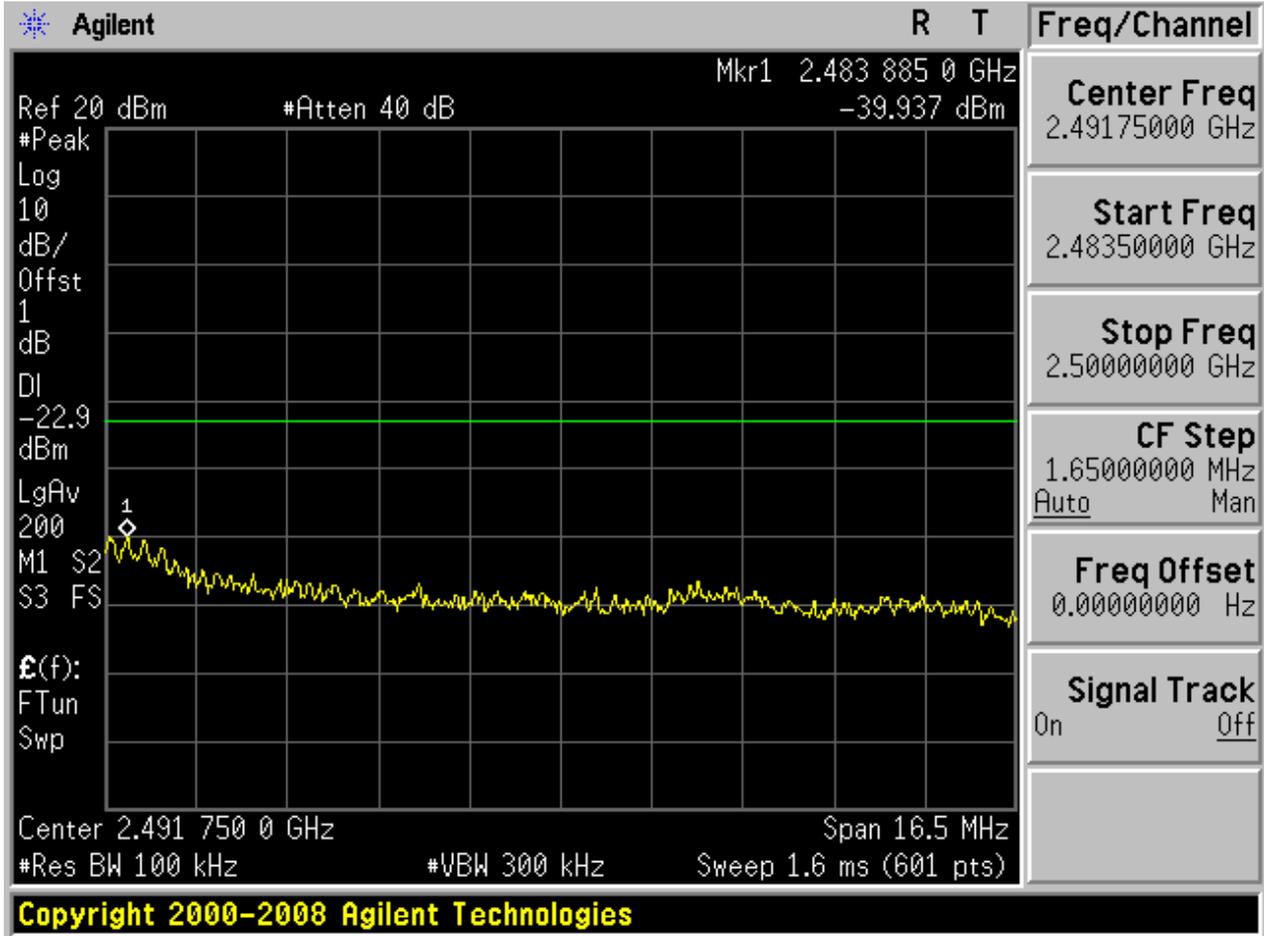


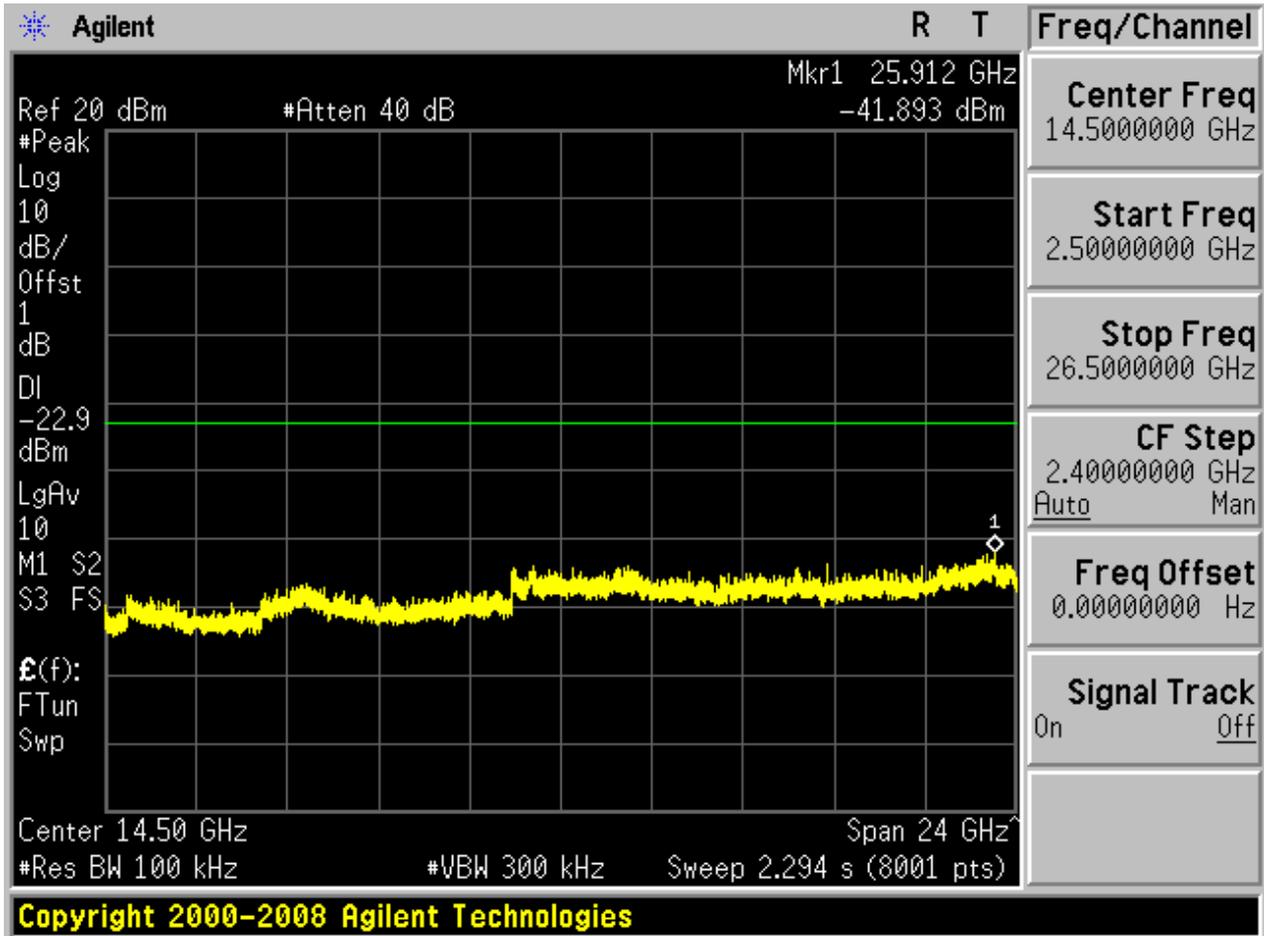




2.13 11N20\_L@Ant 1


Pref:

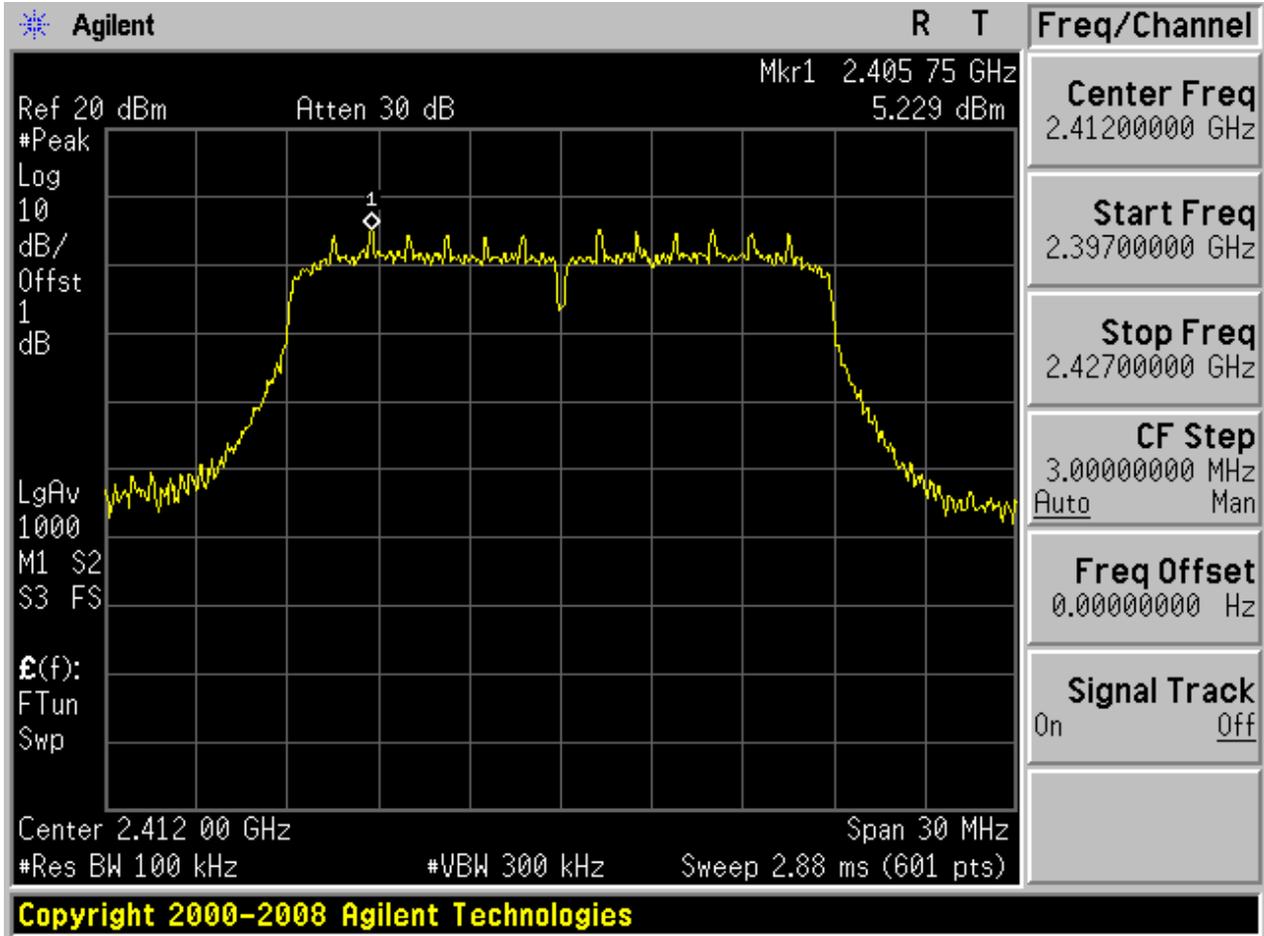






Puw:

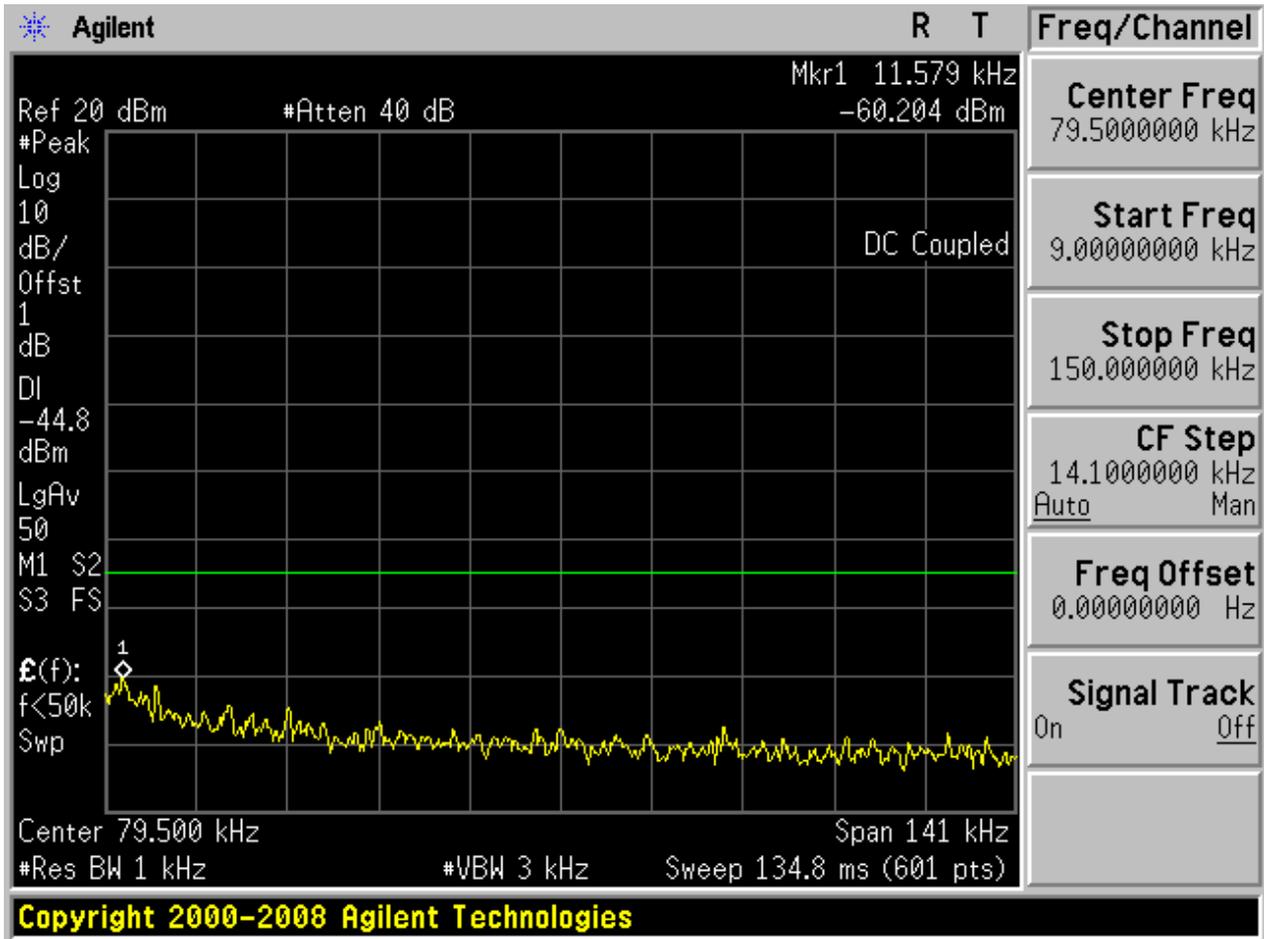


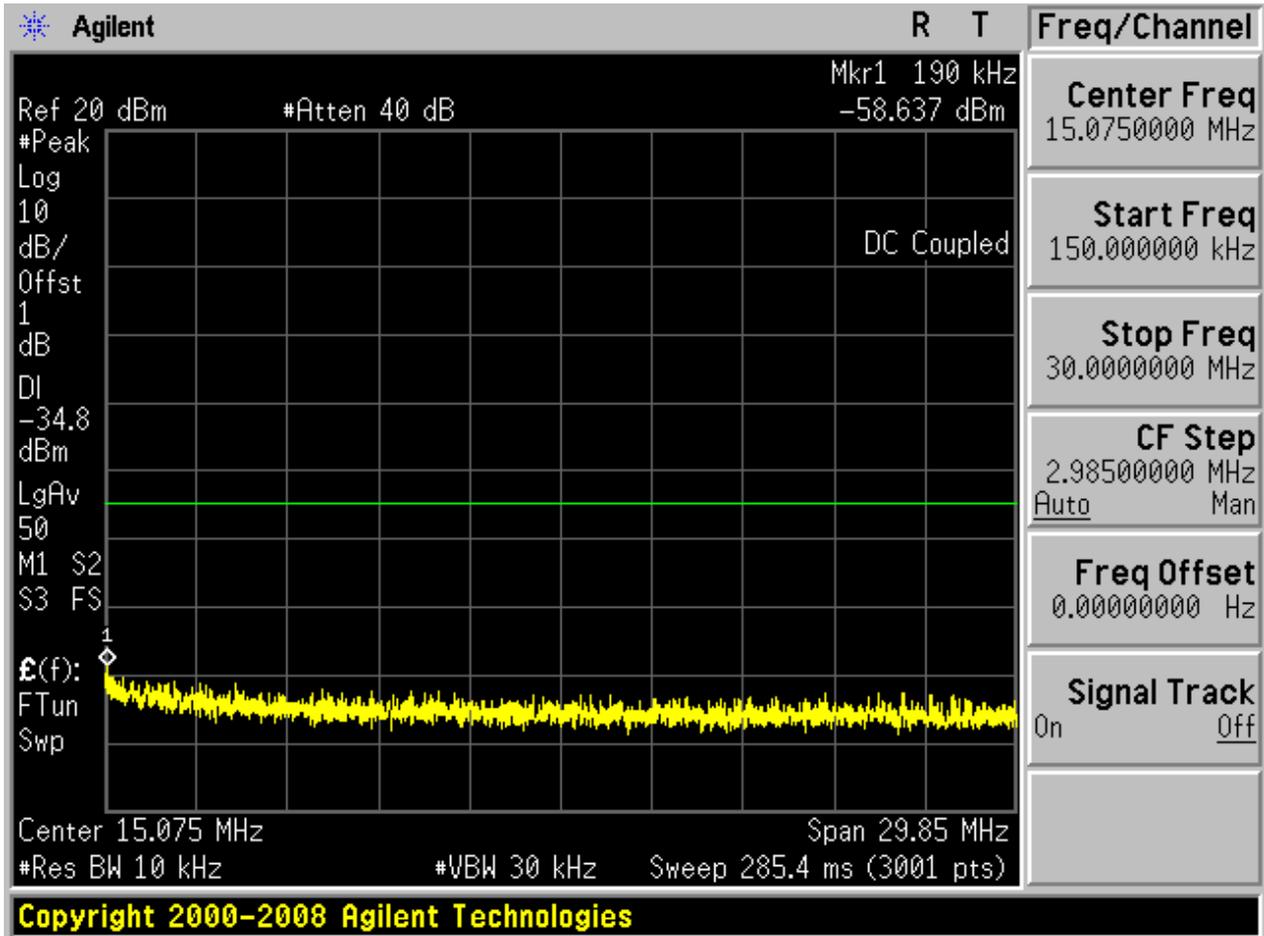

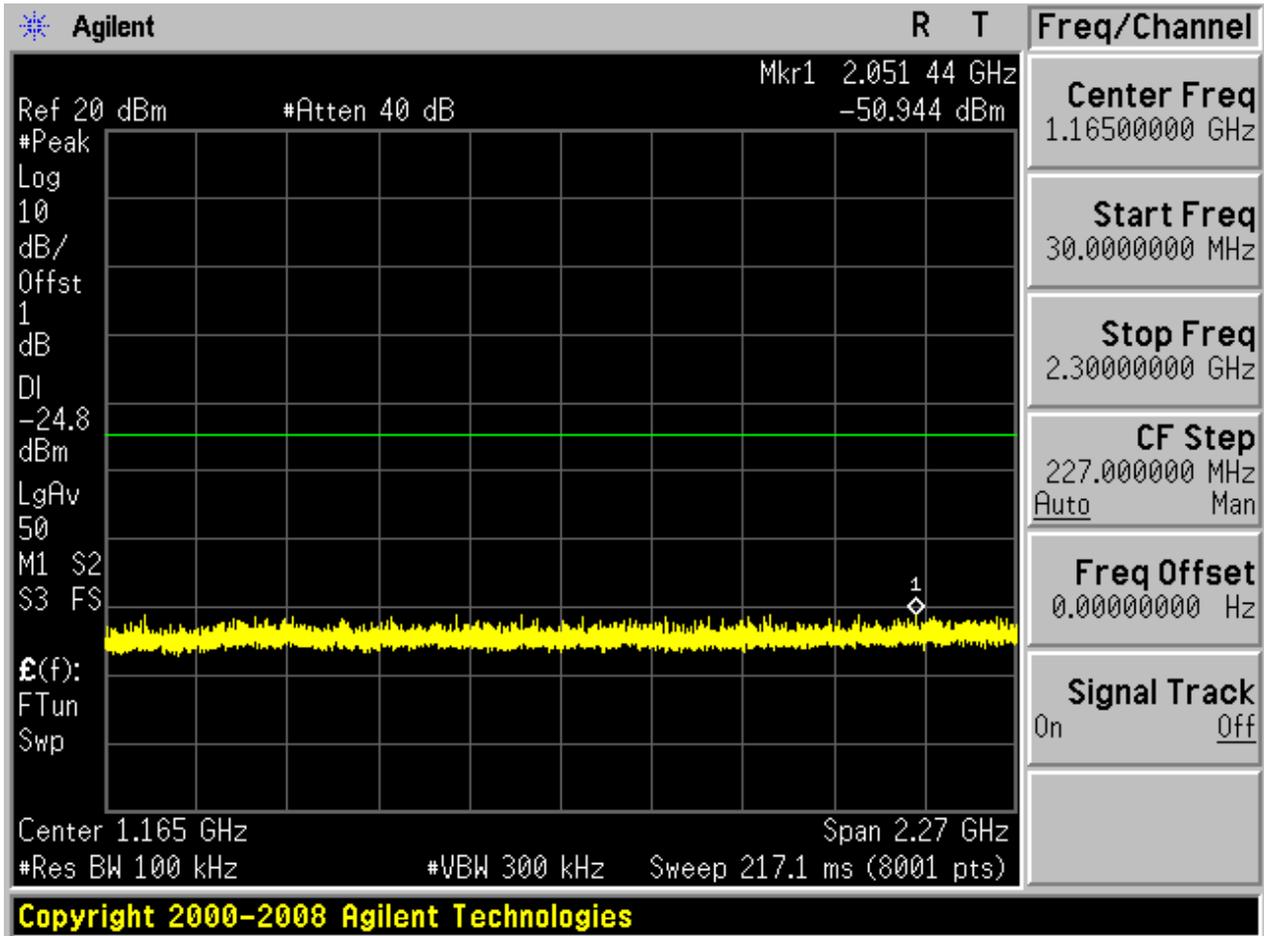

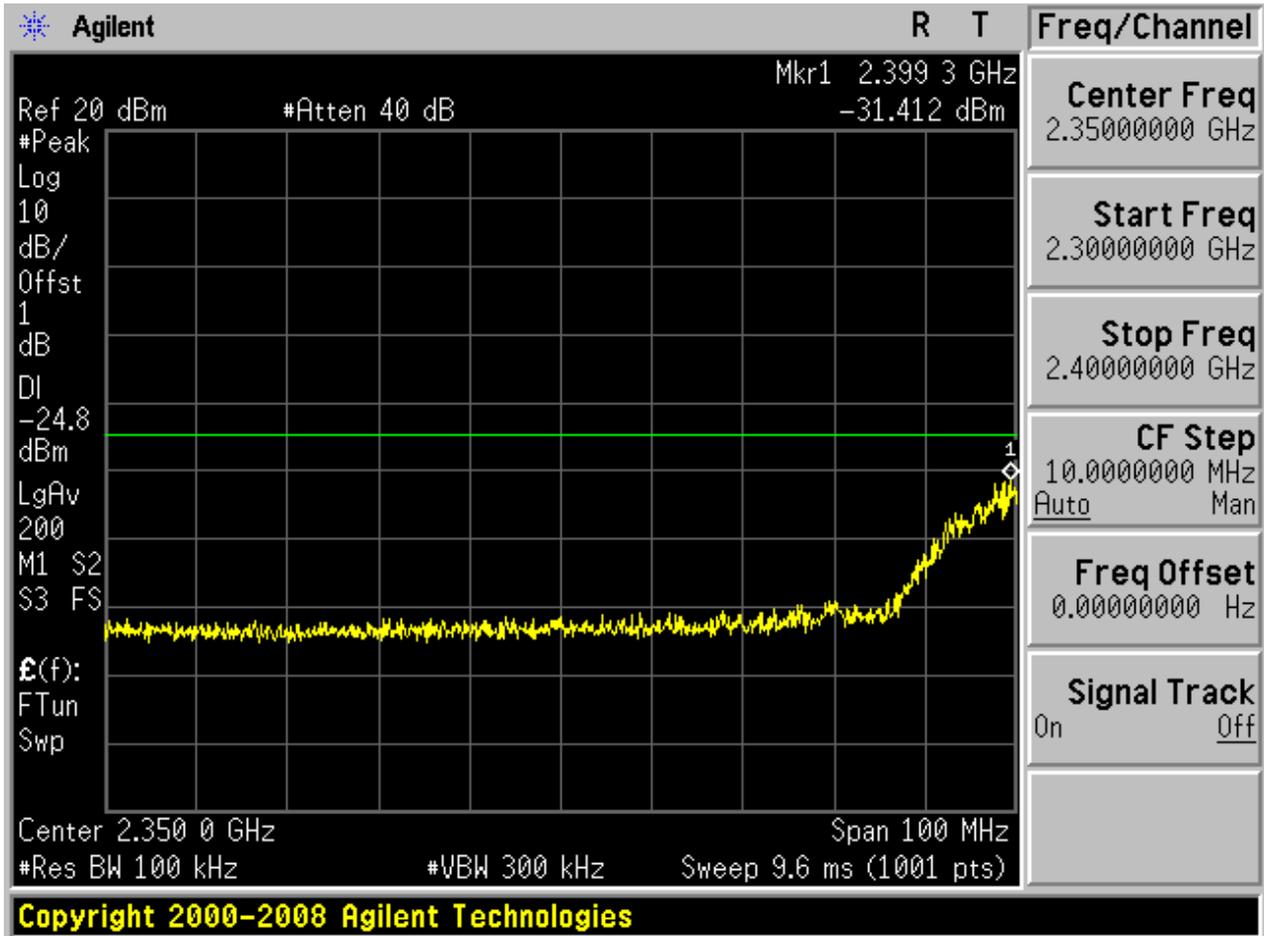


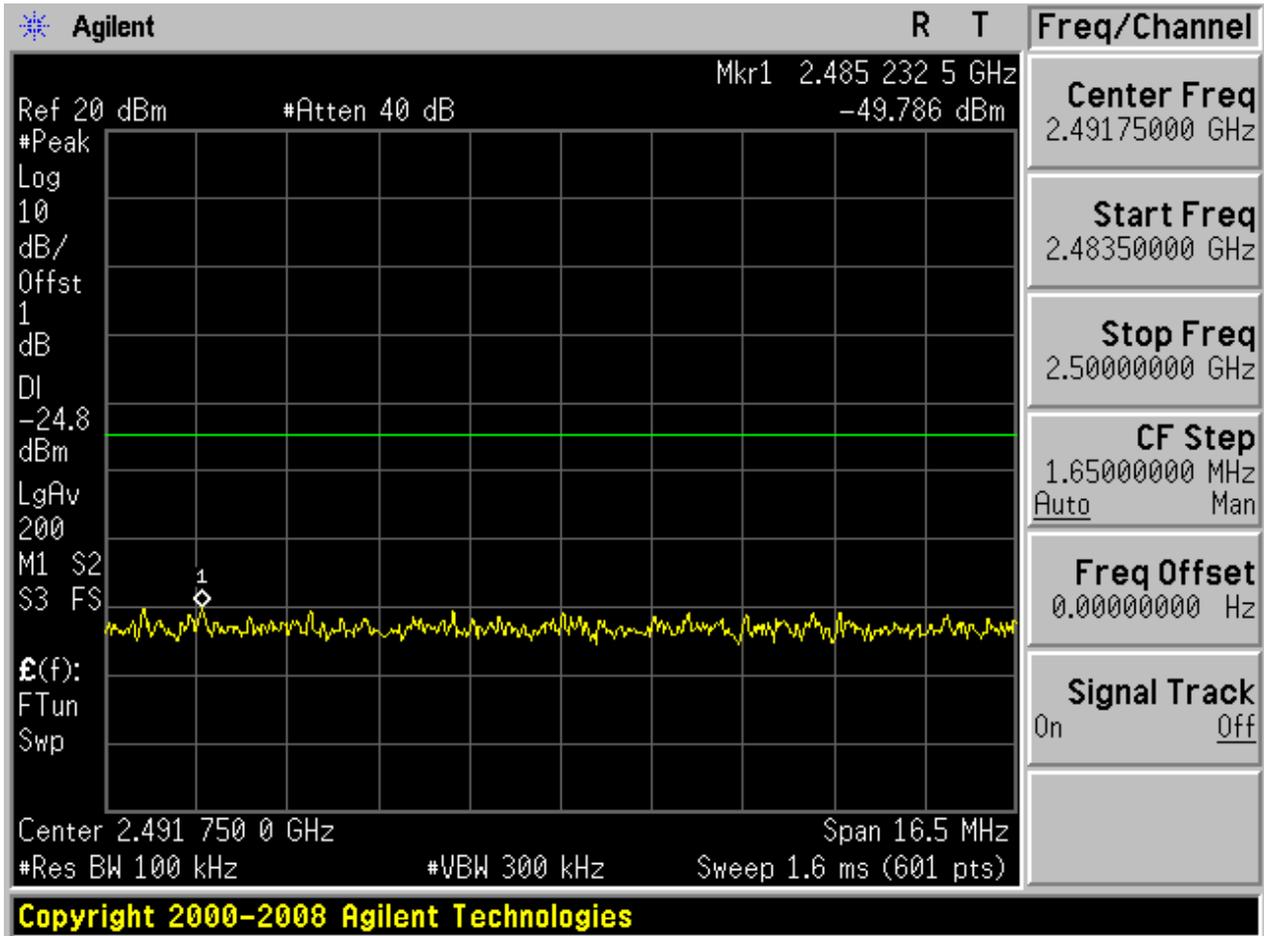

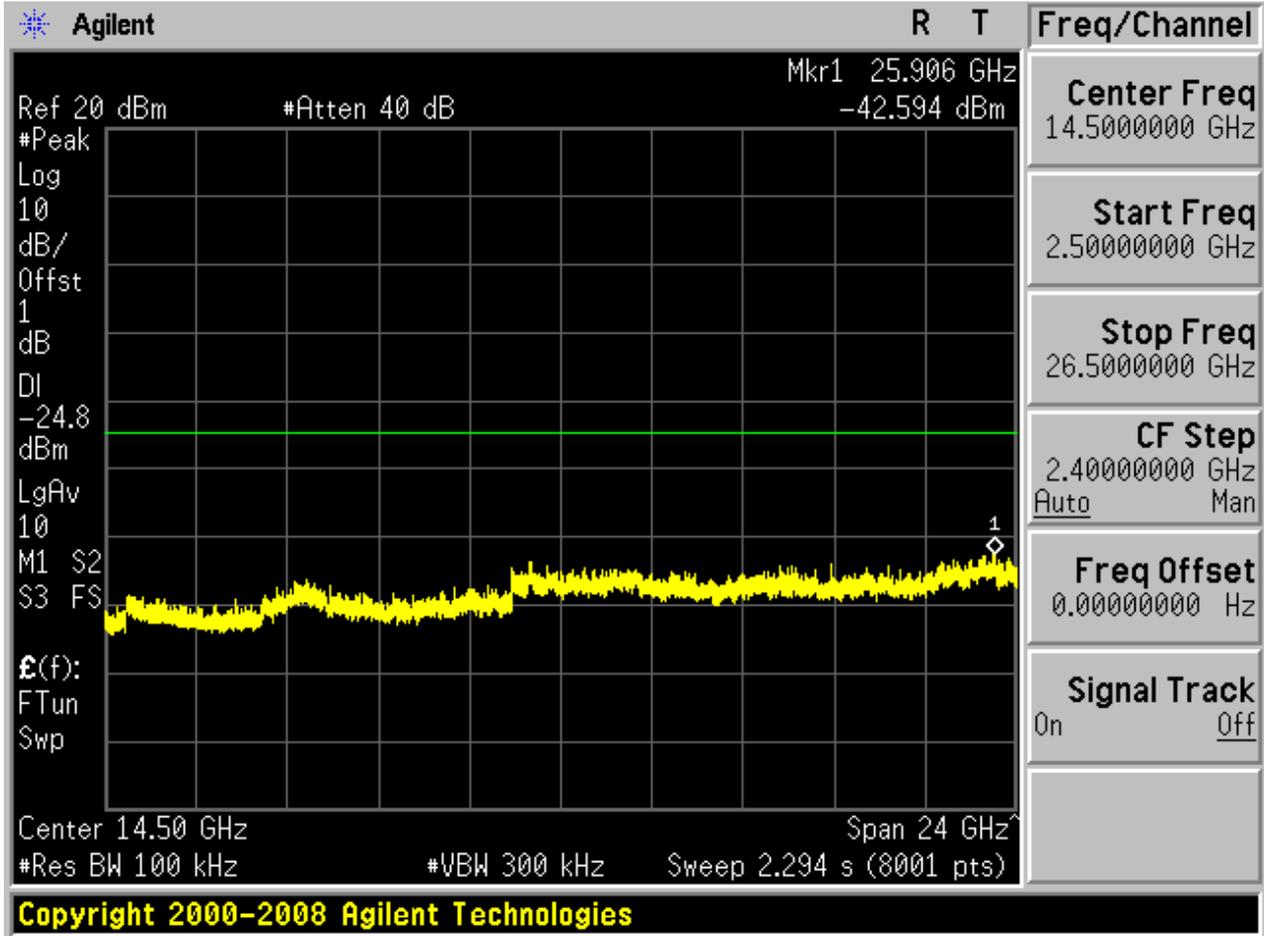


2.15 11N20\_M@Ant 1


Pref:

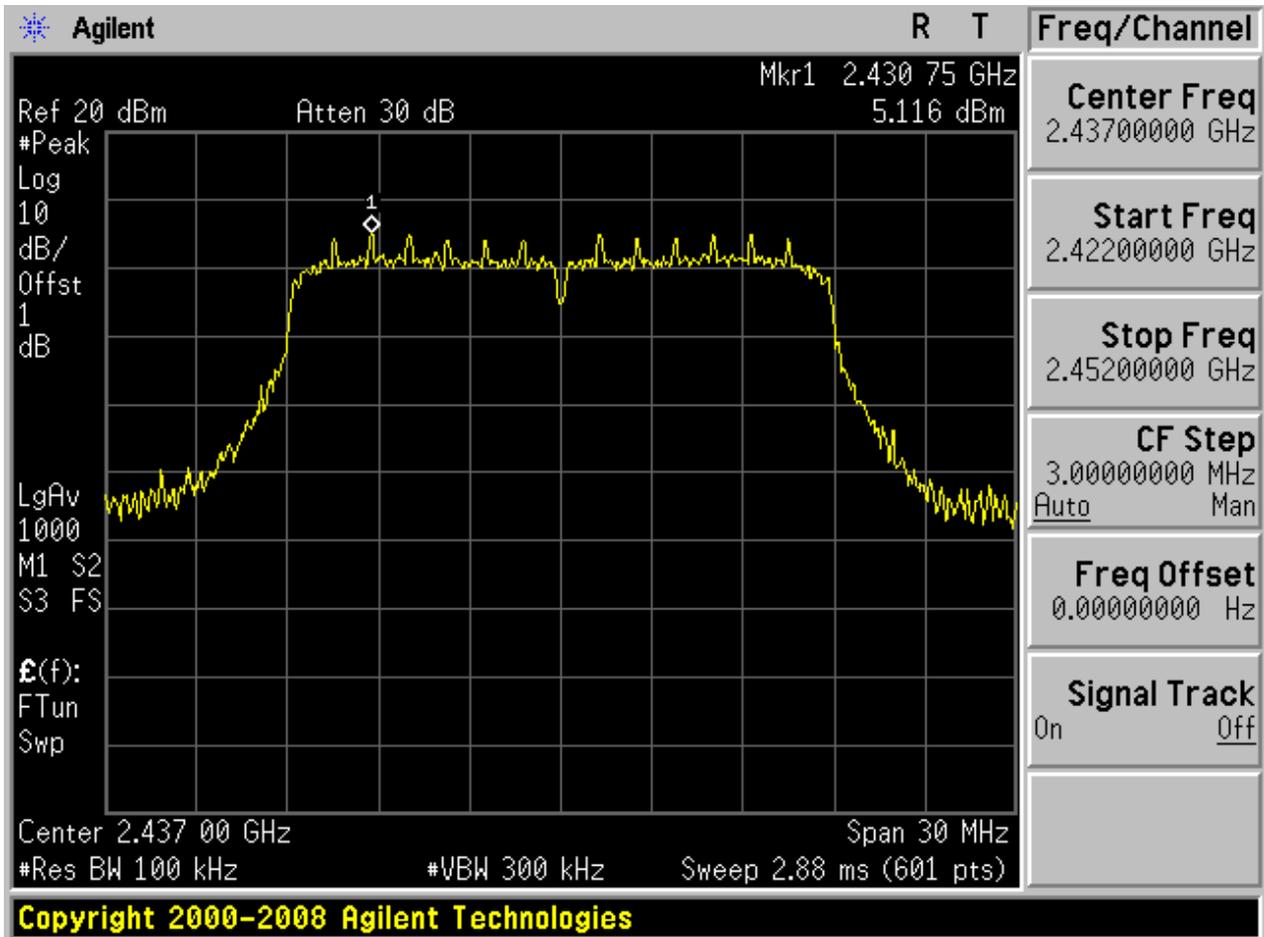






Puw:

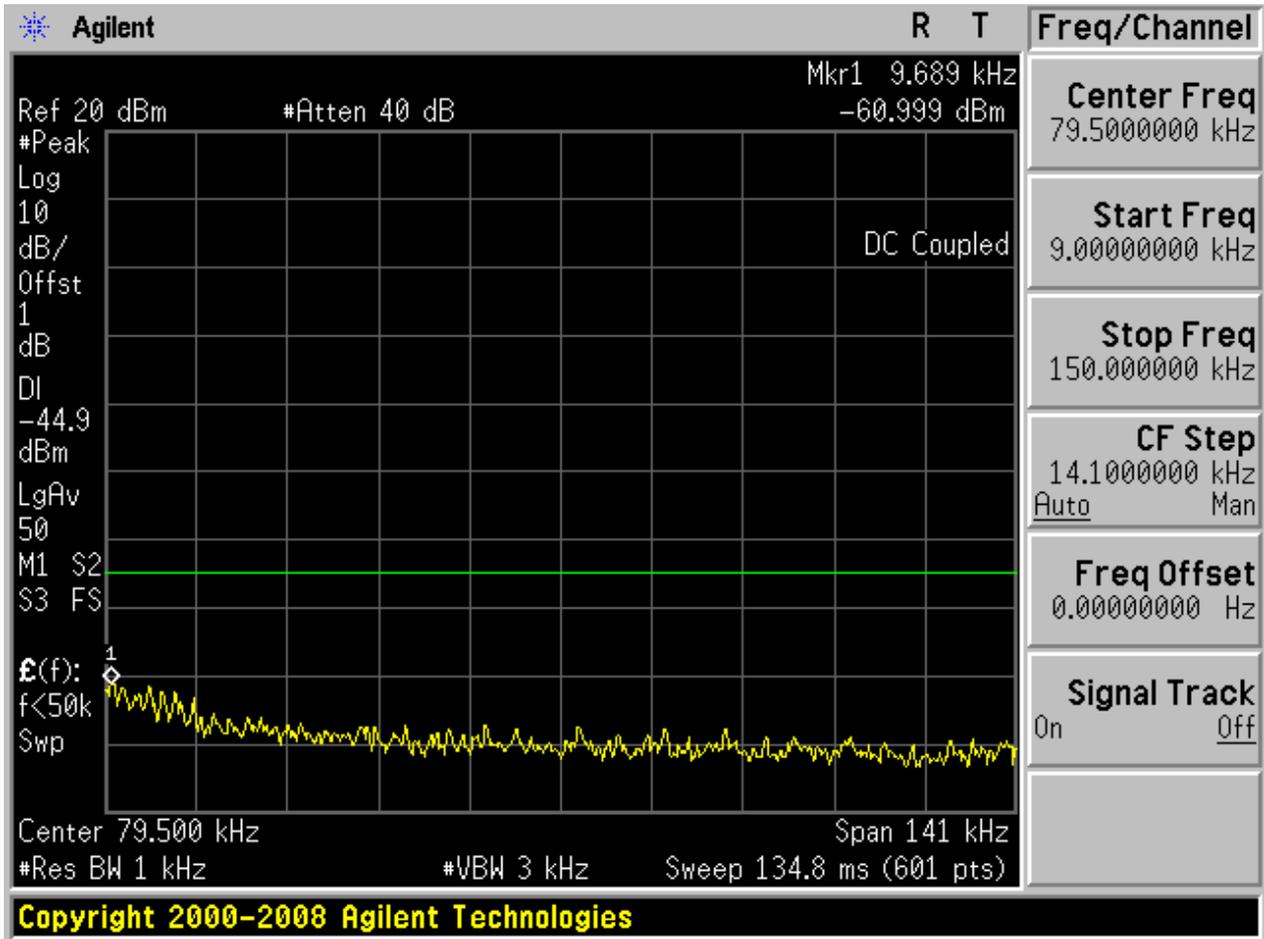


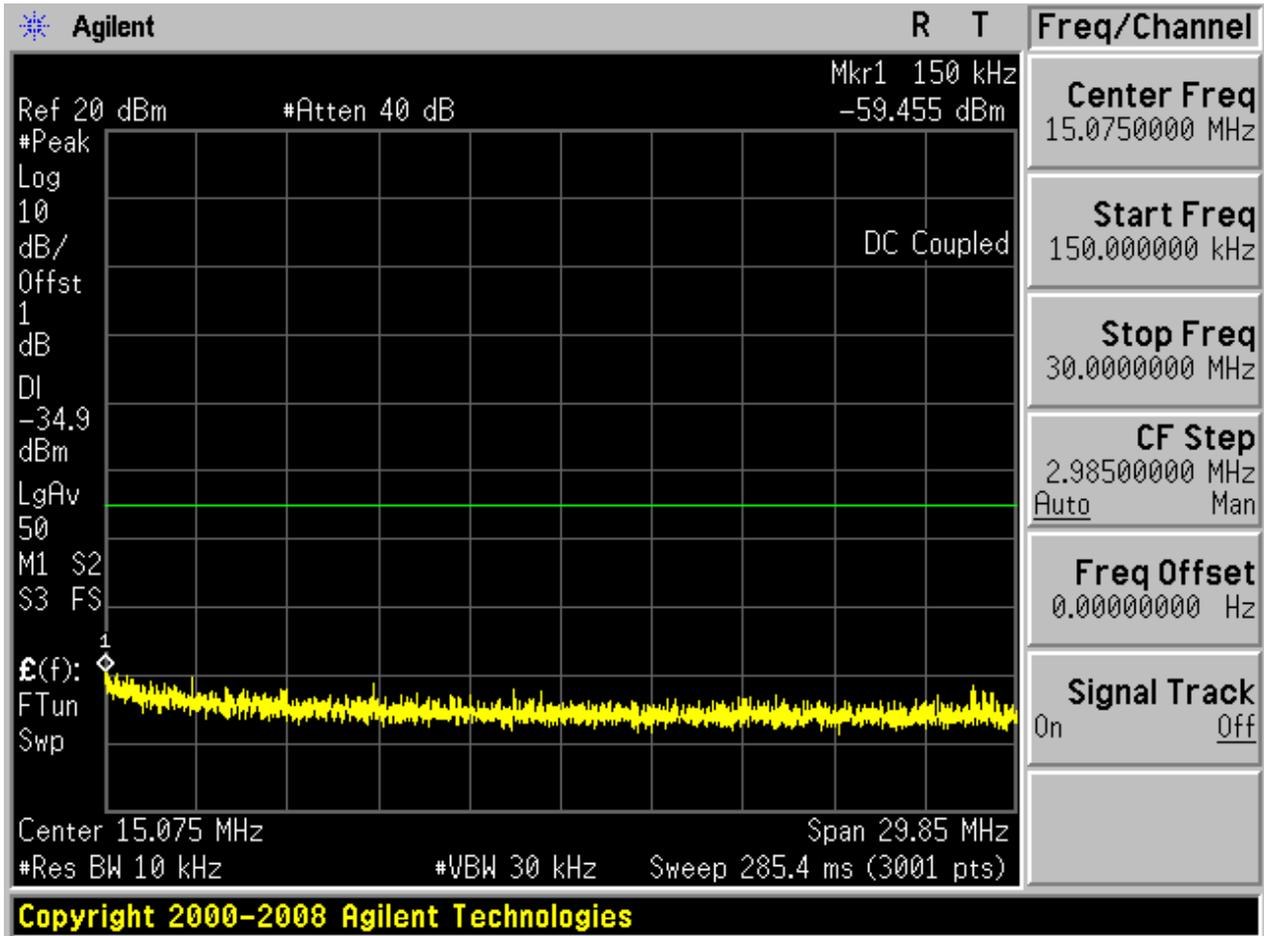

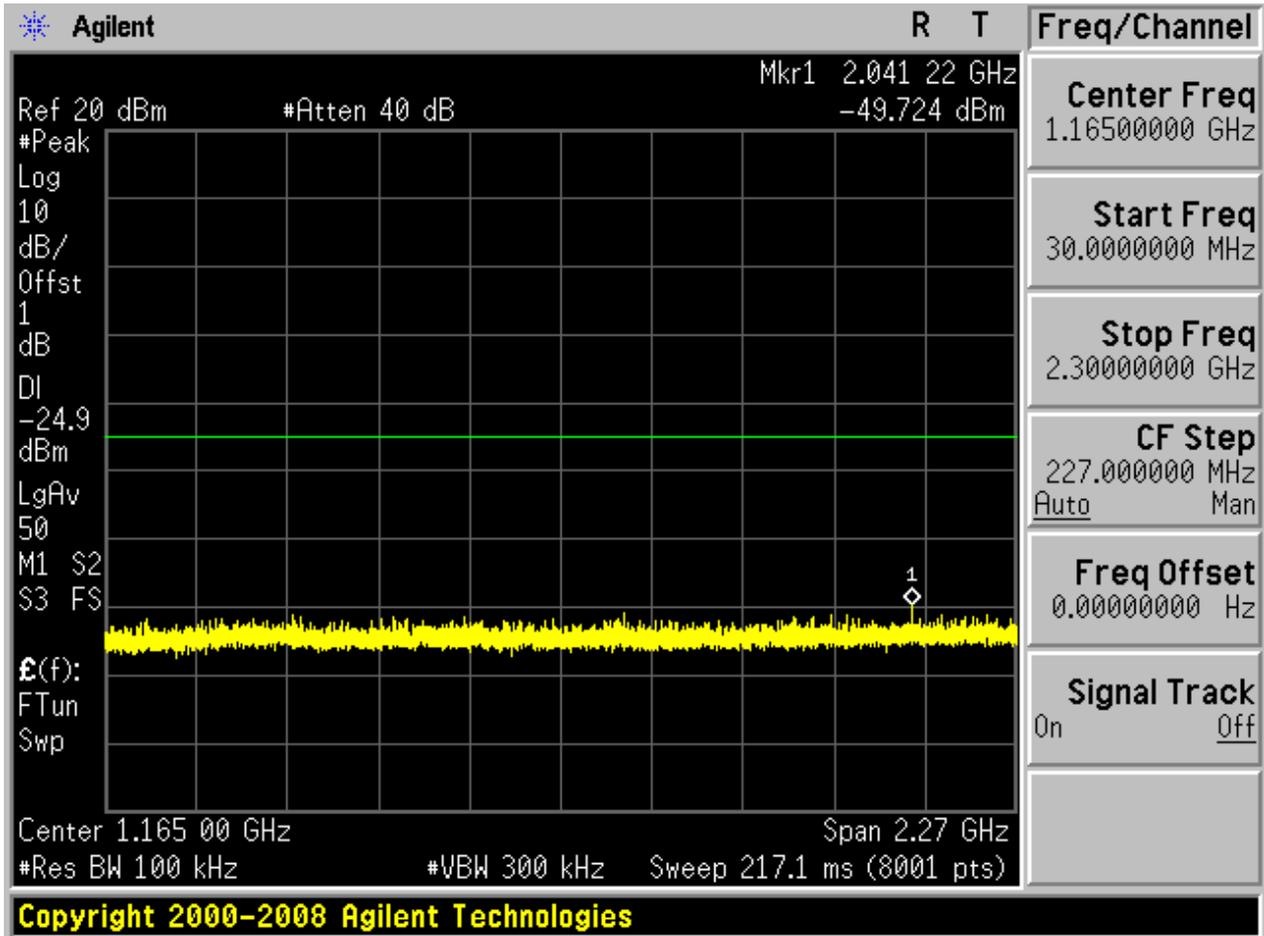

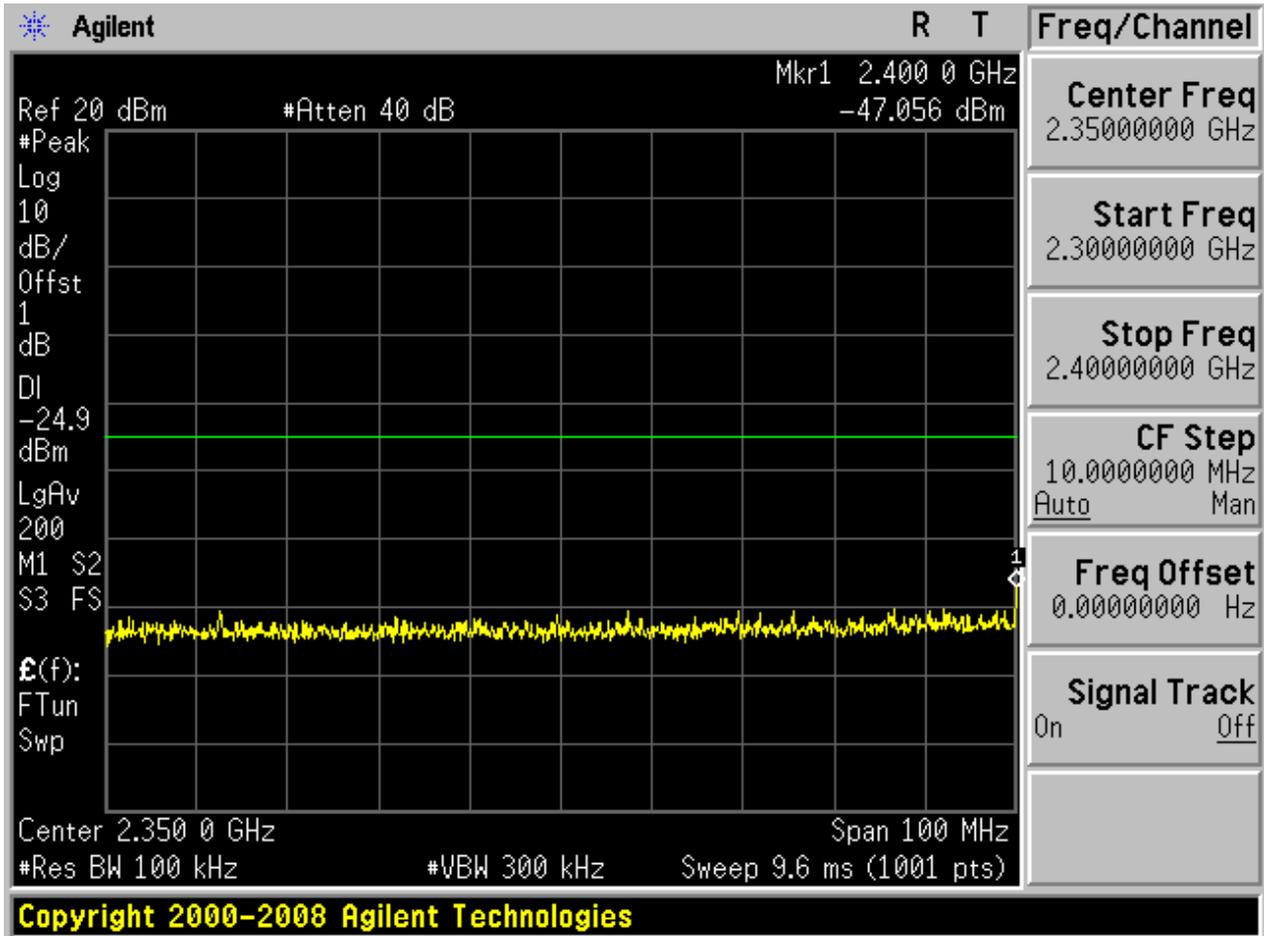

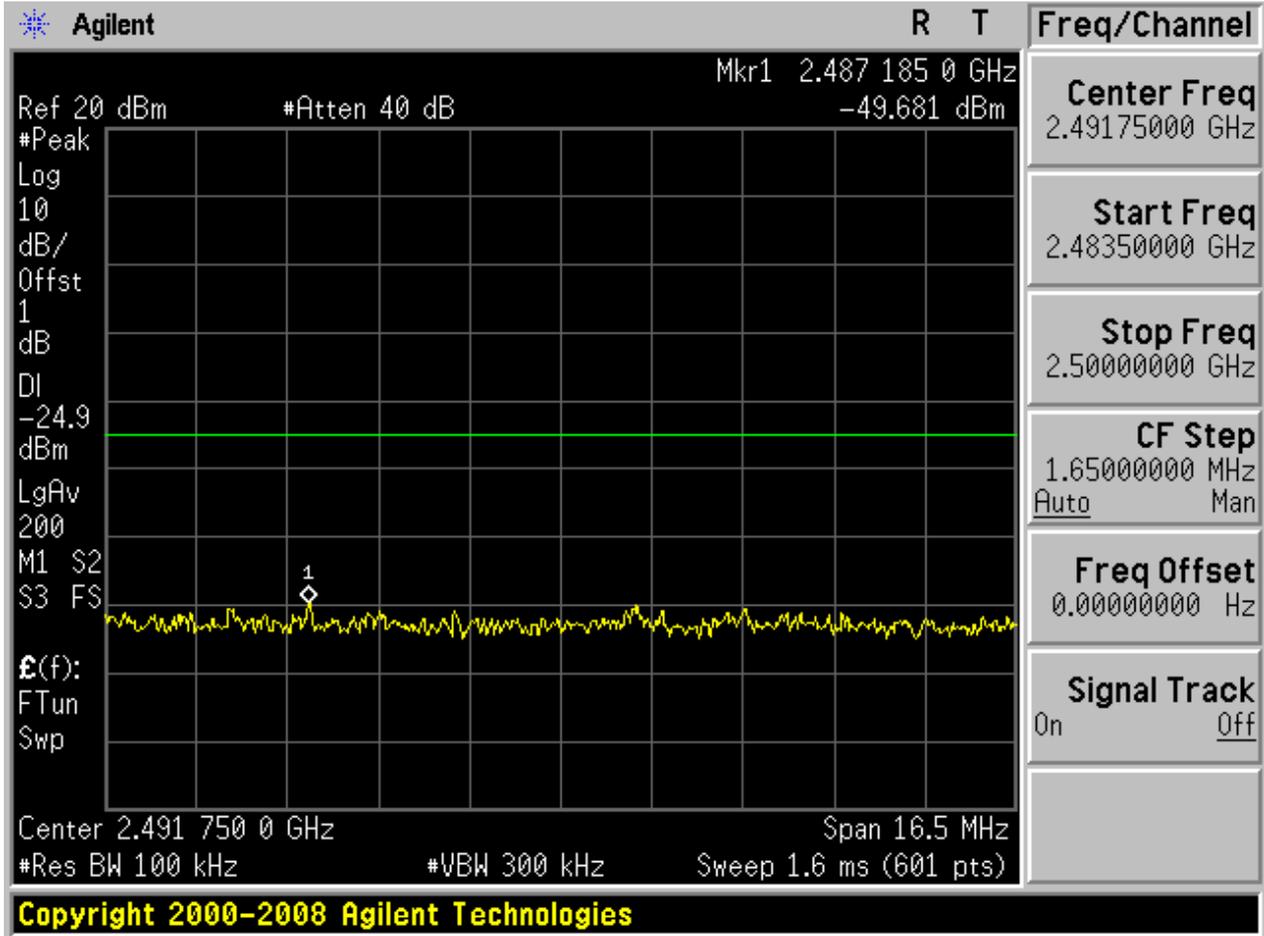


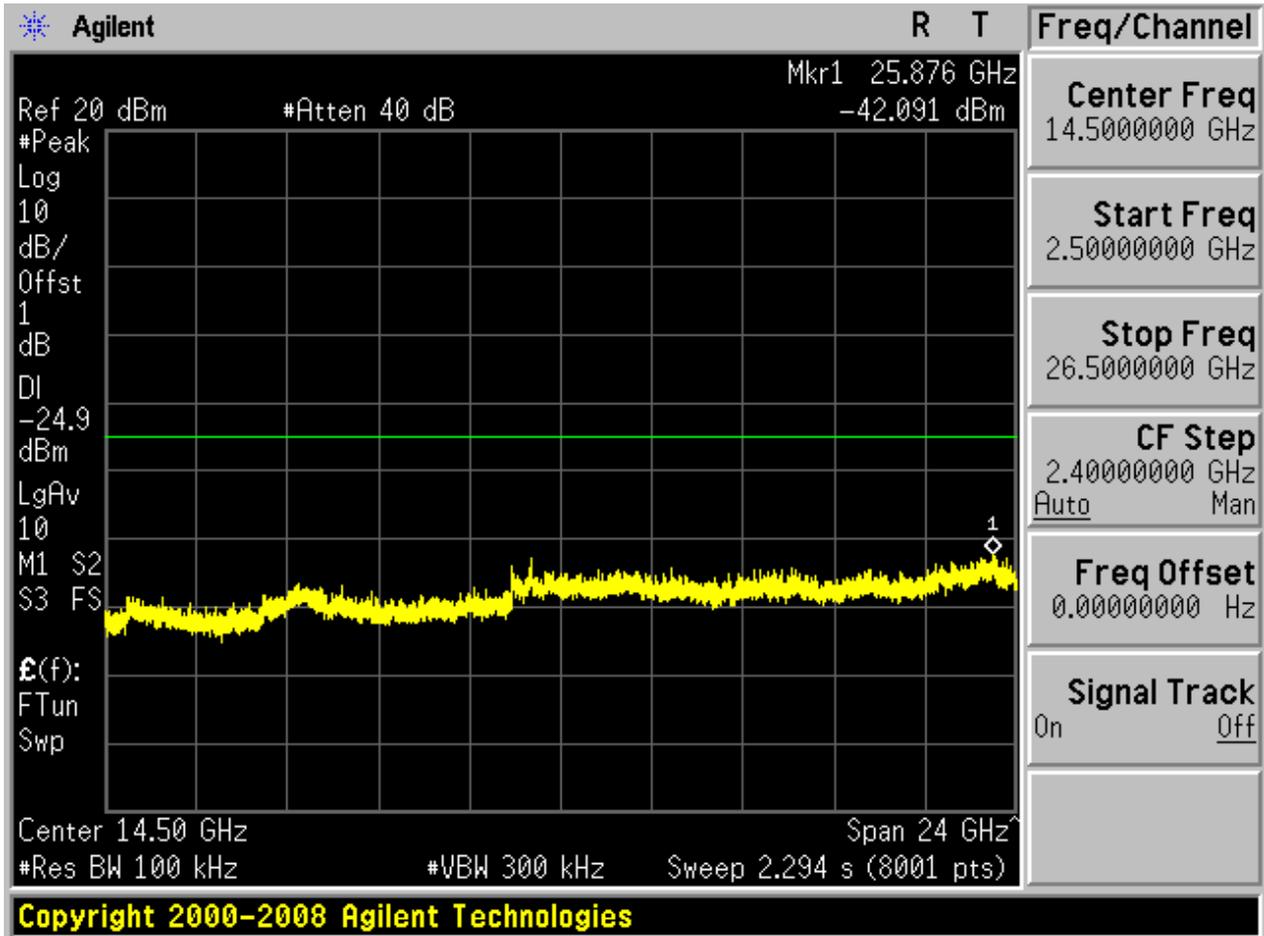




2.17 11N20\_H@Ant 1


Pref:

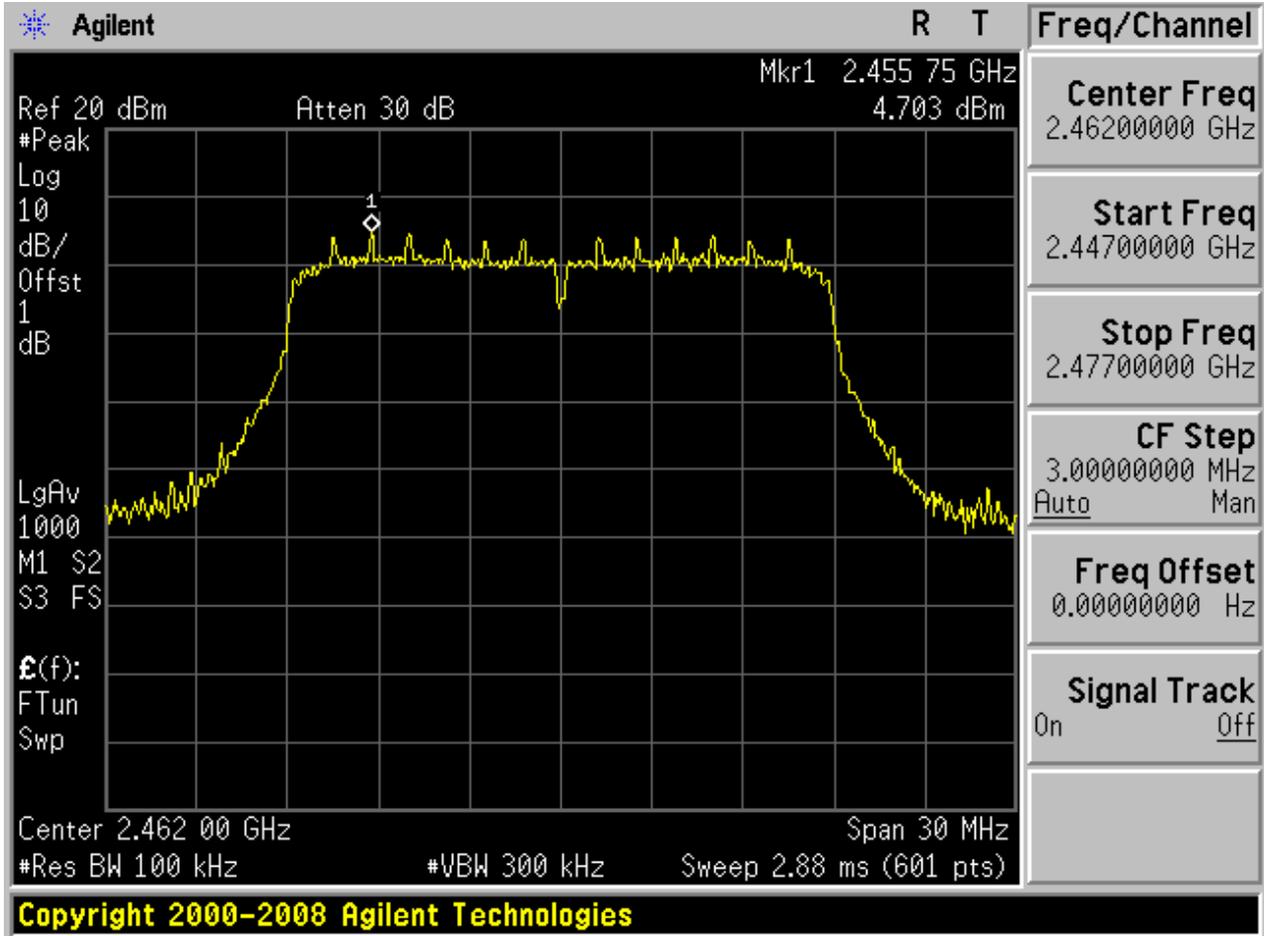






Puw:

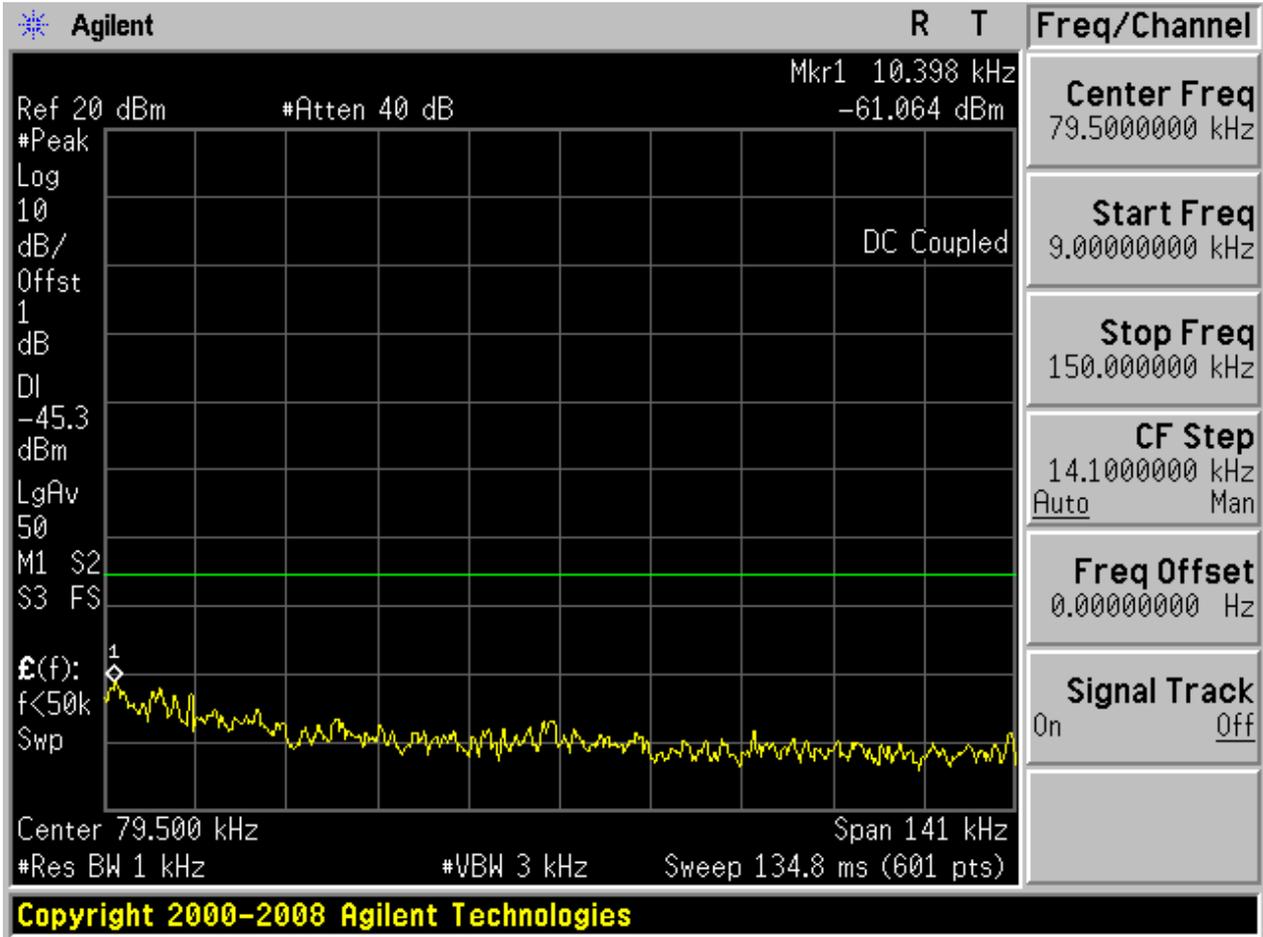


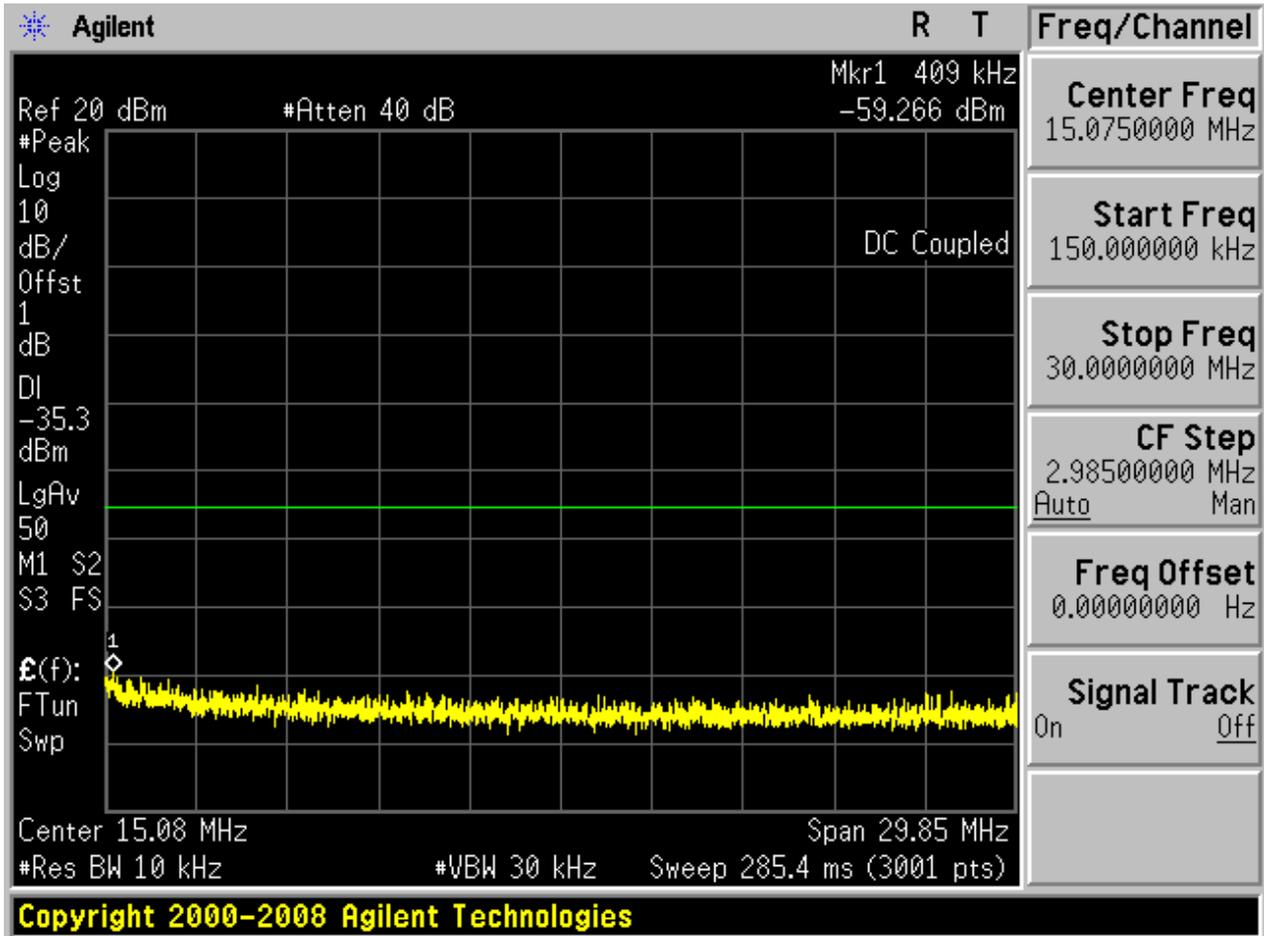

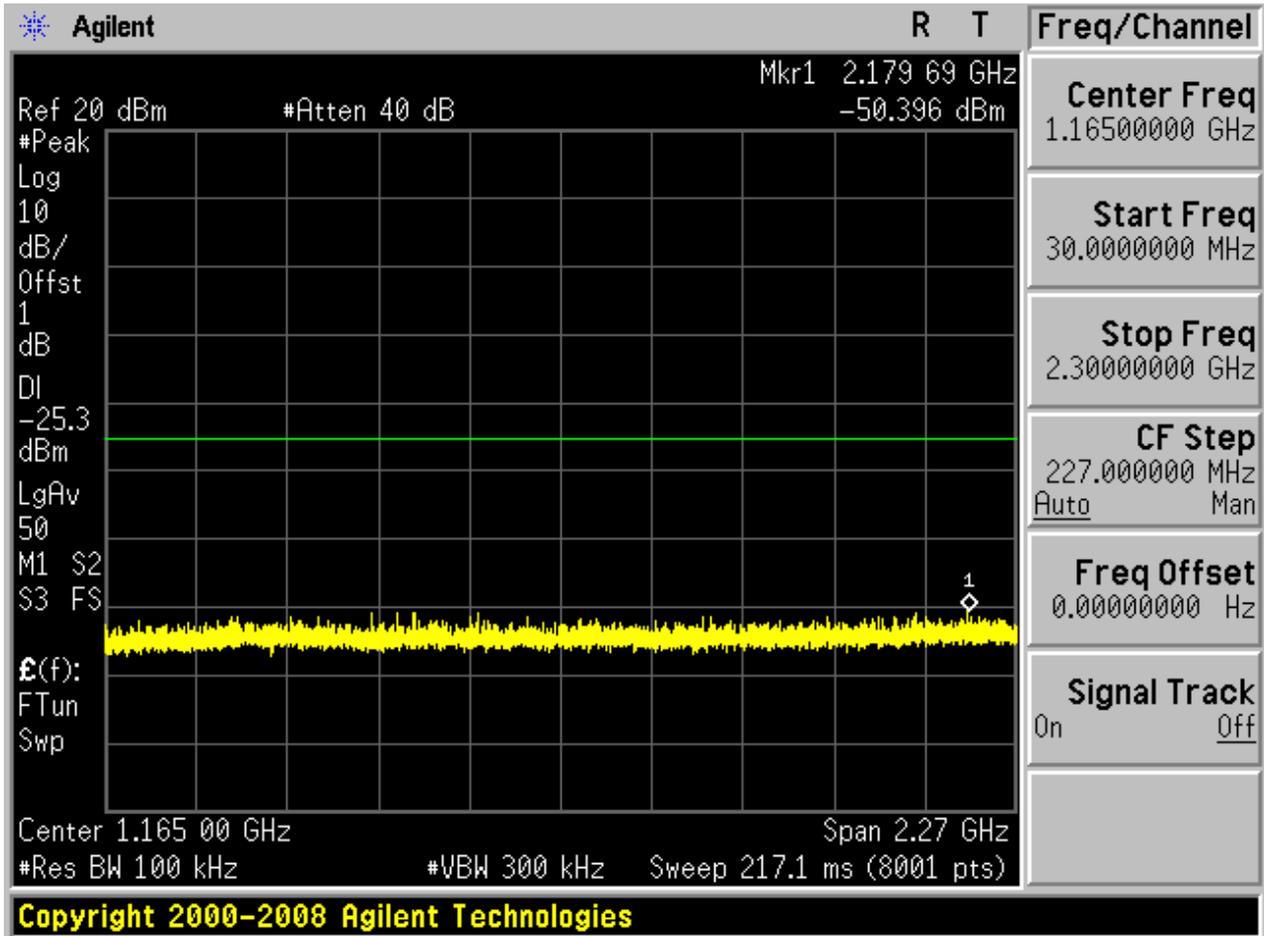

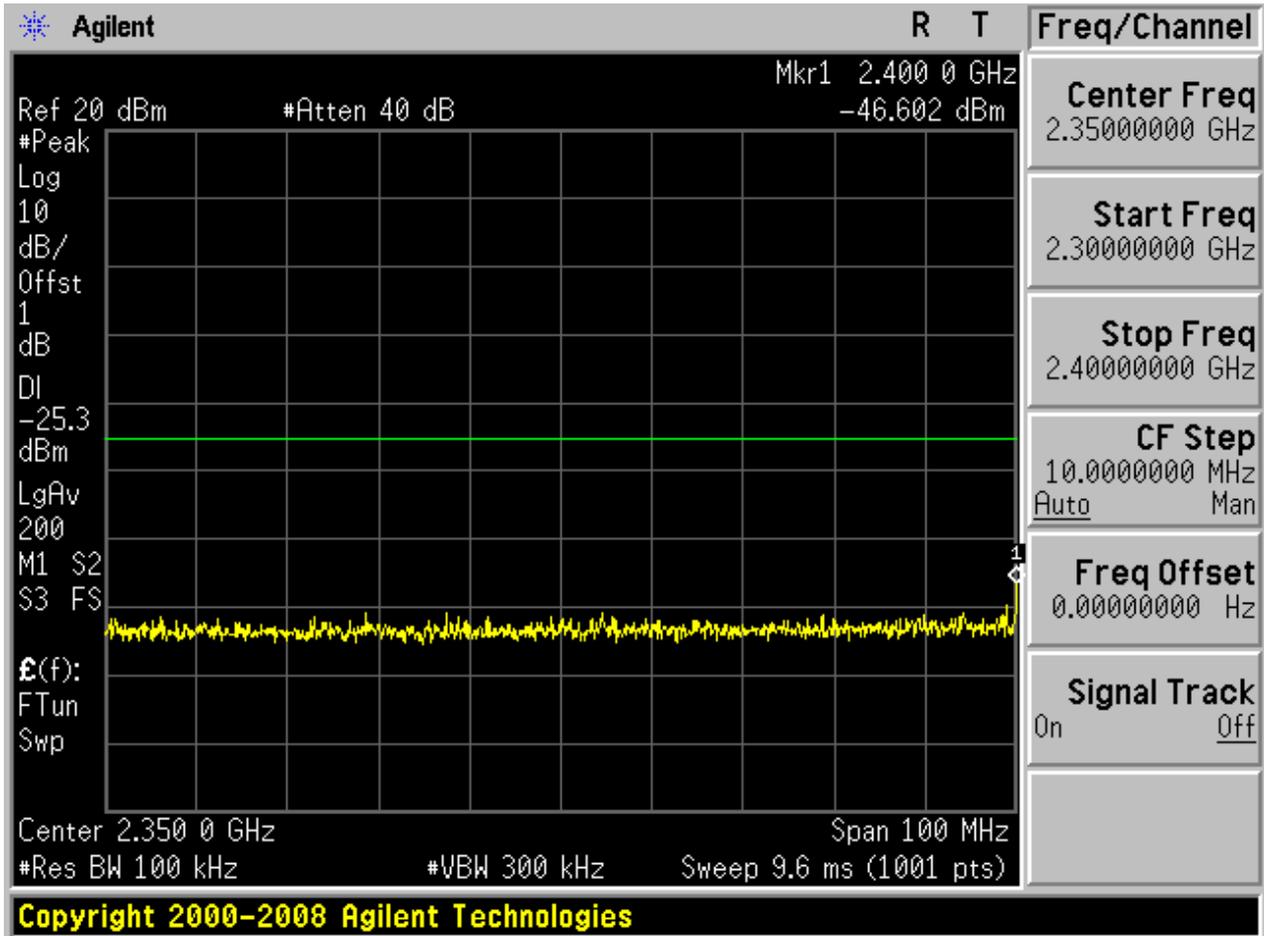

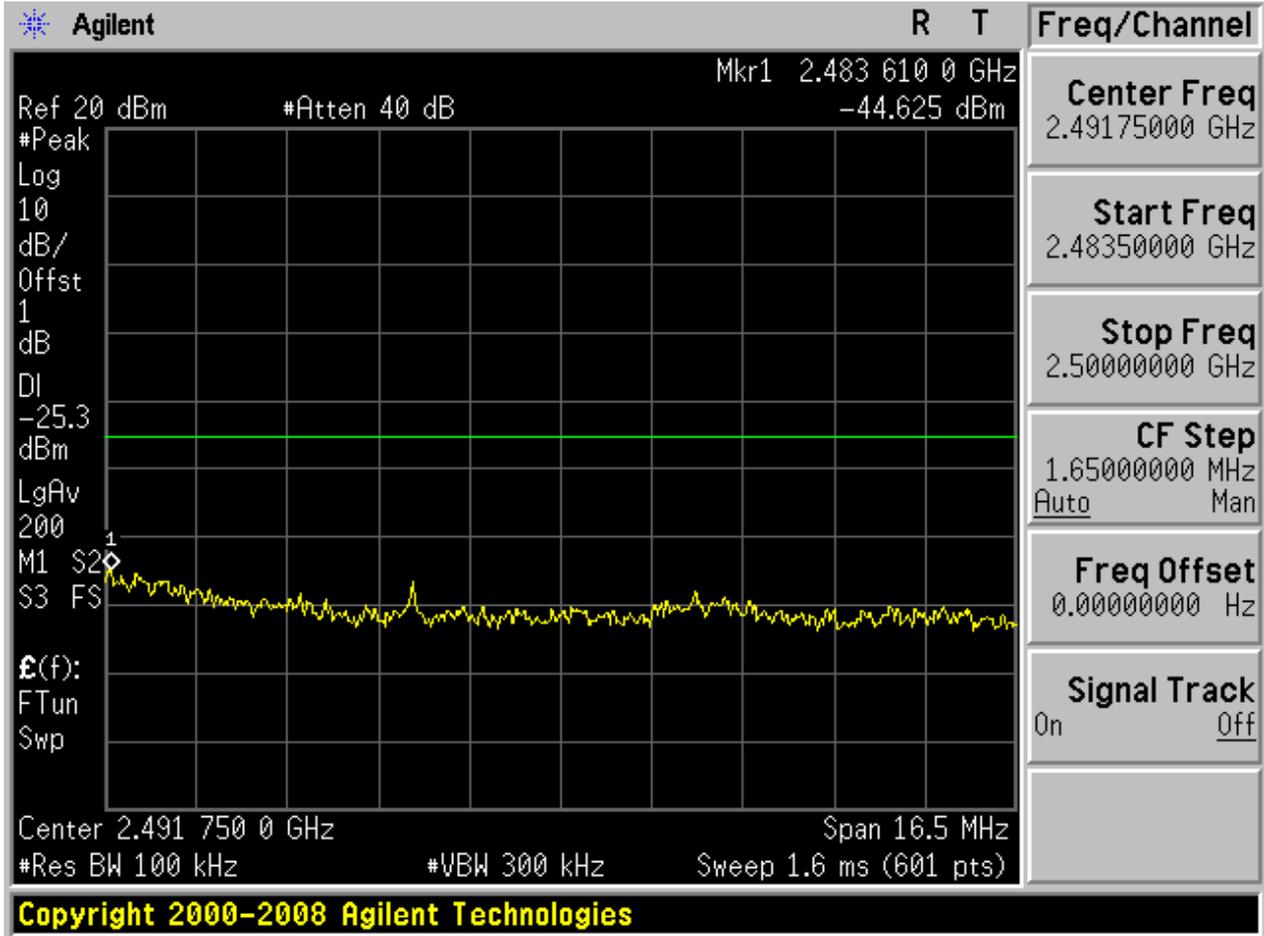

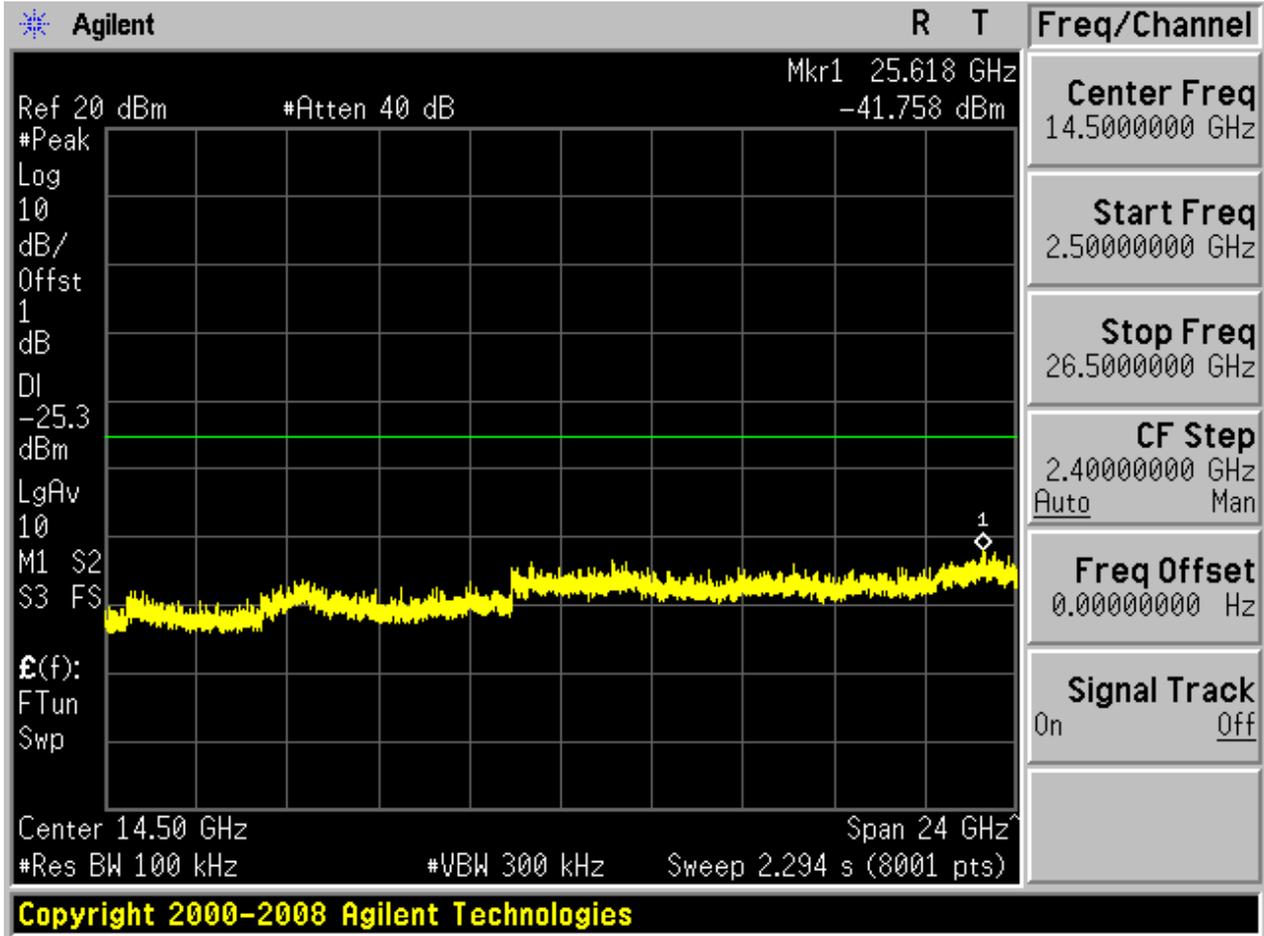

## Appendix G: Radiated Spurious Emission & Spurious in Restricted Band

Note: Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


### Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

### Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.

Note 2: **The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).**

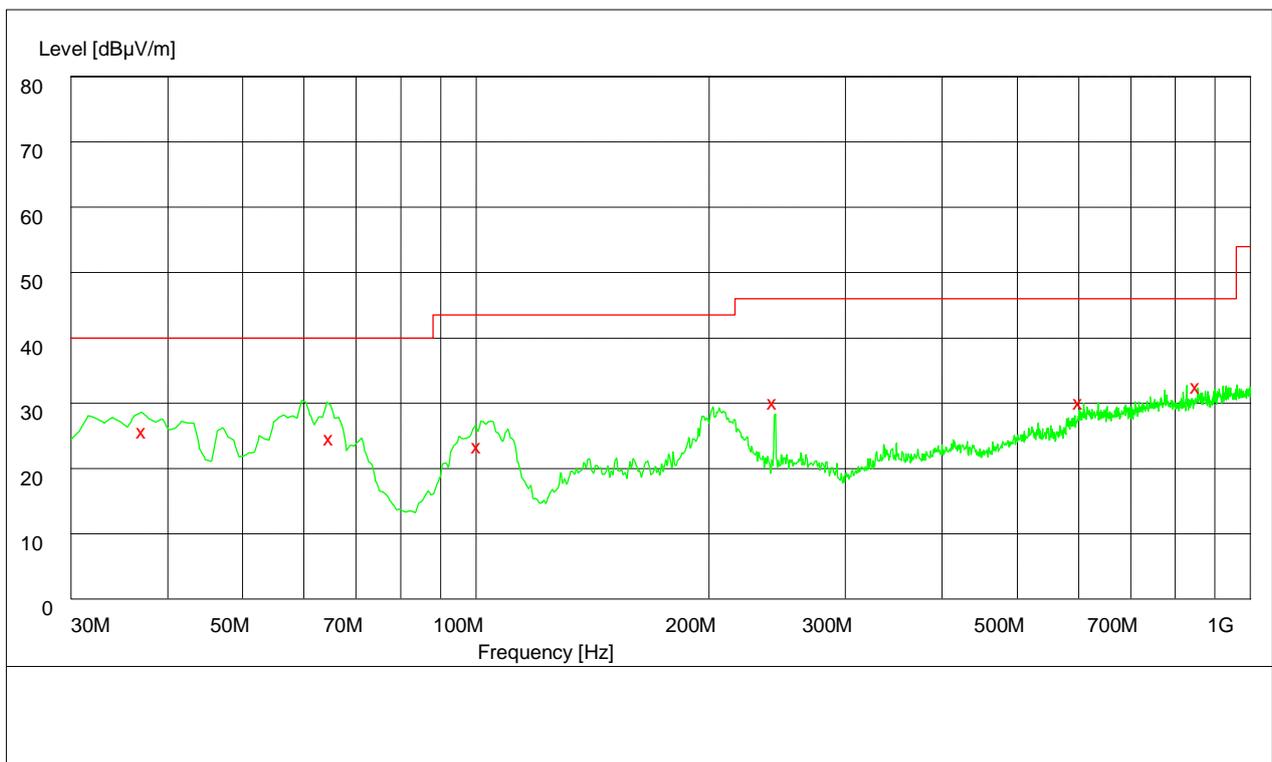




---

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Plarization
37.284000	27.00	14.2	40.0	13.0	100.0	354.00	VERTICAL
65.044000	26.10	12.9	40.0	13.9	100.0	340.00	VERTICAL
100.792000	24.80	13.7	43.5	18.7	100.0	179.00	VERTICAL
243.224000	31.60	14.3	46.0	14.4	112.0	326.00	HORIZONTAL
604.416000	31.50	23.7	46.0	14.5	197.0	356.00	HORIZONTAL
856.024000	34.00	26.1	46.0	12.0	182.0	14.00	HORIZONTAL

**Part 3: Testing Range of “18 GHz to 26.5 GHz”**

Note: No peak found in pre- test.

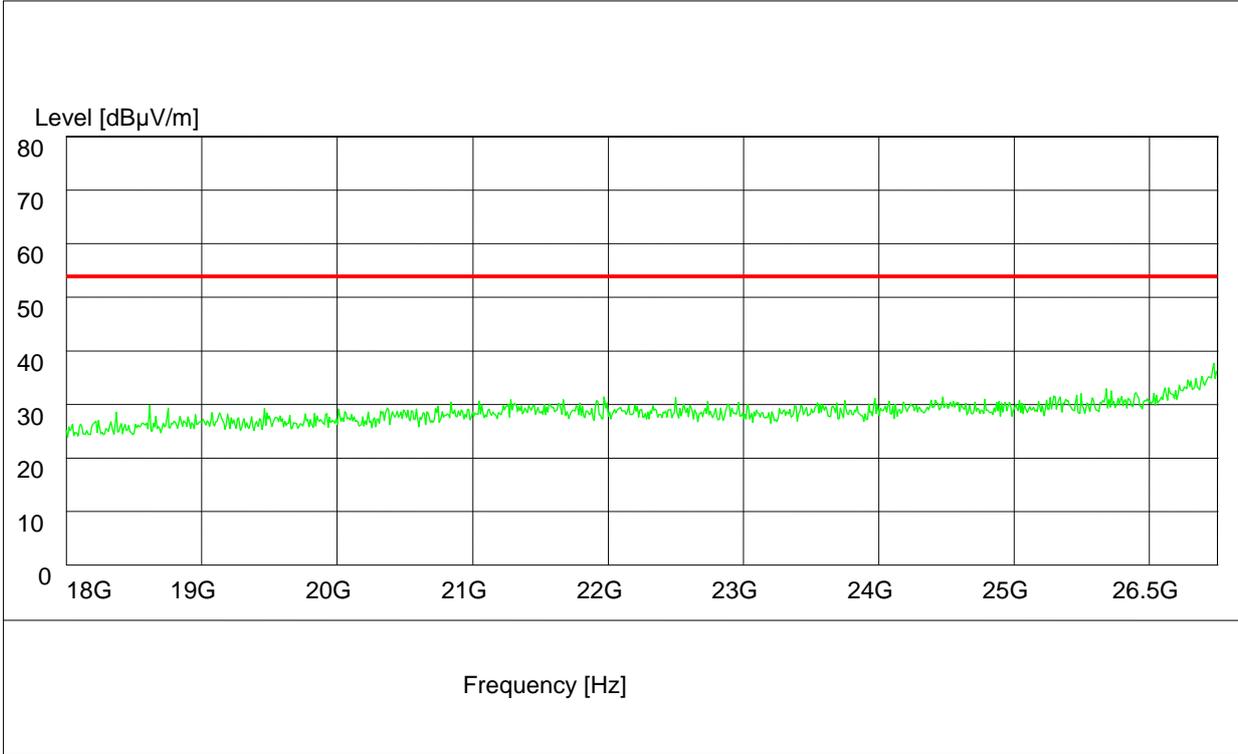


**Part 4: Testing Range of “2.3GHz to 2.5GHz”**

- Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

## Test Mode: 11b

**Channel 01**

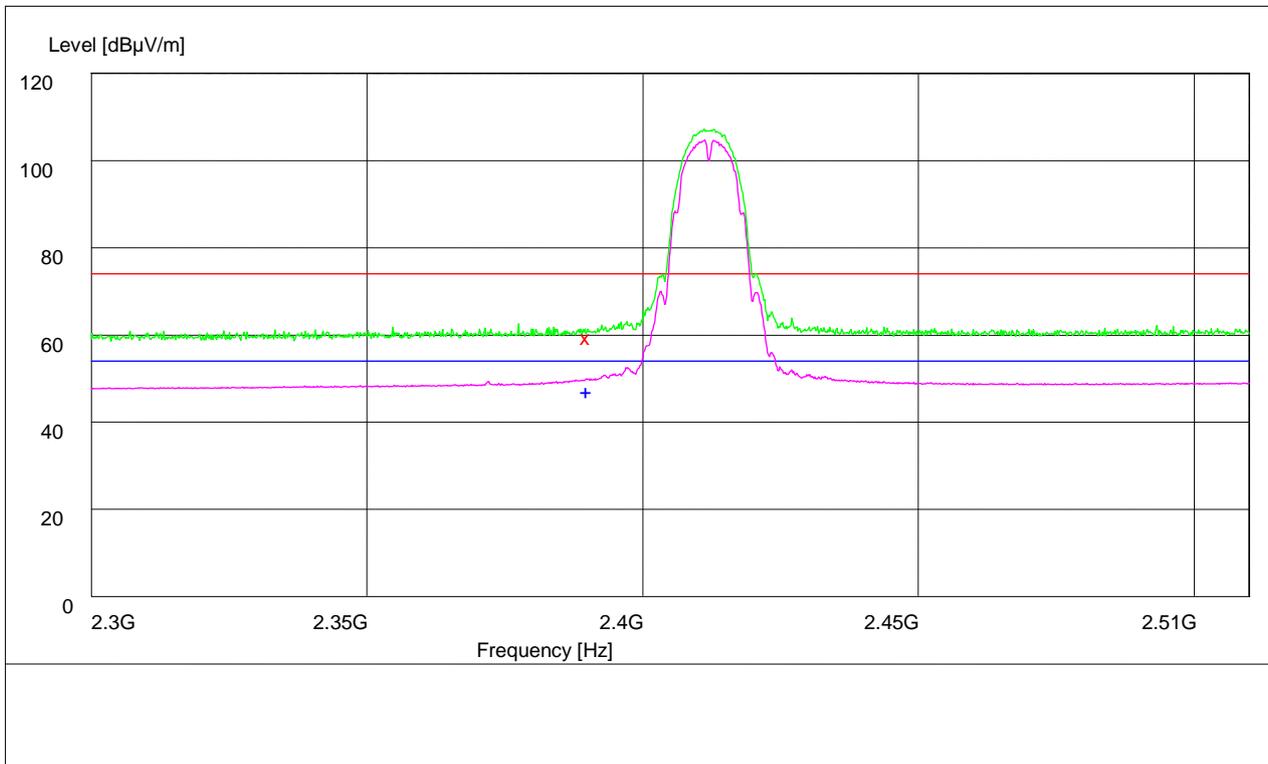

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	61.50	34.8	74.0	12.5	100.0	173.00	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	49.10	34.8	54.0	4.9	100.0	235.00	HORIZONTAL

### Channel 11

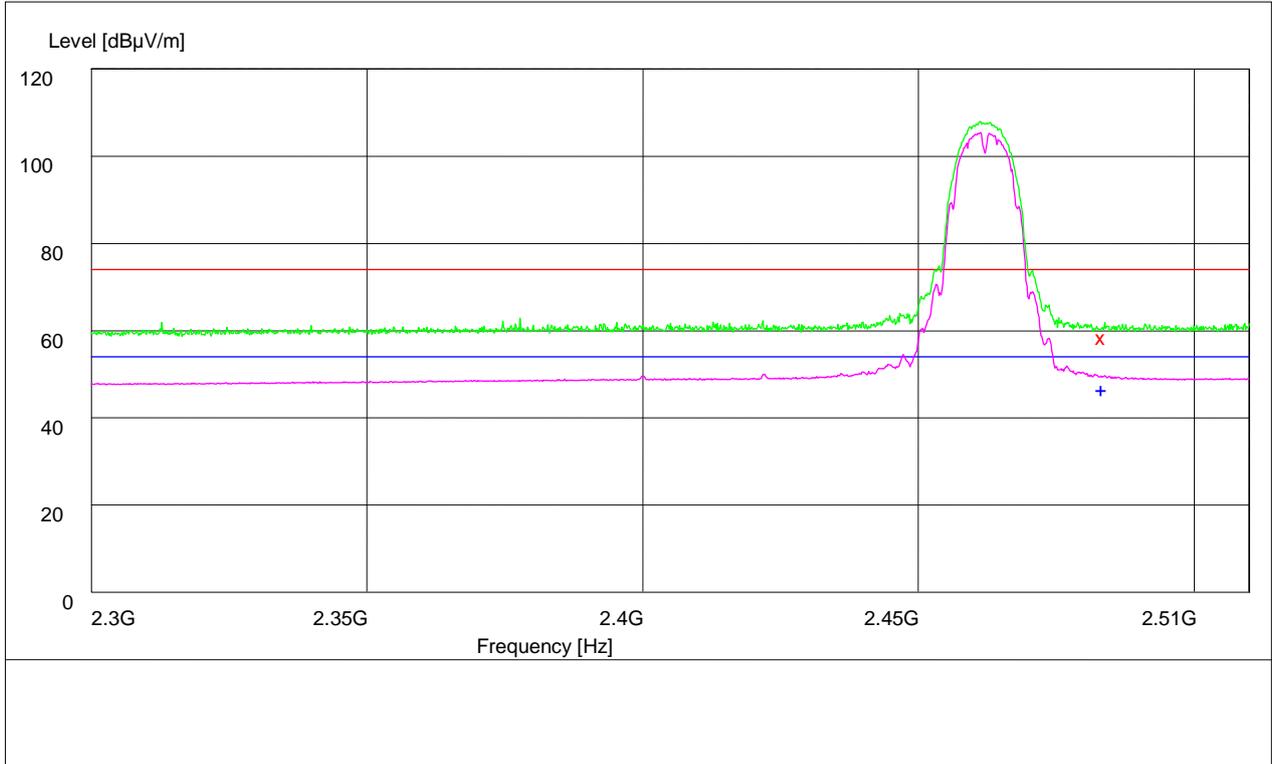

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2483.500000	60.50	35.1	74.0	13.5	130.0	12.00	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2483.500000	48.70	35.1	54.0	5.3	100.0	242.00	HORIZONTAL

# Test Mode: 11g

## Channel 01

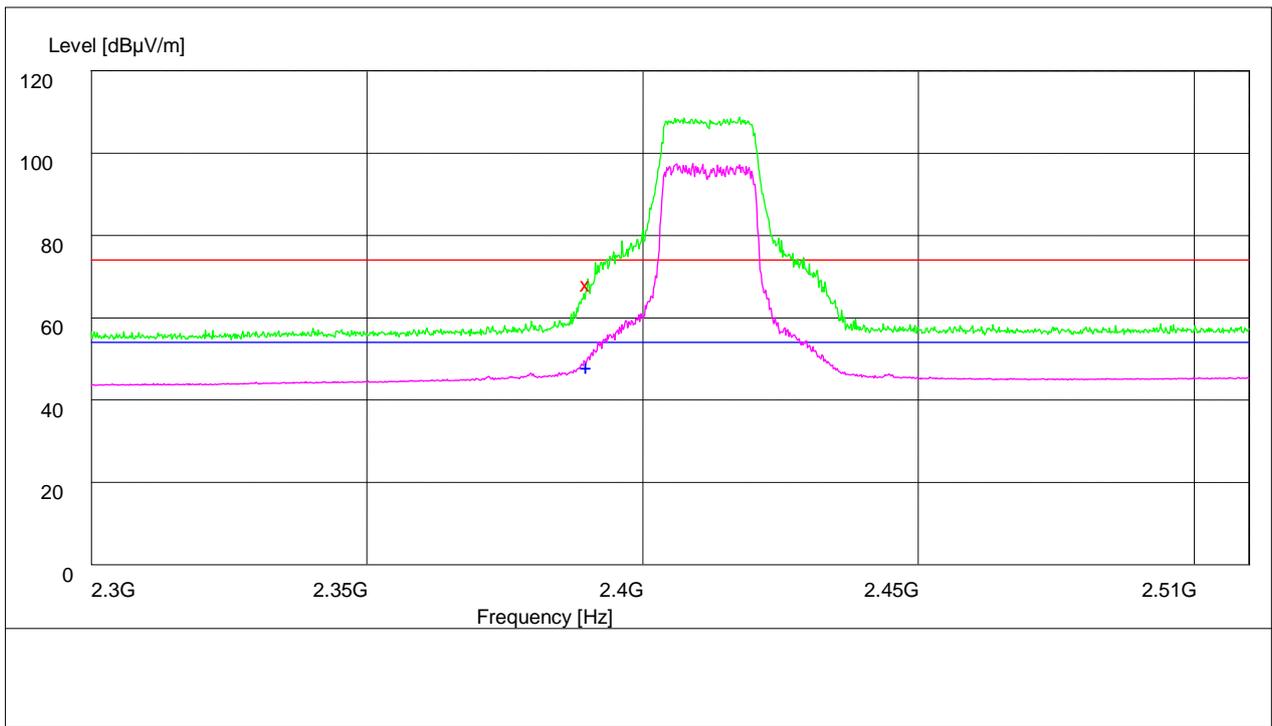

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	70.60	34.8	74.0	4.1	100.0	228.00	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	50.50	34.8	54.0	4.2	100.0	237.00	HORIZONTAL

## Channel 11

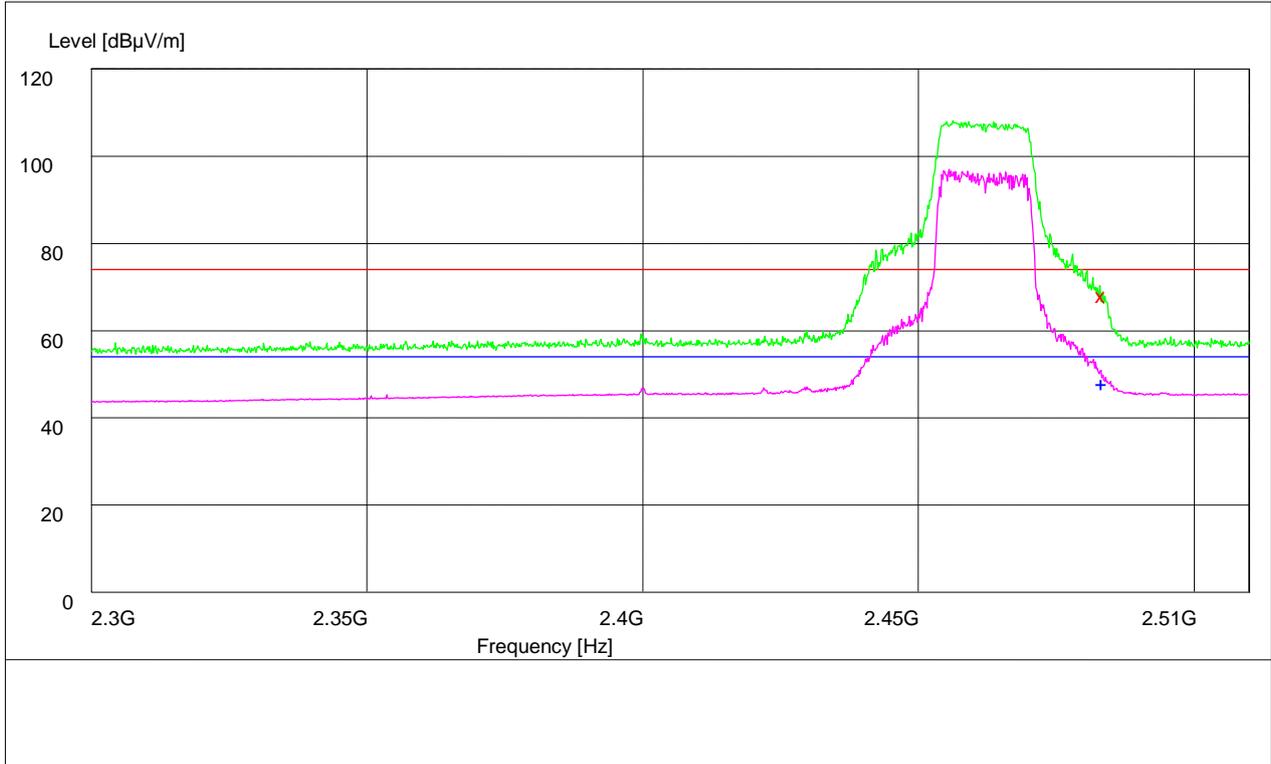

Note: The peak exceeds the limit line is carrier frequency.

### MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2483.500000	70.20	35.1	74.0	4.0	100.0	245.00	HORIZONTAL

### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2483.500000	49.90	35.1	54.0	4.1	100.0	243.00	HORIZONTAL

# Test Mode: 11n

## Channel 01

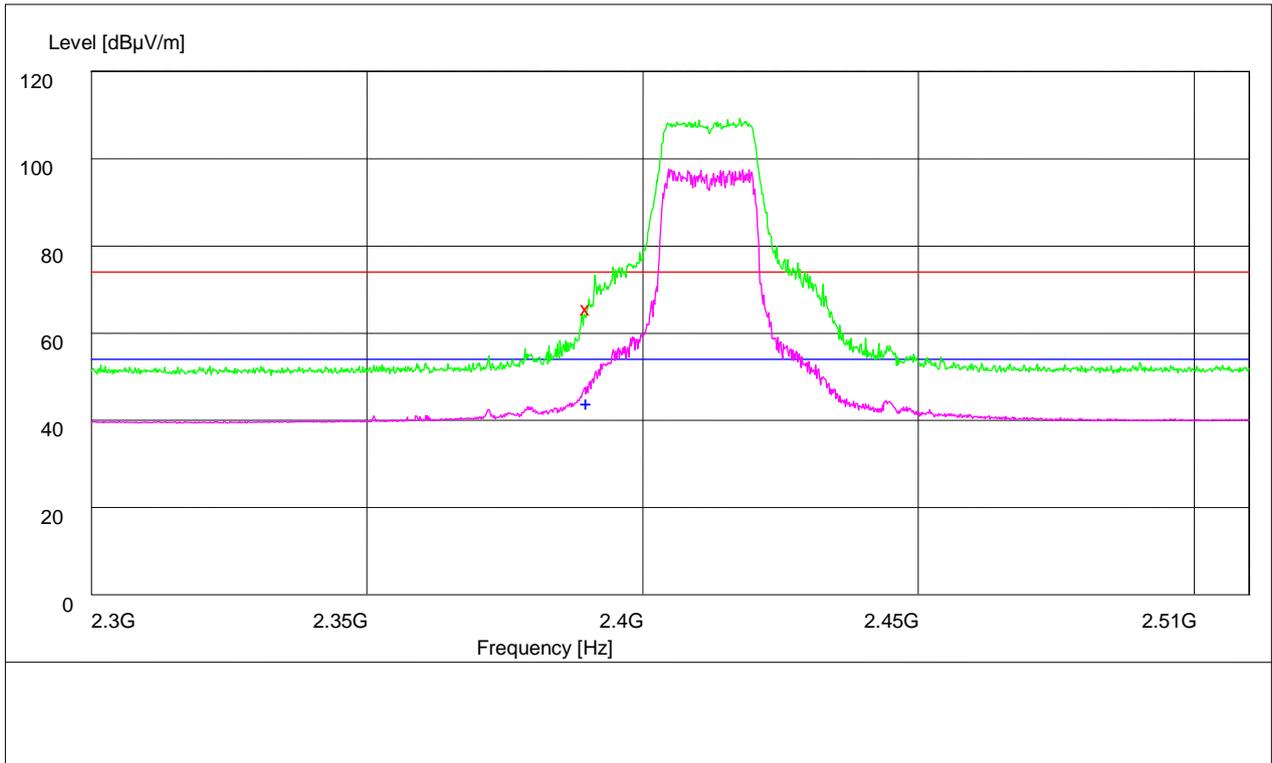

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	67.80	34.8	74.0	6.2	100.0	222.00	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	46.20	34.8	54.0	7.8	103.0	224.00	HORIZONTAL

## Channel 11

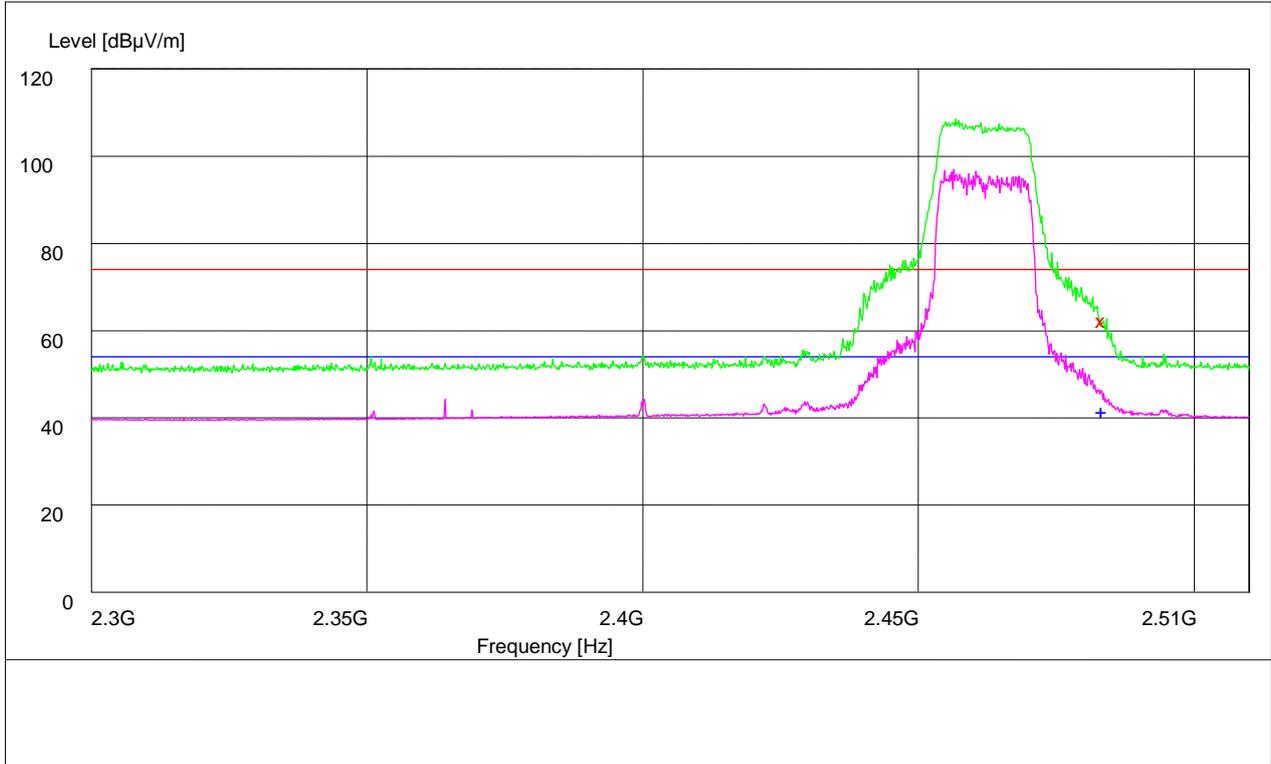

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2483.500000	64.40	35.1	74.0	9.6	103.0	223.00	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2483.500000	43.60	35.1	54.0	10.4	103.0	230.00	HORIZONTAL

### Part 5: Testing Range of “1 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

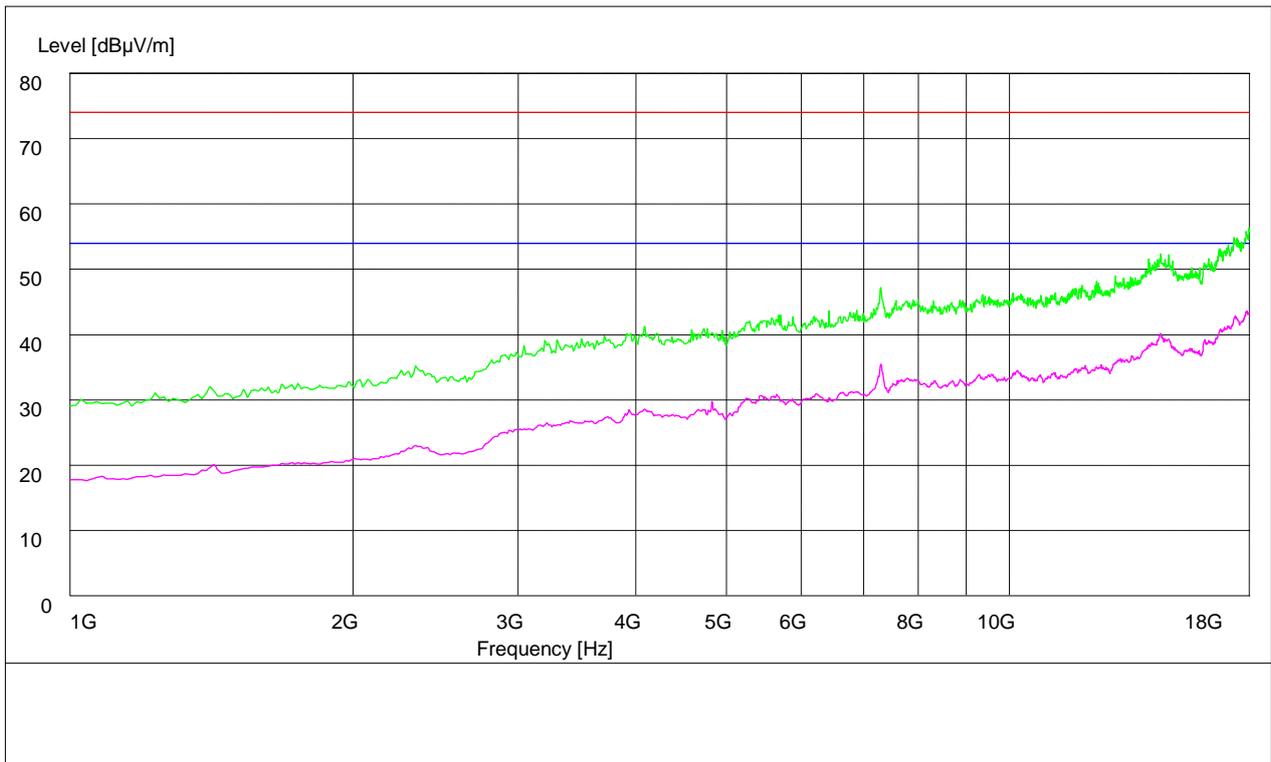




## Appendix H: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

# Channel 6

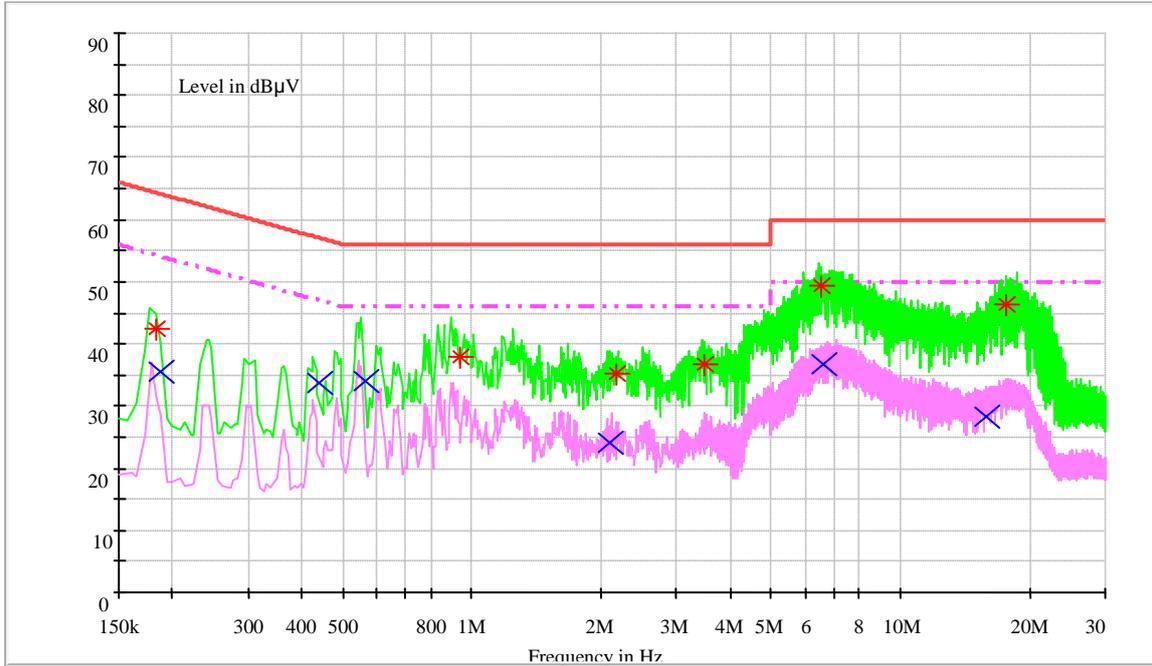

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.183784	42.3	9.7	64.3	22	L1	FLO
0.941025	38.1	9.7	56	17.9	N	FLO
2.183412	35.1	9.7	56	20.9	N	FLO
3.488246	36.7	9.7	56	19.3	N	FLO
6.493364	49.4	9.8	60	10.6	N	FLO
17.65907	46.4	10.1	60	13.6	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.187064	35.4	9.7	54.2	18.8	N	FLO
0.439252	33.7	9.7	47.1	13.4	N	FLO
0.567318	33.9	9.7	46	12.1	N	FLO
2.103101	23.9	9.7	46	22.1	L	FLO
6.641212	36.8	9.8	50	13.2	N	FLO
15.82914	28.3	10.1	50	21.7	N	FLO



---

END