



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D835-EX-Body
SystemPerformanceCheck-D1800-EX-Body
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D2600-EX-Body

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D835-EX-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 53.092$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(8.98, 8.98, 8.98); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0$, 31.0
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=15mm,pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.52 mW/g


Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 43.479 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.814 mW/g

SAR(1 g) = 2.57 mW/g; SAR(10 g) = 1.69 mW/g

Maximum value of SAR (measured) = 2.79 mW/g

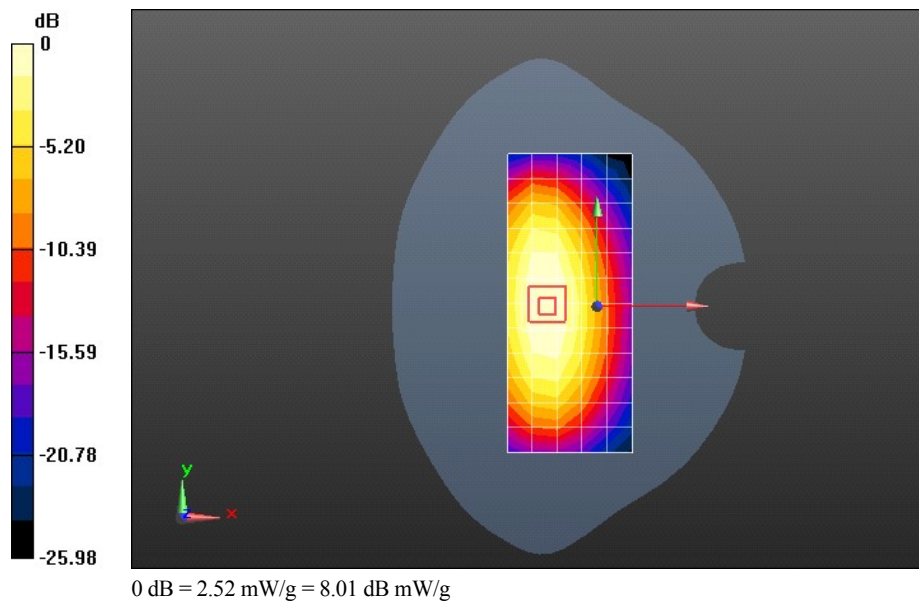

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1800-EX-Body

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d184

Communication System: CW; Frequency: 1800 MHz

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.573$ mho/m; $\epsilon_r = 52.718$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.43, 7.43, 7.43); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.95 mW/g


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.192 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.074 mW/g

SAR(1 g) = 9.44 mW/g; SAR(10 g) = 4.91 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

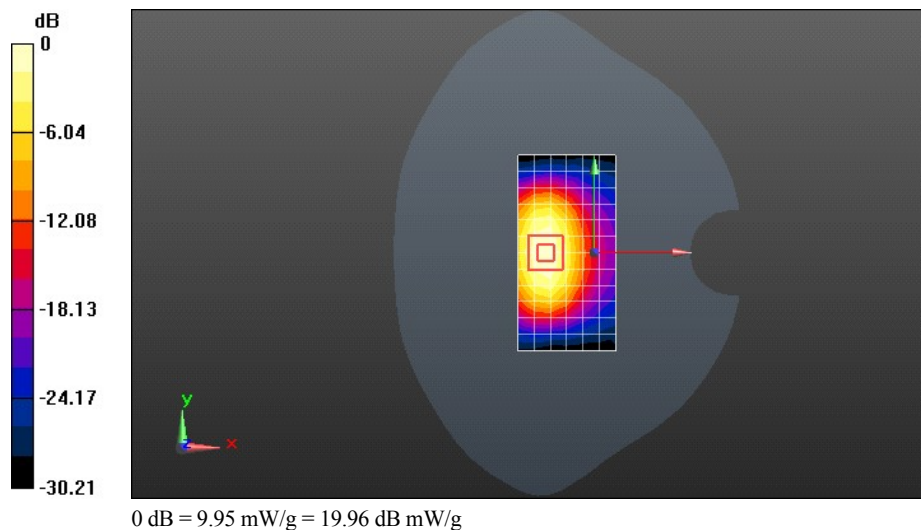

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-EX-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.584$ mho/m; $\epsilon_r = 52.373$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.2 mW/g


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 83.590 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 19.087 mW/g

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.51 mW/g

Maximum value of SAR (measured) = 12.0 mW/g

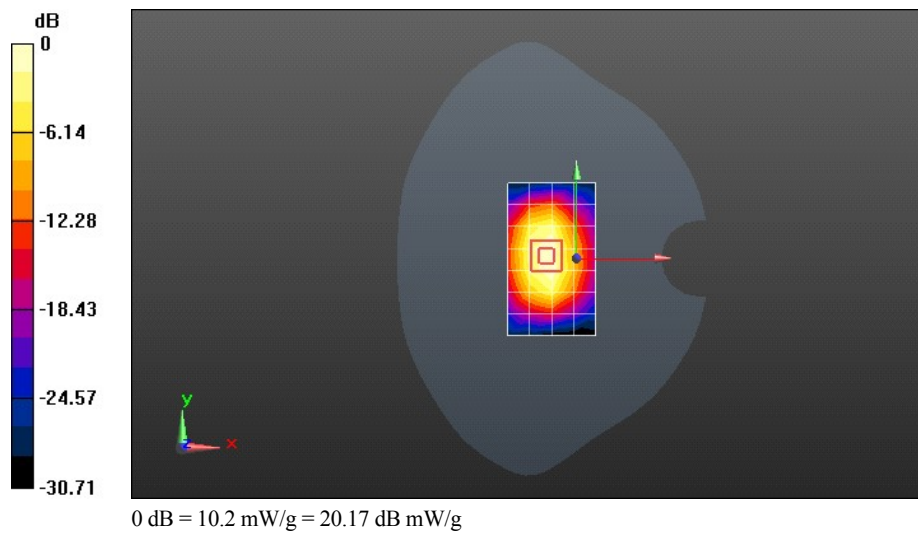

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-EX-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.582$ mho/m; $\epsilon_r = 52.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.14, 7.14, 7.14); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.2 mW/g


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 83.590 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 19.061 mW/g

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.5 mW/g

Maximum value of SAR (measured) = 12.0 mW/g

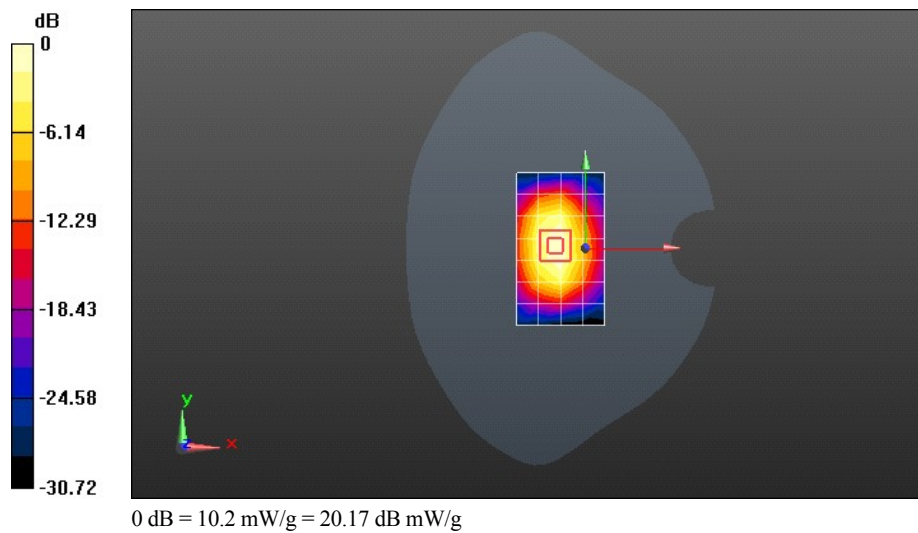

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D2600-EX-Body

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021

Communication System: CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.115$ mho/m; $\epsilon_r = 53.046$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.69, 6.69, 6.69); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 11.5 mW/g

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 79.303 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 29.332 mW/g

SAR(1 g) = 14.2 mW/g; SAR(10 g) = 6.46 mW/g

Maximum value of SAR (measured) = 16.5 mW/g

