

**Appendix B. SAR Measurement Plots**

Table of contents
GSM850 Head Second antenna
GSM850 Body Second antenna
GSM1900 Head Second antenna
GSM1900 Body Second antenna
UMTS Band II Head Second antenna
UMTS Band II Body Second antenna
UMTS Band IV Head Second antenna
UMTS Band IV Body Second antenna
UMTS Band V Head Second antenna
UMTS Band V Body Second antenna
LTE Band II Head Second antenna
LTE Band II Body Second antenna
LTE Band IV Head Second antenna
LTE Band IV Body Second antenna
LTE Band V Head Second antenna
LTE Band V Body Second antenna
LTE Band VII Head Second antenna
LTE Band VII Body Second antenna
LTE Band XII Head Second antenna
LTE Band XII Body Second antenna
LTE Band XVII Head Second antenna
LTE Band XVII Body Second antenna
LTE Band XXVI Head Second antenna
LTE Band XXVI Body Second antenna
LTE Band XXXVIII Head Second antenna
LTE Band XXXVIII Body Second antenna
LTE Band XLI Head Second antenna
LTE Band XLI Body Second antenna
GSM850 Head Main antenna
GSM850 Body Main antenna
GSM1900 Head Main antenna
GSM1900 Body Main antenna
UMTS Band II Head Main antenna

UMTS Band II Body Main antenna
UMTS Band IV Head Main antenna
UMTS Band IV Body Main antenna
UMTS Band V Head Main antenna
UMTS Band V Body Main antenna
LTE Band II Head Main antenna
LTE Band II Body Main antenna
LTE Band IV Head Main antenna
LTE Band IV Body Main antenna
LTE Band V Head Main antenna
LTE Band V Body Main antenna
LTE Band VII Head Main antenna
LTE Band VII Body Main antenna
LTE Band XII Head Main antenna
LTE Band XII Body Main antenna
LTE Band XVII Head Main antenna
LTE Band XVII Body Main antenna
LTE Band XXVI Head Main antenna
LTE Band XXVI Body Main antenna
LTE Band XXXVIII Head Main antenna
LTE Band XXXVIII Body Main antenna
LTE Band XLI Head Main antenna
LTE Band XLI Body Main antenna
WiFi 2.4G Head
WiFi 2.4G Body
WiFi 5G Head
WiFi 5G Body

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 190CH Right hand touch cheek with battery 3 -Main modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.692$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM1; Type: SAM; Serial: TP-1475

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.41 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.03 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.659 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

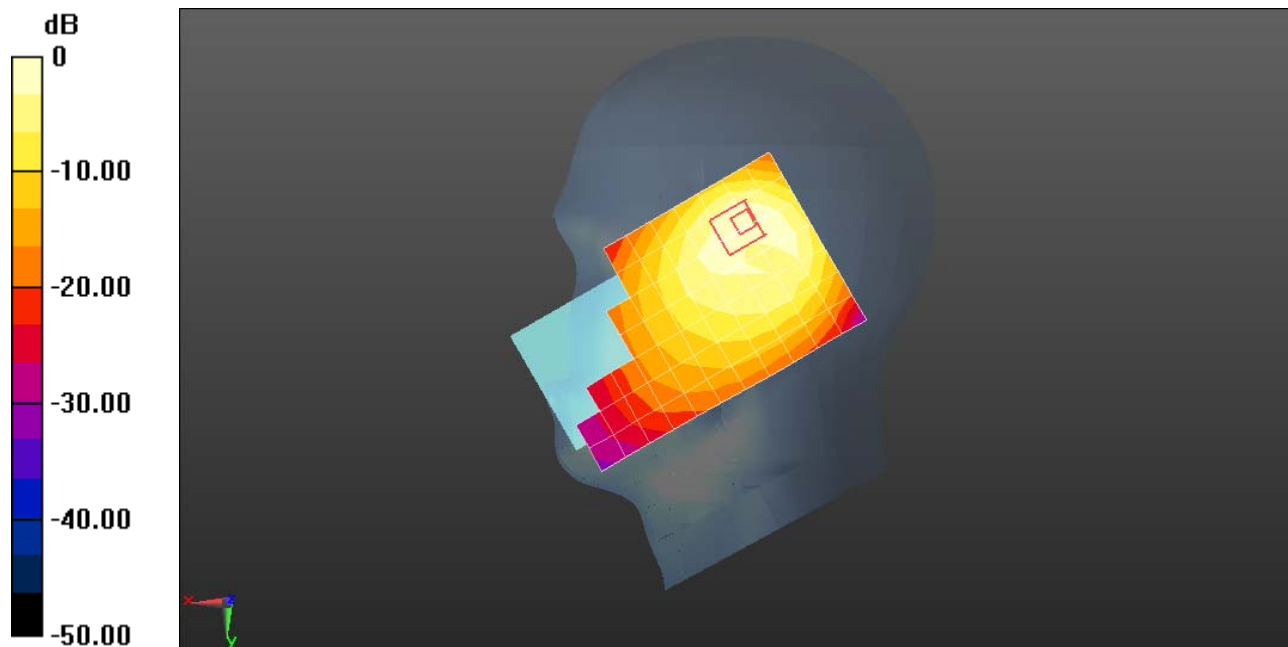

0 dB = 1.41 W/kg = 1.49 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM 850 190CH Front side 15mm with Battery 3-Main Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM2; Type: SAM; Serial: TP:1474

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.259 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.38 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.166 W/kg

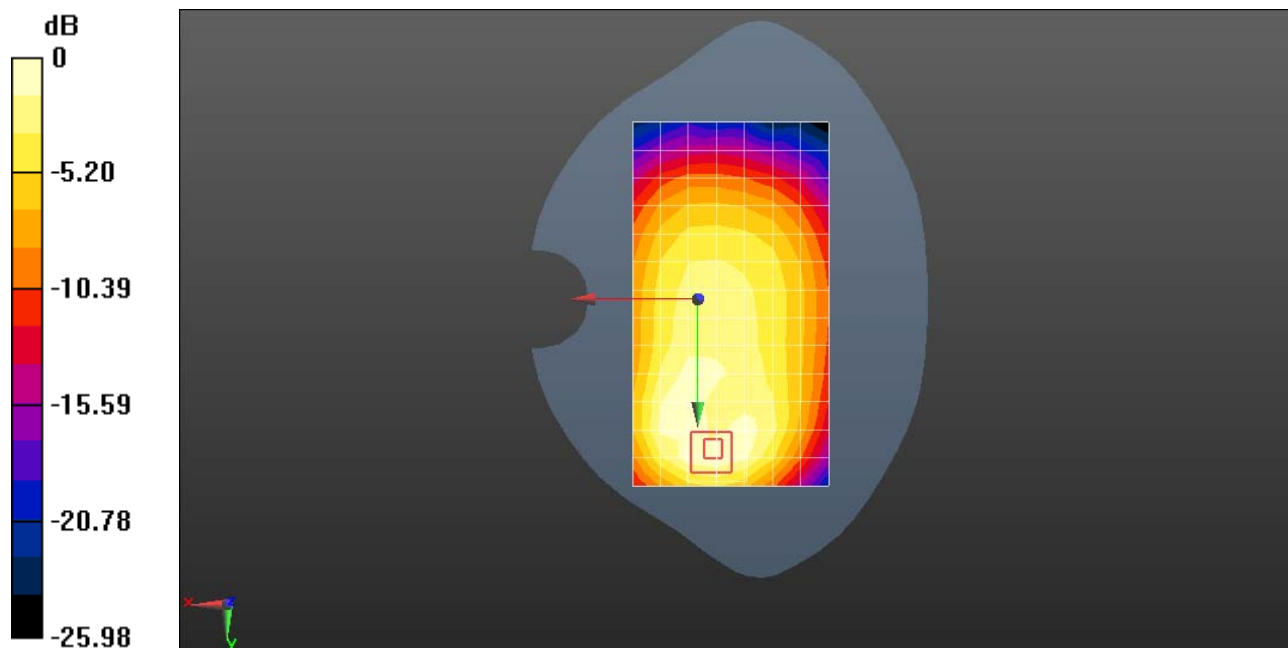

0 dB = 0.259 W/kg = -5.87 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM 850 GPRS 2TS 190CH Back side 10mm with Battery 3-Main Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.495 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.02 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.542 W/kg

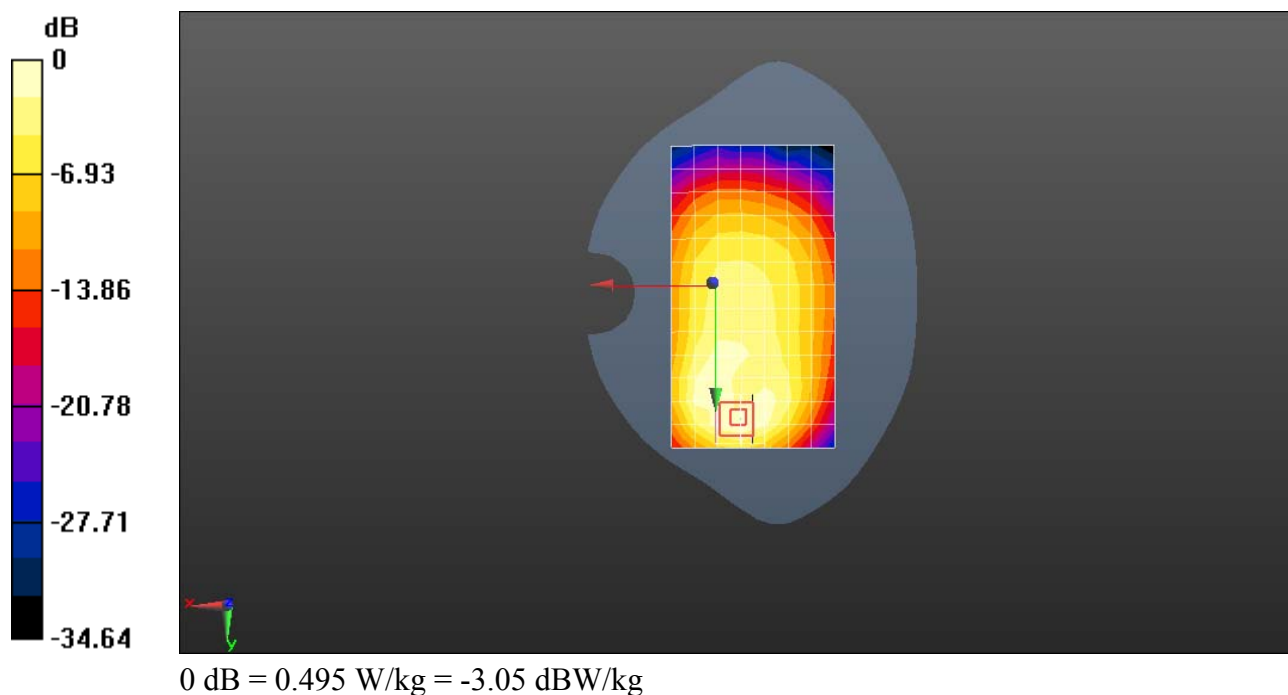

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 190CH Right hand touch cheek with Battery 2-Second Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.692$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM1; Type: SAM; Serial: TP-1475

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.24 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.45 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.636 W/kg

Maximum value of SAR (measured) = 1.56 W/kg

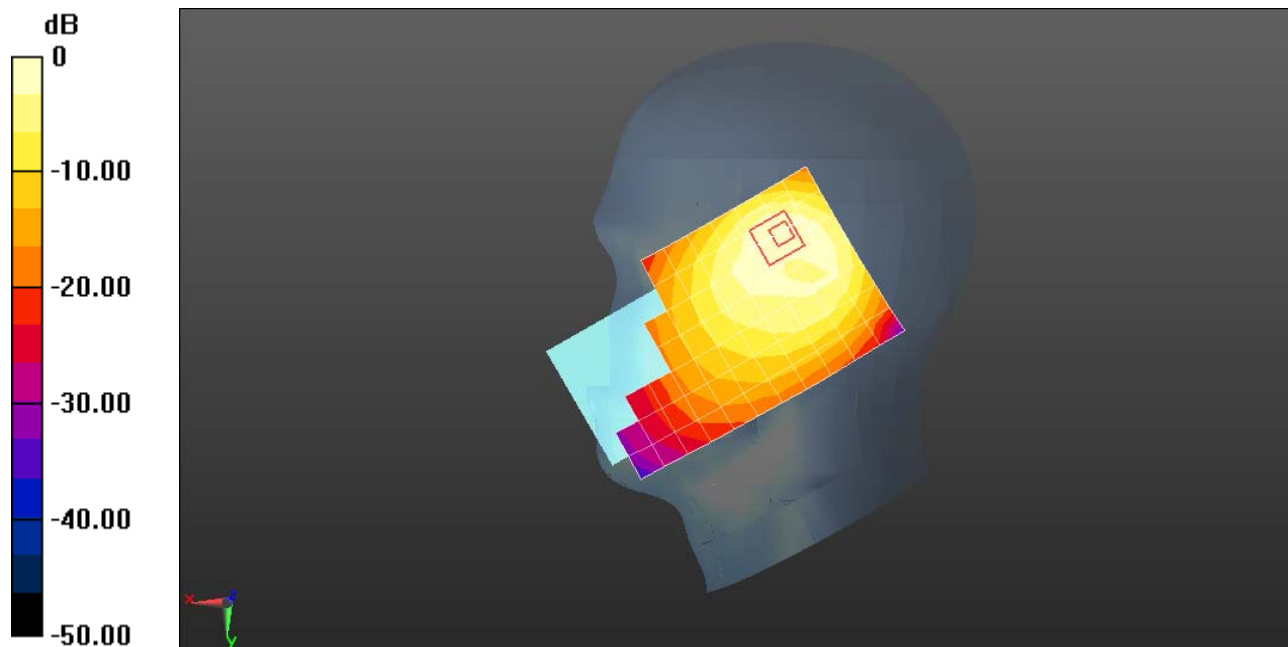

0 dB = 1.24 W/kg = 0.93 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 190CH Back side 15mm with Battery 3-Second Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

- Electronics: DAE4 Sn851; Calibrated: 2015-7-20

- Phantom: SAM2; Type: SAM; Serial: TP:1474

- DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.237 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.12 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

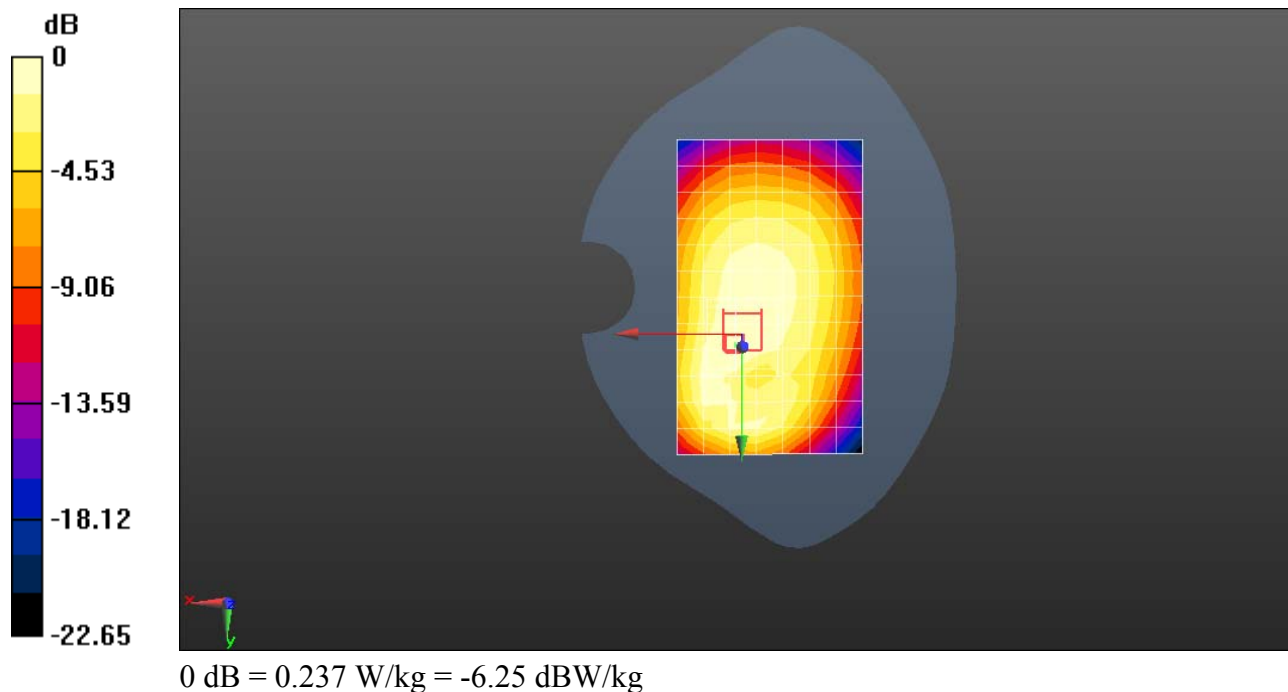

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 GPRS 2TS 190CH Back side 10mm with Battery 3-Second Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM2; Type: SAM; Serial: TP:1474

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.391 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.46 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.448 W/kg

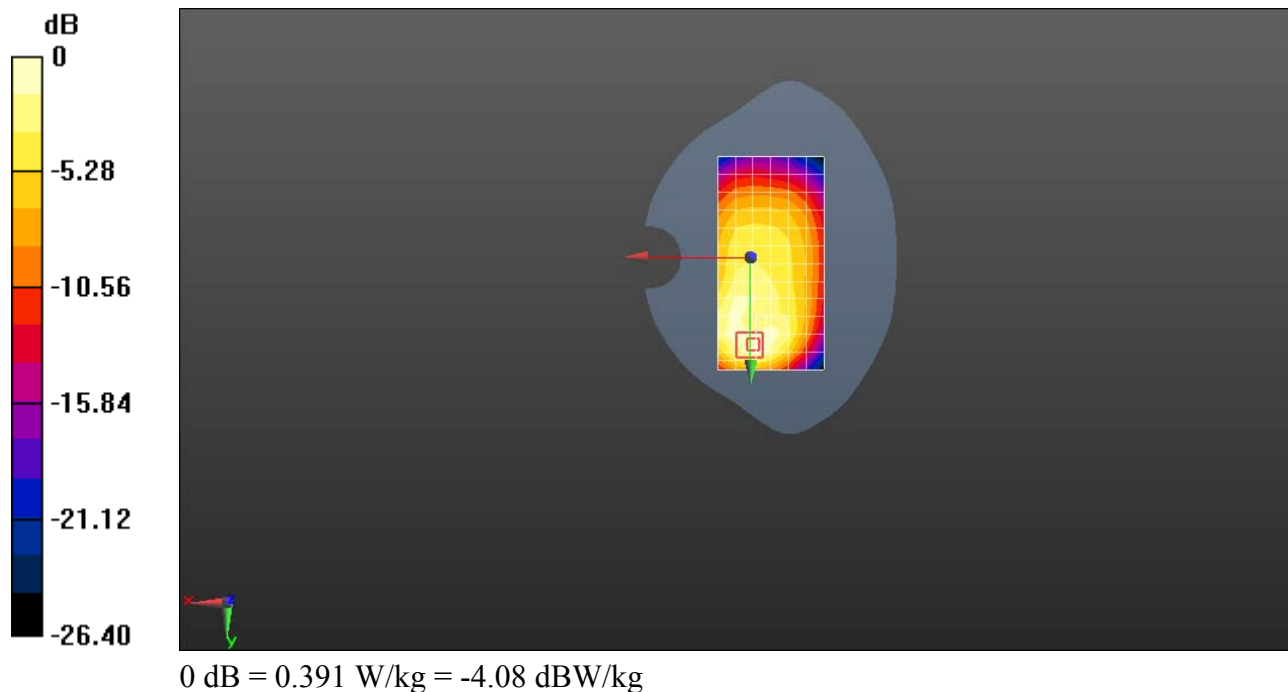

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 512CH Right hand touch cheek with Battery 2-Main Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 40.415$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.11 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 14.88 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.604 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.31 W/kg

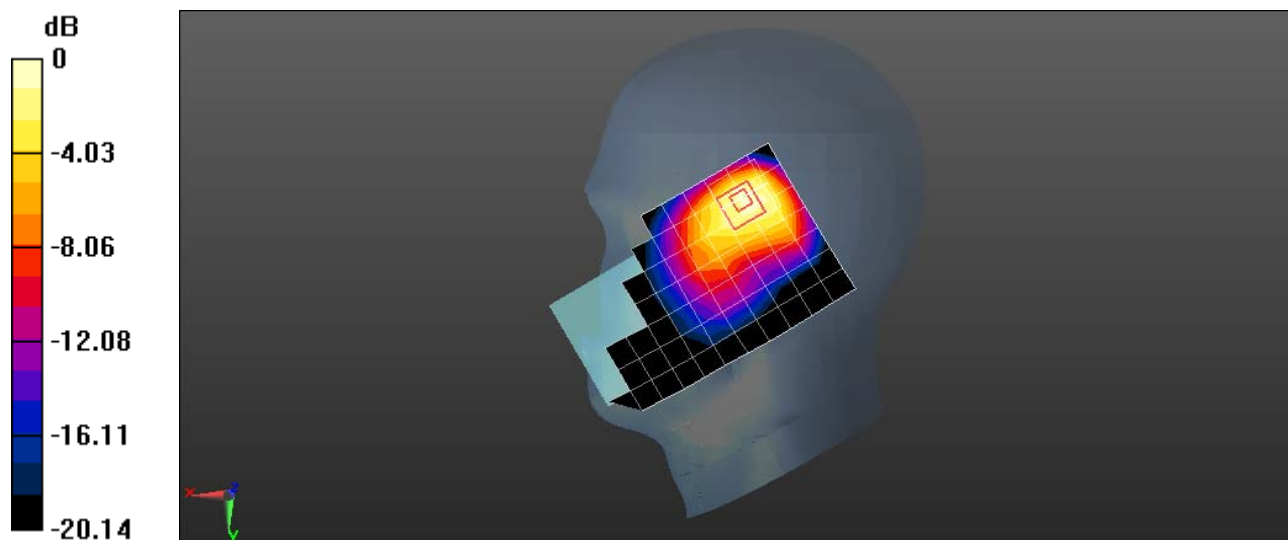

0 dB = 1.31 W/kg = 1.16 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661H Back side 15mm with battery 2-Main Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.154 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.609 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

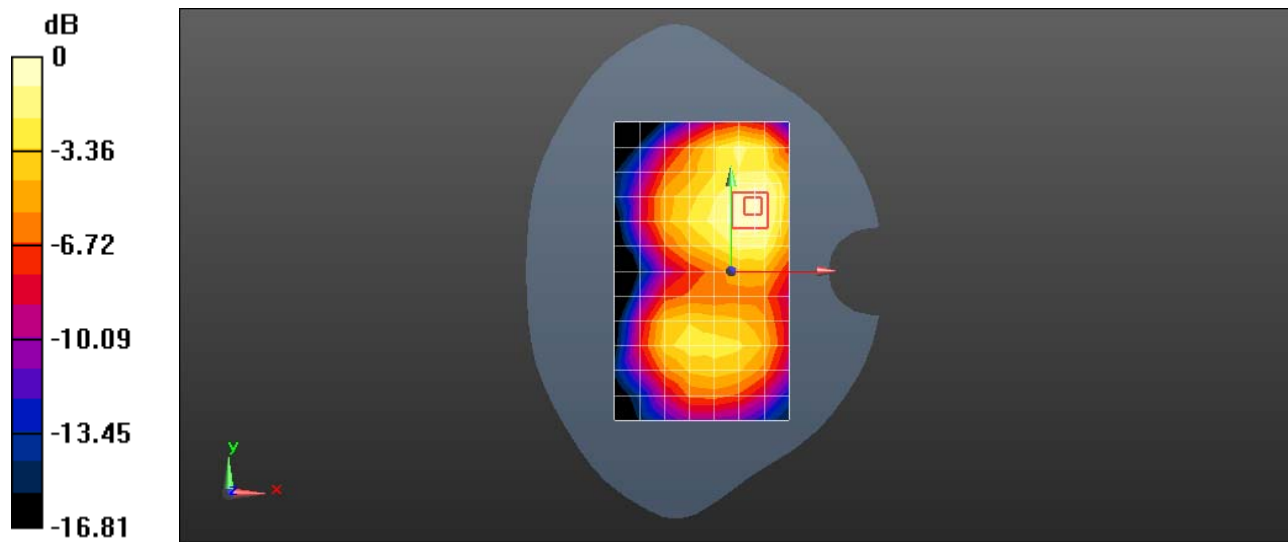

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661H Left side 10mm with battery 2-Main Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ S/m; $\epsilon_r = 52.925$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM4; Type: SAM; Serial: TP-1620

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.302 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.786 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.329 W/kg

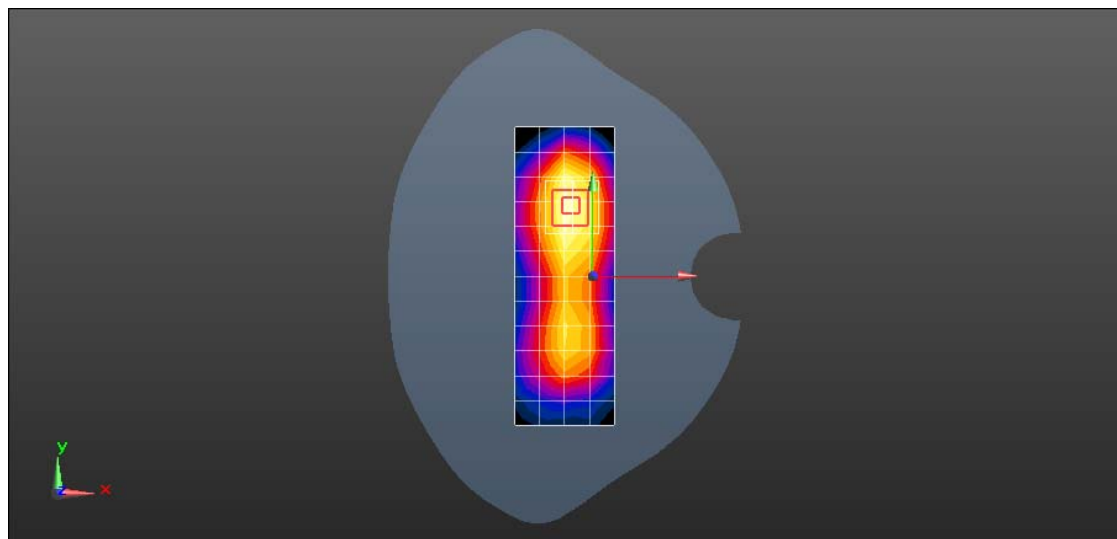

0 dB = 0.329 W/kg = -4.83 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 512CH Right hand touch cheek with Battery 3-Second Modem Second Antenna-Repeated

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 40.415$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.47 W/kg

Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm



Reference Value = 16.54 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.733 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.55 W/kg

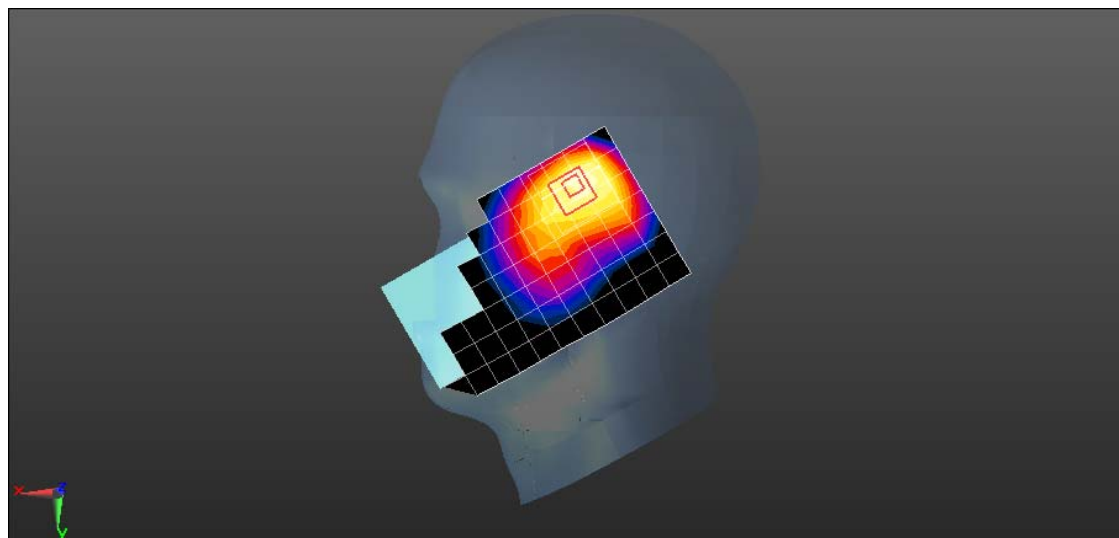

0 dB = 1.55 W/kg = 1.90 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661CH Back Side 15mm with Battery 3-Second Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 51.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.155 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.311 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

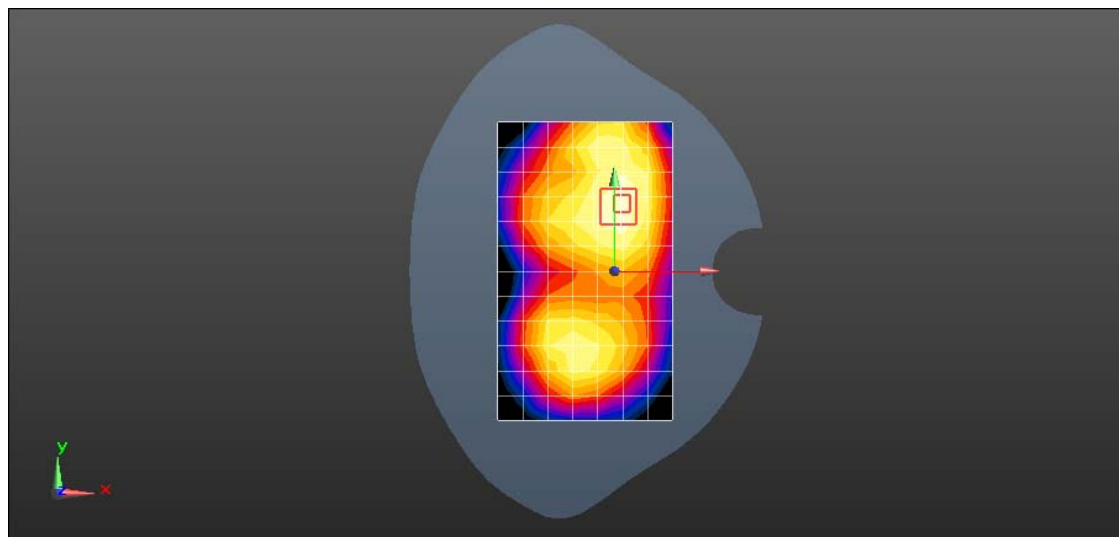

0 dB = 0.158 W/kg = -8.00 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661CH Left Side 10mm-Second Modem Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 51.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.546 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.15 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.579 W/kg

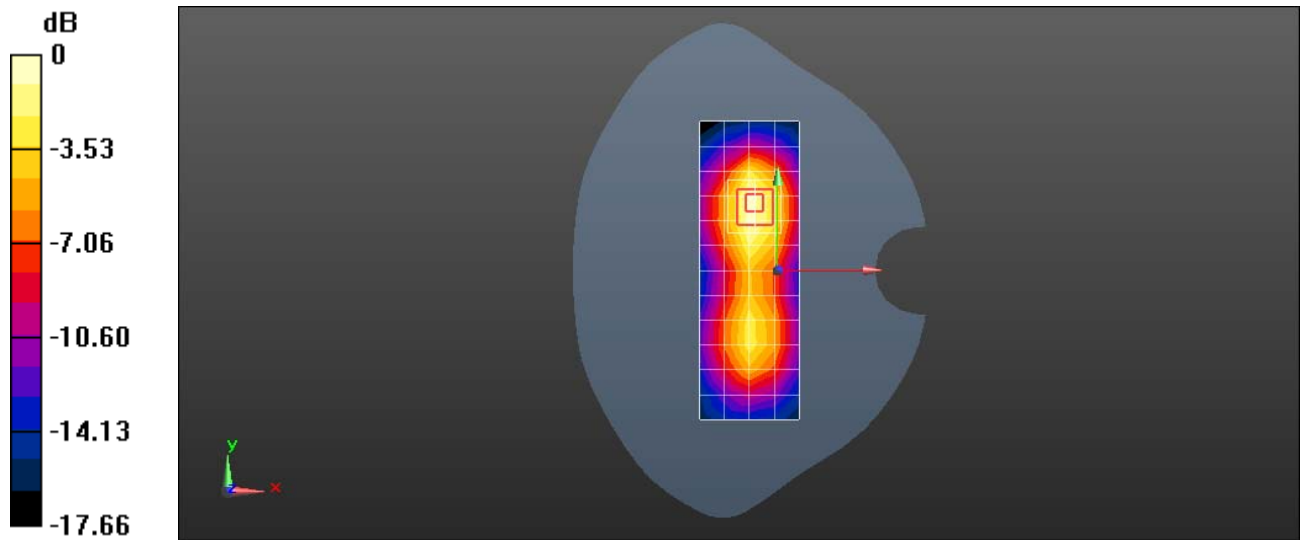

0 dB = 0.579 W/kg = -2.37 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band II 9538CH Right hand touch cheek with Battery 2-Second Antenna-Repeated

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.462$ S/m; $\epsilon_r = 40.255$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM4; Type: SAM; Serial: TP-1620

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.921 W/kg



Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.48 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.888 W/kg; SAR(10 g) = 0.489 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

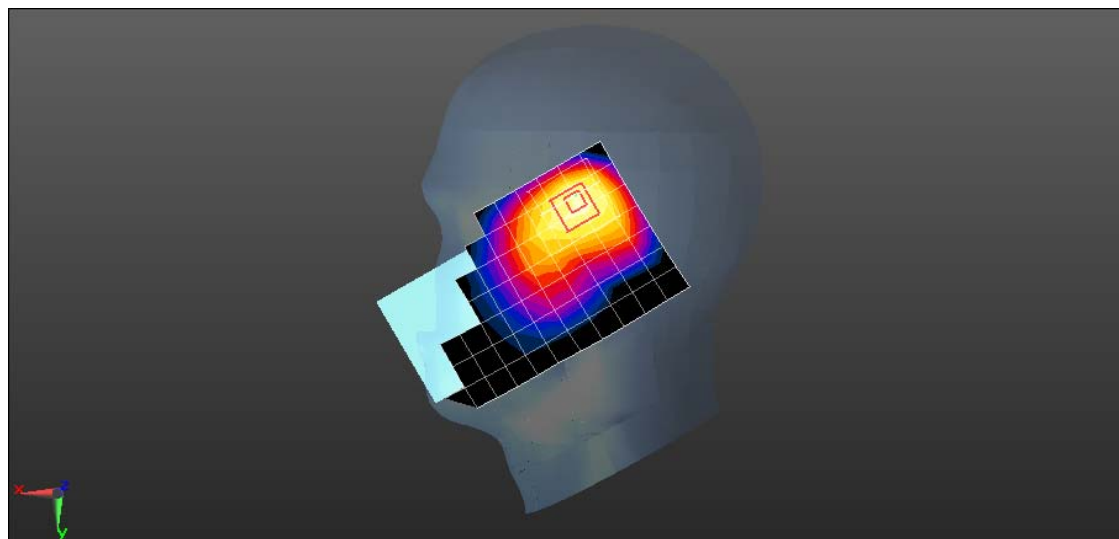

0 dB = 1.10 W/kg = 0.42 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band II 9400CH Back side 15mm with battery 2-Main Antenna Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.119 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.677 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

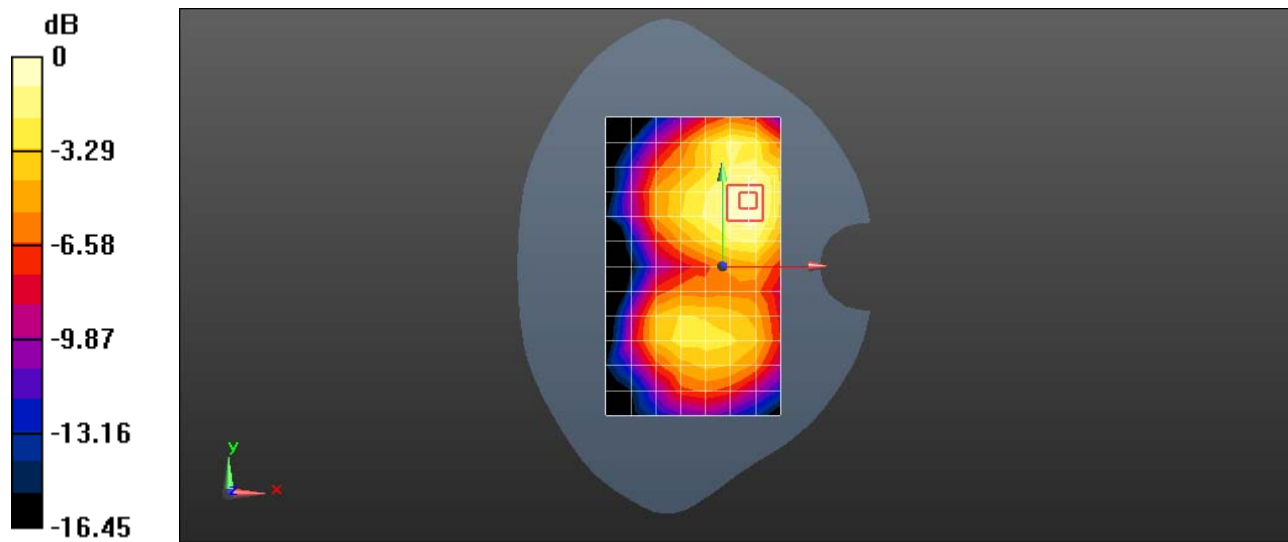

0 dB = 0.125 W/kg = -9.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band II 9400CH Left side 10mm with battery 2 -Second Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ S/m; $\epsilon_r = 52.925$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.211 W/kg


Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.321 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.239 W/kg

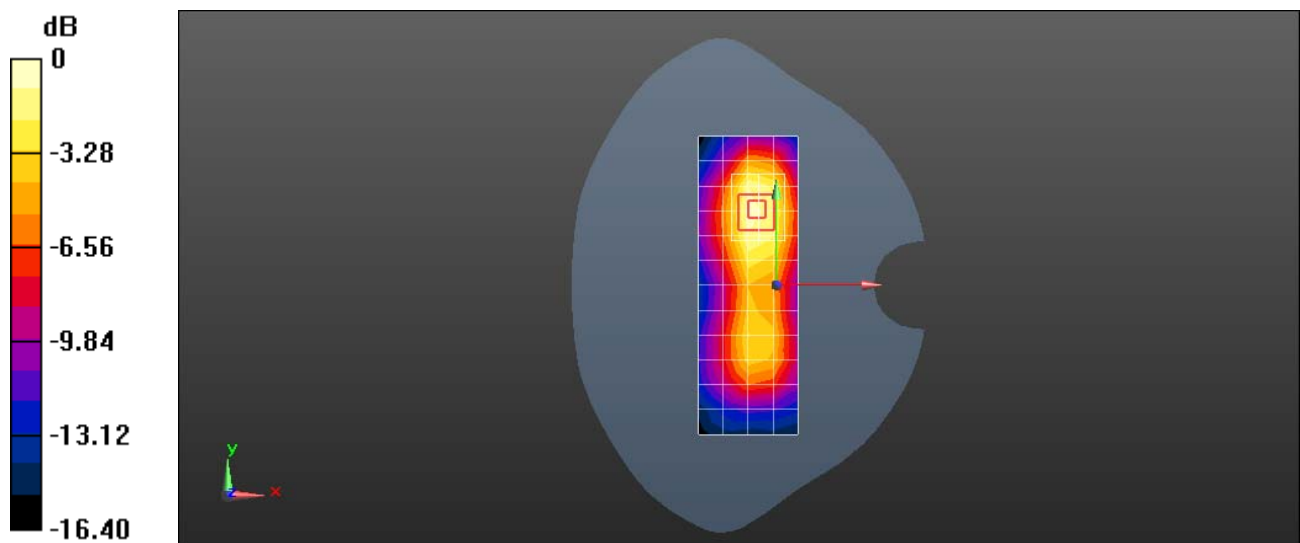

0 dB = 0.239 W/kg = -6.22 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band IV 1513CH Right hand touch cheek with SIM2 and Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.985$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.84, 7.84, 7.84); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.27 W/kg



Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.25 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.3 W/kg; SAR(10 g) = 0.724 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

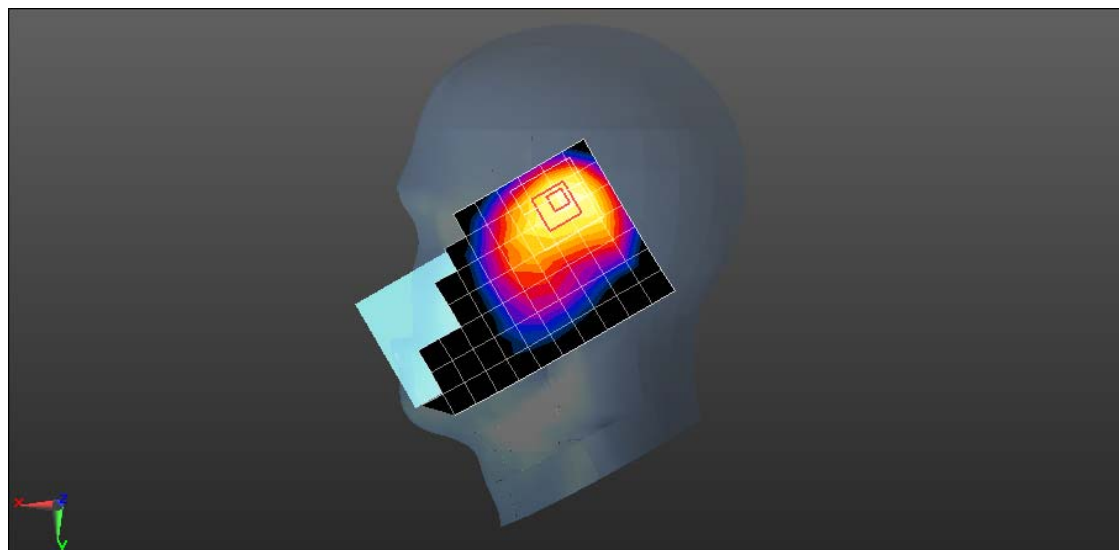

0 dB = 1.65 W/kg = 2.18 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band IV 1413CH Back Side 15mm with SIM2-Second Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 51.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(7.45, 7.45, 7.45); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.177 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.082 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

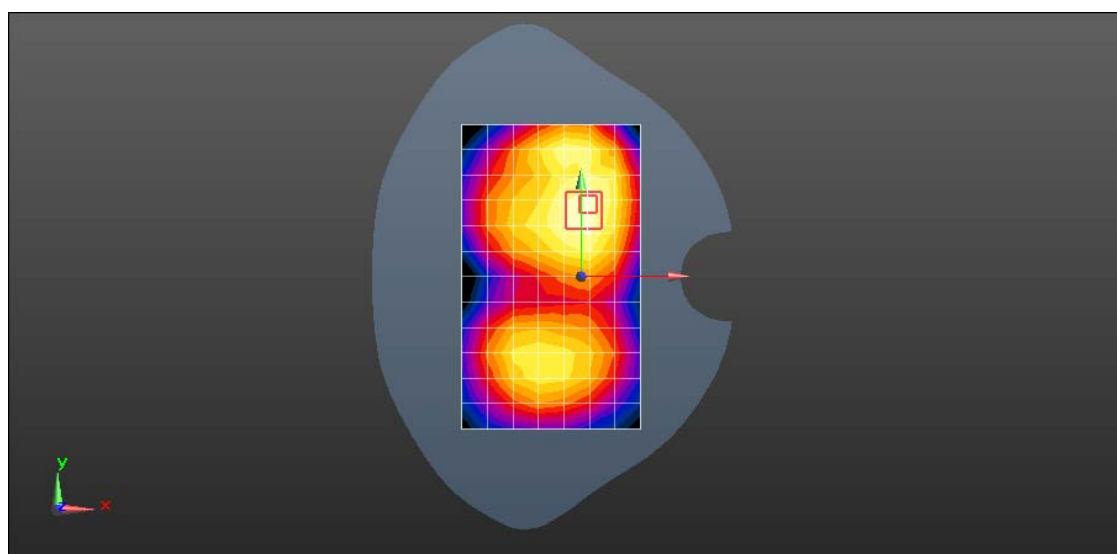

0 dB = 0.179 W/kg = -7.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band IV 1413CH Top Side 10mm with Battery 3-Second Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 51.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(7.45, 7.45, 7.45); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.578 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.36 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.567 W/kg

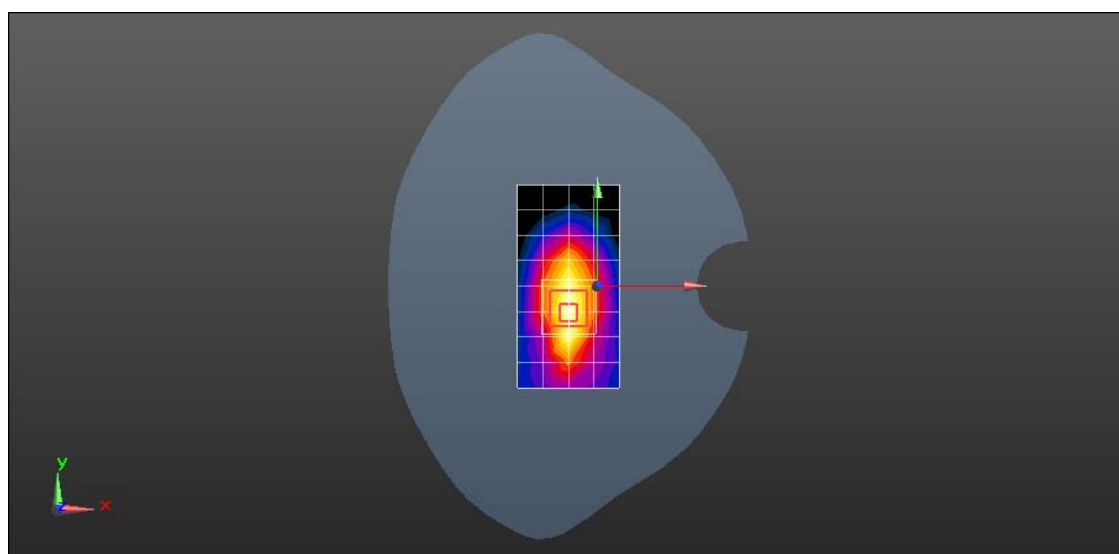

0 dB = 0.567 W/kg = -2.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band V 4233CH Right hand touch cheek -Second Antenna - Repeated

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 40.647$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.32 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.87 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.653 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

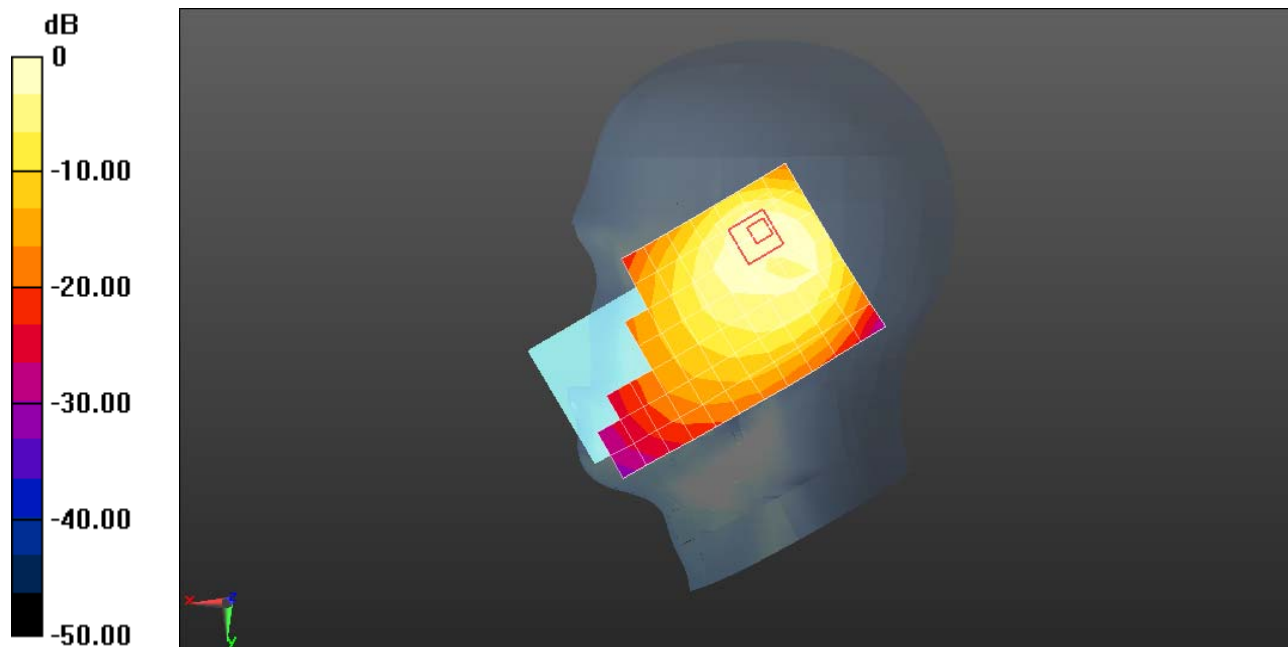

0 dB = 1.32 W/kg = 1.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band V 4182CH Back side 15mm with Battery 3-Second Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.202 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.50 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.138 W/kgInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.212 W/kg

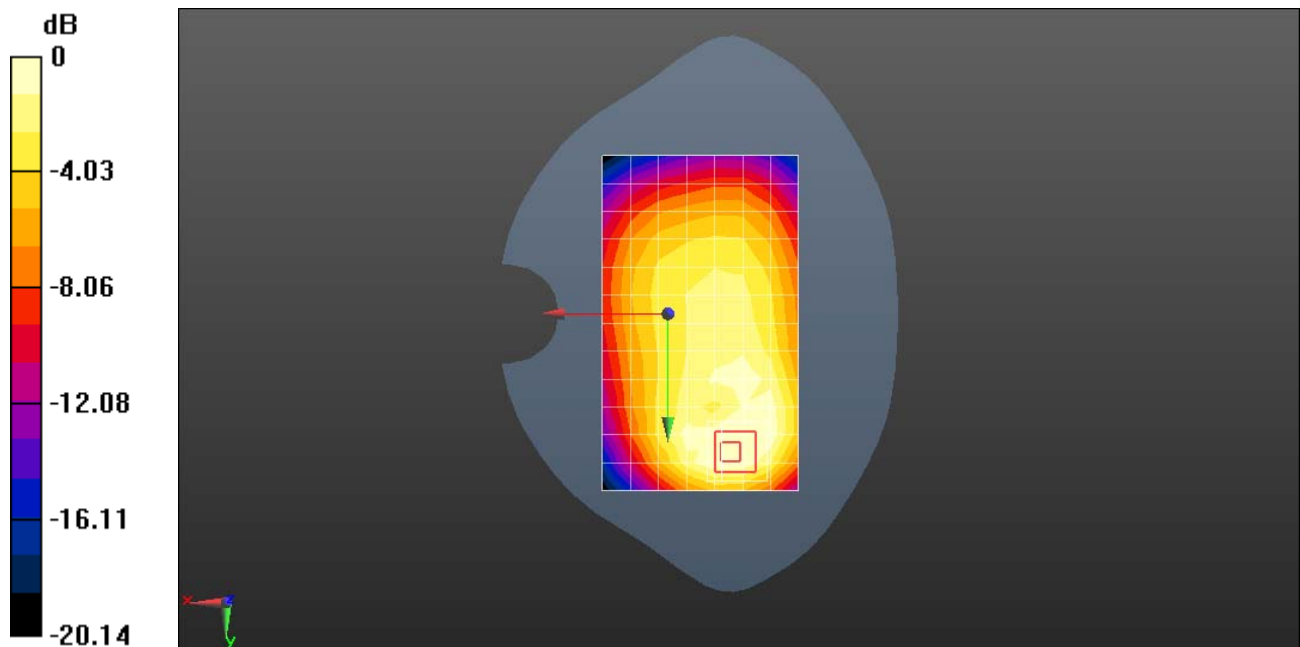

0 dB = 0.202 W/kg = -6.95 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band V 4182CH Back side 10mm with Battery 3-Second Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.593 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.261 W/kgInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.596 W/kg

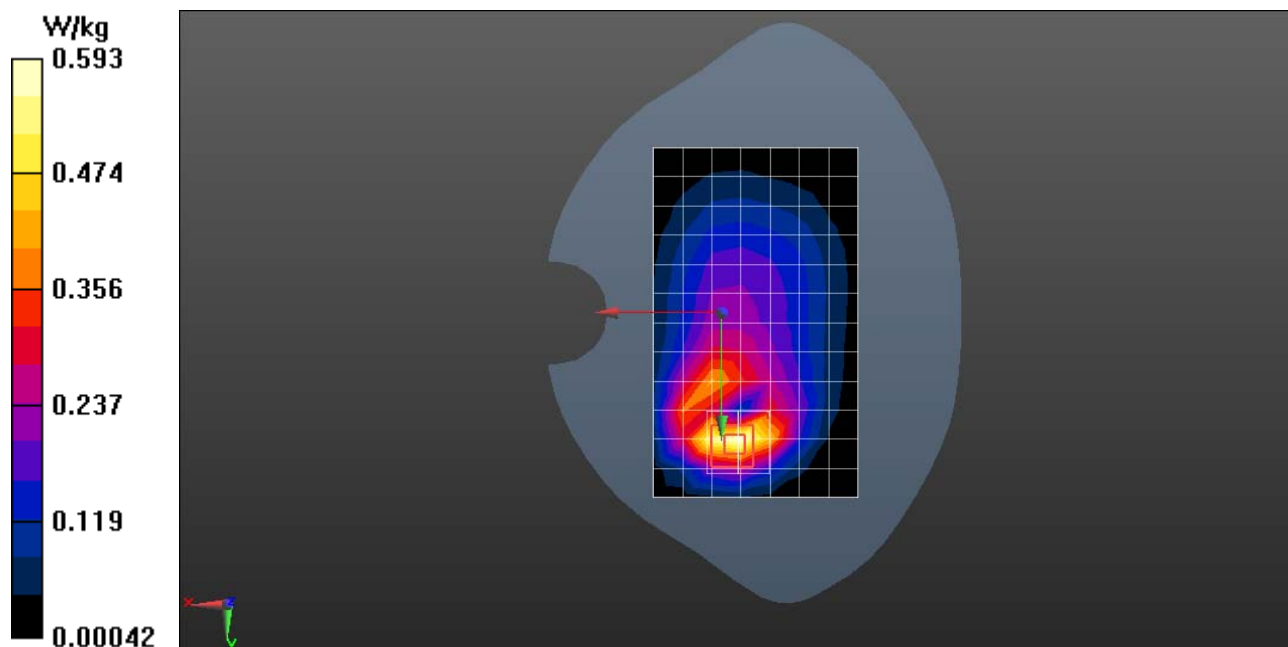

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band II QPSK 1RB 50 offset 18900CH Right hand touch cheek with SIM2 and Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 40.352$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.986 W/kg



Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.29 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.519 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

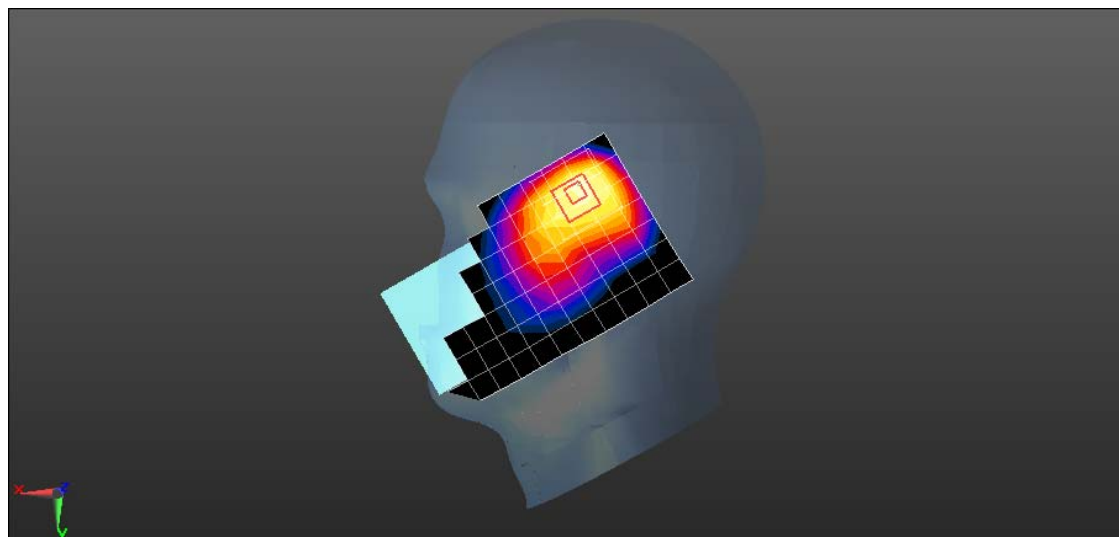

0 dB = 1.13 W/kg = 0.54 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band II 20M QPSK 1RB 50 offset 19100CH Back side 15mm with battery 2-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 51.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0877 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.593 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0921 W/kg

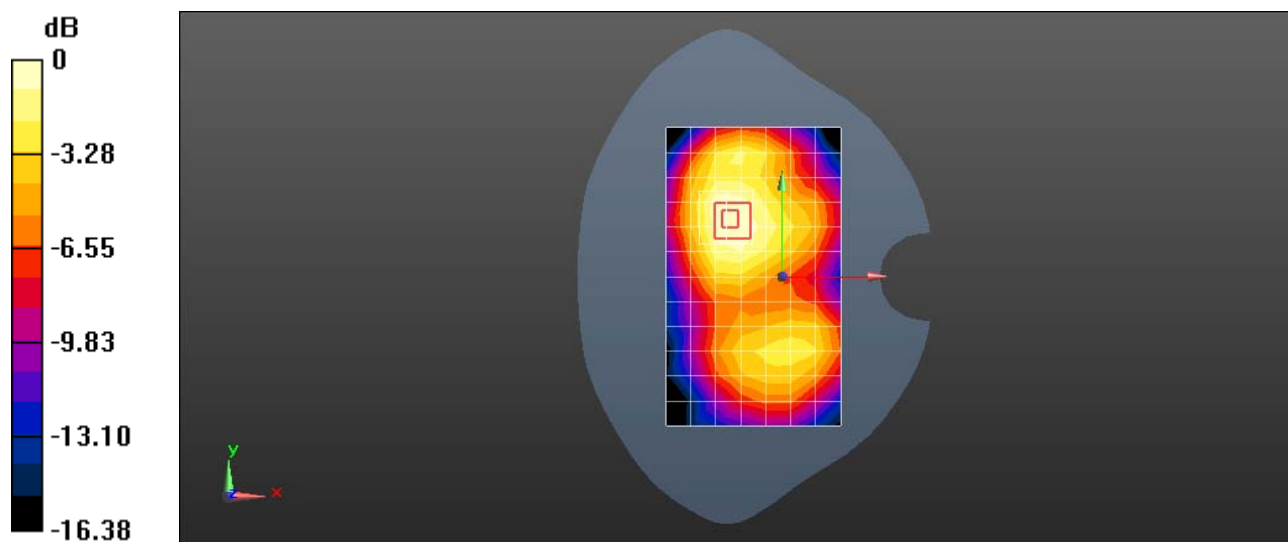

0 dB = 0.0921 W/kg = -10.36 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band II 20M QPSK 1RB 50 offset 19100CH Left side 10mm-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 52.861$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.192 W/kg



Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.024 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

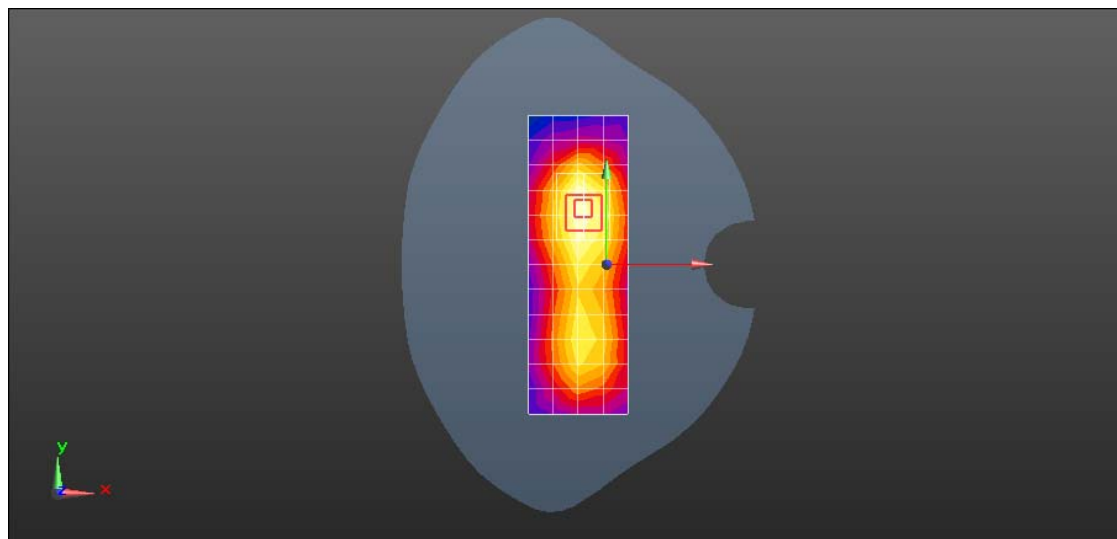

0 dB = 0.196 W/kg = -7.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band IV 20M QPSK 1RB 99 offset 20300CH Right hand touch cheek with SIM2 and Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.65$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.84, 7.84, 7.84); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.28 W/kg



Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.89 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.714 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

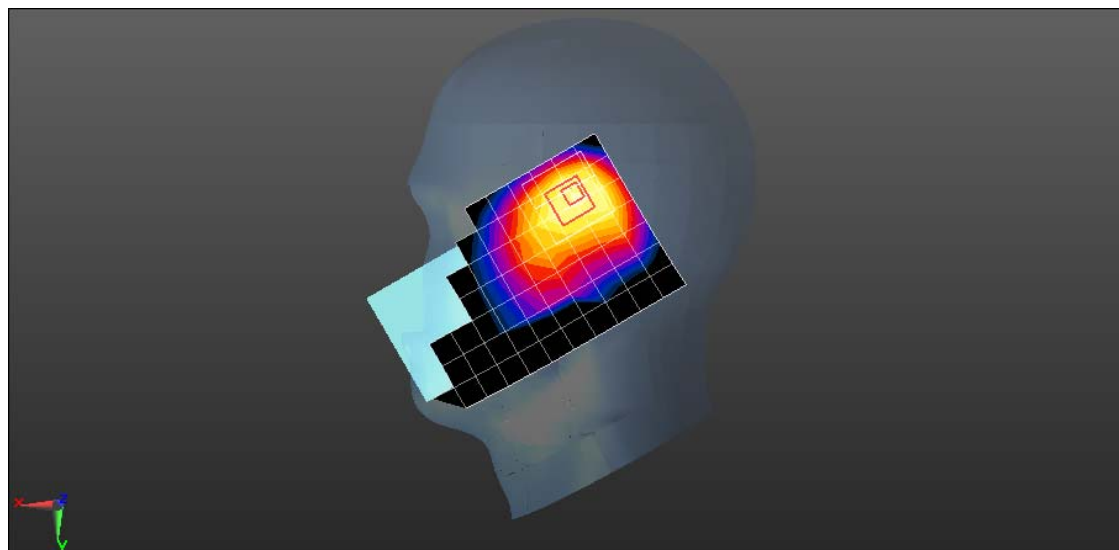

0 dB = 1.61 W/kg = 2.08 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Back side 15mm with Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 52.578$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.215 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.803 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

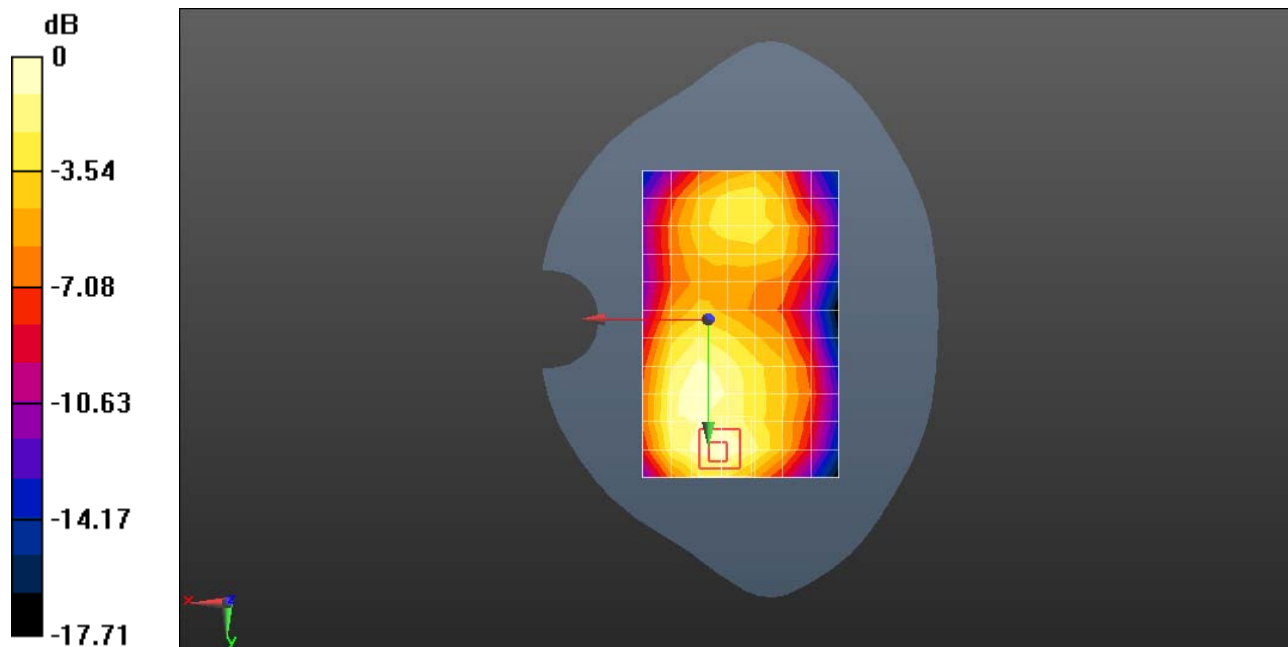

0 dB = 0.215 W/kg = -6.68 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Back side 10mm-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 52.578$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.607 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.407 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.622 W/kg

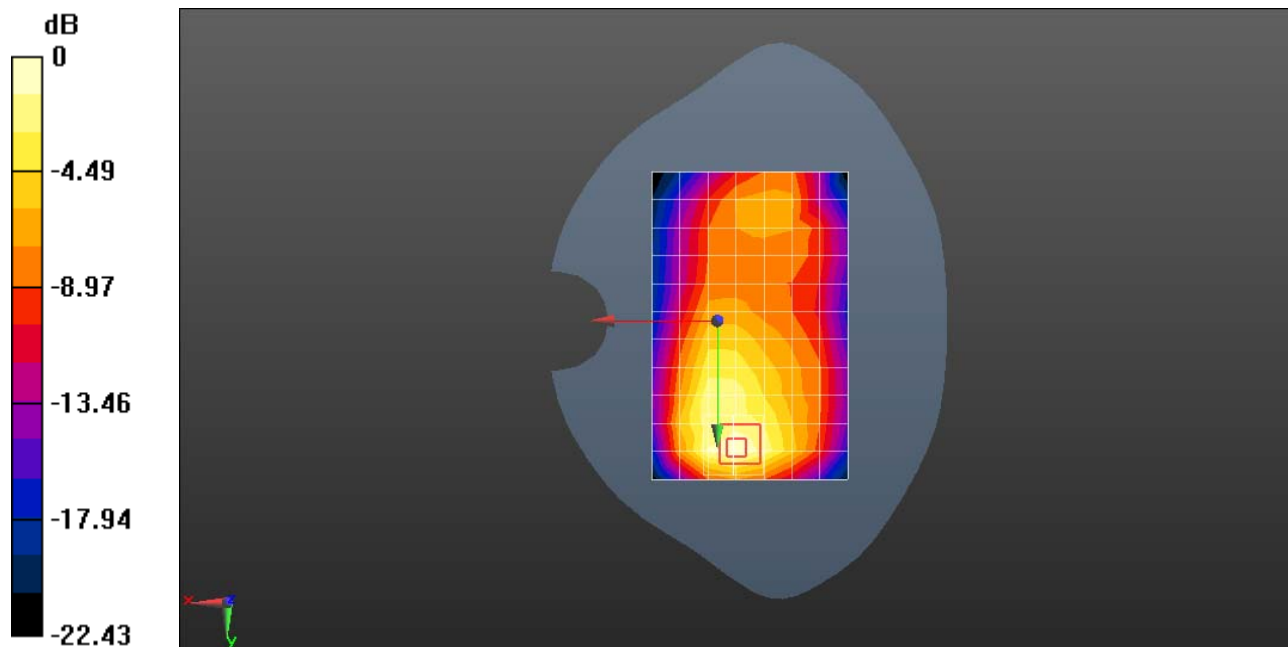

0 dB = 0.607 W/kg = -2.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Right hand touch cheek with SIM2-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.732$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.15 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.37 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.630 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

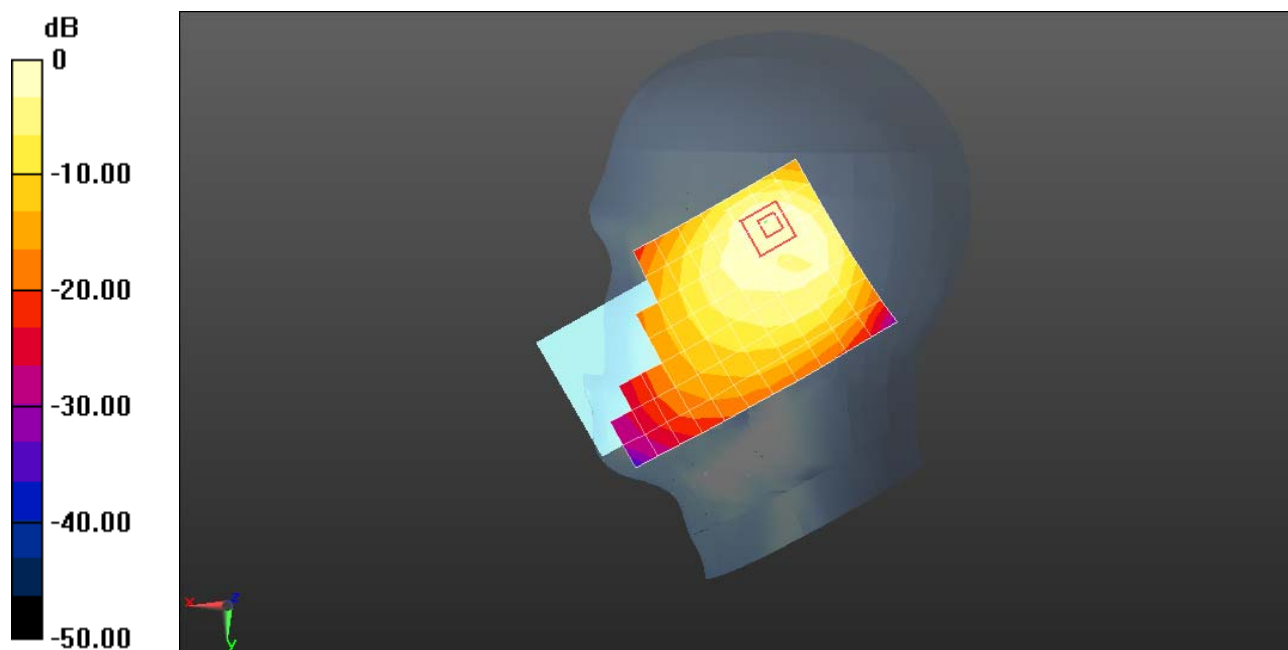

0 dB = 1.15 W/kg = 0.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band V 10M QPSK 25RB 13 offset 20600CH Back side 15mm with Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 53.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.207 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.57 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

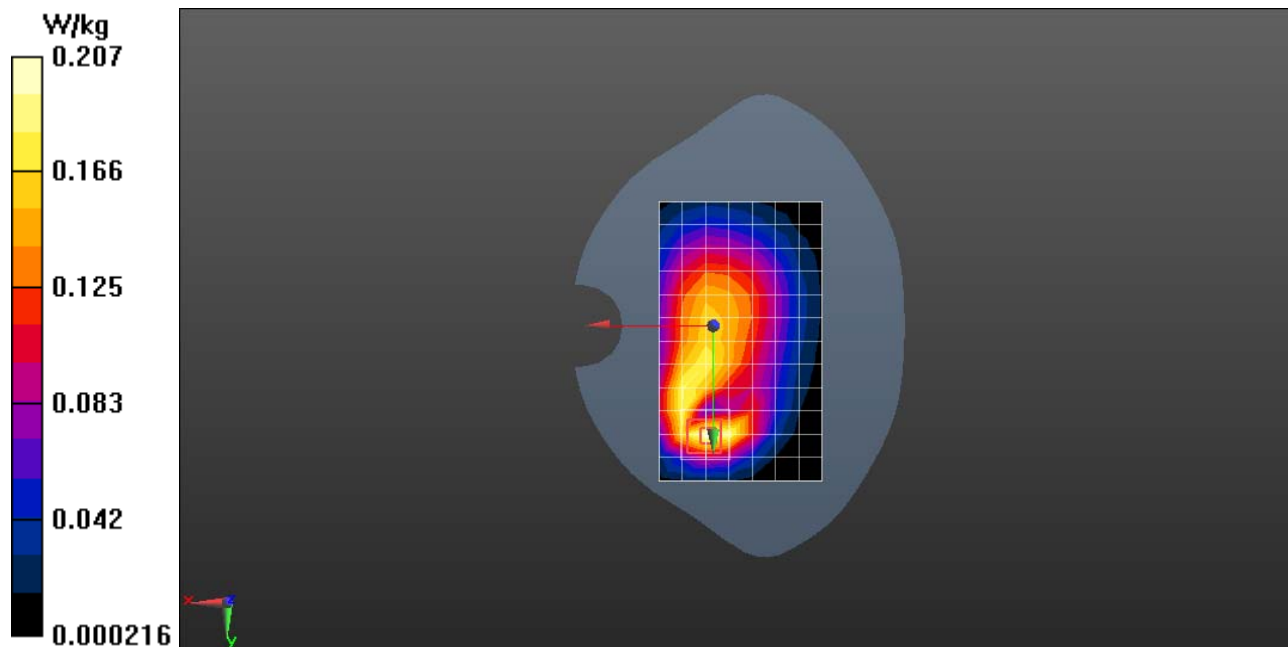

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band V 10M QPSK 25RB 13 offset 20600CH Back side 10mm with Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 53.874$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.367 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.45 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.423 W/kg

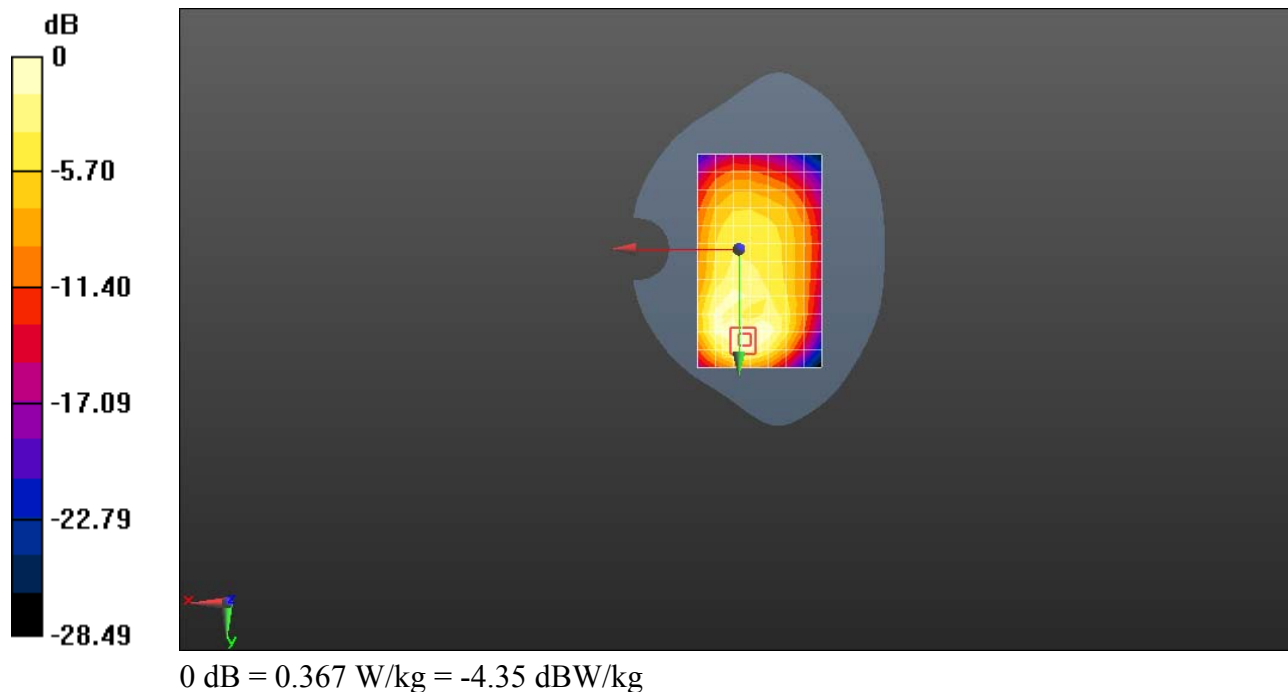

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band VII QPSK 1RB 50 offset 21350CH Right hand touch cheek with SIM2-Second Antenna-Repeated

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 38.705$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.68, 6.68, 6.68); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.37 W/kg


Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.201 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.544 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

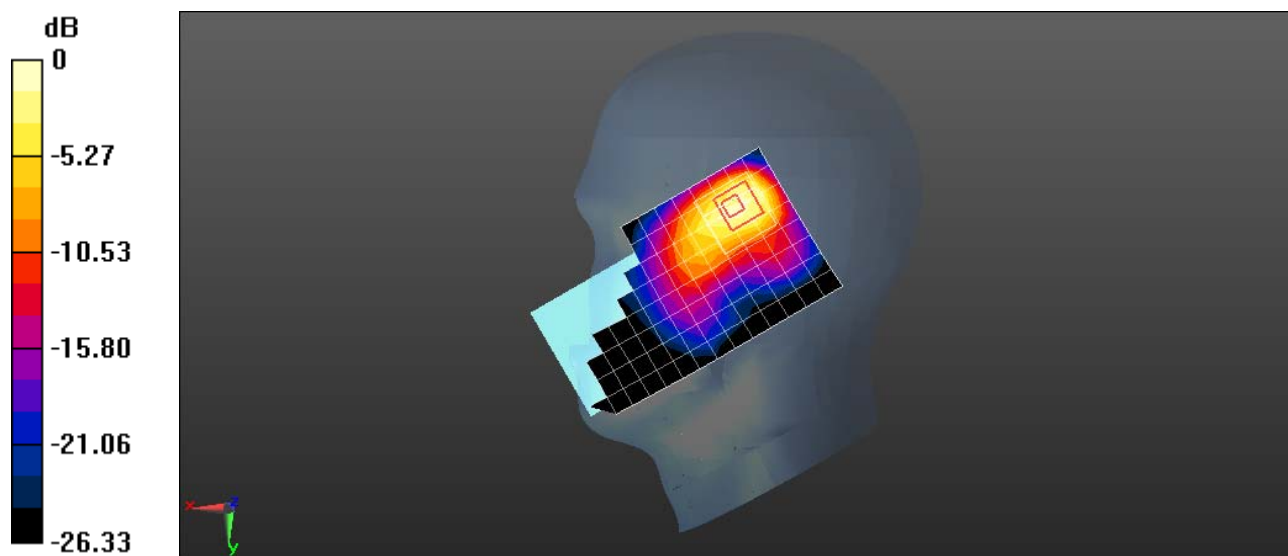

0 dB = 1.52 W/kg = 1.81 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band VII QPSK 1RB 50 offset 21350CH Front side 15mm-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.152$ S/m; $\epsilon_r = 51.078$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM4; Type: SAM; Serial: TP-1620

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.138 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.335 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

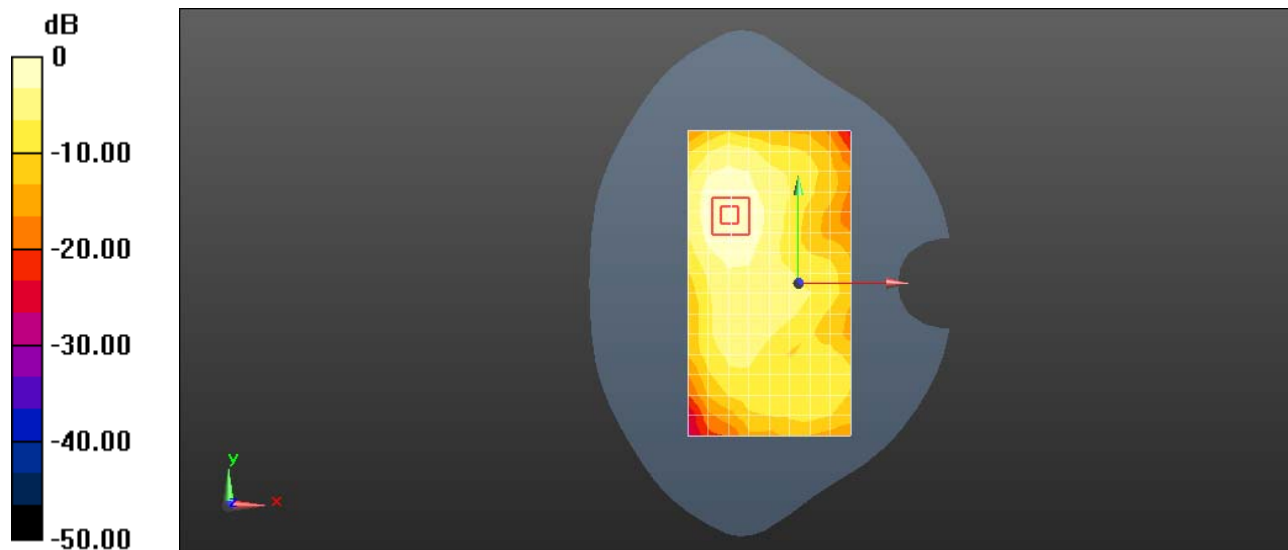

0 dB = 0.139 W/kg = -8.58 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band VII 20M QPSK 1RB 50 offset 21100CH Back side 10mm with SIM2-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.083$ S/m; $\epsilon_r = 51.276$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

- Electronics: DAE4 Sn852; Calibrated: 2015-4-27

- Phantom: SAM4; Type: SAM; Serial: TP-1620

- DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.523 W/kg



Configuration/Body/Zoom Scan (7x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.404 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.552 W/kg

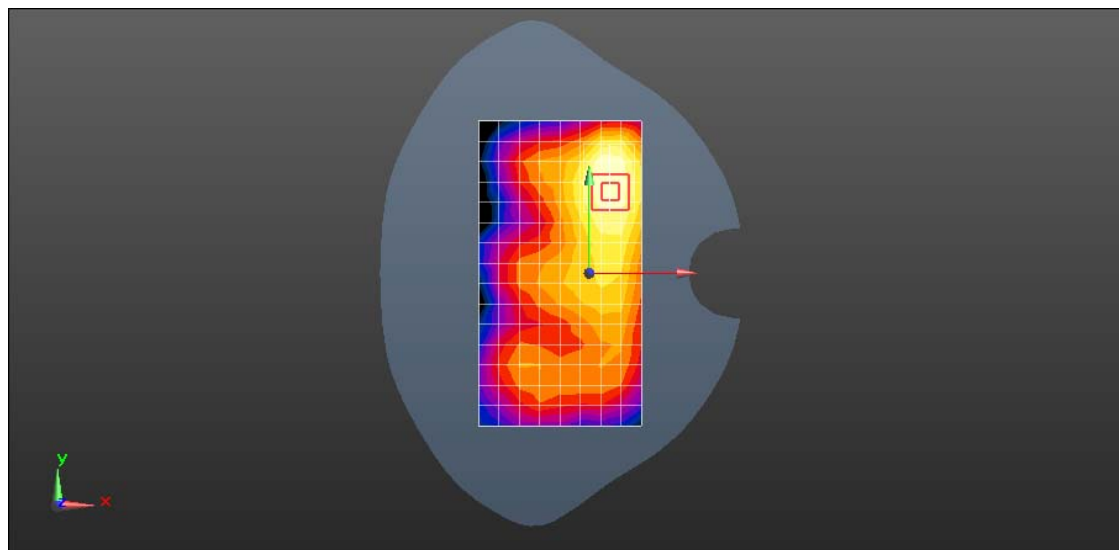

0 dB = 0.552 W/kg = -2.58 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Right hand touch cheek with Battery 3-Second Antenna-Repeated

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 42.864$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.52, 6.52, 6.52); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.34 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.61 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.619 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

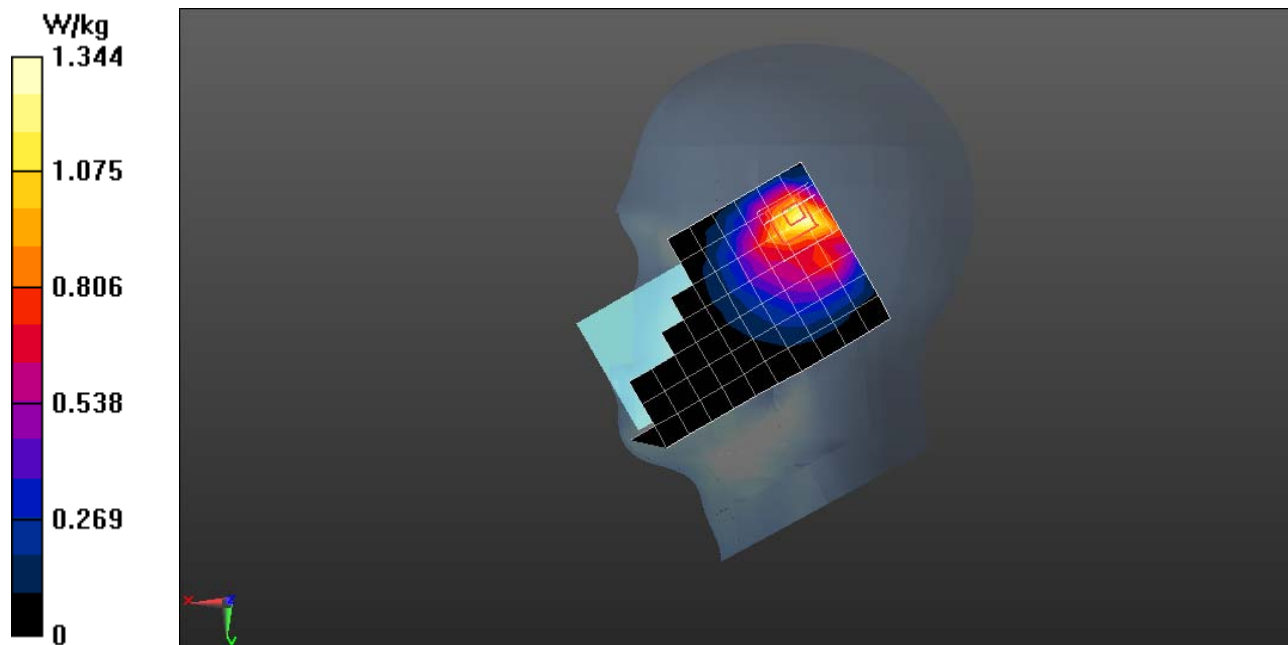

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XII 10M QPSK 1RB 49 offset 23060CH Back side 15mm with SIM2-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 54.353$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.169 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.797 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

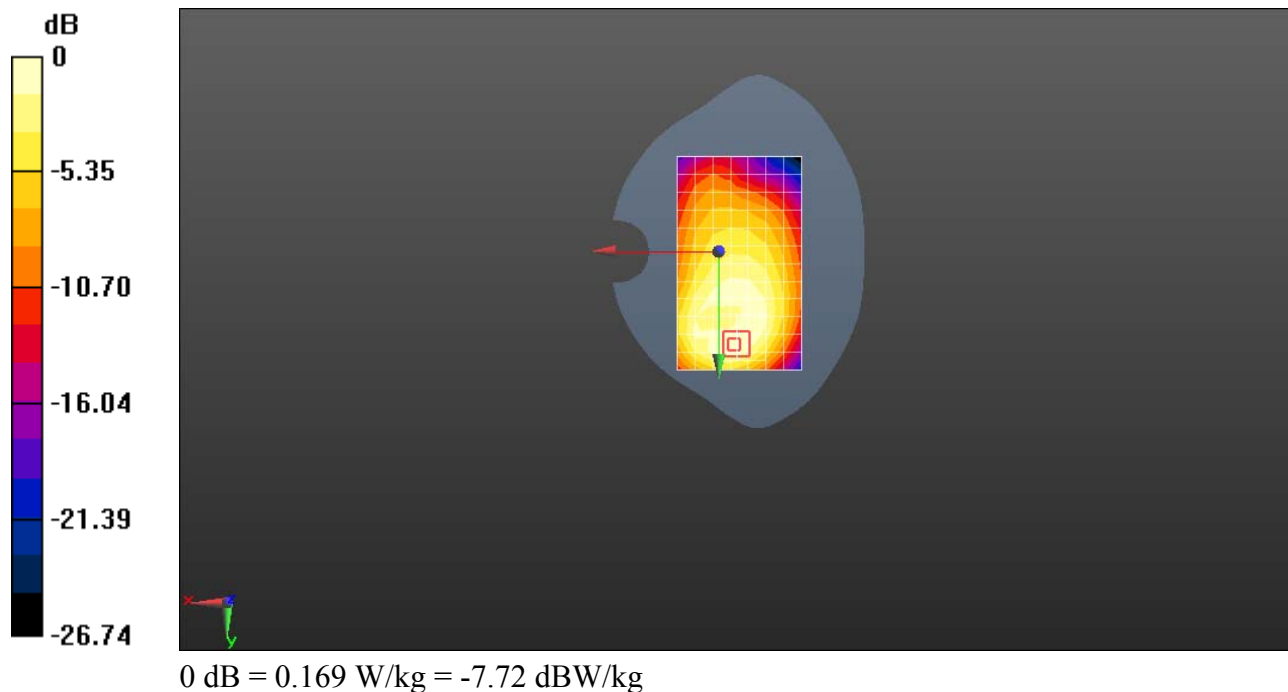

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XII 10M QPSK 1RB 49 offset 23060CH Back side 10mm-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 54.353$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20


Phantom: SAM1; Type: SAM; Serial: TP-1475

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.482 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

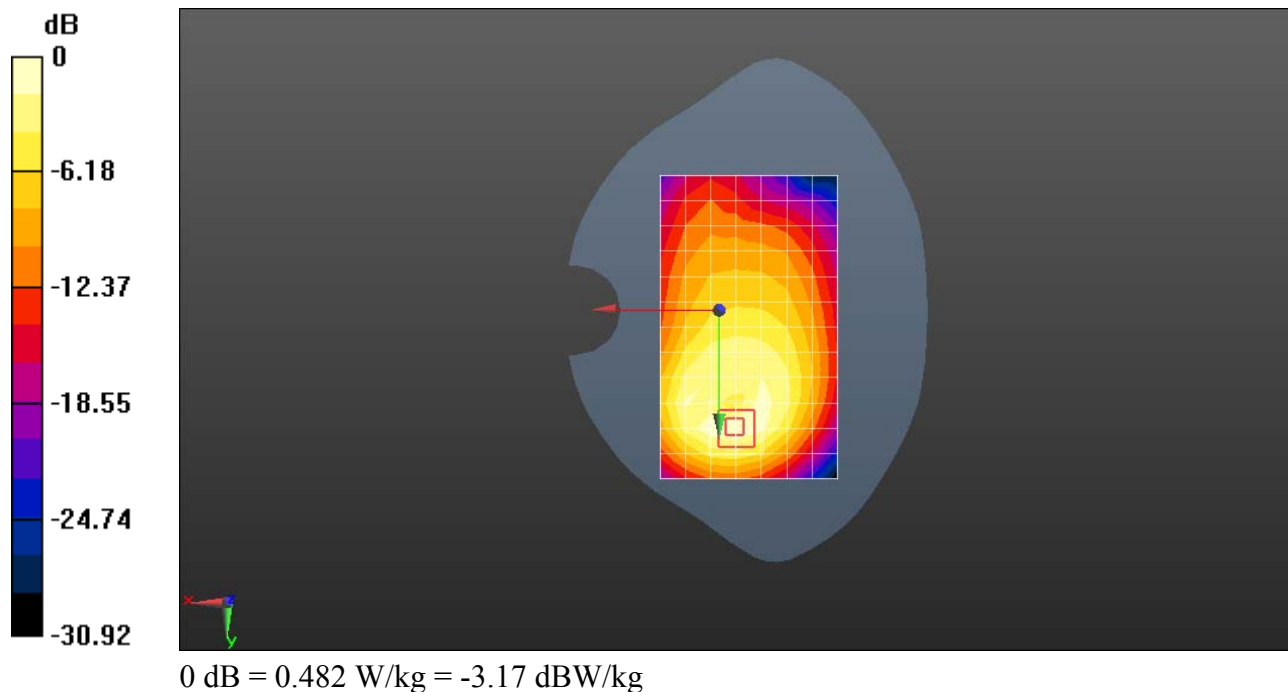Reference Value = 11.47 V/m ; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.722 W/kg SAR(1 g) = 0.395 W/kg ; SAR(10 g) = 0.221 W/kg Maximum value of SAR (measured) = 0.479 W/kg 

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23790CH Right hand touch cheek with Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.851$ S/m; $\epsilon_r = 42.875$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.52, 6.52, 6.52); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.20 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.44 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.570 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

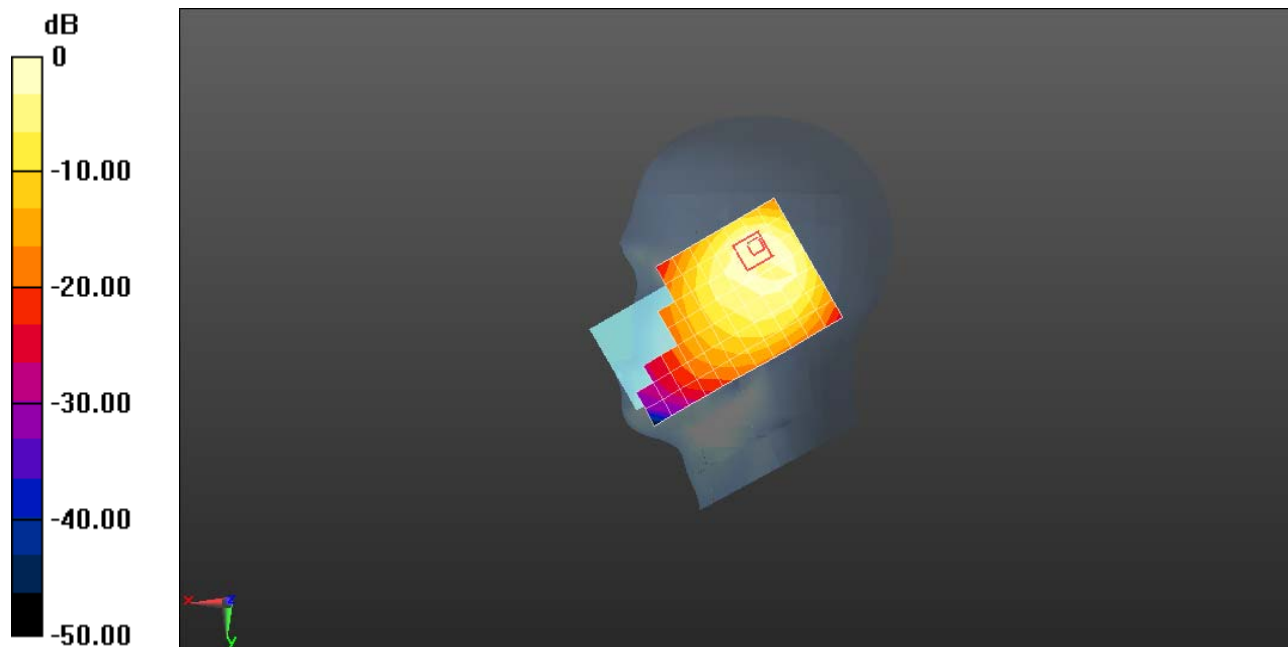

0 dB = 1.20 W/kg = 0.79 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23780CH Back side 15mm with Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 54.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.205 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.270 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

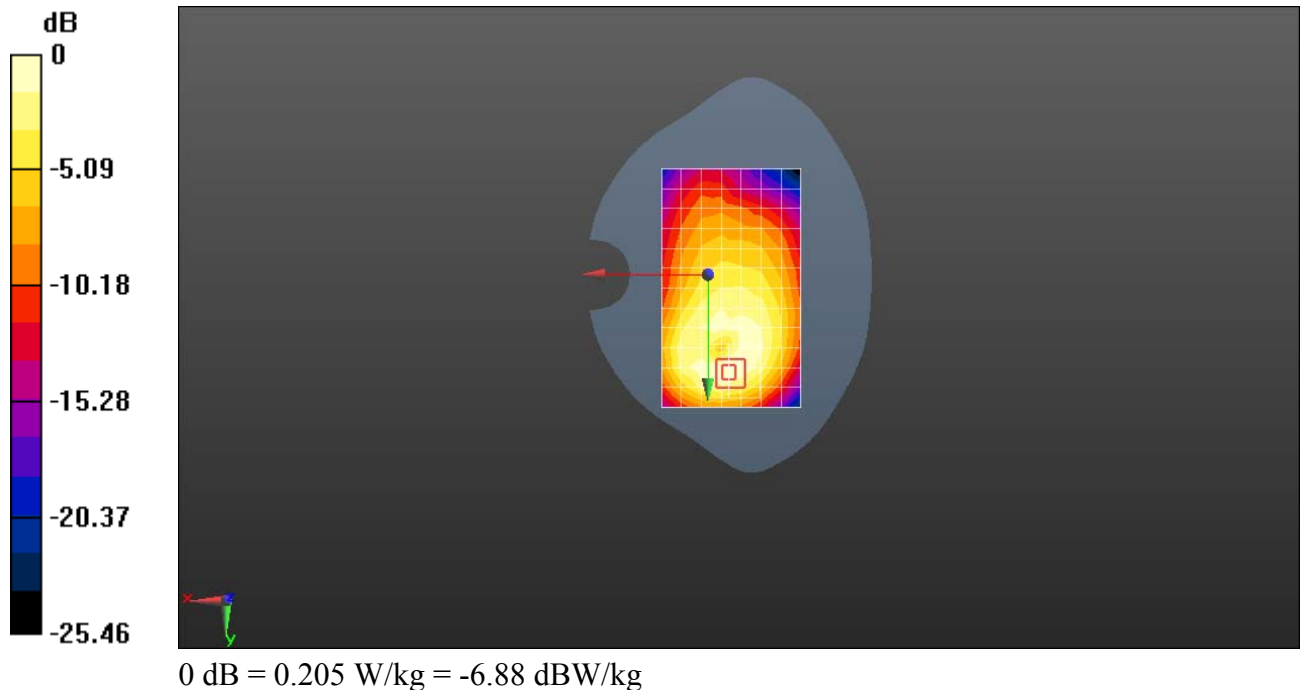

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23780CH Back side 10mm with SIM2-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 54.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.456 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.10 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

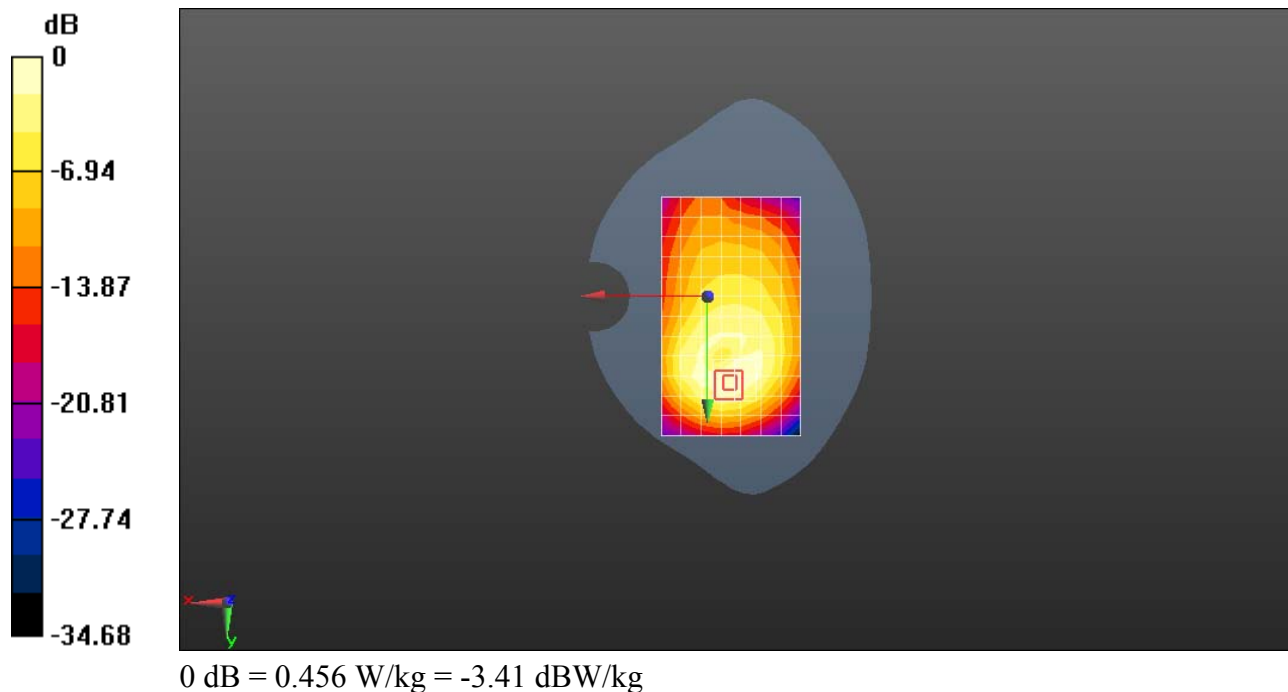

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26965CH Right hand touch cheek-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 40.725$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.83 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.533 W/kg

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 W/kg

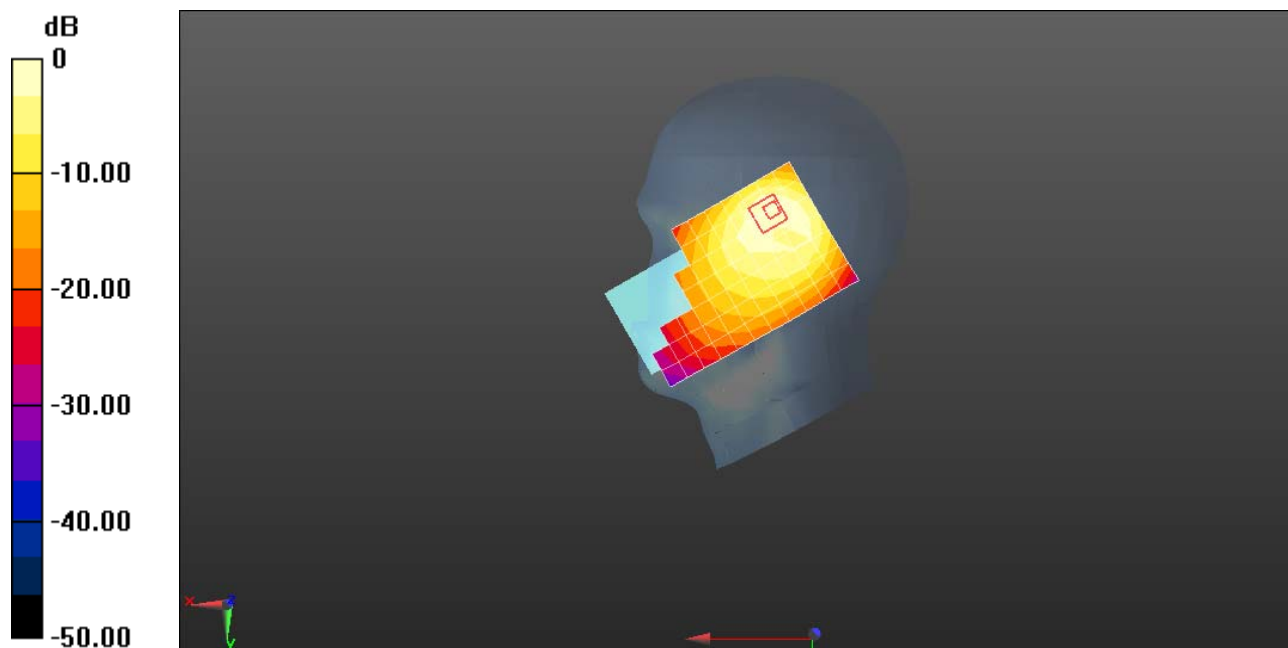

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26865CH Back side 15mm with Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 54.039$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.137 W/kg

Configuration/Body/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.10 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.092 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.138 W/kg

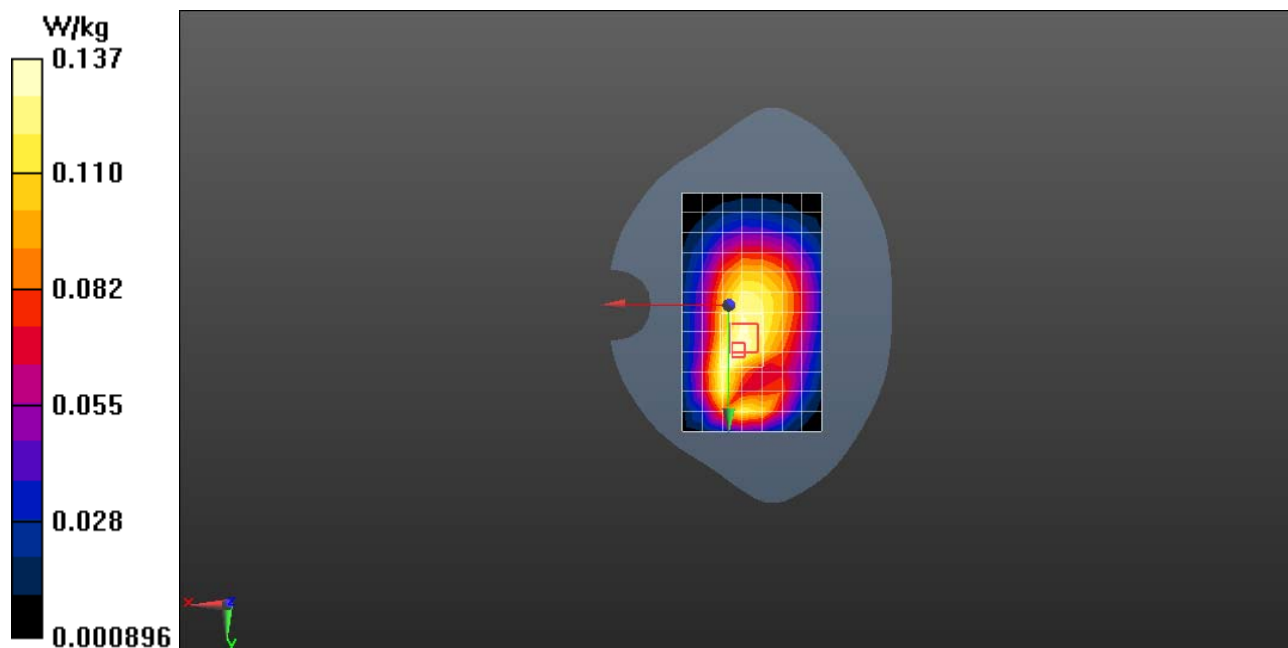

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26865CH Back side 10mm with Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 54.039$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.253 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.82 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.140 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.290 W/kg

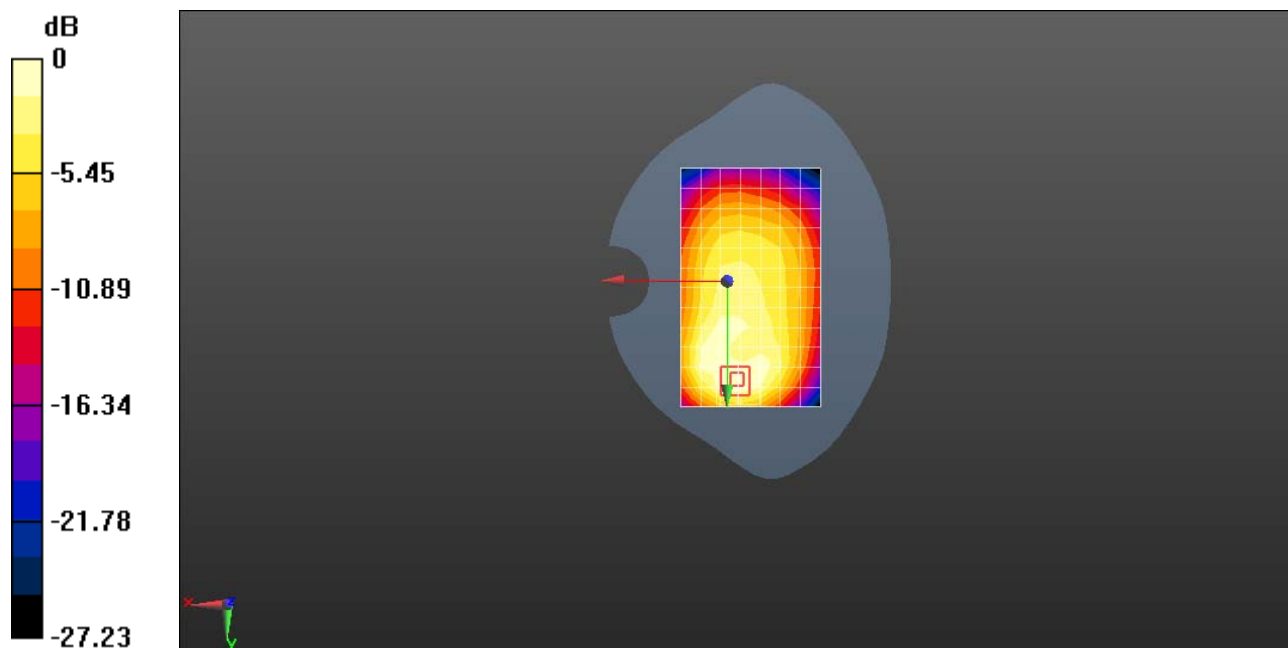

0 dB = 0.253 W/kg = -5.97 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXXVIII QPSK 1RB 50 offset 38000CH Right hand touch cheek with Battery 3-Second Antenna-Repeated-20160201

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.583$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.68, 6.68, 6.68); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.12 W/kg



Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.194 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

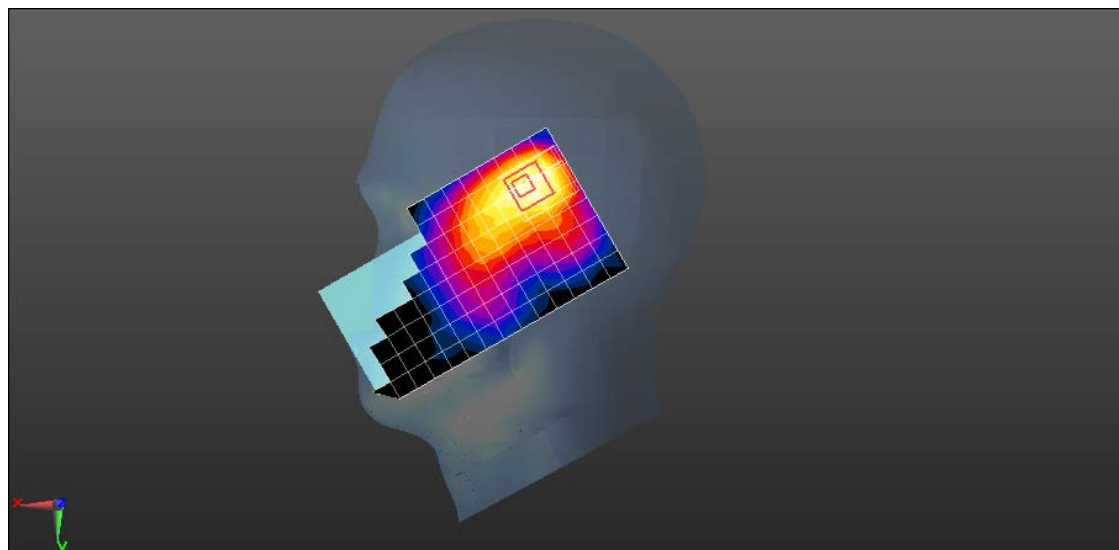

0 dB = 1.31 W/kg = 1.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXXVIII QPSK 1RB 50 offset 38000CH Back Side 15mm-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.197$ S/m; $\epsilon_r = 50.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.163 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.866 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

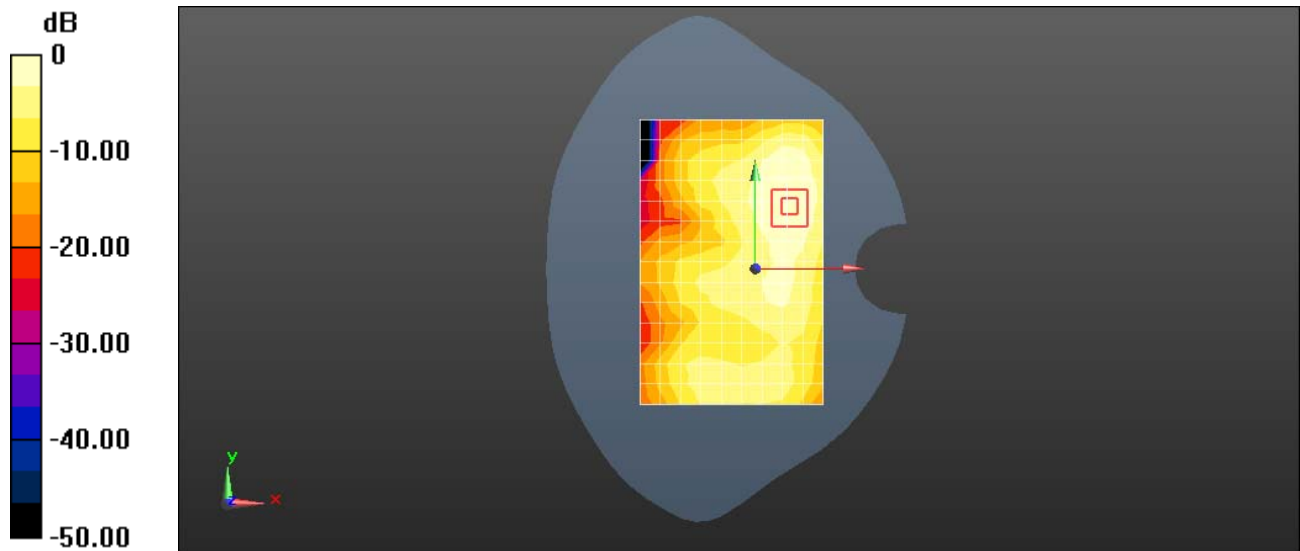

0 dB = 0.150 W/kg = -8.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXXVIII QPSK 1RB 50 offset 38000CH Left Side 10mm with Battery 2 -Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.197$ S/m; $\epsilon_r = 50.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (6x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.295 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.349 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

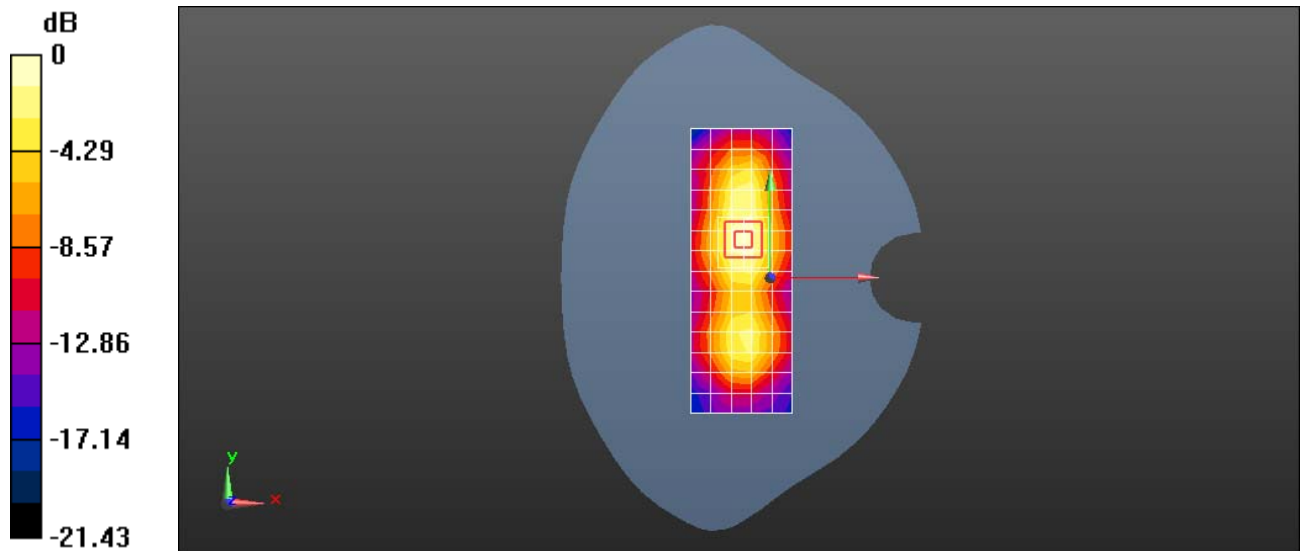

0 dB = 0.346 W/kg = -4.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Right hand touch cheek with SIM2 and Battery 3-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2565$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 37.545$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.68, 6.68, 6.68); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.09 W/kg



Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.758 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.491 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

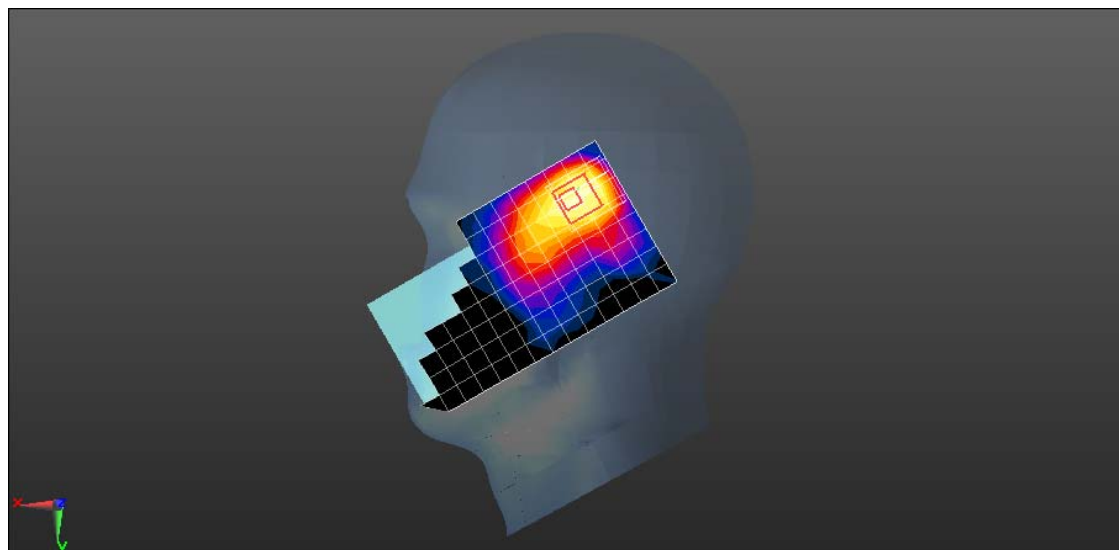

0 dB = 1.34 W/kg = 1.27 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Back Side 15mm-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 51.131$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.112 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.357 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

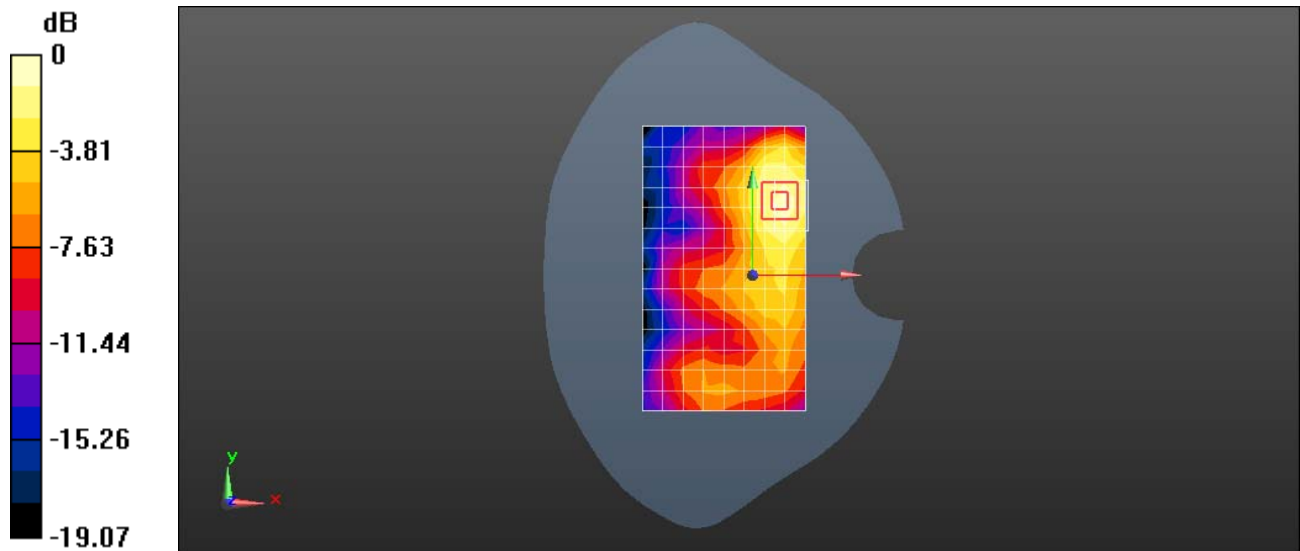

0 dB = 0.122 W/kg = -9.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 41140CH Left Side 10mm with Battery 2-Second Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.231$ S/m; $\epsilon_r = 50.855$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM4; Type: SAM; Serial: TP-1620

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (6x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.275 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.410 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

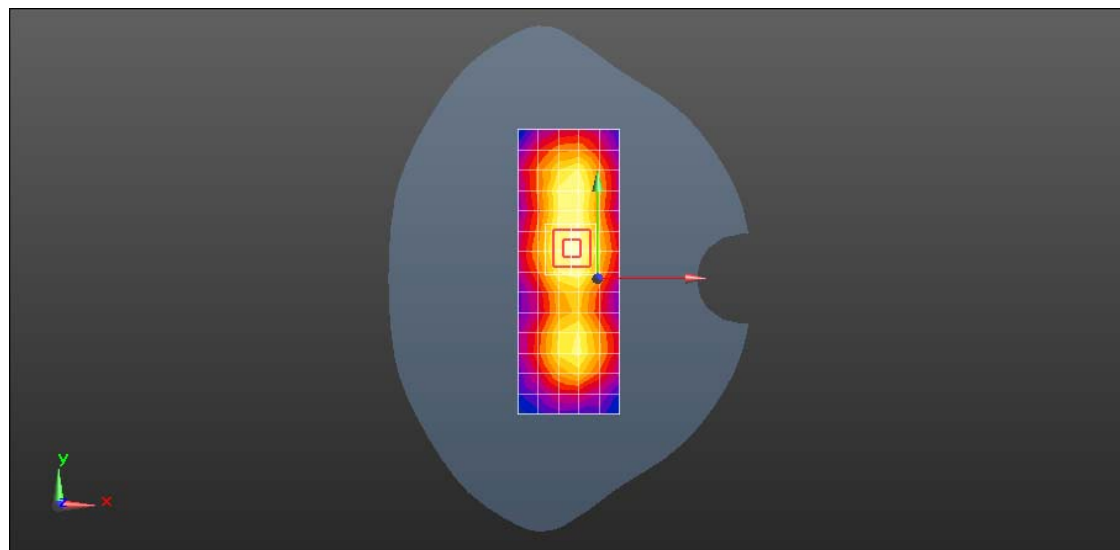

0 dB = 0.295 W/kg = -5.30 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 251CH Right hand touch cheek with Battery 3-Main modem Main antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 42.524$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM1; Type: SAM; Serial: TP-1475

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.356 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.144 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 0.372 W/kg

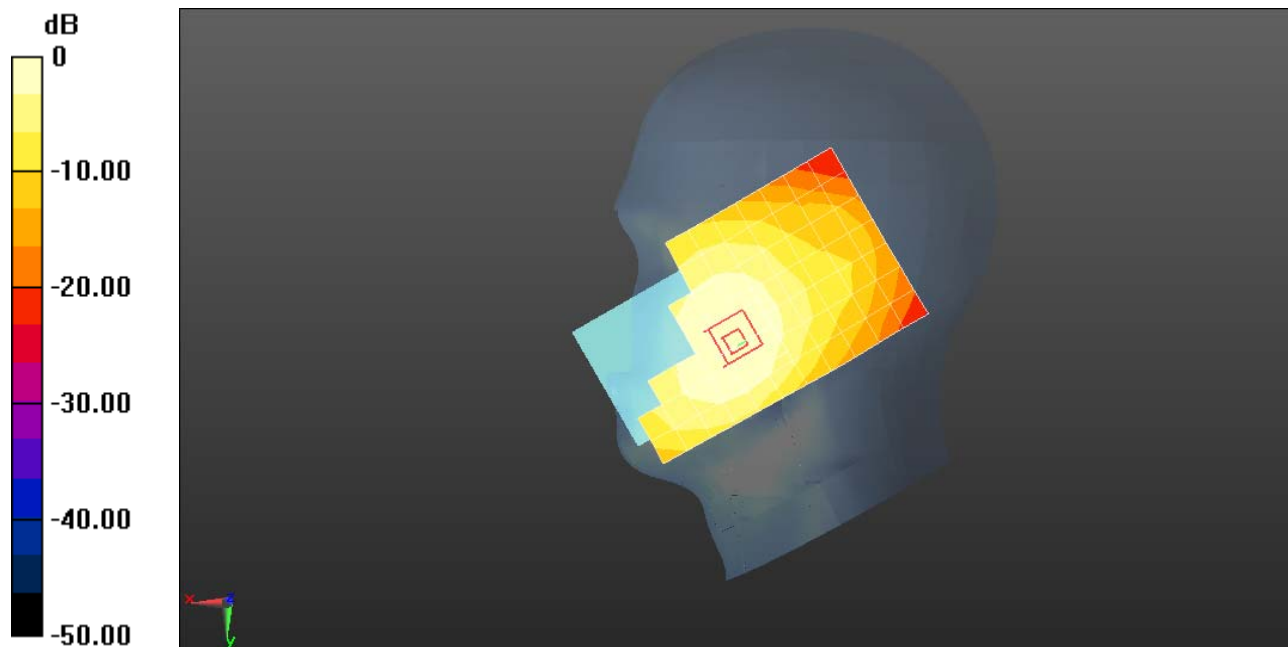

0 dB = 0.356 W/kg = -4.49 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM 850 190CH Back side 15mm-Main Modem Main Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.237 W/kg



Configuration/Body/Zoom Scan (5x7x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.89 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

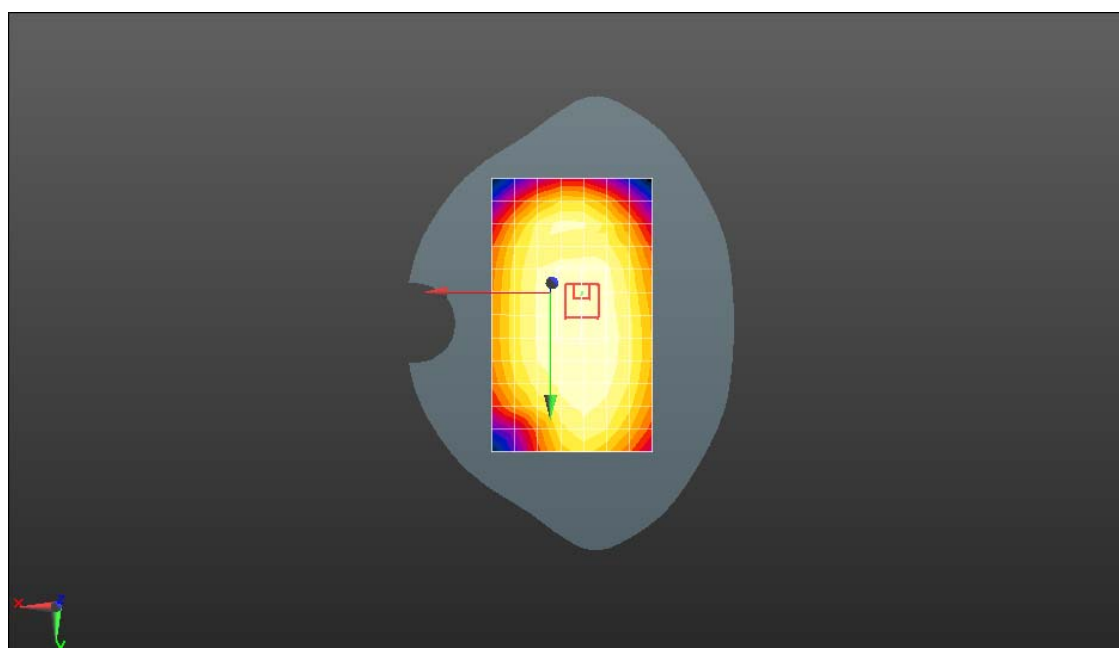

0 dB = 0.237 W/kg = -6.25 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM 850 GPRS 2TS 190CH Right side 10mm with Battery 2-Main Modem Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.400 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.07 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

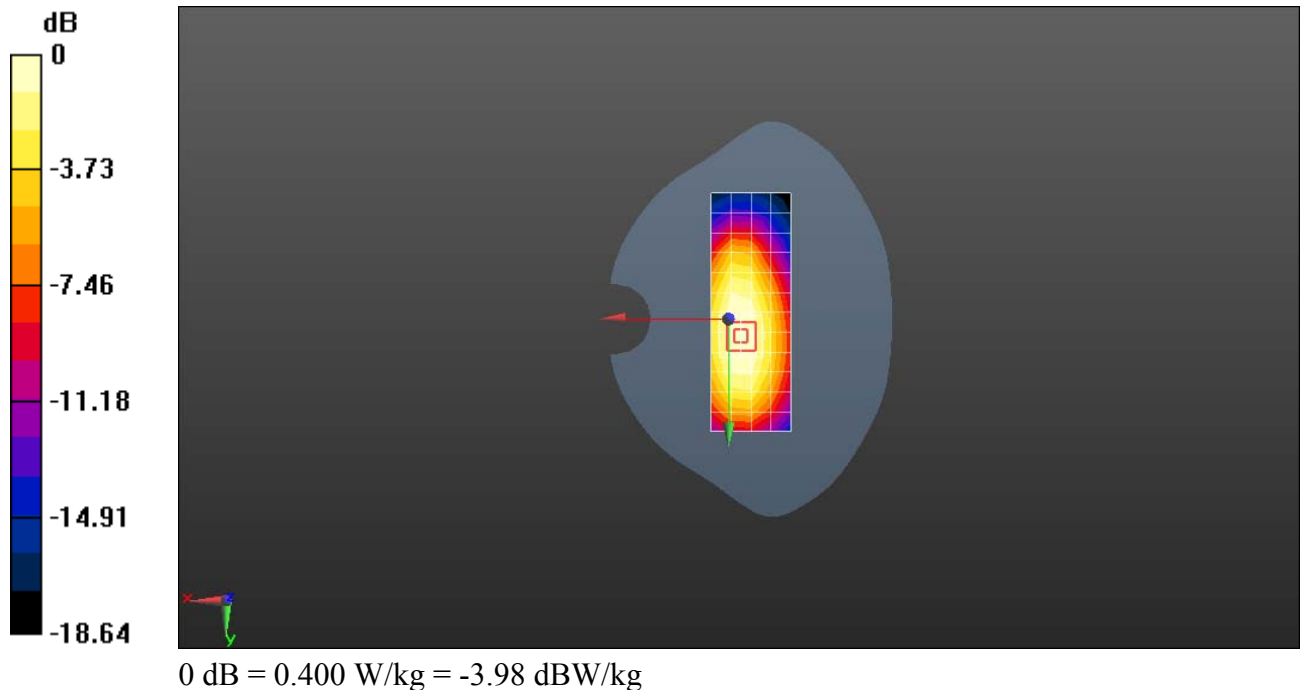

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 251CH Right hand touch cheek-Second Modem Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 42.524$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.294 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.720 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

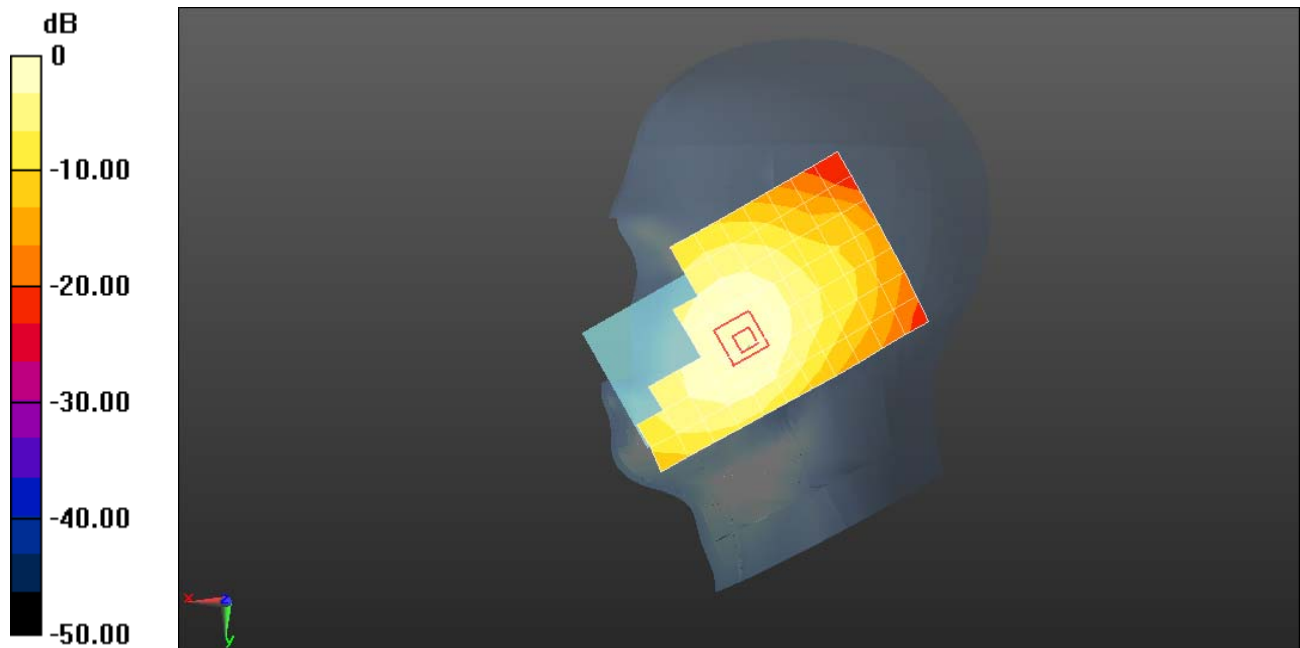

0 dB = 0.294 W/kg = -5.32 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 190CH Back side 15mm-Second Modem Main Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);


Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.310 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.13 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.355 W/kg

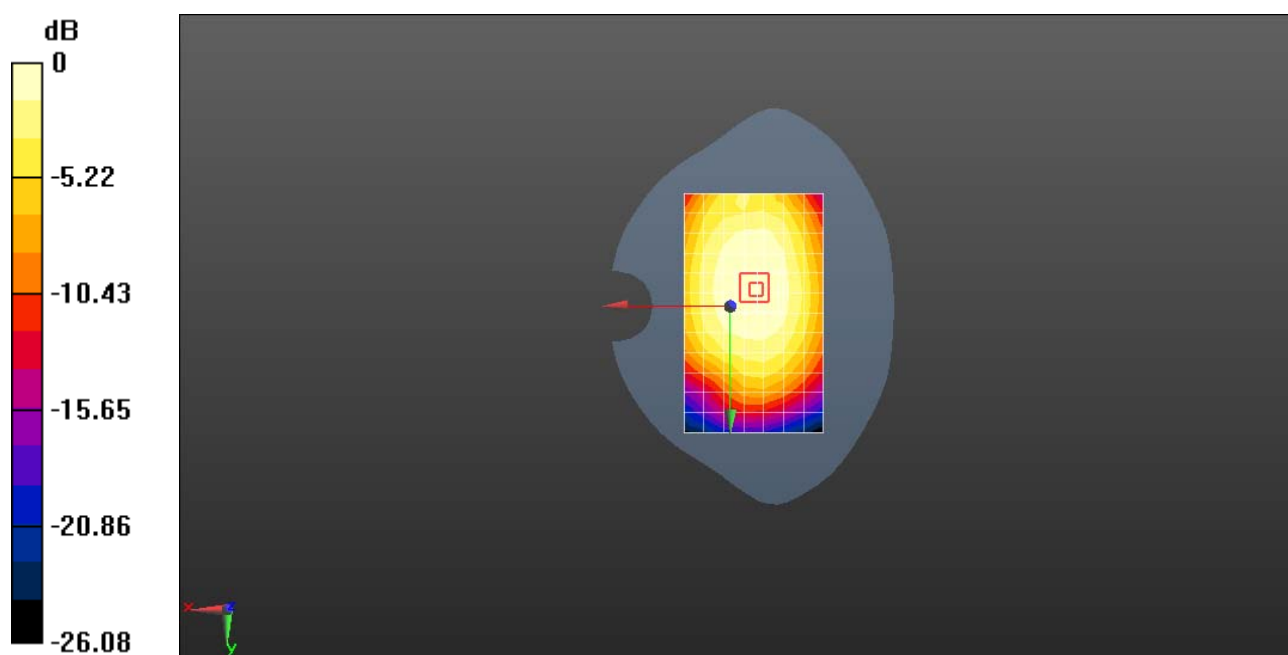SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.217 W/kg

0 dB = 0.310 W/kg = -5.09 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM850 GPRS 2TS 190CH Left side 10mm with Battery 2-Second Modem Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 1.003$ S/m; $\epsilon_r = 54.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM2; Type: SAM; Serial: TP:1474

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.379 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.79 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.505 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.413 W/kg

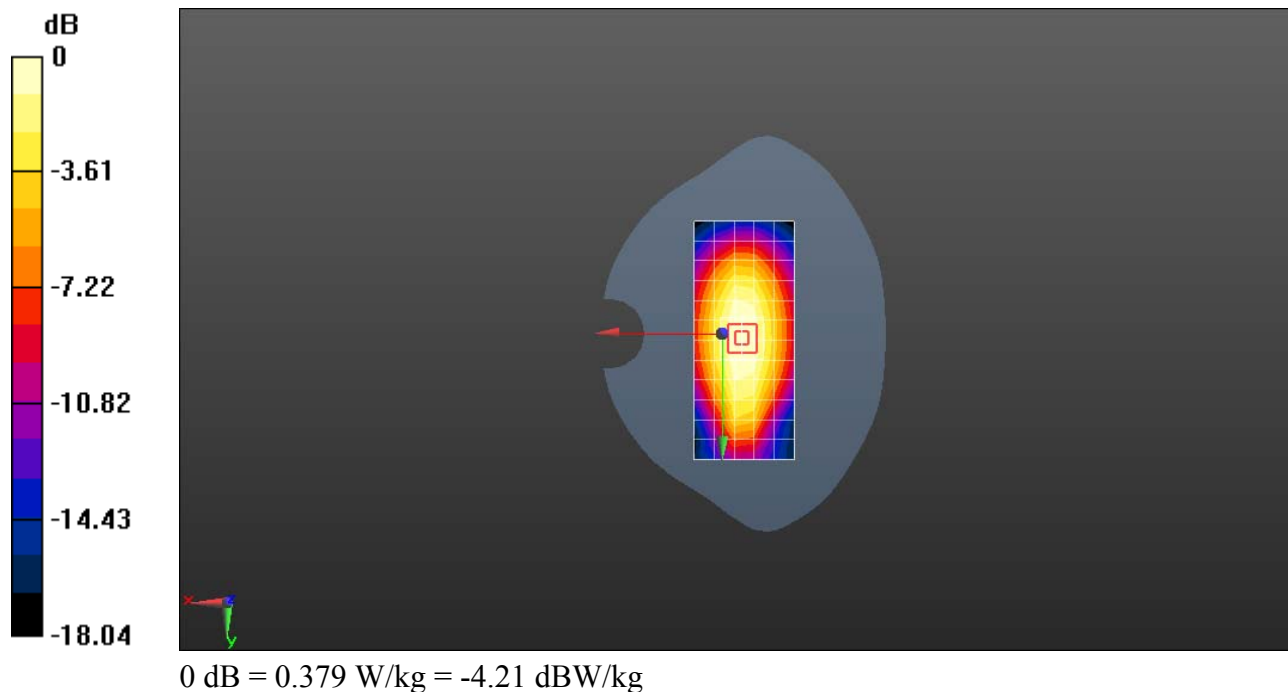

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661CH Right hand touch cheek with Battery 3-Main Modem Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 40.352$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM4; Type: SAM; Serial: TP-1620

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.524 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.963 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

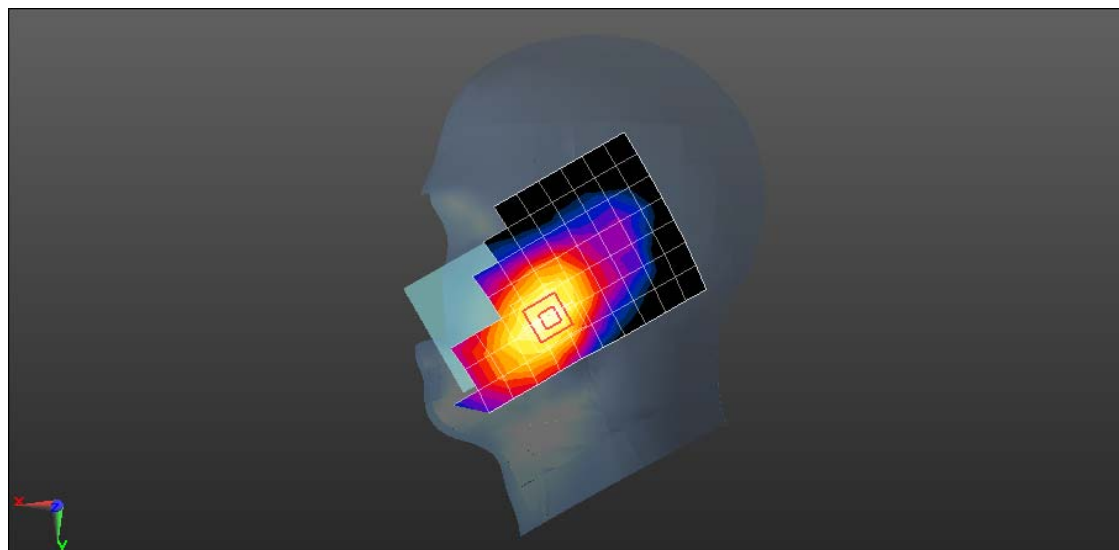

0 dB = 0.569 W/kg = -2.45 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661H Back side 15mm with battery 3-Main Modem Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ S/m; $\epsilon_r = 52.925$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM4; Type: SAM; Serial: TP-1620

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.394 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.369 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.444 W/kg

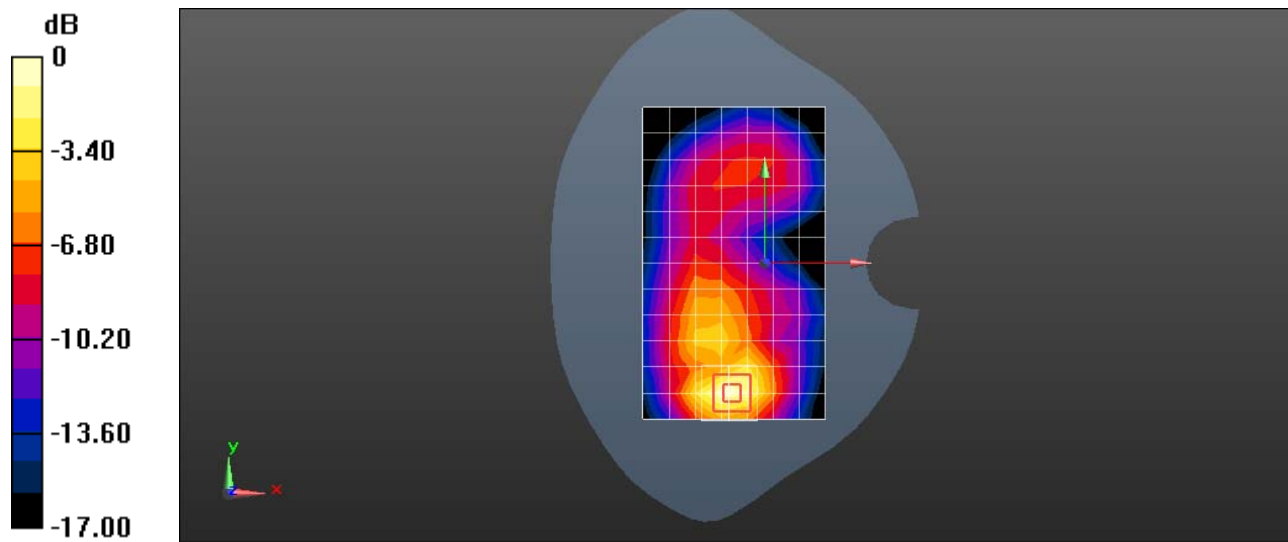

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 810H Back side 10mm with battery 3 -Main Modem Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.845$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.24 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.479 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

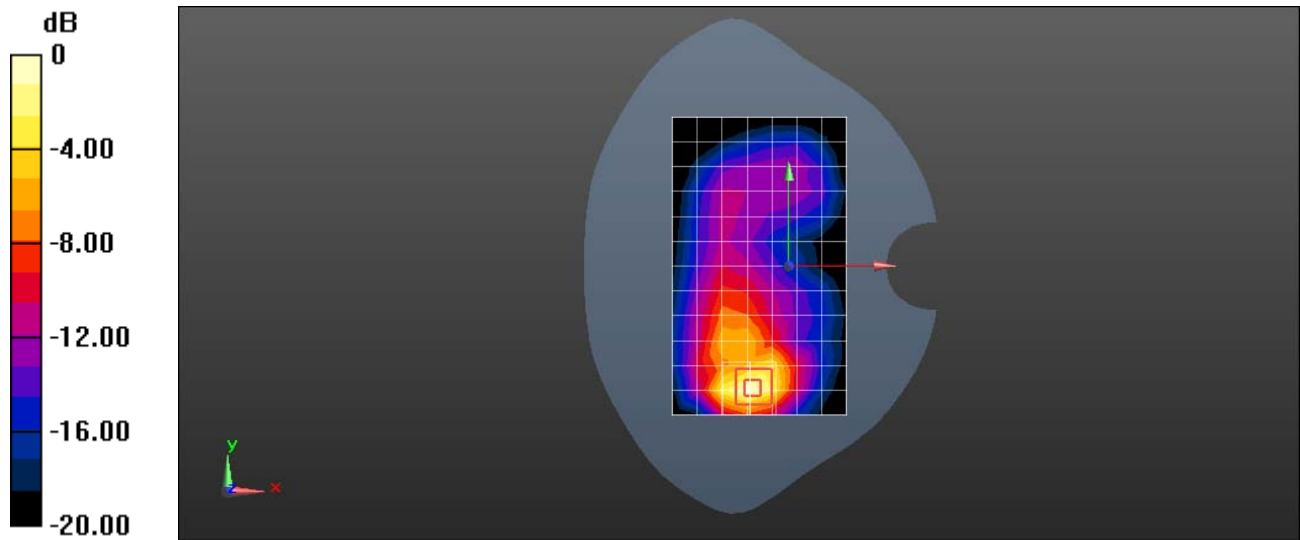

0 dB = 1.27 W/kg = 1.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 810CH Left hand touch cheek with Battery 2-Second Modem Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.302$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.132 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.141 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

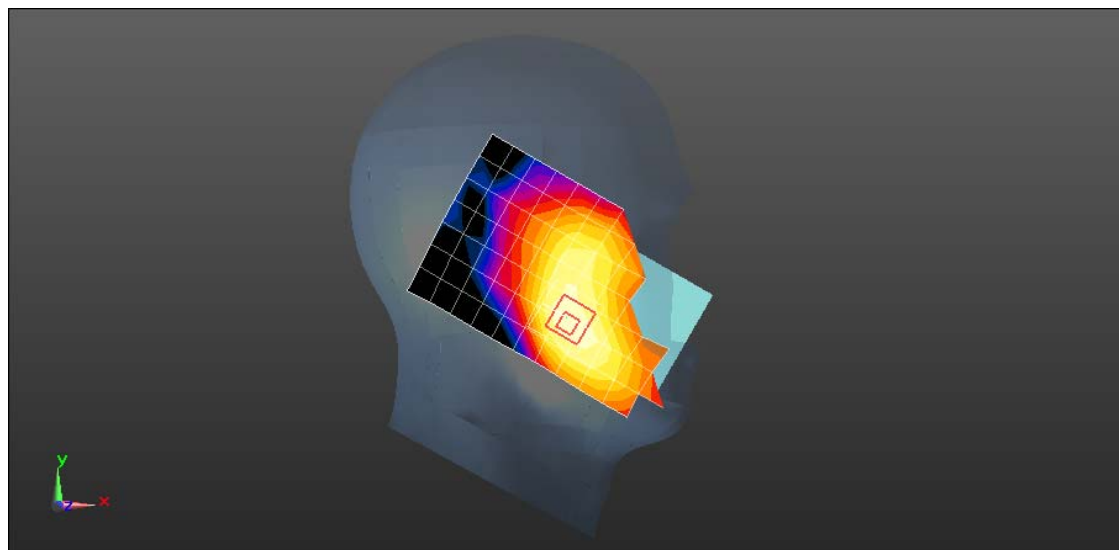

0 dB = 0.139 W/kg = -8.58 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661CH Back Side 15mm with Battery 2-Second Modem Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 51.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0988 W/kg



Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.383 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

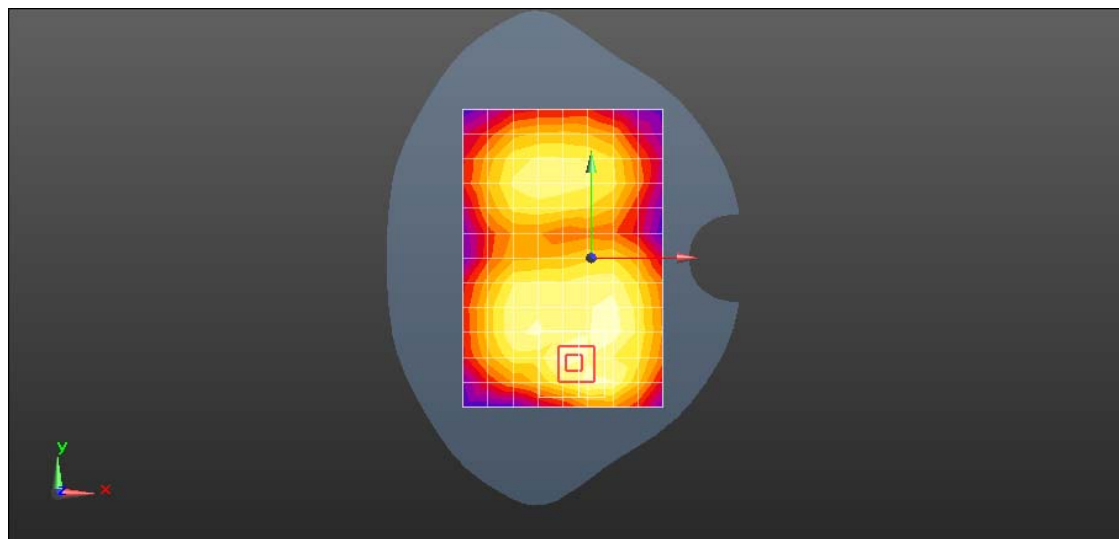

0 dB = 0.109 W/kg = -9.63 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 GSM1900 GPRS 2TS 661CH Back Side 10mm with Battery 2-Second Modem Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 51.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.350 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.494 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

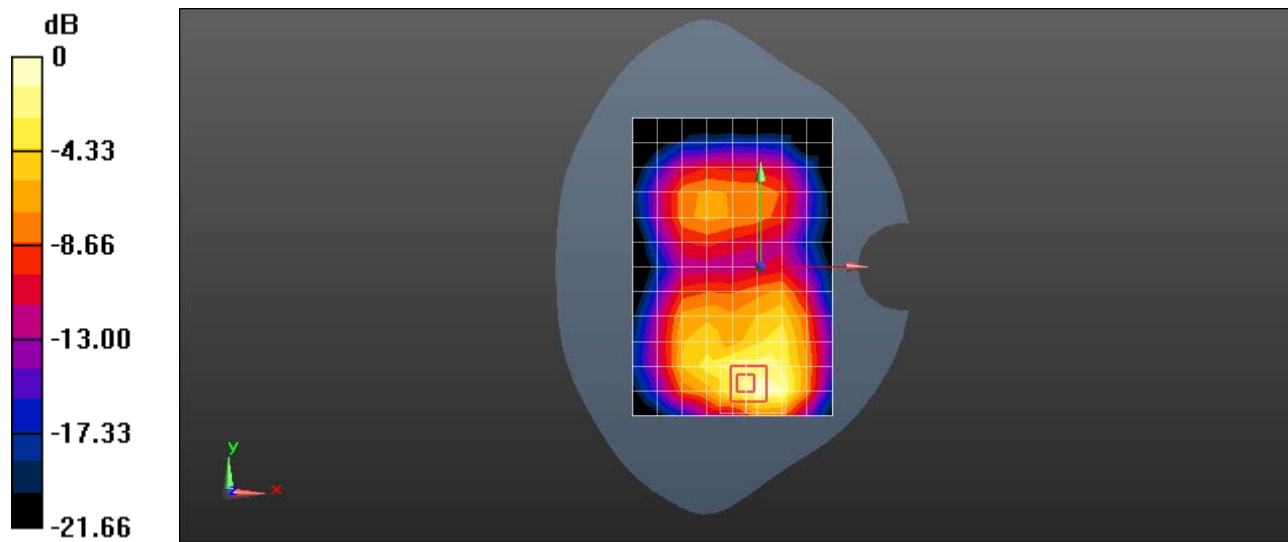

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band II 9400CH Right hand touch cheek with SIM2-Main Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 40.352$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ⌄ Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;
- ⌄ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ⌄ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ⌄ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ⌄ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.741 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.646 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 0.785 W/kg

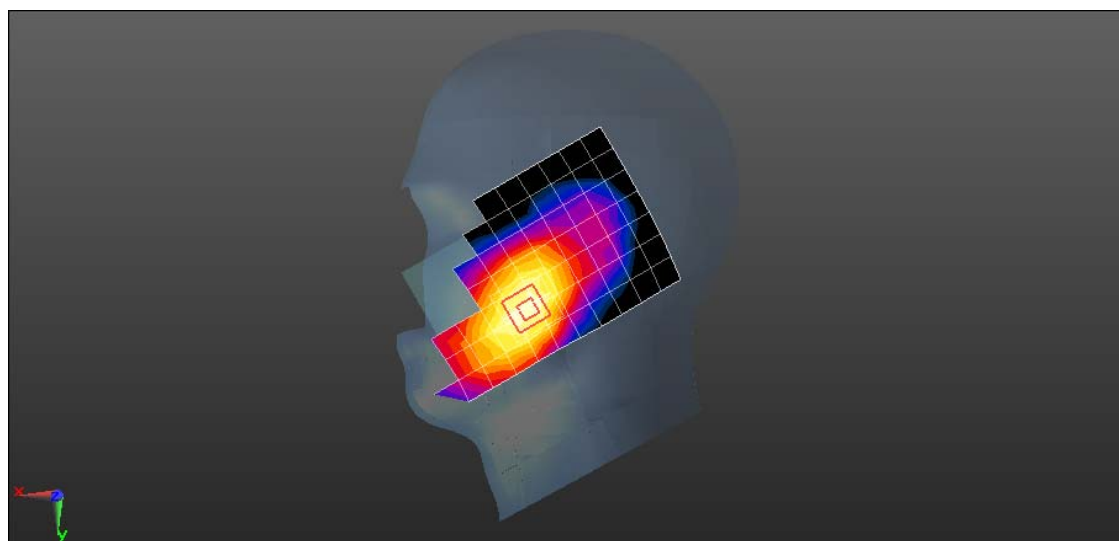

0 dB = 0.785 W/kg = -1.05 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band II 9400CH Back side 15mm with battery 3-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.621 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.410 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 0.706 W/kg

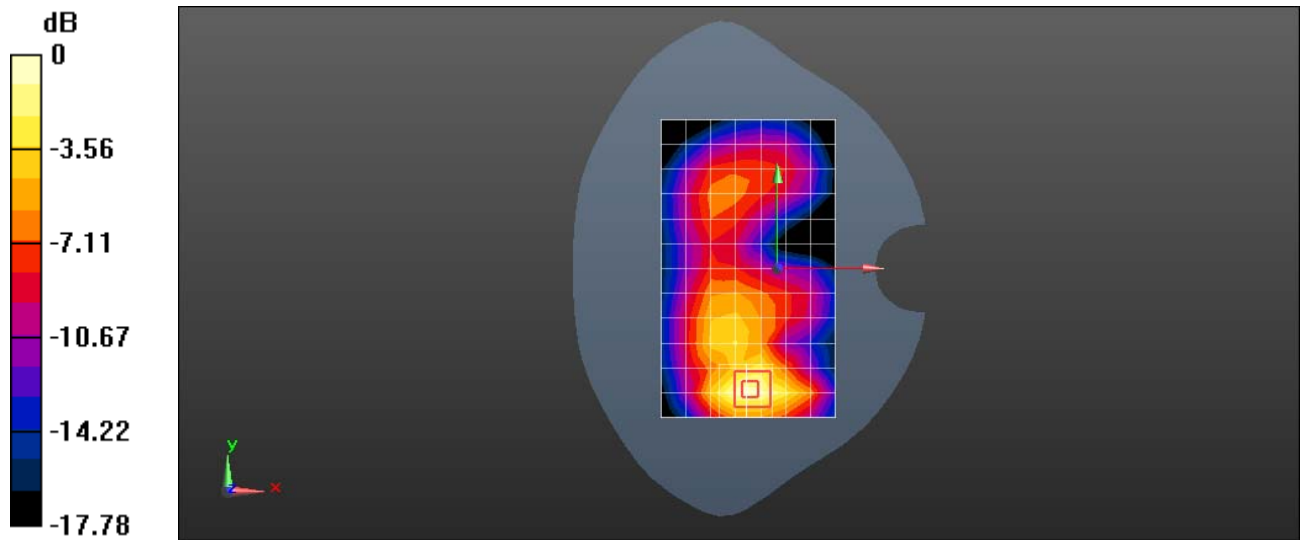

0 dB = 0.706 W/kg = -1.51 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band II 9400CH Back side 10mm-with battery 3-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ S/m; $\epsilon_r = 52.925$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.700 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.150 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 0.824 W/kg

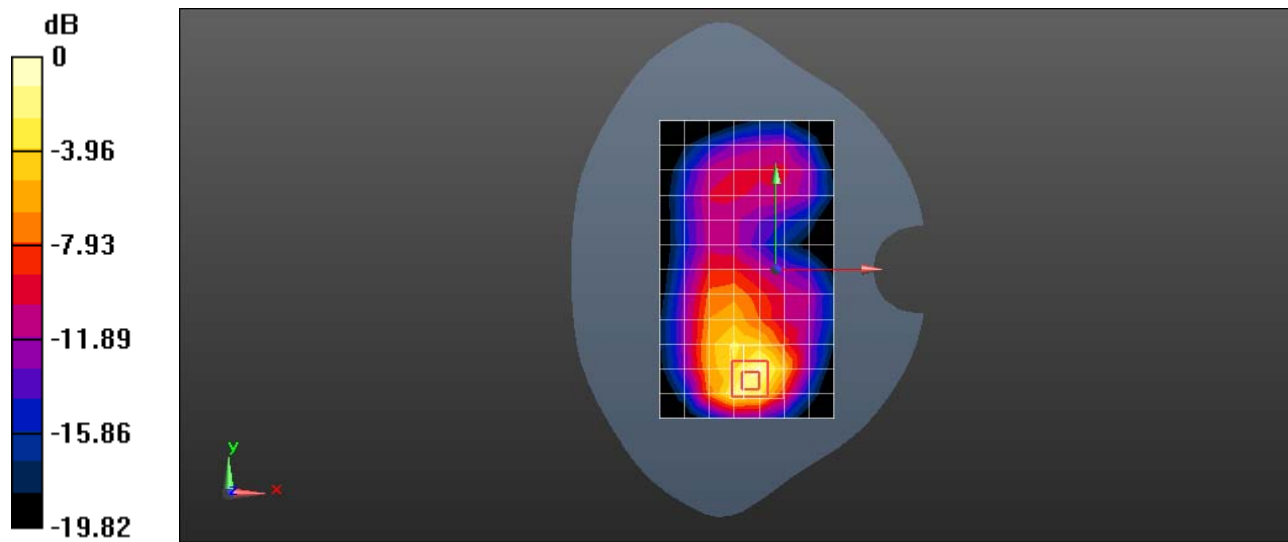

0 dB = 0.824 W/kg = -0.84 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band IV 1513CH Right hand touch cheek with Battery 2-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.985$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(7.84, 7.84, 7.84); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM3; Type: SAM; Serial: TP-1597

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.685 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.837 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.382 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

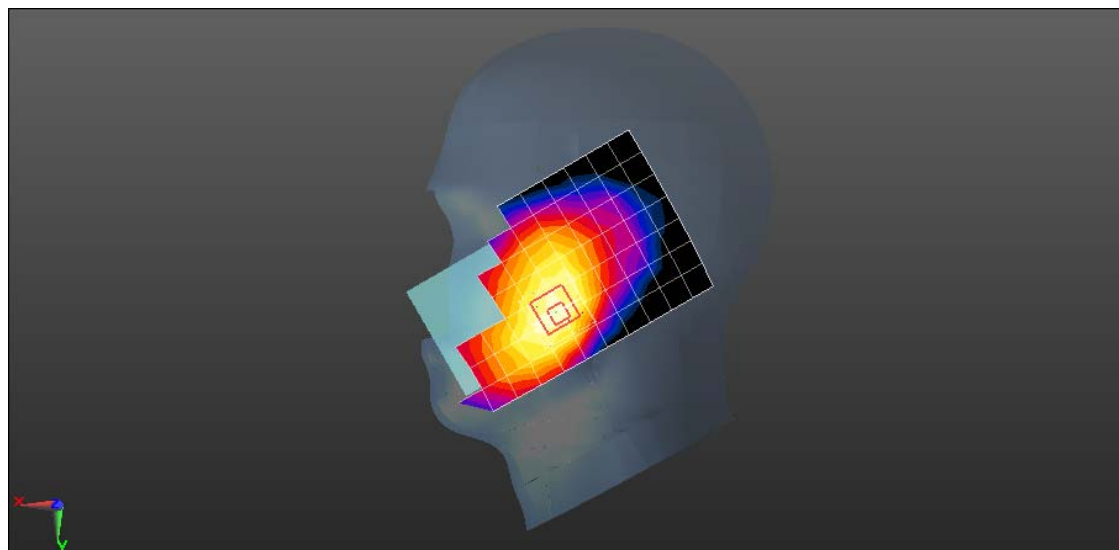

0 dB = 0.690 W/kg = -1.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band IV 1413CH Back Side 15mm with Battery 3-Main Antenna state 1

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 51.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.45, 7.45, 7.45); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.389 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.740 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

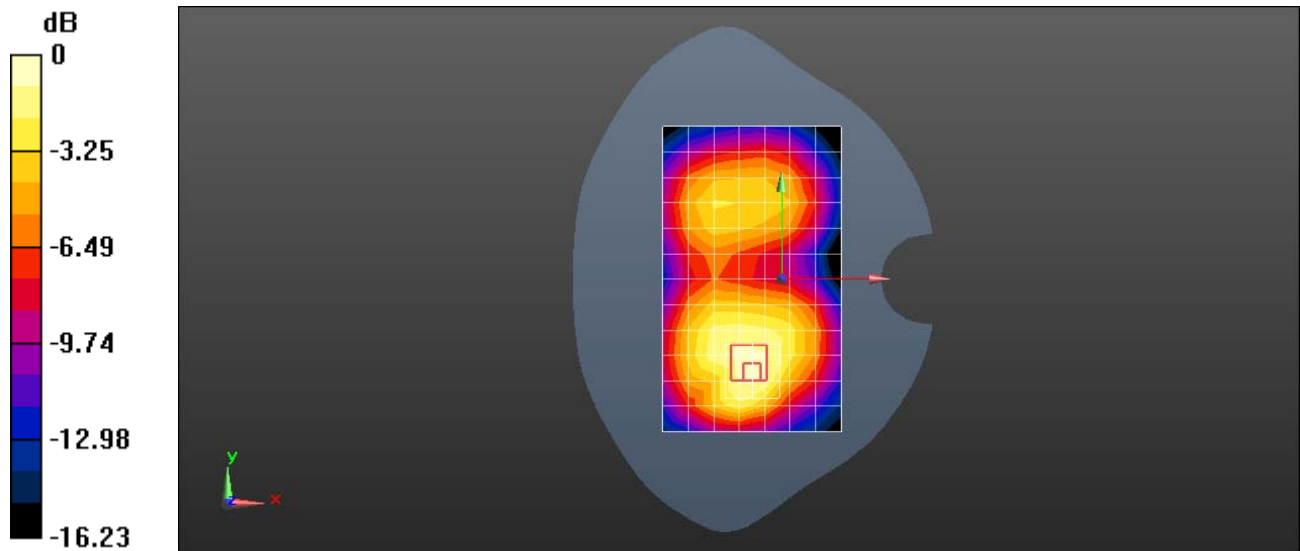

0 dB = 0.443 W/kg = -3.54 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band IV 1413CH Back Side 10mm with Battery 3-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 51.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.45, 7.45, 7.45); Calibrated: 2015-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.685 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.320 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.776 W/kg

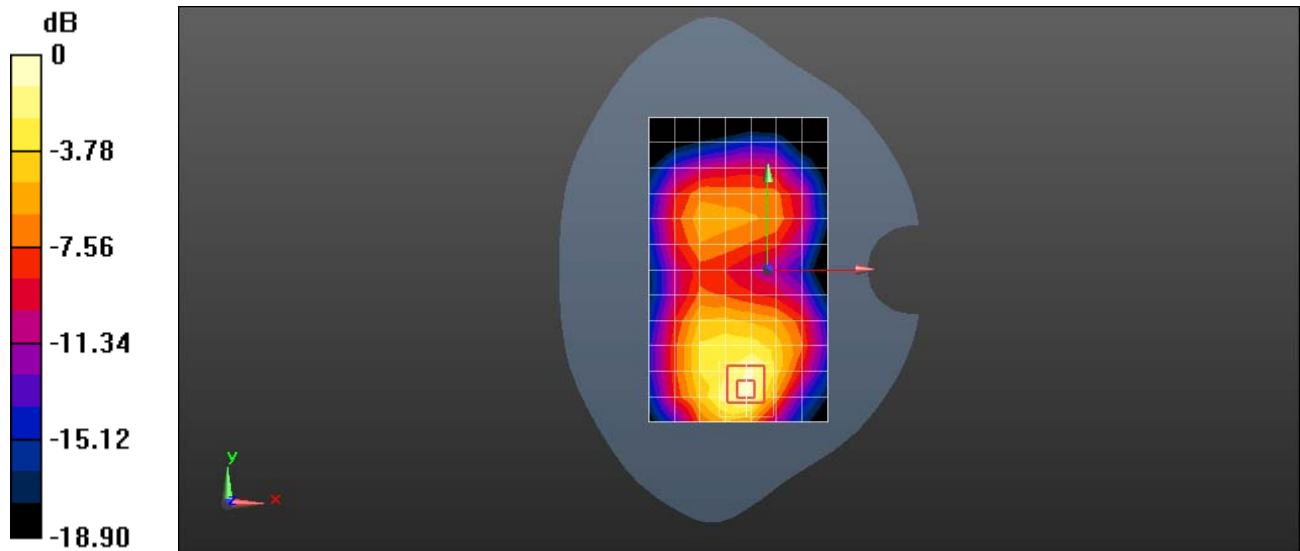

0 dB = 0.776 W/kg = -1.10 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band V 4233CH Right hand touch cheek with battery 3-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.623$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.325 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.109 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

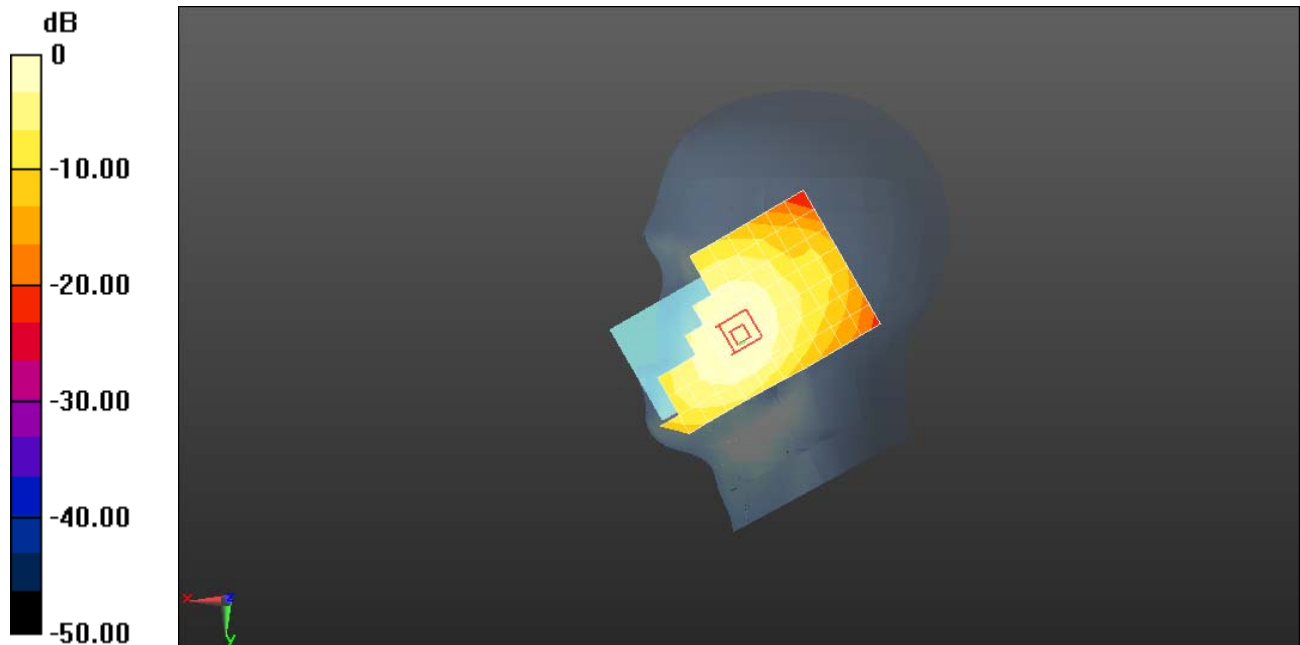

0 dB = 0.325 W/kg = -4.88 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band V 4182CH Back side 15mm-Main Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.294 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 17.16 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.210 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.300 W/kg

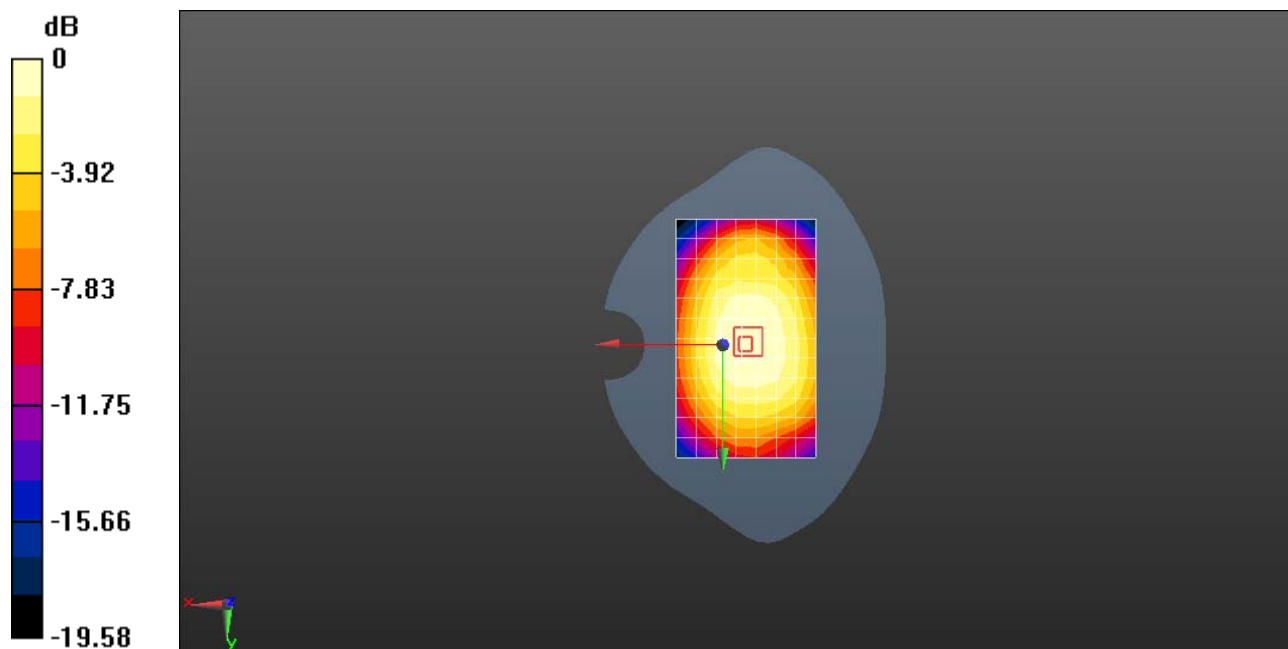

0 dB = 0.294 W/kg = -5.32 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 UMTS Band V 4182CH Right side 10mm with SIM2-Main Antenna**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 54.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.490 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.95 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.306 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.520 W/kg

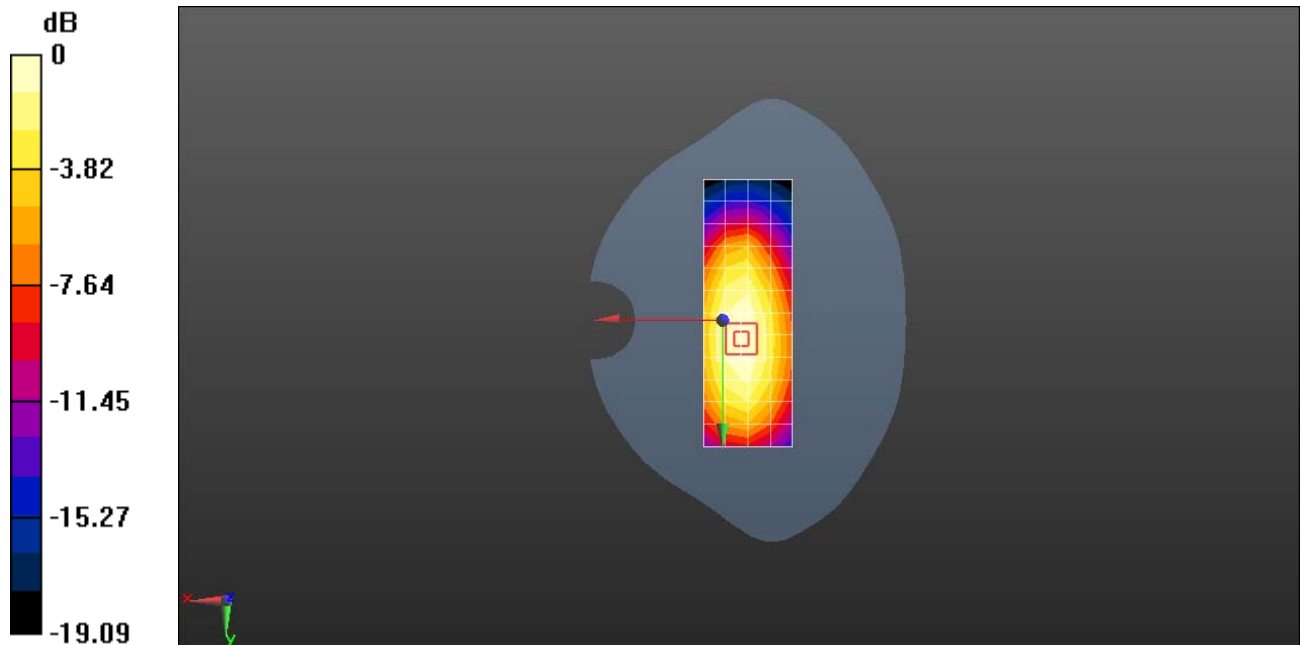

0 dB = 0.490 W/kg = -3.10 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band II 20M QPSK 1RB 50 offset 18700CH Right hand touch cheek with SIM2 and Battery 3-Main Antenna-State 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 40.38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.702 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.926 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 0.733 W/kg

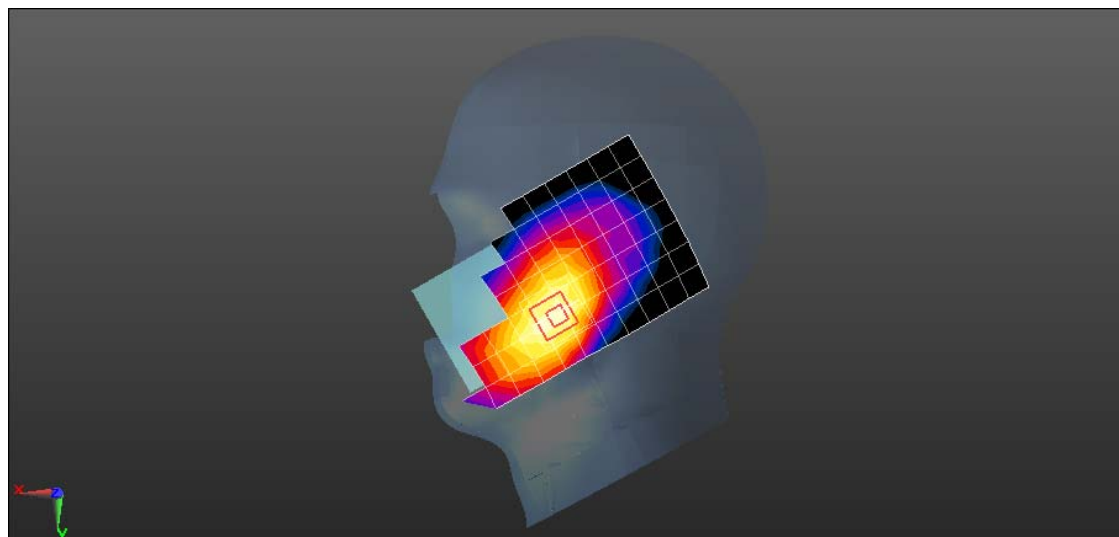

0 dB = 0.733 W/kg = -1.35 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band II 20M QPSK 1RB 50 offset 19100CH Back side 15mm with battery 3 -Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 51.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.637 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.662 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

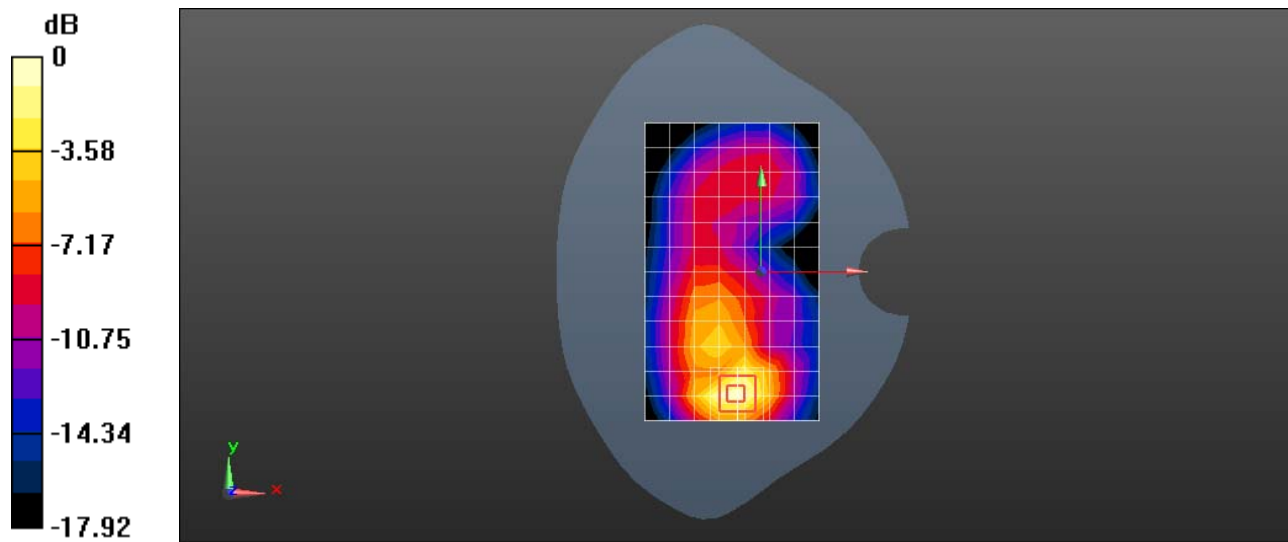

0 dB = 0.724 W/kg = -1.40 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band II 20M QPSK 1RB 50 offset 19100CH Back side 10mm with battery 3-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 52.861$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(7.24, 7.24, 7.24); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.629 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.910 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 0.842 W/kg

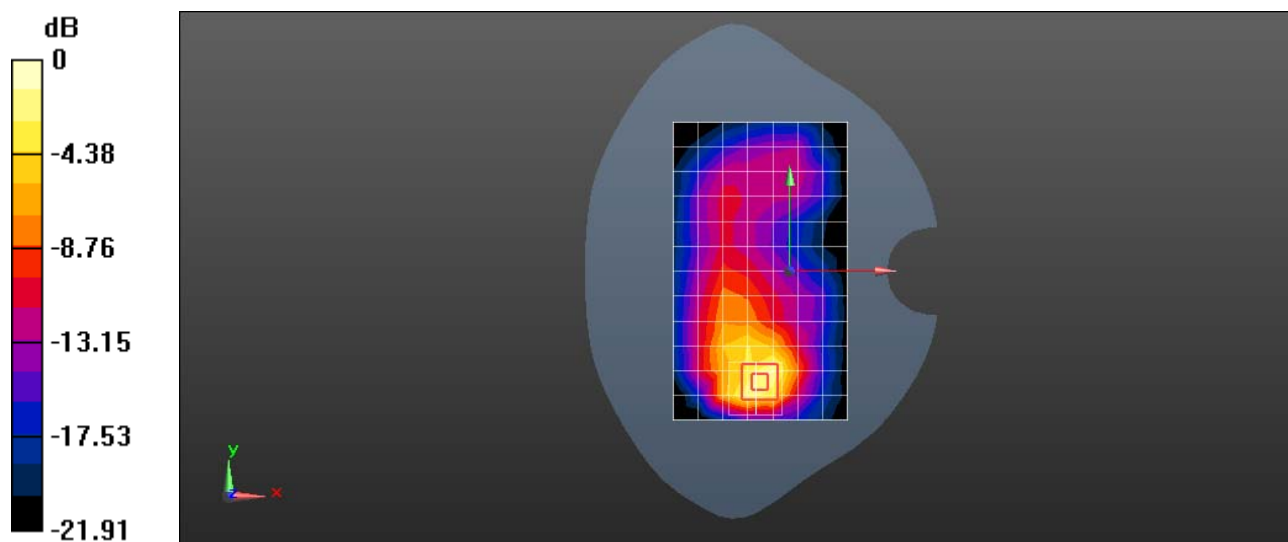

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band IV 20M QPSK 1RB 99 offset 20300CH Right hand touch cheek with Battery 3-Main Antenna State 1

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.65$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.84, 7.84, 7.84); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.926 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.340 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 0.910 W/kg

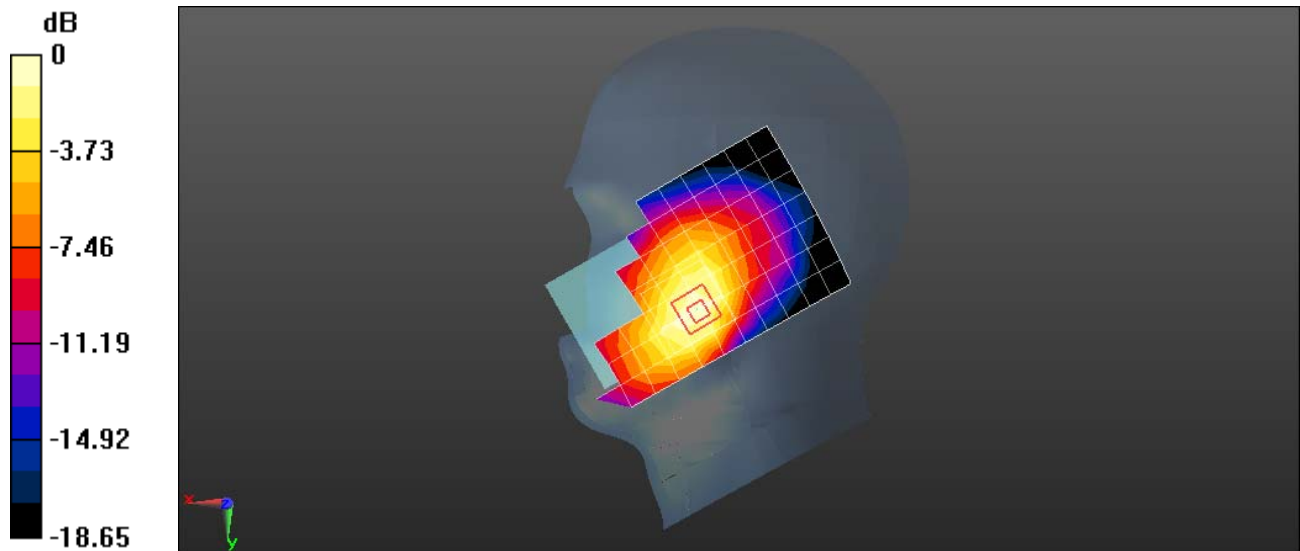

0 dB = 0.910 W/kg = -0.41 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band IV 20M QPSK 1RB 50 offset 20050CH Back side 15mm with Battery 2-Main Antenna-State 1

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 52.578$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.564 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.50 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.580 W/kg

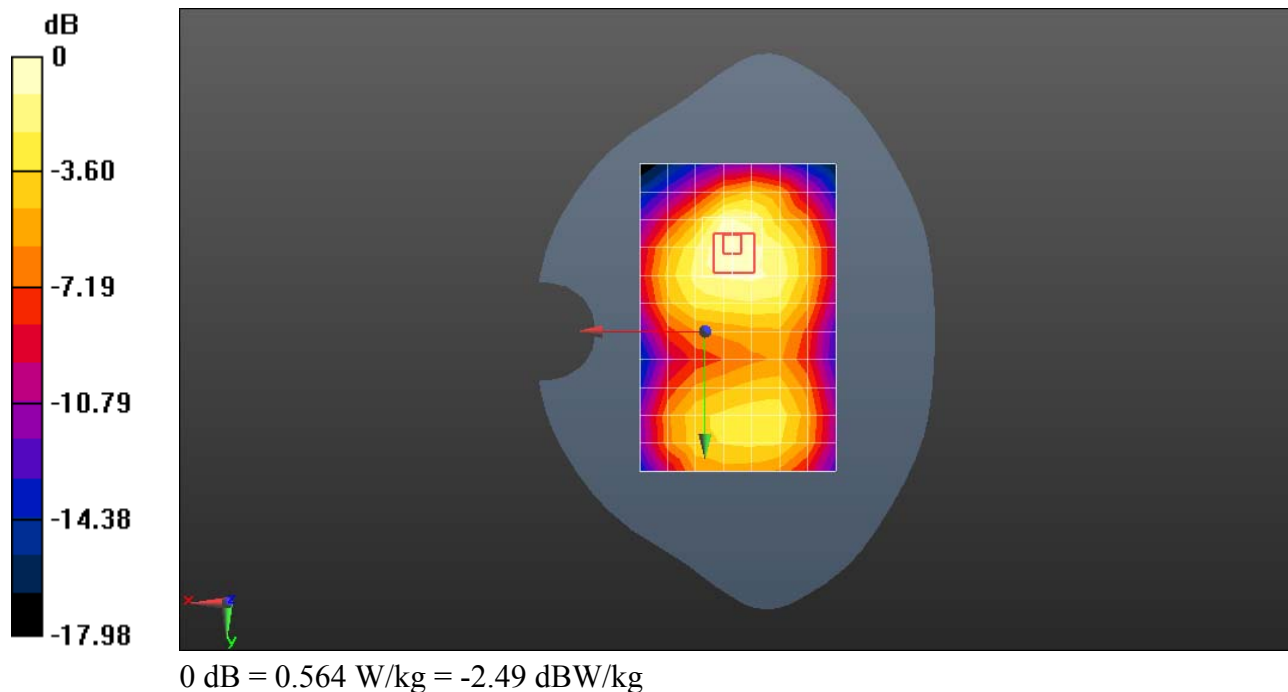

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band IV 20M QPSK 1RB 99 offset 20300CH Back side 10mm-Main Antenna-State 1

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 52.516$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(4.95, 4.95, 4.95); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.881 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.76 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.479 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

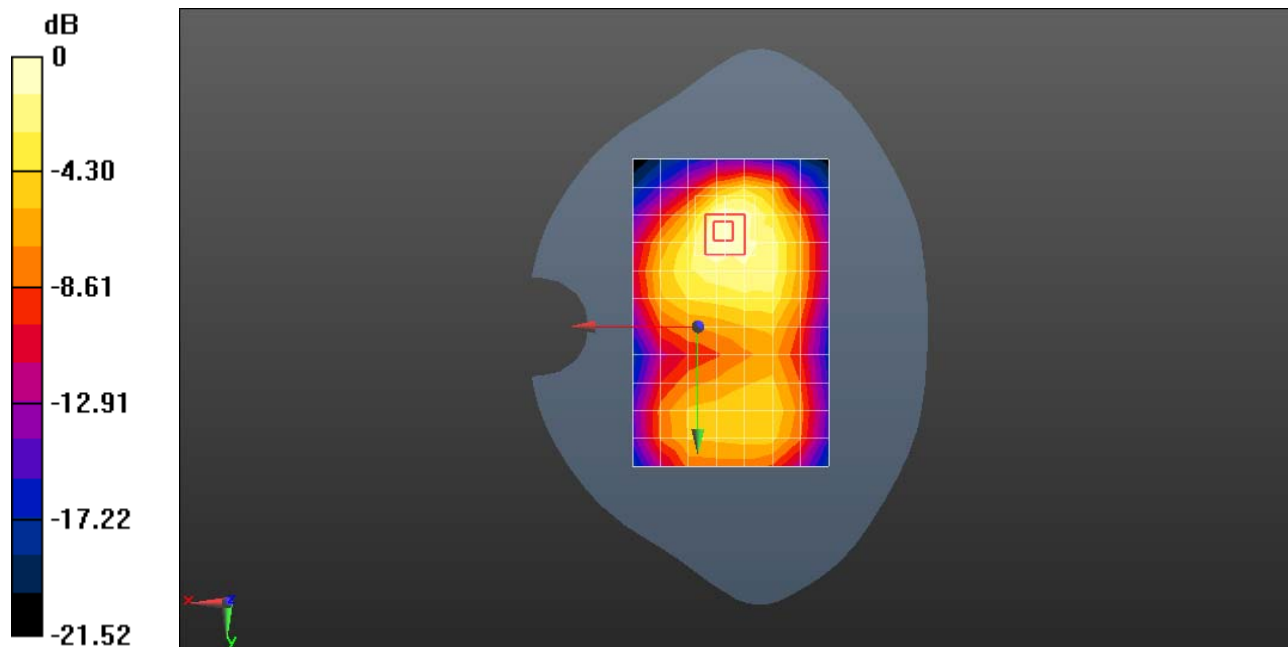

0 dB = 0.881 W/kg = -0.55 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band V 10M QPSK 1RB 25 offset 20600CH Right hand touch cheek - with SIM2 -Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 40.69$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM1; Type: SAM; Serial: TP-1475

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.300 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.575 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

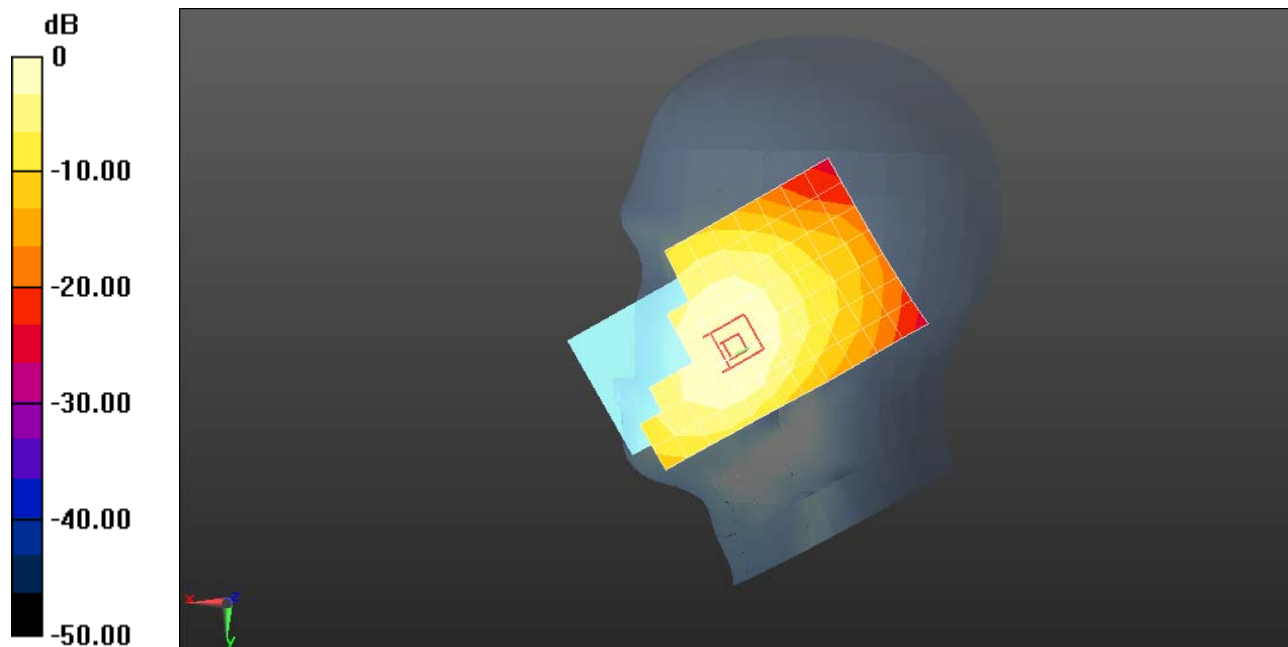

0 dB = 0.300 W/kg = -5.23 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band V 10M QPSK 1RB 25 offset 20450CH Back side 15mm with Battery 2-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.143$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM2; Type: SAM; Serial: TP:1474

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.228 W/kg



Configuration/Body/Zoom Scan (5x8x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.59 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

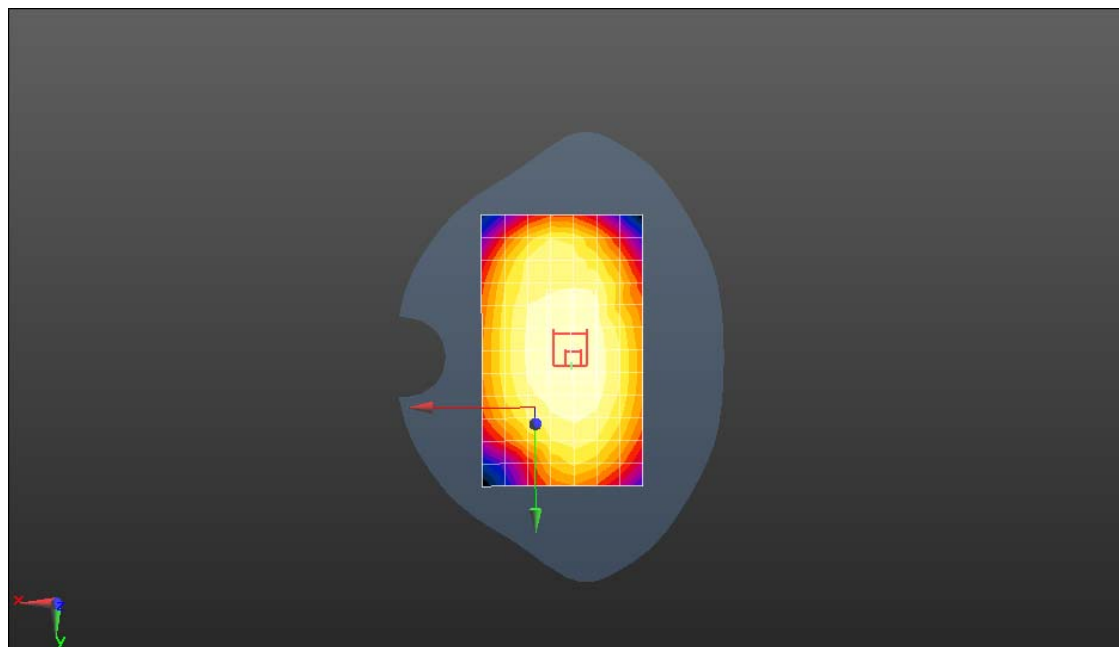

0 dB = 0.228 W/kg = -6.42 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band V 10M QPSK 1RB 25 offset 20450CH Right side 10mm-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 54.143$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.379 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.56 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.388 W/kg

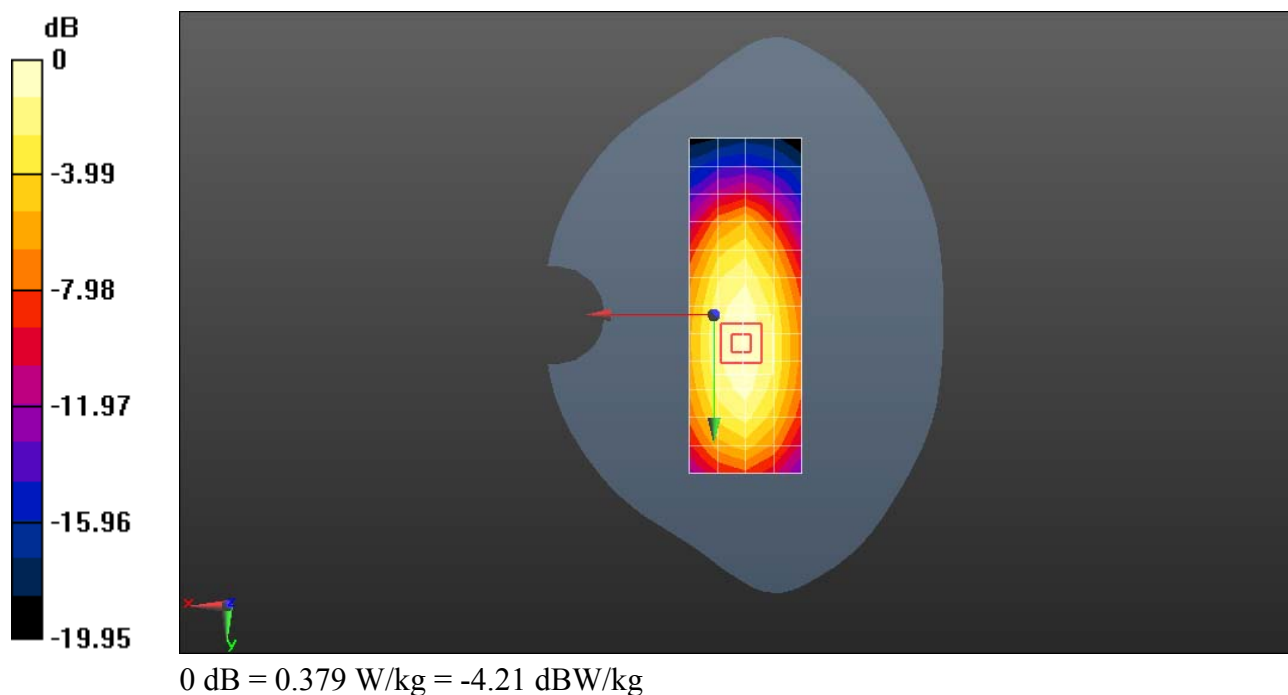

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band VII QPSK 1RB 50 offset 21350CH Left hand touch cheek with Battery 3-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 38.705$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.68, 6.68, 6.68); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.574 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.520 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.570 W/kg

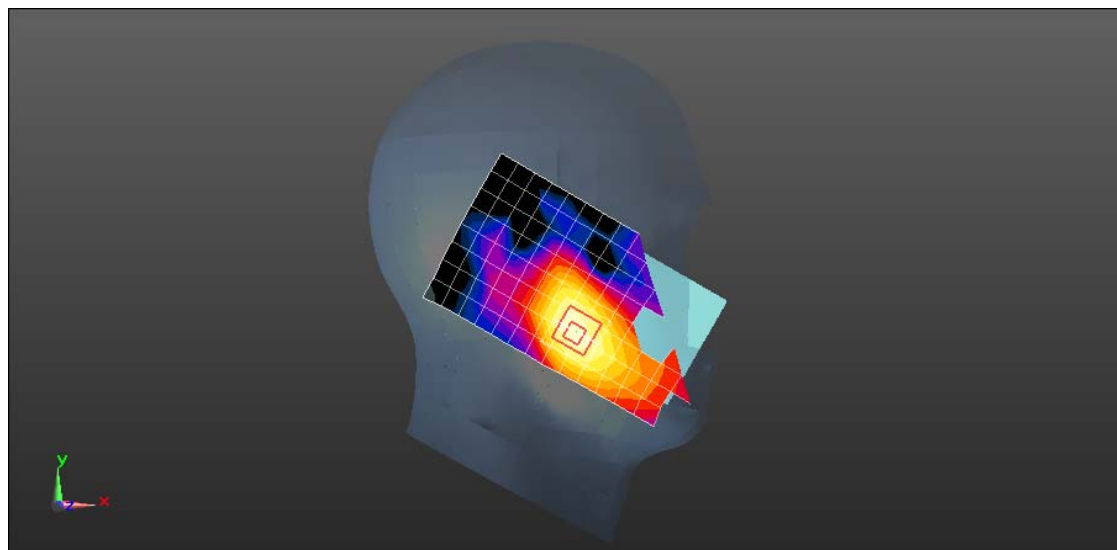

0 dB = 0.570 W/kg = -2.44 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band VII QPSK 1RB 50 offset 21350CH Back side 15mm with battery 3-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.131$ S/m; $\epsilon_r = 52.983$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.300 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.126 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

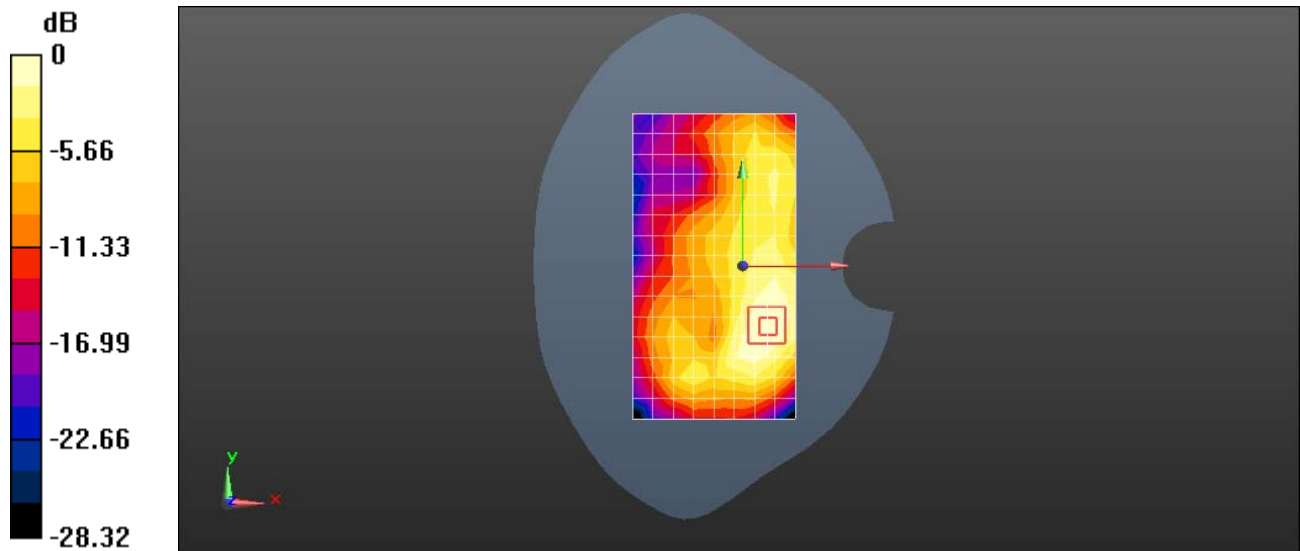

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band VII QPSK 1RB 50 offset 21350CH Back side 10mm with Battery 2-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.115$ S/m; $\epsilon_r = 51.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM4; Type: SAM; Serial: TP-1620

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.444 W/kg



Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.375 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

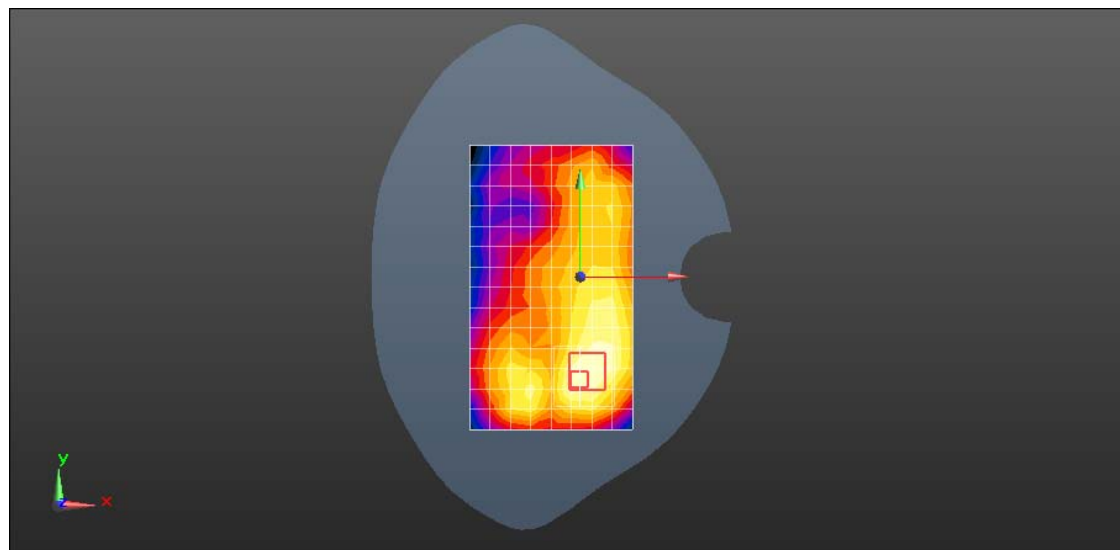

0 dB = 0.454 W/kg = -3.43 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XII 10M QPSK 1RB 25 offset 23130CH Right hand touch cheek-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 42.864$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.52, 6.52, 6.52); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm



Maximum value of SAR (measured) = 0.126 W/kg

Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.772 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.092 W/kg

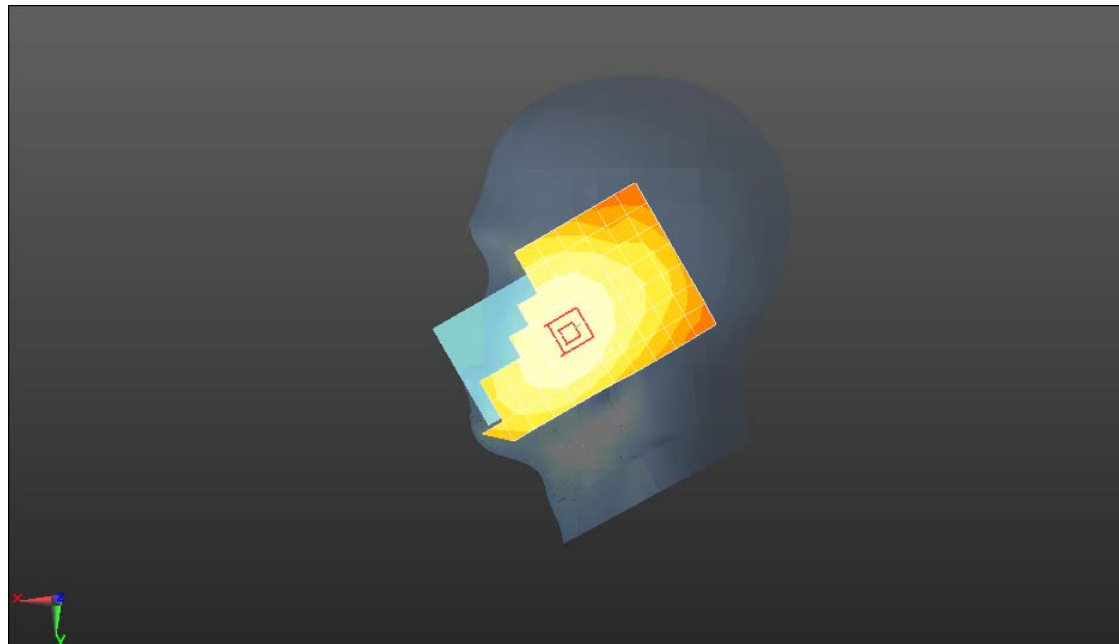

0 dB = 0.126 W/kg = -9.00 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XII 10M QPSK 1RB 49 offset 23060CH Back side 15mm with battery 3-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 54.353$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.166 W/kg

Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

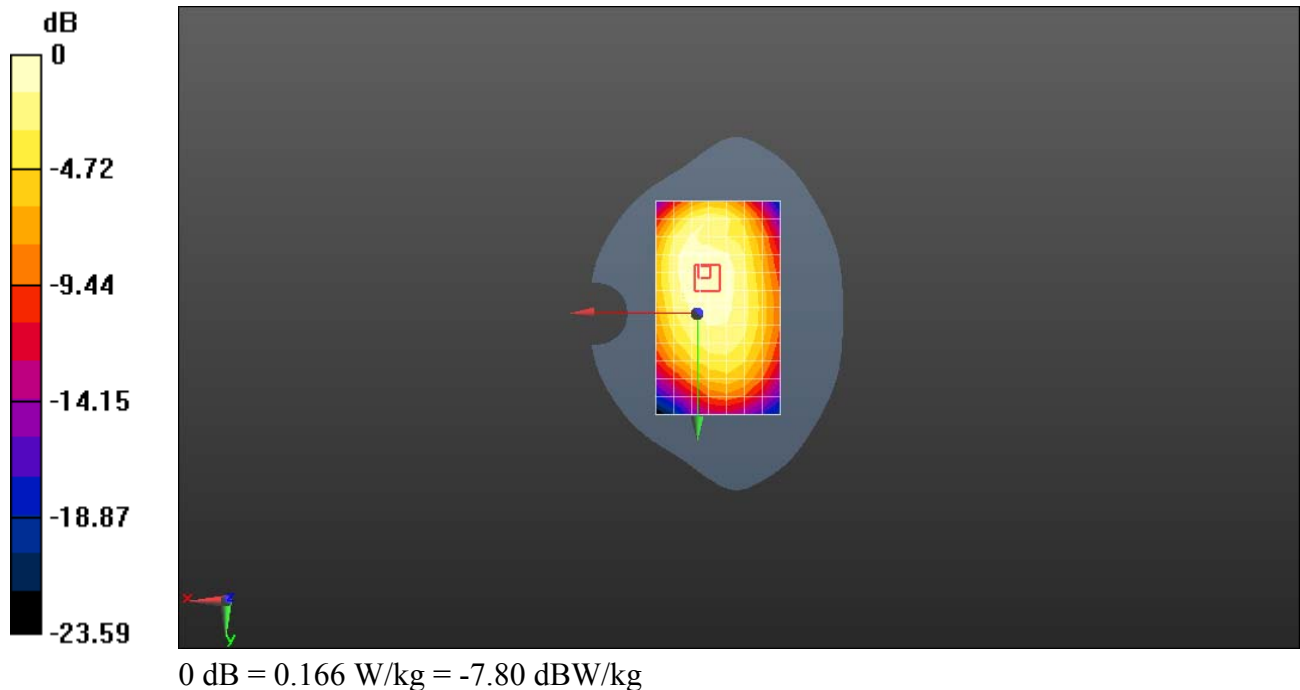Reference Value = 11.67 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.201 W/kg SAR(1 g) = 0.152 W/kg ; SAR(10 g) = 0.114 W/kg Maximum value of SAR (measured) = 0.168 W/kg 

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XII 10M QPSK 1RB 49 offset 23060CH Back side 10mm with Battery 3-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 54.353$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;

- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

- Electronics: DAE4 Sn851; Calibrated: 2015-7-20

- Phantom: SAM1; Type: SAM; Serial: TP-1475

- DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.229 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.47 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

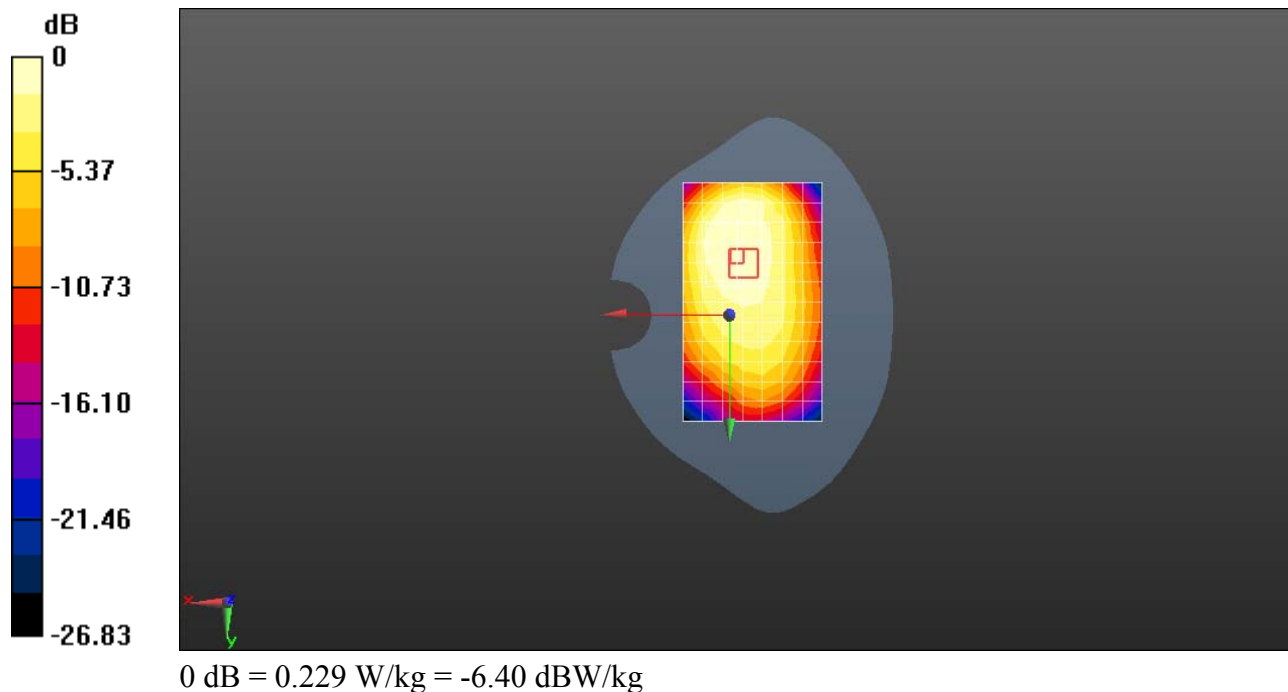

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23800CH Right hand touch cheek-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 42.864$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.52, 6.52, 6.52); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM2; Type: SAM; Serial: TP:1474

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.120 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.288 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

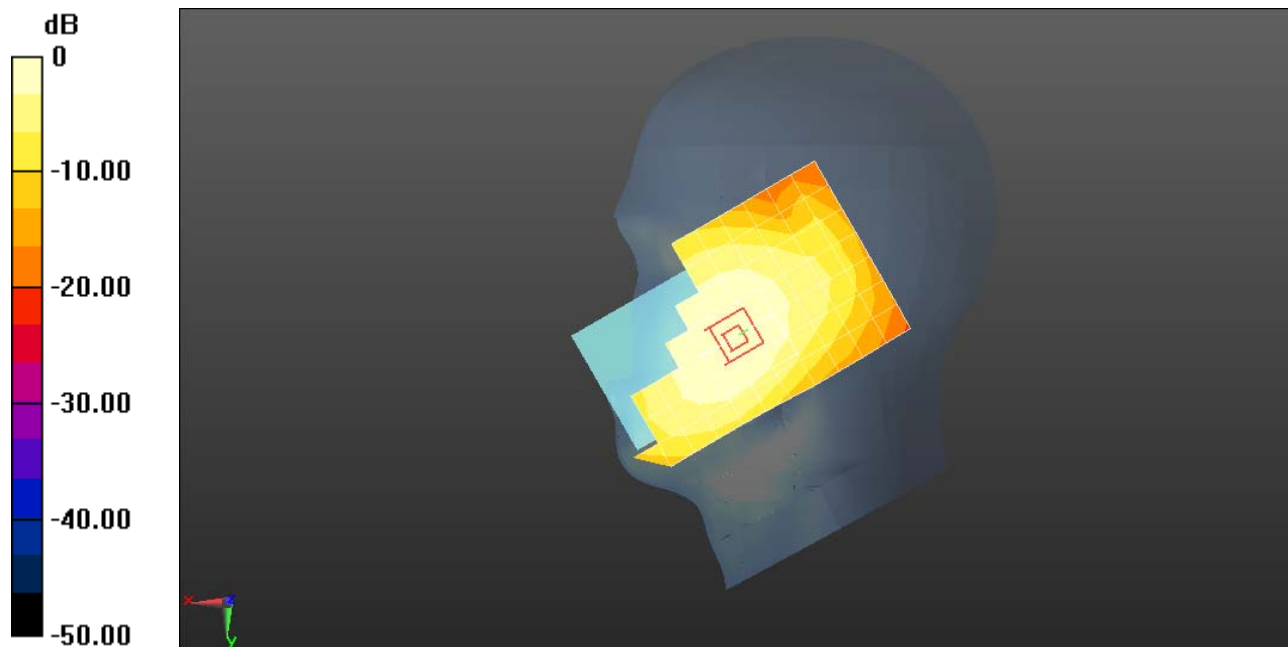

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23780CH Back side 15mm with Battery 3-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 54.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.176 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.41 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

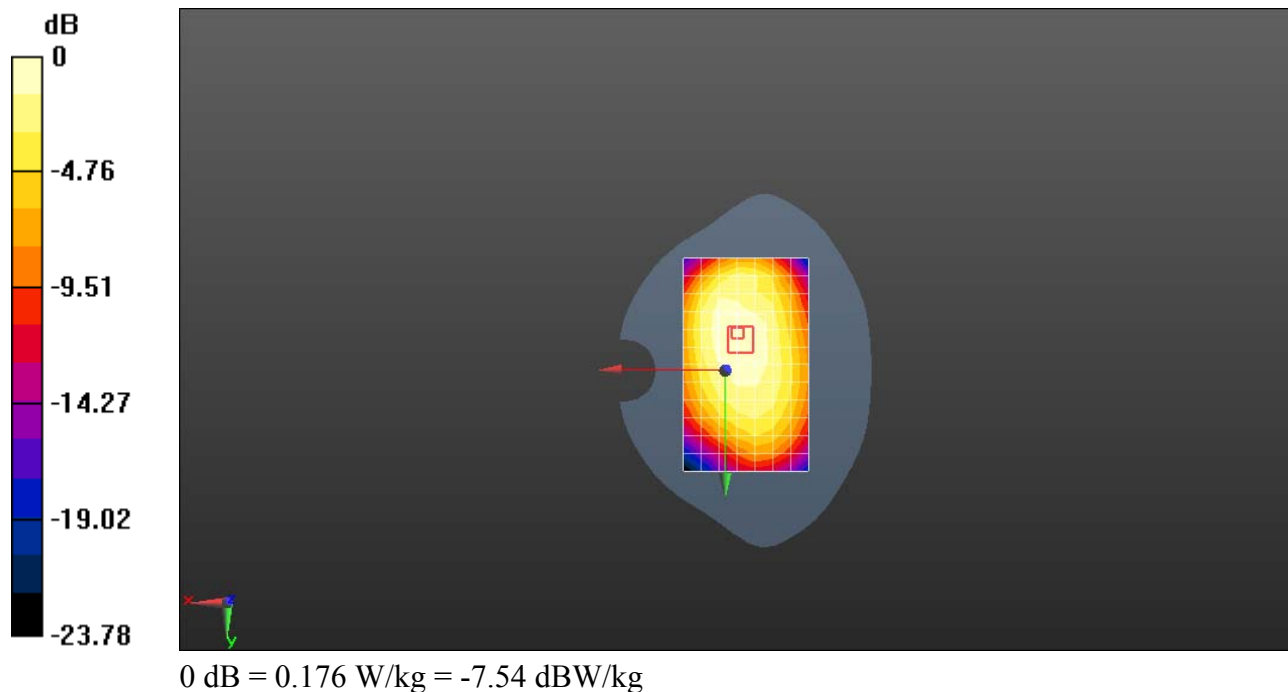

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XVII 10M QPSK 1RB 25 offset 23780CH Back side 10mm with Battery 3-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 54.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

Probe: ES3DV3 - SN3168; ConvF(6.39, 6.39, 6.39); Calibrated: 2015-9-28;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn851; Calibrated: 2015-7-20

Phantom: SAM1; Type: SAM; Serial: TP-1475

DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm



Maximum value of SAR (measured) = 0.272 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.01 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.126 W/kg

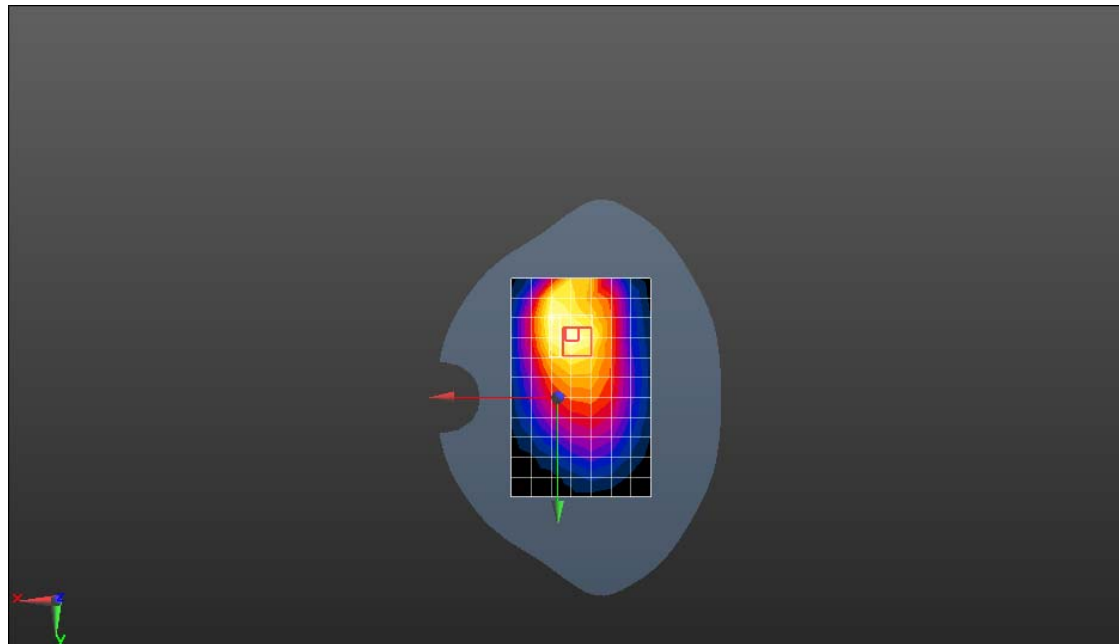

0 dB = 0.272 W/kg = -5.65 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26865CH Right hand touch cheek -Main antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 40.867$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.32, 6.32, 6.32); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM1; Type: SAM; Serial: TP-1475

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.274 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.073 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.197 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.284 W/kg

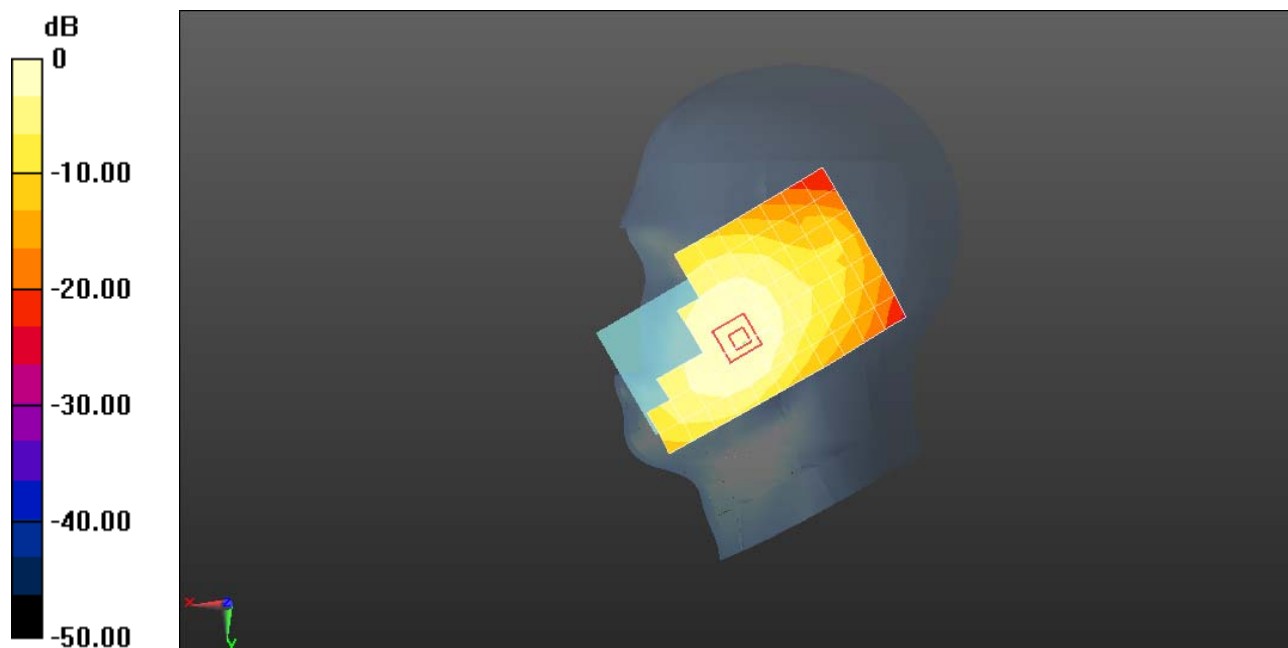

0 dB = 0.274 W/kg = -5.62 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26775CH Back side 15mm with Battery 2-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 822.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 822.5$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 54.109$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.246 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.08 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.173 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.249 W/kg

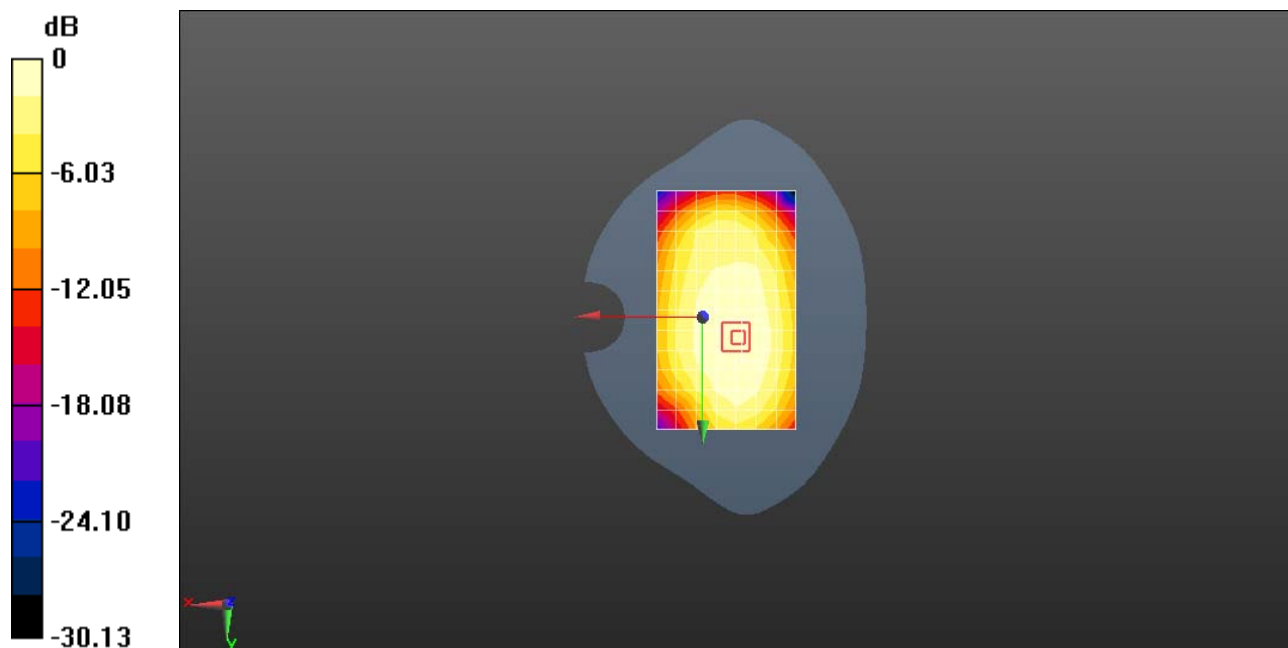

0 dB = 0.246 W/kg = -6.09 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXVI 15M QPSK 1RB 38 offset 26775CH Right side 10mm with Battery 3-Main Antenna

DUT: EVA-L29; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 15MHz, QPSK/16-QAM) (0); Frequency: 822.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 822.5$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 54.109$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: ES3DV3 - SN3168; ConvF(6.24, 6.24, 6.24); Calibrated: 2015-9-28;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$

ε Electronics: DAE4 Sn851; Calibrated: 2015-7-20

ε Phantom: SAM2; Type: SAM; Serial: TP:1474

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.383 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.49 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.227 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.381 W/kg

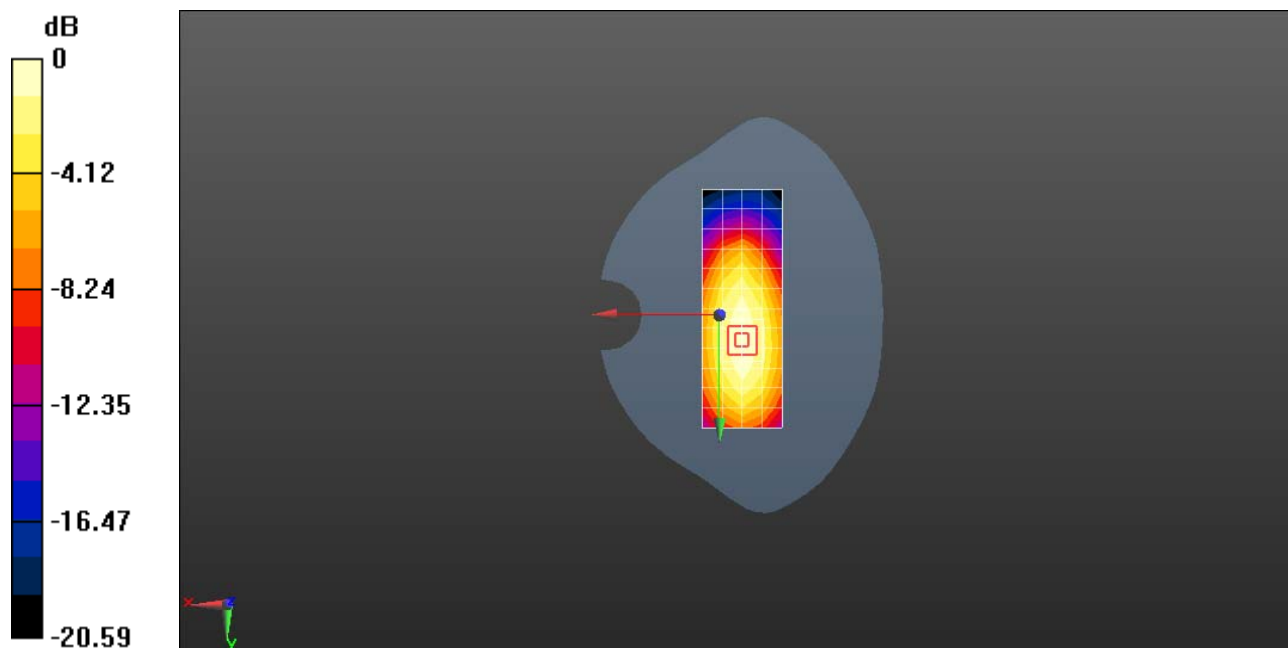

0 dB = 0.383 W/kg = -4.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXXVIII QPSK 1RB 50 offset 38000CH Left hand touch cheek with battery 2-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.583$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

Probe: EX3DV4 - SN3744; ConvF(6.68, 6.68, 6.68); Calibrated: 2015-7-24;

Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn852; Calibrated: 2015-4-27

Phantom: SAM3; Type: SAM; Serial: TP-1597

DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.563 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.621 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.553 W/kg

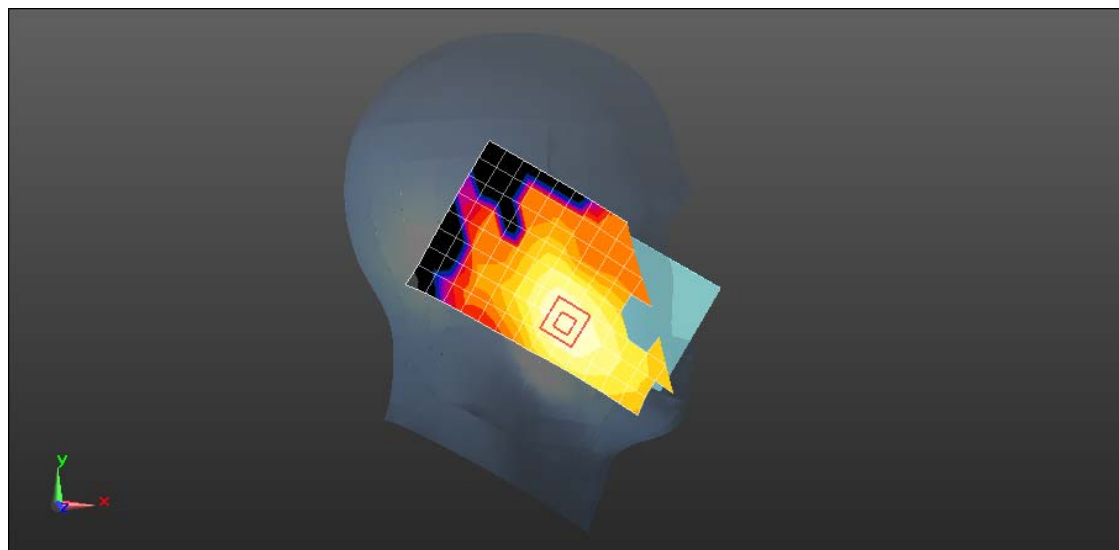

0 dB = 0.553 W/kg = -2.57 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXXVIII QPSK 1RB 50 offset 38000CH Back Side 15mm with SIM2 and Battery 2-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.197$ S/m; $\epsilon_r = 50.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm



Maximum value of SAR (measured) = 0.217 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.071 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.096 W/kg

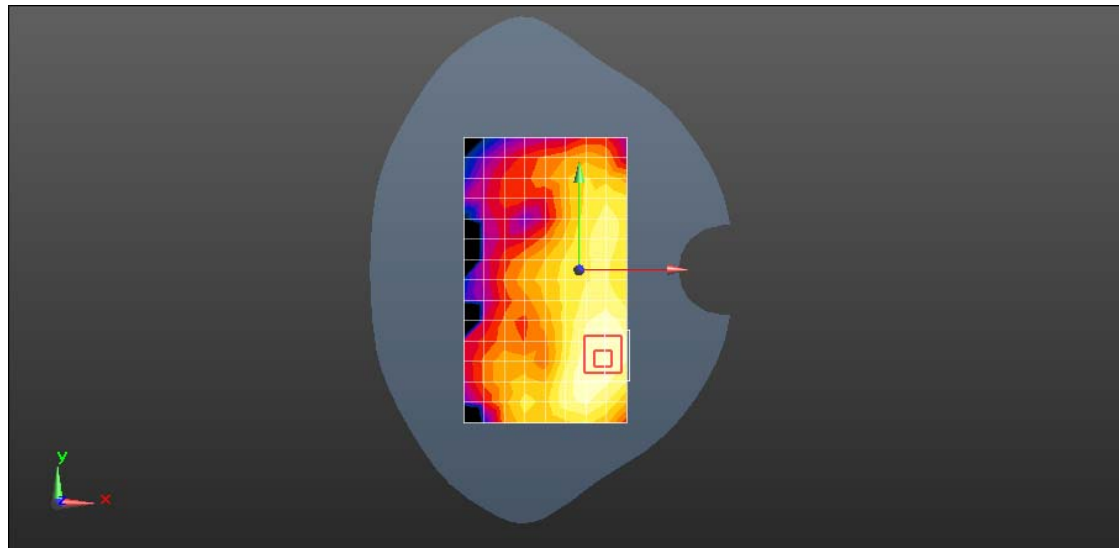

0 dB = 0.217 W/kg = -6.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XXXVIII QPSK 1RB 50 offset 38150CH Back Side 10mm with Battery 2-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2610 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2610$ MHz; $\sigma = 2.215$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.262 W/kg



Configuration/Body/Zoom Scan (9x10x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.834 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

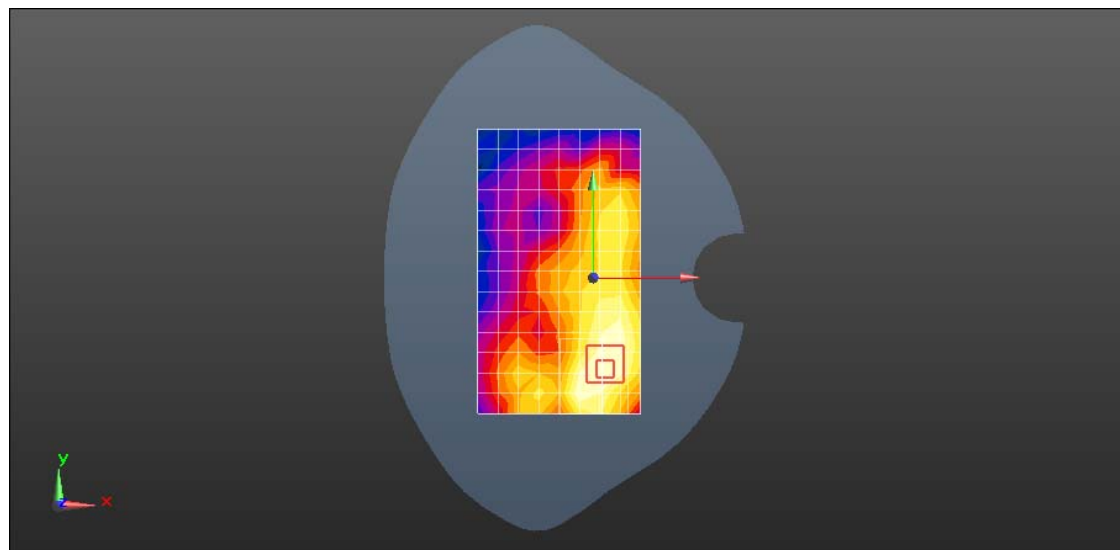

0 dB = 0.261 W/kg = -5.84 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Left hand touch cheek with Battery 2-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2565$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 37.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.68, 6.68, 6.68); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM3; Type: SAM; Serial: TP-1597

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.370 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.418 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

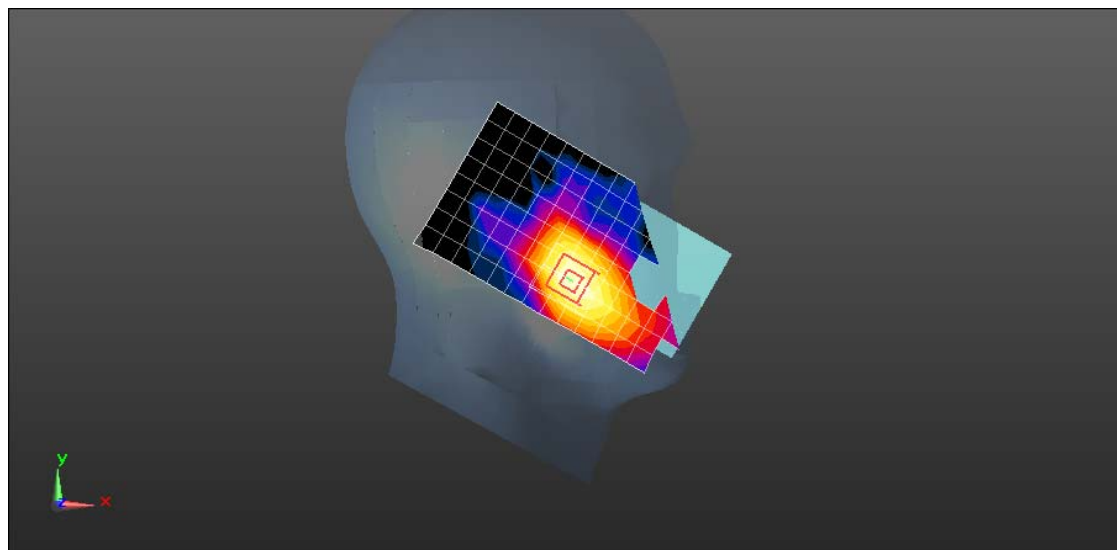

0 dB = 0.363 W/kg = -4.40 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Back Side 15mm with Battery 2-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 51.131$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.133 W/kg


Configuration/Head/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.079 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

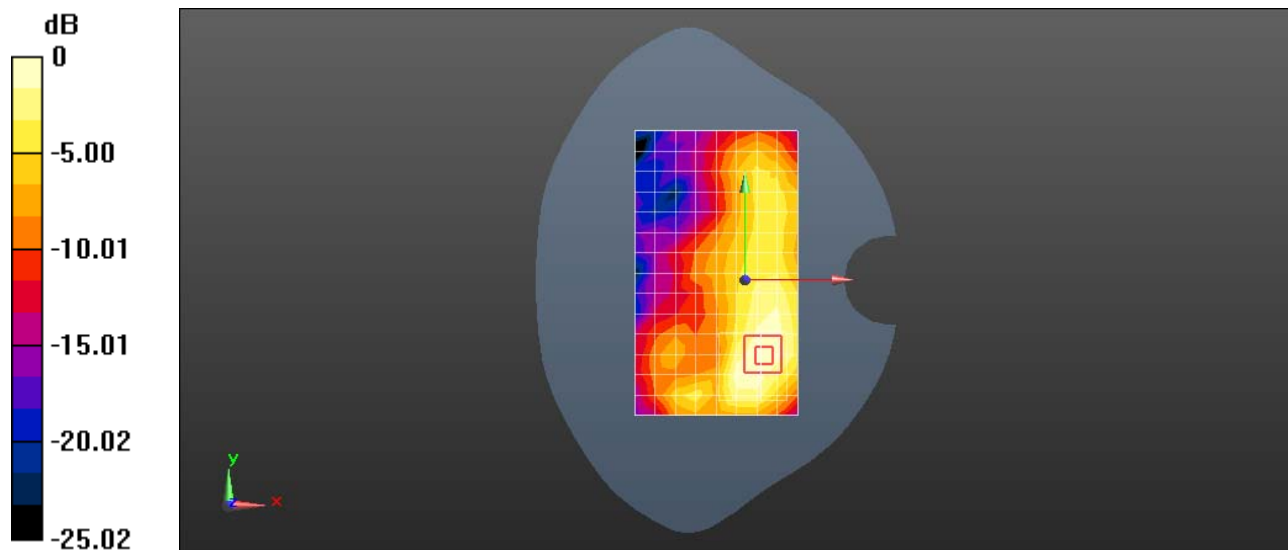

0 dB = 0.142 W/kg = -8.48 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 LTE Band XLI 20M QPSK 1RB 50 offset 40340CH Back Side 10mm with Battery 2-Main Antenna state 2

DUT: EVA-L29; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-TDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2565 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2565$ MHz; $\sigma = 2.119$ S/m; $\epsilon_r = 51.131$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

ε Probe: EX3DV4 - SN3744; ConvF(6.65, 6.65, 6.65); Calibrated: 2015-7-24;

ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$

ε Electronics: DAE4 Sn852; Calibrated: 2015-4-27

ε Phantom: SAM4; Type: SAM; Serial: TP-1620

ε DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.311 W/kg


Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.210 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

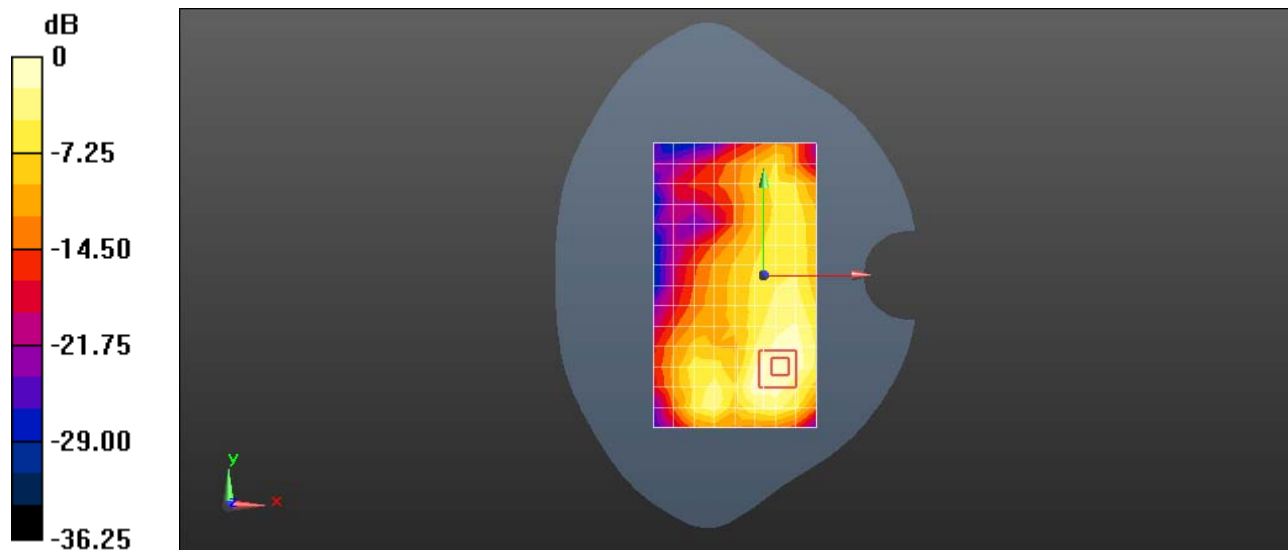

0 dB = 0.323 W/kg = -4.91 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 WIFI 2.4G 11b 11CH Left hand touch cheek**DUT: EVA-L29; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 38.821$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(6.84, 6.84, 6.84); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: SAM3; Type: SAM; Serial: TP-1597
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.43 W/kg



Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.577 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.457 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

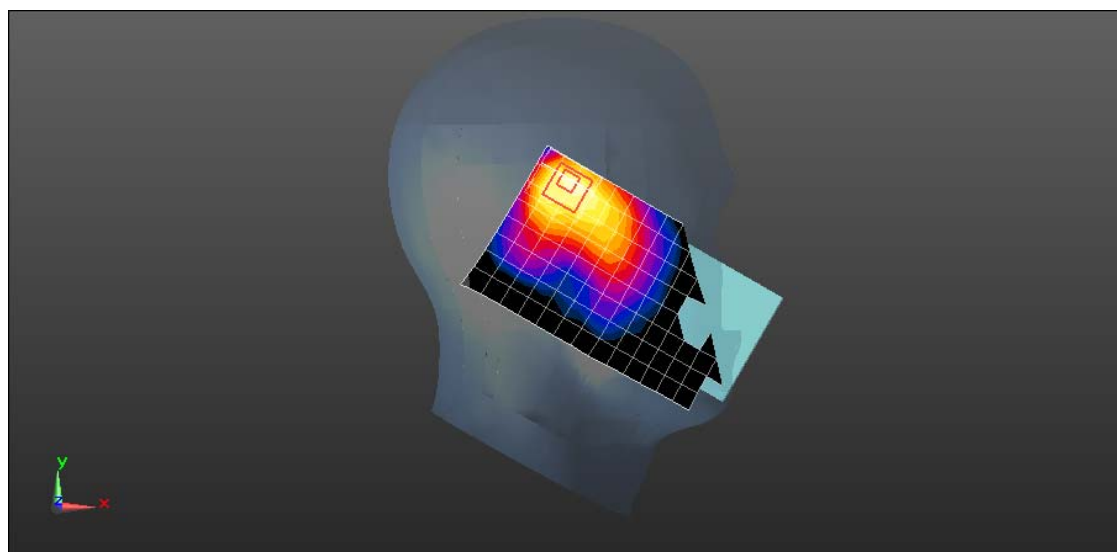

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 WIFI 2.4G 11b 11CH Back Side 15mm**DUT: EVA-L29; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.015$ S/m; $\epsilon_r = 50.649$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(6.77, 6.77, 6.77); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.111 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.835 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

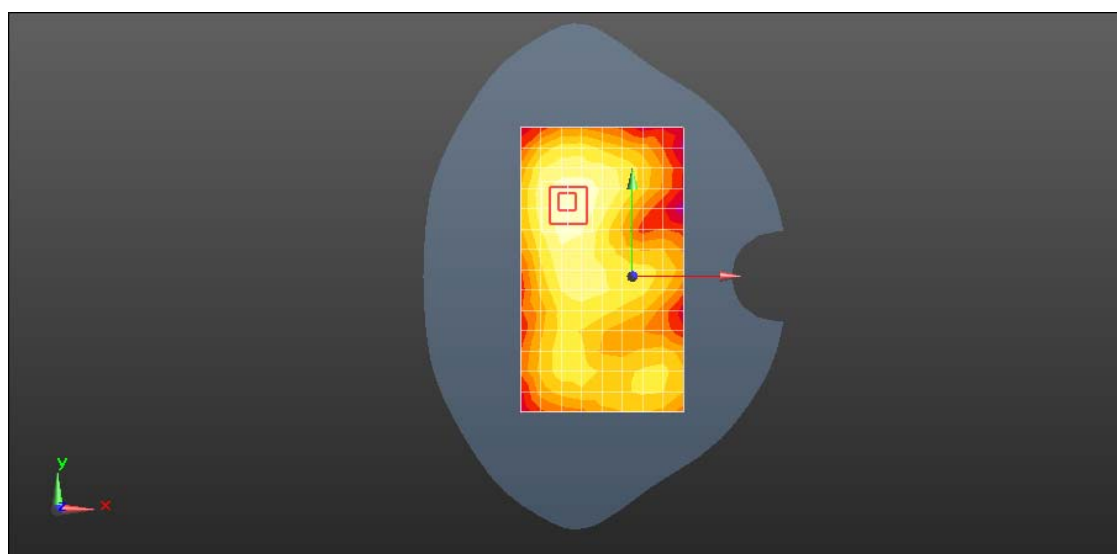

0 dB = 0.116 W/kg = -9.35 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 WIFI 2.4G 11b 11CH Back Side 10mm**DUT: EVA-L29; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.015$ S/m; $\epsilon_r = 50.649$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3744; ConvF(6.77, 6.77, 6.77); Calibrated: 2015-7-24;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ζ Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- ζ Phantom: SAM4; Type: SAM; Serial: TP-1620
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.257 W/kg



Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.124 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

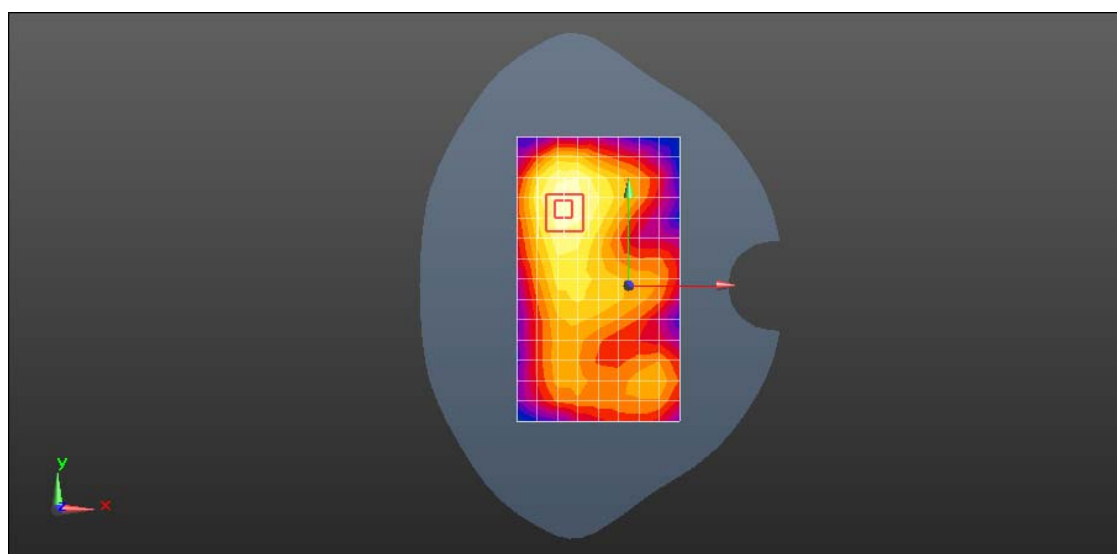

0 dB = 0.293 W/kg = -5.33 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 Wifi 5G 802.11a 108CH Left hand touch cheek-Repeated**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5540 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5540$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 34.521$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(4.58, 4.58, 4.58); Calibrated: 2015-4-30;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM1; Type: SAM; Serial: TP-1475
- ζ DASY52 52.8.8(1222);

Configuration/Head/Area Scan (12x18x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.33 W/kg



Configuration/Head/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.292 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 5.96 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 3.20 W/kg

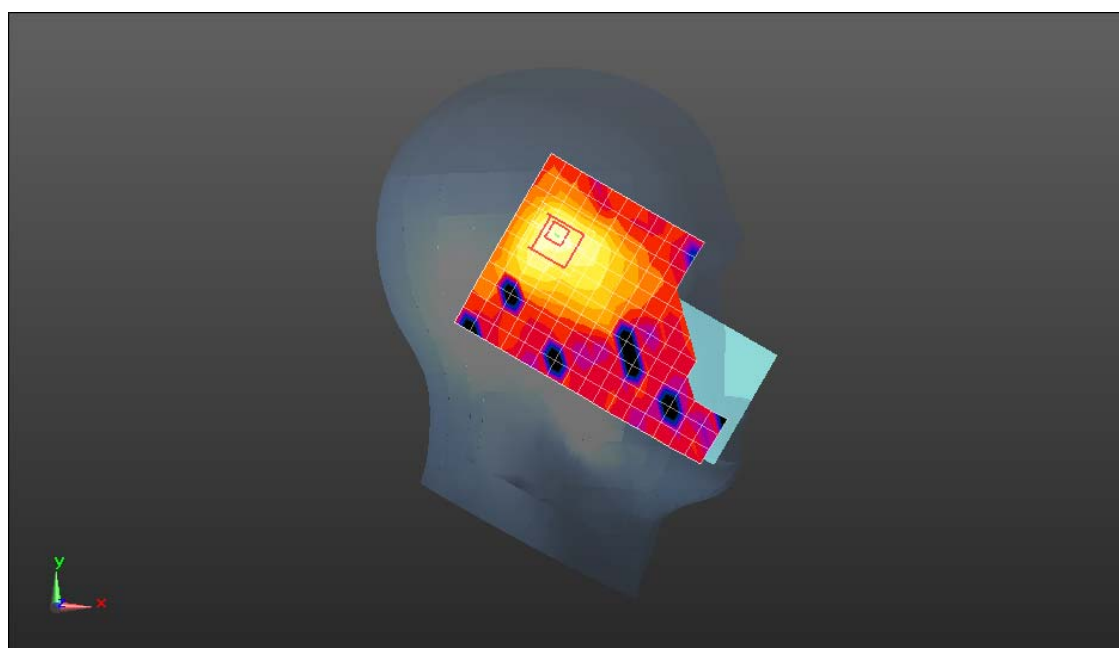

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 Wifi 5G 802.11a 104CH Front side 15mm**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5520 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.907$ S/m; $\epsilon_r = 47.076$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(3.87, 3.87, 3.87); Calibrated: 2015-4-30;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.166 W/kg



Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.691 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

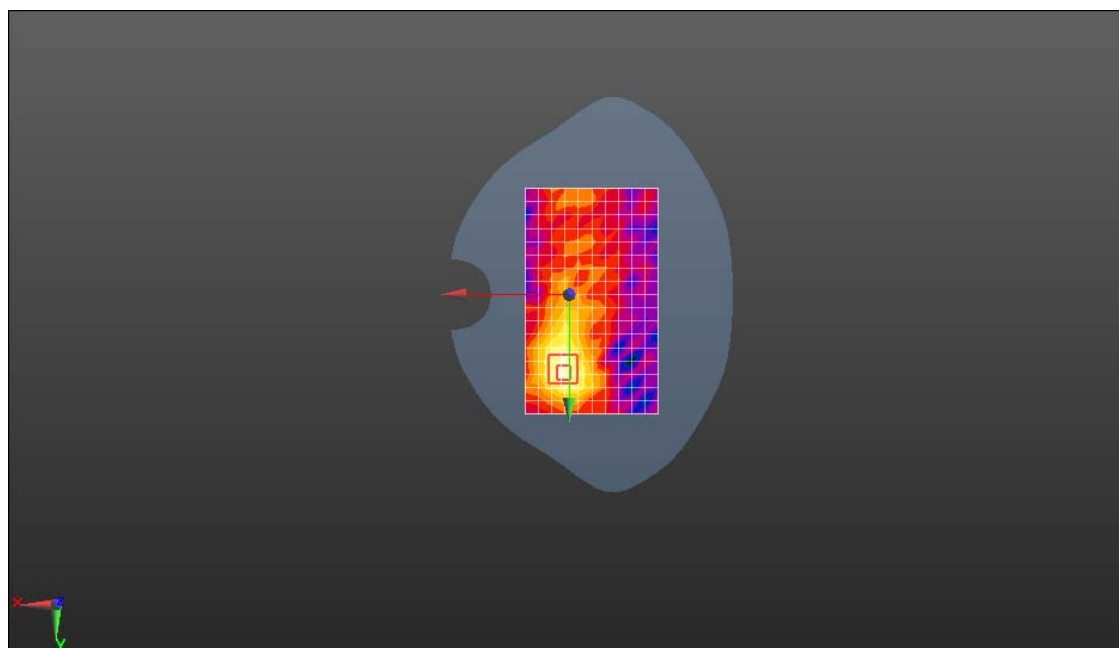

0 dB = 0.166 W/kg = -7.80 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

EVA-L29 Wifi 5G 802.11a 40CH Right side 10mm with battery 3**DUT: EVA-L29; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.197$ S/m; $\epsilon_r = 49.826$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ζ Probe: EX3DV4 - SN3736; ConvF(4.31, 4.31, 4.31); Calibrated: 2015-4-30;
- ζ Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- ζ Electronics: DAE4 Sn851; Calibrated: 2015-7-20
- ζ Phantom: SAM2; Type: SAM; Serial: TP:1474
- ζ DASY52 52.8.8(1222);

Configuration/Body/Area Scan (6x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.192 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.397 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

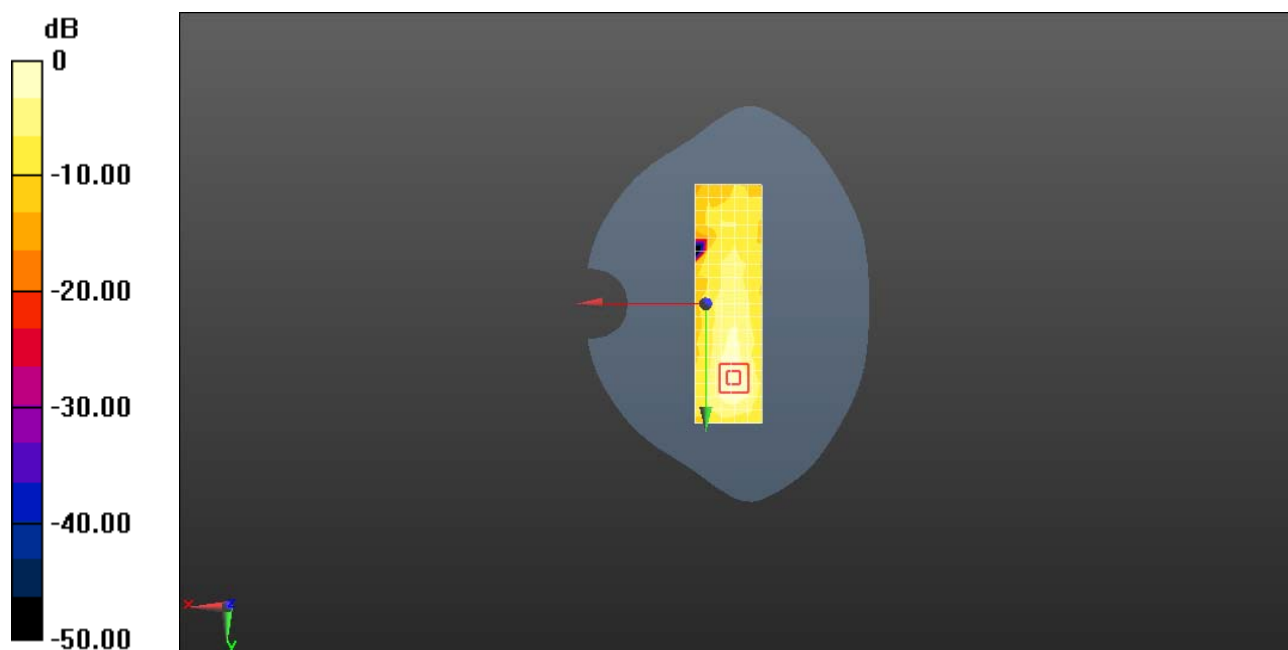

0 dB = 0.192 W/kg = -7.17 dBW/kg