



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D835-ES-Body
SystemPerformanceCheck-D1900-ES-Body
SystemPerformanceCheck-D2450-ES-Body

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D835-ES-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 56.181$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.14, 6.14, 6.14); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/d=15mm,pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.68 W/kg


Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.938 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 3.70 W/kg

SAR(1 g) = 2.56 W/kg; SAR(10 g) = 1.72 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

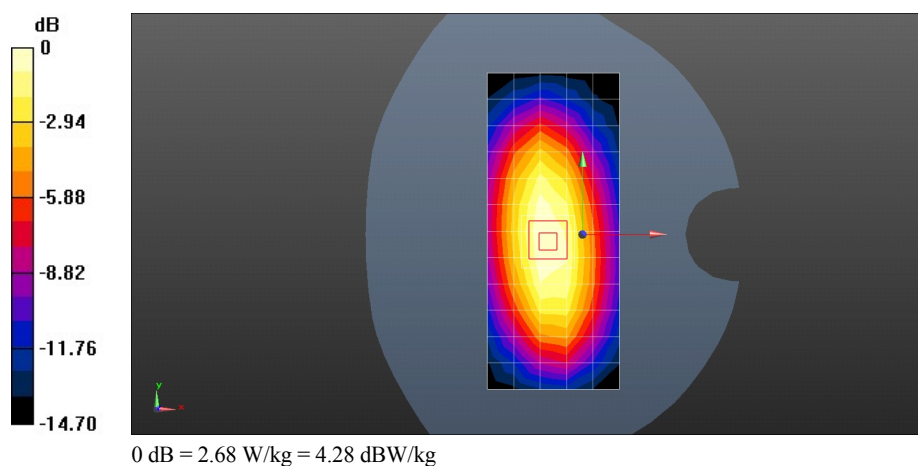

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D1900-ES-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.559$ mho/m; $\epsilon_r = 53.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.86, 4.86, 4.86); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.4 W/kg


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 87.132 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 9.9 W/kg; SAR(10 g) = 5.26 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

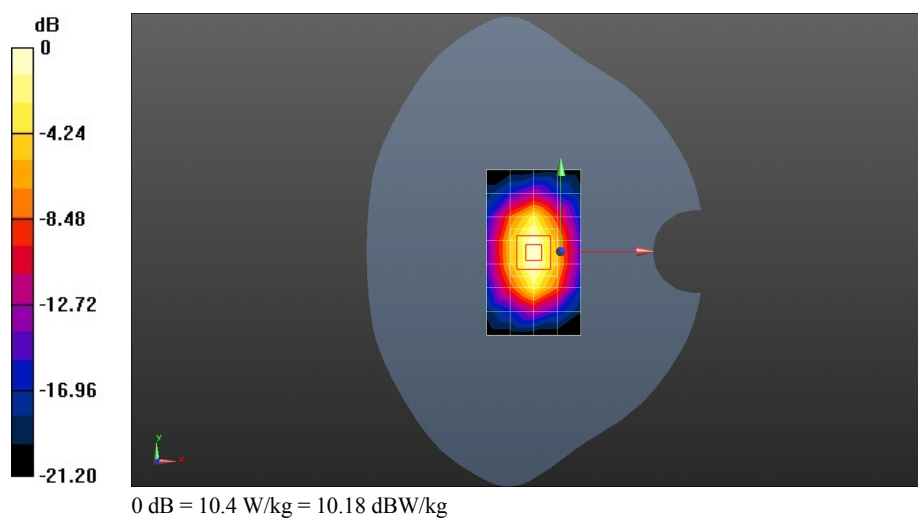

Test Laboratory: HUAWEI SAR/HAC Lab

SystemPerformanceCheck-D2450-ES-Body

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.982$ mho/m; $\epsilon_r = 52.27$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.38, 4.38, 4.38); Calibrated: 2012-10-2;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn851; Calibrated: 2012-7-25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1038
- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 12.1 W/kg


Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 87.120 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.03 W/kg

Maximum value of SAR (measured) = 14.7 W/kg

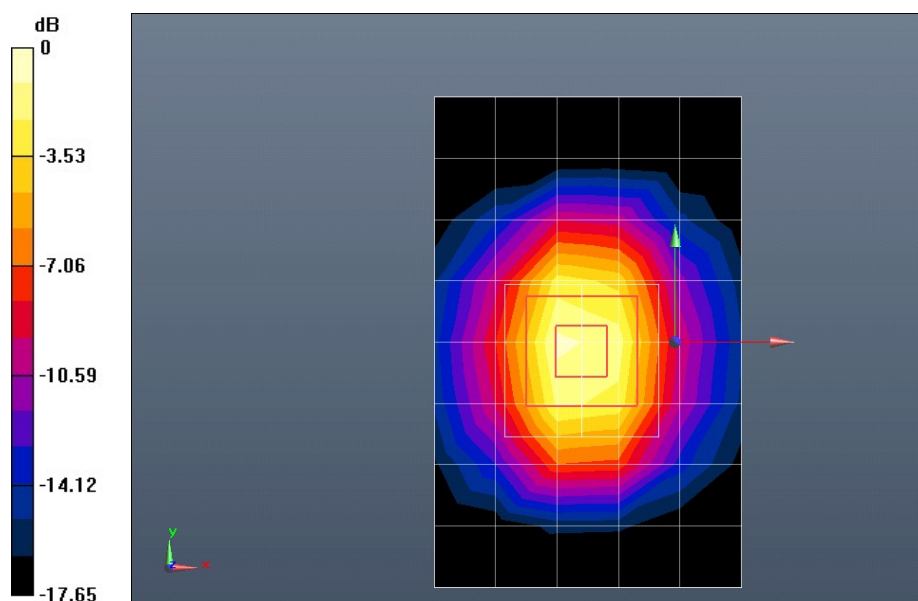

0 dB = 14.7 W/kg = 11.67 dBW/kg