



Report No.: RZA1104-0508SAR01R1



OET 65

TEST REPORT

| | |
|---------------------|--|
| Product Name | HUAWEI IDEOS X1; HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; IDEOS X1;GAGA;Gaga |
| Model | HUAWEI U8180-1/U8180-1/HUAWEI U8180/U8180/Stockholm/T-Mobile Rapport/ Android Edition™ StarShine |
| FCC ID | QISU8180-1 |
| Client | Huawei Technologies Co., Ltd. |

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

| | | | |
|------------------------------|---|--------------|---|
| Product Name | HUAWEI IDEOS X1; HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; IDEOS X1;GAGA;Gaga | Model | HUAWEI U8180-1/U8180-1/HUAWEI U8180/U8180/Stockholm/ T-Mobile Rapport/ Android Edition™ StarShine |
| FCC ID | QISU8180-1 | | |
| Report No. | RZA1104-0508SAR01R1 | | |
| Client | Huawei Technologies Co., Ltd. | | |
| Manufacturer | Huawei Technologies Co., Ltd. | | |
| Reference Standard(s) | <p>IEEE Std C95.1, 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radiofrequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.</p> <p>SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions.</p> <p>RSS-102 Issue 4 March 2010: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)</p> | | |
| Conclusion | <p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp)</p> <p style="text-align: right;">Date of issue: May 17th, 2011</p> | | |
| Comment | The test result only responds to the measured sample. | | |

Approved by 杨伟中
Yang Weizhong

Revised by 凌敏宝
Ling Minbao

Performed by 张先金
Zhang Xianjin

TABLE OF CONTENT

| | |
|---|----|
| 1. General Information | 5 |
| 1.1. Notes of the Test Report..... | 5 |
| 1.2. Testing Laboratory | 5 |
| 1.3. Applicant Information | 6 |
| 1.4. Manufacturer Information..... | 6 |
| 1.5. Information of EUT..... | 7 |
| 1.6. The Maximum SAR _{1g} Values and Conducted Power of each tested band | 9 |
| 1.7. Test Date | 9 |
| 2. Operational Conditions during Test | 10 |
| 2.1. General Description of Test Procedures | 10 |
| 2.2. GSM Test Configuration | 10 |
| 2.3. WIFI Test Configuration | 12 |
| 2.4. Test Positions..... | 12 |
| 2.4.1. Against Phantom Head..... | 12 |
| 2.4.2. Body Worn Configuration..... | 12 |
| 3. SAR Measurements System Configuration | 14 |
| 3.1. SAR Measurement Set-up | 14 |
| 3.2. DASY5 E-field Probe System | 15 |
| 3.2.1. EX3DV4 Probe Specification | 15 |
| 3.2.2. E-field Probe Calibration | 16 |
| 3.3. Other Test Equipment | 16 |
| 3.3.1. Device Holder for Transmitters | 16 |
| 3.3.2. Phantom | 17 |
| 3.4. Scanning Procedure | 17 |
| 3.5. Data Storage and Evaluation | 19 |
| 3.5.1. Data Storage..... | 19 |
| 3.5.2. Data Evaluation by SEMCAD | 19 |
| 3.6. System Check..... | 22 |
| 3.7. Equivalent Tissues..... | 23 |
| 4. Laboratory Environment..... | 24 |
| 5. Characteristics of the Test..... | 25 |
| 5.1. Applicable Limit Regulations | 25 |
| 5.2. Applicable Measurement Standards | 25 |
| 6. Conducted Output Power Measurement | 26 |
| 6.1. Summary | 26 |
| 6.2. Conducted Power Results | 26 |
| 7. Test Results | 28 |
| 7.1. Dielectric Performance..... | 28 |
| 7.2. System Check Results..... | 29 |
| 7.3. Summary of Measurement Results..... | 30 |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 4 of 178

| | |
|---|-----|
| 7.3.1. GSM 850 (GPRS/EGPRS)..... | 30 |
| 7.3.2. GSM 1900 (GPRS/EGPRS)..... | 32 |
| 7.3.3. BT/WIFI function | 35 |
| 8. Measurement Uncertainty | 40 |
| 9. Main Test Instruments | 41 |
| ANNEX A: Test Layout | 42 |
| ANNEX B: System Check Results | 46 |
| ANNEX C: Graph Results | 52 |
| ANNEX D: Probe Calibration Certificate | 127 |
| ANNEX E: D835V2 Dipole Calibration Certificate | 138 |
| ANNEX F: D1900V2 Dipole Calibration Certificate | 147 |
| ANNEX G: D2450V2 Dipole Calibration Certificate | 156 |
| ANNEX H: DAE4 Calibration Certificate..... | 165 |
| ANNEX I: The EUT Appearances and Test Configuration | 170 |

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 5 of 178

1. General Information

1.1. Notes of the Test Report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electrical report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing Laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 6 of 178

1.3. Applicant Information

Company: Huawei Technologies Co., Ltd.
Address: Bantian, Longgang District
City: Shenzhen
Postal Code: 518129
Country: P.R. China
Contact: Zhao Guiying
Telephone: 0755-28780808
Fax: 0755-28780808

1.4. Manufacturer Information

Company: Huawei Technologies Co., Ltd.
Address: Bantian, Longgang District
City: Shenzhen
Postal Code: 518129
Country: P.R.China
Telephone: 0755-28780808
Fax: 0755-28780808

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 7 of 178

1.5. Information of EUT

General Information

| | | | |
|--|---|-----------------|-----------------|
| Device Type : | Portable Device | | |
| Exposure Category: | Uncontrolled Environment / General Population | | |
| Product Name: | HUAWEI IDEOS X1; HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; IDEOS X1;GAGA;Gaga | | |
| IMEI: | 357232040005439 | | |
| Hardware Version: | HD1U813M | | |
| Software Version: | U8180V100R001C00B613 | | |
| Antenna Type: | Internal Antenna | | |
| Device Operating Configurations : | | | |
| Supporting Mode(s): | GSM 850/GSM 1900; (tested) | | |
| | WCDMA Band I/ WCDMA Band VIII; | | |
| | GSM 900/GSM 1800; | | |
| | WiFi; (tested) | | |
| | Bluetooth; | | |
| Test Modulation: | (GSM)GMSK; | | |
| Device Class: | B | | |
| GPRS Multislot Class(10): | Max Number of Timeslots in Uplink | 2 | |
| | Max Number of Timeslots in Downlink | 4 | |
| | Max Total Timeslot | 5 | |
| EGPRS Multislot Class(10): | Max Number of Timeslots in Uplink | 2 | |
| | Max Number of Timeslots in Downlink | 4 | |
| | Max Total Timeslot | 5 | |
| Operating Frequency Range(s): | Mode | Tx (MHz) | Rx (MHz) |
| | GSM 850 | 824.2 ~ 848.8 | 869.2 ~ 893.8 |
| | GSM 1900 | 1850.2 ~ 1909.8 | 1930.2 ~ 1989.8 |
| Power Class: | GSM 850: 4, tested with power level 5 GSM 1900: 1, tested with power level 0 | | |
| Test Channel: (Low - Middle - High) | 128 - 190 - 251 | (GSM 850) | (tested) |
| | 512 - 661 - 810 | (GSM 1900) | (tested) |
| | 1 - 6 - 11 | (WiFi) | (tested) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 8 of 178

Auxiliary Equipment Details

AE1:Battery

Model: HB4J1H
Manufacturer: Huawei Technologies Co., Ltd.
S/N: LACA923HI3900373

AE2:Battery

Model: HB4J1H
Manufacturer: Huawei Technologies Co., Ltd.
IMEI or SN: UNHAA29XA4314746

Equipment Under Test (EUT) is a model of HUAWEI IDEOS X1; HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; IDEOS X1;GAGA;Gaga. The device has an internal antenna for GSM/WCDMA Tx/Rx, and the other is BT/WiFi antenna that can be used for Tx/Rx. It has Personal Wireless Routers (hot spots) function. The detail about Mobile phone and Lithium Battery is in chapter 1.5 in this report. SAR is tested for GSM 850, GSM 1900 and WiFi.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 9 of 178

1.6. The Maximum SAR_{1g} Values and Conducted Power of each tested band

Head Configuration

| Mode | Channel | Position | SAR _{1g} (W/kg) |
|----------|------------|-----------------|--------------------------|
| GSM 850 | High/251 | Right, Cheek | 0.384 |
| GSM 1900 | Middle/661 | Left, Cheek | 1.340 |
| WiFi | Low/1 | Right, Tilt 15° | 0.104 |

Body Worn Configuration

| Mode | Channel | Separation distance | SAR _{1g} (W/kg) |
|---------------------|------------|---------------------|--------------------------|
| EGPRS 850, 2TXslots | High/251 | 15mm | 0.418 |
| GPRS 1900, 2TXslots | Middle/661 | 15mm | 0.505 |
| WiFi | Middle/6 | 15mm | 0.056 |
| GPRS 850, 2TXslots | High/251 | 10mm | 0.618 |
| EGPRS 1900,2TXslots | Low/512 | 10mm | 1.210 |
| WiFi | High/11 | 10mm | 0.149 |

Maximum Power

| Mode | | Max Conducted Power (dBm) | Max Average Power (dBm) |
|----------|-----------------------|------------------------------|----------------------------|
| GSM 850 | GSM | 32.90 | 23.87 |
| | GPRS(GMSK), 2TXslots | 31.24 | 25.22 |
| | EGPRS(GMSK), 2TXslots | 31.18 | 25.16 |
| GSM 1900 | GSM | 29.05 | 20.02 |
| | GPRS(GMSK), 2TXslots | 28.99 | 22.97 |
| | EGPRS(GMSK), 2TXslots | 29.02 | 23.00 |

Note: The detail Power refer to Table 5 (Power Measurement Results).

1.7. Test Date

The test is performed from April 14, 2011 to April 19, 2011.

2. Operational Conditions during Test

2.1. General Description of Test Procedures

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radiofrequency Channel Number (ARFCN) is allocated to 128, 190 and 251 in the case of GSM 850, to 512, 661 and 810 in the case of GSM 1900. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

2.2. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power lever is set to “5” in SAR of GSM 850, set to “0” in SAR of GSM 1900. Since the GPRS class is 10 for this EUT, it has at most 2 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5. The EGPRS class is 10 for this EUT; it has at most 2 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

GSM 850

GPRS (GMSK) :

| Number of timeslots in uplink assignment | reduction of maximum output power, (dB) |
|--|---|
| 1 | 0 |
| 2 | 1.5 |

EGPRS(8PSK):

| Number of timeslots in uplink assignment | reduction of maximum output power, (dB) |
|--|---|
| 1 | 0 |
| 2 | 0 |

EGPRS(GMSK):

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 11 of 178

| Number of timeslots in uplink assignment | reduction of maximum output power, (dB) |
|--|---|
| 1 | 0 |
| 2 | 1.5 |

GSM 1900

GPRS (GMSK) :

| Number of timeslots in uplink assignment | reduction of maximum output power, (dB) |
|--|---|
| 1 | 0 |
| 2 | 0 |

EGPRS(8PSK):

| Number of timeslots in uplink assignment | reduction of maximum output power, (dB) |
|--|---|
| 1 | 0 |
| 2 | 0 |

EGPRS(GMSK):

| Number of timeslots in uplink assignment | reduction of maximum output power, (dB) |
|--|---|
| 1 | 0 |
| 2 | 0 |

2.3. WIFI Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WIFI mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on channels 1, 6, 11; however, if output power reduction is necessary for channels 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels must be tested instead.

SAR is not required for 802.11g channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels. When the maximum average output channel in each frequency band is not included in the “default test channels”, the maximum channel should be tested instead of an adjacent “default test channels”, these are referred to as the “required test channels” and are illustrated in table 1.

Table 1: “Default Test Channels”

| Mode | GHz | Channel | Turbo Channel | “Default Test Channels” | | | |
|-----------|-------|-----------------|---------------|-------------------------|---------|------|--|
| | | | | 15.247 | | UNII | |
| | | | | 802.11b | 802.11g | | |
| 802.11b/g | 2.412 | 1 [#] | | √ | * | | |
| | 2.437 | 6 | 6 | √ | * | | |
| | 2.462 | 11 [#] | | √ | * | | |

Note: [#]=when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest out put channels closet to each of these channels should be tested.

√= “default test channels”

* =possible 802.11g channels with maximum average output 0.25dB>=the “default test channels”

2.4. Test Positions

2.4.1. Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

2.4.2. Body Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. The distance between the device

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 13 of 178

and the phantom was kept 15mm.

Based upon Oct. 2010 TCB council workshop - FCC presentation on personal hot spot SAR evaluation guideline, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. The distance between the device and the phantom was kept 10mm of wireless routers.

3. SAR Measurements System Configuration

3.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

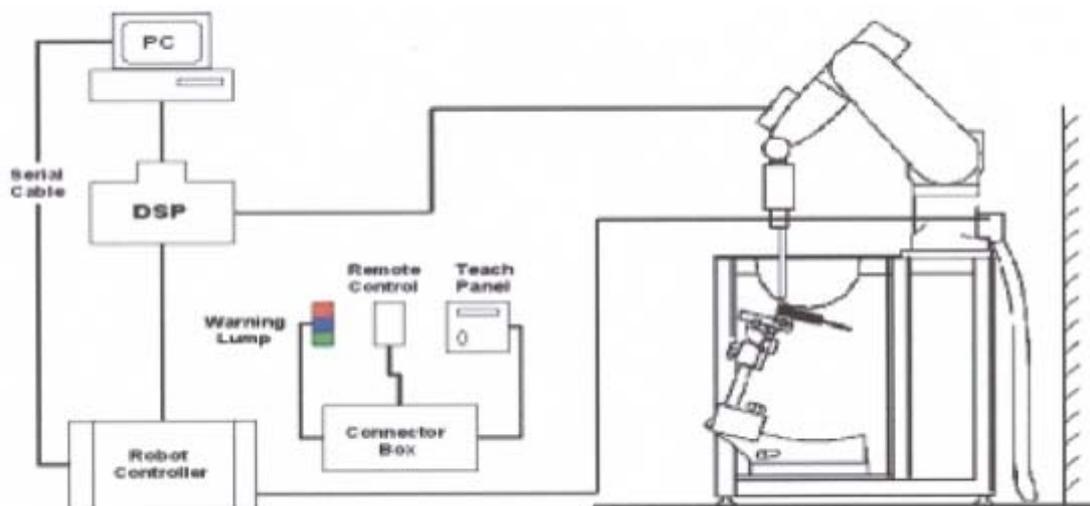


Figure 1 SAR Lab Test Measurement Set-up

3.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1. EX3DV4 Probe Specification

| | |
|---------------|---|
| Construction | Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration | ISO/IEC 17025 calibration service available |
| Frequency | 10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz) |
| Directivity | ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis) |
| Dynamic Range | 10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) |
| Dimensions | Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm |
| Application | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

3.3. Other Test Equipment

3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard.

It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Figure 4 Device Holder

3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

| | |
|-----------------|--|
| Shell Thickness | 2±0.1 mm |
| Filling Volume | Approx. 20 liters |
| Dimensions | 810 x 1000 x 500 mm (H x L x W) |
| | Available Special |



Figure 5 Generic Twin Phantom

3.4. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. ± 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 18 of 178

spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.5. Data Storage and Evaluation

3.5.1. Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

| | | |
|--------------------|---------------------------|--|
| Probe parameters: | - Sensitivity | Normi, a _{i0} , a _{i1} , a _{i2} |
| | - Conversion factor | ConvF _i |
| | - Diode compression point | Dcp _i |
| Device parameters: | - Frequency | f |
| | - Crest factor | cf |
| Media parameters: | - Conductivity | |
| | - Density | |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 20 of 178

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \dots) / (\dots \cdot 1000)$$

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 21 of 178

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3.6. System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 8 and table 9.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

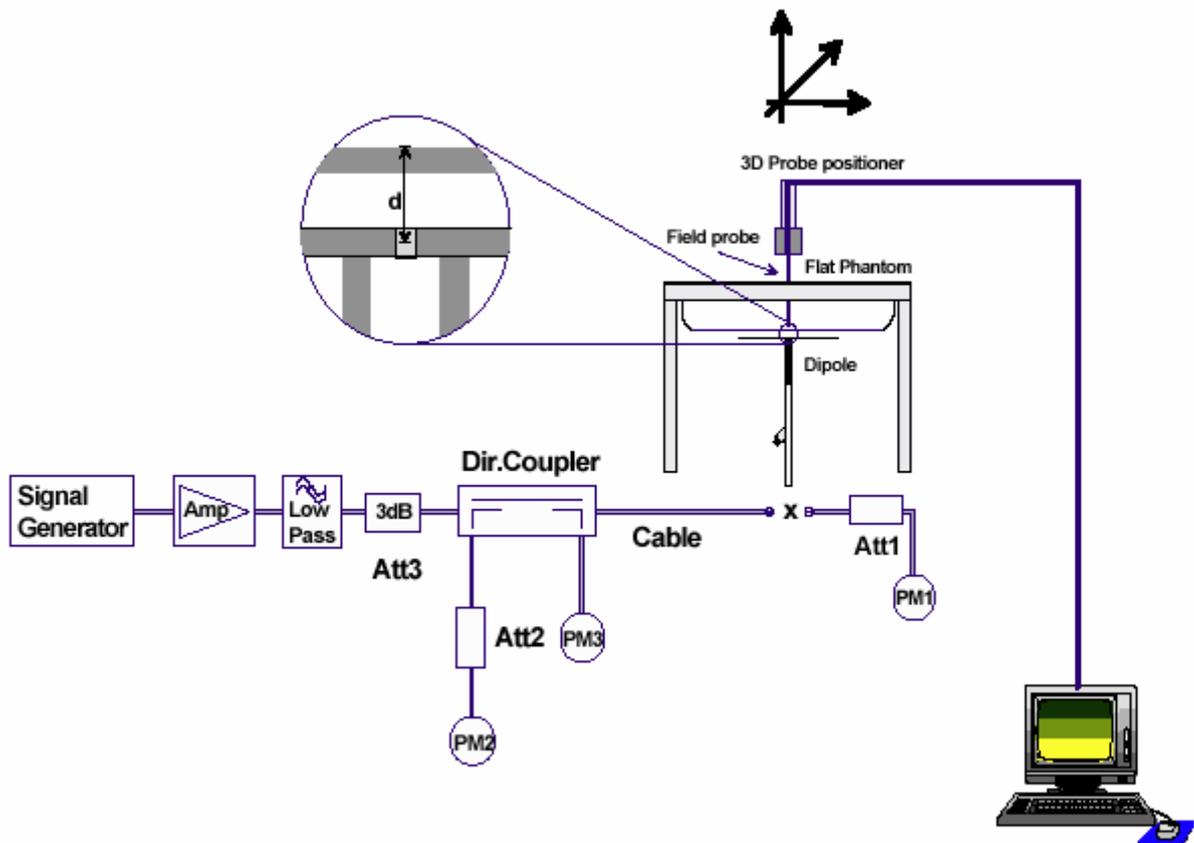


Figure 6 System Check Set-up

TA Technology (Shanghai) Co., Ltd.

Test Report

3.7. Equivalent Tissues

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The table 2 and table 3 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

Table 2: Composition of the Head Tissue Equivalent Matter

| MIXTURE% | FREQUENCY(Brain) 835MHz |
|------------------------------------|---------------------------------------|
| Water | 41.45 |
| Sugar | 56 |
| Salt | 1.45 |
| Preventol | 0.1 |
| Cellulose | 1.0 |
| Dielectric Parameters Target Value | f=835MHz $\epsilon=41.5$ $\sigma=0.9$ |

| MIXTURE% | FREQUENCY(Brain) 1900MHz |
|------------------------------------|---|
| Water | 55.242 |
| Glycol monobutyl | 44.452 |
| Salt | 0.306 |
| Dielectric Parameters Target Value | f=1900MHz $\epsilon=40.0$ $\sigma=1.40$ |

| MIXTURE% | FREQUENCY(Brain) 2450MHz |
|------------------------------------|--|
| Water | 62.7 |
| Glycol | 36.8 |
| Salt | 0.5 |
| Dielectric Parameters Target Value | f=2450MHz $\epsilon=39.20$ $\sigma=1.80$ |

Table 3: Composition of the Body Tissue Equivalent Matter

| MIXTURE% | FREQUENCY(Body) 835MHz |
|------------------------------------|--|
| Water | 52.5 |
| Sugar | 45 |
| Salt | 1.4 |
| Preventol | 0.1 |
| Cellulose | 1.0 |
| Dielectric Parameters Target Value | f=835MHz $\epsilon=55.2$ $\sigma=0.97$ |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 24 of 178

| MIXTURE% | FREQUENCY (Body) 1900MHz |
|---------------------------------------|---|
| Water | 69.91 |
| Glycol monobutyl | 29.96 |
| Salt | 0.13 |
| Dielectric Parameters Target Value | f=1900MHz $\epsilon=53.3$ $\sigma=1.52$ |

| MIXTURE% | FREQUENCY(Body) 2450MHz |
|---------------------------------------|--|
| Water | 73.2 |
| Glycol | 26.7 |
| Salt | 0.1 |
| Dielectric Parameters Target Value | f=2450MHz $\epsilon=52.70$ $\sigma=1.95$ |

4. Laboratory Environment

Table 4: The Ambient Conditions during Test

| | |
|---|---------------------------|
| Temperature | Min. = 20°C, Max. = 25 °C |
| Relative humidity | Min. = 30%, Max. = 70% |
| Ground system resistance | < 0.5 Ω |
| Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards. | |

5. Characteristics of the Test

5.1. Applicable Limit Regulations

IEEE Std C95.1, 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radiofrequency Electromagnetic Fields, 3 kHz to 300 GHz.

5.2. Applicable Measurement Standards

IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions.

RSS-102 Issue 4 March 2010: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

6. Conducted Output Power Measurement

6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power.

Conducted output power was measured using an integrated RF connector and attached RF cable.

This result contains conducted output power for the EUT.

6.2. Conducted Power Results

Table 5: Conducted Power Measurement Results

| GSM 850 | | | Conducted Power(dBm) | | | | Average power(dBm) | | |
|--------------|----------|--------|----------------------|-------------|-------------|---------|--------------------|--------------|--------------|
| | | | Channel 128 | Channel 190 | Channel 251 | | Channel 128 | Channel 190 | Channel 251 |
| GSM | Before | | 32.21 | 32.61 | 32.90 | -9.03dB | 23.18 | 23.58 | 23.87 |
| | After | | 32.20 | 32.59 | 32.88 | -9.03dB | 23.17 | 23.56 | 23.85 |
| GPRS (GMSK) | 1TXslot | Before | 32.19 | 32.62 | 32.89 | -9.03dB | 23.16 | 23.59 | 23.86 |
| | 2TXslots | Before | 30.47 | 30.91 | 31.24 | -6.02dB | 24.45 | 24.89 | 25.22 |
| | | After | 30.45 | 30.90 | 31.23 | -6.02dB | 24.43 | 24.88 | 25.21 |
| EGPRS (GMSK) | 1TXslot | Before | 32.19 | 32.59 | 32.88 | -9.03dB | 23.16 | 23.56 | 23.85 |
| | 2TXslots | Before | 30.43 | 30.89 | 31.18 | -6.02dB | 24.41 | 24.87 | 25.16 |
| | | After | 30.41 | 30.87 | 31.15 | -6.02dB | 24.39 | 24.85 | 25.13 |
| EGPRS (8PSK) | 1TXslot | Before | 26.23 | 26.62 | 26.96 | -9.03dB | 17.2 | 17.59 | 17.93 |
| | 2TXslots | Before | 26.21 | 26.62 | 26.94 | -6.02dB | 20.19 | 20.6 | 20.92 |
| GSM 1900 | | | Conducted Power(dBm) | | | | Average power(dBm) | | |
| | | | Channel 512 | Channel 661 | Channel 810 | | Channel 512 | Channel 661 | Channel 810 |
| GSM | Before | | 28.93 | 29.05 | 28.98 | -9.03dB | 19.90 | 20.02 | 19.95 |
| | After | | 28.91 | 29.04 | 28.95 | -9.03dB | 19.88 | 20.01 | 19.92 |
| GPRS (GMSK) | 1TXslot | Before | 28.91 | 29.04 | 28.97 | -9.03dB | 19.88 | 20.01 | 19.94 |
| | 2TXslots | Before | 28.90 | 28.99 | 28.92 | -6.02dB | 22.88 | 22.97 | 22.90 |
| | | After | 28.87 | 28.95 | 28.90 | -6.02dB | 22.85 | 22.93 | 22.88 |
| EGPRS (GMSK) | 1TXslot | Before | 28.90 | 29.03 | 28.95 | -9.03dB | 19.87 | 20 | 19.92 |
| | 2TXslots | Before | 28.89 | 29.02 | 28.93 | -6.02dB | 22.87 | 23.00 | 22.91 |
| | | After | 28.85 | 29.01 | 28.91 | -6.02dB | 22.83 | 22.99 | 22.89 |
| EGPRS (8PSK) | 1TXslot | Before | 26.02 | 26.11 | 26.03 | -9.03dB | 16.99 | 17.08 | 17.00 |
| | 2TXslots | Before | 25.90 | 26.01 | 25.97 | -6.02dB | 19.88 | 19.99 | 19.95 |

Note:

1) Division Factors

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 27 of 178

To average the power, the division factor is as follows:

1 TX- slot = 1 transmit time slot out of 8 time slots

=> conducted power divided by (8/1) => -9.03 dB

2 TX- slots = 2 transmit time slots out of 8 time slots

=> conducted power divided by (8/2) => -6.02 dB

2) Average power numbers

The maximum power numbers are marks in bold.

7. Test Results

7.1. Dielectric Performance

Table 6: Dielectric Performance of Head Tissue Simulating Liquid

| Frequency | Description | Dielectric Parameters | | Temp °C |
|---------------------------|--------------------------------|------------------------|---------------------|------------|
| | | ϵ_r | σ (s/m) | |
| 835MHz (head) | Target value ± 5% window | 41.50 39.43 — 43.58 | 0.90 0.86 — 0.95 | / |
| | Measurement value 2011-4-14 | 41.76 | 0.90 | 21.8 |
| 1900MHz (head) | Target value ±5% window | 40.00 38.00 — 42.00 | 1.40 1.33 — 1.47 | / |
| | Measurement value 2011-4-14 | 39.98 | 1.41 | 21.9 |
| 2450MHz (head) | Target value ±5% window | 39.20 37.24 — 41.16 | 1.80 1.71 — 1.89 | / |
| | Measurement value 2011-4-19 | 39.10 | 1.81 | 21.7 |

Table 7: Dielectric Performance of Body Tissue Simulating Liquid

| Frequency | Description | Dielectric Parameters | | Temp °C |
|---------------------------|--------------------------------|------------------------|---------------------|------------|
| | | ϵ_r | σ (s/m) | |
| 835MHz (body) | Target value ±5% window | 55.20 52.44 — 57.96 | 0.97 0.92 — 1.02 | / |
| | Measurement value 2011-4-15 | 56.25 | 0.99 | 21.9 |
| 1900MHz (body) | Target value ±5% window | 53.30 50.64 — 55.97 | 1.52 1.44 — 1.60 | / |
| | Measurement value 2011-4-16 | 53.18 | 1.53 | 21.7 |
| 2450MHz (body) | Target value ±5% window | 52.70 50.07 — 55.34 | 1.95 1.85 — 2.05 | / |
| | Measurement value 2011-4-19 | 51.19 | 1.94 | 21.8 |

TA Technology (Shanghai) Co., Ltd.

Test Report

7.2. System Check Results

Table 8: System Check for Head Tissue Simulating Liquid

| Frequency | Description | SAR(W/kg) | | Dielectric Parameters | | Temp |
|-----------|-----------------------------------|---------------------|---------------------|-----------------------|----------------|------|
| | | 10g | 1g | ϵ_r | σ (s/m) | °C |
| 835MHz | Recommended result ±10% window | 1.56 1.40 — 1.72 | 2.39 2.15 — 2.63 | 41.2 | 0.89 | / |
| | Measurement value 2011-4-14 | 1.6 | 2.42 | 41.76 | 0.90 | 21.8 |
| 1900MHz | Recommended result ±10% window | 5.22 4.70 — 5.74 | 10 9.00 — 11.00 | 39.5 | 1.44 | / |
| | Measurement value 2011-4-14 | 5.34 | 10.3 | 39.98 | 1.41 | 21.9 |
| 2450 MHz | Recommended result ±10% window | 6.24 5.62 — 6.86 | 13.3 11.97—14.63 | 38.7 | 1.77 | / |
| | Measurement value 2011-4-19 | 6.50 | 14.05 | 39.10 | 1.81 | 21.7 |

Note: 1. The graph results see ANNEX B.

2. Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

Table 9: System Check for Body Tissue Simulating Liquid

| Frequency | Description | SAR(W/kg) | | Dielectric Parameters | | Temp |
|-----------|-----------------------------------|---------------------|----------------------|-----------------------|----------------|------|
| | | 10g | 1g | ϵ_r | σ (s/m) | °C |
| 835MHz | Recommended result ±10% window | 1.63 1.47 — 1.79 | 2.49 2.24 — 2.74 | 54.6 | 0.98 | / |
| | Measurement value 2011-4-15 | 1.65 | 2.52 | 56.25 | 0.99 | 21.9 |
| 1900 MHz | Recommended result ±10% window | 5.52 4.97 — 6.07 | 10.3 9.27 — 11.33 | 53.5 | 1.54 | / |
| | Measurement value 2011-4-16 | 5.33 | 10.17 | 53.18 | 1.53 | 21.7 |
| 2450 MHz | Recommended result ±10% window | 5.97 5.37 — 6.57 | 13 11.7—14.3 | 51.8 | 2.01 | / |
| | Measurement value 2011-4-19 | 6.46 | 14.00 | 51.19 | 1.94 | 21.8 |

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 30 of 178

7.3. Summary of Measurement Results

7.3.1. GSM 850 (GPRS/EGPRS)

Table 10: SAR Values [GSM 850(GPRS/EGPRS)]

| Limit of SAR | | 10 g Average | 1 g Average | Power Drift | Graph Results |
|--|------------|--------------------------|-------------|------------------|---------------|
| | | 2.0 W/kg | 1.6 W/kg | ± 0.21 dB | |
| Different Test Position | Channel | Measurement Result(W/kg) | | Power Drift (dB) | |
| | | 10 g Average | 1 g Average | | |
| Test Position of Head with Battery(SN:LACA923HI3900373) | | | | | |
| Left hand, Touch cheek | Middle/190 | 0.129 | 0.185 | -0.038 | Figure 13 |
| Left hand, Tilt 15 Degree | Middle/190 | 0.086 | 0.112 | -0.036 | Figure 14 |
| Right hand, Touch cheek | High/251 | 0.281 | 0.384 | -0.047 | Figure 15 |
| | Middle/190 | 0.188 | 0.256 | -0.116 | Figure 16 |
| | Low/128 | 0.142 | 0.194 | -0.049 | Figure 17 |
| Right hand, Tilt 15 Degree | Middle/190 | 0.089 | 0.117 | 0.084 | Figure 18 |
| Worst Case Position of Head with Battery(SN:UNHAA29XA4314746) | | | | | |
| Right hand, Touch cheek | High/251 | 0.282 | 0.380 | -0.022 | Figure 19 |
| Test position of Body with Battery(SN:LACA923HI3900373) (Distance 15mm) | | | | | |
| Towards Ground(GSM) | Middle/190 | 0.143 | 0.199 | -0.039 | Figure 20 |
| Towards Ground (2TXslots) | High/251 | 0.293 | 0.410 | -0.007 | Figure 21 |
| | Middle/190 | 0.192 | 0.268 | -0.037 | Figure 22 |
| | Low/128 | 0.145 | 0.203 | 0.010 | Figure 23 |
| Towards Phantom(2TXslots) | Middle/190 | 0.130 | 0.176 | -0.023 | Figure 24 |
| Worst Case Position of Body with Earphone(SN:LACA923HI3900373) (Distance 15mm) | | | | | |
| Towards Ground(GSM) | High/251 | 0.162 | 0.223 | 0.044 | Figure 25 |
| Worst case position of Body with EGPRS(SN:LACA923HI3900373) (GMSK, Distance 15mm) | | | | | |
| Towards Ground(2TXslots) | High/251 | 0.291 | 0.418 | 0.006 | Figure 26 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.
4. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 11: SAR Values [GSM 850(wireless routers incorporated in device)]

| Limit of SAR | | 10 g Average | 1 g Average | Power | Graph Results |
|--|------------|--------------------------|-----------------|------------|---------------|
| | | 2.0 W/kg | 1.6 W/kg | ± 0.21 dB | |
| Different Test Position | Channel | Measurement Result(W/kg) | | Power | |
| | | 10 g Average | 1 g Average | Drift (dB) | |
| Test position of Body with Battery(SN:LACA923HI3900373) (Distance 10mm) | | | | | |
| Towards Ground (2TXslots) | High/251 | 0.434(max.cube) | 0.618(max.cube) | -0.009 | Figure 27 |
| | Middle/190 | 0.319(max.cube) | 0.454(max.cube) | 0.025 | Figure 28 |
| | Low/128 | 0.221(max.cube) | 0.312(max.cube) | 0.060 | Figure 29 |
| Towards Phantom (2TXslots) | Middle/190 | 0.179 | 0.242 | -0.030 | Figure 30 |
| Left Edge(2TXslots) | Middle/190 | 0.090 | 0.131 | 0.024 | Figure 31 |
| Right Edge(2TXslots) | Middle/190 | 0.168 | 0.240 | -0.051 | Figure 32 |
| Top Edge(2TXslots) | / | / | / | / | / |
| Bottom Edge(2TXslots) | Middle/190 | 0.030 | 0.049 | 0.050 | Figure 33 |
| Worst Case Position of Body with EGPRS (GMSK, Distance 10mm) | | | | | |
| Towards Ground (2TXslots) | High/251 | 0.432(max.cube) | 0.614(max.cube) | -0.035 | Figure 34 |
| Worst Case Position of Body with Battery(SN:UNHAA29XA4314746) (Distance 10mm) | | | | | |
| Towards Ground (2TXslots) | High/251 | 0.427 | 0.617 | -0.001 | Figure 35 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm(see ANNEX I). Based upon Oct. 2010 TCB council workshop - FCC presentation on personal hot spot SAR evaluation guideline, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. Top Edge with 1 cm separation distance is excluded from SAR evaluation.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above.

Table 12: Extrapolated SAR Values of highest measured SAR [GSM 850 (GPRS/EGPRS)]

| Different Test Position | Channel | Conducted Power(dBm) | 1g Average (W/kg) | Tune-up procedures | 1g Average Limit 1.6 W/kg |
|---|----------|----------------------|-------------------|--------------------|----------------------------|
| | | Measurement Result | | MAX Power(dBm) | Extrapolated Result (W/kg) |
| GSM | | | | | |
| Right hand, Touch cheek | High/251 | 32.90 | 0.384 | 33.30 | 0.421 |
| GPRS(GMSK, 2TXslots, wireless routers incorporated) | | | | | |
| Towards Ground | High/251 | 31.24 | 0.618 | 31.70 | 0.687 |
| EGPRS(GMSK, 2TXslots, wireless routers incorporated) | | | | | |
| Towards Ground | High/251 | 31.18 | 0.614 | 31.60 | 0.676 |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 32 of 178

7.3.2. GSM 1900 (GPRS/EGPRS)

Table 13: SAR Values [GSM 1900(GPRS/EGPRS)]

| Limit of SAR | | 10 g Average | 1 g Average | Power Drift | Graph Results |
|--|------------|--------------------------|-----------------|------------------|---------------|
| | | 2.0 W/kg | 1.6 W/kg | ± 0.21 dB | |
| Different Test Position | Channel | Measurement Result(W/kg) | | Power Drift (dB) | |
| | | 10 g Average | 1 g Average | | |
| Test Position of Head with Battery(SN:LACA923HI3900373) | | | | | |
| Left hand, Touch cheek | High/810 | 0.638(max.cube) | 1.190(max.cube) | -0.114 | Figure 36 |
| | Middle/661 | 0.729(max.cube) | 1.340(max.cube) | 0.069 | Figure 37 |
| | Low/512 | 0.696(max.cube) | 1.280(max.cube) | 0.022 | Figure 38 |
| Left hand, Tilt 15 Degree | Middle/661 | 0.165 | 0.273 | -0.032 | Figure 39 |
| Right hand, Touch cheek | High/810 | 0.561 | 0.988 | -0.033 | Figure 40 |
| | Middle/661 | 0.616 | 1.080 | -0.090 | Figure 41 |
| | Low/512 | 0.597 | 1.040 | -0.066 | Figure 42 |
| Right hand, Tilt 15 Degree | Middle/661 | 0.161 | 0.272 | -0.053 | Figure 43 |
| Worst Case Position of Head with Battery(SN:UNHAA29XA4314746) | | | | | |
| Left hand, Touch cheek | Middle/661 | 0.707(max.cube) | 1.290(max.cube) | -0.036 | Figure 44 |
| Test position of Body with Battery(SN:LACA923HI3900373) (Distance 15mm) | | | | | |
| Towards Ground (GSM) | Middle/661 | 0.164 | 0.277 | -0.034 | Figure 45 |
| Towards Ground(2TXslots) | High/810 | 0.285 | 0.478 | -0.107 | Figure 46 |
| | Middle/661 | 0.301 | 0.505 | -0.130 | Figure 47 |
| | Low/512 | 0.261(max.cube) | 0.433(max.cube) | -0.059 | Figure 48 |
| Towards Phantom(2TXslots) | Middle/661 | 0.307 | 0.494 | 0.008 | Figure 49 |
| Worst Case Position of Body with Earphone(SN:LACA923HI3900373) (Distance 15mm) | | | | | |
| Towards Ground(GSM) | Middle/661 | 0.138(max.cube) | 0.226(max.cube) | 0.036 | Figure 50 |
| Worst case position of Body with EGPRS(SN:LACA923HI3900373) (GMSK, Distance 15mm) | | | | | |
| Towards Ground(2TXslots) | Middle/661 | 0.277(max.cube) | 0.472(max.cube) | -0.044 | Figure 51 |

Note: 1.The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.
4. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.
5. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above.

TA Technology (Shanghai) Co., Ltd.

Test Report

Table 14: SAR Values [GSM 1900(wireless routers incorporated in device)]

| Limit of SAR | | 10 g Average | 1 g Average | Power | Graph Results |
|--|------------|--------------------------|-----------------|------------|---------------|
| | | 2.0 W/kg | 1.6 W/kg | ± 0.21 dB | |
| Different Test Position | Channel | Measurement Result(W/kg) | | Power | |
| | | 10 g Average | 1 g Average | Drift (dB) | |
| Test position of Body with Battery(SN:LACA923HI3900373) (Distance 10mm) | | | | | |
| Towards Ground (2TXslots) | High/810 | 0.530(max.cube) | 0.895(max.cube) | -0.075 | Figure 52 |
| | Middle/661 | 0.650(max.cube) | 1.120(max.cube) | -0.119 | Figure 53 |
| | Low/512 | 0.685(max.cube) | 1.160(max.cube) | -0.007 | Figure 54 |
| Towards Phantom (2TXslots) | High/810 | 0.552 | 0.894 | 0.075 | Figure 55 |
| | Middle/661 | 0.650 | 1.040 | 0.031 | Figure 56 |
| | Low/512 | 0.707 | 1.130 | -0.044 | Figure 57 |
| Left Edge(2TXslots) | Middle/661 | 0.164 | 0.273 | -0.121 | Figure 58 |
| Right Edge(2TXslots) | Middle/661 | 0.158 | 0.261 | -0.020 | Figure 59 |
| Top Edge(2TXslots) | / | / | / | / | / |
| Bottom Edge(2TXslots) | Middle/661 | 0.340 | 0.594 | -0.036 | Figure 60 |
| Worst Case Position of Body with EGPRS (GMSK, Distance 10mm) | | | | | |
| Towards Ground (2TXslots) | Low/512 | 0.703 | 1.210 | -0.041 | Figure 61 |
| Worst Case Position of Body with Battery(SN:UNHAA29XA4314746) (Distance 10mm) | | | | | |
| Towards Ground (2TXslots) | Low/512 | 0.632 | 1.060 | -0.080 | Figure 62 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. WWAN antenna is located at bottom edge; antenna-to-top edge distance is more than 2.5 cm(see ANNEX I). Based upon Oct. 2010 TCB council workshop - FCC presentation on personal hot spot SAR evaluation guideline, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. Top Edge with 1 cm separation distance is excluded from SAR evaluation.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 34 of 178


Table 15: Extrapolated SAR Values of highest measured SAR [GSM 1900 (GPRS/EGPRS)]

| Different Test Position | Channel | Conducted Power(dBm) | 1g Average (W/kg) | Tune-up procedures | 1g Average Limit 1.6 W/kg |
|---|------------|----------------------|-------------------|--------------------|----------------------------|
| | | Measurement Result | | MAX Power(dBm) | Extrapolated Result (W/kg) |
| GSM | | | | | |
| Left hand, Touch cheek | Middle/661 | 29.05 | 1.340 | 29.70 | 1.560 |
| GPRS(GMSK, 2TXslots, wireless routers incorporated) | | | | | |
| Towards Ground | Low/512 | 28.90 | 1.160 | 29.70 | 1.390 |
| EGPRS(GMSK, 2TXslots, wireless routers incorporated) | | | | | |
| Towards Ground | Low/512 | 28.89 | 1.210 | 29.70 | 1.460 |

TA Technology (Shanghai) Co., Ltd. Test Report

7.3.3. BT/WIFI function

The distance between BT/WIFI antenna and GSM/WCDMA antenna is >5cm. The location of the antennas inside mobile phone is shown below (refer to Annex I):

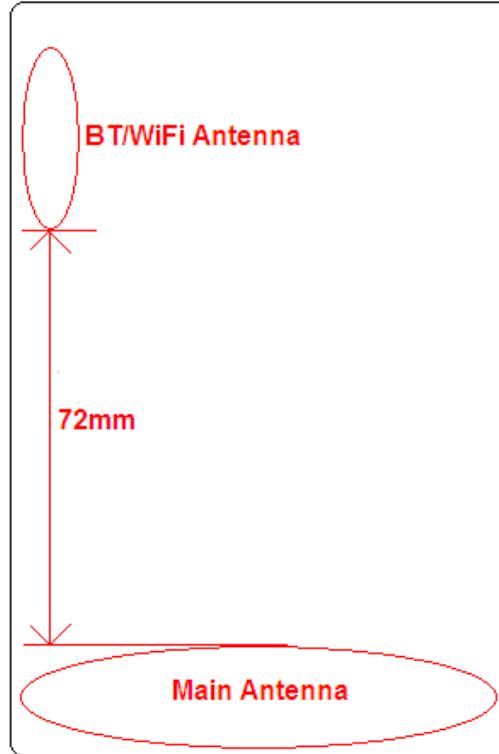

The output power of BT antenna is as following:

| | Ch 0 2402 MHz | Ch 39 2441 MHz | Ch 78 2480 MHz |
|-------------------------------------|--------------------------|---------------------------|---------------------------|
| Average Conducted Output Power(dBm) | 6.37 | 6.12 | 8.22 |

The output power of WIFI antenna is as following:

| Mode | Channel | Data rate (Mbps) | | AV Power (dBm) | PK Power (dBm) | |
|------|---------|------------------|--------|----------------|----------------|-------|
| 11b | 1 | 1 | Before | 14.25 | 17.21 | |
| | | | After | 14.29 | 17.25 | |
| | | 2 | Before | 14.36 | 17.16 | |
| | | | 5.5 | Before | 14.24 | 17.32 |
| | | | 11 | Before | 14.43 | 17.56 |
| | 6 | 1 | Before | 14.98 | 17.38 | |
| | | | After | 14.96 | 17.35 | |
| | | 2 | Before | 14.89 | 17.45 | |
| | | | 5.5 | Before | 14.75 | 17.46 |
| | | | 11 | Before | 15.01 | 17.52 |
| | 11 | 1 | Before | 15.50 | 17.52 | |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 36 of 178

| | | | | | |
|----------|----|------|--------|-------|-------|
| | | | After | 15.47 | 17.56 |
| | | 2 | Before | 15.58 | 17.53 |
| | | 5.5 | Before | 15.65 | 17.32 |
| | | 11 | Before | 15.71 | 17.26 |
| 11g | 1 | 7 | | 9.59 | 17.21 |
| | | 9 | | 9.48 | 17.24 |
| | | 12 | | 9.38 | 17.35 |
| | | 15 | | 9.41 | 17.42 |
| | | 24 | | 9.57 | 17.21 |
| | | 37 | | 9.61 | 17.56 |
| | | 48 | | 9.49 | 17.75 |
| | | 54 | | 9.62 | 17.24 |
| | 6 | 7 | | 10.05 | 15.81 |
| | | 9 | | 10.08 | 15.34 |
| | | 12 | | 10.11 | 15.25 |
| | | 15 | | 9.99 | 15.45 |
| | | 24 | | 10.08 | 15.38 |
| | | 37 | | 10.11 | 14.59 |
| | | 48 | | 10.07 | 14.71 |
| | | 54 | | 10.12 | 14.44 |
| | 11 | 7 | | 10.23 | 17.24 |
| | | 9 | | 10.34 | 17.31 |
| | | 12 | | 10.29 | 17.45 |
| | | 15 | | 10.51 | 17.68 |
| | | 24 | | 10.59 | 17.64 |
| | | 37 | | 10.61 | 17.78 |
| | | 48 | | 10.59 | 17.81 |
| | | 54 | | 10.63 | 17.91 |
| 11n HT20 | 1 | 7.5 | | 5.19 | 14.81 |
| | | 12 | | 5.14 | 14.79 |
| | | 19.5 | | 5.13 | 14.65 |
| | | 27 | | 5.15 | 14.59 |
| | | 39 | | 5.14 | 14.71 |
| | | 52 | | 5.25 | 14.46 |
| | | 58.5 | | 5.23 | 14.25 |
| | | 75 | | 5.27 | 14.89 |
| | 6 | 7.5 | | 5.45 | 15.37 |
| | | 12 | | 5.68 | 15.35 |
| | | 19.5 | | 5.34 | 15.14 |
| | | 27 | | 5.49 | 15.29 |
| | | 39 | | 5.39 | 15.33 |
| | | 52 | | 5.61 | 15.25 |
| | | 58.5 | | 5.71 | 15.34 |

TA Technology (Shanghai) Co., Ltd.

Test Report

| | | | | |
|--|----|------|------|-------|
| | 11 | 75 | 5.76 | 15.62 |
| | | 7.5 | 6.34 | 15.35 |
| | | 12 | 6.31 | 15.53 |
| | | 19.5 | 6.41 | 15.83 |
| | | 27 | 6.52 | 15.64 |
| | | 39 | 6.34 | 15.81 |
| | | 52 | 6.48 | 15.57 |
| | | 58.5 | 6.37 | 15.44 |
| | | 75 | 6.54 | 15.59 |

Note: 1. KDB 248227-SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than measured on the corresponding 802.11b channels.

Output Power Thresholds for Unlicensed Transmitters

| | 2.45 | 5.15 - 5.35 | 5.47 - 5.85 | GHz |
|---|------|-------------|-------------|-----------|
| P_{Ref} | 12 | 6 | 5 | mW |
| Device output power should be rounded to the nearest mW to compare with values specified in this table. | | | | |

Stand-alone SAR

According to the output power measurement result and the distance between BT/WiFi antenna and GSM/WCDMA antenna we can draw the conclusion that:

stand-alone SAR are not required for BT, because the output power of BT transmitter is $\leq 2P_{Ref}$ ($2P_{Ref}=13.8\text{dBm}$) and its antenna is $\geq 5\text{cm}$ from GSM/WCDMA antenna.

stand-alone SAR are not required for BT, because the output power of BT transmitter is $\leq P_{Ref}$ ($P_{Ref}=10.8\text{dBm}$) and its antenna is $\leq 2.5\text{cm}$ from wifi antenna.

stand-alone SAR are required for WiFi, because the output power of WiFi transmitter is $\geq 2P_{Ref}$ ($2P_{Ref}=13.8\text{dBm}$) and its antenna is $\geq 5\text{cm}$ from other antenna.

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 16: SAR Values (802.11b)

| Limit of SAR (W/kg) | | 10 g Average | 1g Average | Power Drift (dB) | Graph Results |
|--|----------|--------------------------|------------|------------------|---------------|
| | | 2.0 | 1.6 | ± 0.21 | |
| Different Test Position | Channel | Measurement Result(W/kg) | | Power Drift (dB) | |
| | | 10 g Average | 1g Average | | |
| Test Position of Head with Battery(SN:LACA923HI3900373) | | | | | |
| Left hand, Touch cheek | Middle/6 | 0.042 | 0.090 | -0.052 | Figure 63 |
| Left hand, Tilt 15 Degree | Middle/6 | 0.039 | 0.075 | -0.065 | Figure 64 |
| Right hand, Touch cheek | Middle/6 | 0.040 | 0.072 | -0.198 | Figure 65 |
| Right hand, Tilt 15 Degree | High/11 | 0.043 | 0.078 | -0.041 | Figure 66 |
| | Middle/6 | 0.046 | 0.090 | -0.048 | Figure 67 |
| | Low/1 | 0.053 | 0.103 | 0.180 | Figure 68 |
| Worst Case Position of Head with Battery(SN:UNHAA29XA4314746) | | | | | |
| Right hand, Tilt 15 Degree | Low/1 | 0.054 | 0.104 | -0.020 | Figure 69 |
| Test position of Body with Battery(SN:LACA923HI3900373) (Distance 15mm) | | | | | |
| Towards Ground | High/11 | 0.027 | 0.048 | -0.059 | Figure 70 |
| | Middle/6 | 0.031 | 0.056 | 0.111 | Figure 71 |
| | Low/1 | 0.030 | 0.053 | -0.030 | Figure 72 |
| Towards phantom | Middle/6 | 0.015 | 0.027 | -0.086 | Figure 73 |
| Worst case position of Body with Earphone (Distance 15mm) | | | | | |
| Towards Ground | Middle/6 | 0.029 | 0.054 | -0.166 | Figure 74 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.
4. KDB 248227-SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than measured on the corresponding 802.11b channels.

TA Technology (Shanghai) Co., Ltd.

Test Report

Table 17: SAR Values [802.11b (wireless routers incorporated in device)]

| Limit of SAR | | 10 g Average | 1 g Average | Power | Graph Results |
|--|----------|--------------------------|-------------|------------|---------------|
| | | 2.0 W/kg | 1.6 W/kg | ± 0.21 dB | |
| Different Test Position | Channel | Measurement Result(W/kg) | | Power | |
| | | 10 g Average | 1 g Average | Drift (dB) | |
| Test position of Body with Battery(SN:LACA923HI3900373) (Distance 10mm) | | | | | |
| Towards Ground | High/11 | 0.079 | 0.145 | 0.182 | Figure 75 |
| | Middle/6 | 0.063 | 0.115 | -0.012 | Figure 76 |
| | Low/1 | 0.076 | 0.140 | 0.040 | Figure 77 |
| Towards phantom | Middle/6 | 0.025 | 0.044 | 0.180 | Figure 78 |
| Left Edge | / | / | / | / | / |
| Right Edge | Middle/6 | 0.032 | 0.068 | -0.099 | Figure 79 |
| Top Edge | Middle/6 | 0.023 | 0.044 | -0.038 | Figure 80 |
| Bottom Edge | / | / | / | / | / |
| Worst Case Position of Body with Battery(SN:UNHAA29XA4314746) (Distance 10mm) | | | | | |
| Towards Ground | High/11 | 0.081 | 0.149 | -0.022 | Figure 81 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. WLAN antenna is located at right edge, near to top edge; antenna-to-left edge distance is 4.2cm>2.5cm; antenna-to-bottom edge distance is 7.5cm>2.5cm (see ANNEX I). Based upon Oct. 2010 TCB council workshop - FCC presentation on personal hot spot SAR evaluation guideline, when the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. Left Edge and bottom edge with 1 cm separation distance are excluded from SAR evaluation.

Simultaneous SAR

About BT and GSM/WCDMA antenna, stand-alone SAR are not required for BT and BT antenna is $\geq 5\text{cm}$ from GSM/WCDMA antenna, so Simultaneous SAR are not required for BT and GSM/WCDMA antenna.

About WiFi and GSM/WCDMA antenna, WiFi antenna is $\geq 5\text{cm}$ from GSM/WCDMA antenna, $SAR_{MAX. GSM/WCDMA} + SAR_{MAX. WIFI} = 1.340 \text{ W/kg} + 0.090 \text{ W/kg} = 1.430 < 1.6 \text{ W/kg}$, so Simultaneous SAR are not required for WiFi and GSM/WCDMA antenna.

About BT and wifi antenna, $SAR_{MAX. WIFI} < 1.2 \text{ W/kg}$ and BT antenna is $\leq 2.5\text{cm}$ from wifi antenna, so Simultaneous SAR are not required for BT and wifi antenna.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 40 of 178

8. Measurement Uncertainty

| No. | source | Type | Uncertainty Value (%) | Probability Distribution | k | c _i | Standard uncertainty u _i (%) | Degree of freedom V _{eff} or V _i |
|---------------------|--|------|-----------------------|--------------------------|------------|----------------|---|--|
| 1 | System repetivity | A | 0.5 | N | 1 | 1 | 0.5 | 9 |
| Measurement system | | | | | | | | |
| 2 | -probe calibration | B | 5.9 | N | 1 | 1 | 5.9 | ∞ |
| 3 | -axial isotropy of the probe | B | 4.7 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | 1.9 | ∞ |
| 4 | - Hemispherical isotropy of the probe | B | 9.4 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | 3.9 | ∞ |
| 6 | -boundary effect | B | 1.9 | R | $\sqrt{3}$ | 1 | 1.1 | ∞ |
| 7 | -probe linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| 8 | - System detection limits | B | 1.0 | R | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| 9 | -readout Electronics | B | 1.0 | N | 1 | 1 | 1.0 | ∞ |
| 10 | -response time | B | 0 | R | $\sqrt{3}$ | 1 | 0 | ∞ |
| 11 | -integration time | B | 4.32 | R | $\sqrt{3}$ | 1 | 2.5 | ∞ |
| 12 | -noise | B | 0 | R | $\sqrt{3}$ | 1 | 0 | ∞ |
| 13 | -RF Ambient Conditions | B | 3 | R | $\sqrt{3}$ | 1 | 1.73 | ∞ |
| 14 | -Probe Positioner Mechanical Tolerance | B | 0.4 | R | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| 15 | -Probe Positioning with respect to Phantom Shell | B | 2.9 | R | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| 16 | -Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | B | 3.9 | R | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Test sample Related | | | | | | | | |
| 17 | -Test Sample Positioning | A | 2.9 | N | 1 | 1 | 4.92 | 71 |
| 18 | -Device Holder Uncertainty | A | 4.1 | N | 1 | 1 | 4.1 | 5 |
| 19 | -Output Power Variation - SAR drift measurement | B | 5.0 | R | $\sqrt{3}$ | 1 | 2.9 | ∞ |
| Physical parameter | | | | | | | | |
| 20 | -phantom | B | 4.0 | R | $\sqrt{3}$ | 1 | 2.3 | ∞ |

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 41 of 178

| | | | | | | | | |
|--|--|--|------|---|------------|-------|-------|----------|
| 21 | -liquid conductivity (deviation from target) | B | 5.0 | R | $\sqrt{3}$ | 0.64 | 1.8 | ∞ |
| 22 | -liquid conductivity (measurement uncertainty) | B | 0.77 | N | 1 | 0.64 | 0.493 | 9 |
| 23 | -liquid permittivity (deviation from target) | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| 24 | -liquid permittivity (measurement uncertainty) | B | 0.29 | N | 1 | 0.6 | 0.174 | 9 |
| Combined standard uncertainty | | $u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ | | | | | 11.36 | |
| Expanded uncertainty (confidence interval of 95 %) | | $u_e = 2u_c$ | | N | k=2 | 22.72 | | |

9. Main Test Instruments

Table 18: List of Main Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|------------------------|----------------|---------------|--------------------------|--------------|
| 01 | Network analyzer | Agilent 8753E | US37390326 | September 13, 2010 | One year |
| 02 | Dielectric Probe Kit | Agilent 85070E | US44020115 | No Calibration Requested | |
| 03 | Power meter | Agilent E4417A | GB41291714 | March 12, 2011 | One year |
| 04 | Power sensor | Agilent N8481H | MY50350004 | September 26, 2010 | One year |
| 05 | Signal Generator | HP 8341B | 2730A00804 | September 13, 2010 | One year |
| 06 | Amplifier | IXA-020 | 0401 | No Calibration Requested | |
| 07 | BTS | E5515C | MY48360988 | December 3, 2010 | One year |
| 08 | E-field Probe | EX3DV4 | 3677 | November 24, 2010 | One year |
| 09 | DAE | DAE4 | 871 | November 18, 2010 | One year |
| 10 | Validation Kit 835MHz | D835V2 | 4d092 | January 14, 2010 | Two years |
| 11 | Validation Kit 1900MHz | D1900V2 | 5d018 | June 15, 2010 | Two years |
| 12 | Validation Kit 2450MHz | D2450V2 | 712 | February 19, 2010 | Two years |

*****END OF REPORT BODY*****


ANNEX A: Test Layout




Picture 1: Specific Absorption Rate Test Layout



Picture 2: Liquid depth in the flat Phantom (835MHz, 15.4cm depth)

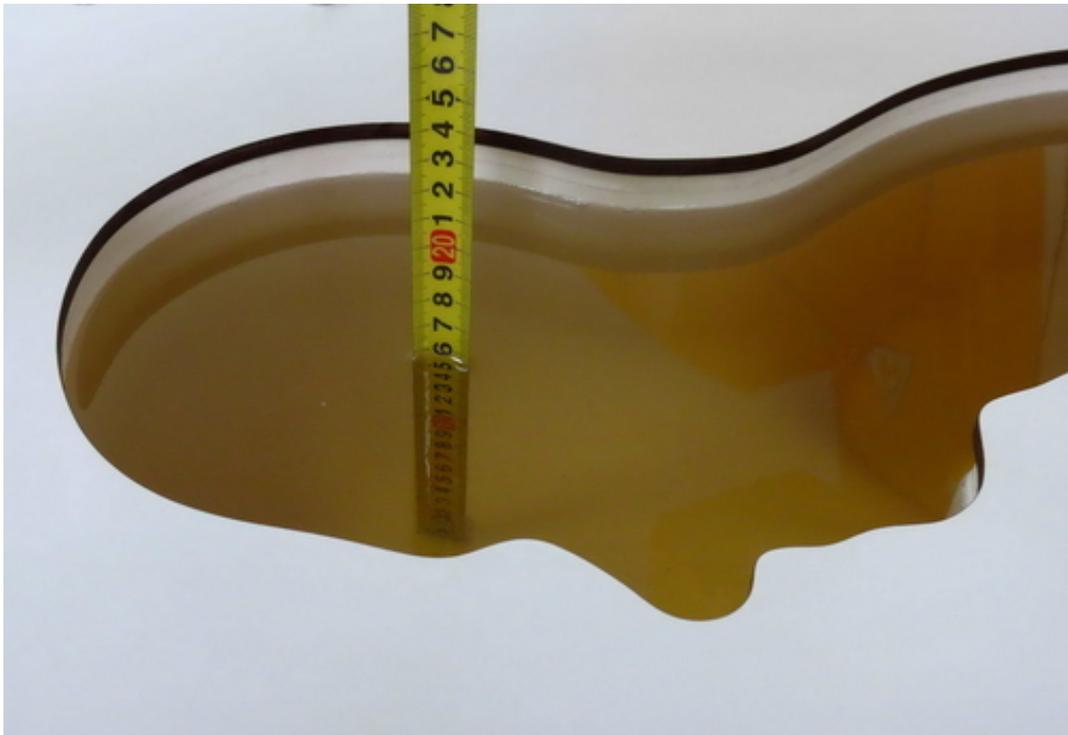


Picture 3: Liquid depth in the head Phantom (835MHz, 15.3cm depth)

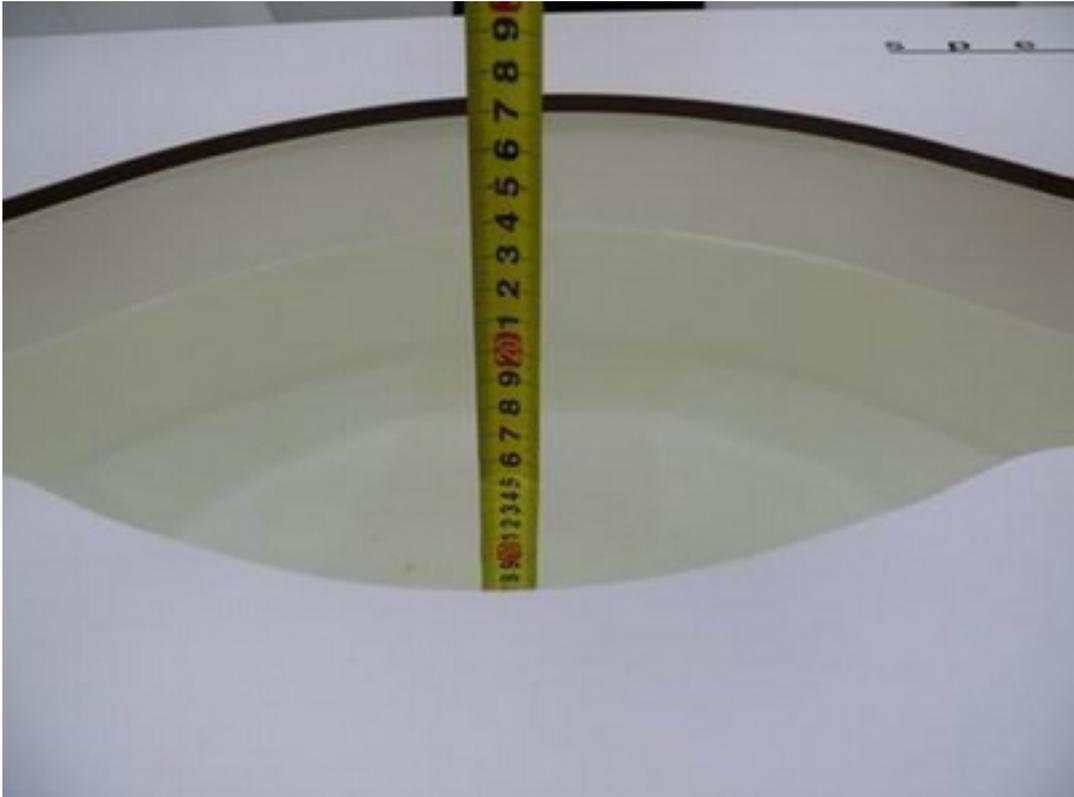

Picture 4: Liquid depth in the flat Phantom (1900 MHz, 15.2cm depth)



Picture 5: liquid depth in the head Phantom (1900 MHz, 15.3cm depth)

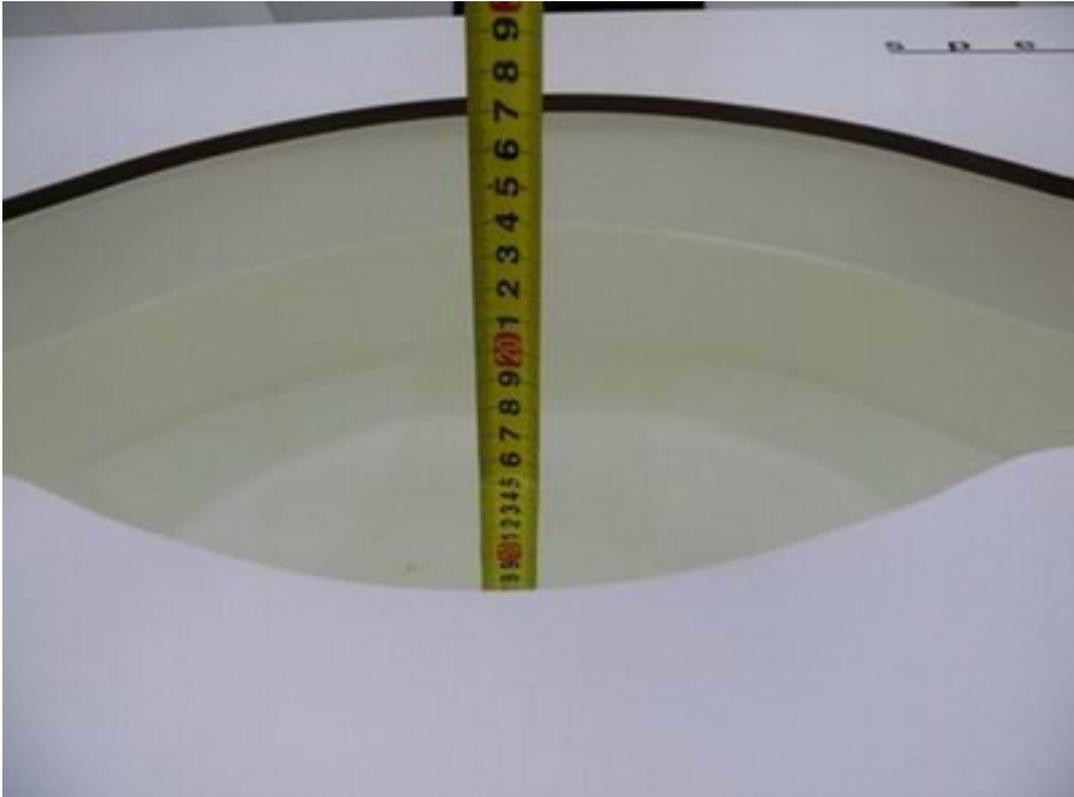

Picture 6: Liquid depth in the flat Phantom (2450 MHz, 15.3cm depth)



Picture 7: Liquid depth in the head Phantom (2450 MHz, 15.4cm depth)

ANNEX B: System Check Results

System Performance Check at 835 MHz Head TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d092

Date/Time: 4/14/2011 1:31:13 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.90$ mho/m; $\epsilon_r = 41.76$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.8 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.56 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.1 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.61 mW/g

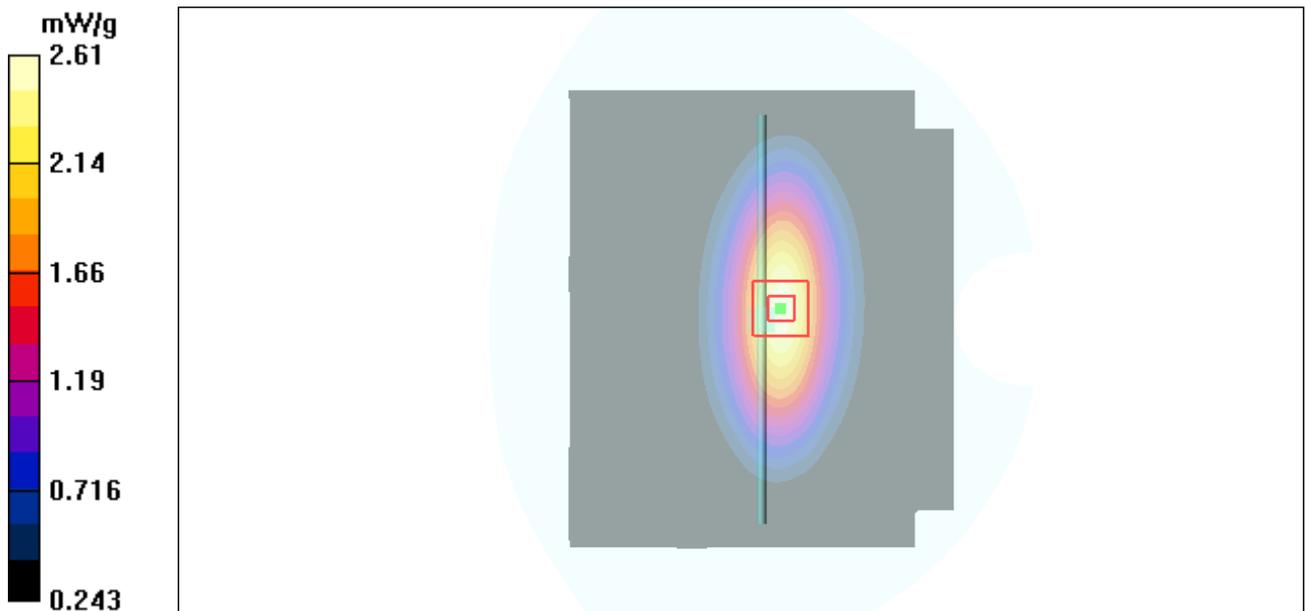


Figure 7 System Performance Check 835MHz 250mW

System Performance Check at 835 MHz Body TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d092

Date/Time: 4/15/2011 2:38:20 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 56.25$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3 °C Liquid Temperature: 21.9 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.72 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.73 mW/g

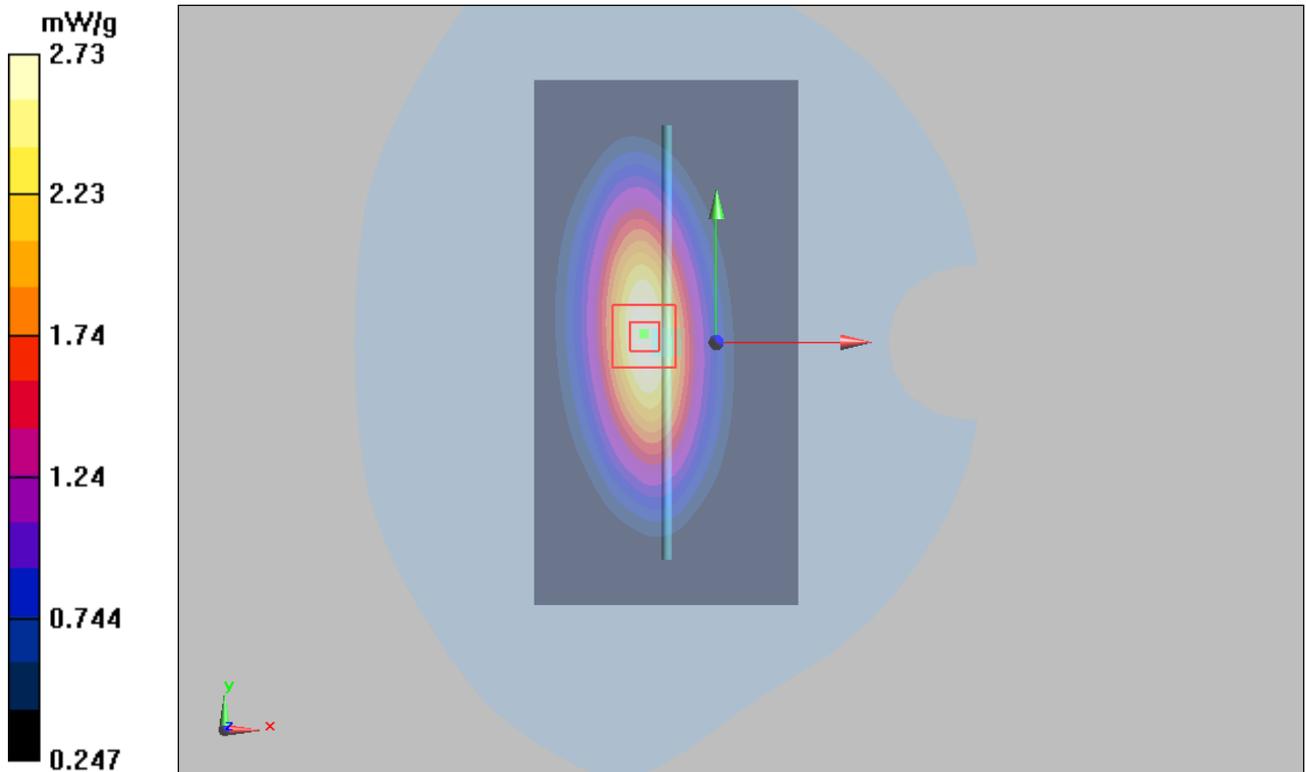


Figure 8 System Performance Check 835MHz 250mW

System Performance Check at 1900 MHz Head TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Date/Time: 4/14/2011 4:40:34 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.9 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=10mm, Pin=250mW/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.7 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.0 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 11.5 mW/g

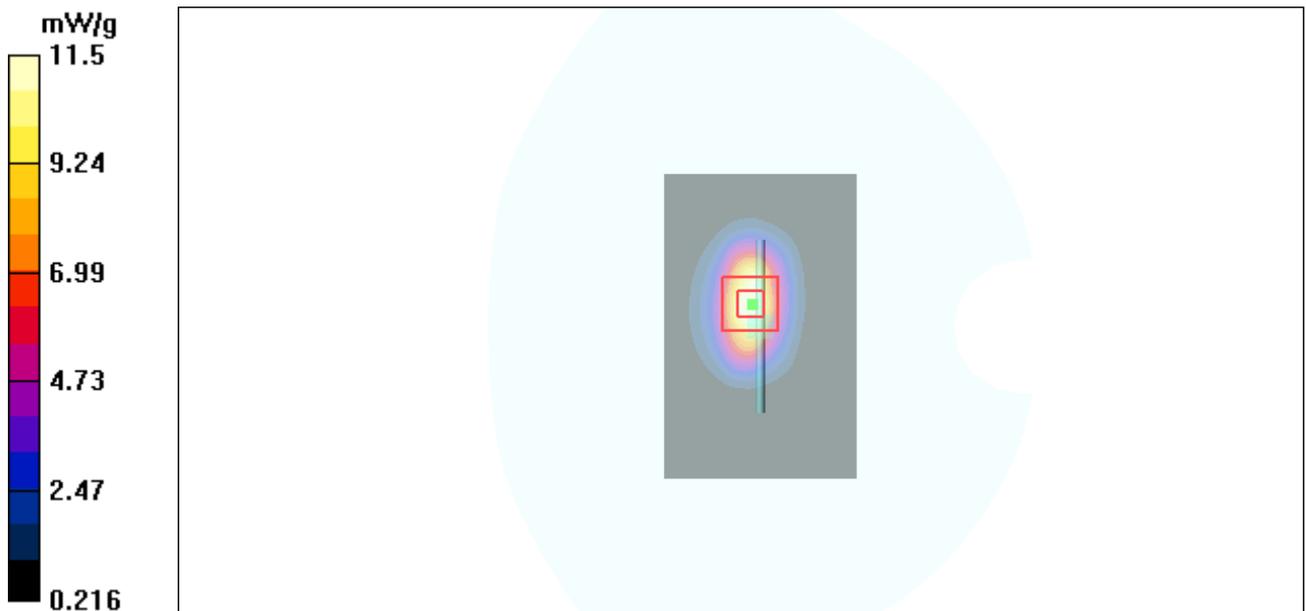


Figure 9 System Performance Check 1900MHz 250mW

System Performance Check at 1900 MHz Body TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Date/Time: 4/16/2011 12:55:19 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 53.18$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.7 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 80.9 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 10.17 mW/g; SAR(10 g) = 5.33 mW/g

Maximum value of SAR (measured) = 11.5 mW/g

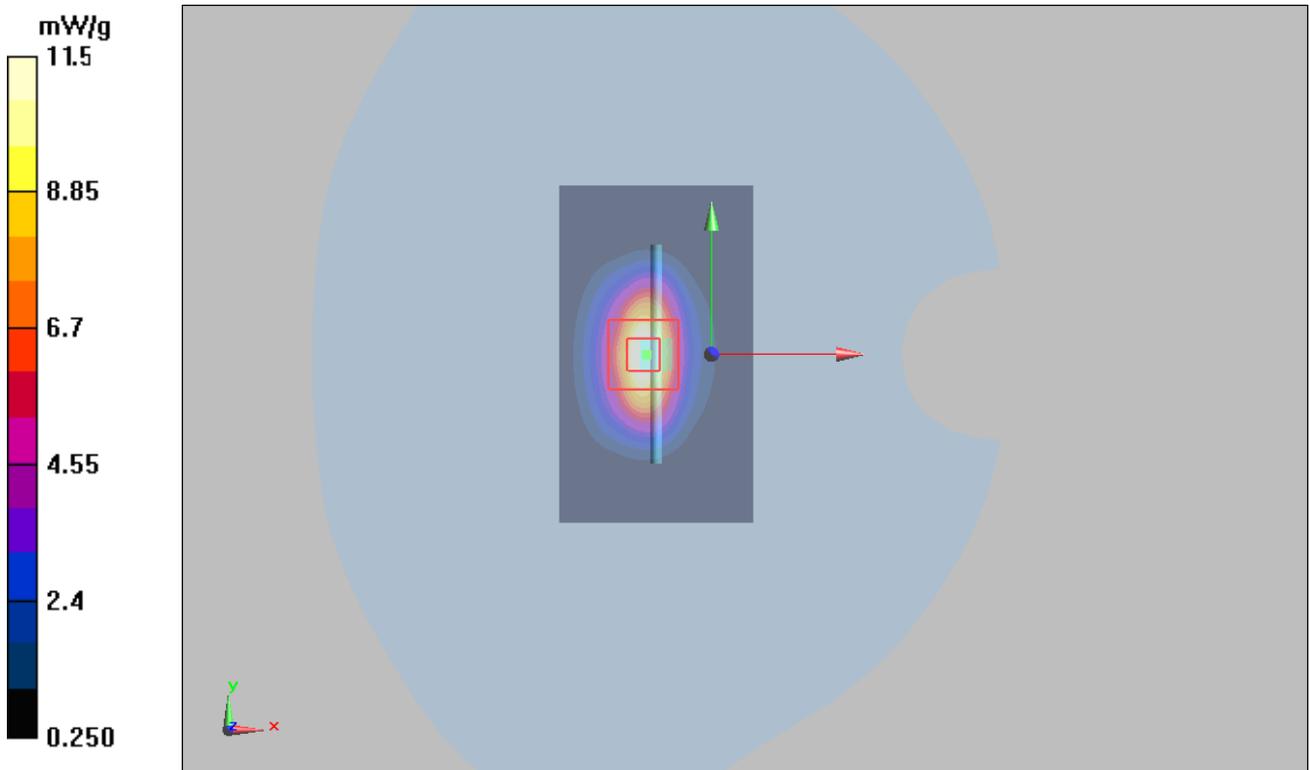


Figure 10 System Performance Check 1900MHz 250mW

System Performance Check at 2450 MHz Head TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 712

Date/Time: 4/19/2011 4:05:36 PM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.10$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.7 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=10mm, Pin=250mW/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 21.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.0 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 14.05 mW/g; SAR(10 g) = 6.5 mW/g

Maximum value of SAR (measured) = 15.7 mW/g

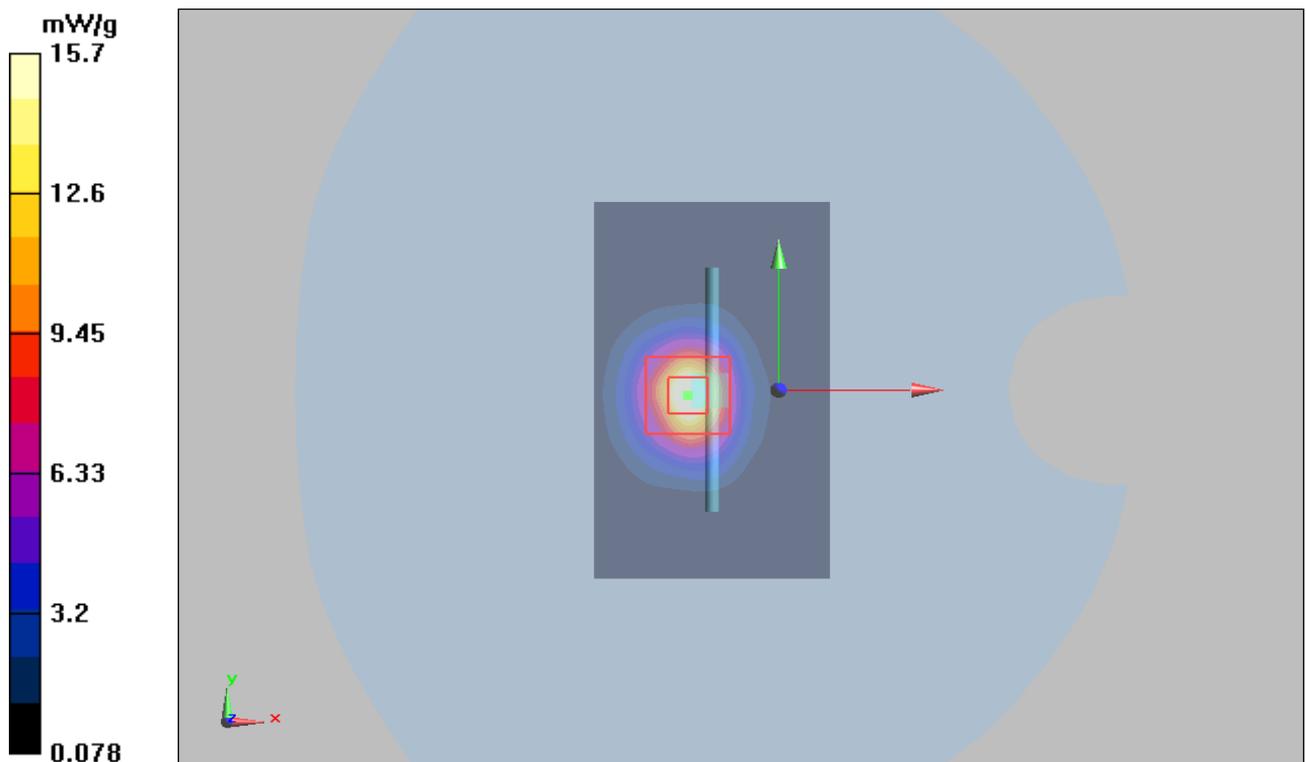


Figure 11 System Performance Check 2450MHz 250mW

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 51 of 178

System Performance Check at 2450 MHz Body TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 712

Date/Time: 4/19/2011 5:44:36 PM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 51.19$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.8 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

d=10mm, Pin=250mW/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 21.5 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.0 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.46 mW/g

Maximum value of SAR (measured) = 19.8 mW/g

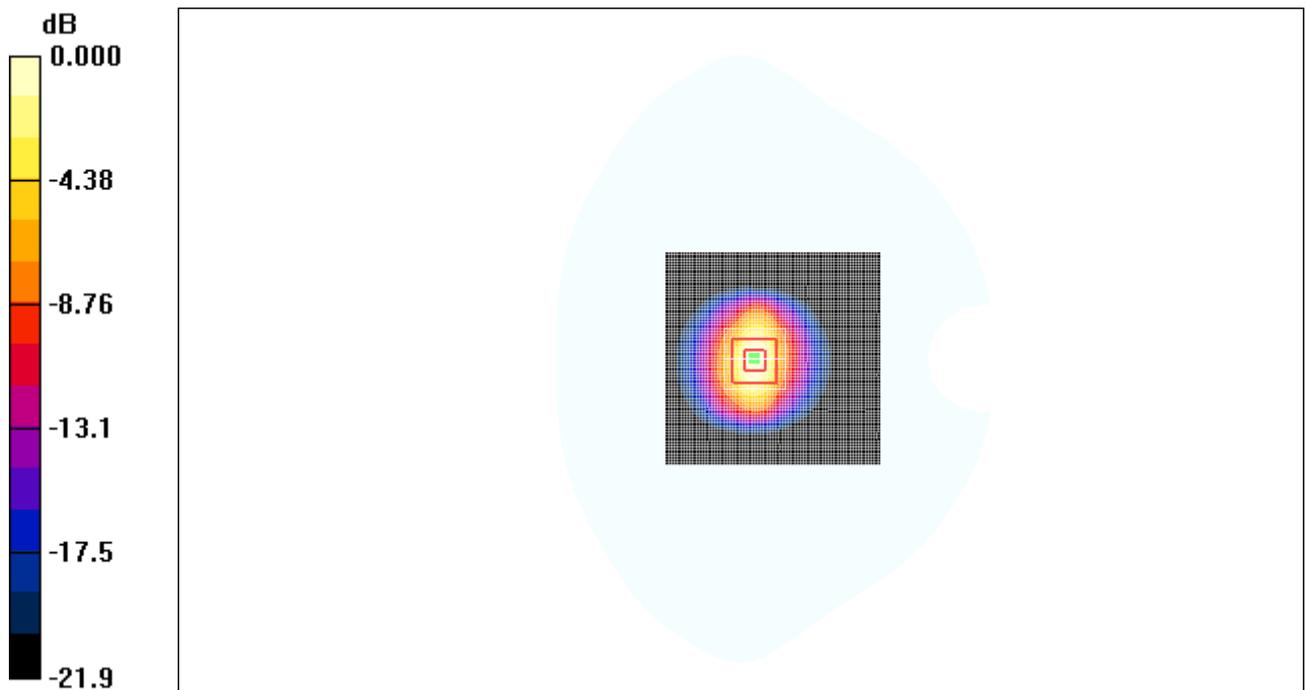

0 dB = 19.8mW/g

Figure 12 System Performance Check 2450MHz 250mW

ANNEX C: Graph Results

GSM 850 Left Cheek Middle

Date/Time: 4/14/2011 3:54:04 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.201 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.47 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.129 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

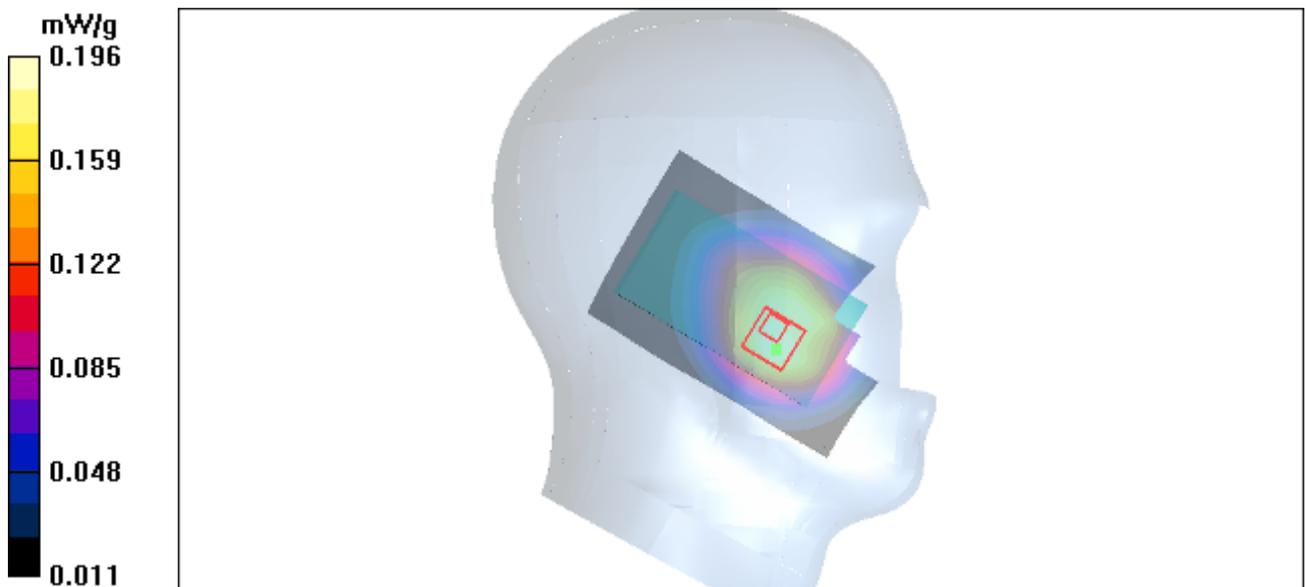


Figure 13 Left Hand Touch Cheek GSM 850 Channel 190

GSM 850 Left Tilt Middle

Date/Time: 4/14/2011 4:40:20 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.112 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.84 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

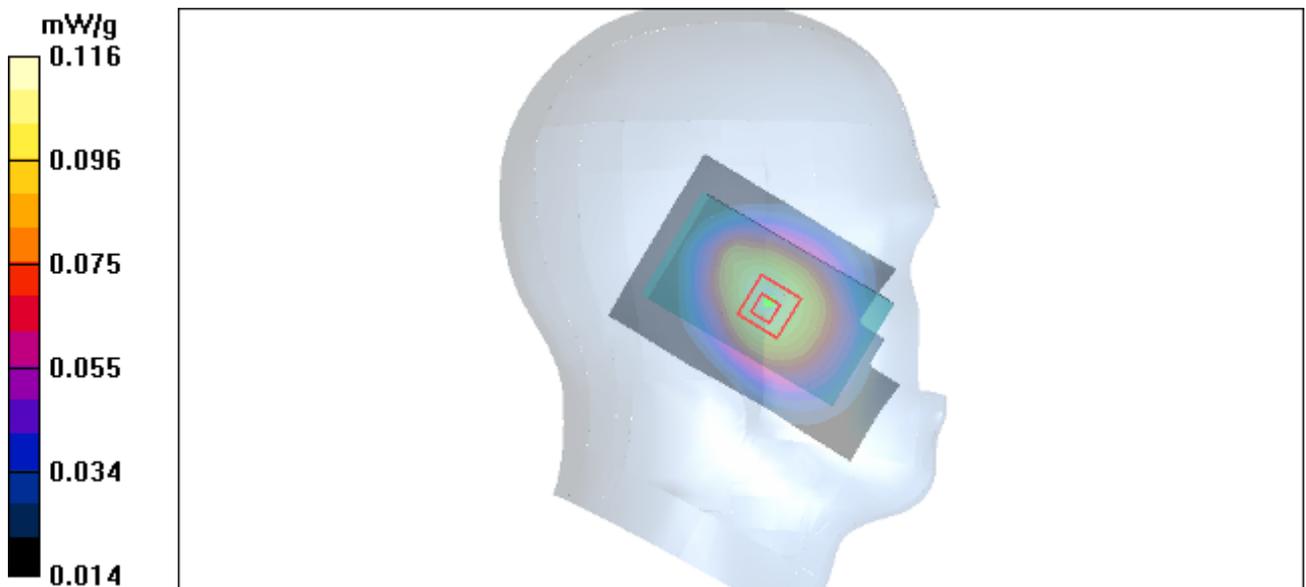


Figure 14 Left Hand Tilt 15° GSM 850 Channel 190

GSM 850 Right Cheek High

Date/Time: 4/14/2011 5:00:18 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.412 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.62 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.401 mW/g

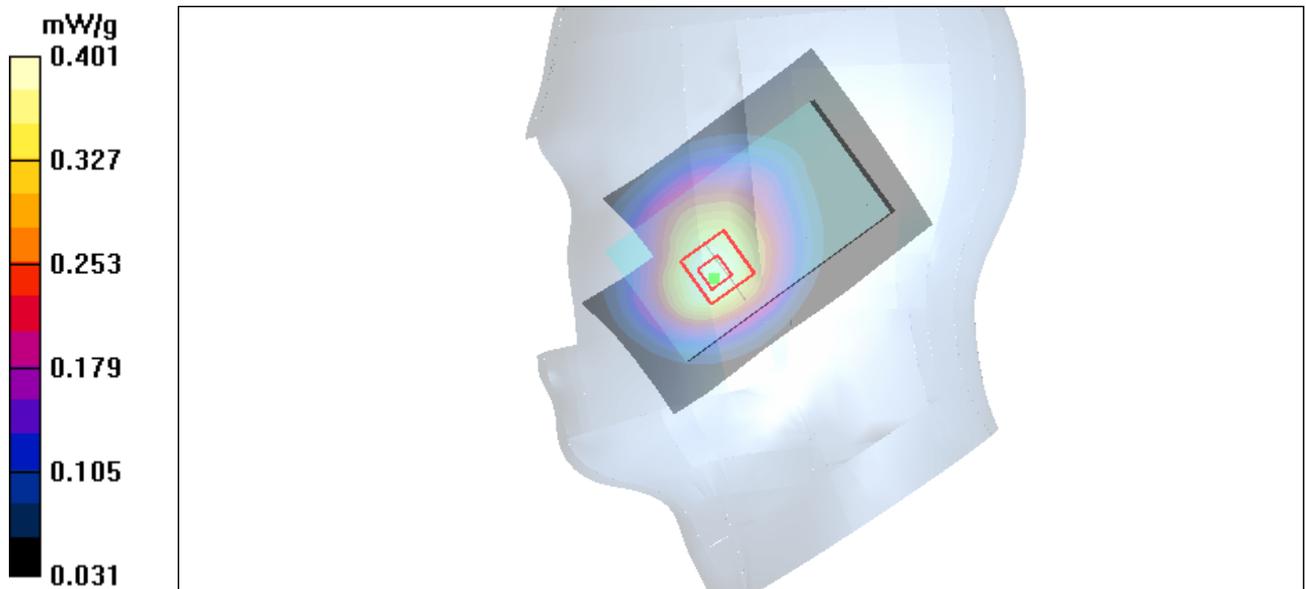

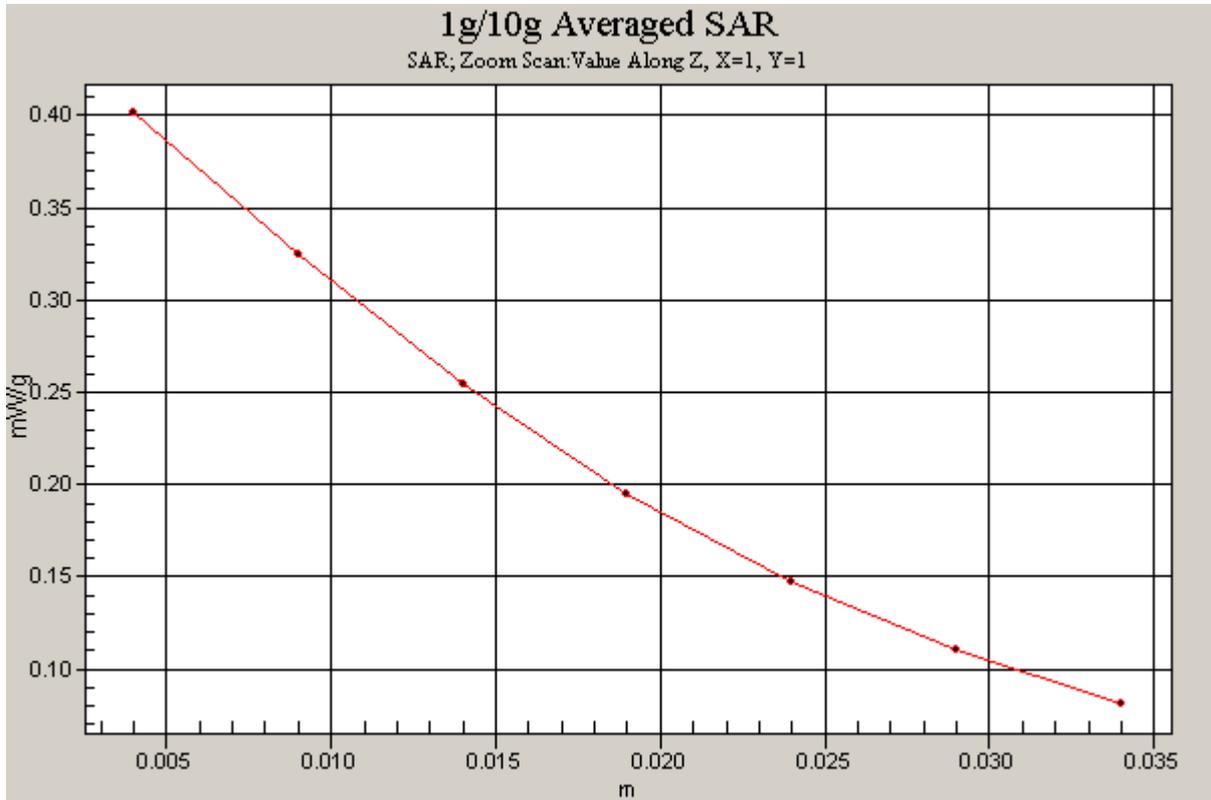


Figure 15 Right Hand Touch Cheek GSM 850 Channel 251

GSM 850 Right Cheek Middle

Date/Time: 4/14/2011 3:01:39 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.273 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

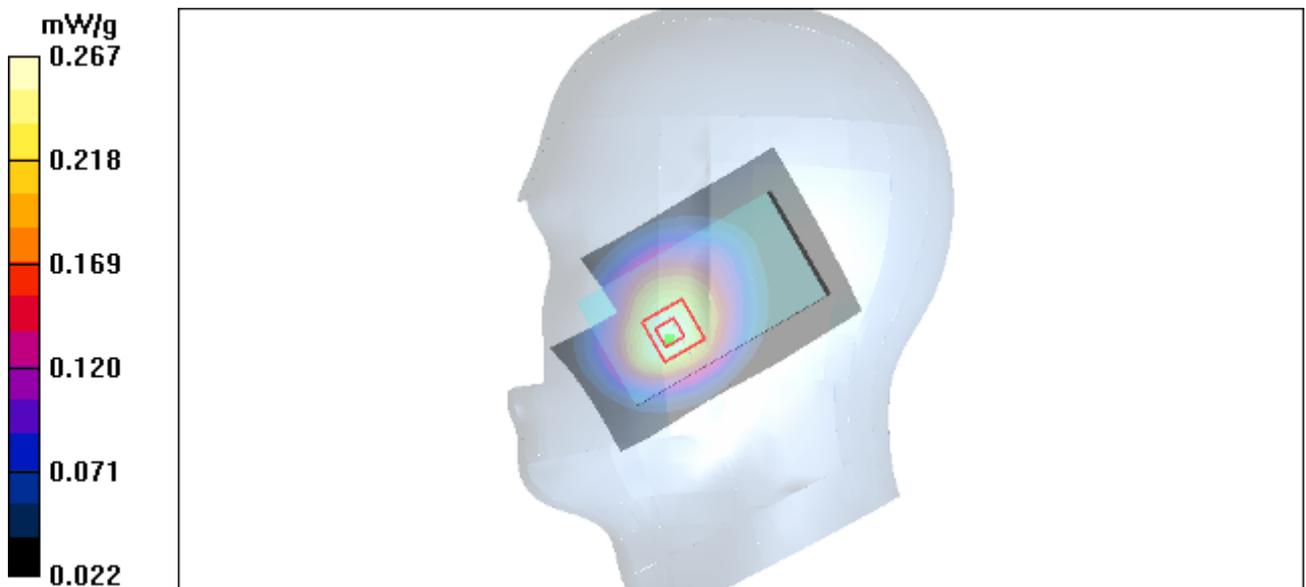


Figure 16 Right Hand Touch Cheek GSM 850 Channel 190

GSM 850 Right Cheek Low

Date/Time: 4/14/2011 5:11:38 AM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.208 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.07 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.200 mW/g

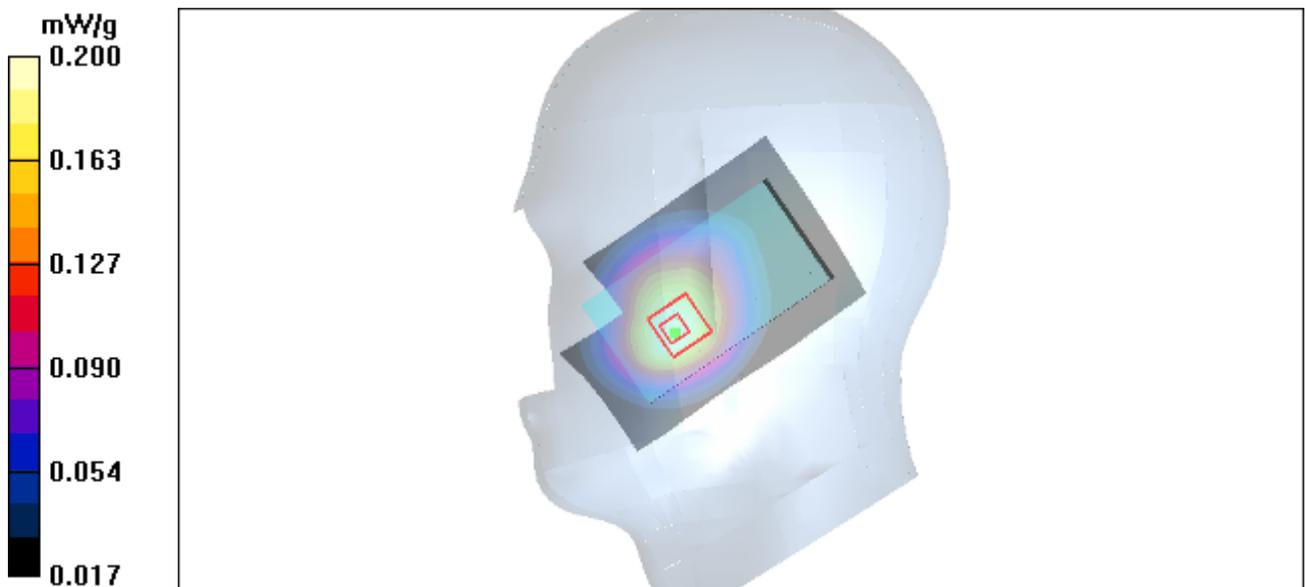


Figure 17 Right Hand Touch Cheek GSM 850 Channel 128

GSM 850 Right Tilt Middle

Date/Time: 4/14/2011 3:13:52 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.124 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.51 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

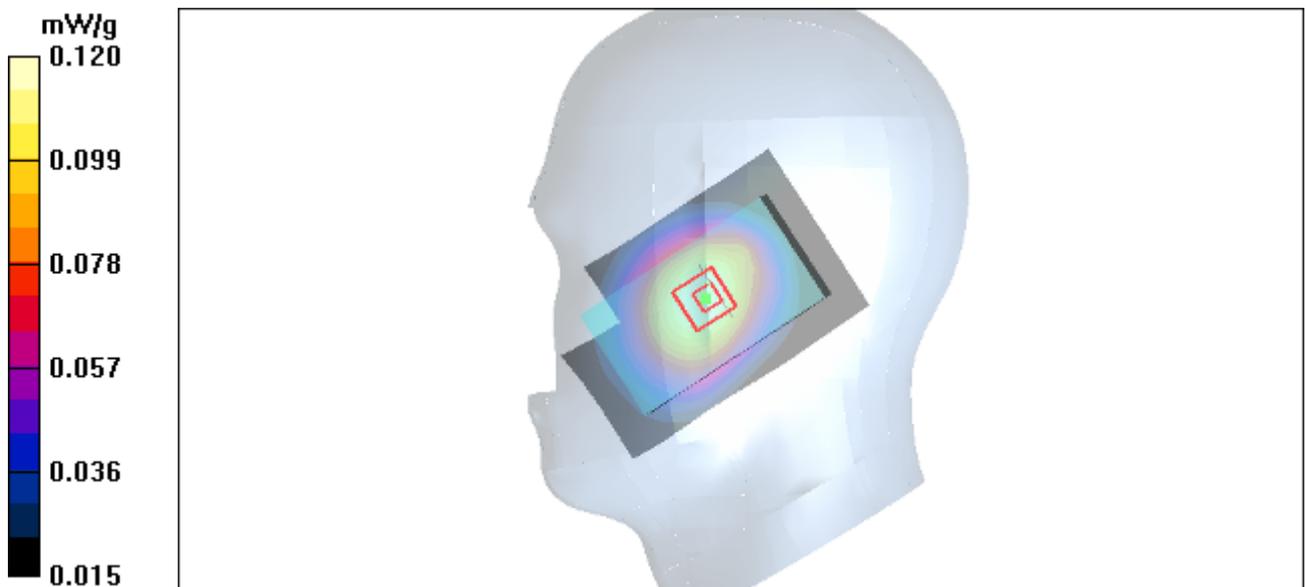


Figure 18 Right Hand Tilt 15° GSM 850 Channel 190

GSM 850 Right Cheek High with Battery(SN:UNHAA29XA4314746)

Date/Time: 4/15/2011 7:09:00 PM

Communication System: GSM 850; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.5, 9.5, 9.5); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.405 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.90 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.392 mW/g

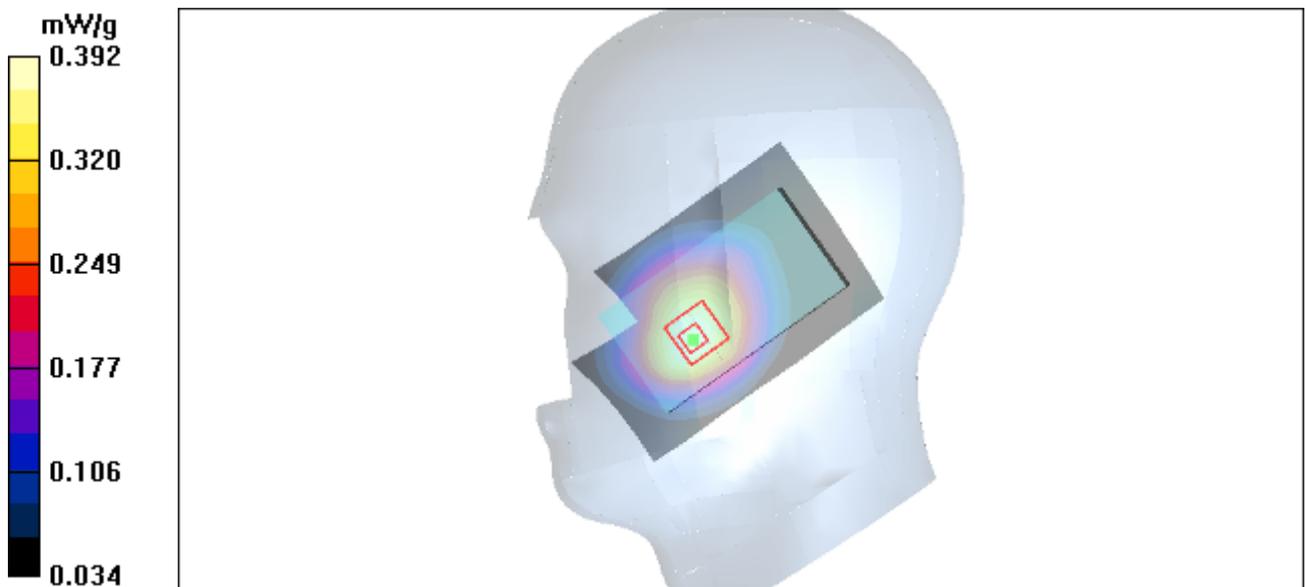


Figure 19 Right Hand Touch Cheek GSM 850 Channel 251

GSM 850 Towards Ground Middle

Date/Time: 4/15/2011 4:04:56 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.211 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 5.98 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.208 mW/g

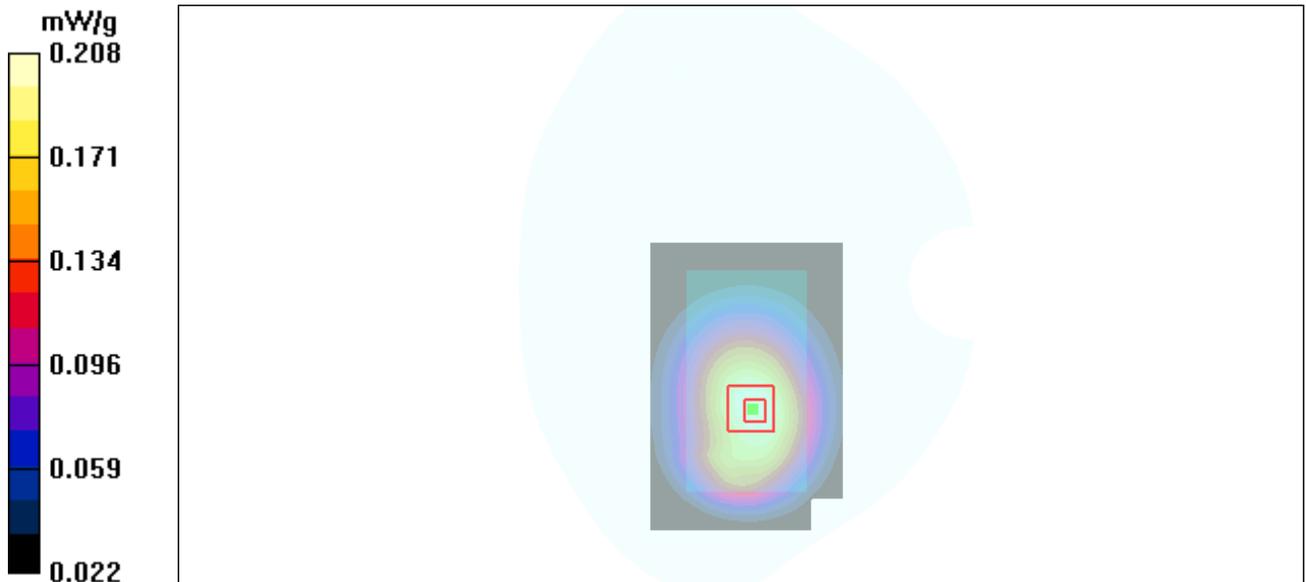


Figure 20 Body, Towards Ground, GSM 850 Channel 190

GSM 850 GPRS (2TXslots) Towards Ground High

Date/Time: 4/15/2011 4:51:09 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.433 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 8.05 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.293 mW/g

Maximum value of SAR (measured) = 0.428 mW/g

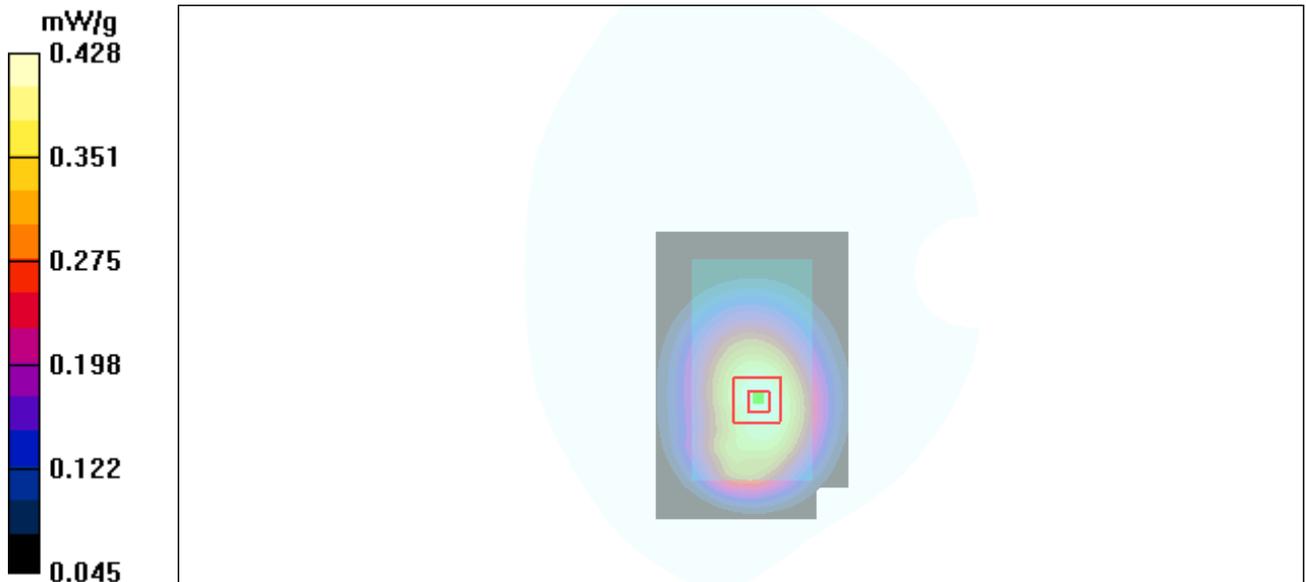


Figure 21 Body, Towards Ground, GSM 850 GPRS (2TXslots) Channel 251

GSM 850 GPRS (2TXslots) Towards Ground Middle

Date/Time: 4/15/2011 4:16:29 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.283 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.94 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

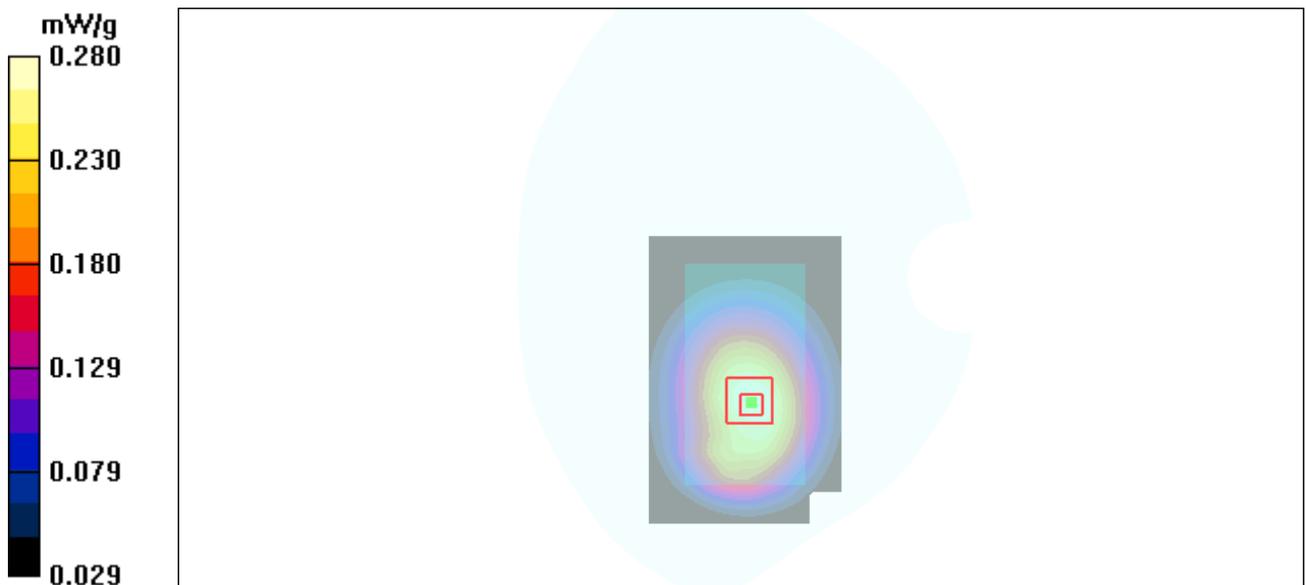


Figure 22 Body, Towards Ground, GSM 850 GPRS (2TXslots) Channel 190

GSM 850 GPRS (2TXslots) Towards Ground Low

Date/Time: 4/15/2011 5:01:49 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz;Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.213 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.70 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.215 mW/g

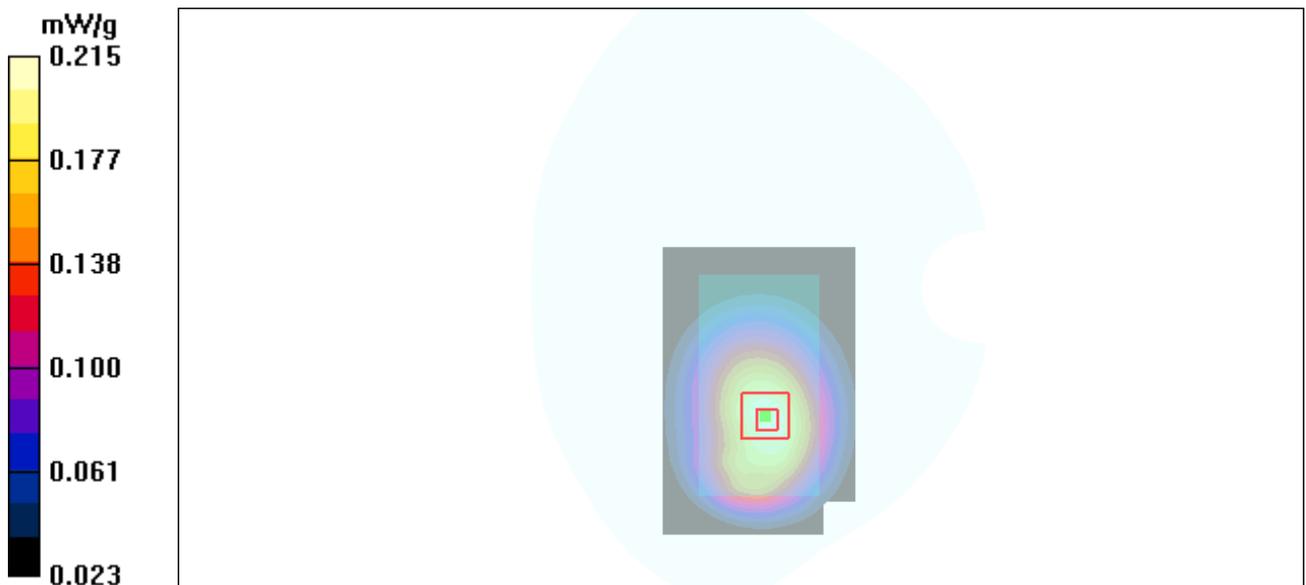


Figure 23 Body, Towards Ground, GSM 850 GPRS (2TXslots) Channel 128

GSM 850 GPRS (2TXslots) Towards Phantom Middle

Date/Time: 4/15/2011 4:28:47 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.188 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 4.85 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.184 mW/g

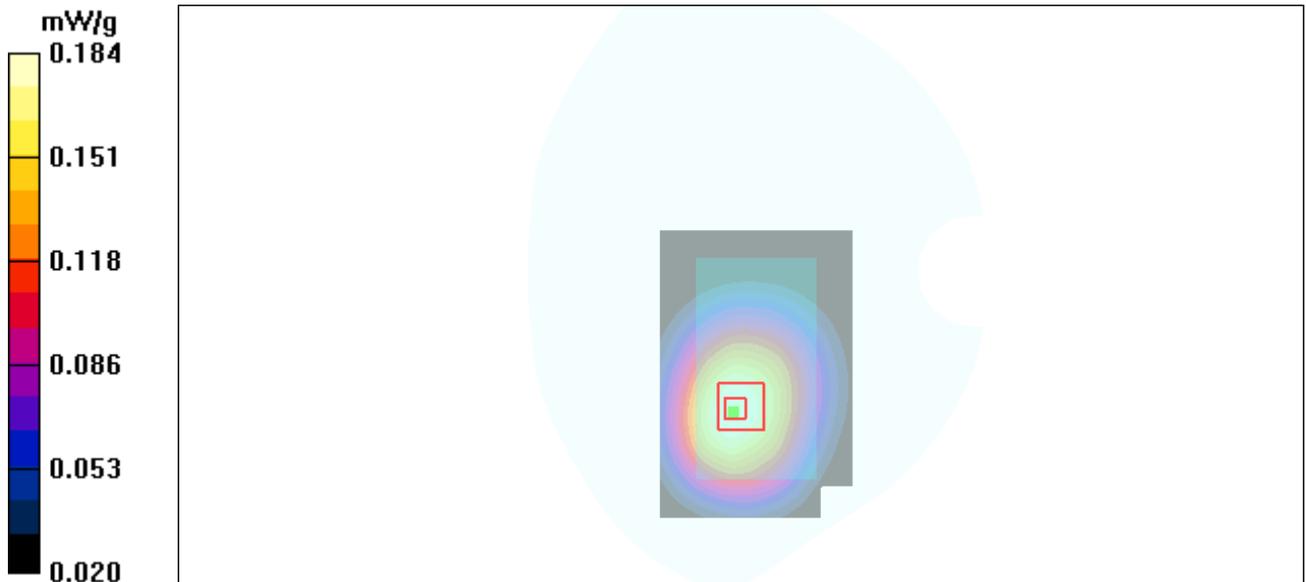


Figure 24 Body, Towards Phantom, GSM 850 GPRS (2TXslots) Channel 190

GSM 850 with Earphone Towards Ground High

Date/Time: 4/15/2011 5:31:46 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.237 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 8.68 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

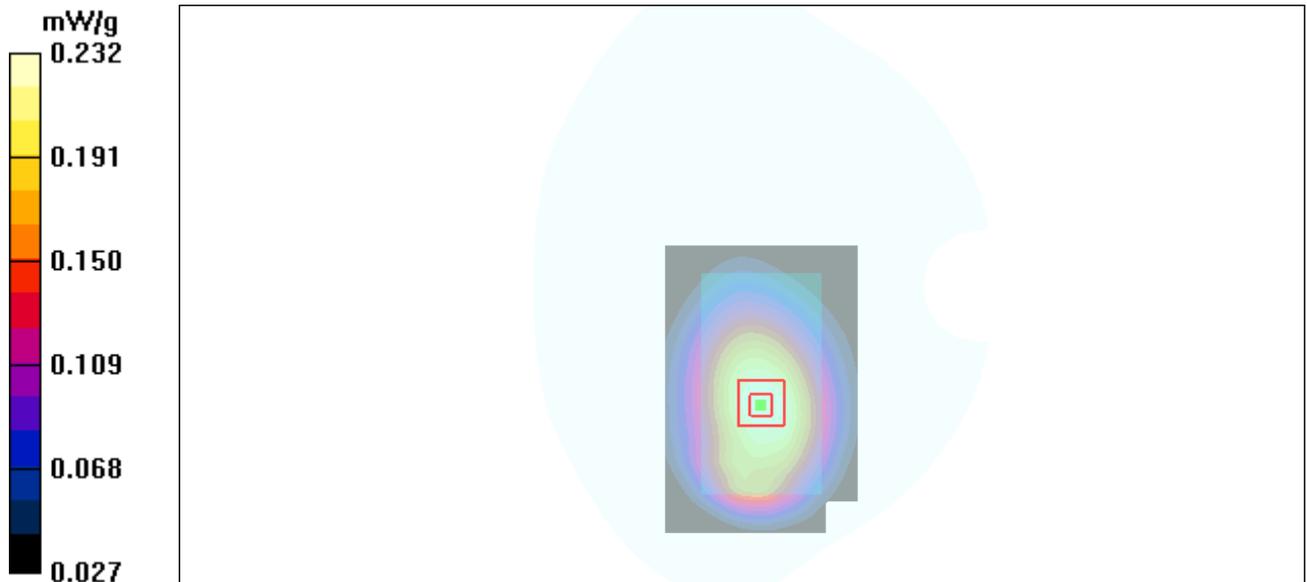


Figure 25 Body with Earphone, Towards Ground, GSM 850 Channel 251

GSM 850 EGPRS (2TXslots) Towards Ground High

Date/Time: 4/15/2011 5:19:17 AM

Communication System: GSM850 + EGPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.437 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 8.05 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.432 mW/g

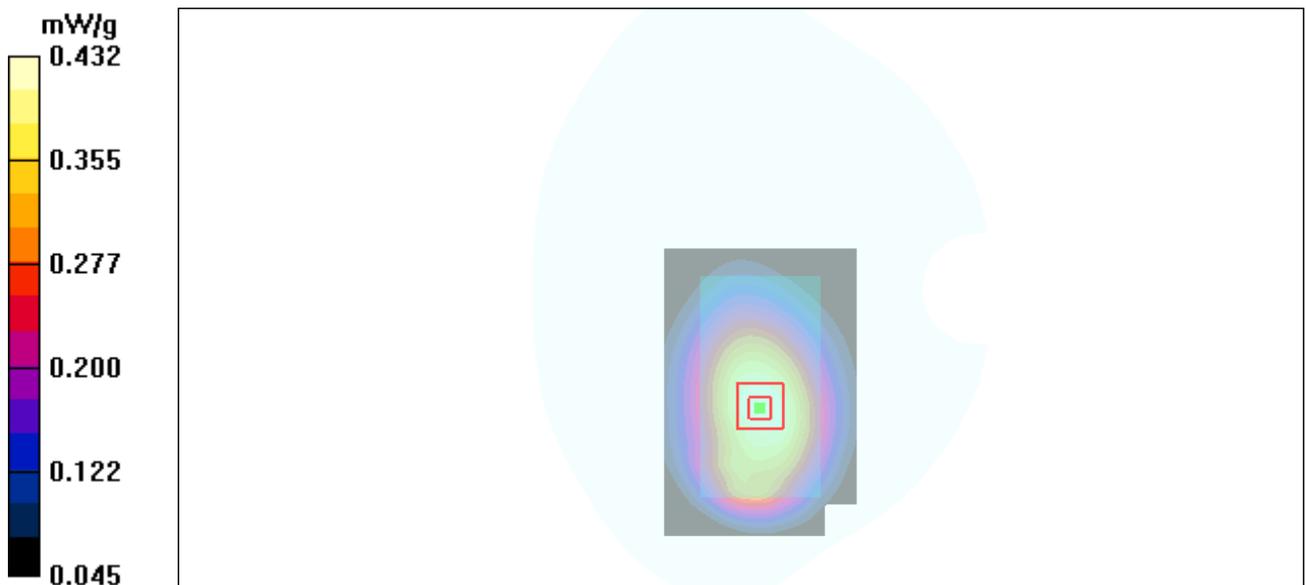


Figure 26 Body, Towards Ground, GSM 850 EGPRS (2TXslots) Channel 251

GSM 850 GPRS (2TXslots) (Hot spots) Towards Ground High

Date/Time: 4/15/2011 7:19:26 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.646 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.539 mW/g


Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 0.631 mW/g

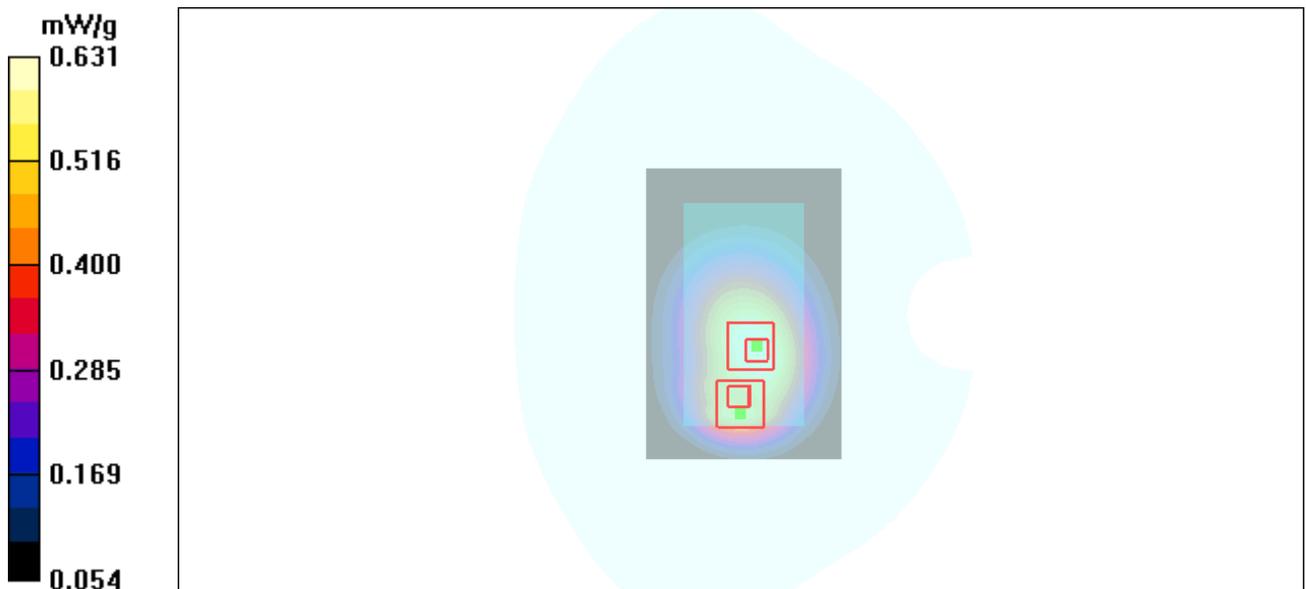

TA Technology (Shanghai) Co., Ltd.
Test Report

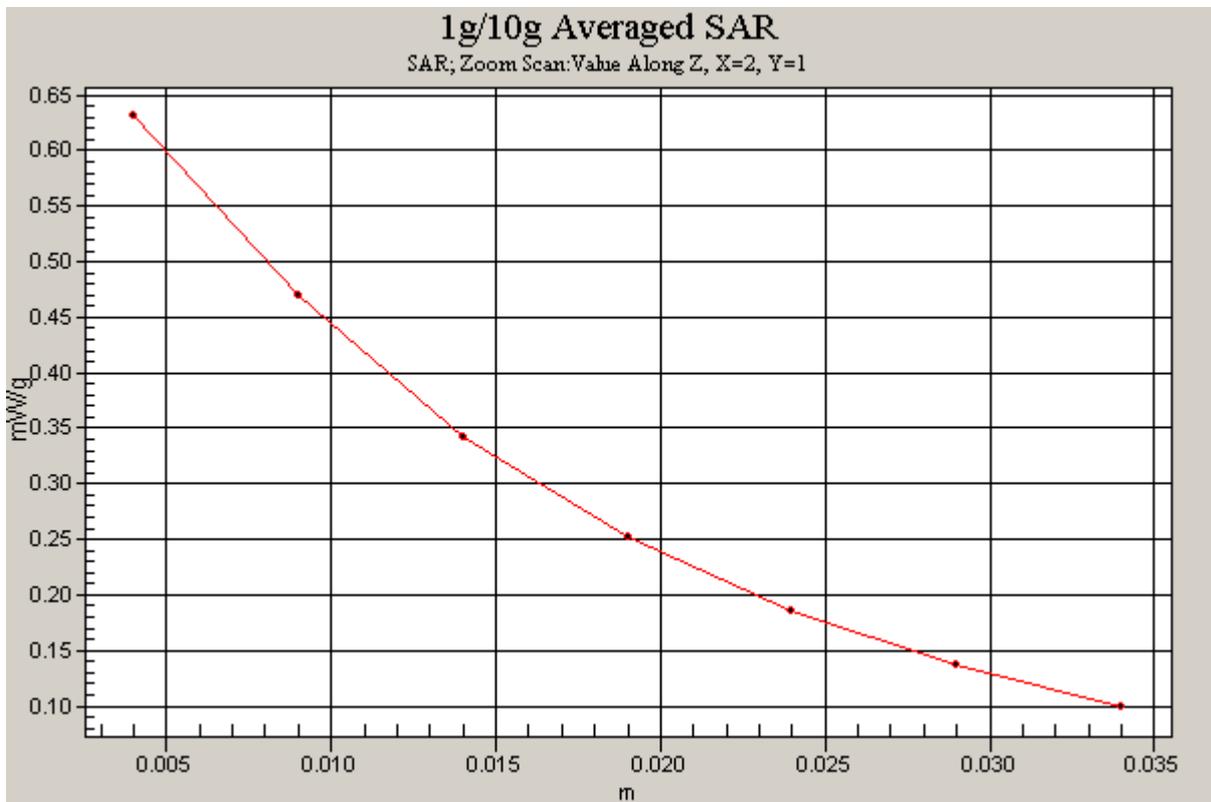
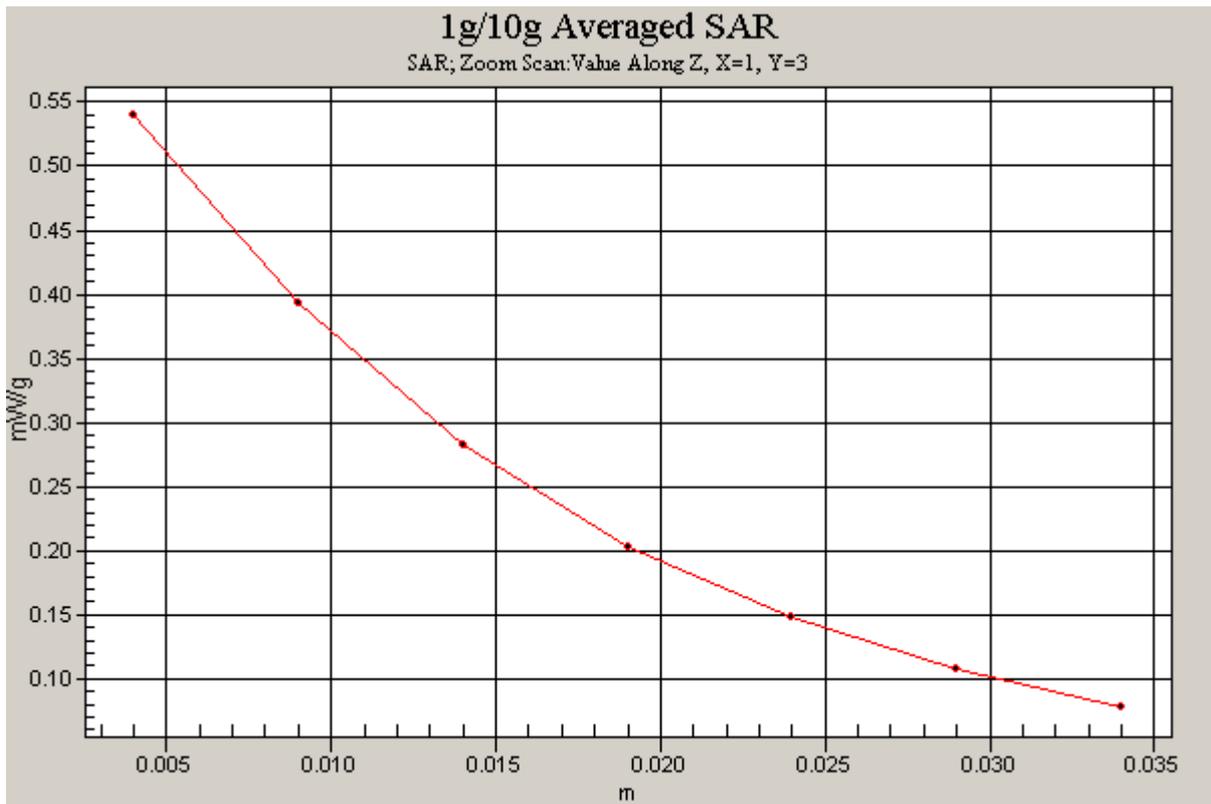


Figure 27 Body, Towards Ground, GSM 850 GPRS (2TXslots) Channel 251

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 69 of 178

GSM 850 GPRS (2TXslots) (Hot spots) Towards Ground Middle

Date/Time: 4/15/2011 6:04:37 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.478 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.454 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.266 mW/g

Maximum value of SAR (measured) = 0.429 mW/g

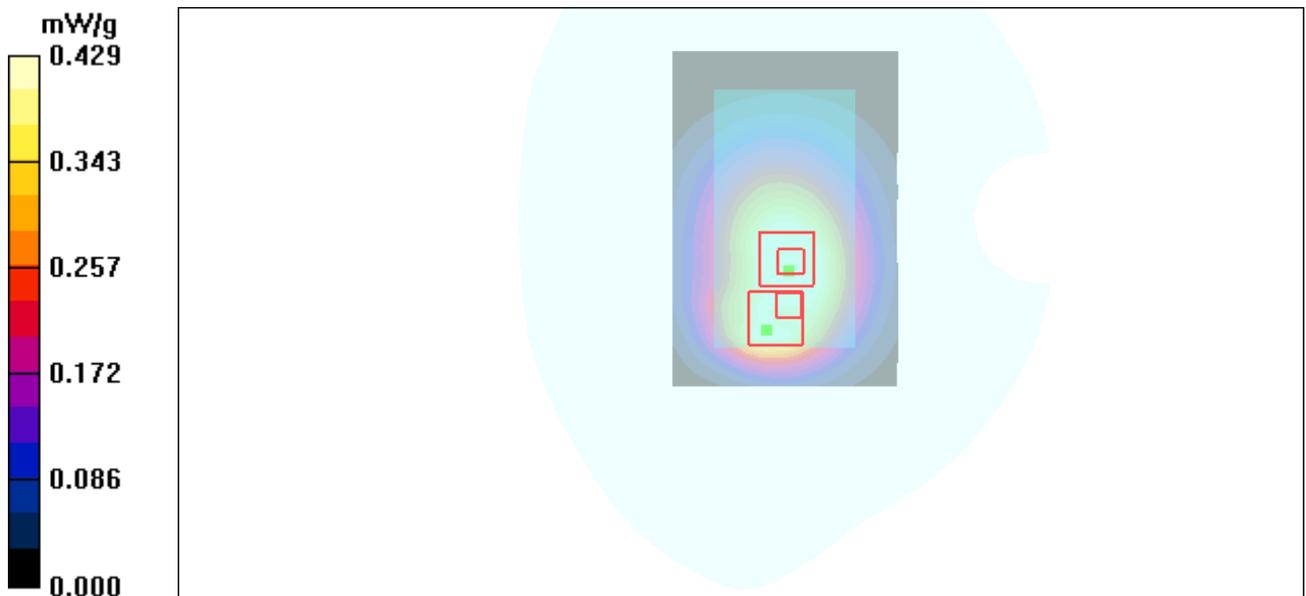


Figure 28 Body, Towards Ground, GSM 850 GPRS (2TXslots) Channel 190

GSM 850 GPRS (2TXslots) (Hot spots) Towards Ground Low

Date/Time: 4/15/2011 7:34:02 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.328 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.3 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.323 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.3 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.281 mW/g

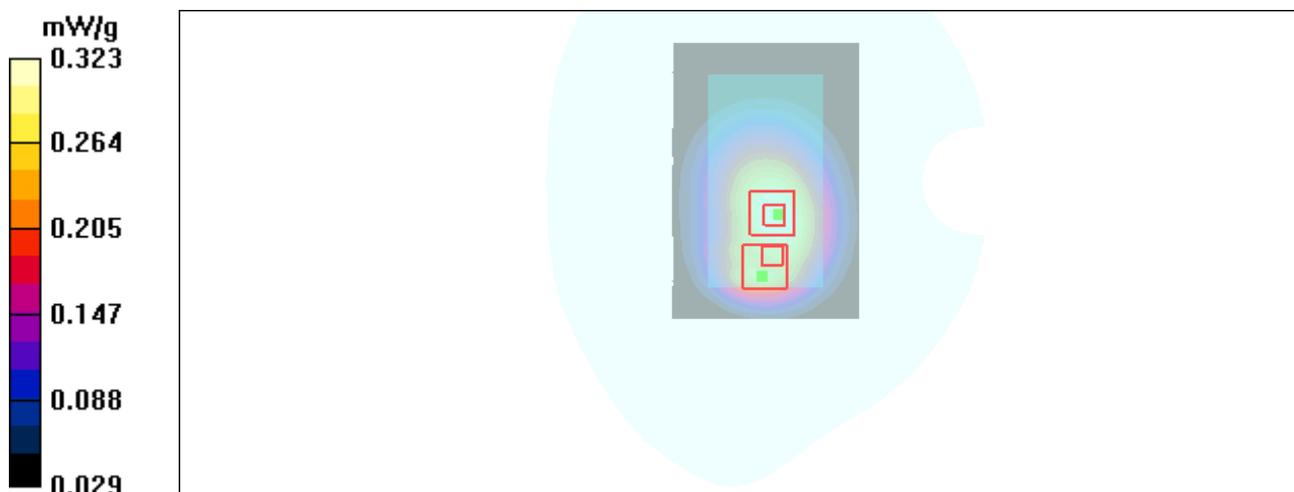


Figure 29 Body, Towards Ground, GSM 850 GPRS (2TXslots) Channel 128

GSM 850 GPRS (2TXslots) (Hot spots) Towards Phantom Middle

Date/Time: 4/15/2011 6:20:28 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.261 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.252 mW/g

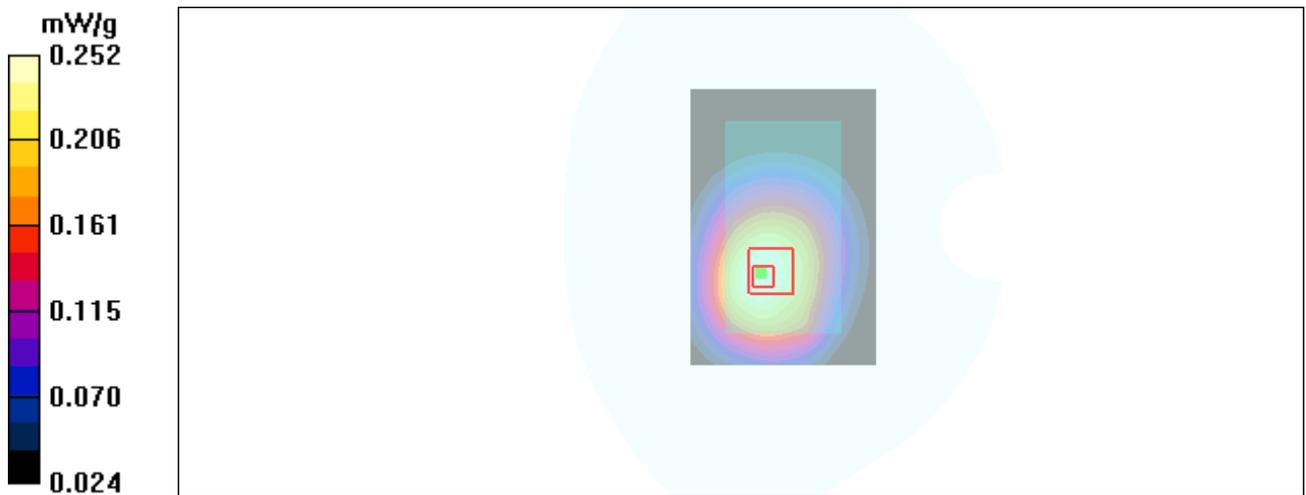


Figure 30 Body, Towards Phantom, GSM 850 GPRS (2TXslots) Channel 190

GSM 850 GPRS (2TXslots) (Hot spots) Left Edge Middle

Date/Time: 4/15/2011 6:52:07 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Left Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.141 mW/g

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.134 mW/g

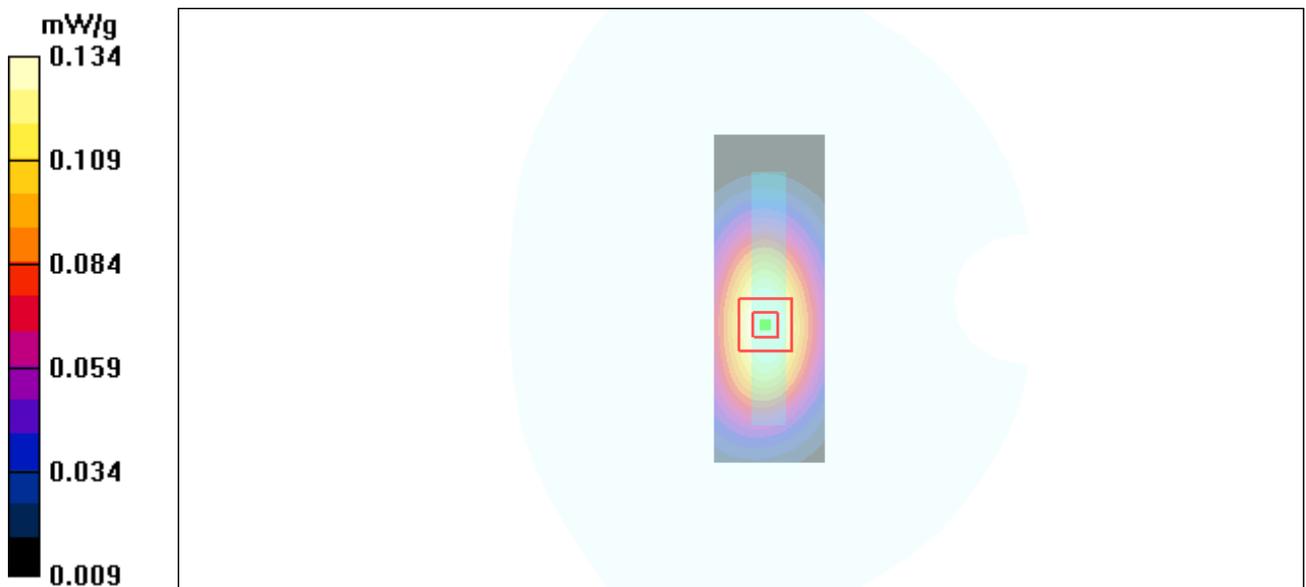


Figure 31 Body, Left Edge, GSM 850 GPRS (2TXslots) Channel 190

GSM 850 GPRS (2TXslots) (Hot spots) Right Edge Middle

Date/Time: 4/15/2011 6:41:31 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Right Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.261 mW/g

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.1 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.252 mW/g

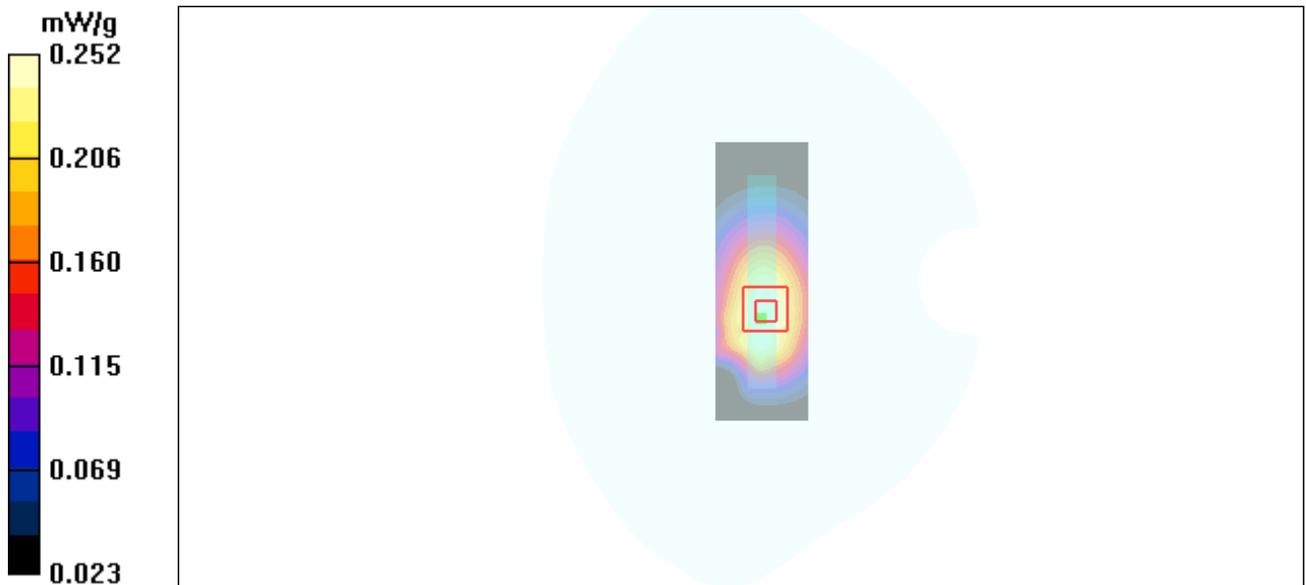


Figure 32 Body, Right Edge, GSM 850 GPRS (2TXslots) Channel 190

GSM 850 GPRS (2TXslots) (Hot spots) Bottom Edge Middle

Date/Time: 4/15/2011 7:01:33 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Bottom Edge Middle/Area Scan (31x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.56 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.089 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

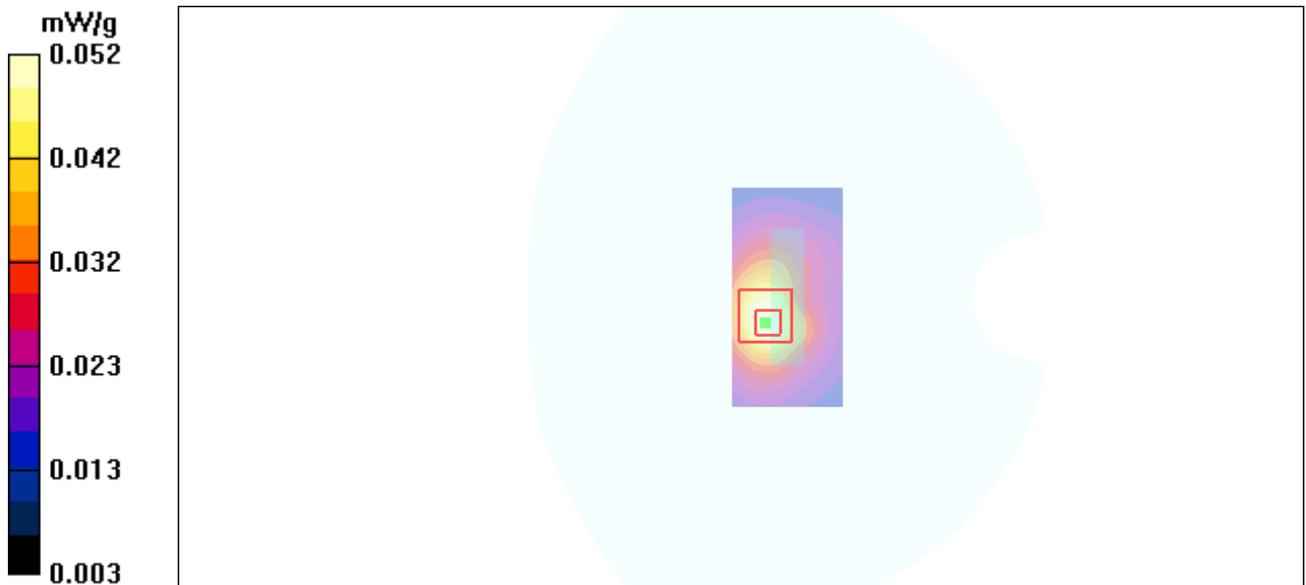


Figure 33 Body, Bottom Edge, GSM 850 GPRS (2TXslots) Channel 190

GSM 850 EGPRS (2TXslots) (hot spots) Towards Ground High

Date/Time: 4/15/2011 8:00:36 AM

Communication System: GSM850 + EGPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.649 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.432 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.553 mW/g

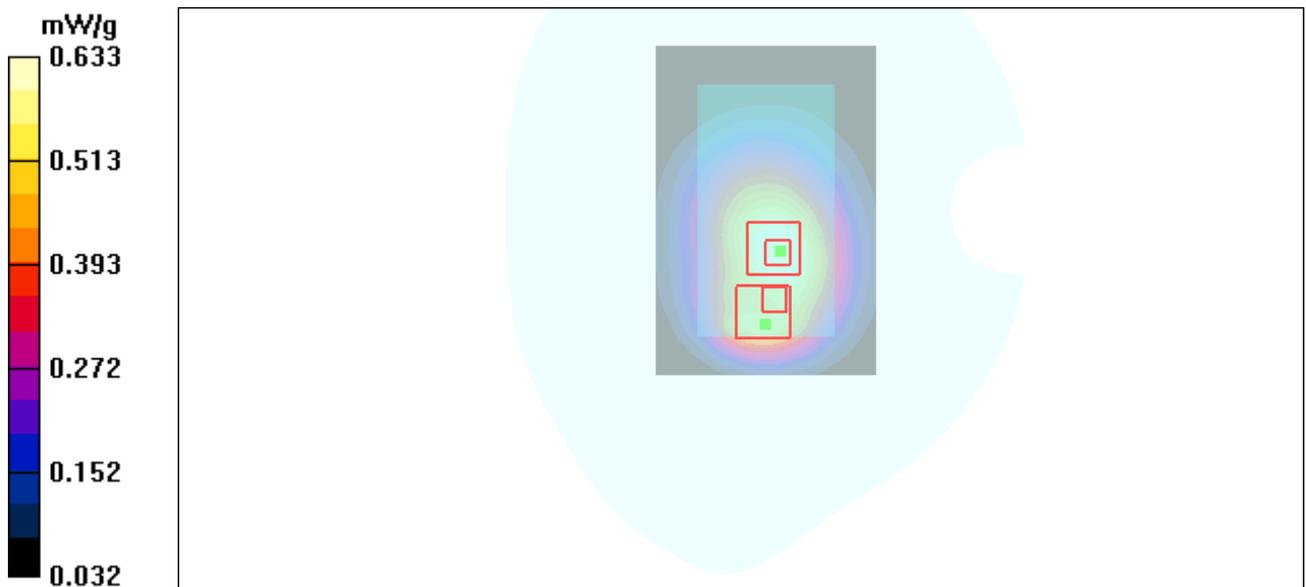


Figure 34 Body, Towards Ground, GSM 850 EGPRS (2TXslots) Channel 251

GSM 850 GPRS (2TXslots) (hot spots) Towards Ground High with Battery (SN:UNHAA29XA4314746)

Date/Time: 4/20/2011 11:48:23 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(10.33, 10.33, 10.33); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.639 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.647 mW/g

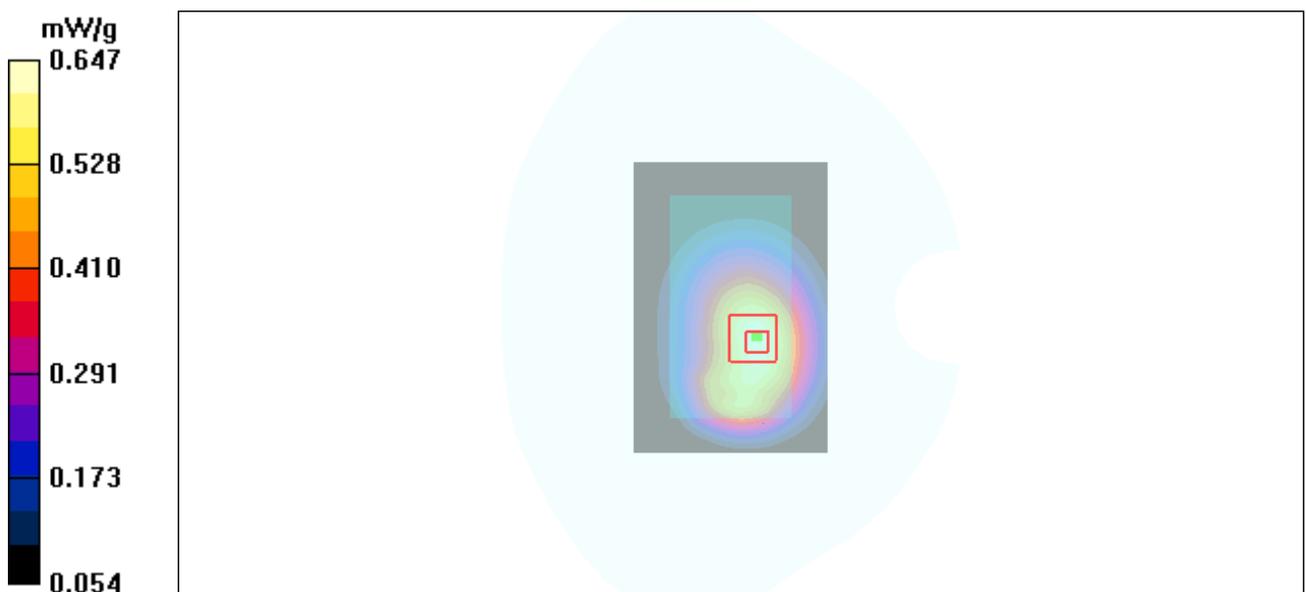


Figure 35 Body, Towards Ground, GSM 850 GPRS (2TXslots) Channel 251

GSM 1900 Left Cheek High

Date/Time: 4/14/2011 7:58:30 AM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.32 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.91 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 0.950 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.91 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.638 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

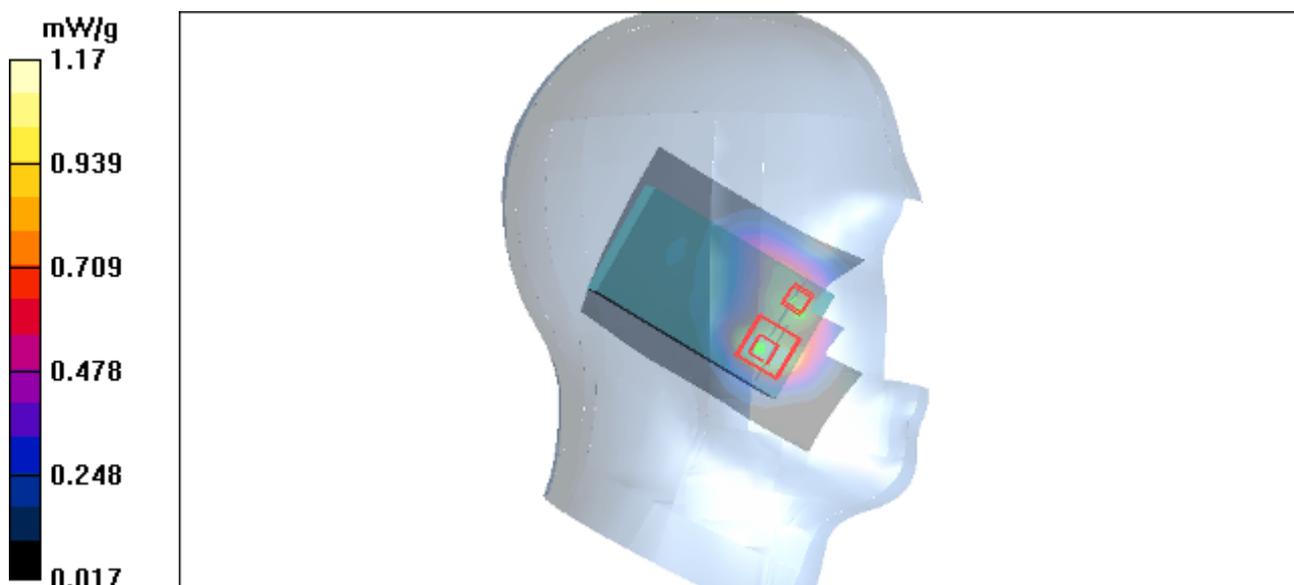


Figure 36 Left Hand Touch Cheek GSM 1900 Channel 810

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 78 of 178

GSM 1900 Left Cheek Middle

Date/Time: 4/14/2011 7:06:04 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.59 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.37 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.888 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 1.04 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.37 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 1.34 mW/g; SAR(10 g) = 0.729 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

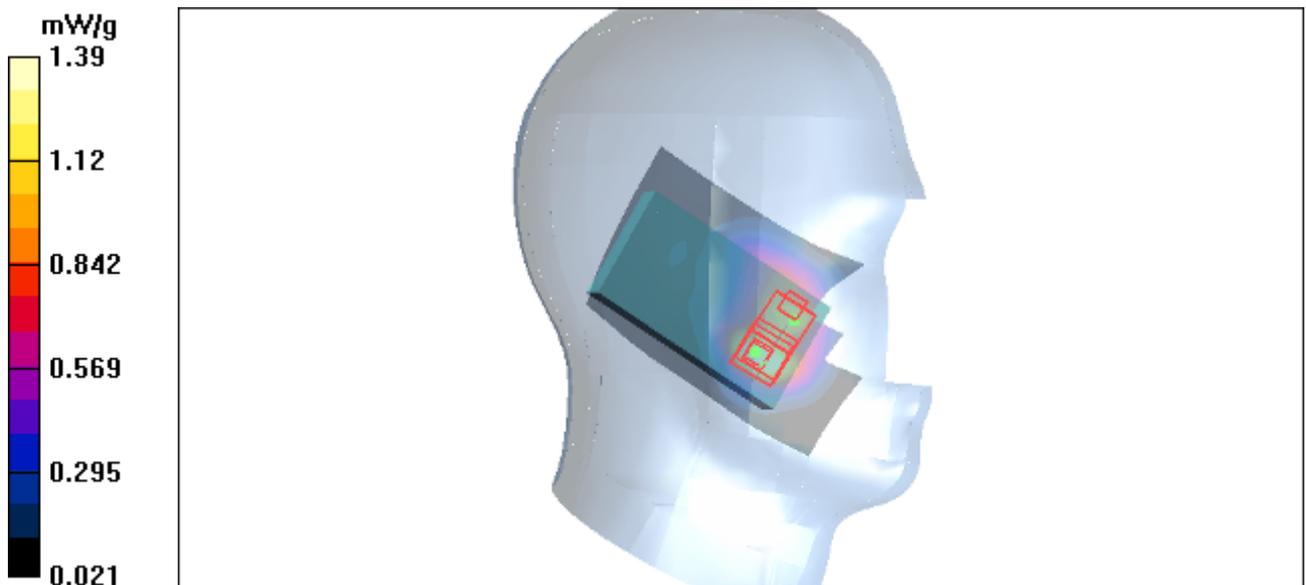

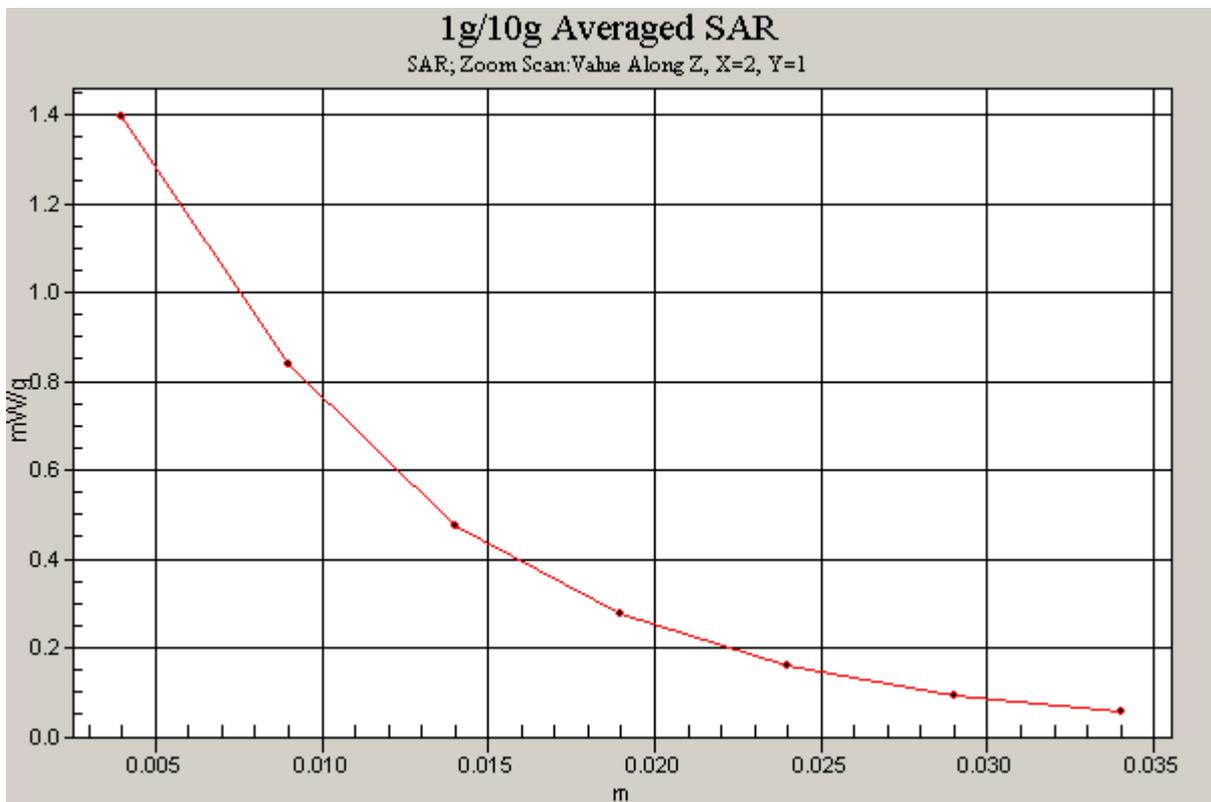
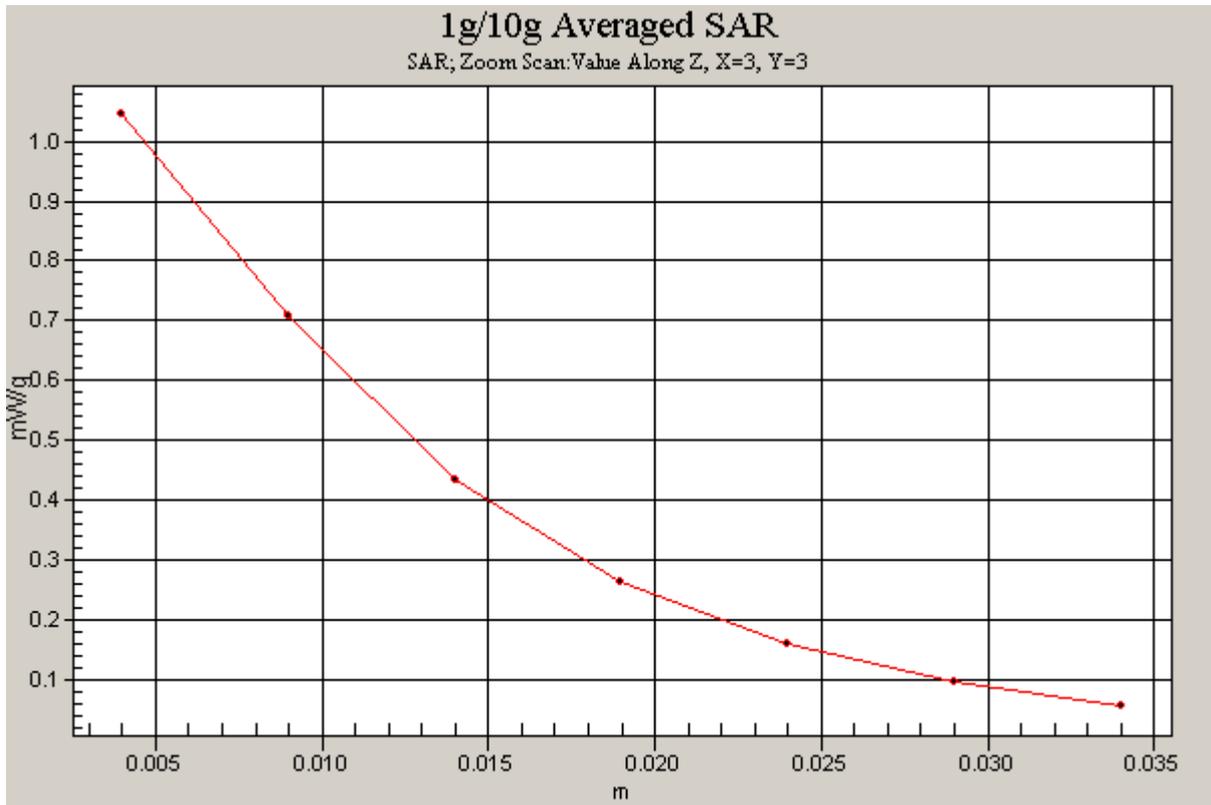


Figure 37 Left Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Left Cheek Low

Date/Time: 4/14/2011 8:14:33 AM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.38 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.76 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.863 mW/g; SAR(10 g) = 0.508 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=10mm, dy=5mm, dz=5mm

Reference Value = 6.76 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.696 mW/g

Maximum value of SAR (measured) = 1.30 mW/g

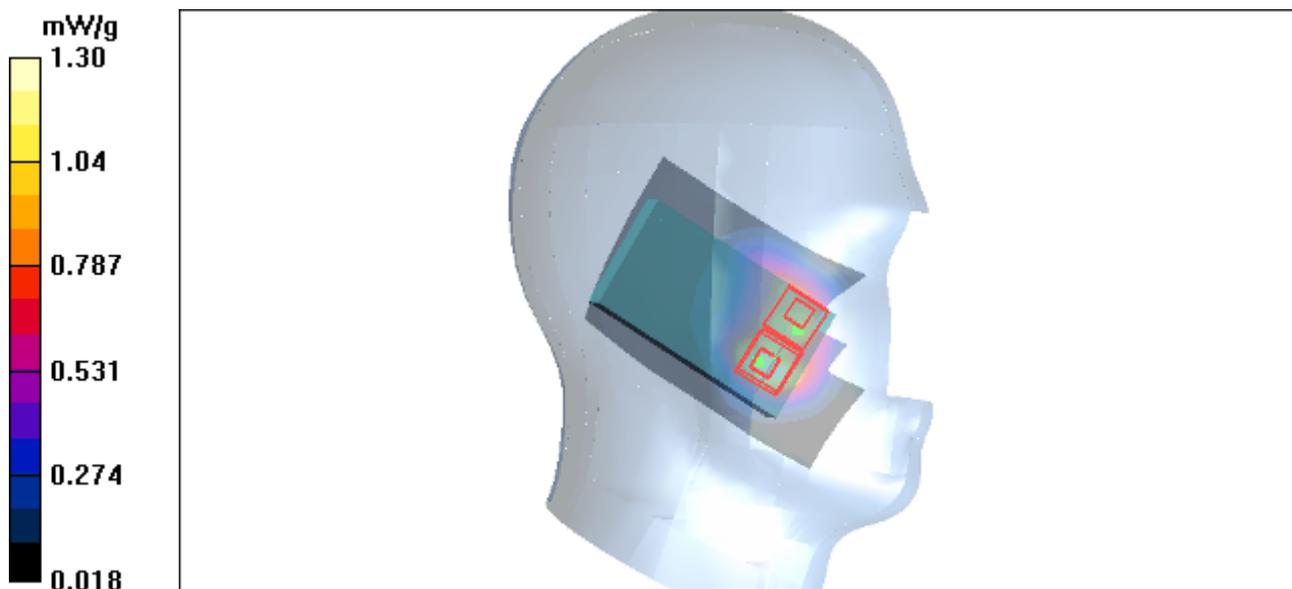


Figure 38 Left Hand Touch Cheek GSM 1900 Channel 512

GSM 1900 Left Tilt Middle

Date/Time: 4/14/2011 9:39:24 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.322 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.165 mW/g

Maximum value of SAR (measured) = 0.287 mW/g

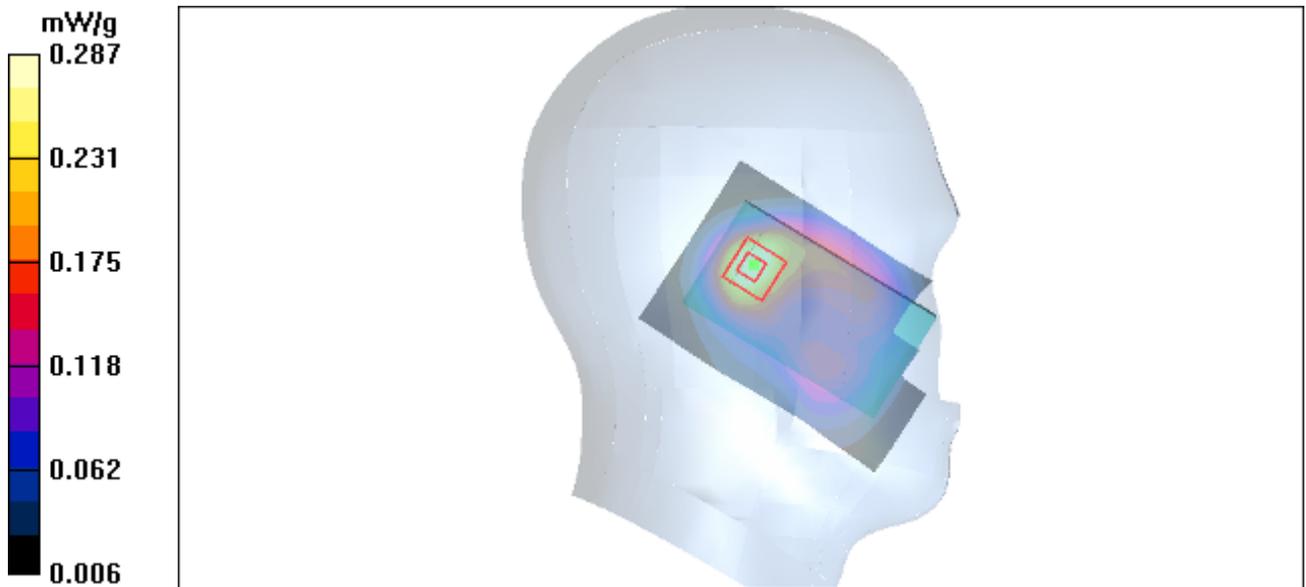


Figure 39 Left Hand Tilt 15° GSM 1900 Channel 661

GSM 1900 Right Cheek High

Date/Time: 4/14/2011 6:40:15 AM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.16 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.49 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.988 mW/g; SAR(10 g) = 0.561 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

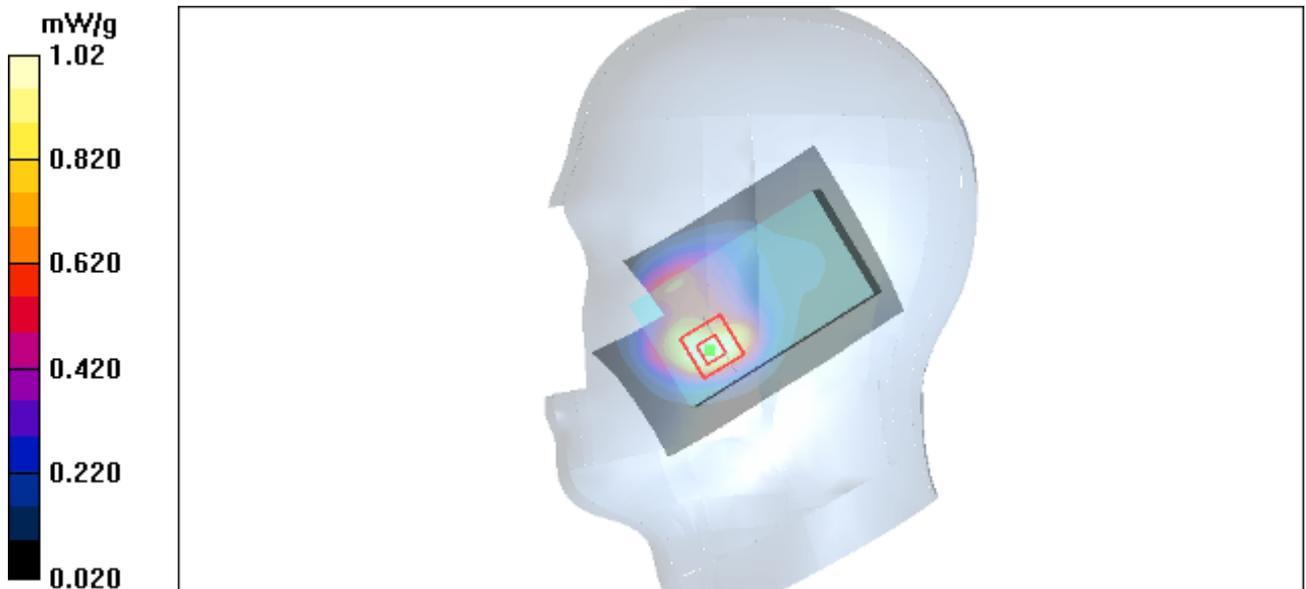


Figure 40 Right Hand Touch Cheek GSM 1900 Channel 810

GSM 1900 Right Cheek Middle

Date/Time: 4/14/2011 6:14:37 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.24 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.88 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.616 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

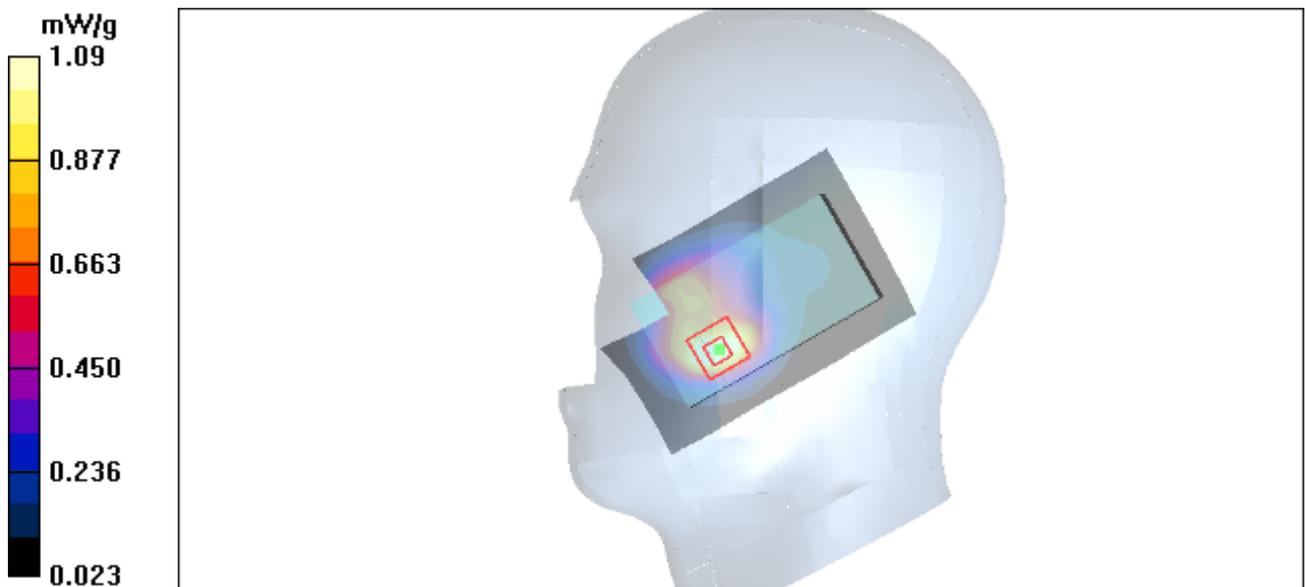


Figure 41 Right Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Right Cheek Low

Date/Time: 4/14/2011 6:51:52 AM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.89 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.597 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

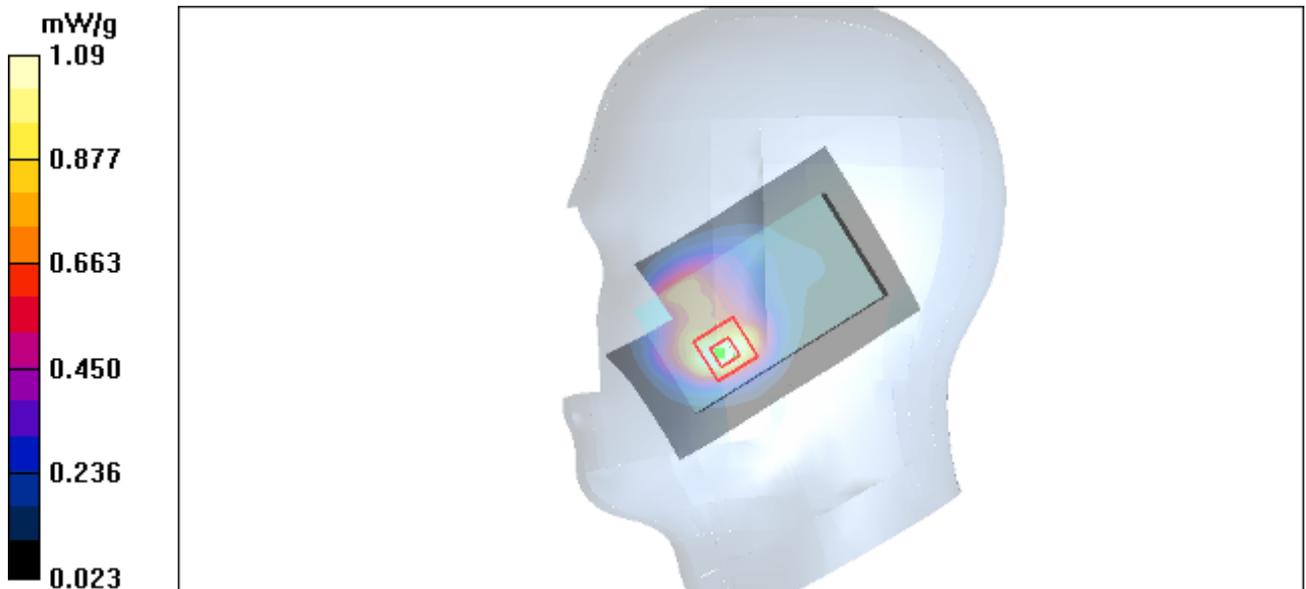


Figure 42 Right Hand Touch Cheek GSM 1900 Channel 512

GSM 1900 Right Tilt Middle

Date/Time: 4/14/2011 6:27:17 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.301 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

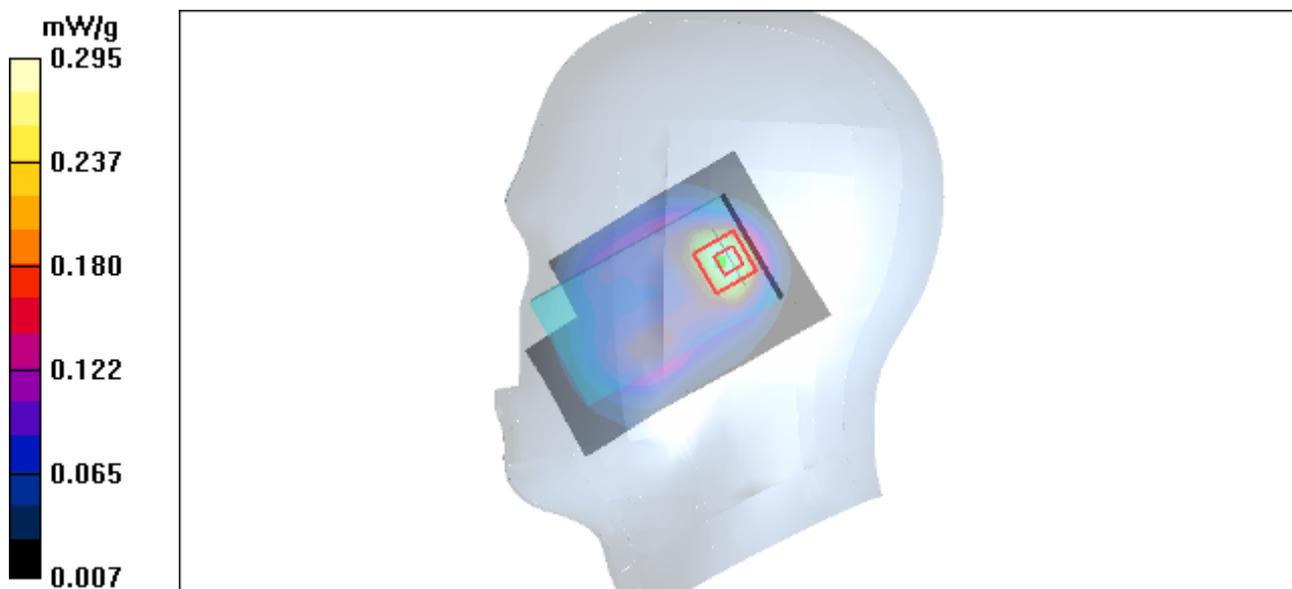


Figure 43 Right Hand Tilt 15° GSM 1900 Channel 661

GSM 1900 Left Cheek Middle with Battery(SN:UNHAA29XA4314746)

Date/Time: 4/16/2011 1:18:02 AM

Communication System: PCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.50 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.06 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.860 mW/g; SAR(10 g) = 0.512 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.06 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

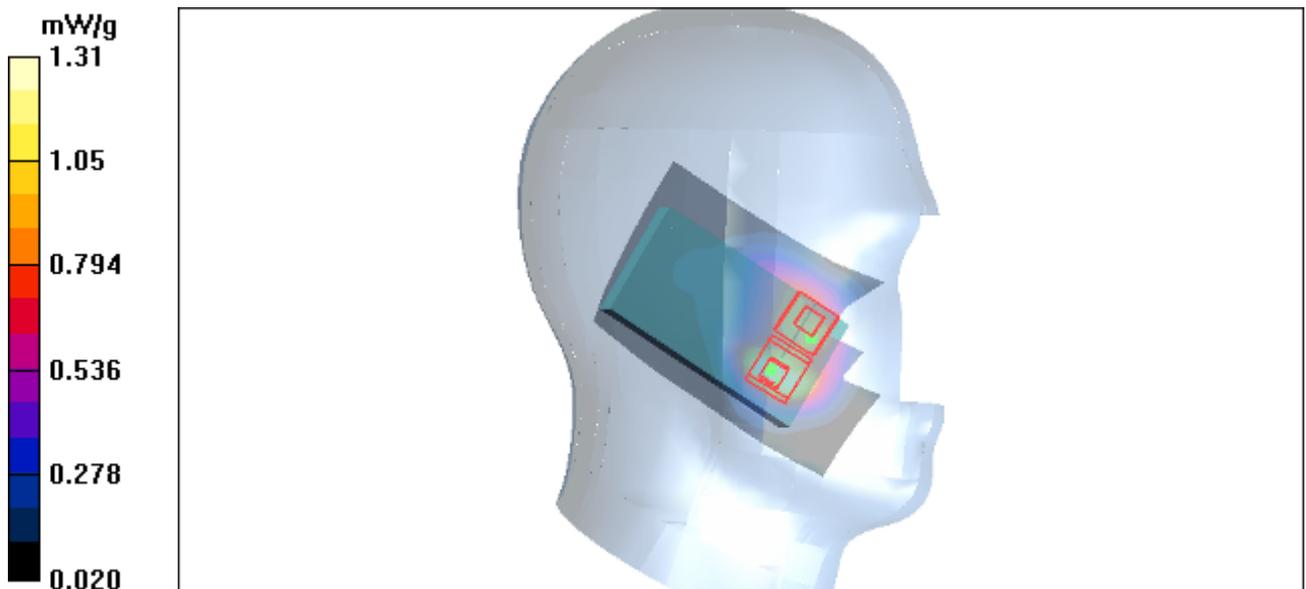


Figure 44 Left Hand Touch Cheek GSM 1900 Channel 661

GSM 1900 Towards Ground Middle

Date/Time: 4/16/2011 2:20:16 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.310 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.74 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.277 mW/g

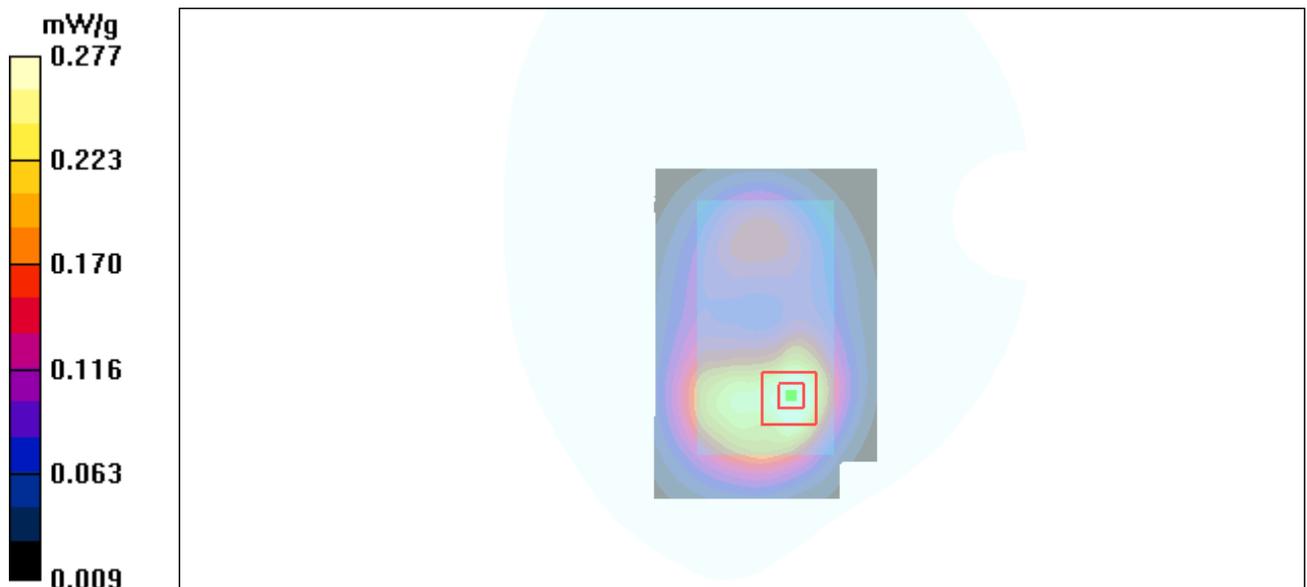


Figure 45 Body, Towards Ground, GSM 1900 Channel 661

GSM 1900 GPRS (2TXslots) Towards Ground High

Date/Time: 4/16/2011 7:17:30 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.546 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.478 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.478 mW/g

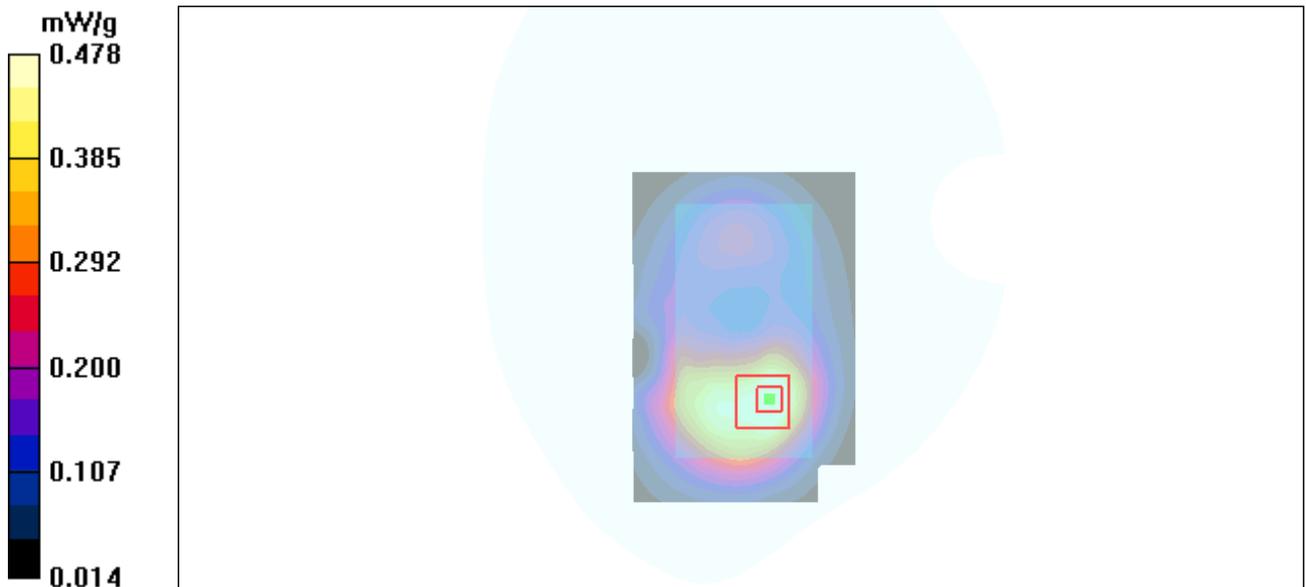


Figure 46 Body, Towards Ground, GSM 1900 GPRS (2TXslots) Channel 810

GSM 1900 GPRS (2TXslots) Towards Ground Middle

Date/Time: 4/16/2011 2:33:49 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.578 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.130 dB

Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.509 mW/g

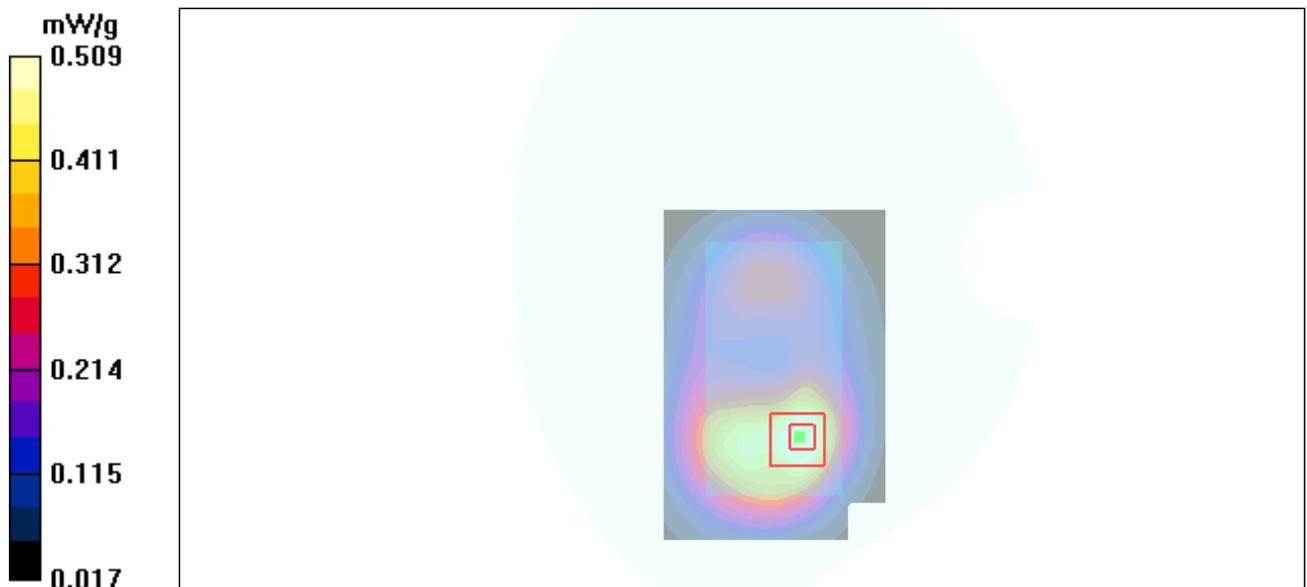


Figure 47 Body, Towards Ground, GSM 1900 GPRS (2TXslots) Channel 661

GSM 1900 GPRS (2TXslots) Towards Ground Low

Date/Time: 4/16/2011 10:06:27 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.497 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.261 mW/g

Maximum value of SAR (measured) = 0.437 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.397 mW/g

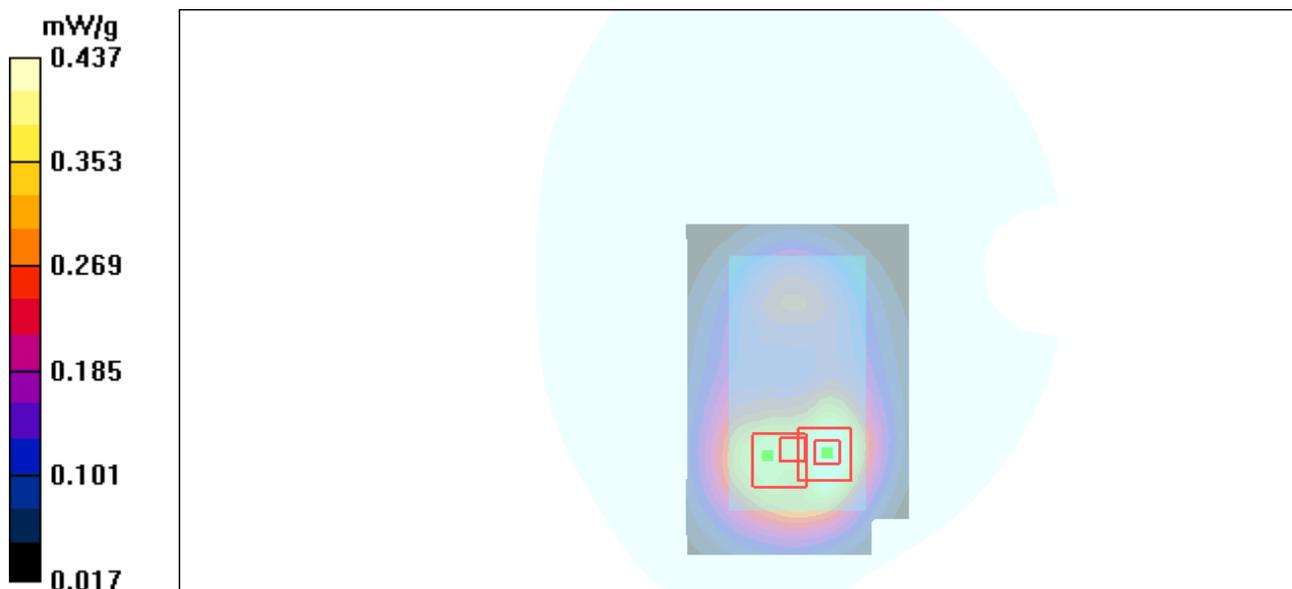


Figure 48 Body, Towards Ground, GSM 1900 GPRS (2TXslots) Channel 512

GSM 1900 GPRS (2TXslots) Towards Phantom Middle

Date/Time: 4/16/2011 3:58:42 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.535 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.890 W/kg

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.307 mW/g

Maximum value of SAR (measured) = 0.520 mW/g

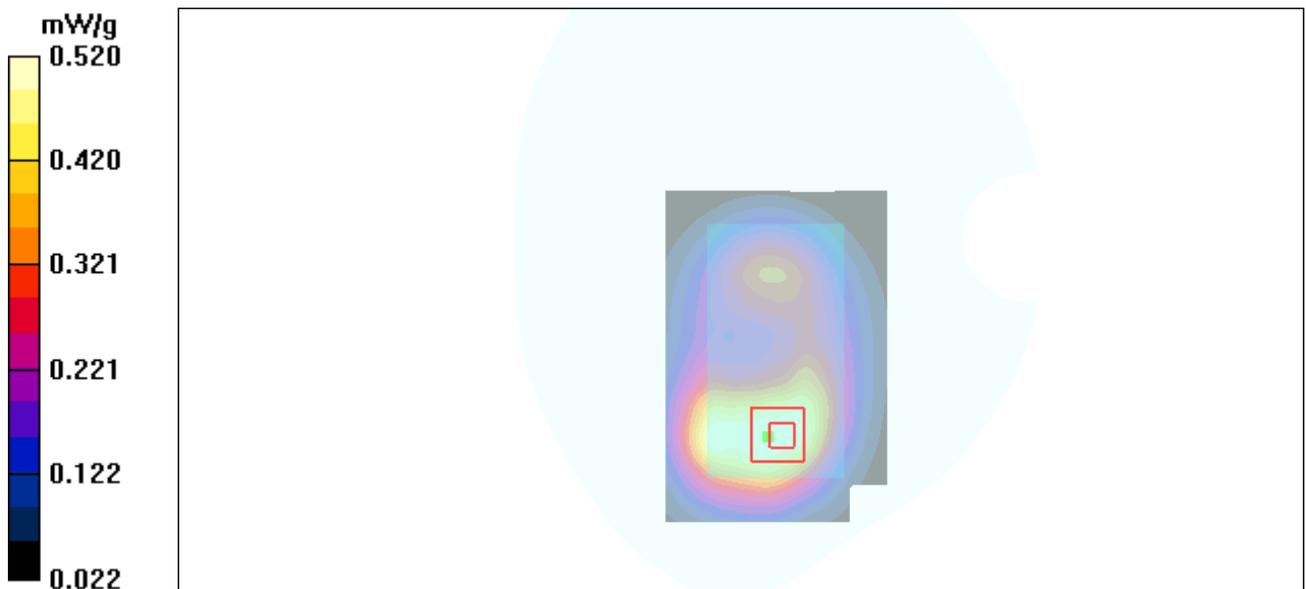


Figure 49 Body, Towards Phantom, GSM 1900 GPRS (2TXslots) Channel 661

GSM 1900 with Earphone Towards Ground Middle

Date/Time: 4/16/2011 11:00:35 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.247 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.95 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.223 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.95 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.235 mW/g

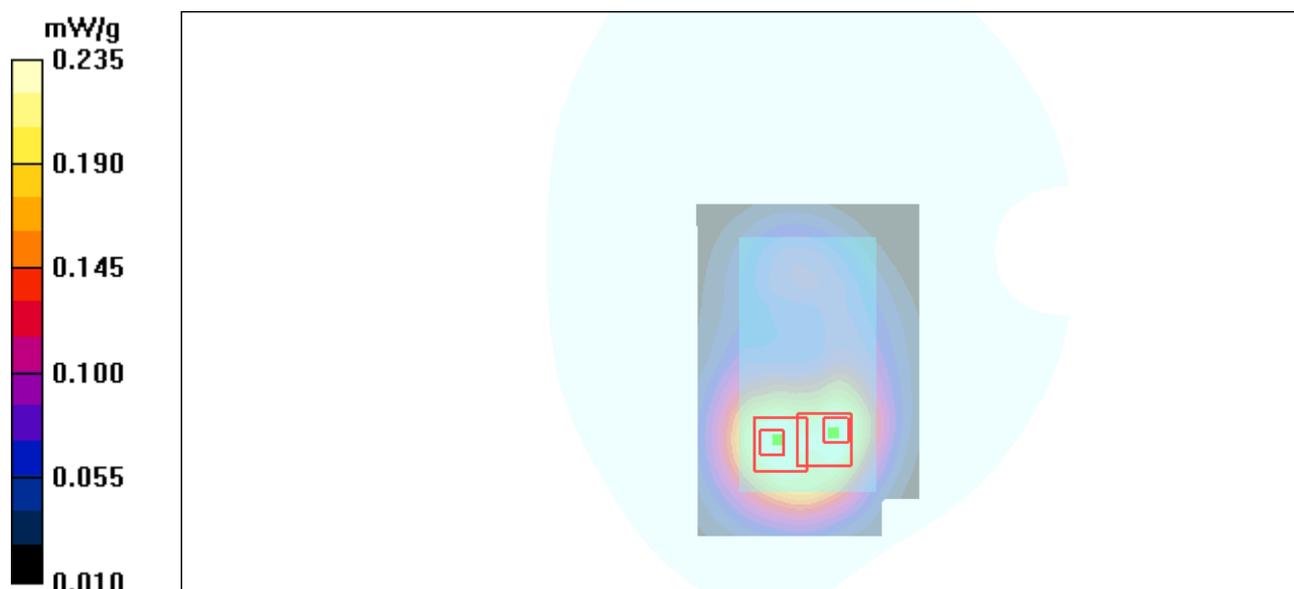


Figure 50 Body with Earphone, Towards Ground, GSM 1900 Channel 661

GSM 1900 EGPRS (2TXslots) Towards Ground Middle

Date/Time: 4/16/2011 10:23:53 AM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.514 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.942 W/kg

SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.277 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.230 mW/g

Maximum value of SAR (measured) = 0.442 mW/g

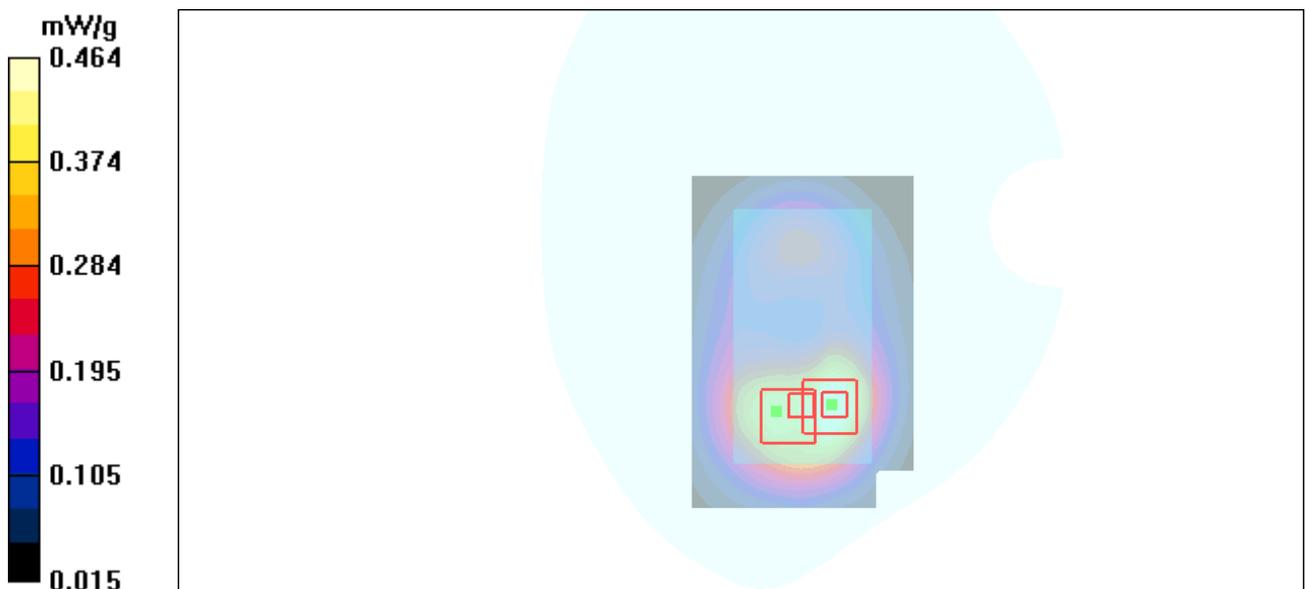


Figure 51 Body, Towards Ground, GSM 1900 EGPRS (2TXslots) Channel 661

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 94 of 178

GSM 1900 GPRS (2TXslots) (Hot spots) Towards Ground High

Date/Time: 4/15/2011 9:43:31 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.492 mW/g

Maximum value of SAR (measured) = 0.890 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 0.938 mW/g

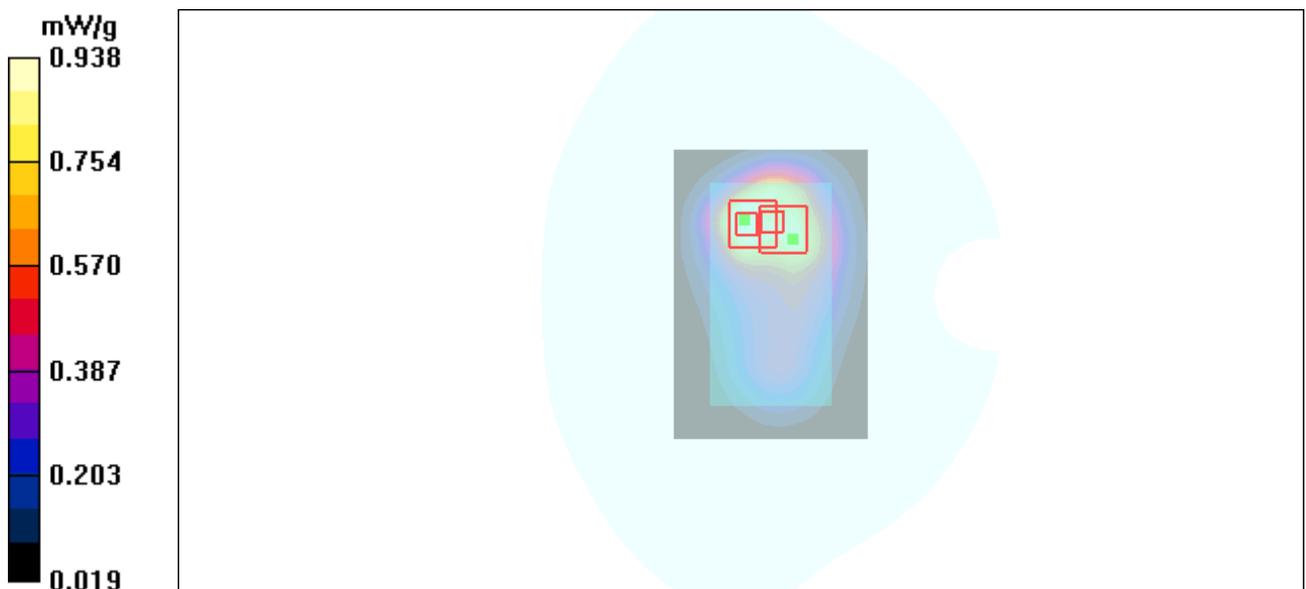


Figure 52 Body, Towards Ground, GSM 1900 GPRS (2TXslots) Channel 810

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 95 of 178

GSM 1900 GPRS (2TXslots) (Hot spots) Towards Ground Middle

Date/Time: 4/15/2011 9:28:25 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.29 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.969 mW/g; SAR(10 g) = 0.522 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.650 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

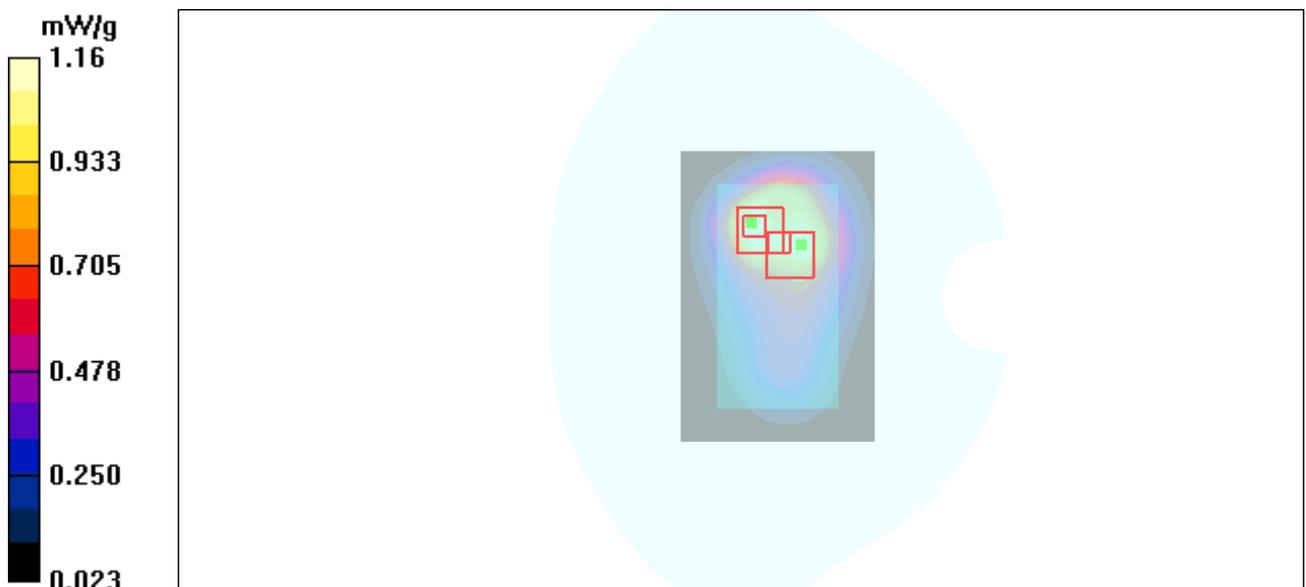


Figure 53 Body, Towards Ground, GSM 1900 GPRS (2TXslots) Channel 661

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 96 of 178

GSM 1900 GPRS (2TXslots) (Hot spots) Towards Ground Low

Date/Time: 4/15/2011 9:58:46 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.34 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.680 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.685 mW/g

Maximum value of SAR (measured) = 1.23 mW/g

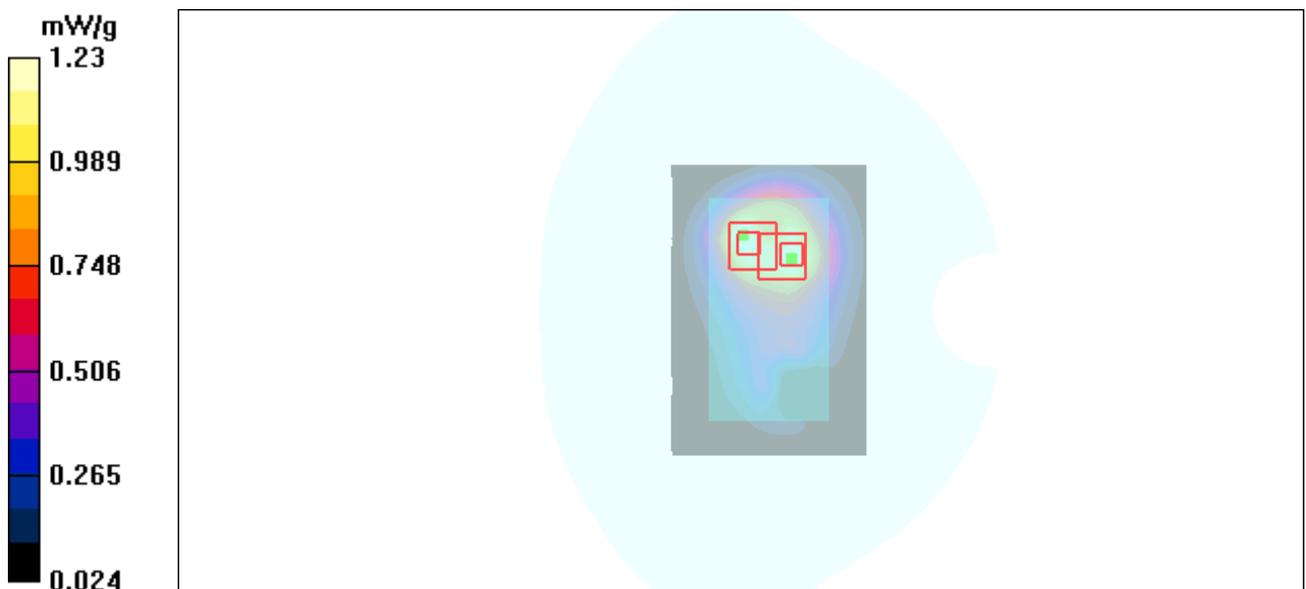


Figure 54 Body, Towards Ground, GSM 1900 GPRS (2TXslots) Channel 512

GSM 1900 GPRS (2TXslots) (Hot spots) Towards Phantom High

Date/Time: 4/15/2011 10:31:22 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 19.4 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.552 mW/g

Maximum value of SAR (measured) = 0.959 mW/g

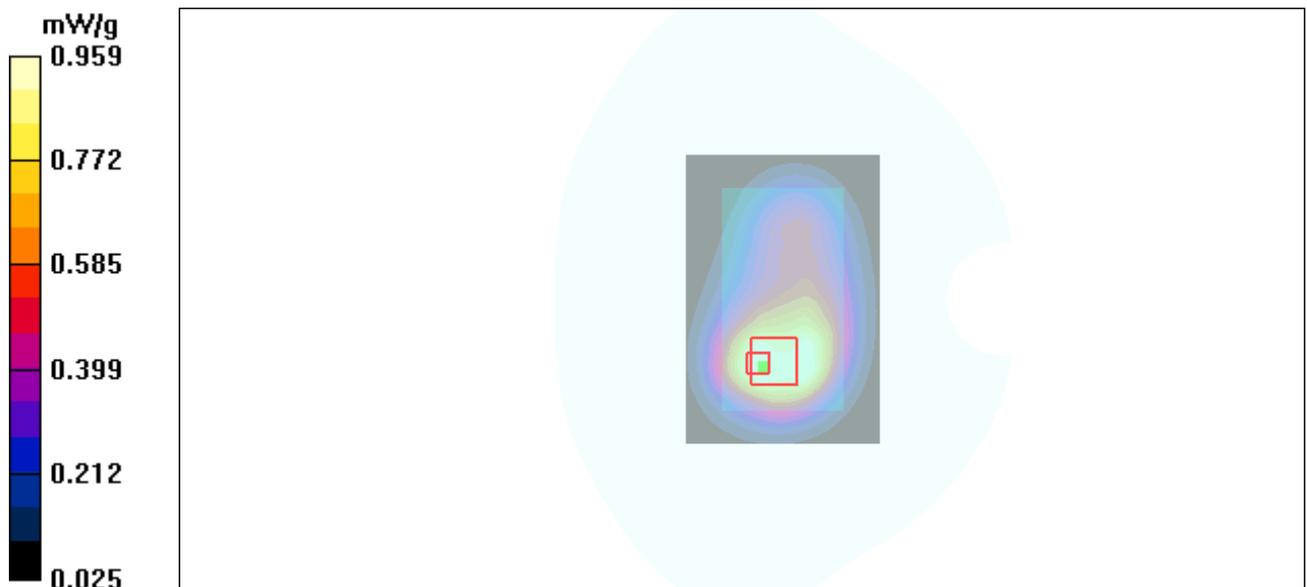


Figure 55 Body, Towards Phantom, GSM 1900 GPRS (2TXslots) Channel 810

GSM 1900 GPRS (2TXslots) (Hot spots) Towards Phantom Middle

Date/Time: 4/15/2011 10:19:36 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.21 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 22.1 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.650 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

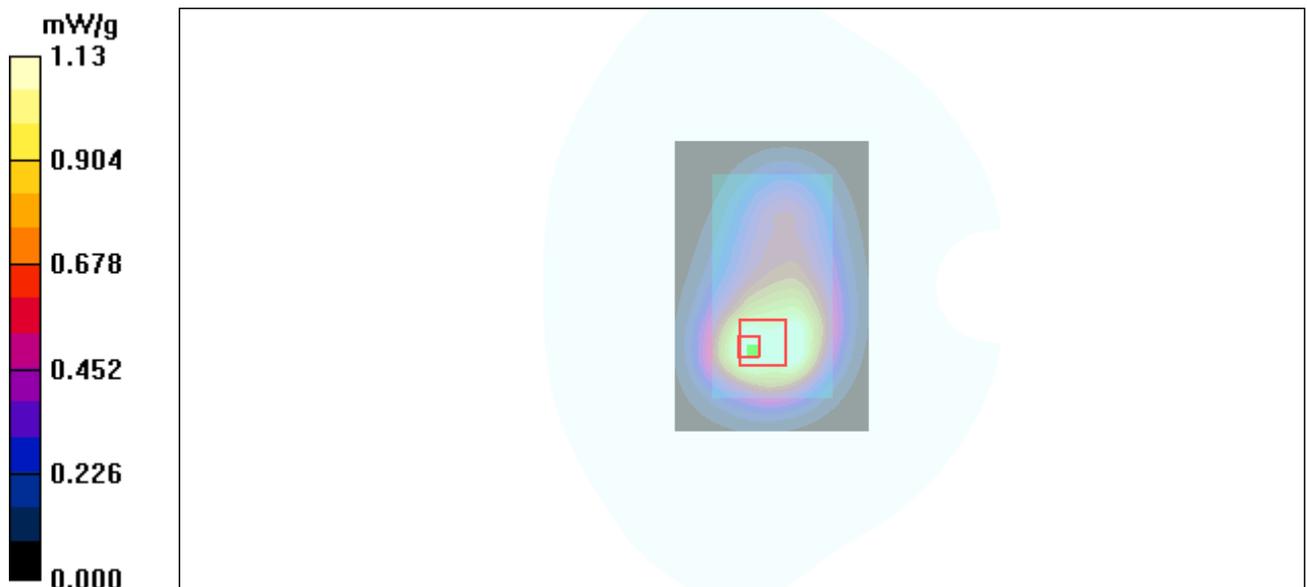


Figure 56 Body, Towards Phantom, GSM 1900 GPRS (2TXslots) Channel 661

GSM 1900 GPRS (2TXslots) (Hot spots) Towards Phantom Low

Date/Time: 4/15/2011 10:43:07 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.25 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 22.9 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

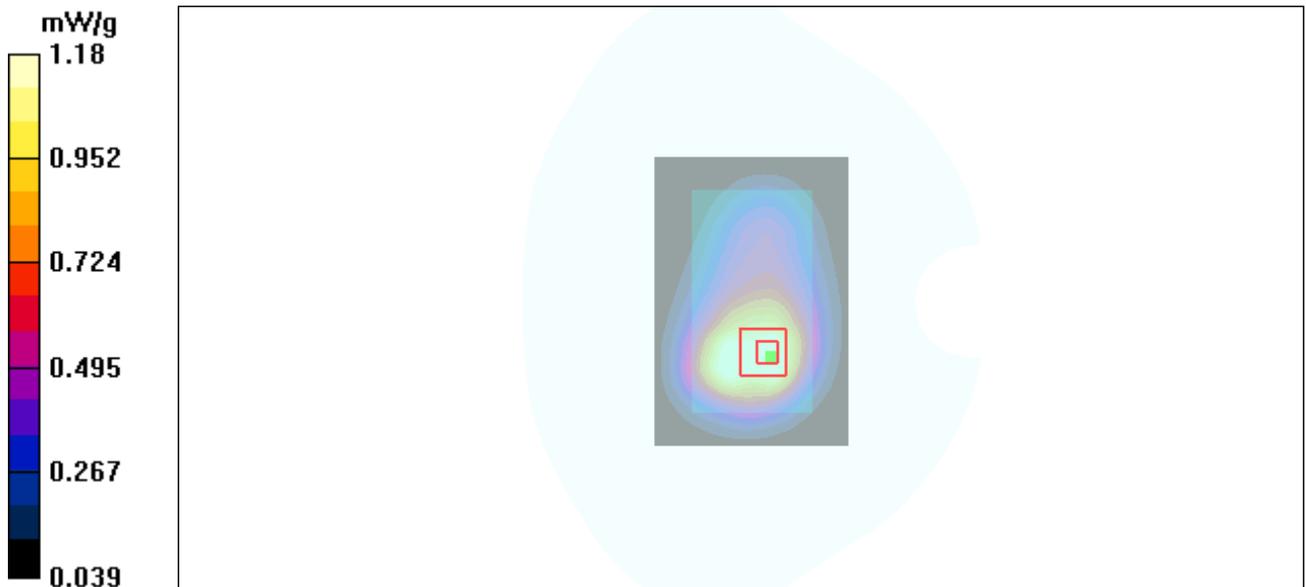


Figure 57 Body, Towards Phantom, GSM 1900 GPRS (2TXslots) Channel 512

GSM 1900 GPRS (2TXslots) (Hot spots) Left Edge Middle

Date/Time: 4/16/2011 5:58:26 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Left Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.290 mW/g

Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.272 mW/g

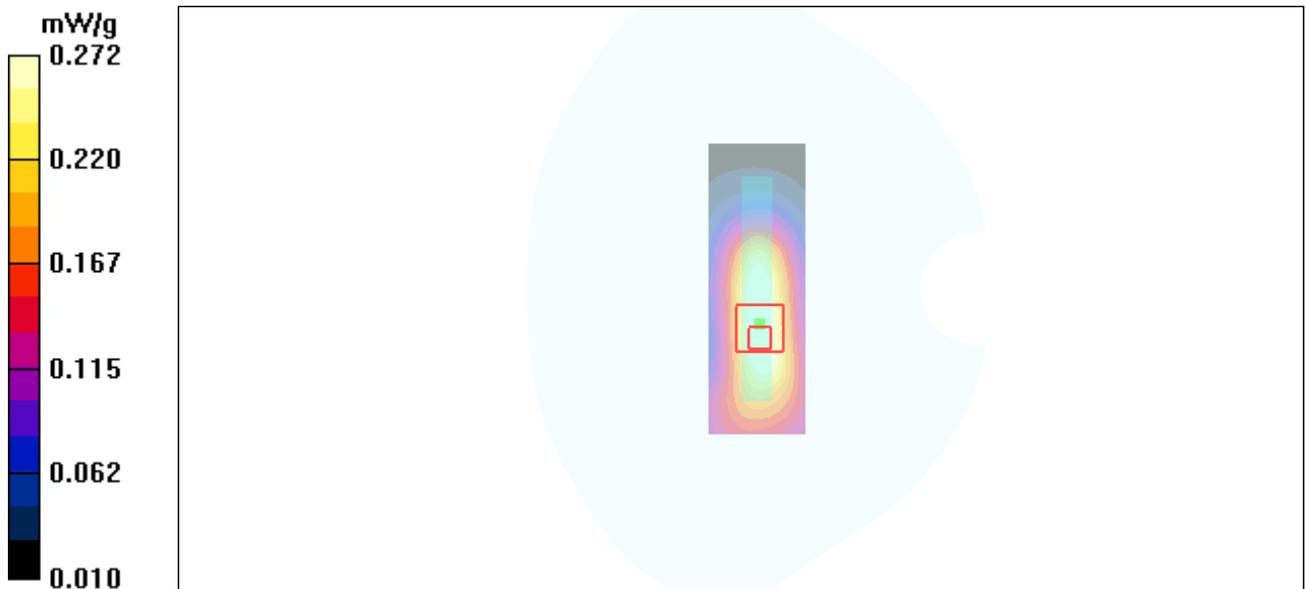


Figure 58 Body, Left Edge, GSM 1900 GPRS (2TXslots) Channel 661

GSM 1900 GPRS (2TXslots) (Hot spots) Right Edge Middle

Date/Time: 4/16/2011 6:08:19 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Right Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.284 mW/g

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

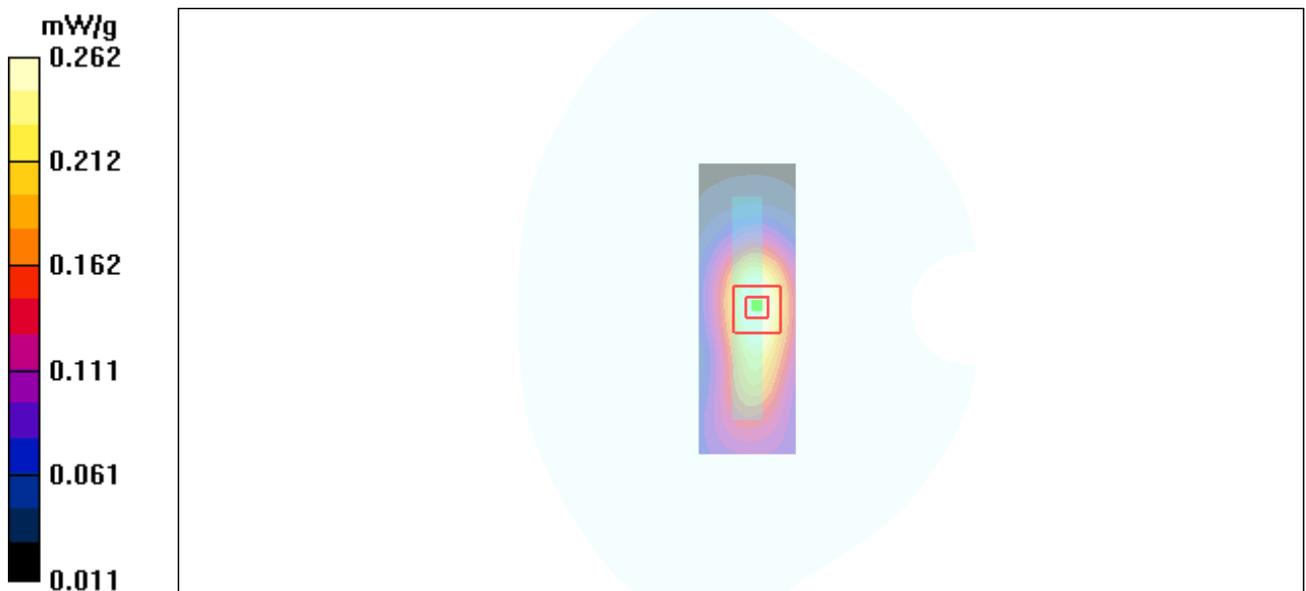


Figure 59 Body, Right Edge, GSM 1900 GPRS (2TXslots) Channel 661

GSM 1900 GPRS (2TXslots) (Hot spots) Bottom Edge Middle

Date/Time: 4/16/2011 6:29:34 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Bottom Edge Middle/Area Scan (31x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.640 mW/g

Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.582 mW/g

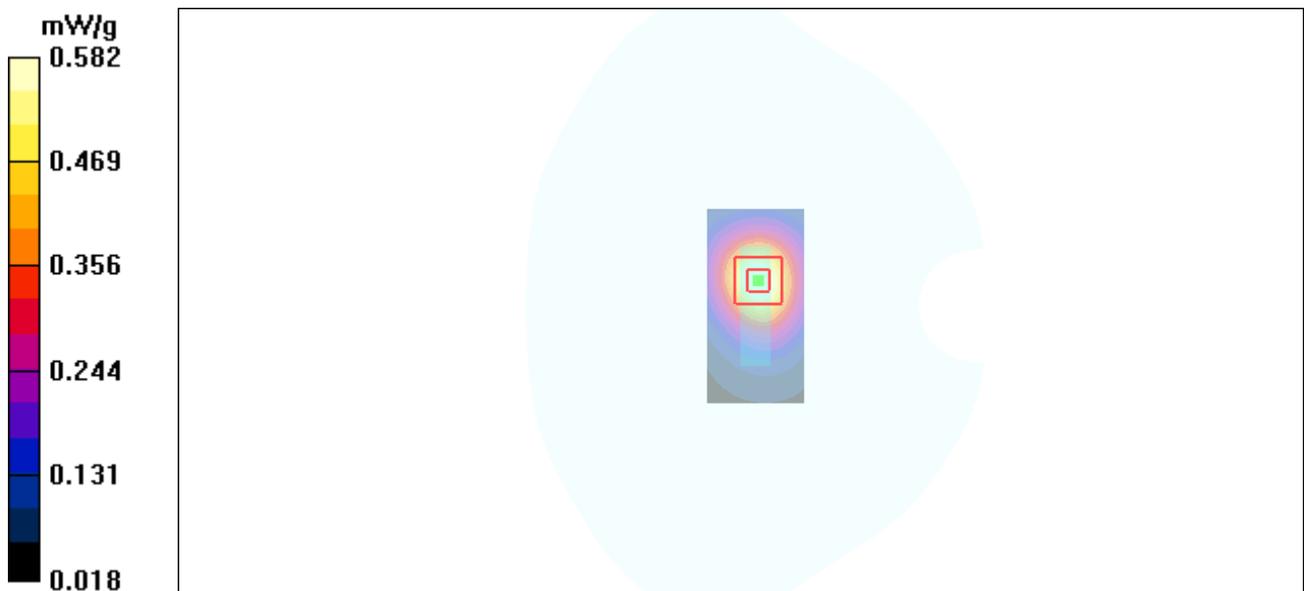


Figure 60 Body, Bottom Edge, GSM 1900 GPRS (2TXslots) Channel 661

GSM 1900 EGPRS (2TXslots) (hot spots) Towards Ground Low

Date/Time: 4/16/2011 6:44:17 AM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.35 mW/g


Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.703 mW/g

Maximum value of SAR (measured) = 1.37 mW/g

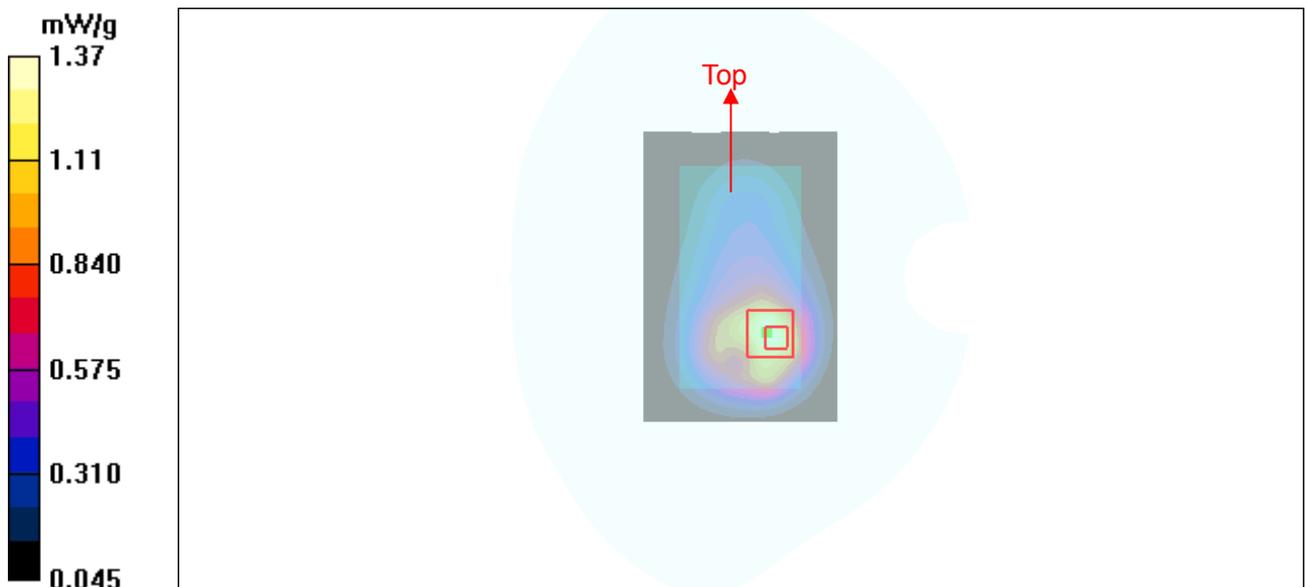

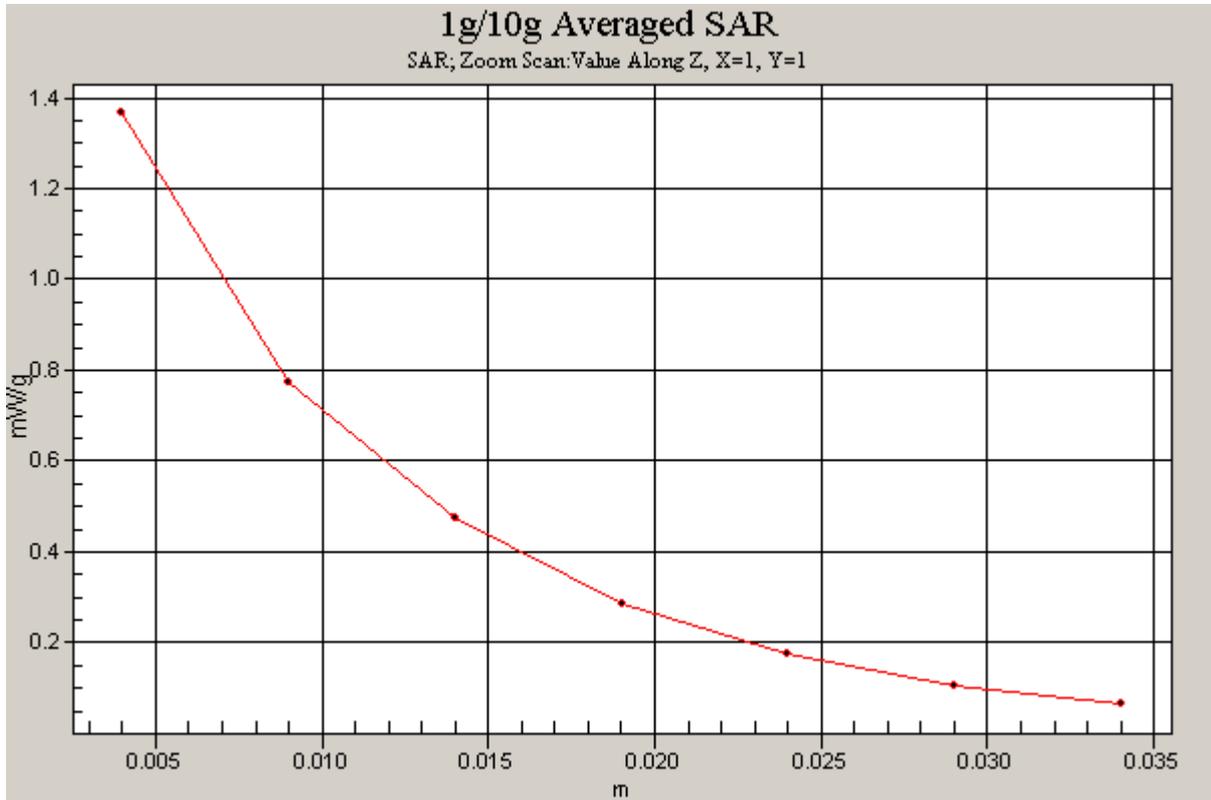


Figure 61 Body, Towards Ground, GSM 1900 EGPRS (2TXslots) Channel 512

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 105 of 178

GSM 1900 GPRS (2TXslots) (hot spots) Towards Ground Low with Battery(SN:UNHAA29XA4314746)

Date/Time: 4/20/2011 11:28:08 AM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.77, 7.77, 7.77); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.1 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.632 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

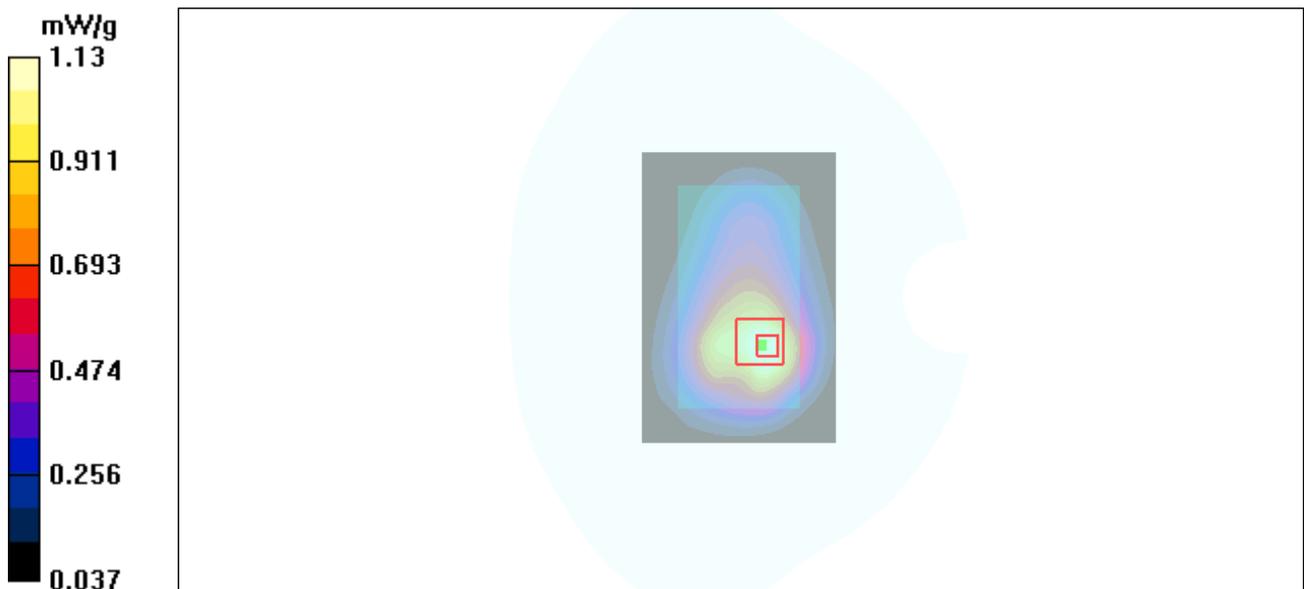


Figure 62 Body, Towards Ground, GSM 1900 GPRS (2TXslots) Channel 512 (X2)

802.11b Left Cheek Middle

Date/Time: 4/19/2011 5:21:41 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.099 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.19 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.092 mW/g

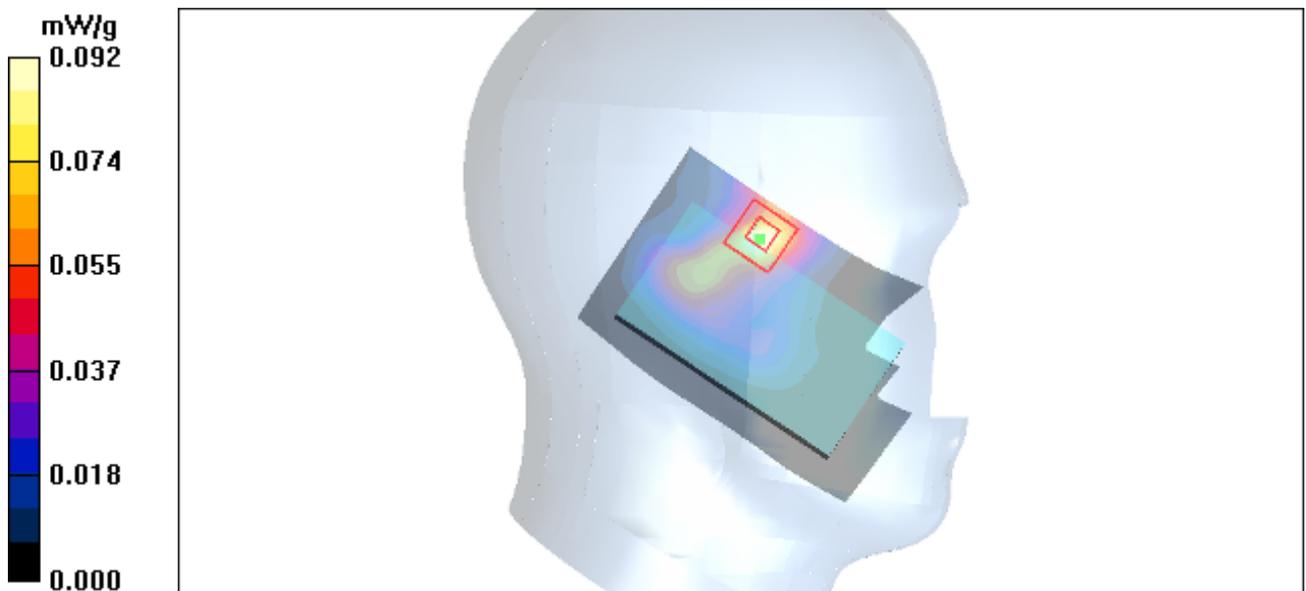


Figure 63 Left Hand Touch Cheek 802.11b Channel 6

802.11b Left Tilt Middle

Date/Time: 4/19/2011 5:33:37 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.086 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.42 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.077 mW/g

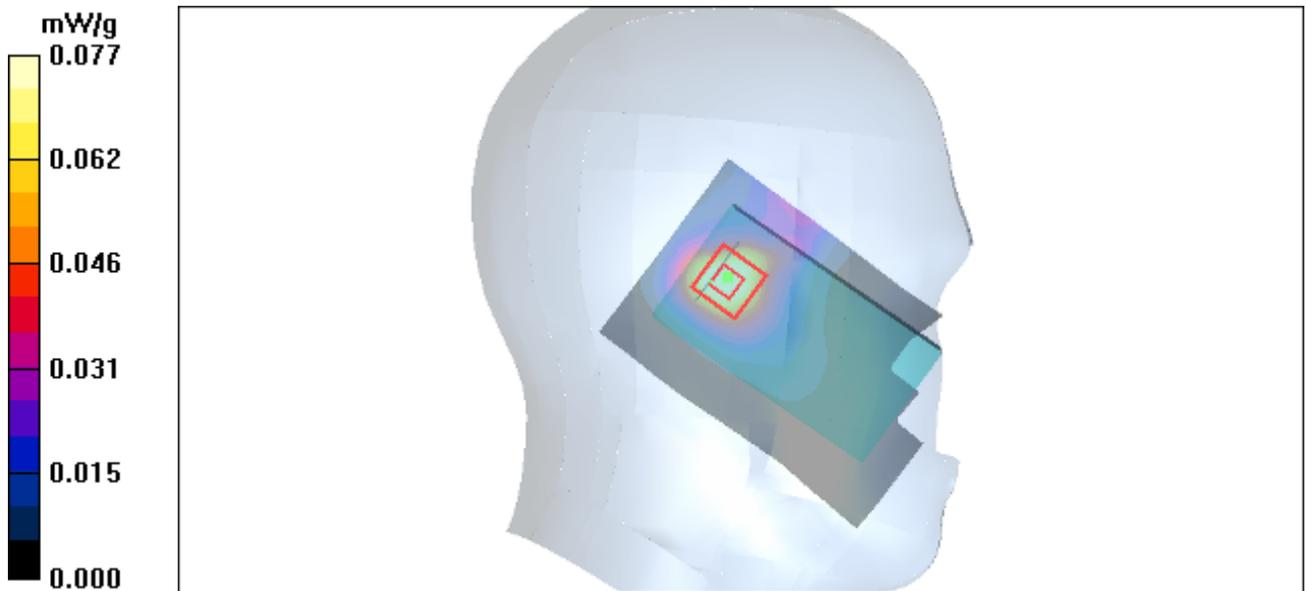


Figure 64 Left Hand Tilt 15° 802.11b Channel 6

802.11b Right Cheek Middle

Date/Time: 4/19/2011 5:47:26 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.084 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.54 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.073 mW/g

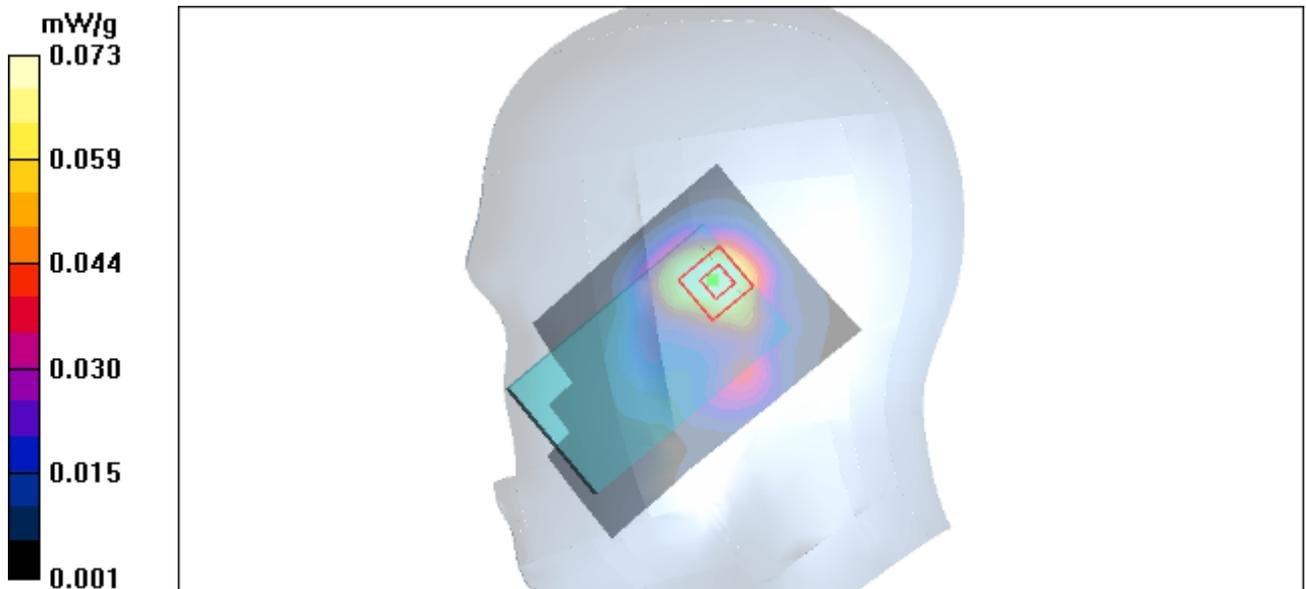


Figure 65 Right Hand Touch Cheek 802.11b Channel 6

802.11b Right Tilt High

Date/Time: 4/19/2011 6:13:43 PM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.090 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.66 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

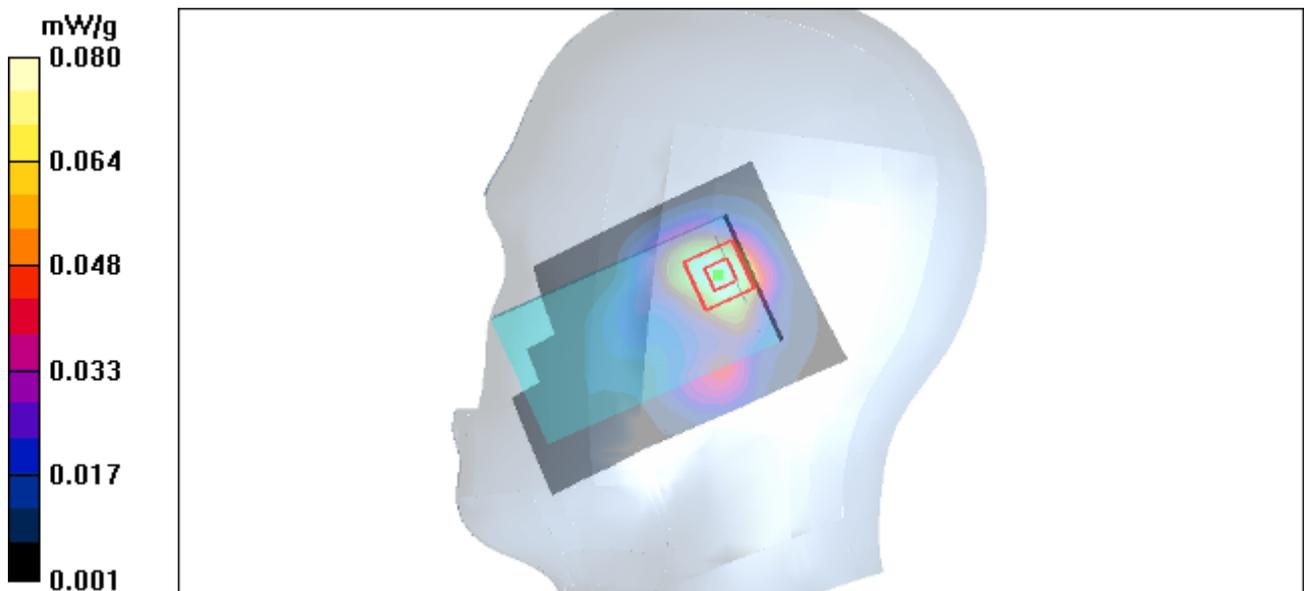


Figure 66 Right Hand Tilt 15° 802.11b Channel 11

802.11b Right Tilt Middle

Date/Time: 4/19/2011 5:59:22 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.094 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.46 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.088 mW/g

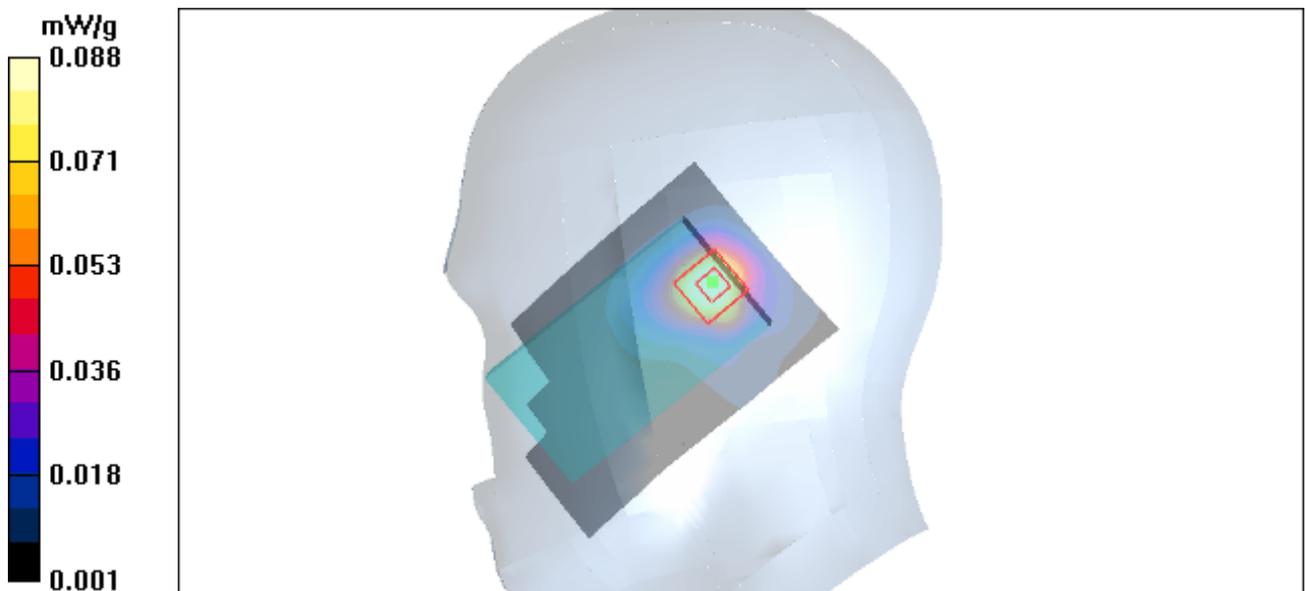


Figure 67 Right Hand Tilt 15° 802.11b Channel 6

802.11b Right Tilt Low

Date/Time: 4/19/2011 6:39:03 PM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.105 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.91 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.103 mW/g

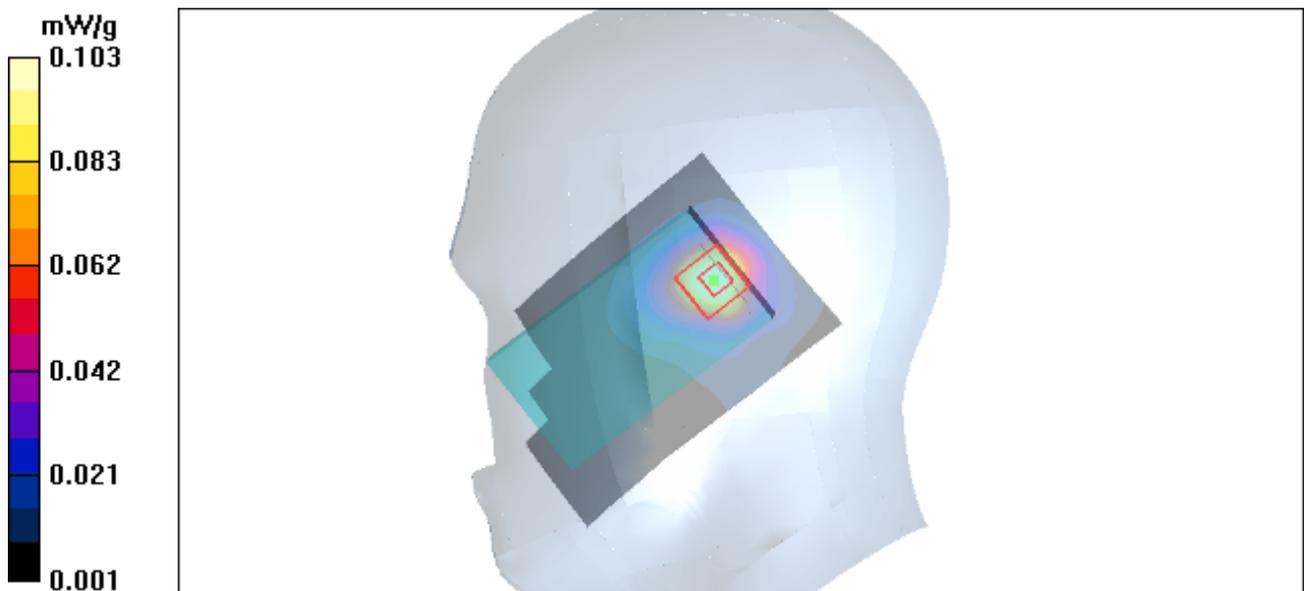


Figure 68 Right Hand Tilt 15° 802.11b Channel 1

802.11b Right Tilt Low with Battery(SN:UNHAA29XA4314746)

Date/Time: 4/19/2011 6:51:30 PM

Communication System: 802.11b; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.32, 7.32, 7.32); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.110 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.08 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.104 mW/g

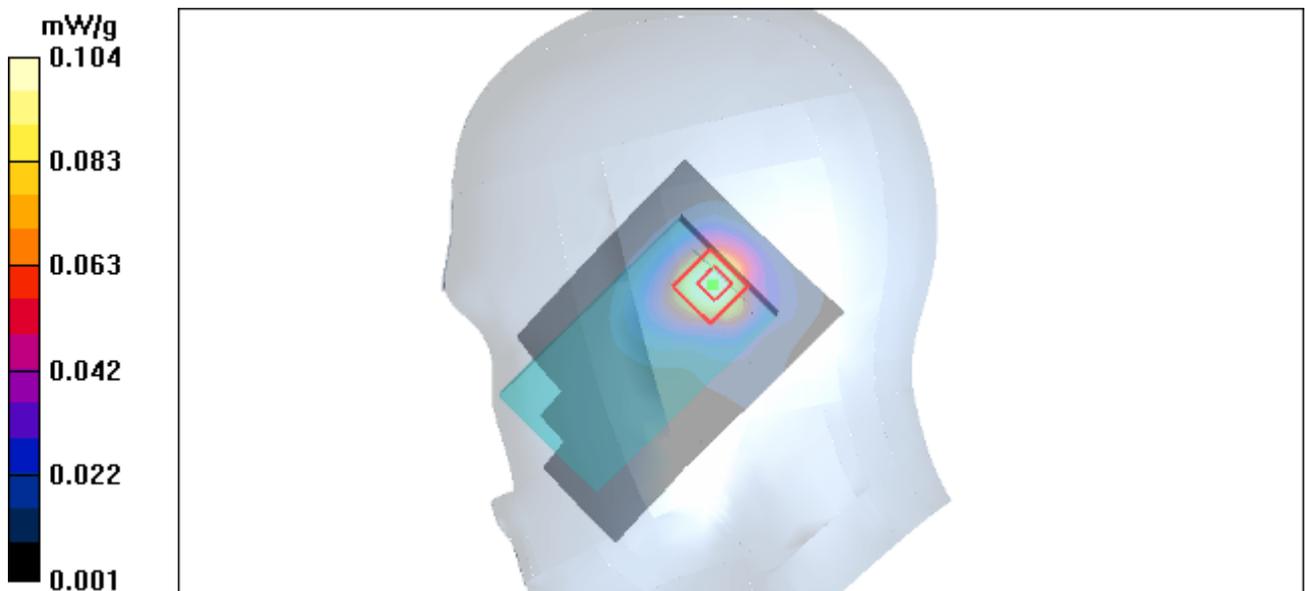

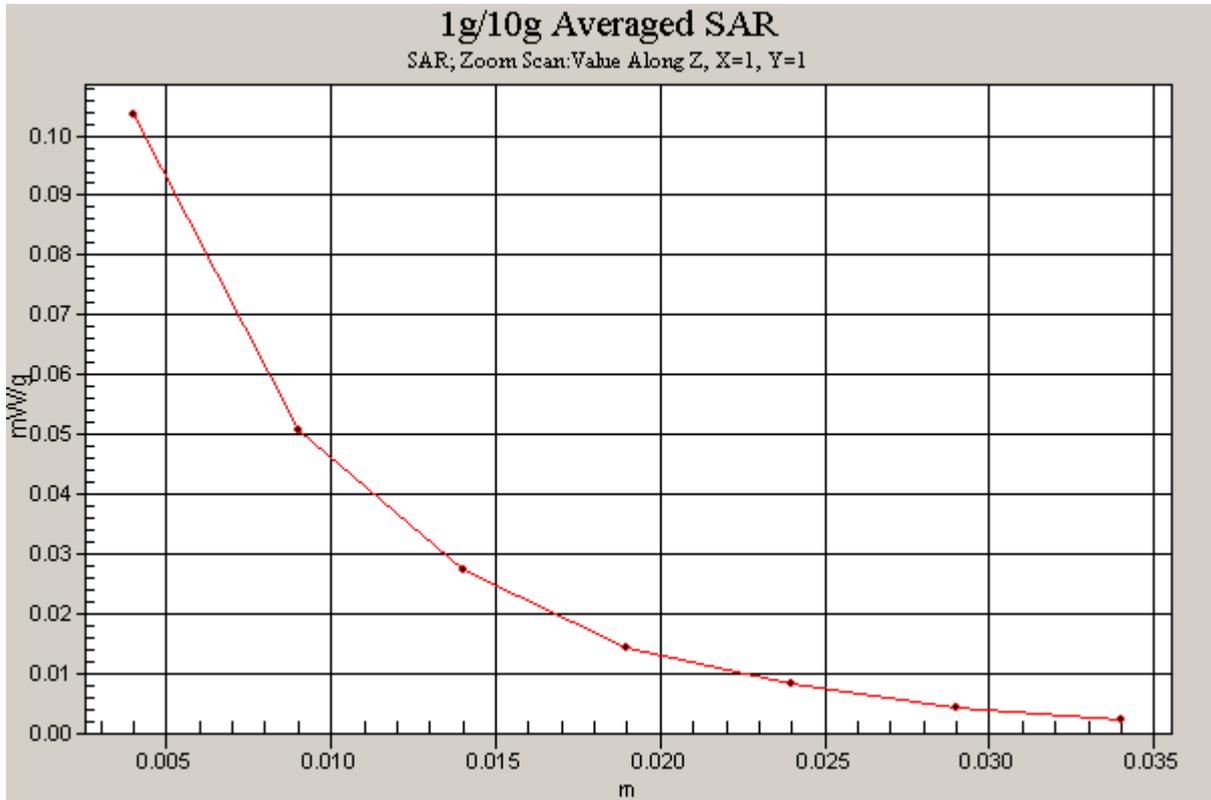


Figure 69 Right Hand Tilt 15° 802.11b Channel 1

802.11b Towards Ground High

Date/Time: 4/19/2011 7:44:13 PM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 5.07 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

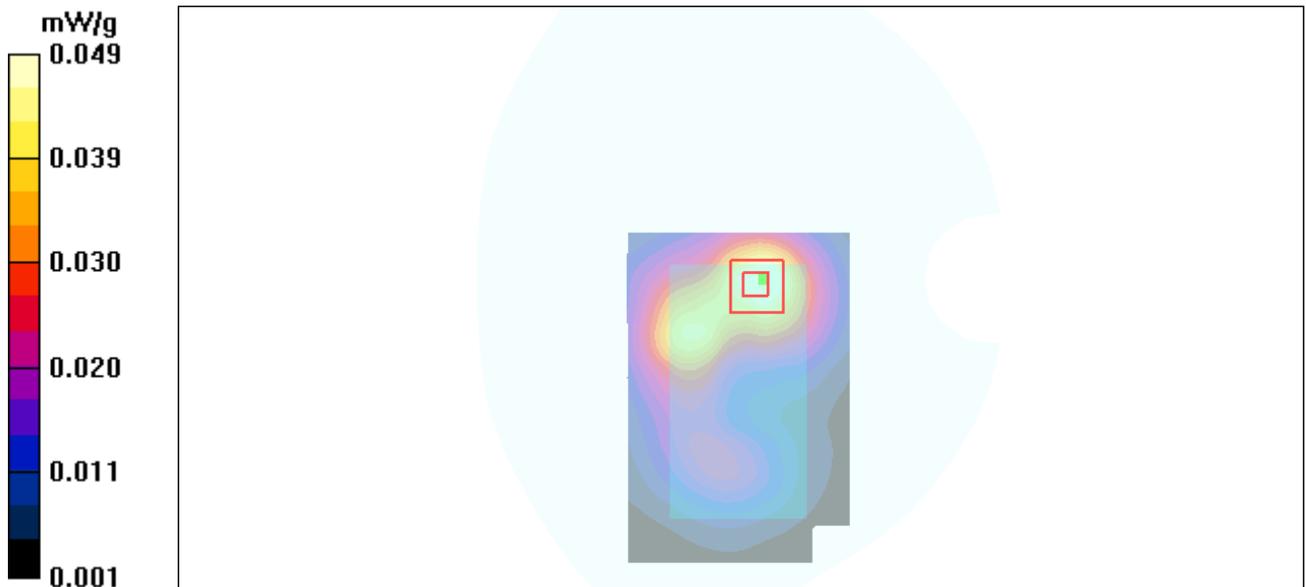


Figure 70 Body, Towards Ground, 802.11b Channel 11

802.11b Towards Ground Middle

Date/Time: 4/19/2011 7:31:07 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.056 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 5.36 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

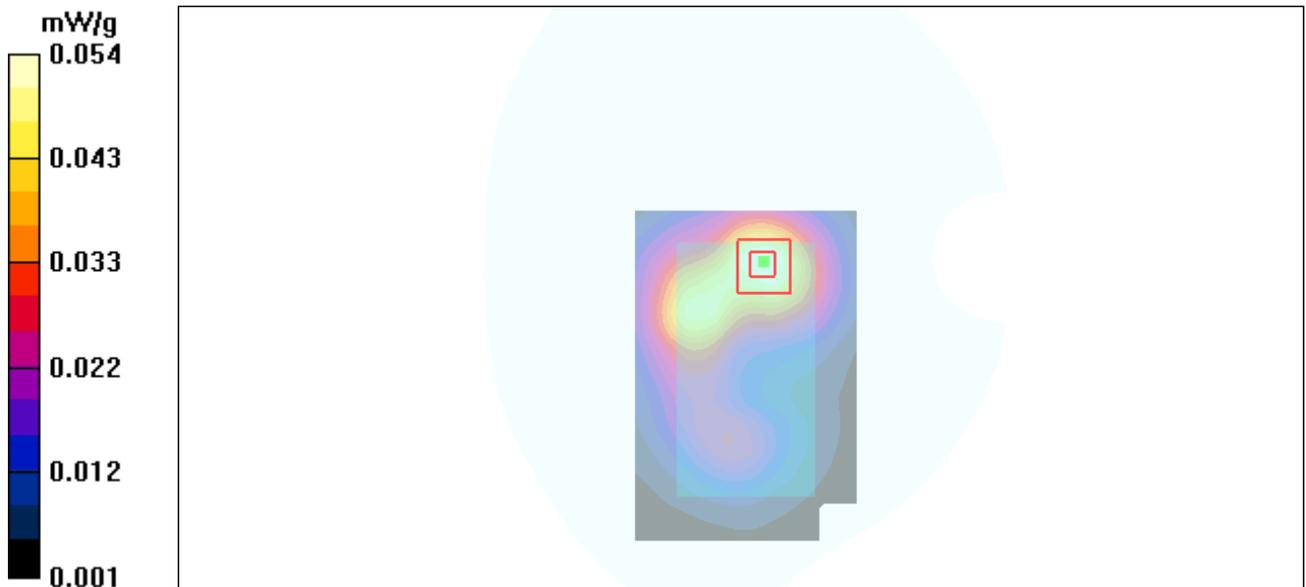


Figure 71 Body, Towards Ground, 802.11b Channel 6

802.11b Towards Ground Low

Date/Time: 4/19/2011 7:56:42 PM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.056 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.38 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

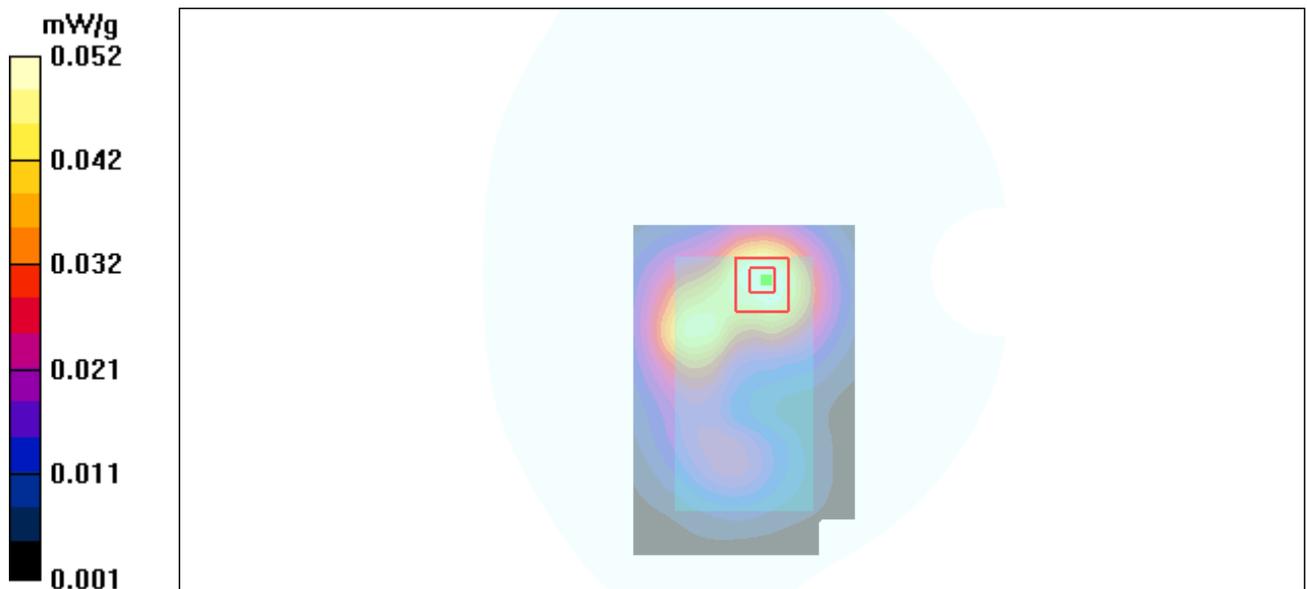


Figure 72 Body, Towards Ground, 802.11b Channel 1

802.11b Towards Phantom Middle

Date/Time: 4/19/2011 7:19:04 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.029 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 3.69 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.055 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

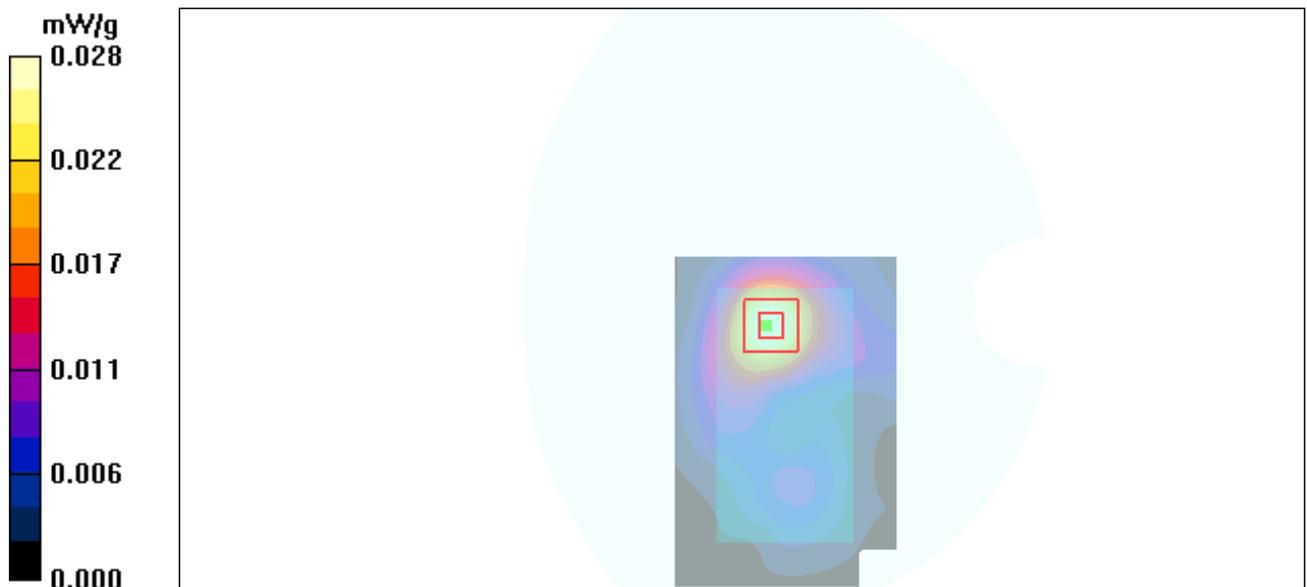


Figure 73 Body, Towards Phantom, 802.11b Channel 6

802.11b with Earphone Towards Ground Middle

Date/Time: 4/19/2011 8:36:19 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.056 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 4.75 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

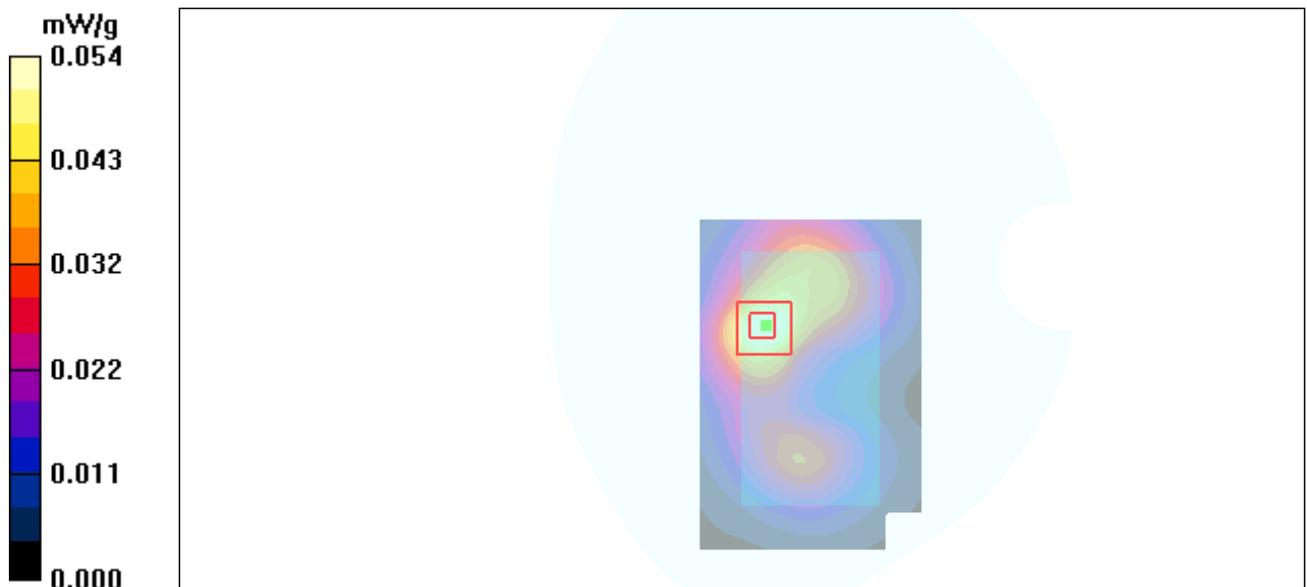


Figure 74 Body with earphone, Towards Ground, 802.11b Channel 6

802.11b (Hot spots) Towards Ground High

Date/Time: 4/19/2011 10:13:02 PM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.150 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.88 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

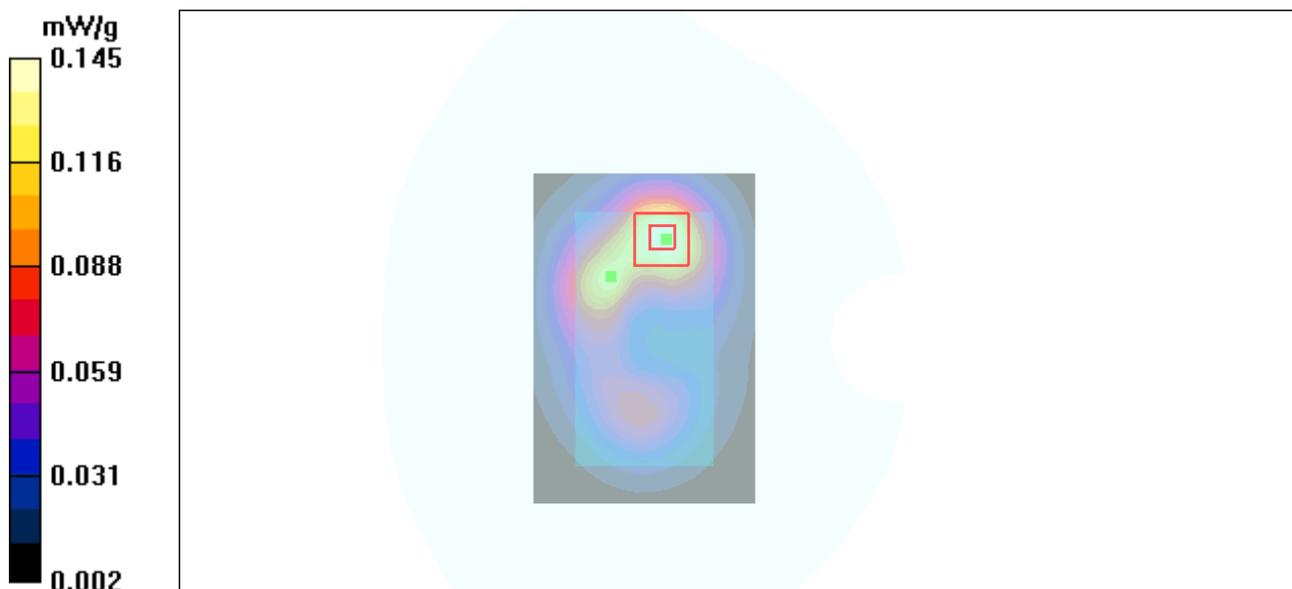


Figure 75 Body, Towards Ground, 802.11b Channel 11

802.11b (Hot spots) Towards Ground Middle

Date/Time: 4/19/2011 8:53:35 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.126 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 3.91 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.115 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.117 mW/g

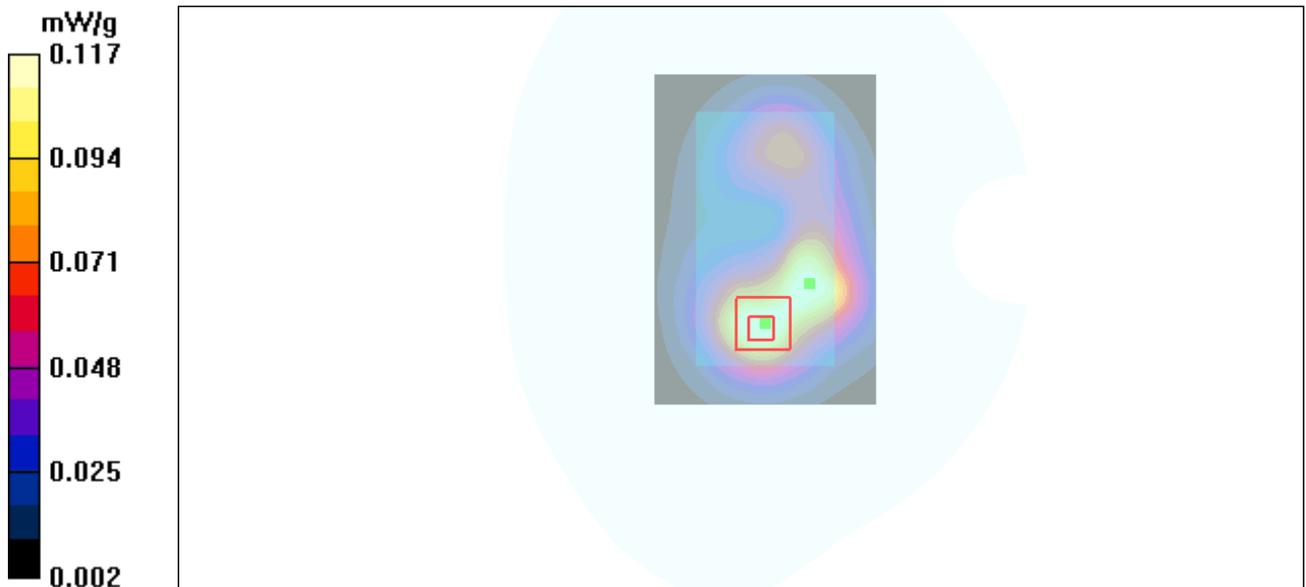


Figure 76 Body, Towards Ground, 802.11b Channel 6

802.11b (Hot spots) Towards Ground Low

Date/Time: 4/19/2011 10:01:10 PM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground Low/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.149 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.95 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.135 mW/g

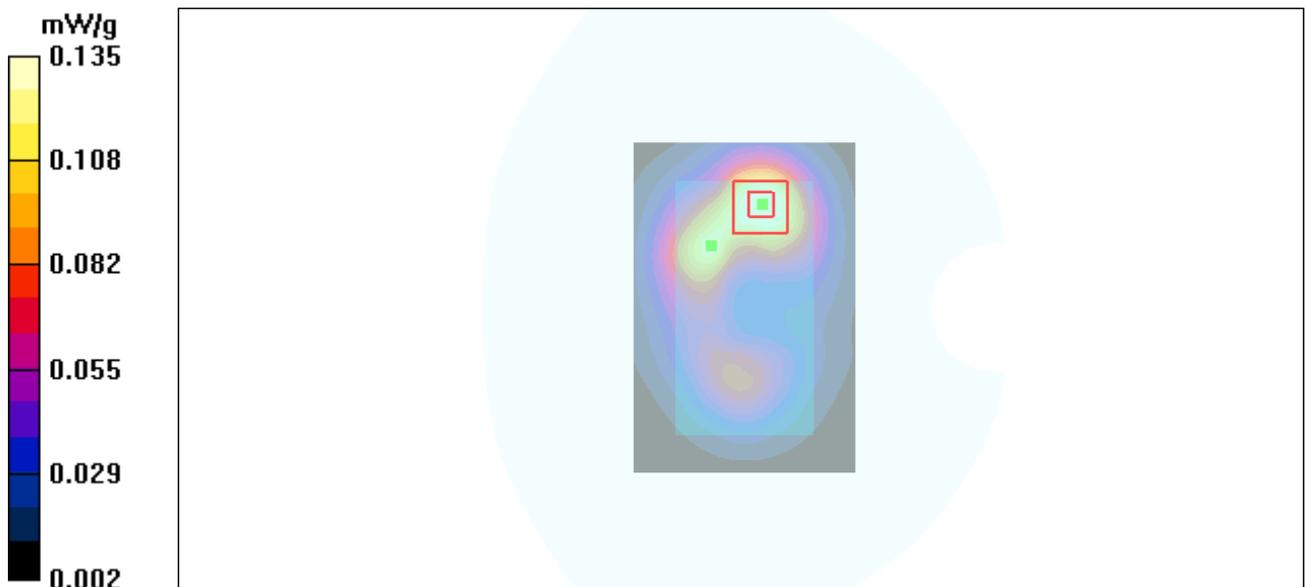


Figure 77 Body, Towards Ground, 802.11b Channel 1

802.11b (Hot spots) Towards Phantom Middle

Date/Time: 4/19/2011 9:06:01 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.052 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.41 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.090 W/kg

SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

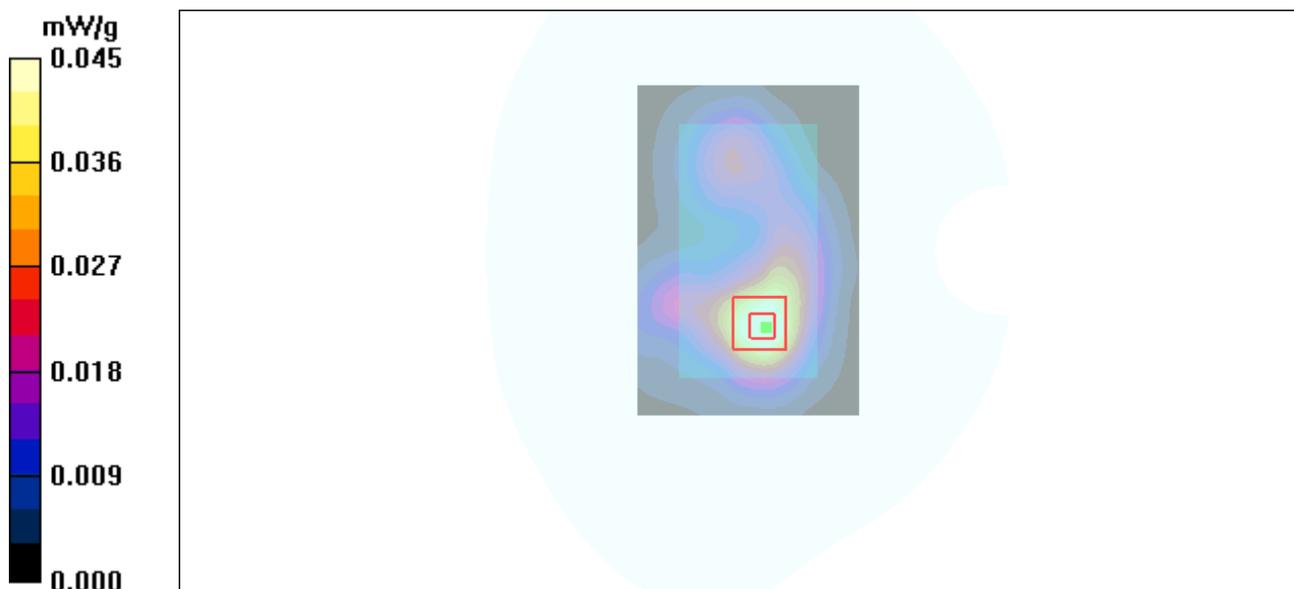


Figure 78 Body, Towards Phantom, 802.11b Channel 6

802.11b (Hot spots) Right Edge Middle

Date/Time: 4/19/2011 9:30:30 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Right Edge Middle/Area Scan (31x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.070 mW/g

Right Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.46 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

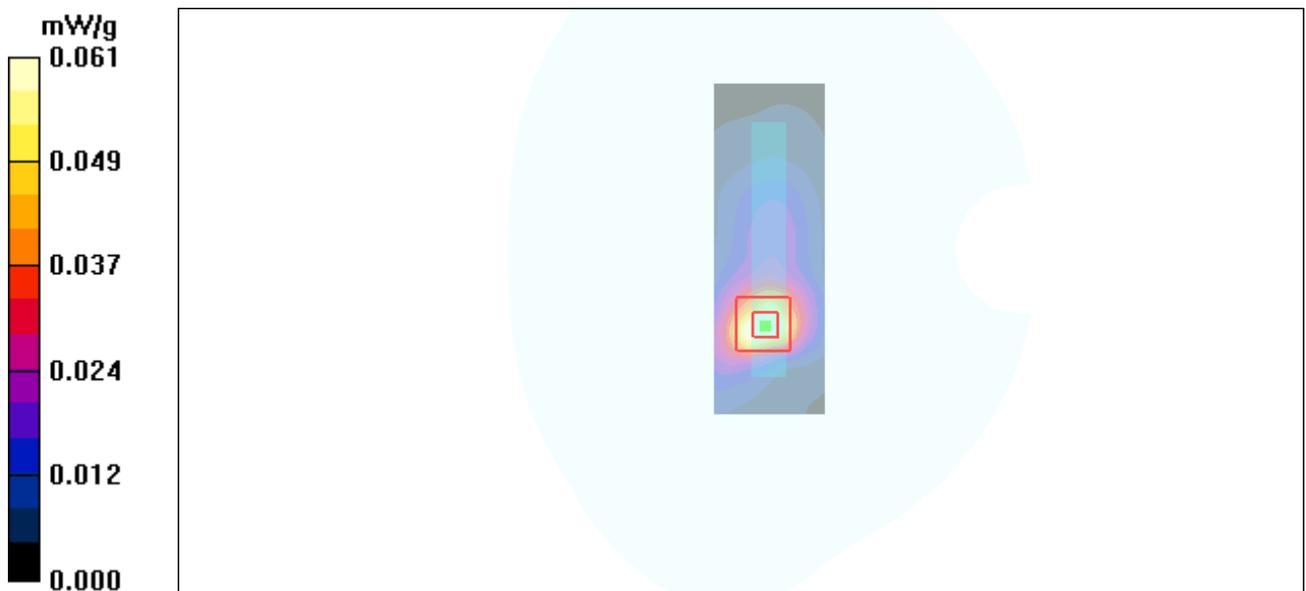


Figure 79 Body, Right Edge, 802.11b Channel 6

802.11b (Hot spots) Top Edge Middle

Date/Time: 4/19/2011 9:41:59 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Top Edge Middle/Area Scan (31x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.047 mW/g

Top Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.88 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

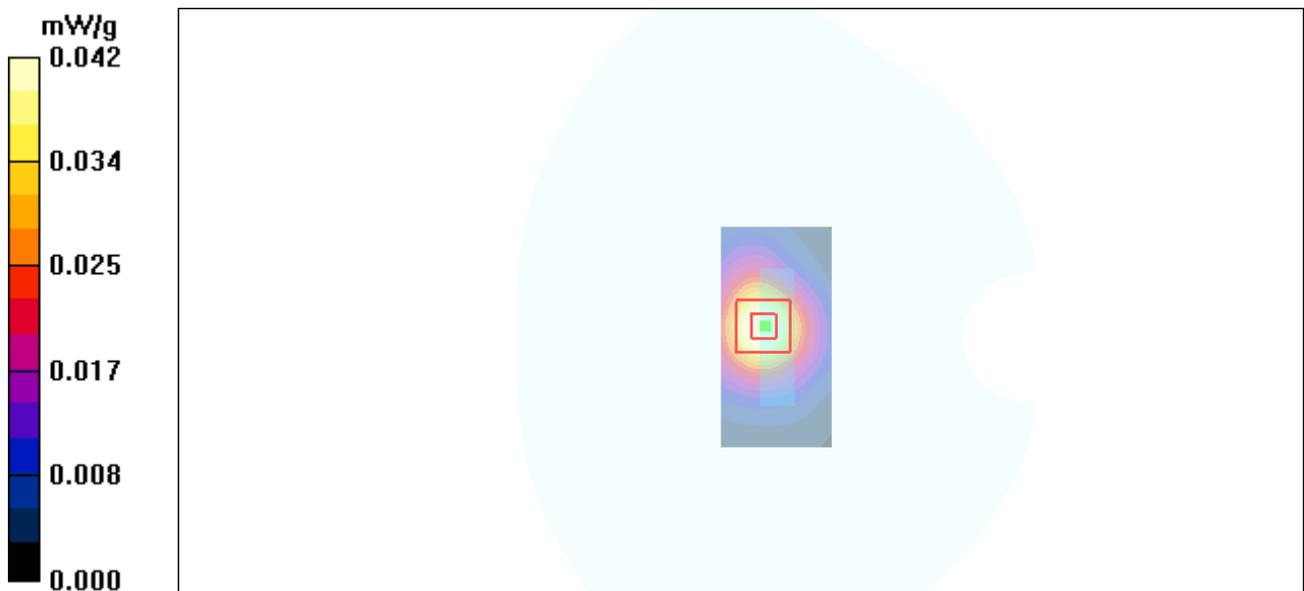


Figure 80 Body, Top Edge, 802.11b Channel 6

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 125 of 178

802.11b (Hot spots) Towards Ground High with Battery(SN:UNHAA29XA4314746)

Date/Time: 4/19/2011 10:26:41 PM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.46, 7.46, 7.46); Calibrated: 11/24/2010

Electronics: DAE4 Sn871; Calibrated: 11/18/2010

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Towards Ground High/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.158 mW/g


Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.01 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

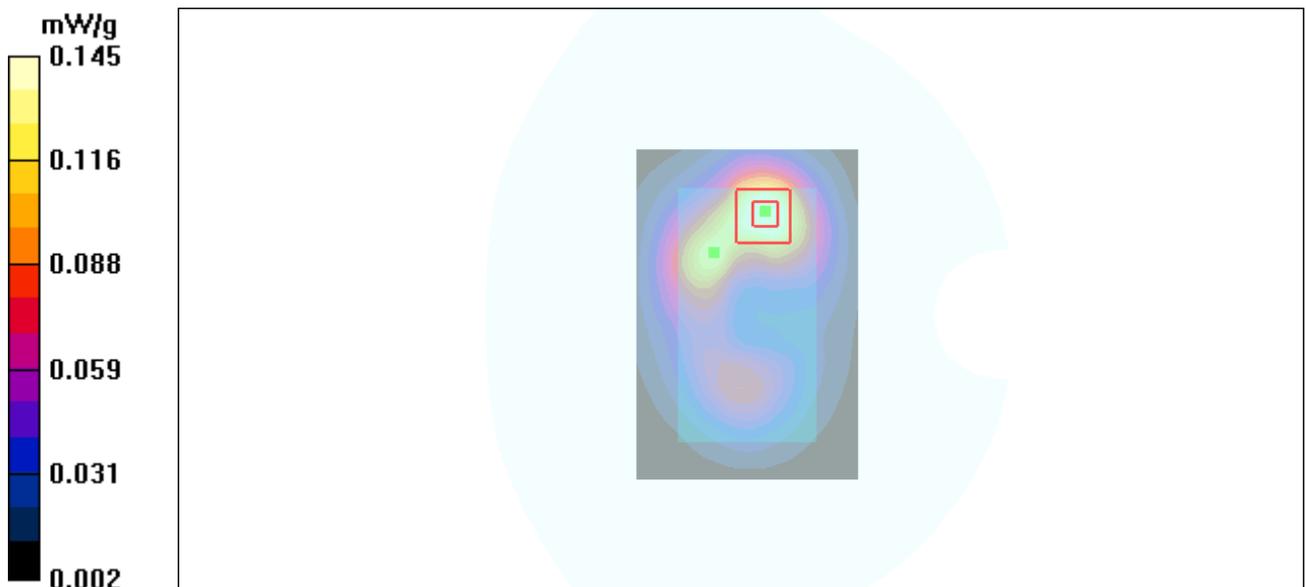

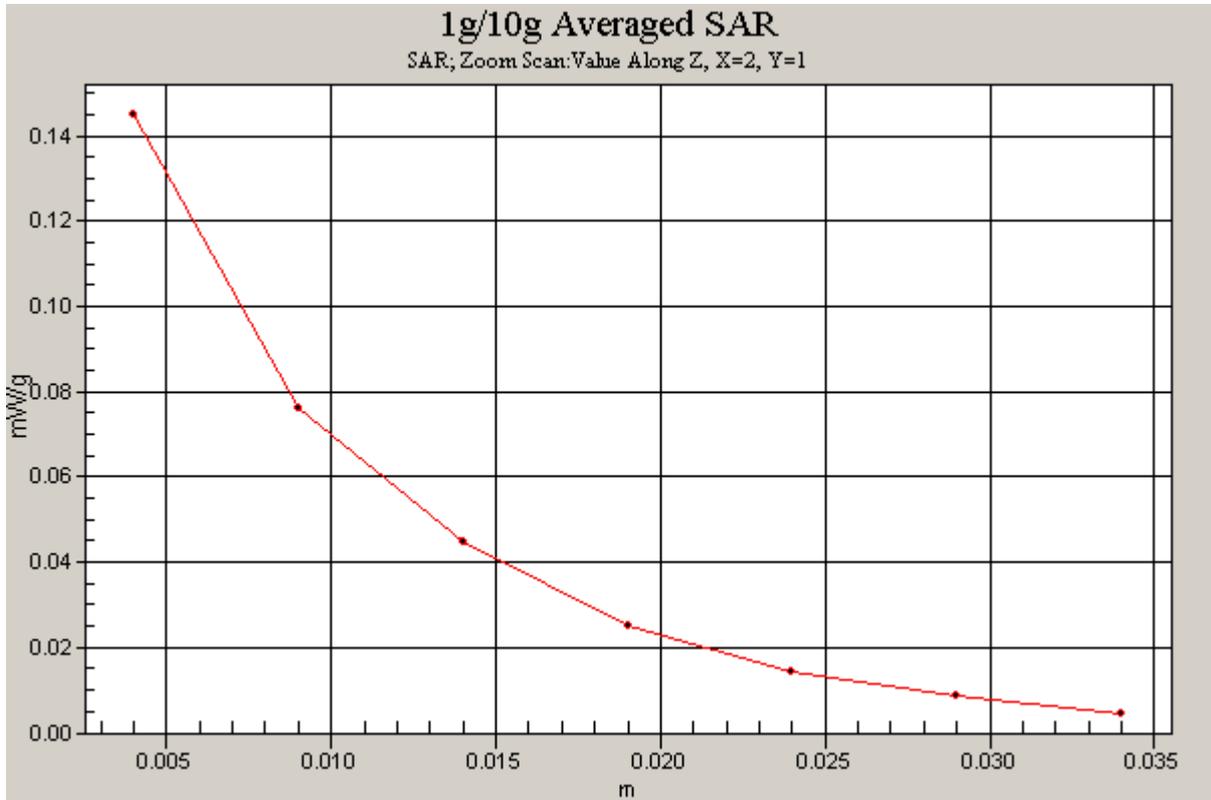


Figure 81 Body, Towards Ground, 802.11b Channel 11

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 127 of 178

ANNEX D: Probe Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA-SH (Auden)**

Certificate No: **EX3-3677_Nov10**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3677**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-14.v3, QA CAL-23.v3 and QA CAL-25.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 24, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 1-Apr-10 (No. 217-01136) | Apr-11 |
| Power sensor E4412A | MY41495277 | 1-Apr-10 (No. 217-01136) | Apr-11 |
| Power sensor E4412A | MY41498097 | 1-Apr-10 (No. 217-01136) | Apr-11 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 30-Mar-10 (No. 217-01159) | Mar-11 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 30-Mar-10 (No. 217-01161) | Mar-11 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 30-Mar-10 (No. 217-01160) | Mar-11 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-09 (No. ES3-3013_Dec09) | Dec-10 |
| DAE4 | SN: 660 | 20-Apr-10 (No. DAE4-660_Apr10) | Apr-11 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

| | | | |
|----------------|---------------|-------------------|-----------|
| | Name | Function | Signature |
| Calibrated by: | Katja Pokovic | Technical Manager | |
| Approved by: | Niels Kuster | Quality Manager | |

Issued: November 25, 2010.

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C | modulation dependent linearization parameters |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 SN:3677

November 24, 2010

Probe EX3DV4

SN:3677

| | |
|------------------|--------------------|
| Manufactured: | September 9, 2008 |
| Last calibrated: | September 23, 2009 |
| Recalibrated: | November 24, 2010 |

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

TA Technology (Shanghai) Co., Ltd.

Test Report

EX3DV4 SN:3677

November 24, 2010

DASY/EASY - Parameters of Probe: EX3DV4 SN:3677

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-----------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.41 | 0.47 | 0.39 | ± 10.1% |
| DCP (mV) ^B | 96.8 | 98.9 | 98.8 | |

Modulation Calibration Parameters

| UID | Communication System Name | PAR | | A dB | B dBuV | C | VR mV | Unc ^C (k=2) |
|-------|---------------------------|------|---|---------|-----------|------|----------|---------------------------|
| 10000 | CW | 0.00 | X | 0.00 | 0.00 | 1.00 | 143.2 | ± 2.4 % |
| | | | Y | 0.00 | 0.00 | 1.00 | 140.9 | |
| | | | Z | 0.00 | 0.00 | 1.00 | 135.8 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX, Y, Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 SN:3677

November 24, 2010

DASY/EASY - Parameters of Probe: EX3DV4 SN:3677

Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] | Validity [MHz] ^c | Permittivity | Conductivity | ConvF X | ConvF Y | ConvF Z | Alpha | Depth Unc (k=2) |
|---------|-----------------------------|--------------|--------------|---------|---------|---------|-------|-----------------|
| 450 | ± 50 / ± 100 | 43.5 ± 5% | 0.87 ± 5% | 10.04 | 10.04 | 10.04 | 0.09 | 1.00 ± 13.3% |
| 835 | ± 50 / ± 100 | 41.5 ± 5% | 0.90 ± 5% | 9.50 | 9.50 | 9.50 | 0.72 | 0.64 ± 11.0% |
| 1750 | ± 50 / ± 100 | 40.1 ± 5% | 1.37 ± 5% | 8.22 | 8.22 | 8.22 | 0.72 | 0.59 ± 11.0% |
| 1900 | ± 50 / ± 100 | 40.0 ± 5% | 1.40 ± 5% | 7.94 | 7.94 | 7.94 | 0.81 | 0.57 ± 11.0% |
| 2450 | ± 50 / ± 100 | 39.2 ± 5% | 1.80 ± 5% | 7.32 | 7.32 | 7.32 | 0.47 | 0.75 ± 11.0% |

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3677

November 24, 2010

DASY/EASY - Parameters of Probe: EX3DV4 SN:3677

Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] | Validity [MHz] ^c | Permittivity | Conductivity | ConvF X | ConvF Y | ConvF Z | Alpha | Depth Unc (k=2) |
|---------|-----------------------------|--------------|--------------|---------|---------|---------|-------|-----------------|
| 450 | ± 50 / ± 100 | 56.7 ± 5% | 0.94 ± 5% | 10.62 | 10.62 | 10.62 | 0.02 | 1.00 ± 13.3% |
| 750 | ± 50 / ± 100 | 55.5 ± 5% | 0.96 ± 5% | 10.14 | 10.14 | 10.14 | 0.59 | 0.72 ± 11.0% |
| 835 | ± 50 / ± 100 | 55.2 ± 5% | 0.97 ± 5% | 10.33 | 10.33 | 10.33 | 0.20 | 2.06 ± 11.0% |
| 1450 | ± 50 / ± 100 | 54.0 ± 5% | 1.30 ± 5% | 8.47 | 8.47 | 8.47 | 0.99 | 0.53 ± 11.0% |
| 1750 | ± 50 / ± 100 | 53.4 ± 5% | 1.49 ± 5% | 8.02 | 8.02 | 8.02 | 0.63 | 0.67 ± 11.0% |
| 1900 | ± 50 / ± 100 | 53.3 ± 5% | 1.52 ± 5% | 7.77 | 7.77 | 7.77 | 0.69 | 0.67 ± 11.0% |
| 2100 | ± 50 / ± 100 | 53.2 ± 5% | 1.62 ± 5% | 8.04 | 8.04 | 8.04 | 0.16 | 1.44 ± 11.0% |
| 2450 | ± 50 / ± 100 | 52.7 ± 5% | 1.95 ± 5% | 7.46 | 7.46 | 7.46 | 0.99 | 0.49 ± 11.0% |
| 3500 | ± 50 / ± 100 | 51.3 ± 5% | 3.31 ± 5% | 6.61 | 6.61 | 6.61 | 0.28 | 1.40 ± 13.1% |


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3677

November 24, 2010

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


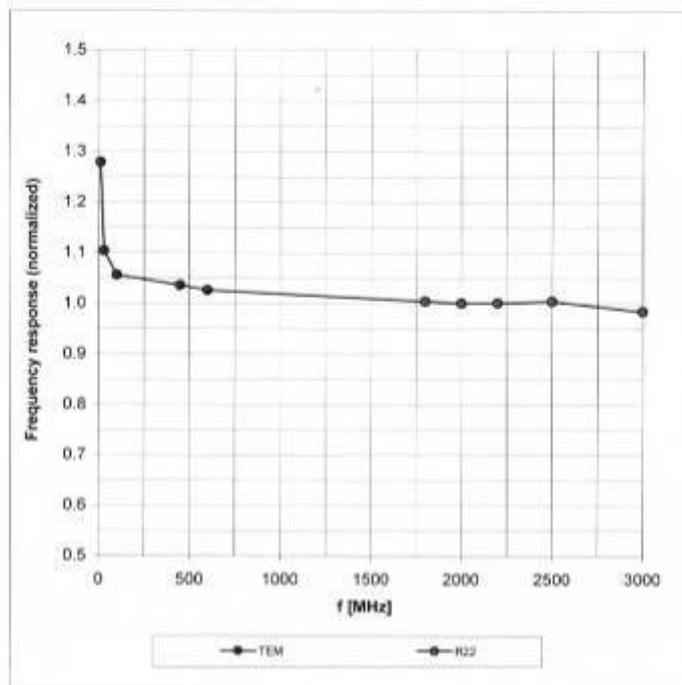


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4 SN:3677

November 24, 2010

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

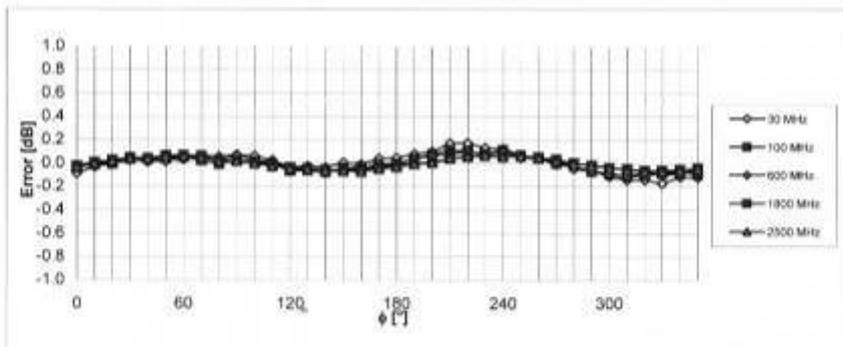
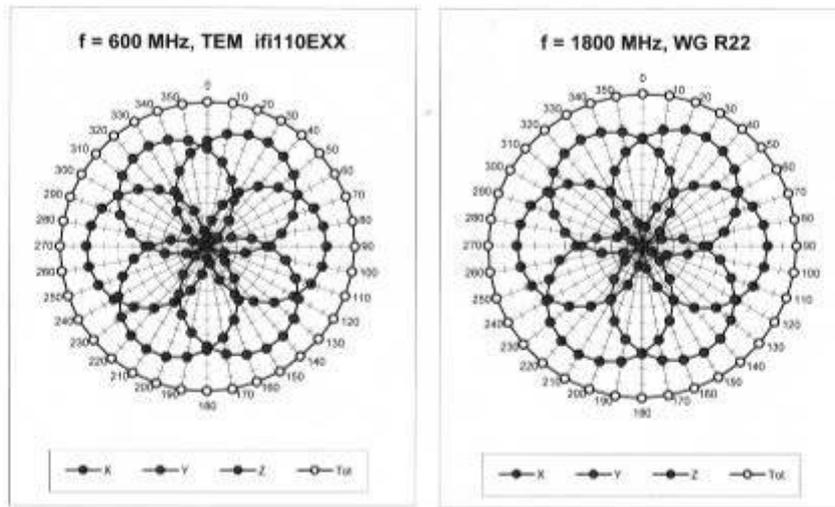


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4 SN:3677

November 24, 2010

Dynamic Range f(SAR_{head})
(TEM cell, f = 900 MHz)

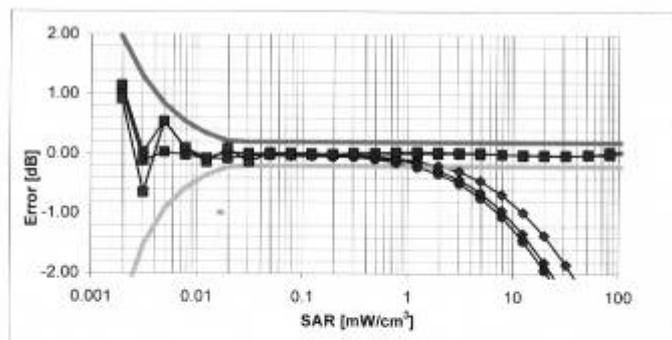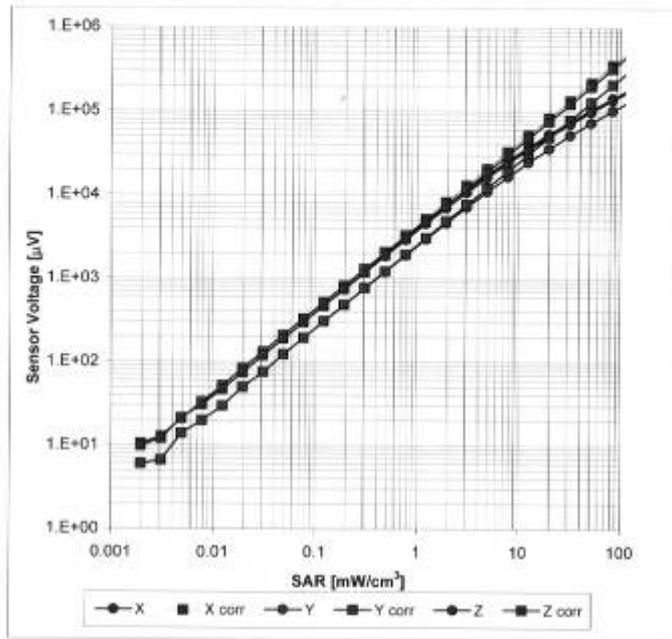


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4 SN:3677


November 24, 2010

Conversion Factor Assessment

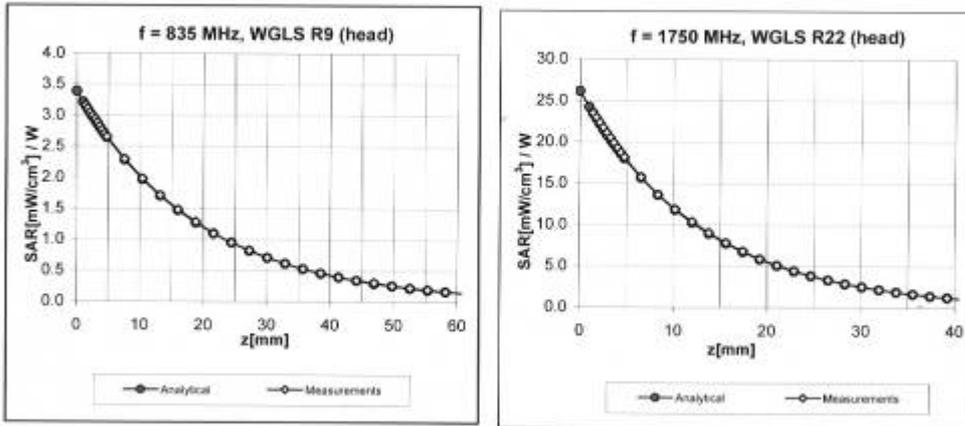

Deviation from Isotropy in HSL

Error (ϕ , θ), f = 900 MHz

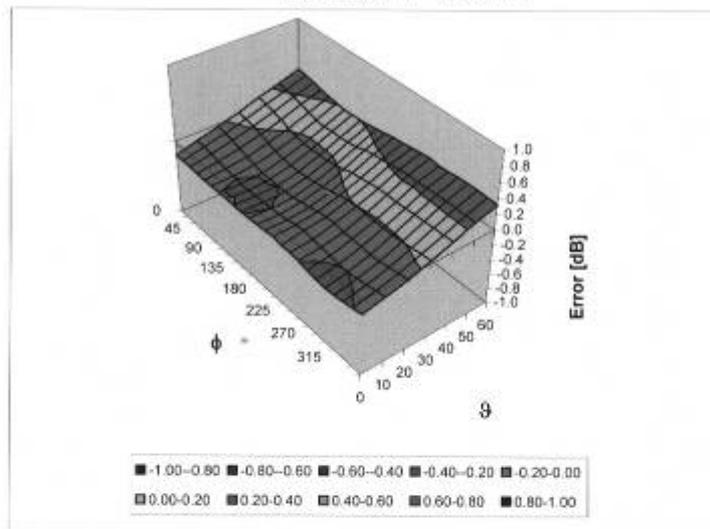

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 137 of 178

EX3DV4 SN:3677

November 24, 2010

Other Probe Parameters

| | |
|---|----------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | Not applicable |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 2 mm |

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 138 of 178

ANNEX E: D835V2 Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D835V2-4d092_Jan10**

| CALIBRATION CERTIFICATE | | | |
|--|--|-----------------------------------|------------------------|
| Object | D835V2 - SN: 4d092 | | |
| Calibration procedure(s) | QA CAL-05.v7 Calibration procedure for dipole validation kits | | |
| Calibration date: | January 14, 2010 | | |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> | | | |
| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
| Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 |
| Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 31-Mar-09 (No. 217-01025) | Mar-10 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 31-Mar-09 (No. 217-01029) | Mar-10 |
| Reference Probe ES3DV3 | SN: 3205 | 26-Jun-09 (No. ES3-3205_Jun09) | Jun-10 |
| DAE4 | SN: 601 | 07-Mar-09 (No. DAE4-601_Mar09) | Mar-10 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | in house check: Oct-11 |
| RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | in house check: Oct-11 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |
| Calibrated by: | Name Jeton Kastrioti | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature |
| <p>Issued: January 18, 2010</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> | | | |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 139 of 178

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd.

Test Report

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|---------------------------|-------------|
| DASY Version | DASY5 | V5.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V4.9 | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.2 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 41.4 ± 6 % | 0.89 mho/m ± 6 % |
| Head TSL temperature during test | (21.5 ± 0.2) °C | --- | --- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 2.39 mW / g |
| SAR normalized | normalized to 1W | 9.56 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.63 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 1.56 mW / g |
| SAR normalized | normalized to 1W | 6.24 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 6.27 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 54.8 ± 6 % | 0.98 mho/m ± 6 % |
| Body TSL temperature during test | (22.0 ± 0.2) °C | --- | --- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 2.49 mW / g |
| SAR normalized | normalized to 1W | 10.0 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.86 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 1.63 mW / g |
| SAR normalized | normalized to 1W | 6.52 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.47 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 142 of 178

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.2 Ω - 2.8 j Ω |
| Return Loss | - 30.3 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.6 Ω - 4.5 j Ω |
| Return Loss | - 25.6 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.392 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|--------------------|
| Manufactured by | SPEAG |
| Manufactured on | September 15, 2009 |

DASY5 Validation Report for Head TSL

Date/Time: 11.01.2010 12:00:00

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d092

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.5 V/m; Power Drift = -0.00176 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.56 mW/g

Maximum value of SAR (measured) = 2.77 mW/g

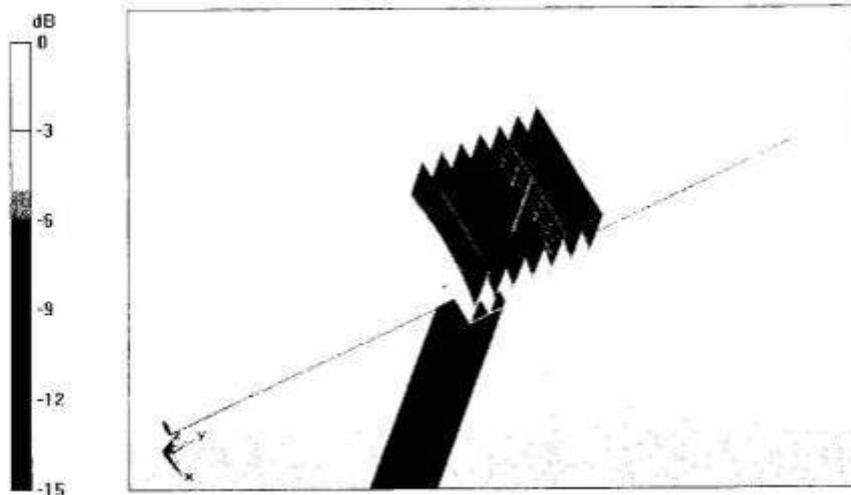


0 dB = 2.77mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 144 of 178

Impedance Measurement Plot for Head TSL

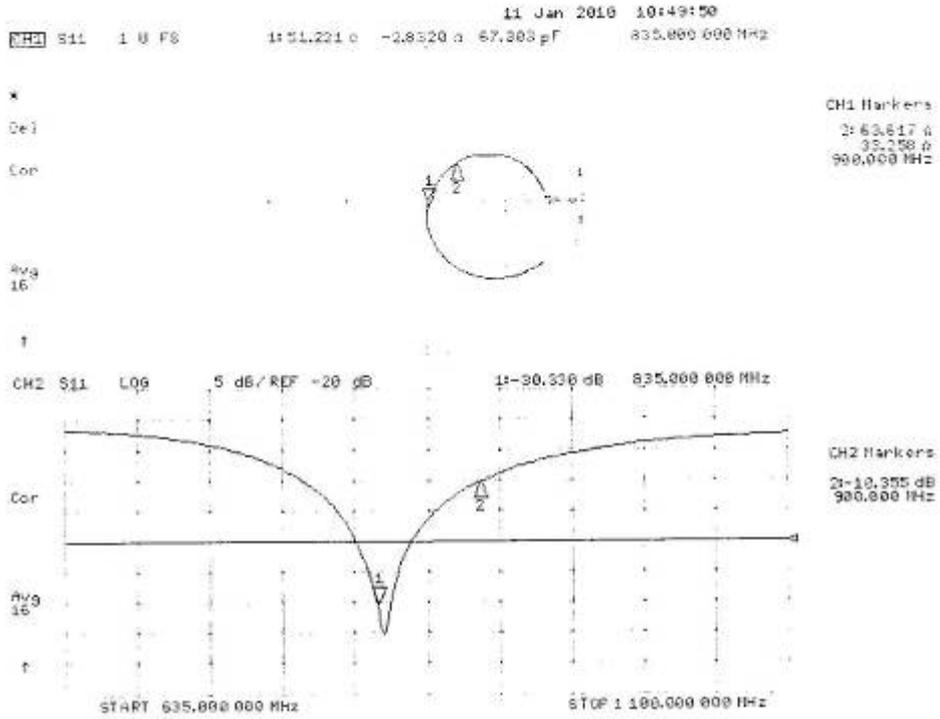

DASY5 Validation Report for Body

Date/Time: 14.01.2010 15:40:17

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d092

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.97, 5.97, 5.97); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.9 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.63 mW/g

Maximum value of SAR (measured) = 2.89 mW/g

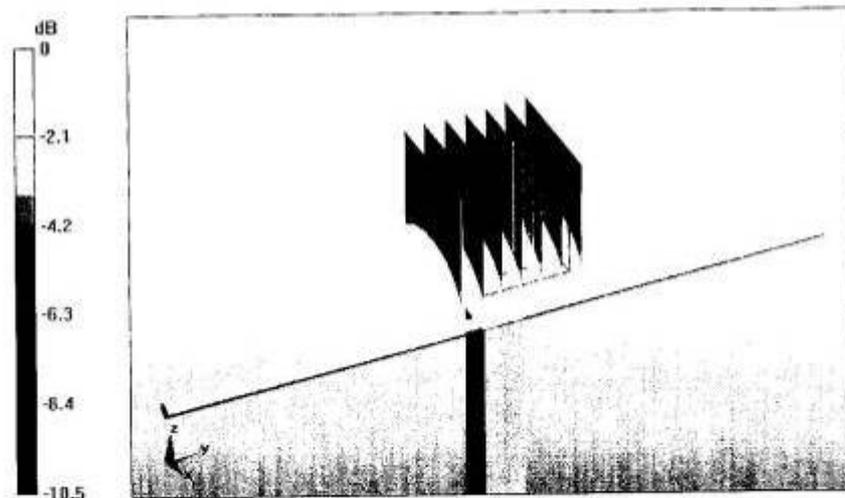


0 dB = 2.89mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 146 of 178

Impedance Measurement Plot for Body TSL

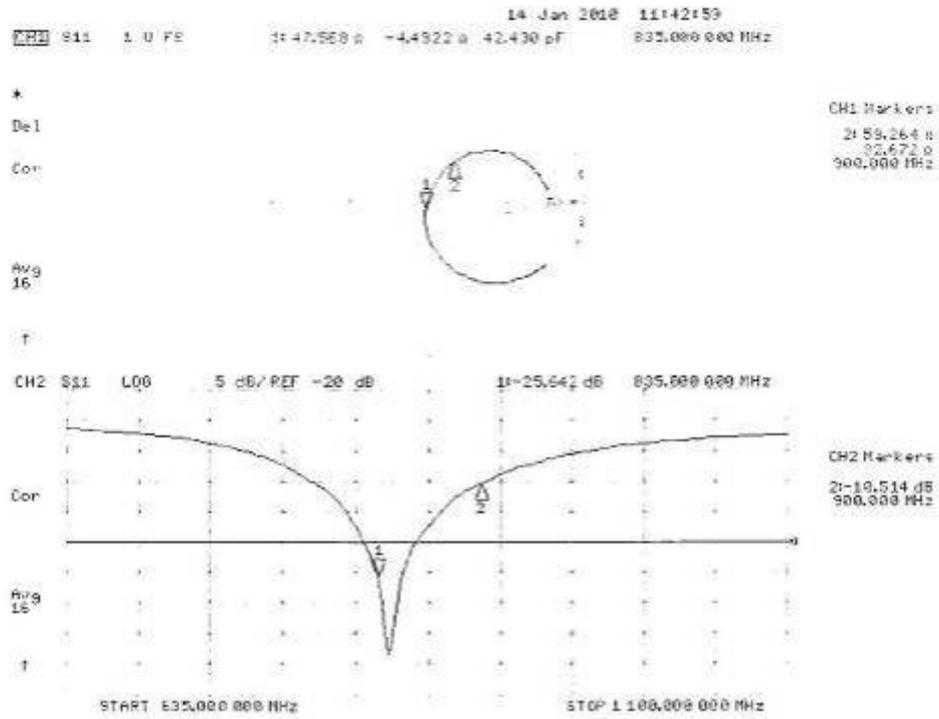

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 147 of 178

ANNEX F: D1900V2 Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **AUDEN**

Certificate No.: **D1900V2-5d018_Jun10**

| CALIBRATION CERTIFICATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|-----------------------------------|------------------------|-------------------|------|----------------------------|-----------------------|----------------------|------------|---------------------------|--------|-----------------------|------------|---------------------------|--------|----------------------------|----------------|---------------------------|--------|-----------------------------|--------------------|---------------------------|--------|------------------------|----------|--------------------------------|--------|------|---------|--------------------------------|--------|---------------------|------|-----------------------|-----------------|-----------------------|------------|-----------------------------------|------------------------|-------------------------|--------|----------------------------------|------------------------|---------------------------|------------------|-----------------------------------|------------------------|
| Object | D1900V2 - SN: 5d018 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration procedure(s) | QA CAL-05.v7 Calibration procedure for dipole validation kits | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration date: | June 15, 2010 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Cal Date (Certificate No.)</th> <th style="width: 25%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20g)</td> <td>30-Mar-10 (No. 217-01158)</td> <td>Mar-11</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.2 / 06327</td> <td>30-Mar-10 (No. 217-01162)</td> <td>Mar-11</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>30-Apr-10 (No. ES3-3205_Apr10)</td> <td>Apr-11</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>10-Jun-10 (No. DAE4-601_Jun10)</td> <td>Jun-11</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Secondary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Check Date (in house)</th> <th style="width: 25%;">Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-09)</td> <td>In house check: Oct-10</td> </tr> </tbody> </table> | | | | Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 | Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 | Reference 20 dB Attenuator | SN: 5086 (20g) | 30-Mar-10 (No. 217-01158) | Mar-11 | Type-N mismatch combination | SN: 5047.2 / 06327 | 30-Mar-10 (No. 217-01162) | Mar-11 | Reference Probe ES3DV3 | SN: 3205 | 30-Apr-10 (No. ES3-3205_Apr10) | Apr-11 | DAE4 | SN: 601 | 10-Jun-10 (No. DAE4-601_Jun10) | Jun-11 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 | RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 | Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |
| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 30-Mar-10 (No. 217-01158) | Mar-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 30-Mar-10 (No. 217-01162) | Mar-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference Probe ES3DV3 | SN: 3205 | 30-Apr-10 (No. ES3-3205_Apr10) | Apr-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DAE4 | SN: 601 | 10-Jun-10 (No. DAE4-601_Jun10) | Jun-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibrated by: | Name Dimitre Iliev | Function Laboratory Technician | Signature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Issued: June 17, 2010 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 148 of 178

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd.

Test Report

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|---------------------------|-------------|
| DASY Version | DASY5 | V52.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V5.0 | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 39.6 ± 6 % | 1.44 mho/m ± 6 % |
| Head TSL temperature during test | (22.5 ± 0.2) °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 10.0 mW / g |
| SAR normalized | normalized to 1W | 40.0 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 39.2 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 5.22 mW / g |
| SAR normalized | normalized to 1W | 20.9 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 20.7 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 53.4 ± 6 % | 1.54 mho/m ± 6 % |
| Body TSL temperature during test | (21.7 ± 0.2) °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 10.3 mW / g |
| SAR normalized | normalized to 1W | 41.2 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 40.9 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 5.52 mW / g |
| SAR normalized | normalized to 1W | 22.1 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 22.0 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 151 of 178

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.1 Ω + 2.6 j Ω |
| Return Loss | - 29.7 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.4 Ω + 3.2 j Ω |
| Return Loss | - 27.6 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.194 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | June 04, 2002 |

DASY5 Validation Report for Head TSL

Date/Time: 15.06.2010 10:40:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.2 Build 0, Version 52.2.0 (163)
- Postprocessing SW: SEMCAD X, V14.2 Build 2, Version 14.2.2 (1685)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.7 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.22 mW/g

Maximum value of SAR (measured) = 12.6 mW/g




TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 153 of 178

Impedance Measurement Plot for Head TSL

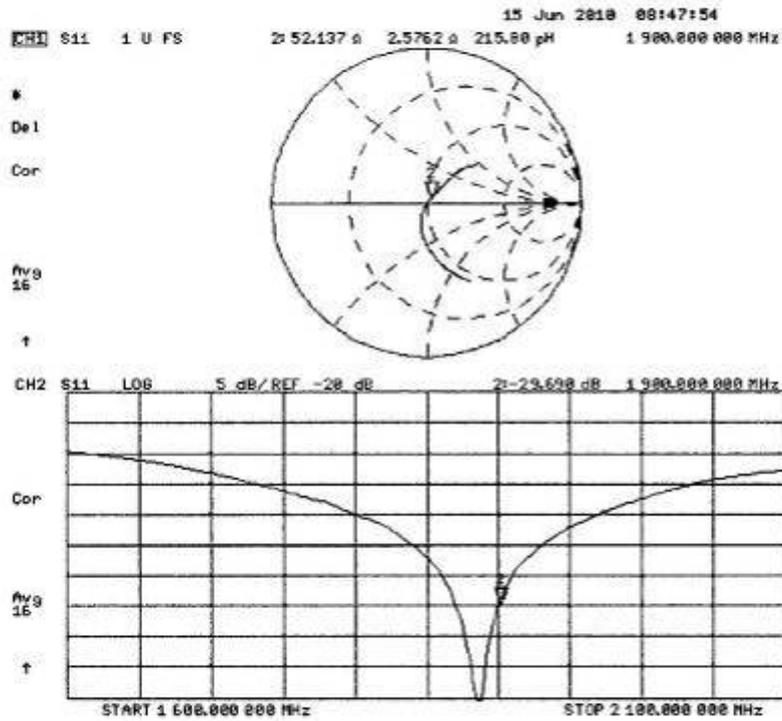

DASY5 Validation Report for Body

Date/Time: 15.06.2010 14:14:27

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.2 Build 0, Version 52.2.0 (163)
- Postprocessing SW: SEMCAD X, V14.2 Build 2, Version 14.2.2 (1685)

Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.1 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.52 mW/g

Maximum value of SAR (measured) = 12.8 mW/g




0 dB = 12.8mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 155 of 178

Impedance Measurement Plot for Body TSL

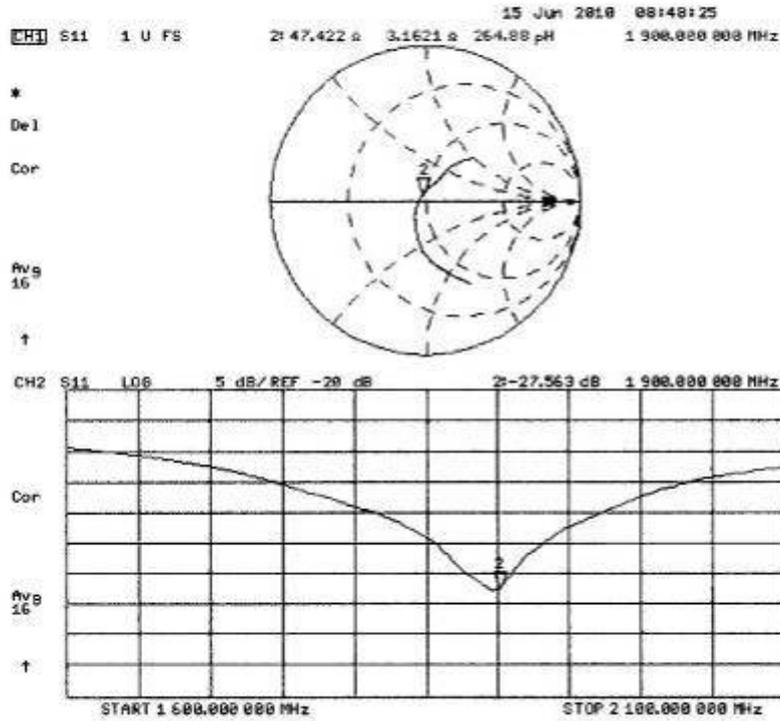

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 156 of 178

ANNEX G: D2450V2 Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **D2450V2-712_Feb10**

| CALIBRATION CERTIFICATE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|-----------------------------------|---------------------------|-------------------|------|----------------------------|-----------------------|----------------------|------------|---------------------------|--------|-----------------------|------------|---------------------------|--------|----------------------------|----------------|---------------------------|--------|-----------------------------|--------------------|---------------------------|--------|------------------------|----------|--------------------------------|--------|------|---------|--------------------------------|--------|---------------------|------|-----------------------|-----------------|-----------------------|------------|-----------------------------------|------------------------|-------------------------|--------|----------------------------------|------------------------|---------------------------|------------------|-----------------------------------|------------------------|
| Object | D2450V2 - SN: 712 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration procedure(s) | QA CAL-05.v7 Calibration procedure for dipole validation kits | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibration date: | February 19, 2010 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Cal Date (Certificate No.)</th> <th style="width: 25%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20g)</td> <td>31-Mar-09 (No. 217-01025)</td> <td>Mar-10</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.2 / 06327</td> <td>31-Mar-09 (No. 217-01029)</td> <td>Mar-10</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>26-Jun-09 (No. ES3-3205_Jun09)</td> <td>Jun-10</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>07-Mar-09 (No. DAE4-601_Mar09)</td> <td>Mar-10</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Secondary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Check Date (in house)</th> <th style="width: 25%;">Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-09)</td> <td>In house check: Oct-10</td> </tr> </tbody> </table> | | | | Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 | Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 | Reference 20 dB Attenuator | SN: 5086 (20g) | 31-Mar-09 (No. 217-01025) | Mar-10 | Type-N mismatch combination | SN: 5047.2 / 06327 | 31-Mar-09 (No. 217-01029) | Mar-10 | Reference Probe ES3DV3 | SN: 3205 | 26-Jun-09 (No. ES3-3205_Jun09) | Jun-10 | DAE4 | SN: 601 | 07-Mar-09 (No. DAE4-601_Mar09) | Mar-10 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 | RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 | Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |
| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power meter EPM-442A | GB37480704 | 06-Oct-09 (No. 217-01086) | Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor HP 8481A | US37292783 | 06-Oct-09 (No. 217-01086) | Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 31-Mar-09 (No. 217-01025) | Mar-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 31-Mar-09 (No. 217-01029) | Mar-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference Probe ES3DV3 | SN: 3205 | 26-Jun-09 (No. ES3-3205_Jun09) | Jun-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DAE4 | SN: 601 | 07-Mar-09 (No. DAE4-601_Mar09) | Mar-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RF generator R&S SMT-06 | 100005 | 4-Aug-99 (in house check Oct-09) | In house check: Oct-11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Calibrated by: | Name Jeton Kastrati | Function Laboratory Technician | Signature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Issued: February 19, 2010 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 157 of 178

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 158 of 178

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|---------------------------|-------------|
| DASY Version | DASY5 | V5.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V4.9 | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 38.5 ± 6 % | 1.76 mho/m ± 6 % |
| Head TSL temperature during test | (21.0 ± 0.2) °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 13.3 mW / g |
| SAR normalized | normalized to 1W | 53.2 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 53.5 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 6.24 mW / g |
| SAR normalized | normalized to 1W | 25.0 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 25.0 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 159 of 178

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.7 | 1.95 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 51.7 ± 6 % | 2.00 mho/m ± 6 % |
| Body TSL temperature during test | (21.2 ± 0.2) °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 13.0 mW / g |
| SAR normalized | normalized to 1W | 52.0 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 51.1 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 5.97 mW / g |
| SAR normalized | normalized to 1W | 23.9 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 23.7 mW / g ± 16.5 % (k=2) |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 160 of 178

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $54.2 \Omega + 1.9 j\Omega$ |
| Return Loss | - 27,1 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.1 \Omega + 5.2 j\Omega$ |
| Return Loss | - 25,7 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1,144 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 05, 2002 |

DASY5 Validation Report for Head TSL

Date/Time: 17.02.2010 13:12:38

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.1 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.24 mW/g

Maximum value of SAR (measured) = 17.1 mW/g

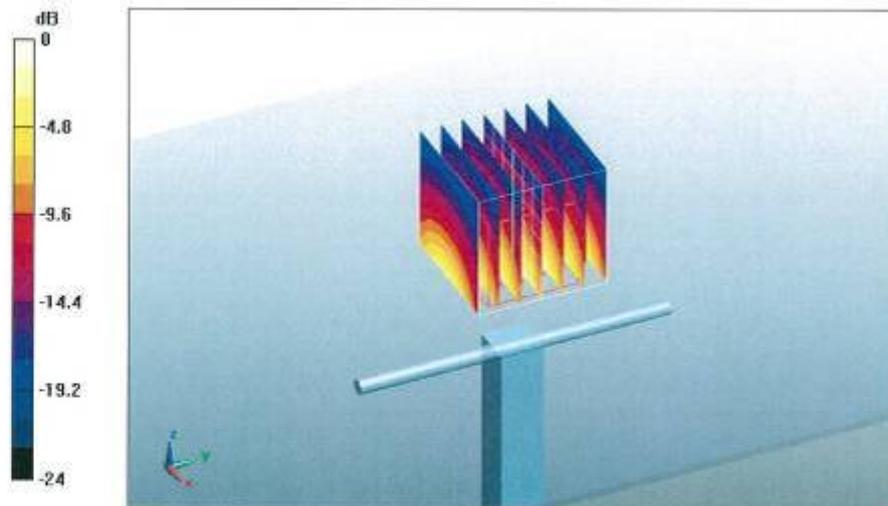


0 dB = 17.1mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 162 of 178

Impedance Measurement Plot for Head TSL

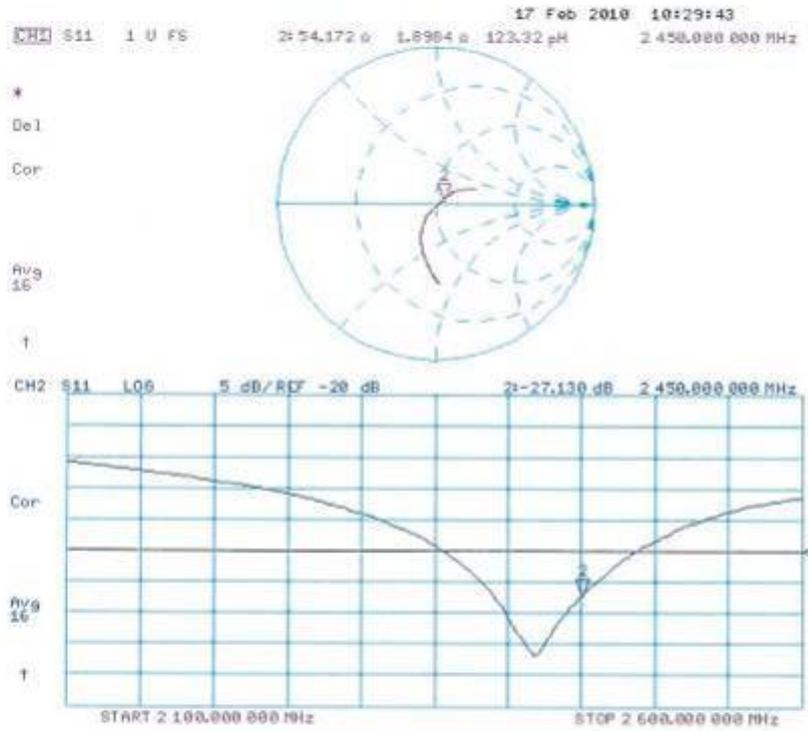

DASY5 Validation Report for Body

Date/Time: 19.02.2010 13:05:49

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.5 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 29.5 W/kg


SAR(1 g) = 13 mW/g; SAR(10 g) = 5.97 mW/g

Maximum value of SAR (measured) = 17 mW/g

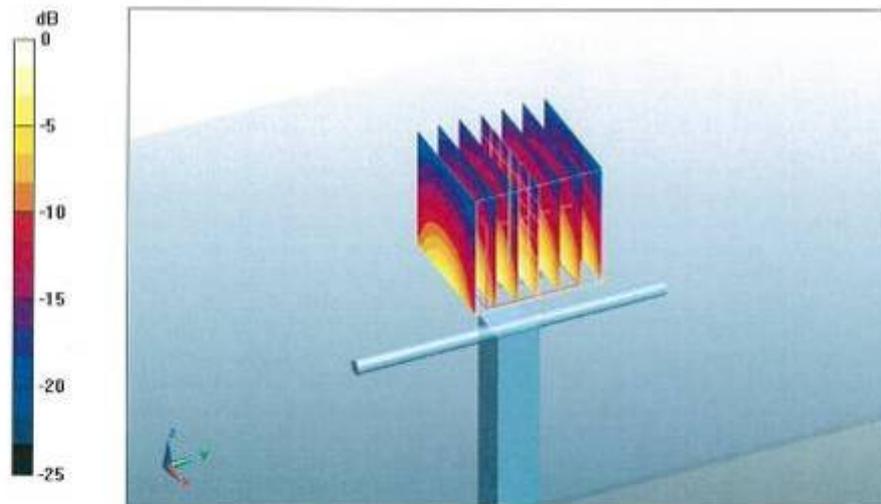

0 dB = 17mW/g

Impedance Measurement Plot for Body TSL

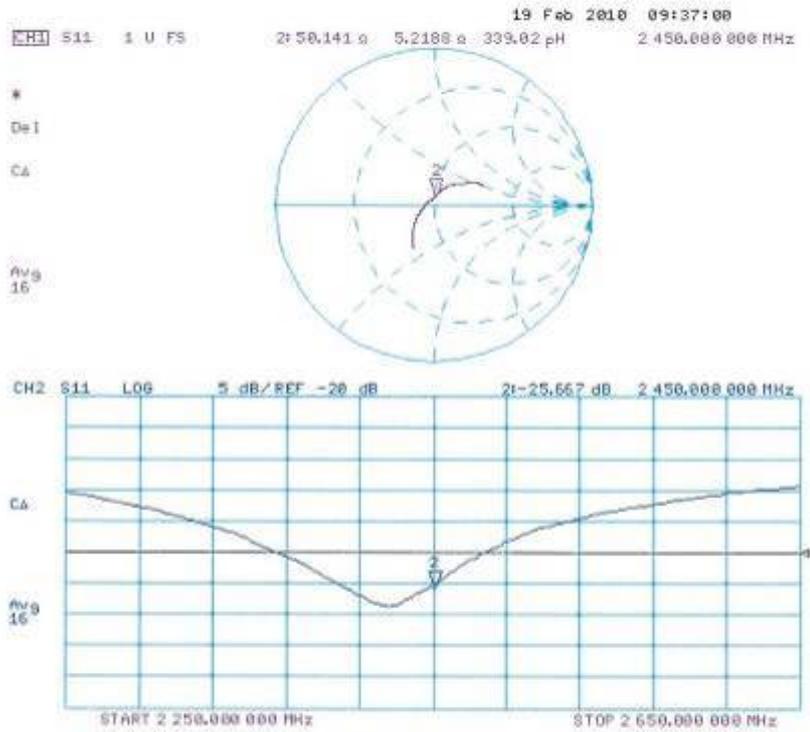

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1104-0508SAR01R1

Page 165 of 178

ANNEX H: DAE4 Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA - SH (Auden)**

Certificate No: **DAE4-871_Nov10**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 871**

Calibration procedure(s) **QA CAL-06.v22
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **November 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278 | 26-Sep-10 (No.10376) | Sep-11 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Calibrator Box V1.1 | SE UMS 006 AB 1004 | 07-Jun-10 (in house check) | In house check: Jun-11 |

| | | | |
|----------------|---------------|--------------|-----------|
| | Name | Function | Signature |
| Calibrated by: | Andrea Guntli | Technician | |
| Approved by: | Fin Bornholt | R&D Director | |

Issued: November 18, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1104-0508SAR01R1

Page 167 of 178

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV
Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|--------------------------|--------------------------|--------------------------|
| High Range | 404.757 \pm 0.1% (k=2) | 404.740 \pm 0.1% (k=2) | 405.181 \pm 0.1% (k=2) |
| Low Range | 3.98219 \pm 0.7% (k=2) | 3.93489 \pm 0.7% (k=2) | 3.96831 \pm 0.7% (k=2) |

Connector Angle

| | |
|---|------------------------------------|
| Connector Angle to be used in DASY system | 90.0 $^{\circ}$ \pm 1 $^{\circ}$ |
|---|------------------------------------|

TA Technology (Shanghai) Co., Ltd.

Test Report

Appendix

1. DC Voltage Linearity

| High Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 200001.2 | -1.56 | -0.00 |
| Channel X + Input | 20000.71 | 0.71 | 0.00 |
| Channel X - Input | -19997.87 | 1.63 | -0.01 |
| Channel Y + Input | 199994.3 | 1.99 | 0.00 |
| Channel Y + Input | 19998.92 | -1.08 | -0.01 |
| Channel Y - Input | -20000.26 | -0.76 | 0.00 |
| Channel Z + Input | 200009.2 | -1.04 | -0.00 |
| Channel Z + Input | 19998.70 | -1.10 | -0.01 |
| Channel Z - Input | -20000.16 | -0.76 | 0.00 |

| Low Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2000.1 | 0.16 | 0.01 |
| Channel X + Input | 199.58 | -0.52 | -0.26 |
| Channel X - Input | -200.79 | -0.89 | 0.45 |
| Channel Y + Input | 1999.9 | -0.03 | -0.00 |
| Channel Y + Input | 199.45 | -0.55 | -0.27 |
| Channel Y - Input | -200.31 | -0.41 | 0.21 |
| Channel Z + Input | 2000.1 | 0.33 | 0.02 |
| Channel Z + Input | 199.13 | -0.77 | -0.38 |
| Channel Z - Input | -201.47 | -1.37 | 0.69 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|--|---|
| Channel X | 200 | 14.25 | 12.86 |
| | -200 | -12.68 | -14.21 |
| Channel Y | 200 | -10.04 | -10.39 |
| | -200 | 9.20 | 9.17 |
| Channel Z | 200 | -0.85 | -1.40 |
| | -200 | -0.34 | -0.31 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200 | - | 2.85 | 0.69 |
| Channel Y | 200 | 2.41 | - | 2.73 |
| Channel Z | 200 | 2.54 | 0.73 | - |

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1104-0508SAR01R1

Page 169 of 178

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15920 | 15517 |
| Channel Y | 16171 | 16732 |
| Channel Z | 15803 | 16474 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

| | Average (μ V) | min. Offset (μ V) | max. Offset (μ V) | Std. Deviation (μ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.03 | -2.35 | 0.86 | 0.43 |
| Channel Y | -0.50 | -1.49 | -0.49 | 0.38 |
| Channel Z | -0.92 | -2.21 | 0.14 | 0.44 |

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

| | Zeroing (k Ω m) | Measuring (M Ω m) |
|-----------|------------------------|--------------------------|
| Channel X | 200 | 200 |
| Channel Y | 200 | 200 |
| Channel Z | 200 | 200 |

8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01 | +6 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -8 |