



Report No: SYBH(R) 58052006EB
FCC ID: QISV710

FCC TEST REPORT OF Huawei WCDMA/GPRS/GSM Mobile Phone

M/N: V710

Jun. 23, 2006

Reliability Laboratory of Huawei Technologies Co., Ltd.

All Right Reserved

Notice

1.	The laboratory has obtained the accreditation of China National Accreditation Committee for Laboratories (CNAL), and accreditation number: L0310.
2.	The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3.	The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4.	The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is C1758, R1672, and T153.
5.	The test report is invalid if not marked with "exclusive stamp for the test report".
6.	Any copy of the test report is invalid if not re-marked with the "exclusive stamp for the test report".
7.	The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8.	The test report is invalid if there is any evidence of erasure and/or falsification.
9.	If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10.	Normally, the test report is only responsible for the samples that have undergone the test.
11.	Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



REPORT ON FCC Test of **Huawei WCDMA/GPRS/GSM Mobile Phone**

M/N: V710

Report No: SYBH(R) 58052006EB

REGULATION **FCC CFR47 Part 2: Subpart J;**

FCC CFR47 Part 24: Subpart E;

FCC CFR47 Part 15: Subpart B;

CONCLUSION There are 9 items need to be tested, 9 items have been tested. The sample of the model completely meets the requirements

Final Judgement: Pass

General Manager

2006.06.29

Date

Tang Shuanli

Name

signature



**Technical Responsibility
For Area of Testing**

2006.06.28

Date

Zhang Xinghai

Name

signature

Zhang Xinghai

Test Lab Engineer

2006.06.26

Date

Name

signature

Contents

1	<u>Summary</u>	5
2	<u>Product Description</u>	6
2.1	PRODUCTION INFORMATION.....	6
2.2	MODIFICATION INFORMATION	6
3	<u>Test Site Description</u>	7
3.1	TESTING PERIOD	7
3.2	GENERAL DESCRIPTION	7
4	<u>Product Description</u>	8
4.1	TECHNICAL CHARACTERISTICS.....	8
4.2	EUT IDENTIFICATION LIST	10
5	<u>Main Test Instruments</u>	11
6	<u>Transmitter Measurements</u>	13
6.1	EFFECTIVE RADIATED POWER OF TRANSMITTER (EIRP).....	13
6.2	MODULATION CHARACTERISTICS.....	16
6.3	OCCUPIED BANDWIDTH.....	18
6.4	BAND EDGES COMPLIANCE.....	20
6.5	SPURIOUS EMISSION AT ANTENNA TERMINAL.....	22
6.6	RADIATED SPURIOUS EMISSION	24
6.7	FREQUENCY STABILITY	28
7	<u>EMC Test</u>	33
7.1	CONDUCTED EMISSION AT POWER PORT	33
7.2	RADIATED EMISSION OF ENCLOSURE IN IDEAL MODE	35
8	<u>System Measurement Uncertainty</u>	37
9	<u>Appendixes</u>	38

1 Summary

The table below summarizes the measurements and results for the Huawei WCDMA /GPRS/GSM Mobile Phone. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	24.232	Effective Radiated Power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	24.238	Band Edges Compliance	PASS
2.1051	24.238	Spurious Emission at Antenna Terminal	PASS
2.1053	24.238	Radiated Spurious Emission	PASS
2.1055	24.235	Frequency Stability	PASS
-	15.107	Conducted Emission at Power Port	PASS
-	15.109	Radiated Emission of Enclosure in Idle Mode	PASS

2 Product Description

2.1 Production Information

2.1.1 General Description

Huawei WCDMA/GPRS/GSM Mobile Phone is subscriber equipment in the WCDMA/GSM system. The frequency band is WCDMA/GSM/DCS/PCS. The Mobile Phone implements such functions as RF signal receiving / Transmitting, WCDMA protocol processing, voice, video and MMS service etc. Externally it provides SD/MMC card interface, earphone port(to provide voice service), USIM card interface .

2.1.2 Support function and Service

The Mobile Phone support the function and service as follows:

Table 2 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Voice and data	Modulation: GMSK	TM1	Mobile Phone was controlled to transmit maximum power.

2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicaiton!				

3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

The test site description has been submitted to  and registration granted under the registration number **97456** on Apr. 20, 2006. The test site has been accredited by  and the accredited number is **2714.01** in Jan of 2006.

3.1 Testing Period

The test have been performed during the period of

May. 01, 2006 to May. 10, 2006

3.2 General Description

Huawei WCDMA/GPRS/GSM Mobile Phone is subscriber equipment in the WCDMA/GSM system. The frequency band is WCDMA/GSM/DCS/PCS. The Mobile Phone implements such functions as RF signal receiving / Transmitting, WCDMA protocol processing, voice, video and MMS service etc. Externally it provides SD/MMC card interface, earphone port (to provide voice service), and USIM card interface.

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Table 4 Frequency Range

Uplink band:	1850 to 1910 MHz
Downlink band:	1930 to 1990 MHz

4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

Channel spacing:	200 KHz
Channel separation:	200KHz

4.1.3 Type of Emission

Table 6 Type of Emission

Emission Designation:	300KGXW
-----------------------	----------------

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Table 7 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Table 8 Power Source

AC voltage nominal:	~220V
AC voltage range	~100V-240V
AC current maximal:	650mA

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 9 Applied DC Voltages and Currents

Voltage:	 +2.8V
Current:	100mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)

4.2 EUT Identification List

4.2.1 Board Information

Table 10 Board Information

WCDMA/GPRS/GSM Mobile Phone		
V710		
Board and Module		
Equipment Designation / Description	Serial Number	Remarks
-Main board	U535M-24	HD1U535M Ver.C
-Battery	FMT650500366	V710

Table 11

4.2.2 Adapter Technical Data

AC/DCAdapter Model: TPCA-053065E
 Manufacturer: TECH-POWER INTERNATIONAL CO.,LTD/Shenzhen
 Input Voltage: ~100-240V ;50/60Hz
 Output Voltage:  +5.3V
 Rated Power: 4W

4.2.3 Battery Technical Data

Type: Rechargeable Li-ion Polymer
 Manufacturer: SCUD(FuJian) Electronics Co.,Ltd.
 Battery Model: HBU535
 Rated capacity: 860mAH
 Nominal Voltage:  +3.7V
 Charging Voltage:  +5.3V

4.2.4 FCC Identification

Grantee Code: QIS
 Product Code: V710
 FCC Identification: QISV710

5 Main Test Instruments

Table 12 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until (MM.DD.YYYY)
3m Semi Anechoic Chamber	S+M	N/A	N/A	Dec.24.2006
3m Full Anechoic Chamber	S+M	N/A	N/A	Dec.05.2006
Signal Analyzer	R&S	FSQ 26	100266	May.18.2007
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	May.30.2007
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	May.30.2007
Receiver	R&S	ESIB 26	100318	Aug.17.2006
Receiver	R&S	ESCS30	830245/018	May.30.2007
Pre-Amplifier	Agilent	8447D	2944A10146	May.30.2007
Pre-Amplifier	Agilent	83017A	3950M00246	Jan.03.2007
Loop Antenna	Schwarzbeck	FMZB1516	1516115	Jan.08.2007
BiLog Antenna	Schaffner	CBL 6112B	2747	Aug.30.2006
BiLog Antenna	Schaffner	CBL 6112B	2536	Aug.30.2006
Horn Antenna	R&S	HF906 4044.4507.02	359287/005	Dec.05.2006
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	Dec.05.2006
Horn Antenna	ETS-Lindgren	3116	00031541	Jan.15.2007
Dipole	Schwarzbeck	D69250- UHAP/D69250- VHAP	979/917	Aug.28.2006
Signal Generator	R&S	SMT06	830264/009	May.29.2006
Signal Generator	R&S	SMR 40	100325	Dec.09.2006
Artificial Mains Network	Schwarzbeck	NNLK8121	8121416	May.29.2006
Power Supply	Keithley	2306	1045337	Apr.20.2007
Climate Chamber	WEISS	ACS-1	3604040034	Apr.24.2007
Universal Radio Communication Tester	R&S	CMU200	108522	Aug.16.2006
Wireless Communications test set	Agilent	8960	3604061855	Aug.06.2006

Spectrum Analyzer	Agilent	E4445A	3602041773	Oct.31.2006
Spectrum Analyzer	R&S	FSU26	N/A	Sep.26.2006

Table 13

6 Transmitter Measurements

6.1 Effective Radiated Power of Transmitter (EIRP)

6.1.1 Test Conditions

Table 14 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	23.5°C
Relative humidity:	55%
Test Configurations:	TM1 at high, middle ,low channel

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 24.232

6.1.2.2 Supporting Standards

Table 15 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations

6.1.2.3 Limits

Compliance with part 24.232, mobile/portable stations are limited to 2 watts EIRP peak power.
 $W(\text{dBm}) = 10 \cdot \log(W_{\text{watts}})$.

Table 16 Limits

Maximum Output Power (Watts)	< 2 Watts
Maximum Output Power (dBm)	< 33 dBm


6.1.3 Test Method and Setup

- For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the Mobile Phone to the wireless communication tester Agilent 8960 via the air interface. The band class is set as PCS.
- Test the Radiated maximum output power by the Agilent 8960 received from test antenna.
- Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on Agilent 8960, and record the

power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

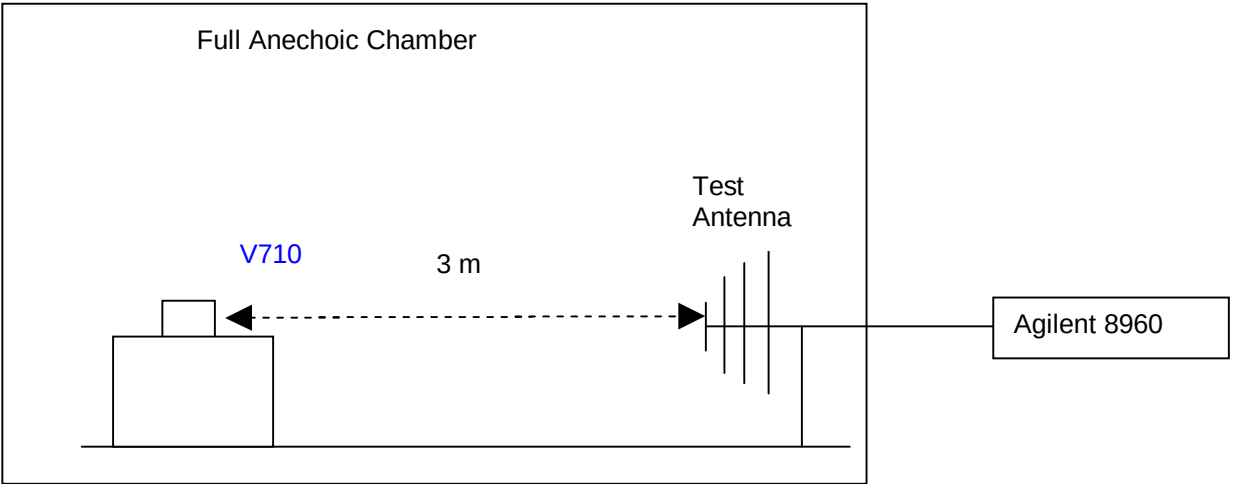

Step 2: Substitution method to verify the maximum EIRP

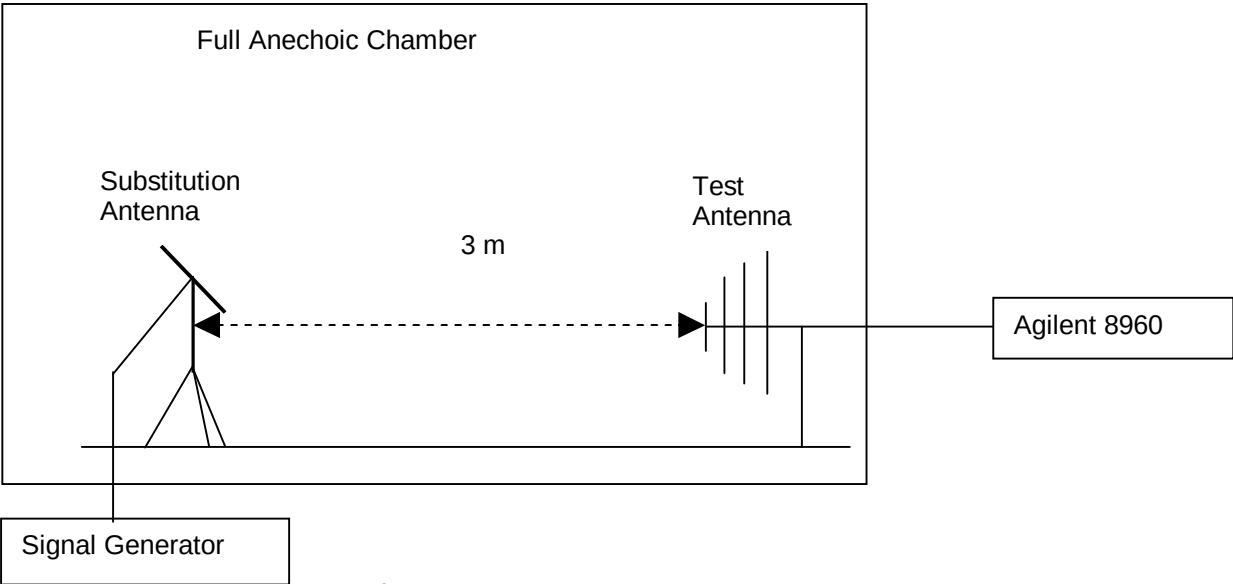


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.
There is a constant difference of 2.15 dB between EIRP and ERP.
 $ERP\ (dBm) = EIRP\ (dBm) - 2.15\ (ITU-R\ Recommendation\ SM.329-10).$

6.1.4 Measurement Results

Table 17 Measurement Results	
	RF Output Power

TEST CONDITIONS		Channel 512 1850.2MHz		Channel 661 1880.0MHz		Channel 810 1909.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T _{nom} (25 °C) V _{nom} (3.7 V)	29.23	33.0	29.34	33.0	29.41	33.0

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix A with 4 pages.

6.2 Modulation Characteristics

6.2.1 Test Conditions

Table 18 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at High, Middle, Low Channel

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.2.2.2 Supporting Standards

Table 19 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.2.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 24 subpart E.

Table 20 Limits

Limits	Not applicable
--------	----------------

6.2.3 Test Method and Setup

Connect the Mobile Phone to Wireless Communication Test Set Agilent 8960 via the antenna connector. The band class is set as PCS; the Mobile Phone's output is matched with 50 Ω loads, test method was according to ANSI/TIA-98-E. The waveform quality and constellation of the Mobile Phone was tested.

Test setup

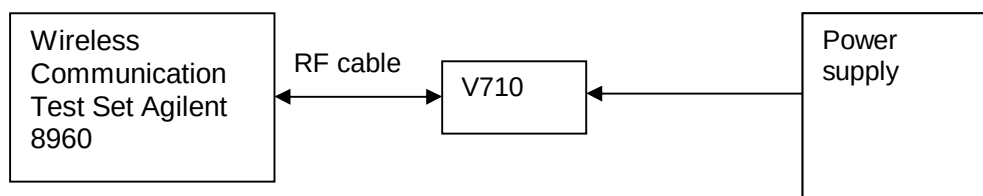


Figure 2. Test Set-up

6.2.4 Measurement Results

Table 21 Measurement Results

TEST CONDITIONS		Phase Error		
		Channel 512 1850.2MHz	Channel 661 1880.0Mhz	Channel 810 1909.8MHz
		Measured (degree)	Measured (degree)	Measured (degree)
T _{nom} (25 °C)	V _{nom} (3.7V)	2.56	2.23	2.40
Refer to Appendix B				

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix B with 4 pages.

6.3 Occupied Bandwidth

6.3.1 Test Conditions

Table 22 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at High, Middle, Low Channel

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 24 subpart E

6.3.2.2 Supporting Standards

Table 23 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.3.2.3 Limits

No specific occupied bandwidth requirement in part 24 subpart E, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 24 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.3.3 Test Method and Setup

Mobile Phone was connected to the Spectrum Analyzer E4445A via the one RF connector. The band class is set as PCS; Mobile Phone was controlled to transmit maximum power. Measure and record the occupied bandwidth of the Mobile Phone by the E4445A.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules,

the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

Measurement bandwidth (RBW): 3kHz (Resolution bandwidth)

Video bandwidth (VBW): 3kHz

Test Set-up

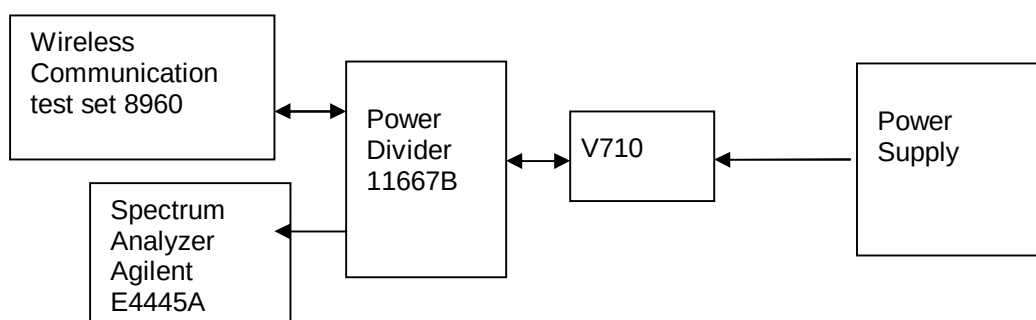


Figure 3. Test Set-up

6.3.4 Measurement Results

Table 25 Measurement Results

TEST CONDITIONS		Occupied Bandwidth		
		Channel 512 1850.2MHz	Channel 661 1880.0Mhz	Channel 810 1909.8MHz
		Measured (kHz)	Measured (kHz)	Measured (kHz)
T _{nom} (25 °C)	V _{nom} (3.7V)	282	288	270
Refer to Appendix C				

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix C with 4 pages.

6.4 Band Edges Compliance

6.4.1 Test Conditions

Table 26 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1 at High, Low Channel

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 24.238

6.4.2.2 Supporting Standards

Table 27 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.4.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 28 Limits

Rated Power:	30dBm
Required attenuation:	$43 + 10 \log(1) = 43$, 30 dBm –43dB
Absolute level	- 13 dBm

6.4.3 Test Method and Setup

Mobile Phone was connected to the Spectrum Analyzer E4445A via the one RF connector, the band class is set as PCS. Mobile Phone was controlled to transmit maximum power. Measure and record band edges compliance of the Spectrum Analyzer E4445A.

RBW of 20 kHz (1% of 2MHz) was used up to 5MHz away from the band edge. So the FCC rules specify that RBW of 1MHz for measurements of emissions >1MHz away from the band edges ,the limit was adjusted with -13dBm to -30dBm to compensate for the reduced measurement bandwidth.

Test Set-up

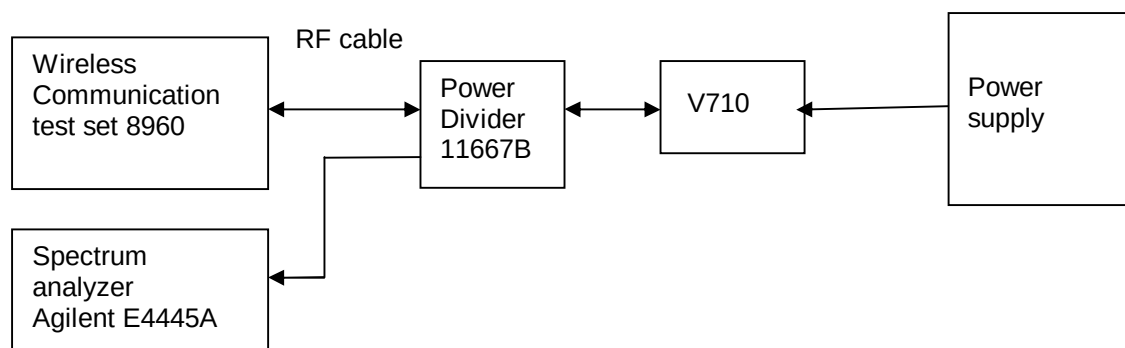


Figure 4. Test Set-up

6.4.4 Measurement Results

Table 29 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
US PCS	T_{nom} (25 °C), V_{nom} (3.7V)						
	1850	512	TM1	29.45	<-13(See appendix D)	- 13 dBm	Pass
	1910	810	TM1	29.50	<-13(See appendix D)	- 13 dBm	Pass

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D with 3 pages.

6.5 Spurious Emission at Antenna Terminal

6.5.1 Test Conditions

Table 30 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1 at High, Middle, Low Channel

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 24.238

6.5.2.2 Supporting Standards

Table 31 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.5.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 32 Limits

Rated Power:	30dBm
Required attenuation:	$43 + 10 \log(1) = 37$, 30 dBm -43 dB
Absolute level	- 13 dBm

6.5.3 Test Method and Setup

Mobile Phone was connected to the Spectrum Analyzer E4445A and R&S FSU26 via the one RF connector, the band class is set as PCS. Mobile Phone was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the Mobile Phone by the E4445A and R&S FSU26.

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 3GHz: 1 MHz;
Measurement bandwidth (RBW) for 3GHz up to 12.5GHz: 1MHz;

Measurement bandwidth (RBW) for 12.5GHz up to 20GHz: 1MHz;

Test Set-up

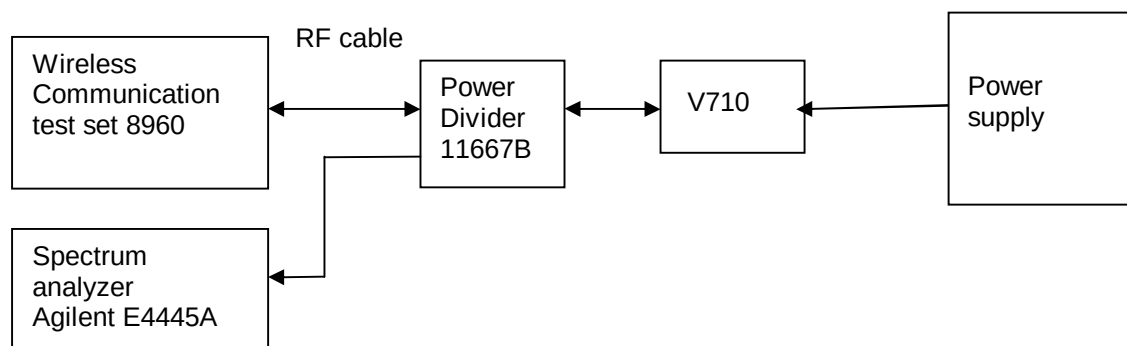


Figure 5. Test Set-up

6.5.4 Measurement Results

Table 33 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 512(L)	TM	9 kHz ~20GHz	29.58	<- 13 dBm (See appendix E)	- 13 dBm	Pass
Channel 661(M)	TM	9 kHz ~20GHz	29.40	<- 13 dBm (See appendix E)	- 13 dBm	Pass
Channel 810(H)	TM	9 kHz ~20GHz	29.69	<- 13 dBm (See appendix E)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix E with 7 pages.

6.6 Radiated Spurious Emission

6.6.1 Test Conditions

Table 34 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	22 °C
Relative humidity:	53 %
Test Configurations:	TM1 At middle channel

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 24.238

6.6.2.2 Supporting Standards

Table 35 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.6.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 36 Limits

Rated Power:	30dBm (1W)
Required attenuation:	$43 + 10 \log_{10} (1W) = 43 \text{ dB}$
Absolute level	$30\text{dBm} - 43 \text{ dB} = -13 \text{ dBm}$

6.6.3 Test Method and Setup

(a) Measurements were made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.1049(c) as appropriate. For equipment operating on frequencies below 890 MHz, an Open Field Test is normally required with the measuring instrument antenna located in the far field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections, which might distort the field strength measurements. Information

submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

(b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

Huawei Mobile Phone V710 is equipment with non-integral antenna. And it should test according to part (b) of above section.

BTS simulator is connected to a communication antenna, by which communicate with the Mobile Phone inside the test site. The BTS simulator controls the Mobile Phone to transmit at maximum power which defined in specification of product when in traffic mode, field strength of spurious emission in idle mode were also tested. The Mobile Phone operates on a typical channel.

The test procedure:

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP. shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the Mobile Phone to the BTS simulator via the air interface. The band class is set as PCS.
- (b) Test the Radiated maximum output power by the Rohde and Schwarz ESMI Test Receiver from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on ESMI Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.


Measurement bandwidth (RBW) for 9 kHz up to 1GHz: 1 MHz;

Measurement bandwidth (RBW) for 1GHz up to 12.75GHz: 1MHz;

Measurement bandwidth (RBW) for 12.75GHz up to 20GHz: 1MHz;

Test setup

Step 1: Pre-test

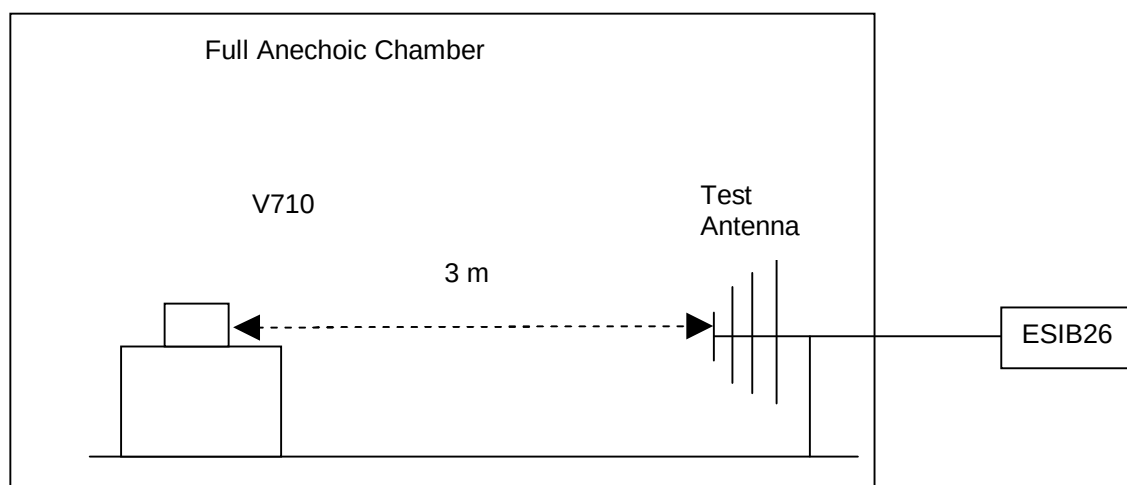

Step 2: Substitution method to verify the maximum ERP

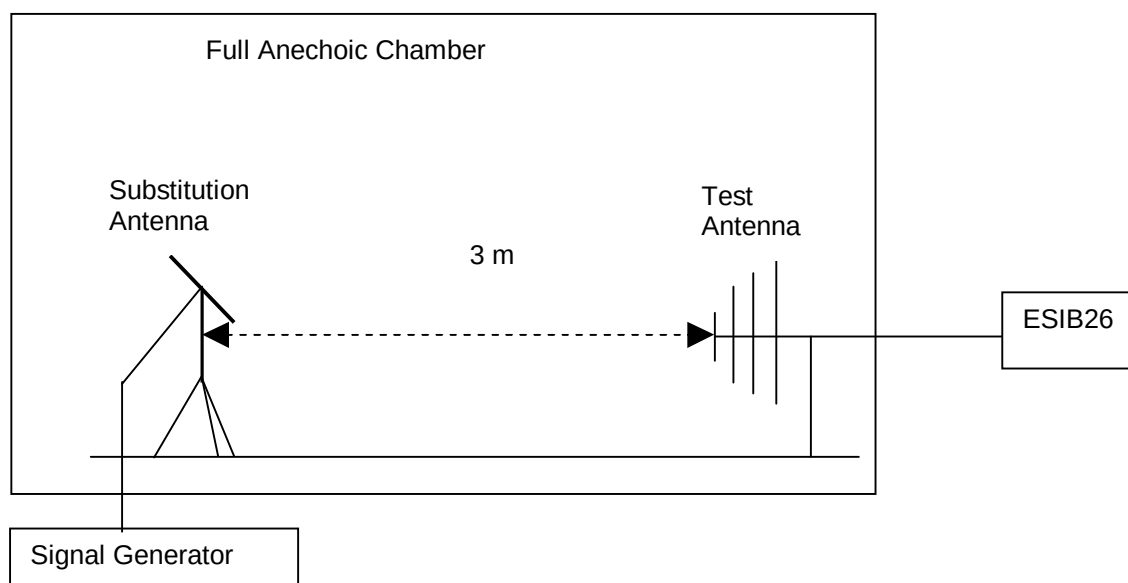


Figure 6. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

6.6.4 Measurement Results

6.6.4.1 Pre-test Measurement Results

Table 37 Measurement Results

Channel Number	Test Range (Frequency)	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
661	9 kHz ~20GHz	29.97	<- 13 dBm (See appendix F)	- 13 dBm	Pass

6.6.4.2 Substitution Results

No peak found in pre- test.

Calculation Sample:

Table 38 Substitution Results

Freq. [MHz]	Measurement Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result
3923.33	-36.12	Horn Ant.	7.85	2.20	-41.24	-35.59	-13	Pass

Note: For get the EIRP. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix F with 9 pages.

6.7 Frequency Stability

6.7.1 Test Conditions

Table 39 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1 at High ,Middle, Low Channel

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 24.235

6.7.2.2 Supporting Standards

Table 40 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.7.2.3 Limits

No specific frequency stability requirement in part 2.1055 and part 24.235.

6.7.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From –30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply

voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

Test Set up

Connect the Mobile Phone to the Wireless Communication test set 8960 via the connector. Then measure the frequency error by the Wireless Communication test set 8960. The Mobile Phone's output is matched with a 50 Ω load.

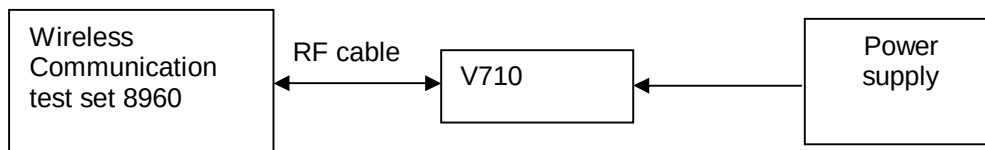


Figure 7. Test Set up


6.7.4 Measurement Results

6.7.4.1 Measurement Results vs. Variation of Temperature

I 3.7V DC Channel 512(1850.2MHz)

Table 41 Measurement Results vs. Variation of Temperature


Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	29.58	1850.2	4.11	Pass
-20 °C	29.58	1850.2	3.90	Pass
-10 °C	29.58	1850.2	5.07	Pass
0 °C	29.58	1850.2	-1.12	Pass
+10 °C	29.58	1850.2	0.70	Pass
+20 °C	29.58	1850.2	14.57	Pass
+30 °C	29.58	1850.2	-12.98	Pass
+40 °C	29.58	1850.2	-9.47	Pass
+50 °C	29.58	1850.2	-9.29	Pass

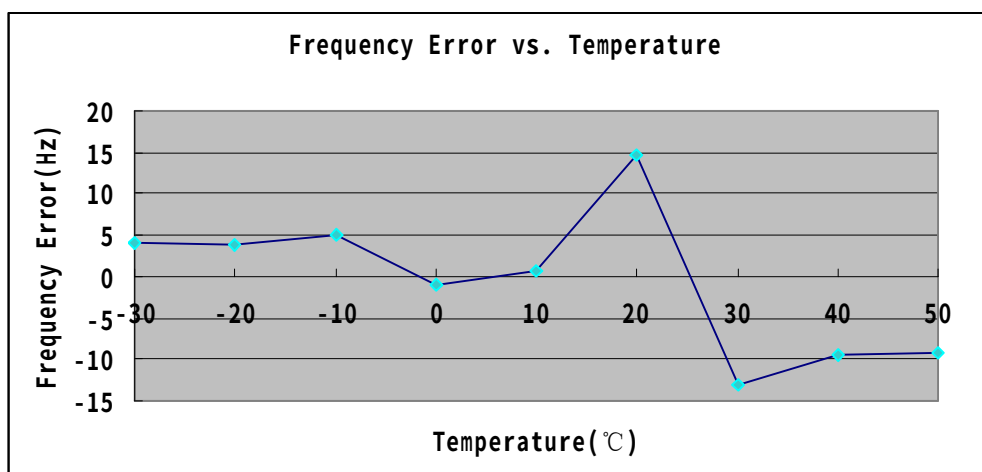

I 3.7V DC Channel 661(1880.0MHz)

Table 42 Measurement Results vs. Variation of Temperature

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	29.40	1880.0	-18.22	Pass
-20 °C	29.40	1880.0	-18.01	Pass
-10 °C	29.40	1880.0	-18.20	Pass
0 °C	29.40	1880.0	-19.05	Pass
+10 °C	29.40	1880.0	-20.94	Pass
+20 °C	29.40	1880.0	-19.39	Pass
+30 °C	29.40	1880.0	-17.20	Pass
+40 °C	29.40	1880.0	-20.60	Pass
+50 °C	29.40	1880.0	-18.10	Pass

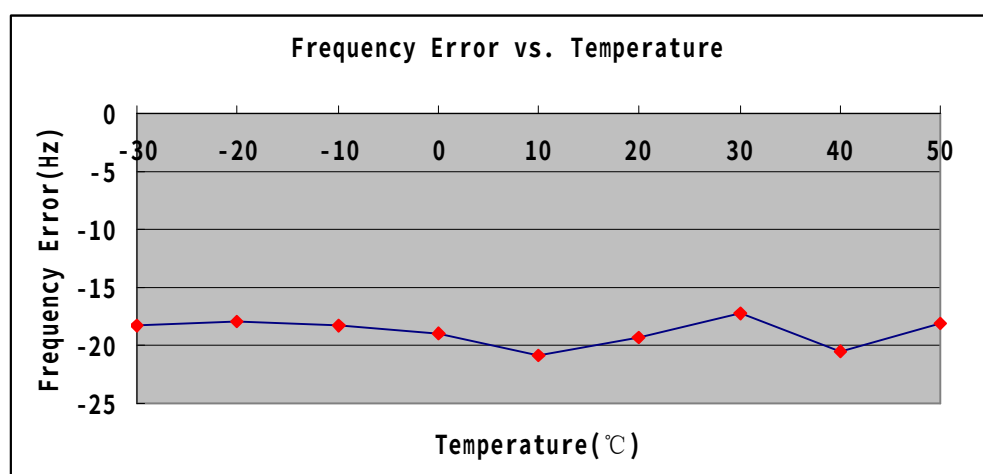


I 3.7V DC Channel 810(1909.8MHz)

Table 43 Measurement Results vs. Variation of Temperature

Temperature	Power	Nominal	Measured Frequency	Result
-------------	-------	---------	--------------------	--------

	(dBm)	Frequency (MHz)	Error(Hz)	
-30 °C	29.69	1909.0	-20.22	Pass
-20 °C	29.69	1909.0	-19.59	Pass
-10 °C	29.69	1909.0	-17.63	Pass
0 °C	29.69	1909.0	-21.33	Pass
+10 °C	29.69	1909.0	-19.95	Pass
+20 °C	29.69	1909.0	-21.11	Pass
+30 °C	29.69	1909.0	-18.77	Pass
+40 °C	29.69	1909.0	-19.43	Pass
+50 °C	29.69	1909.0	-18.73	Pass

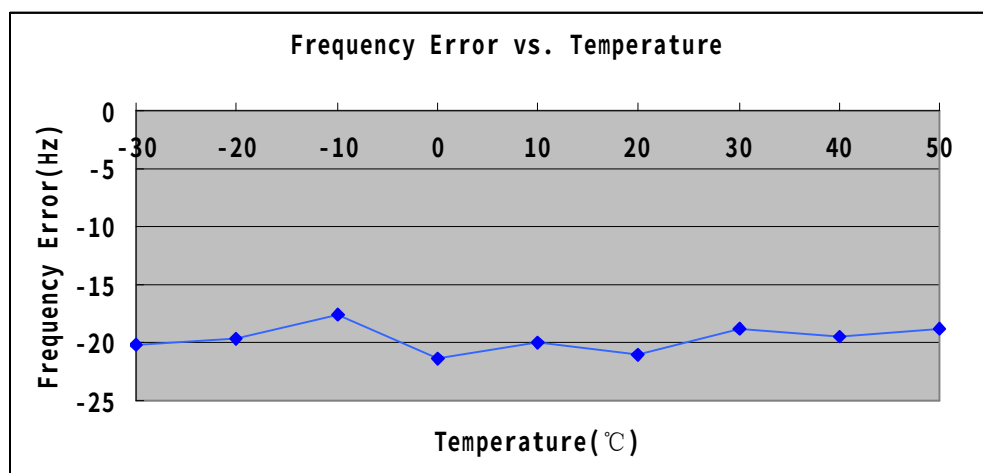

6.7.4.2 Measurement Results vs. Variation of Voltage

I 25 °C ,Channel 512 (1850.2MHz)

Table 44 Measurement Results vs. Variation of Voltage

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.6	29.58	1850.2	9.27	Pass
3.7	29.58	1850.2	-10.40	Pass
4.2	29.58	1850.2	-9.10	Pass

I 25 °C ,Channel 661 (1880.0MHz)

Table 45 Measurement Results vs. Variation of Voltage

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result

3.6	29.40	1880.0	-18.04	Pass
3.7	29.40	1880.0	-19.91	Pass
4.2	29.40	1880.0	-19.03	Pass

I 25°C, Channel 810 (1909.8 MHz)

Table 46 Measurement Results vs. Variation of Voltage

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error (Hz)	Result
3.6	29.69	1880.0	-20.52	Pass
3.7	29.69	1880.0	-22.75	Pass
4.2	29.69	1880.0	-20.09	Pass

6.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 EMC Test

7.1 Conducted Emission at Power Port

7.1.1 Test Conditions

Table 47 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Power port
Ambient temperature:	23.5°C
Relative humidity:	55 %
Test Configurations:	TM1at frequency M

7.1.2 Test Specifications and Limits

7.1.2.1 Specification

CFR 47 (FCC) part 15.107

7.1.2.2 Supporting Standards

Table 48 Supporting Standards:

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
------------------	--

7.1.2.3 Limits

Compliance with part15.107, conducted emission must meet the requirement of following table.

Table 49 Limits

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Note: * Decreases with the logarithm of the frequency.

7.1.3 Test Method and Setup

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4: 2003.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

Huawei Mobile Phone V710 was communicated with the BTS simulator through Air interface, the BTS simulator controls the Mobile Phone to transmitter the maximum power which defined in specification of

product. The Mobile Phone operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

Test Set-up

The Mobile Phone was setup in the screened chamber and operated under nominal conditions.

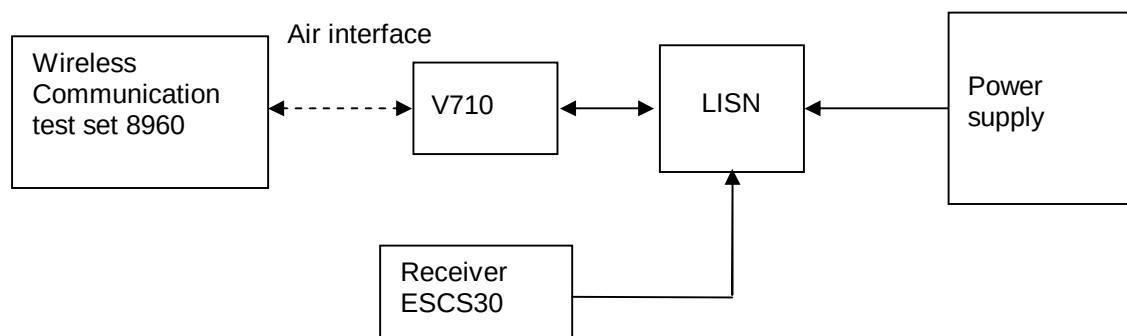


Figure 8. Test Set-up

7.1.4 Measurement Results

Table 50 MEASUREMENT RESULT:QP DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.352500	48.60	10.2	59	10.4	L3	FLO
0.433500	49.40	10.0	57	7.6	L3	FLO
1.171500	47.30	10.0	56	8.7	L3	FLO
2.224500	45.80	10.1	56	10.2	L3	FLO
8.520000	40.40	10.6	60	19.6	L3	FLO
25.47600	25.40	14.6	60	34.6	N	FLO

Table 51 MEASUREMENT RESULT:AV DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.348000	35.70	10.2	49	13.3	L3	FLO
0.420000	34.40	10.0	47	12.6	L3	FLO
1.171500	31.50	10.0	46	14.5	L3	FLO
2.530500	34.10	10.1	46	11.9	L3	FLO
5.113500	29.30	10.1	50	20.7	L3	FLO
24.10800	24.10	15.1	50	25.9	L3	FLO

7.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix G with 2 pages.

7.2 Radiated Emission of Enclosure in Ideal Mode

7.2.1 Test Conditions

Table 52 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25 °C
Relative humidity:	45 %
Test Configurations:	TM1at frequency M

7.2.2 Test Specifications and Limits

7.2.2.1 Specification

CFR 47 (FCC) part 15.109

7.2.2.2 Supporting Standards

Table 53 Supporting Standards:

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
------------------	--

7.2.2.3 Limits

The Radiated Emission of enclosure of EUT should compliance with the requirement of part 15.109. The limit showed in following table.

Table 54 Limits

Frequency of Emission (MHz)	Radiated Limit	
	Unit(μ v/m)	Unit(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
960-1000	500	54

7.2.3 Test Method and Setup

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The test distance was 3m. The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4. The Radiated Disturbance measurements were made using a Rohde and Schwarz ESMI Test Receiver and control software ES-K1.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 1GHz by using test

script of software; the emissions were measured using a Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0°to 360°, The receive antenna has two polarizations V and H.

Huawei Mobile Phone was communicated with the BTS simulator through Air interface. The Mobile Phone operated on the typical channel and the Mobile Phone worked in idle mode, transmitter was not work in this test.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 k Hz

Test set up

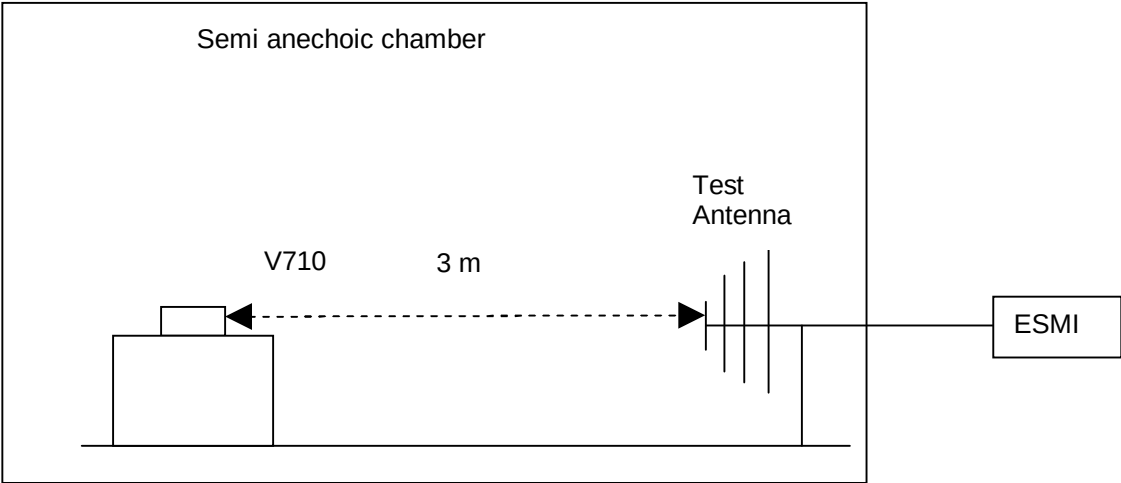


Figure 9. Test set up

7.2.4 Measurement Results

Table 55 MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
33.060000	25.70	-6.1	40.0	14.3	106.0	19.00	VERTICAL
75.900000	22.40	-15.9	40.0	17.6	297.0	111.00	VERTICAL
126.72000	27.90	-9.9	43.5	15.6	225.0	0.00	HORIZONTAL
208.86000	36.00	-11.9	43.5	7.5	121.0	158.00	HORIZONTAL
466.9200	30.30	-3.6	46.0	15.7	100.0	111.00	VERTICAL
947.40000	32.30	2.3	46.0	13.7	100.0	91.00	VERTICAL

7.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix H with 2 pages.

8 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 56 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2
Field Strength of Spurious Radiation	ERP(dBm)	U=3dB; k=2
Conducted Output Power	Power(dBm)	U=0.39dB; k=2
Conducted Emission at Power Port	Disturbance Voltage (dBμV)	U=4dB; k=2
Radiated Emission of enclosure at ideal mode	Field strength (dBμV/m)	U=5dB; k=2

9 Appendixes

Appendix A	Measurement Results Effective Radiated Power of Transmitter	7 pages
Appendix B	Measurement Results Modulation Characteristics	3 pages
Appendix C	Measurement Results Occupied Bandwidth	7 pages
Appendix D	Measurement Results Band Edges	5 pages
Appendix E	Measurement Results Spurious Emission at Antenna Terminal	19 pages
Appendix F	Measurement Results Radiated Spurious Emission	9 pages
Appendix G	Measurement Results Conducted Emission at Power Port	2 pages
Appendix H	Measurement Results Radiated Emission of Enclosure at Ideal Mode	2 pages
Appendix I	Photos of Test Setup	4 pages