

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0722_12.doc	Date of Report:	31.5.2007
Number of pages:	25	Customer's Contact person:	Bill Griffin
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-276 / Battery BL-5C, AC charger AC-3, Headset HS-9		
FCC ID:	QMNRM-276	IC:	661X-RM276
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	14.2.2007
Testing completed	27.2.2007
The customer's contact person	Bill Griffin
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	-
Document name	T:\\Projects\\RM-289\\EMC\\Results\\FCC\\Tre_FCC_0707_02.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II(1900)/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-289	004400991750504	3130	-	Vp gr06w47_07w04	40962
GSM phone	RM-289	004400991750231	3130	-	Vp gr06w47_07w04	40985
Headset	HS-9	-	-	-	-	40961
Battery	BL-5C	-	-	-	-	40957
AC Charger	AC-3	-	-	-	-	40952

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(c)	A8.5	Band edge compliance of RF emissions	NP
15.247(c)	A8.5	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.


The test results of QMNRM-289 are re-used for certification of the QMNRM-276. The table above indicates the results, which will be re-used.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5).....	9
4.1. Test method and limit.....	9
4.2. Bluetooth Test results	10
5. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	13
5.1. Test method and limit.....	13
5.2. Bluetooth Test results	14
6. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	18
6.1. Test method and limit.....	18
6.2. Bluetooth Test results	18
7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	20
7.1. Test method and limit.....	20
7.2. Bluetooth Test results	20
8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	22
8.1. Test method and limit.....	22
8.2. Bluetooth test results.....	23
9. Test Equipment.....	25
9.1. Conducted measurements	25
9.2. Radiated measurements	25

2. Test setups


2.1. Conducted RF test setup

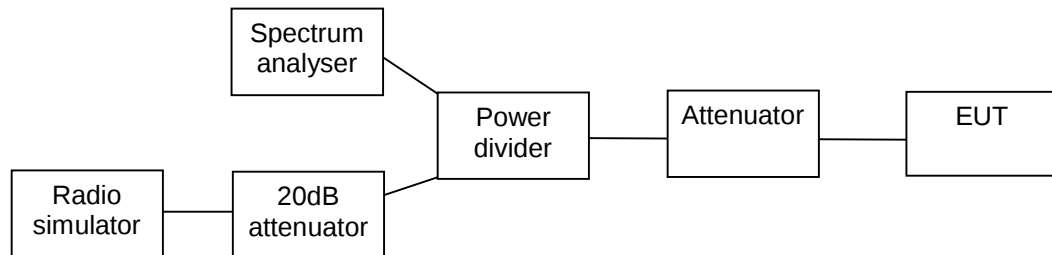

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

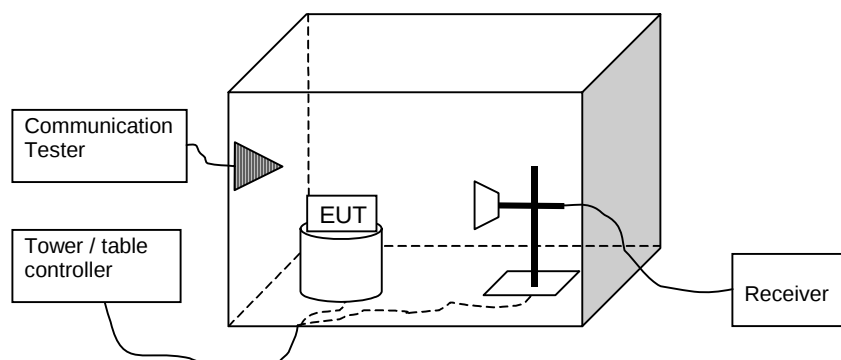

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-289 DUT 40985
Accessories with DUT numbers	BL-5C DUT 40958
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100.7
Date of measurements	27.2.2007
Measured by	Jari Jantunen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.10	0.977	PASSED
40 / 2442	0.80	1.202	PASSED
78 / 2480	1.00	1.259	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

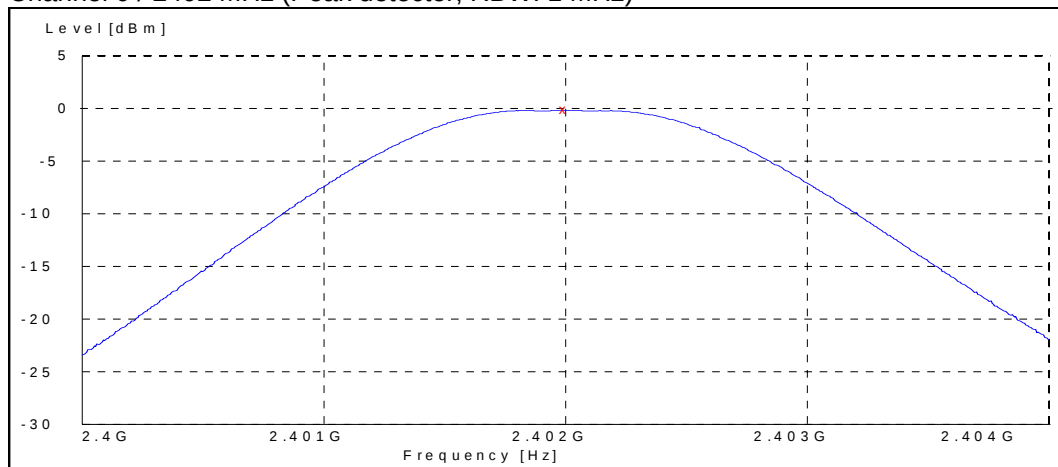

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

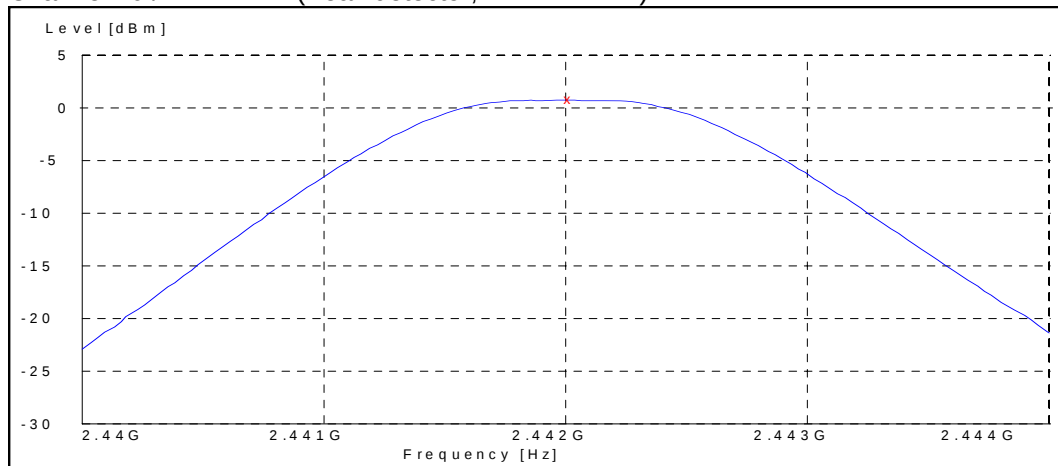


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

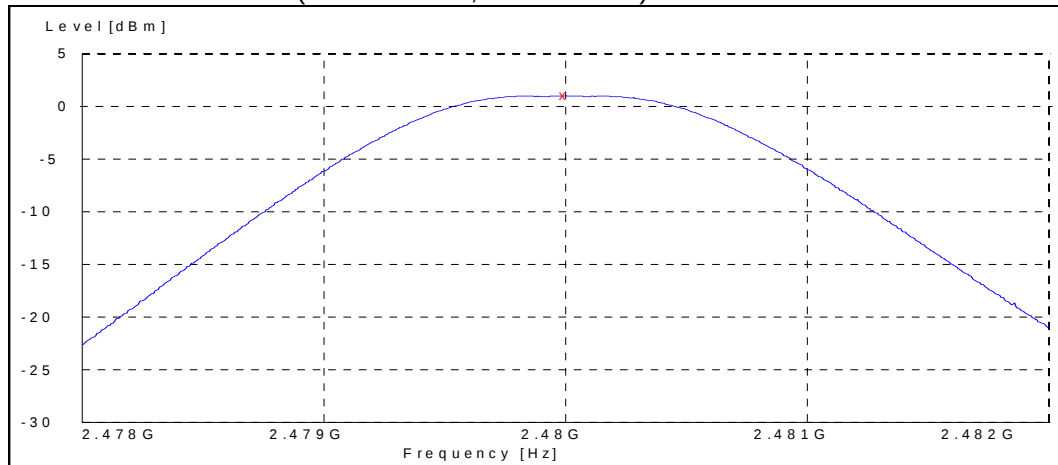


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.70	1.479	PASSED
40 / 2442	2.30	1.698	PASSED
78 / 2480	2.30	1.698	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

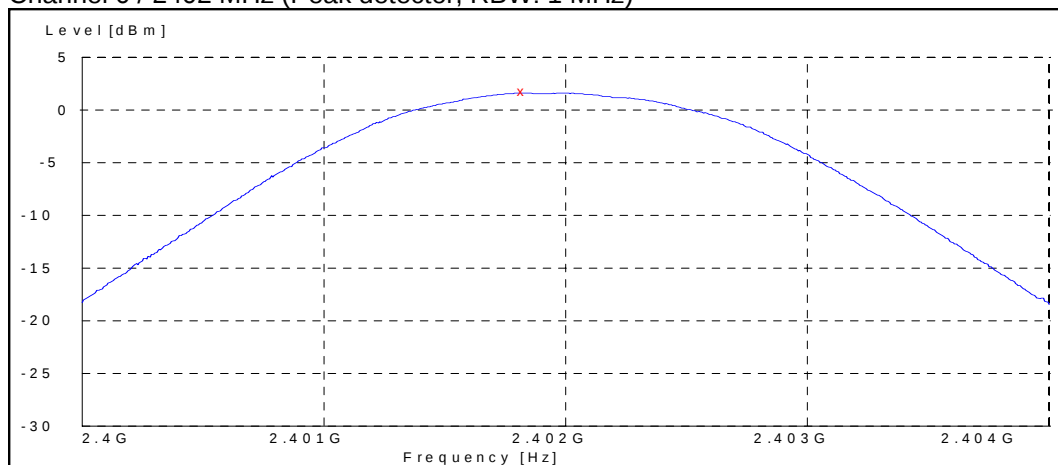

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

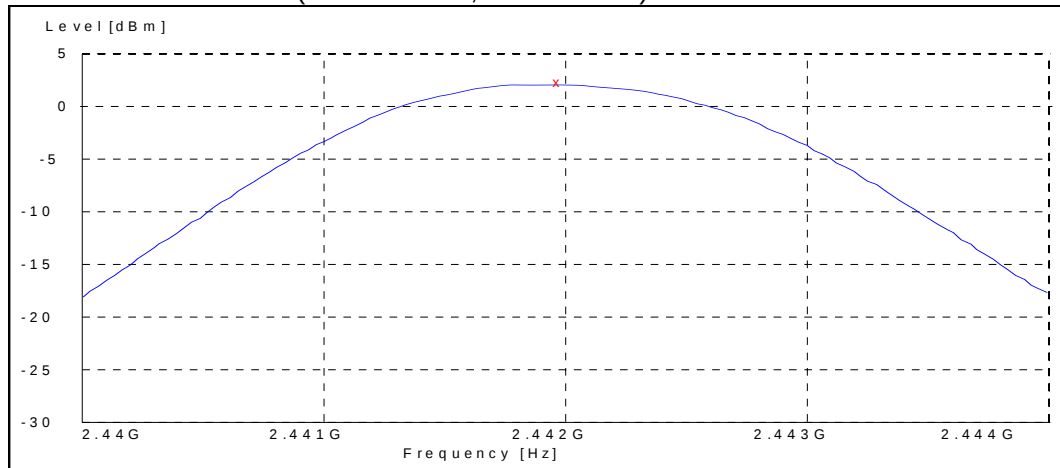

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

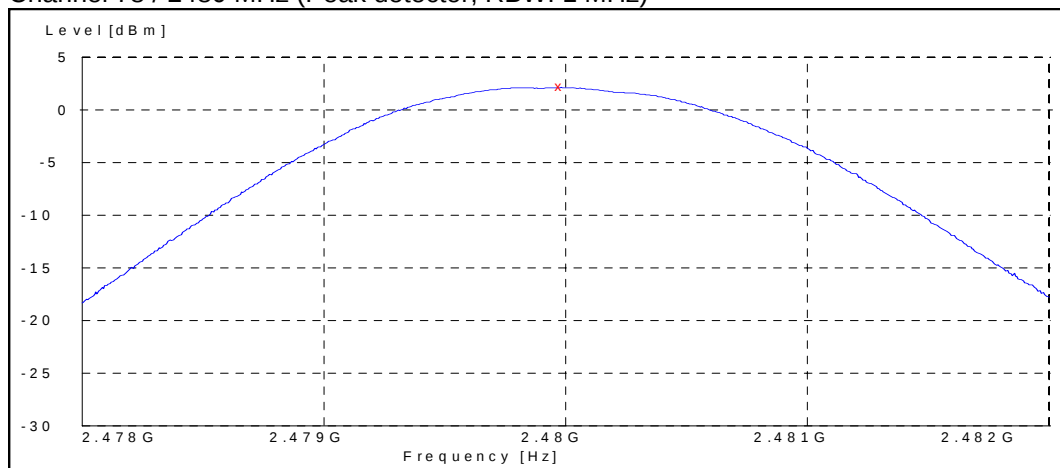

4. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5)

EUT with DUT number	RM-289 DUT 40985
Accessories with DUT numbers	BL-5C DUT 40958
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100.7
Date of measurements	27.2.2007
Measured by	Jari Jantunen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

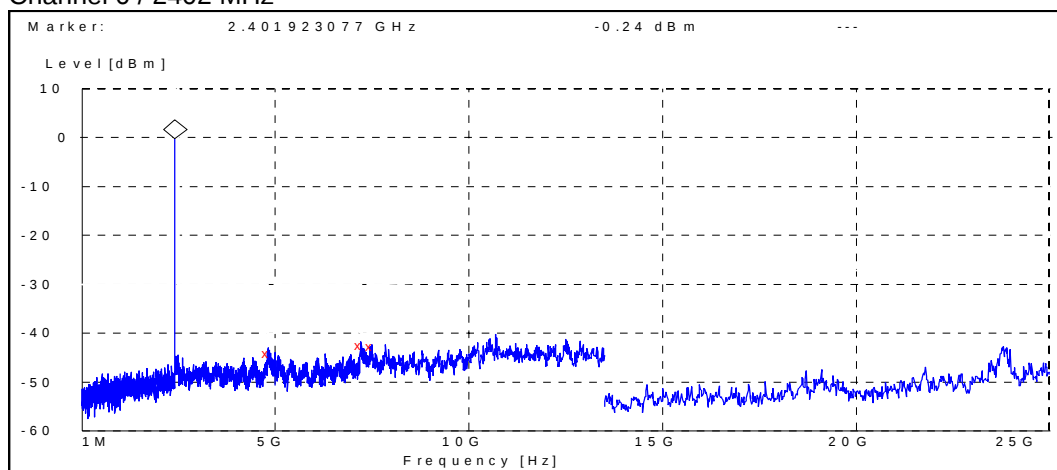


Frequency [MHz]	P [dBc]	Result
4814.102564	-43.956493	PASSED
7224.519231	-42.356493	PASSED
7500.000000	-42.456493	PASSED

Channel 40 / 2442 MHz

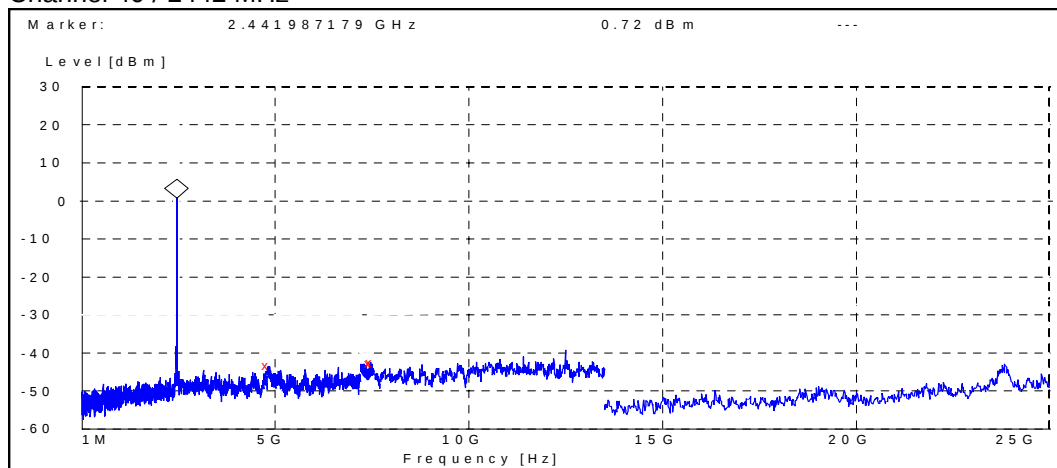

Frequency [MHz]	P [dBc]	Result
4814.743590	-43.916944	PASSED
7459.134615	-43.416944	PASSED
7500.000000	-43.116944	PASSED


Channel 78 / 2480 MHz

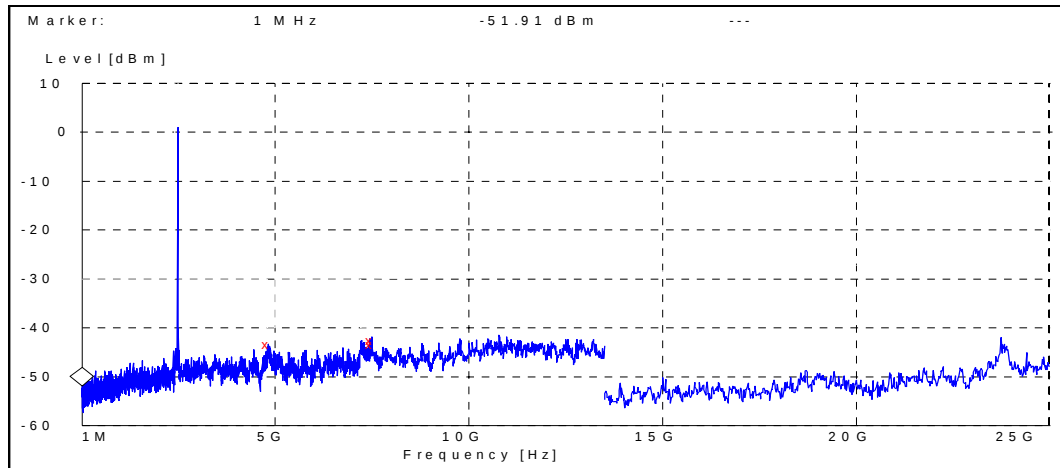

Frequency [MHz]	P [dBc]	Result
4812.179487	8.505583	PASSED
7486.057692	8.605583	PASSED
7500.000000	9.305583	PASSED


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

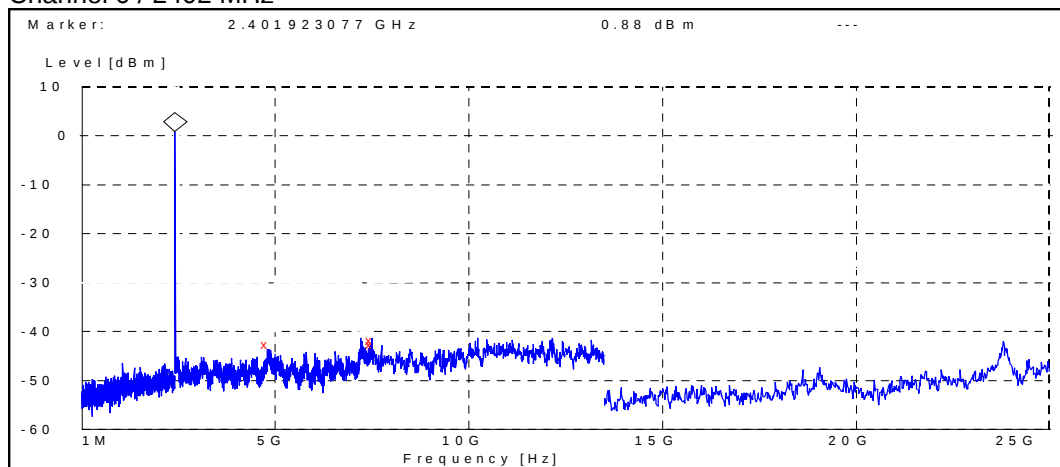


Frequency [MHz]	P [dBc]	Result
4800.641026	-43.584926	PASSED
7489.423077	-43.384926	PASSED
7500.000000	-42.684926	PASSED

Channel 40 / 2442 MHz

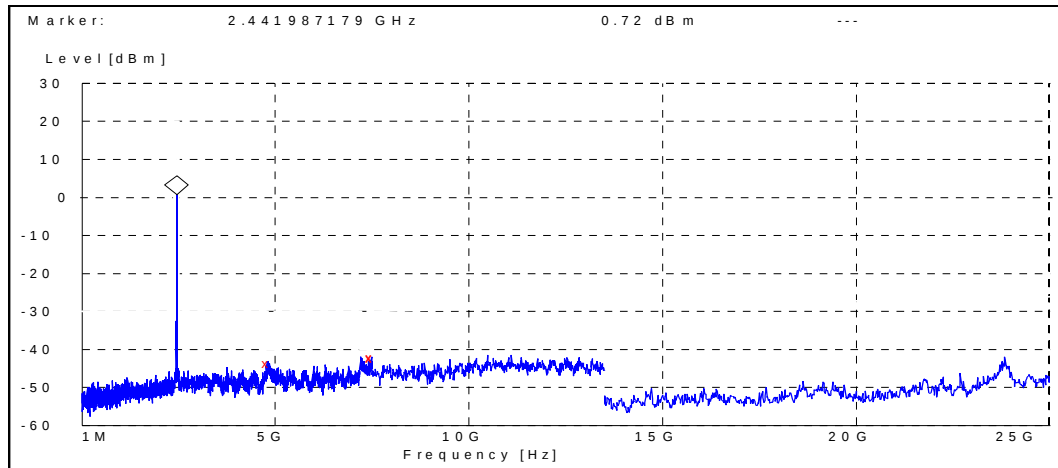

Frequency [MHz]	P [dBc]	Result
4817.307692	-44.322575	PASSED
7496.634615	-42.822575	PASSED
7500.000000	-42.922575	PASSED

Channel 78 / 2480 MHz

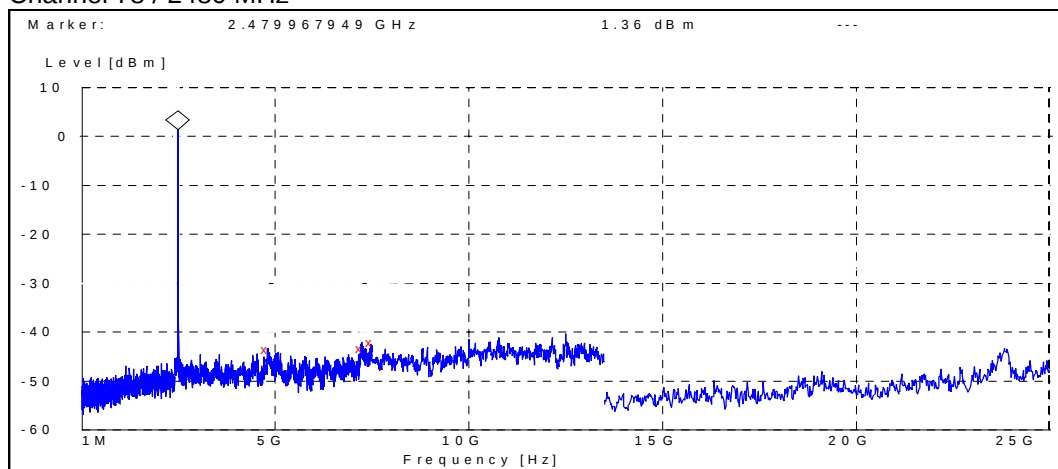

Frequency [MHz]	P [dBc]	Result
4800.961538	-44.955504	PASSED
7249.038462	-44.755504	PASSED
7500.000000	-43.555504	PASSED

5. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-289 DUT 40985
Accessories with DUT numbers	BL-5C DUT 40958
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100.7
Date of measurements	27.2.2007
Measured by	Jari Jantunen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

5.2. Bluetooth Test results


5.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	794.872	PASSED
40 / 2442	791.667	PASSED
78 / 2480	794.872	PASSED


Channel 0 / 2402 MHz

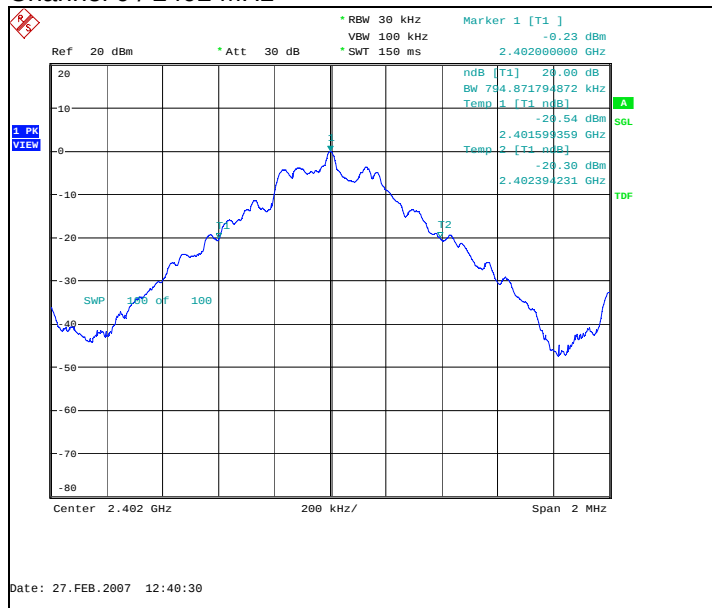

Channel 40 / 2442 MHz

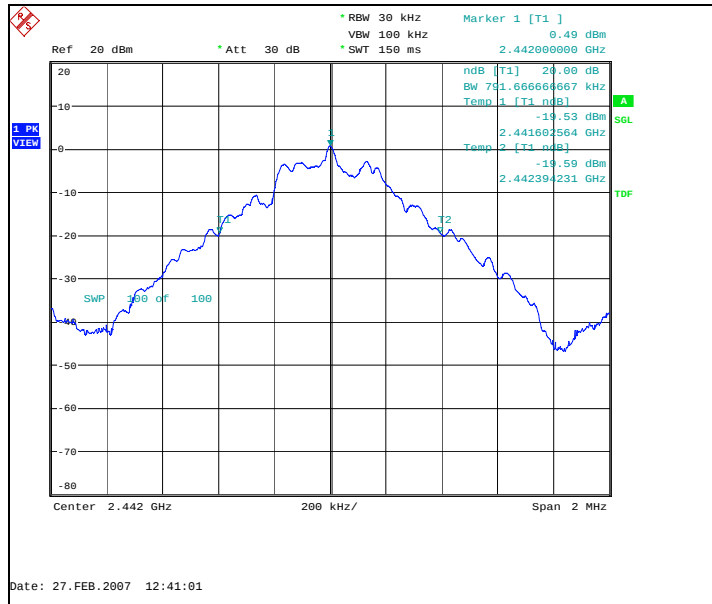


Channel 78 / 2480 MHz

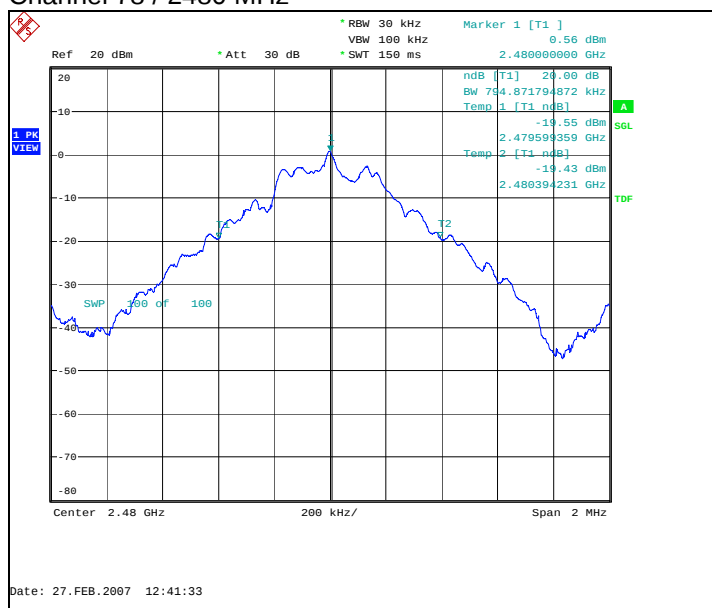


5.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1262.821	PASSED
40 / 2442	1262.821	PASSED
78 / 2480	1262.821	PASSED


Channel 0 / 2402 MHz

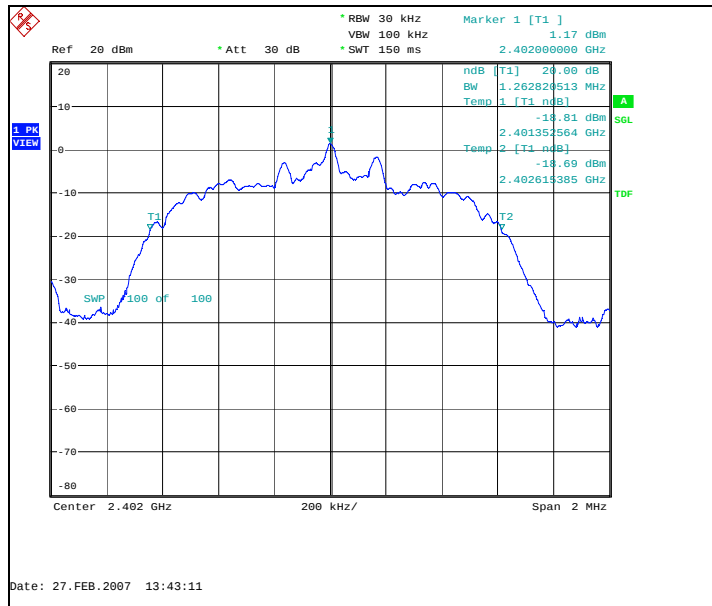

Channel 40 / 2442 MHz

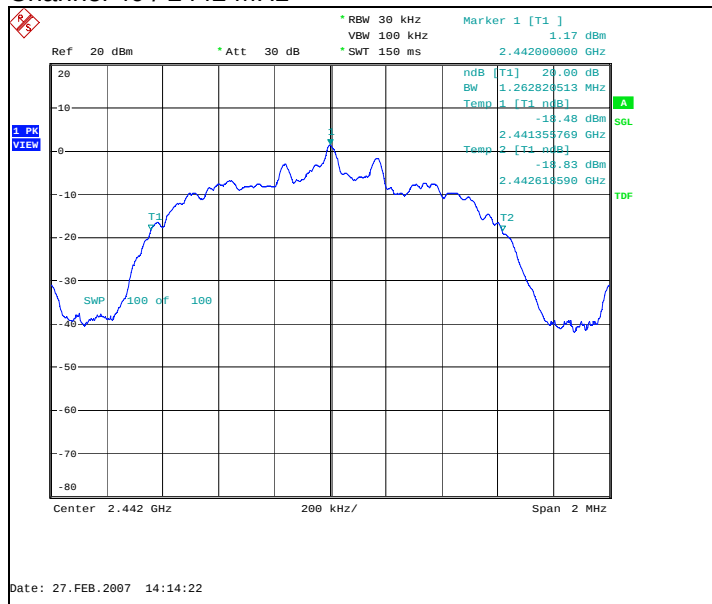

Channel 78 / 2480 MHz

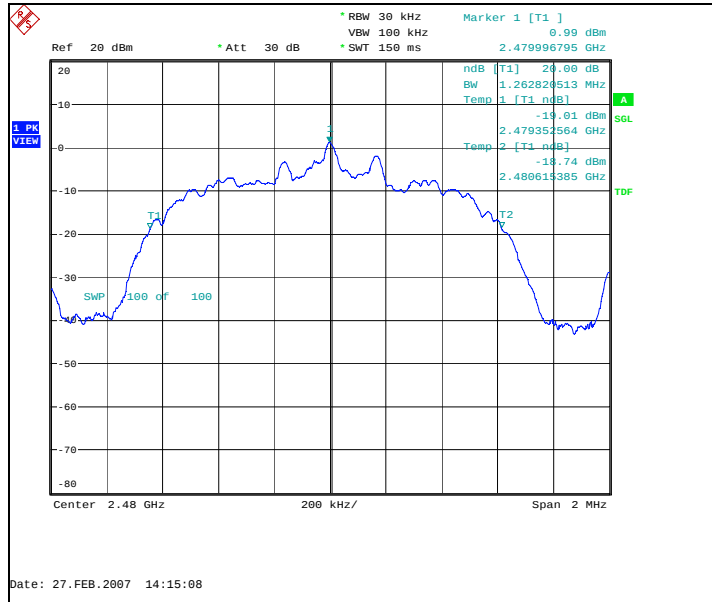

6. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-289 DUT 40985
Accessories with DUT numbers	BL-5C DUT 40958
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100.7
Date of measurements	27.2.2007
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1017.628	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

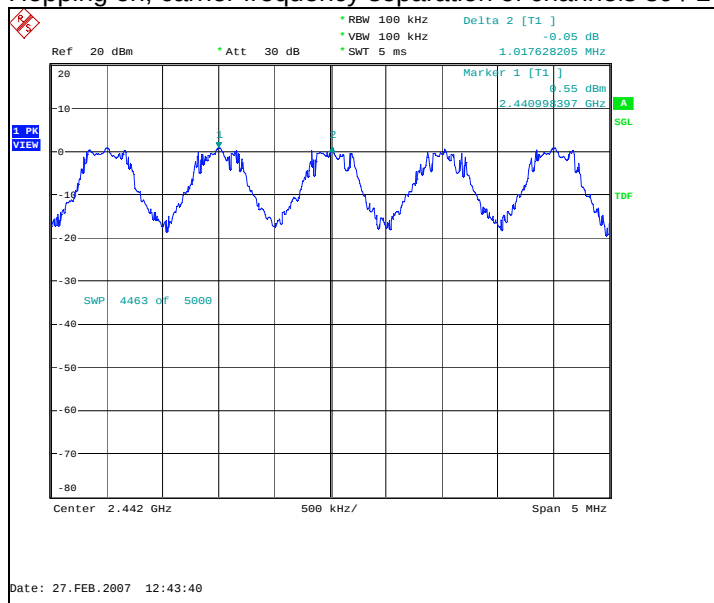

6.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
977.564	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

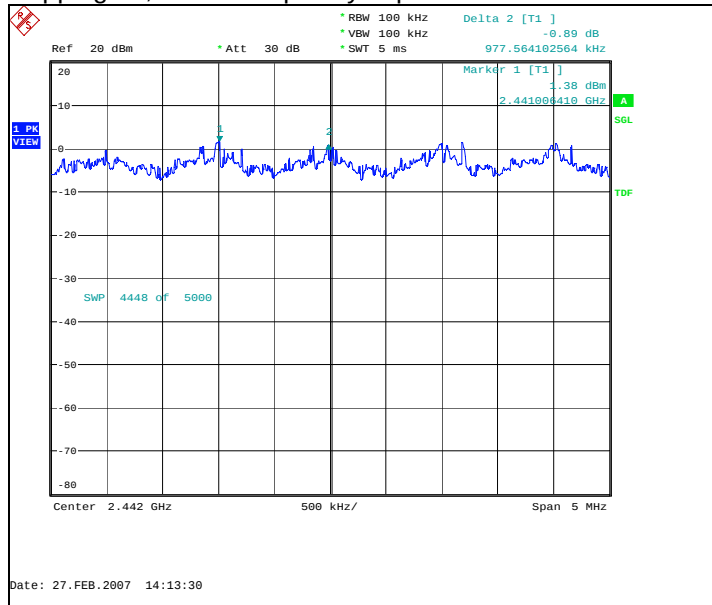

7. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-289 DUT 40985
Accessories with DUT numbers	BL-5C DUT 40958
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100.7
Date of measurements	27.2.2007
Measured by	Jari Jantunen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

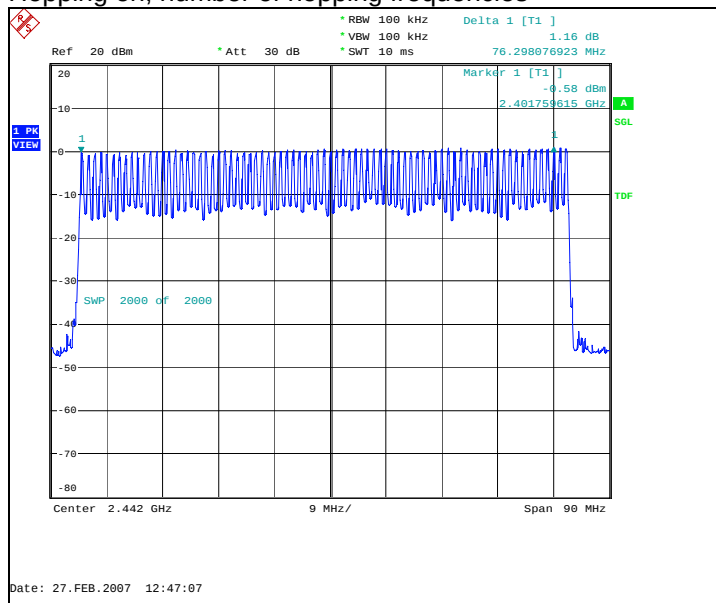

7.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
72	PASSED

Hopping on, number of hopping frequencies

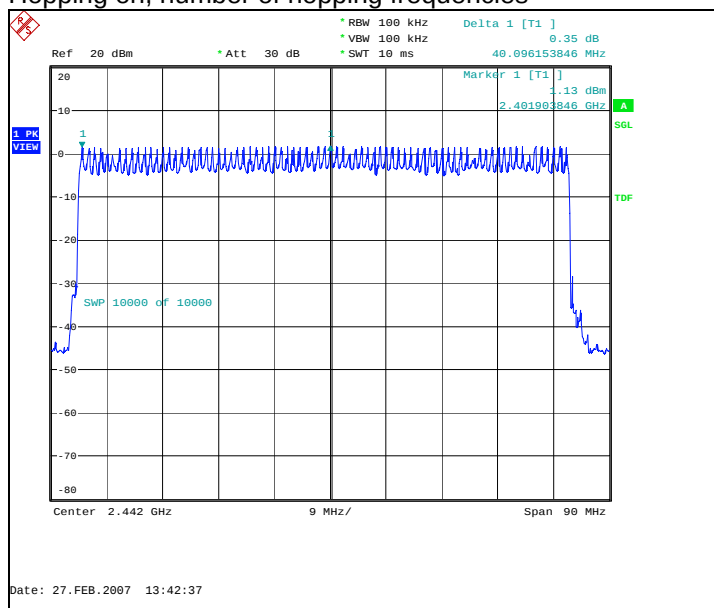

8. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-289 DUT 40985
Accessories with DUT numbers	BL-5C DUT 40958
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 100.7
Date of measurements	27.2.2007
Measured by	Jari Jantunen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

8.2. Bluetooth test results


8.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
96	2 968	0.284923	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

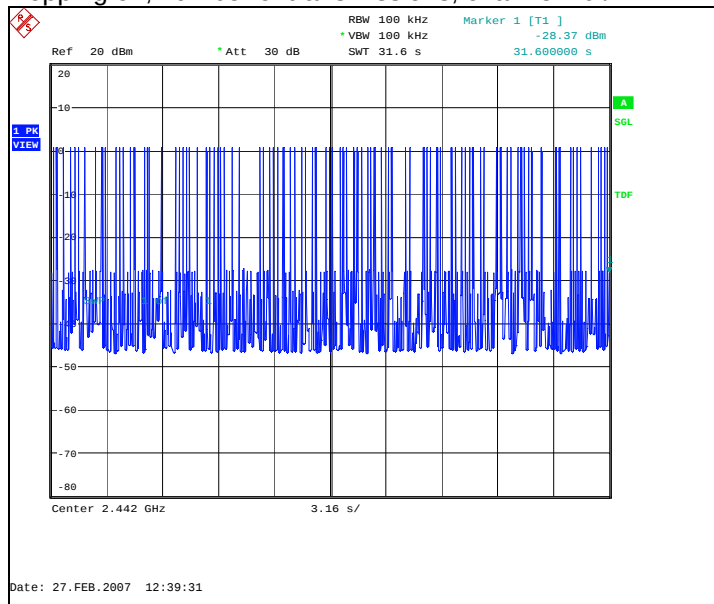


Hopping on, duration of one transmission, channel 40 / 2442 MHz

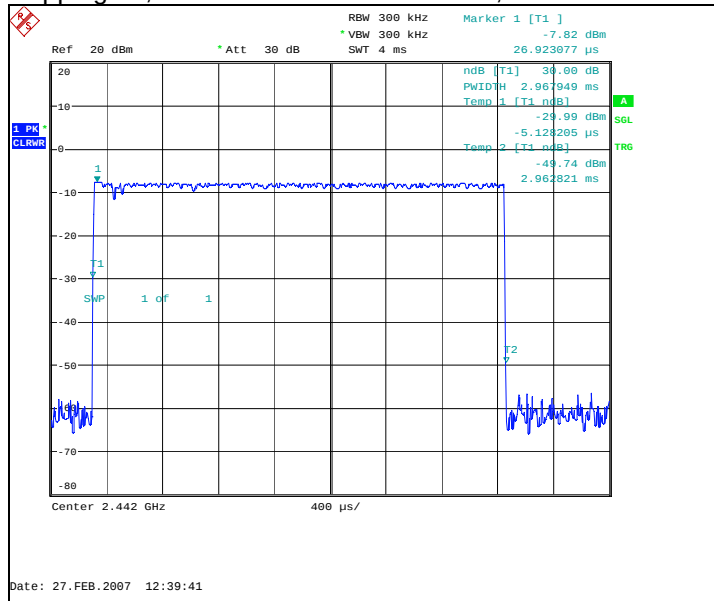


8.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
96	2 981	0.286154	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

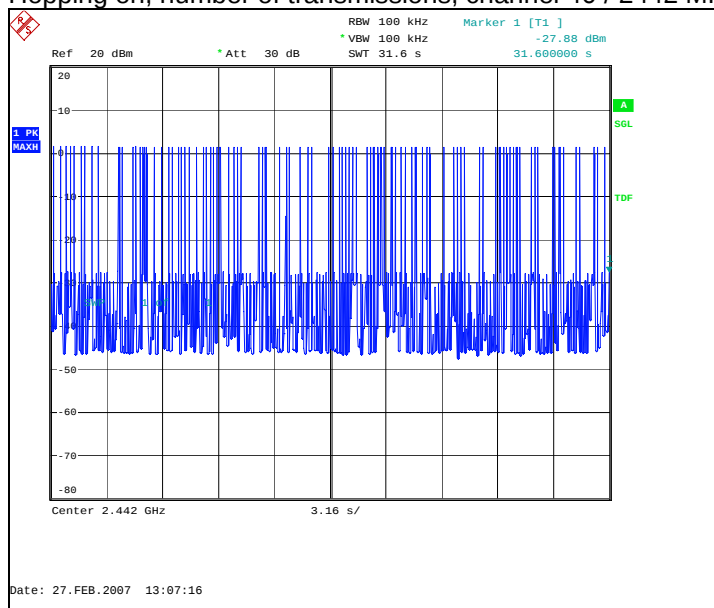

Hopping on, duration of one transmission, channel 40 / 2442 MHz

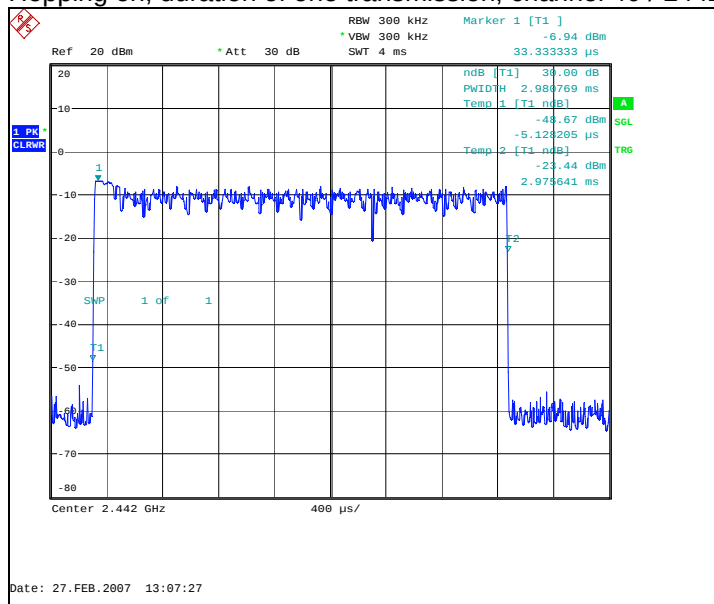

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B