

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CNFC_RM-807_40.docx	Date of Report:	13-Aug-2012
Number of pages:	15	Customer's Contact person:	Abadilla Victoria
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Nokia Corporation P.O.Box(86) 16620 W Bernardo Drive San Diego, CA 92127 Tel +1 858-831-5000 Fax. +1 858 385 1598
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-845 / Battery BP-4W / AC-Charger AC-50U / Headset WH-902		
FCC ID:	QMNRM-845	IC:	661X-RM845
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2009), and, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Kalle Hannila, Engineer, EMC&SAR

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	27-Jul-2012
Testing completed	13-Aug-2012
The customer's contact person	Victoria Abadilla
Test Plan referred to	T:\Projects\RM-845\TestPlan\RS_testplan_RM-845.xlsm
Notes	-
Document name	T:\Projects\RM-845\EMC\FCC15CNFC_RM-845_19.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth/FM Transmitter

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-845	352875050016897	0209		1521.0003.8422.9710.12271	16577
Battery	BP-4W	393213215514010114860670671	-	-	-	16578
AC-Charger	AC-50U	409049215427050147660675620	-	-	-	16562
Headset	WH-902	209E2R	-	-	-	16563
Phone	RM-845	352875050016830	0209	-	1525.000308422.9710.12271	16606
Battery	BP-4W	393213215514010106760670671	-	-	-	16547
Headset	WH-902	209E2R	-	-	-	16564
AC-Charger	AC-50U	409049215427050146760675620	-	-	-	16558

1.2. Summary of Test Results

NFC:

Section in CFR 47	Section in RSS-Gen or RSS-210	Name of the test	Result
15.209	2.6	Radiated Emission below 30 MHz	PASSED
15.209	A2.6	Radiated Emission above 30 MHz	PASSED
15.225 (a-d)	A2.6	Field strength in the 13.56 MHz band	PASSED
	4.6.1	Occupied Bandwidth	PASSED
15.225(e)	A2.6	Frequency Stability	PASSED
15.225 (e)	A2.6	Frequency stability, temperature variation	PASSED
15.225 (e)	A2.6	Frequency stability, voltage variation	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Radiated spurious emissions below 30MHz.....	4
2.1. Test method and limit.....	4
2.2. Test Results.....	5
3. Radiated spurious emissions above 30MHz.....	6
3.1. Test Results.....	6
4. Field strength in the 13.56 MHz band	7
4.1. Test method and limit.....	7
4.2. Test Results.....	7
4.3. Sidebands.....	8
5. Occupied bandwidth	9
5.1. Test Setup.....	9
5.2. Test method and limit.....	9
5.3. NFC Test results.....	9
6. Frequency stability, temperature variation (FCC §15.225 (e) [2], RSS-210 A2.6.....	10
6.1. Test Setup.....	10
6.2. Test method and limit.....	10
6.3. NFC Test results.....	10
7. Frequency stability, voltage variation (FCC §15.225 (e) [2], RSS-210 A2.6.....	11
7.1. Test Setup.....	11
7.2. Test method and limit.....	11
7.3. NFC Test results.....	11
8. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	12
8.1. Test Setup.....	12
8.2. Test method and limit.....	12
8.3. NFC Test results.....	13
9. Test Equipment.....	14
9.1. Conducted measurements	14
9.2. Radiated measurements	15

2. Radiated spurious emissions below 30MHz

EUT with DUT number	RM-845, DUT 16577
Accessories with DUT numbers	BP-4W, DUT 16578 ; AC-50U, DUT 16562 ; WH-902, DUT 16563
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH]	22 / 40 / 101.2
Date of measurements	09-Aug-2012
Measured by	Kalle Hannila / Jari Keto

2.1. Test method and limit

The tests were made according to the ANSI C63.4-2009, RSS-Gen and RSS-210.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

§ 15.225 Operation within the band 13.110–14.010 MHz.

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

2.2. Test Results

Frequency range 9 kHz...30 MHz

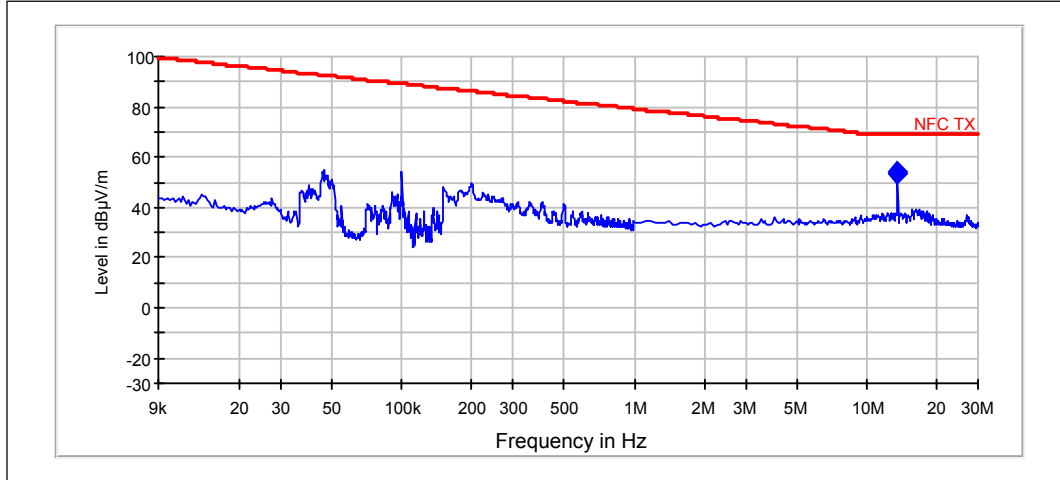

The highest values (QuasiPeak)


Frequency [MHz]	Level[dBm]	Margin[dB]	Azimuth[deg]	Elevation [deg]	Polarisation	Result
13.558	53.75	15.3	22	0	H	PASSED
13.56	54.34	14.7	22	0	H	PASSED

3. Radiated spurious emissions above 30MHz

EUT with DUT number	RM-845, DUT 16577
Accessories with DUT numbers	BP-4W, DUT 16578 ; AC-50U, DUT 16562 ; WH-902, DUT 16563
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH]	22 / 40 / 101.2
Date of measurements	09-Aug-2012
Measured by	Kalle Hannila / Jari Keto

3.1. Test Results

Frequency range 30...1000 MHz

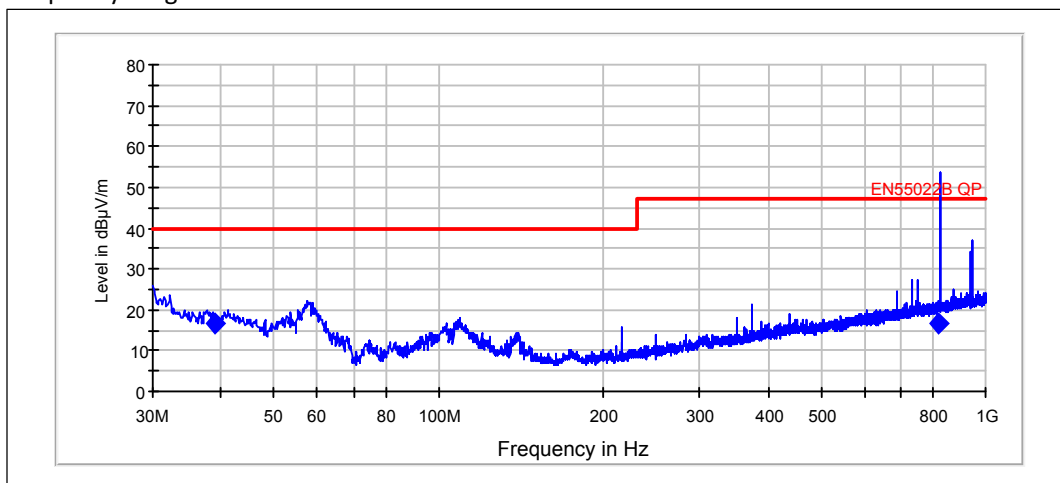

*Exceeding emissions were sporadic and not reproducible and thus ignored.

QuasiPeak

Frequency [MHz]	QuasiPeak [dBμV/m]	Bandwidth [kHz]	Height [cm]	Polarization	Azimuth [deg]	Margin [dB]	Limit [dBμV/m]	Results
38.83	16.609	120	100	V	-12	23.4	40	PASSED
822.558	16.755	120	350	H	-18	30.2	47	PASSED

4. Field strength in the 13.56 MHz band


EUT with DUT number	RM-845, DUT 16577
Accessories with DUT numbers	BP-4W, DUT 16578 ; AC-50U, DUT 16562 ; WH-902, DUT 16563
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH]	22 / 40 / 101.2
Date of measurements	09-Aug-2012
Measured by	Kalle Hannila / Jari Keto

4.1. Test method and limit

The measurement is made according to EN 302 291-01, Section 7.1.1
The measuring distance was 3 meter in shielded enclosure.

4.2. Test Results

Radiated H-Field, 3 meter distance

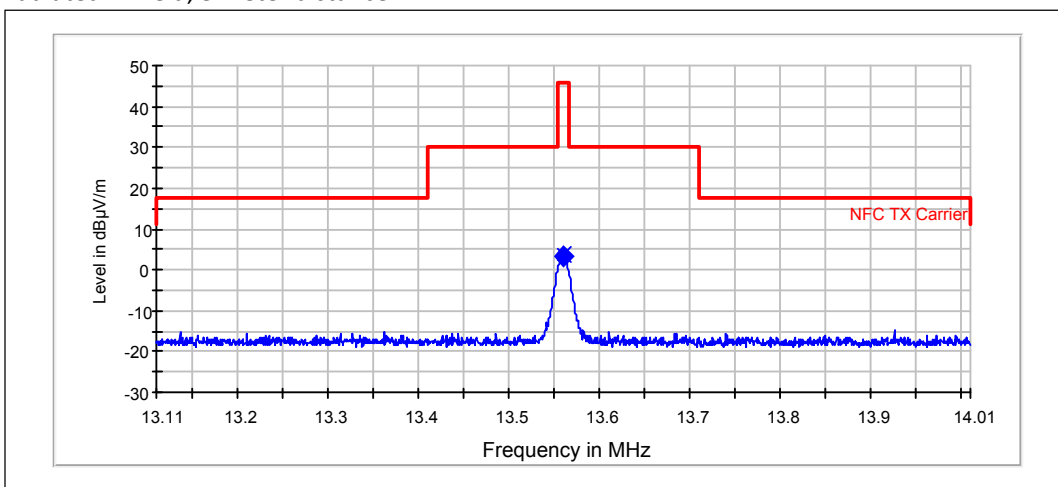


QuasiPeak

Frequency [MHz]	Reading [dBµV]	Correction [dB]	Result [dBµA/m]	Limit [dBµA/m]	Margin [dB]	Result
13.56	34.88	-31.5	3.38	46	-42.62	PASSED

*Correction = -51.5(Conversion dBµV -> dBµA) + 20dB (Antenna Gain)

4.3. Sidebands

Measurements of sidebands were performed using a small magnetic loop antenna close to the EUT. The result values on the graphics are therefore relative. The correct peak value is 3.38 dBμA/m, as can be seen in paragraph 'Radiated H-Field'. The limit at 13.56 MHz is 25 dBμA/m at 10 meter distance. All sidebands are well below limits.

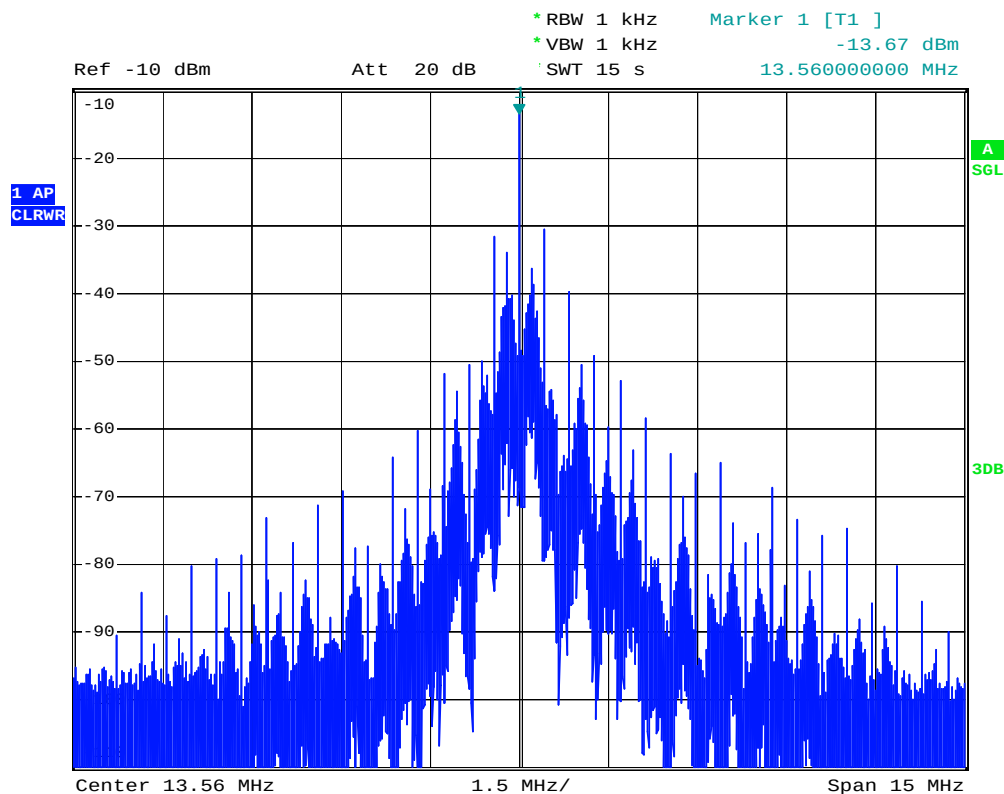

Date: 13.AUG.2012 14:24:35

5. Occupied bandwidth

EUT with DUT number	RM-845, DUT 16606
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 /100
Date of measurements	13-Aug-2012
Measured by	Tomi Lipponen

5.1. Test Setup


A small whip antenna was placed close to the EUT, and connected to the measuring Spectrum Analyzer.

5.2. Test method and limit

The Test was carried out with the EUT in Test mode with modulation on.

5.3. NFC Test results

NFC TX Frequency = 13.56 MHz

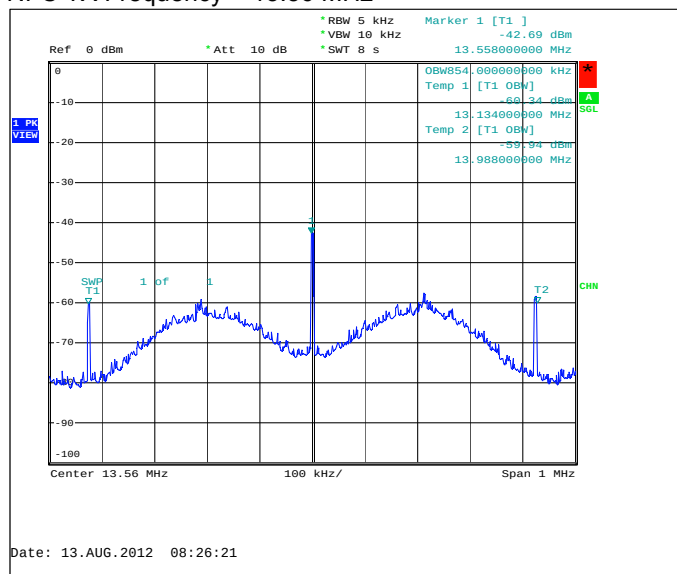

Operation mode (TX on)	Occupied bandwidth [kHz]
NFC, modulated	854

6. Frequency stability, temperature variation (FCC §15.225 (e) [2], RSS-210 A2.6)

EUT with DUT number	RM-845, DUT 16606
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100
Date of measurements	13-Aug-2012
Measured by	Tomi Lipponen

6.1. Test Setup

The EUT was placed in a Climatic Chamber. A small whip antenna was placed close to the EUT, and connected to the measuring Spectrum Analyzer. Measurement performed without modulation on TX.

6.2. Test method and limit

The measurement is made according to FCC rules FCC 47 CFR Part 15 section 15.225 (e) [2] and RSS-210 A2.6

- The EUT is placed in the chamber in transmit mode.
- The climate chamber temperature is set to the maximum value and allowed to stabilize.
- The transmit frequency is measured.
- Temperature is lowered to the next temperature value and allowed to stabilize.
- The steps c - d is repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [%]
+/- 0.01

6.3. NFC Test results

NFC TX Frequency = 13.56 MHz

Temperature [°C]	Frequency [MHz]	Deviation [kHz]	Deviation [%]	Result
50	13.559866	-0.134	-0.000988	PASSED
40	13.559875	-0.125	-0.000922	PASSED
30	13.559896	-0.104	-0.000767	PASSED
20	13.559936	-0.064	-0.000472	PASSED
10	13.559971	-0.029	-0.000214	PASSED
0	13.560003	0.003	0.000022	PASSED
-10	13.560013	0.013	0.000096	PASSED
-20	13.560003	0.003	0.000022	PASSED
-30	13.559957	-0.043	-0.000317	PASSED

7. Frequency stability, voltage variation (FCC §15.225 (e) [2], RSS-210 A2.6)

EUT with DUT number	RM-845, DUT 16606
Accessories with DUT numbers	Dummy Battery
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100
Date of measurements	13-Aug-2012
Measured by	Tomi Lipponen

7.1. Test Setup

A small whip antenna was placed close to the EUT, and connected to the measuring Spectrum Analyzer.

7.2. Test method and limit

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at +5% and -15%. Measurement performed without modulation on TX.

Limits for frequency stability, voltage variation measurements

Frequency deviation [%]
+/- 0.01

7.3. NFC Test results


NFC TX Frequency = 13.56 MHz

Voltage [V]	Frequency [MHz]	Deviation [kHz]	Deviation [%]	Result
4.1	13.559932	-0.068	-0.000501	PASSED
3.5	13.559985	-0.015	-0.000111	PASSED
3.68	13.559952	-0.048	-0.000354	PASSED

8. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-845, DUT 16606
Accessories with DUT numbers	BP-4W, DUT 16547 ; WH-902, DUT 16564 ; AC-50U, DUT 16558
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100
Date of measurements	08-Aug-2012
Measured by	Sami Lehtonen

8.1. Test Setup



8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:


$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

8.3. NFC Test results

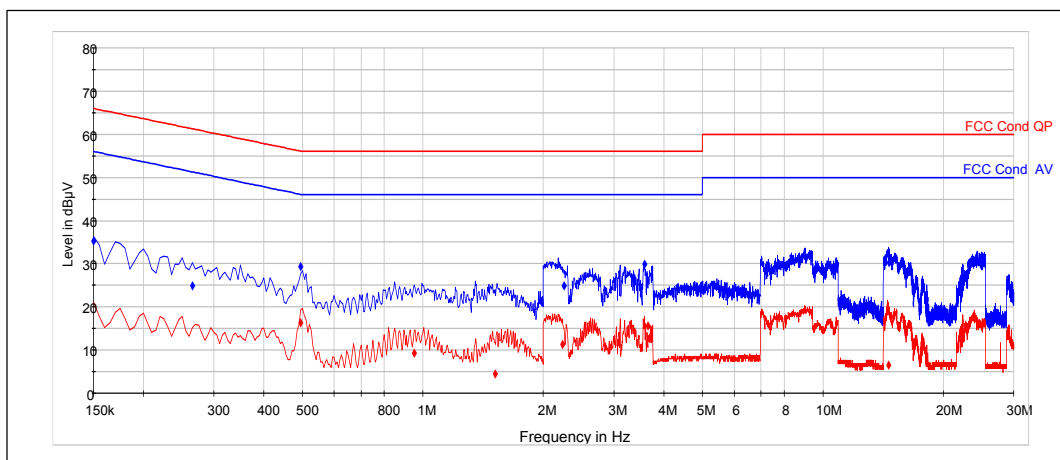

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
0.15	35.32	N	PASSED
0.265	24.83	N	PASSED
0.495	29.4	N	PASSED
2.255	24.85	N	PASSED
3.585	29.88	N	PASSED
14.63	30.34	N	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
0.495	16.35	L1	PASSED
0.95	9.37	L1	PASSED
1.515	4.5	L1	PASSED
2.235	11.3	N	PASSED
3.655	15.67	N	PASSED
14.595	6.45	N	PASSED

9. Test Equipment

9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
6038	Data Logger	Testo 580	Testo	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
6015	Receiver	ESI	R&S	-
2059	V-network	ESH3-Z6	R&S	-
6044	V-network	ESH3-Z6	R&S	-
1759	LISN 50 µH	ESH3-Z5	R&S	-
2390	Directional Coupler	DC2600	AR	-
1916	Communication Tester	CMTA84	R&S	-
6012	CDN	CDN USB/c	Teseq	-
2388	Bluetooth Tester	CBT	R&S	-
6046	Attenuator 10dB	8493C	Agilent	-
6047	Attenuator 20dB	8493C	Agilent	-
6036	Data Logger	175-H2	Testo	-
6045	Power splitter	11667B	Agilent	-
6039	USB Interface	5541765	Testo	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6096	EMC Analyzer	E7405A	HP	-
6098	Signal Generator	8648C	Agilent	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6120	Thermal Chamber	WT 20/40	Weiss	-
6121	Power Splitter	HP11667B	Agilent	-
6122	Power Splitter	HP11667B	Agilent	-
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	-
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	-
2359	Temperature Test Chamber	VT4002	Vötsch	-
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
1999	Receiver	ESIB26	R&S	-
2352	Spectrum Analyzer	FSP-30	R&S	-
2097	Pulse Limiter	ESH3-Z2	R&S	-
2039	Power Supply	PL330QMD	Thurlby	-
1992	Signal Generator	83630B	Agilent	-
2206	Signal Generator	SMX	R&S	-

9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
6038	Data Logger	Testo 580	Testo	-
6014	Substitute Calibration Cable	Sucoflex 104PB	Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	-
2389	Signal Generator	SMJ 100A	R&S	-
6009	GPS Antenna	SA-700	Chronos	-
6010	GPS Network amplifier	NLA20FPDC	GPS Networking, Inc	-
6011	GPS signal Splitter	LDCBS1x4	GPS Networking, Inc	-
1988	Antenna	HL562	R&S	-
-	RF immunity / Emission Software	EMC32	R&S	-
1917	Communication Tester	CMTA84	R&S	-
2388	Bluetooth Tester	CBT	R&S	-
6037	Data Logger	175-H2	Testo	-
6039	USB Interface	5541765	Testo	-
6087	Antenna	BBHA 9120D	Scharzbeck	-
6088	Antenna	VUBA 9117	Scharzbeck	-
6089	Antenna	HFH2-Z2	R&S	-
10479	Communication Tester	CMW500	R&S	-
6094	Communication Tester	CMW500	R&S	-
6103	Bluetooth tester	CBT	R&S	-
6113	Signal Generator	SMF100A	R&S	-
6115	Open switch and control unit	OSP 130	R&S	-
6116	Open switch and control unit	OSP 150	R&S	-
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	-
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	-
6135	Notch Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	-
2140	Antenna	EMCO93110B	EMCO	-
2142	Antenna	3146	EMCO	-
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	-
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22
2347	Communication Tester	CMU200	R&S	-
2180	Communication Tester	CMU200	R&S	-
2156	Communication Tester	CMU200	R&S	-
2176	CDN	CDN 801-M3	Lüthi	-
2027	CDN	M2 (modified) DC1	MEB	-
2028	CDN	M3 (modified) DC2	MEB	-
1984	Antenna	BBHA 9120 D	Schwarzbeck	-
6017	Antenna	SBA 9113	Schwarzbeck	-
2009	Signal Generator	SMP 22	R&S	-
2029	Power Supply	PL330	Thurlby	-
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	-
2353	Receiver	ESIB26	R&S	-
2135	CDN	CDN 801-M3	Lüthi	-