

FCC ID PER PART 18

MEASUREMENT AND TEST REPORT

FOR

GOLDPOINT INT'T LIMITED

FLAT/RM, 11/F, RITZ PLAZA, 122 AUSTIN RD, TSIMSHATSUI, KL, HONG KONG

FCC ID: QRZGPL2013

November 26, 2002

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: ELECTRONIC BALLAST
Test Engineer: Davil Wang	
Report Number: RSZ02111501	
Test Date: November 15, 2002	
Reviewed By: Hans Mellberg – Engineering Manager	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: The test report is specially limited to the use of the above client company and the product model. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government

TABLE OF CONTENTS

1 - GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 OBJECTIVE	3
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	3
1.4 TEST METHODOLOGY	3
1.5 TEST FACILITY	3
1.6 TEST EQUIPMENT LIST AND DETAILS.....	4
1.7 EQUIPMENT UNDER TEST (EUT) GENERAL DESCRIPTION.....	4
2 - SYSTEM TEST CONFIGURATION.....	5
2.1 JUSTIFICATION	5
2.2 EUT EXERCISE PROGRAM.....	5
2.3 SCHEMATICS/BLOCK DIAGRAM	5
2.4 EQUIPMENT MODIFICATIONS.....	5
2.5 CONFIGURATION OF TEST SYSTEM.....	6
2.6 TEST SETUP BLOCK DIAGRAM	6
3 - CONDUCTED EMISSIONS TEST DATA.....	7
3.1 MEASUREMENT UNCERTAINTY	7
3.2 EUT SETUP	7
3.3 EMI RECEIVER SETUP	7
3.4 TEST PROCEDURE	8
3.5 SUMMARY OF TEST RESULTS.....	8
3.6 CONDUCTED EMISSIONS TEST DATA.....	8

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *GOLDPPOINT INT'T LIMITED*, *Model: BE-2013W* or the "EUT" as referred to in this report is an ELECTRONIC BALLAST.

Note: The test data collected are from a representative production sample provided by the manufacturer.

1.2 Objective

This Following test report is prepared on behalf of *GOLDPPOINT INT'T LIMITED* in accordance with Part 2, Subpart J, and Part 18, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC Part 18 limit requirements for Industrial, Scientific, and Medical Equipment.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with MP-5, FCC Methods of Measurements of Radio Noise Emissions from Industrial, Scientific, and Medical Equipment. All radiated and conducted emission measurements were performed at Bay Area Compliance Laboratory Corp. (BACL). The radiated testing was performed at an antenna-to-EUT distance of 3 Meters.

1.5 Test Facility

The Open Area Test site used by Sichuan BACL to collect radiated and conducted emission measurement data is located at Xinniao Sector, Wehou Blvd. Chengdu, Sichuan, P.R. China.

Test site at Sichuan Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2000 and FCC MP-5.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and listed under FCC as Test Firm Registration Number: 800513. The test site has been approved by the FCC and VCCI for public use and listed in the FCC Public Access Link (PAL) database.

Additionally Bay Area Compliance Laboratory Corporation (USA) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
R/S	Spectrum Analyzer	FSEM	849720/019	08/05/2003
HP	Receiver	PH8546A	A9704039	08/05/2003
HP	Amplifier	8447D	2944A09795	08/05/2003
ETS	Log Periodic Antenna	3146	9603-4421	09/05/2003
ETS	Biconical Antenna	3110B	3360	08/05/2003
Solar Electronics	LISN	TYPE 8012-50-R-24-BNC	21162	09/05/2003
Solar Electronics	LISN	TYPE 8012-50-R-25-BNC	21163	10/05/2003

1.7 Equipment under Test (EUT) General Description

Manufacturer	Description	Model	Serial Number	FCC ID
<i>GOLDPOINT INT'T LIMITED</i>	ELECTRONIC BALLAST	BE-2013W	None	QRZGPL2013

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT is configured for testing in a typical fashion (as normally used by a typical user).

2.2 EUT Exercise Program

The sequence used is as follows:

The EUT was switched on after being connected to the mains power supply.


2.3 Schematics/Block Diagram

The EUT's block diagram is presented in Appendix D.


2.4 Equipment Modifications

The EUT was a typical representative production sample with no modifications.

2.5 Configuration of Test System



2.6 Test Setup Block Diagram

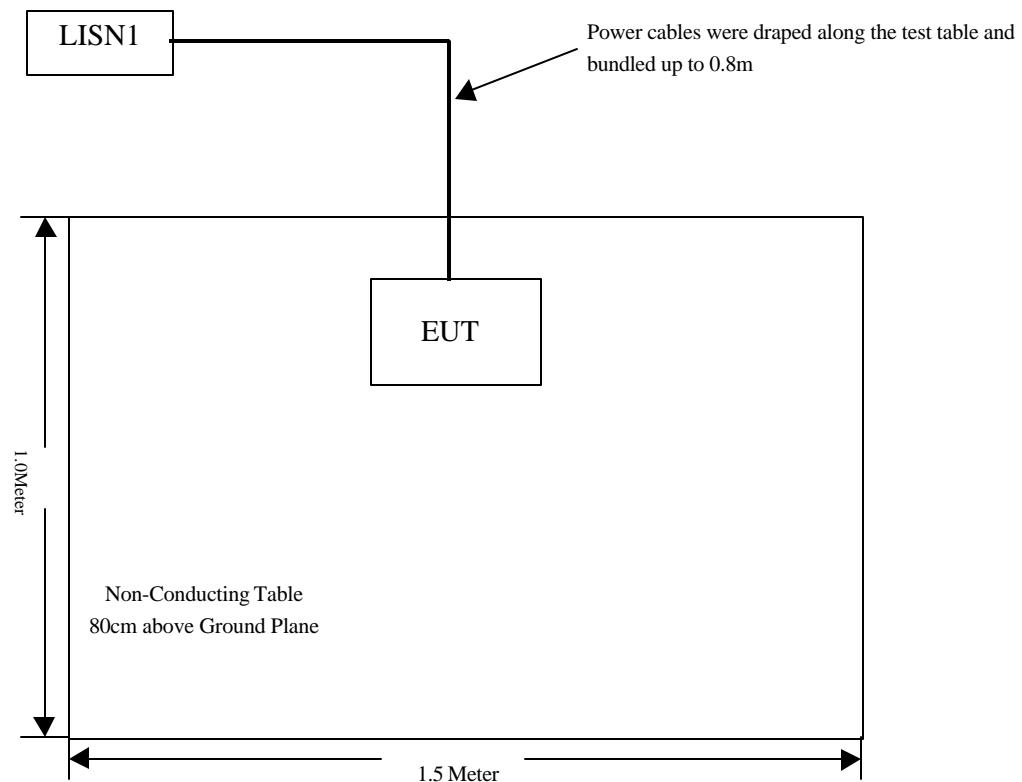

3 - CONDUCTED EMISSIONS TEST DATA

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, amplifier, calibration procedures, LISN etc.

Based on NIS 81, The Treatment of Uncertainty in EMI Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

3.2 EUT Setup

The measurement is performed at the **Open Area Test Site**, using the same setup per FCC MP-5 measurement procedure. The specification used was the FCC Part Subpart C 18 limits.

The EUT was placed on the center of the back edge on the test table.

The power cord extension of the EUT was connected with 120 Vac/60 Hz power source.

3.3 EMI Receiver Setup

The EMI receiver is configured during the conduction test is as follows:

Start Frequency	450 kHz
Stop Frequency	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Video Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode	Normal

3.4 Test Procedure

During the conducted emissions test, the power cord of the power cord extension was connected to the auxiliary outlet of the first LISN.

The six highest emissions were maximized to ensure the EUT is in compliance in all possible installation configurations.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB μ V of the specification limits). Quasi-peak readings are distinguished with a "Qp".

The EUT was tested under the normal modes during the final qualification test to represent the worst case results.

3.5 Summary of Test Results

According to the data in section 3.6, the EUT, was found to be in compliance with the FCC 18 Conducted margin for industry, scientific and medical devices, and with the worst margin reading of:

-2.8 dB μ V at 0.500 MHz at the Line mode, 0.45-30MHz.

3.6 Conducted Emissions Test Data

3.6.1 Conducted Test, 0.45-30MHz.

LINE CONDUCTED EMISSIONS				FCC PART 18	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB μ V	Qp/Ave/Peak	Line/Neutral	dB μ V	dB
0.500	45.2	Qp	Line	48	-2.8
0.49	45.1	Qp	Neutral	48	-2.9
0.586	44.0	Qp	Line	48	-4.0
0.587	43.0	Qp	Neutral	48	-5.0
22.486	34.9	Qp	Line	48	-13.1
22.7	34.5	Qp	Neutral	48	-13.5

3.6.2 Plot of Conducted Emissions Test Data

The plot(s) of conducted emission test is presented in the following page as reference.

702

START
450 kHzACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 500 kHz
47.41 dB μ VLast Hr
Key Men
SPANLOG REF 75.0 dB μ V10
dB/
ATN
10 dBWA SB
SC FS
CORR

PASS LIMIT

START 450 kHz

#IF BW 9.0 kHz

AVG BW 30 kHz

STOP 30.00 MHz
SWP 2.46 secMARKER
▼ CFMARKER
▲NEXT
PEAKNEXT PH
RIGHTNEXT PK
LEFTMore
1 of 6

69

START
450 kHzACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 490 kHz
46.20 dB μ VLast Hr
Key Men

SPAI

LOG REF 75.0 dB μ V10
dB/
ATTN
10 dB

PASS LIMIT

WA SB
SC FS
CORRSTART 450 kHz #IF BW 9.0 kHz AVG BW 30 kHz STOP 30.00 MHz SWP 2.46 sec More
1 of 6MARKER
↓ CI

MARKER

NEXT
PEAKNEXT PI
RIGHTNEXT PI
LEFTMore
1 of 6