

# TEST REPORT

Report No.: **BCTC2505258962E**

---

Applicant: **ZAGG Inc.**

---

Product Name: **pro keys 2**

---

Test Model: **ZKBP10GPK2B35**

---

Tested Date: **2025-05-19 to 2025-05-26**

---

Issued Date: **2025-06-03**

---

**Shenzhen BCTC Testing Co., Ltd.**



**FCC ID: QTG-ZKPIB109**

Product Name: pro keys 2  
Trademark: ZAGG  
Model/Type Reference: ZKBP10GPK2B35  
Prepared For: ZAGG Inc.  
Address: 910 West Legacy Center Way, Midvale, Utah 84047, USA.  
Manufacturer: ZAGG Inc.  
Address: 910 West Legacy Center Way, Midvale, Utah 84047, USA.  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2025-05-19  
Sample tested Date: 2025-05-19 to 2025-05-26  
Issue Date: 2025-06-03  
Report No.: BCTC2505258962E  
Test Standards FCC Part15.247  
ANSI C63.10-2013  
Test Results PASS  
Remark: This is Bluetooth BLE radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

Test Report Declaration	Page
1. Version .....	4
2. Test Summary .....	5
3. Measurement Uncertainty .....	6
4. Product Information And Test Setup .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	8
4.3 Support Equipment .....	8
4.4 Channel List .....	9
4.5 Test Mode .....	9
4.6 Copy of marking plate .....	9
5. Test Facility And Test Instrument Used .....	10
5.1 Test Facility .....	10
5.2 Test Instrument Used .....	10
6. Conducted emissions .....	12
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 EUT operating Conditions .....	12
6.5 Test Result .....	13
7. Radiated emissions .....	15
7.1 Block Diagram Of Test Setup .....	15
7.2 Limit .....	16
7.3 Test procedure .....	17
7.4 EUT operating Conditions .....	18
7.5 Test Result .....	18
8. EUT Photographs .....	21
9. EUT TEST SETUP Photographs .....	22

(Note: N/A Means Not Applicable)

## 1. Version

Report No.	Issue Date	Description	Approved
BCTC2505258962E	2025-06-03	Original	Valid

## 2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted emissions	15.207	PASS
2	Radiated Emissions	15.209	PASS

Remark: Based on the following changes in the product, the RF chip remains unchanged.  
So the report is only updated Conducted emissions and Radiated Emissions for the original report (BCTC2408536138E) .

Changes : 1. The new product has changed the appearance of the case, while the appearance of the material has changed.

2. Change model.

Original:



2. Model/Type reference, Test Instrument Used, the test result of Conducted Emission and Radiation Emission, EUT Photographs, EUT Test Setup Photographs.

Remark: Based on the following changes in the original test report (BCTC2408536138E), No changes were made to the product.

Only changes Model/Type reference, Test Instrument Used, the result of Conducted Emission and Radiated Emission, EUT Photographs, EUT Test Setup Photographs.

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

No.	Item	Uncertainty
1	humidity uncertainty	$U=5.3\%$
2	Temperature uncertainty	$U=0.59^{\circ}\text{C}$
3	Conducted Emission (150kHz-30MHz)	$U=3.2\text{dB}$
4	Radiated disturbance(30MHz-1000MHz)	$U=4.8\text{dB}$
5	Radiated disturbance(1GHz-6GHz)	$U=4.9\text{dB}$
6	Radiated disturbance(1GHz-18GHz)	$U=5.0\text{dB}$

CO.LTD

## 4. Product Information And Test Setup

### 4.1 Product Information

Model/Type reference: ZKBP10GPK2B35  
Model differences: N/A  
Bluetooth Version: 5.0  
Hardware Version: N/A  
Software Version: N/A  
Operation Frequency: 2402-2480MHz  
Type of Modulation: GFSK  
Number Of Channel 40CH  
Antenna installation: Internal antenna  
Antenna Gain: 0.05 dBi  
Remark:  
Antenna Gain:  The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.  
 The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.  
Ratings: DC 5V from adapter/DC 3.7V from battery

## 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

## 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Adapter	UGREEN	CD289	---	---
E-2	PC	Lenovo	ThinkPad E15 Gen2	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	DC cable unshielded

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


#### 4.4 Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442
02	2404	12	2424	22	2444
03	2406	13	2426	23	2446
~	~	~	~	~	~
09	2418	19	2438	39	2478
10	2420	20	2440	40	2480

#### 4.5 Test Mode

Test mode	Test mode	Low channel	Middle channel	High channel
1.		Charging+BT Link (conducted emission and Radiated emission)		
2.			BT Link(Radiated emission)	

#### 4.6 Copy of marking plate

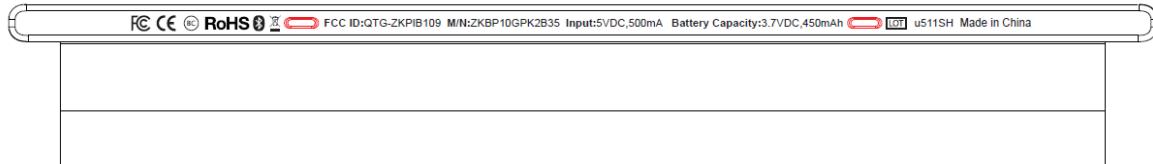

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used


Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR	102075	May 08, 2025	May 07, 2026
LISN	R&S	ENV216	101375	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 14, 2025	May 13, 2026

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR	102075	May 08, 2025	May 07, 2026
Receiver	R&S	ESRP	101154	May 14, 2025	May 13, 2026
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 14, 2025	May 13, 2026
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 14, 2025	May 13, 2026
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 14, 2025	May 13, 2026
Amplifier	SKET	LAPA_01G18 G-45dB	SK202104090 1	May 14, 2025	May 13, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 14, 2025	May 13, 2026
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 14, 2025	May 13, 2026
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 14, 2025	May 13, 2026
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	FA-03A2 RE	\	\



## 6. Conducted emissions

### 6.1 Block Diagram Of Test Setup

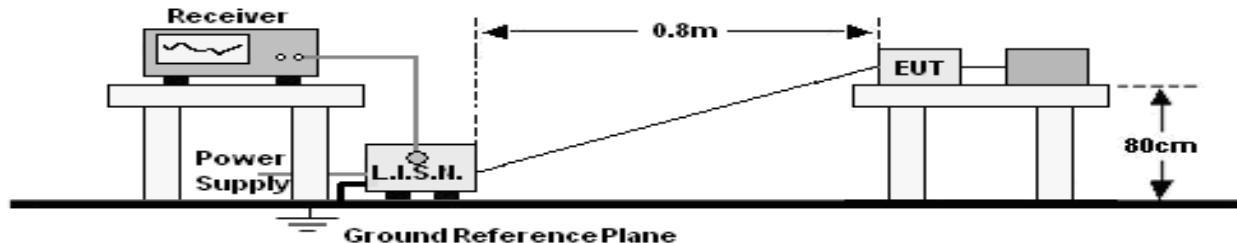

### 6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:  
1. \*Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

2017

### 6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 1	Polarization :	L

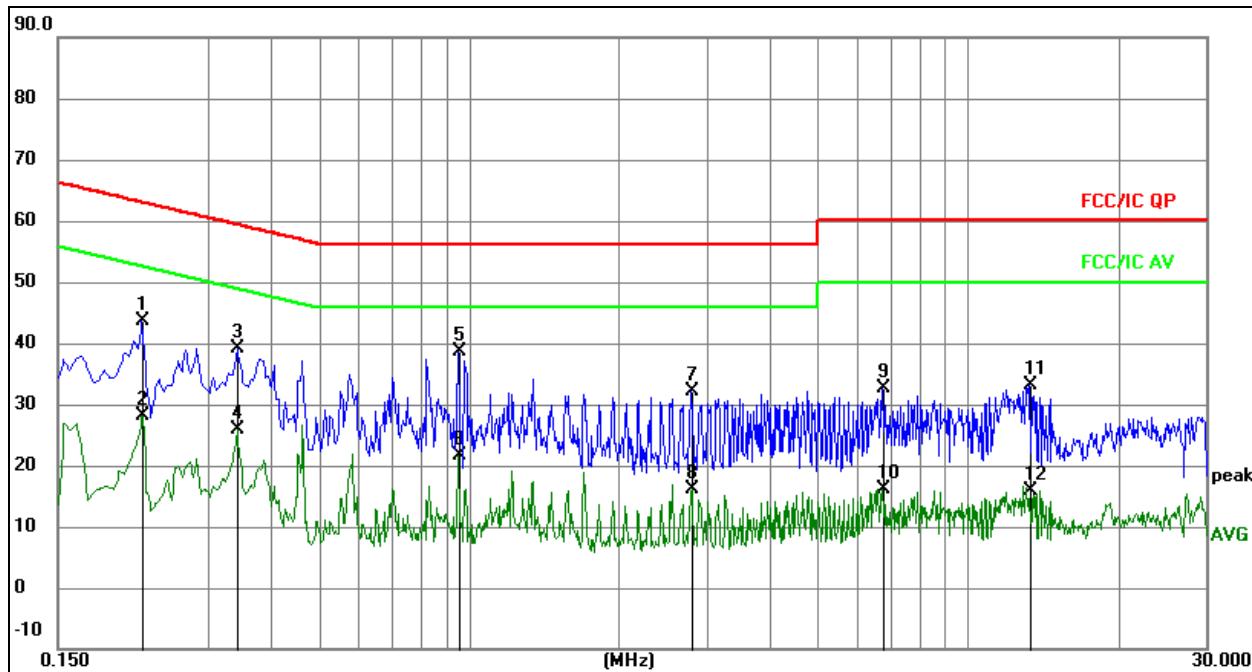


### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.2220	23.45	20.07	43.52	62.74	-19.22	QP
2		0.2220	8.10	20.07	28.17	52.74	-24.57	AVG
3		0.3435	18.99	20.07	39.06	59.12	-20.06	QP
4		0.3435	5.89	20.07	25.96	49.12	-23.16	AVG
5	*	0.9555	18.55	20.09	38.64	56.00	-17.36	QP
6		0.9555	1.54	20.09	21.63	46.00	-24.37	AVG
7		2.7825	12.00	20.12	32.12	56.00	-23.88	QP
8		2.7825	-4.00	20.12	16.12	46.00	-29.88	AVG
9		6.7335	12.53	20.16	32.69	60.00	-27.31	QP
10		6.7335	-3.96	20.16	16.20	50.00	-33.80	AVG
11		13.3035	12.91	20.26	33.17	60.00	-26.83	QP
12		13.3035	-4.31	20.26	15.95	50.00	-34.05	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 1	Polarization :	N

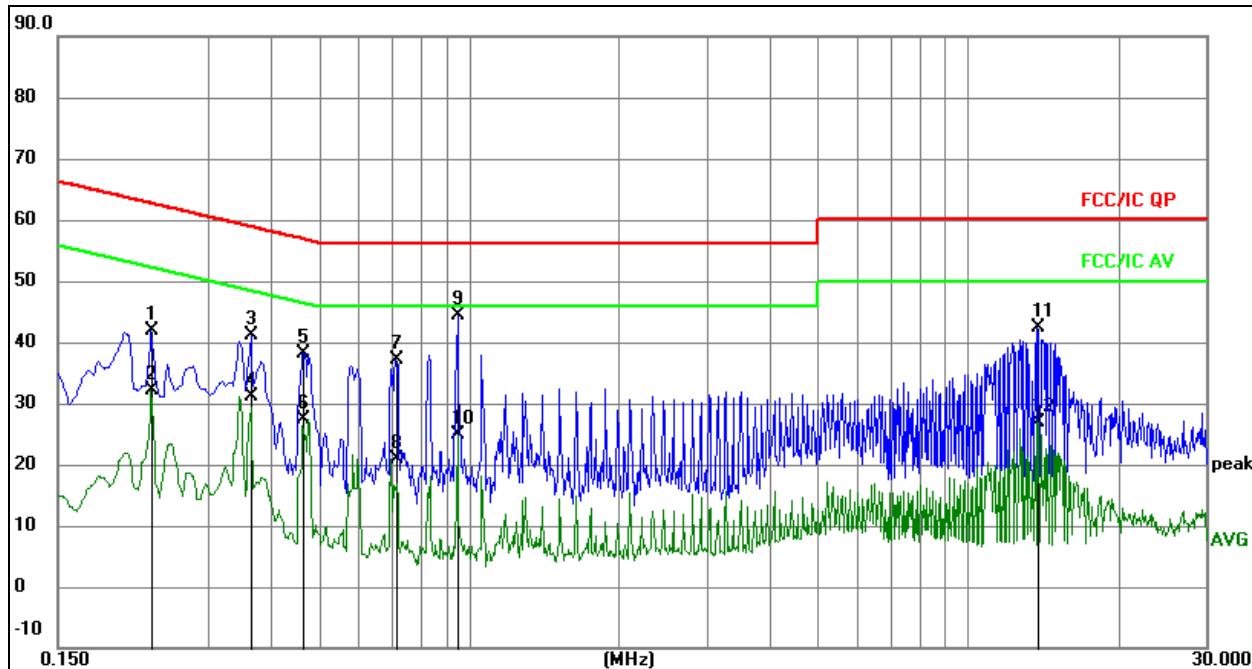
**Remark:**


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1		0.2304	21.73	20.07	41.80	62.44	-20.64 QP
2		0.2304	12.16	20.07	32.23	52.44	-20.21 AVG
3		0.3653	21.04	20.08	41.12	58.61	-17.49 QP
4		0.3653	10.96	20.08	31.04	48.61	-17.57 AVG
5		0.4637	18.07	20.08	38.15	56.63	-18.48 QP
6		0.4637	7.19	20.08	27.27	46.63	-19.36 AVG
7		0.7122	17.10	20.09	37.19	56.00	-18.81 QP
8		0.7122	0.83	20.09	20.92	46.00	-25.08 AVG
9 *		0.9481	24.20	20.09	44.29	56.00	-11.71 QP
10		0.9481	4.67	20.09	24.76	46.00	-21.24 AVG
11		13.7680	22.18	20.28	42.46	60.00	-17.54 QP
12		13.7680	6.55	20.28	26.83	50.00	-23.17 AVG


## 7. Radiated emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

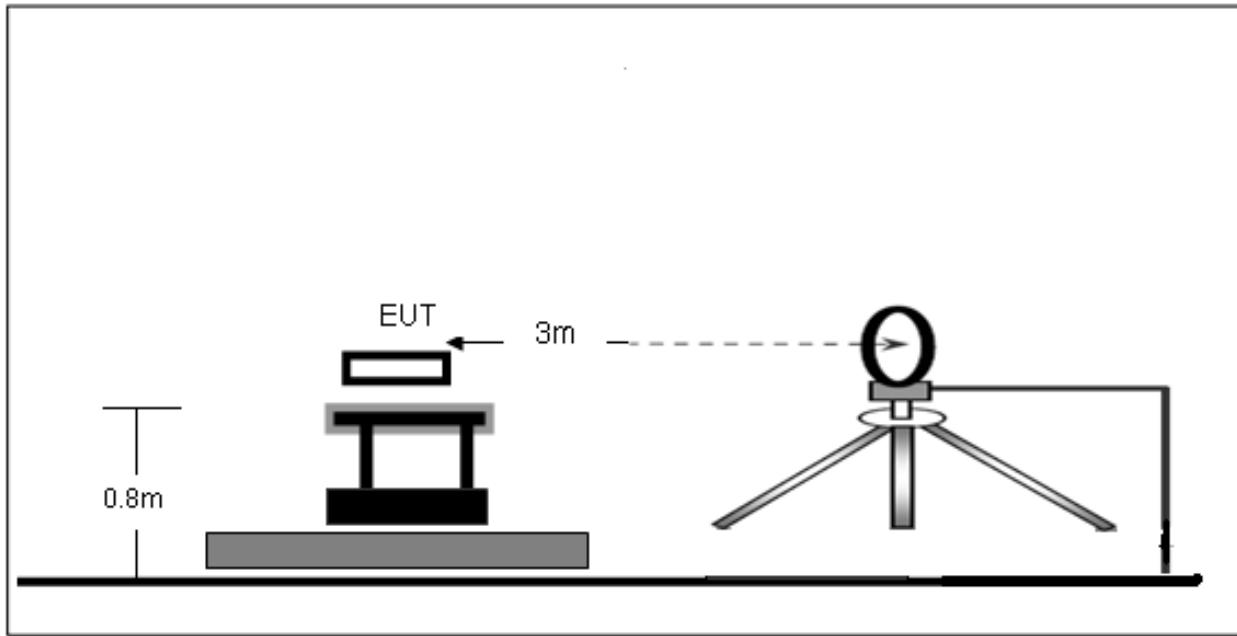

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

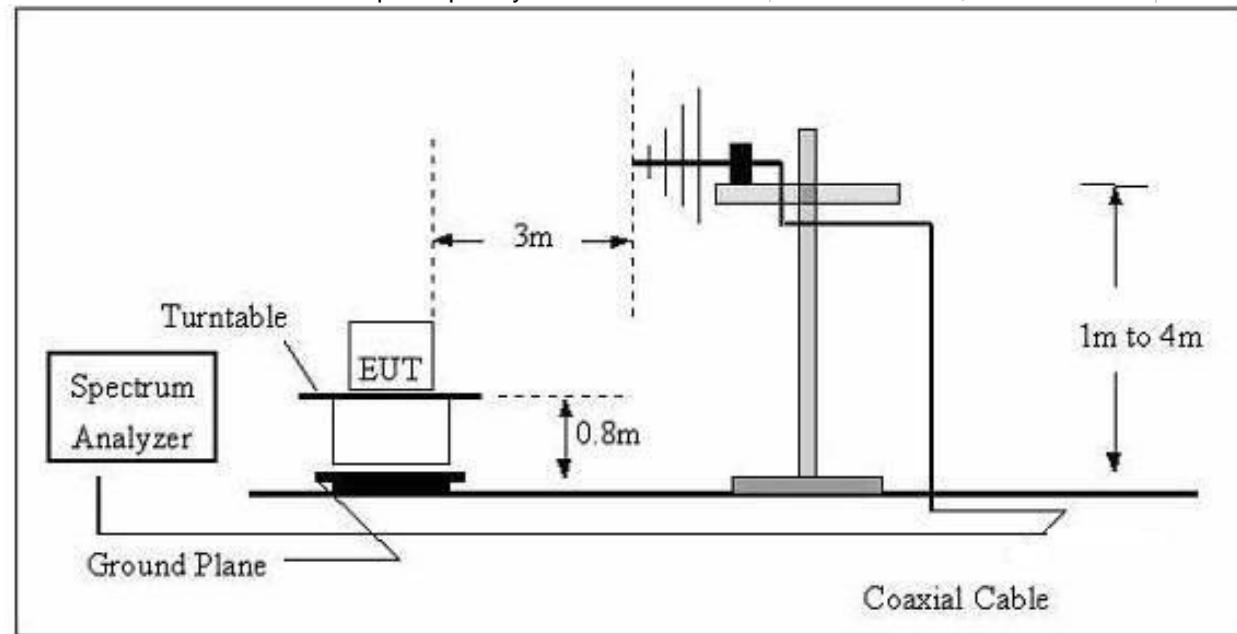

## (C) Radiated Emission Test-Up Frequency Above 1GHz

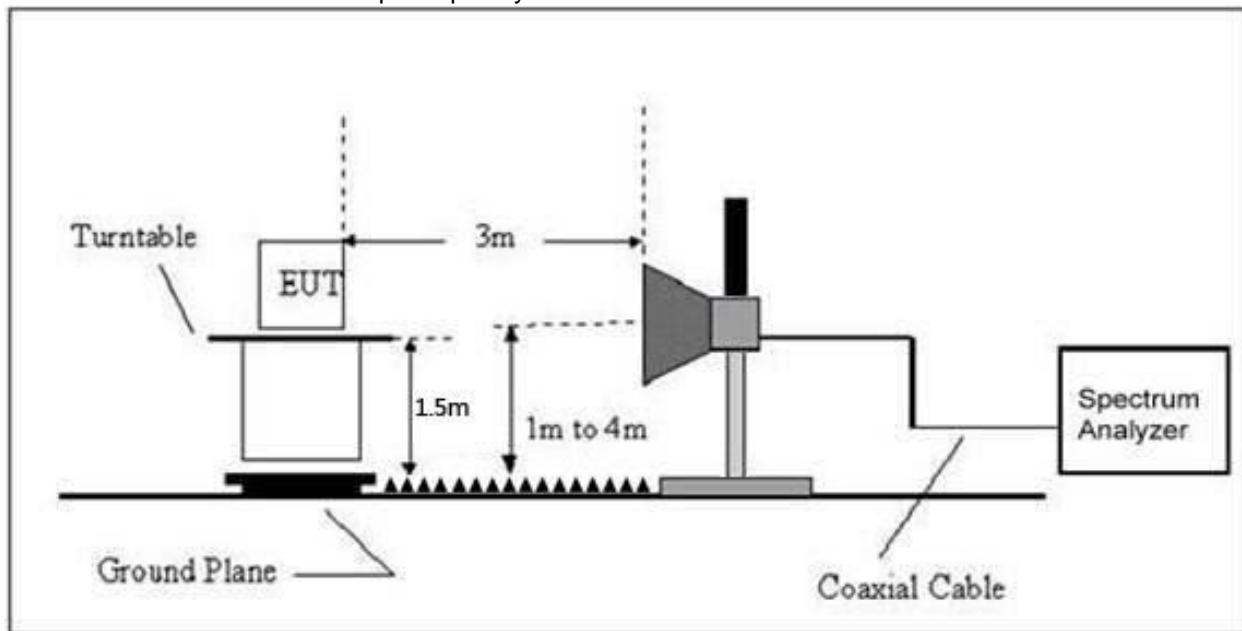

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)= $20\log$  Emission level (uV/m).

#### Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

#### 7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

## 7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

### Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 1	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
				P/F
--	--	--	--	PASS
--	--	--	--	PASS

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$  (dB),

Limit line = specific limits(dBuv) + distance extrapolation factor.


## Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 1	Test Voltage :	AC120V/60Hz

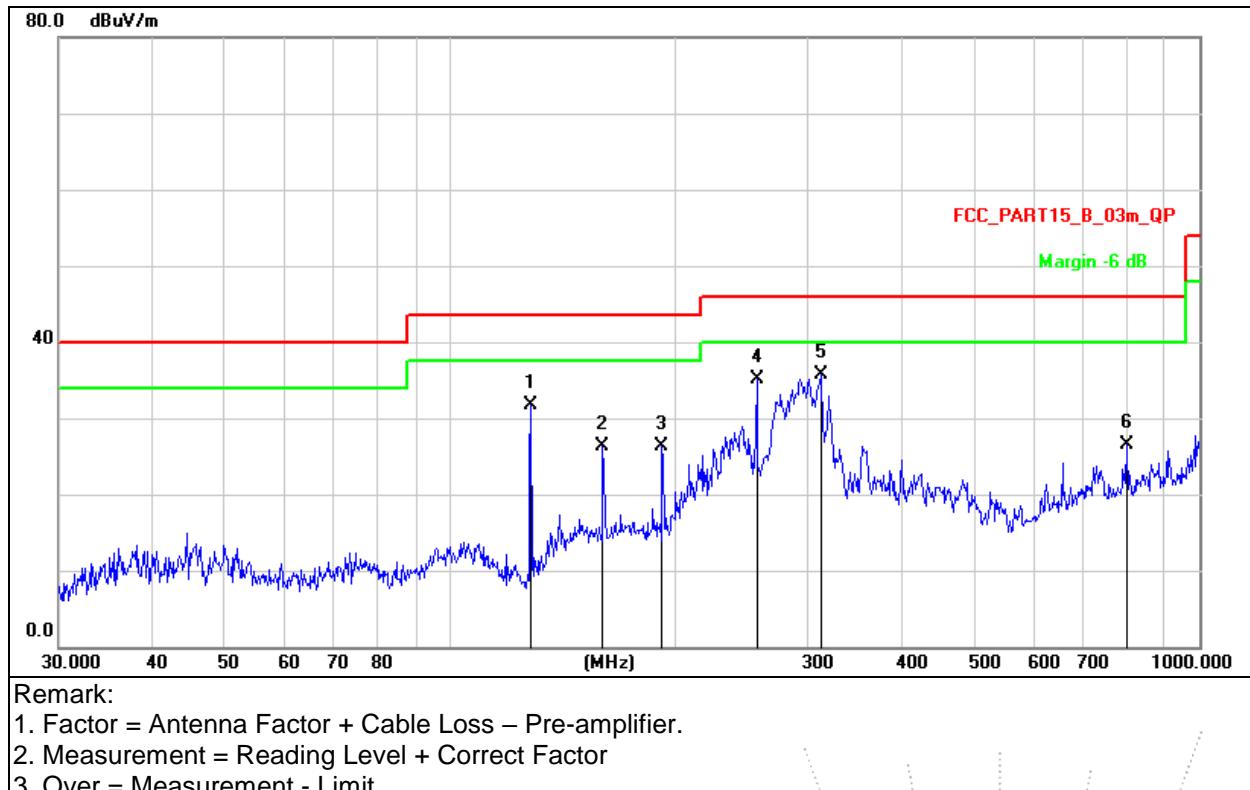

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	128.1130	49.66	-17.90	31.76	43.50	-11.74	QP	
2	159.7844	44.99	-18.70	26.29	43.50	-17.21	QP	
3	191.7450	42.56	-16.33	26.23	43.50	-17.27	QP	
4	256.5211	49.29	-14.15	35.14	46.00	-10.86	QP	
5 *	312.1794	48.53	-12.81	35.72	46.00	-10.28	QP	
6	798.9797	30.89	-4.41	26.48	46.00	-19.52	QP	

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 1	Test Voltage :	AC120V/60Hz

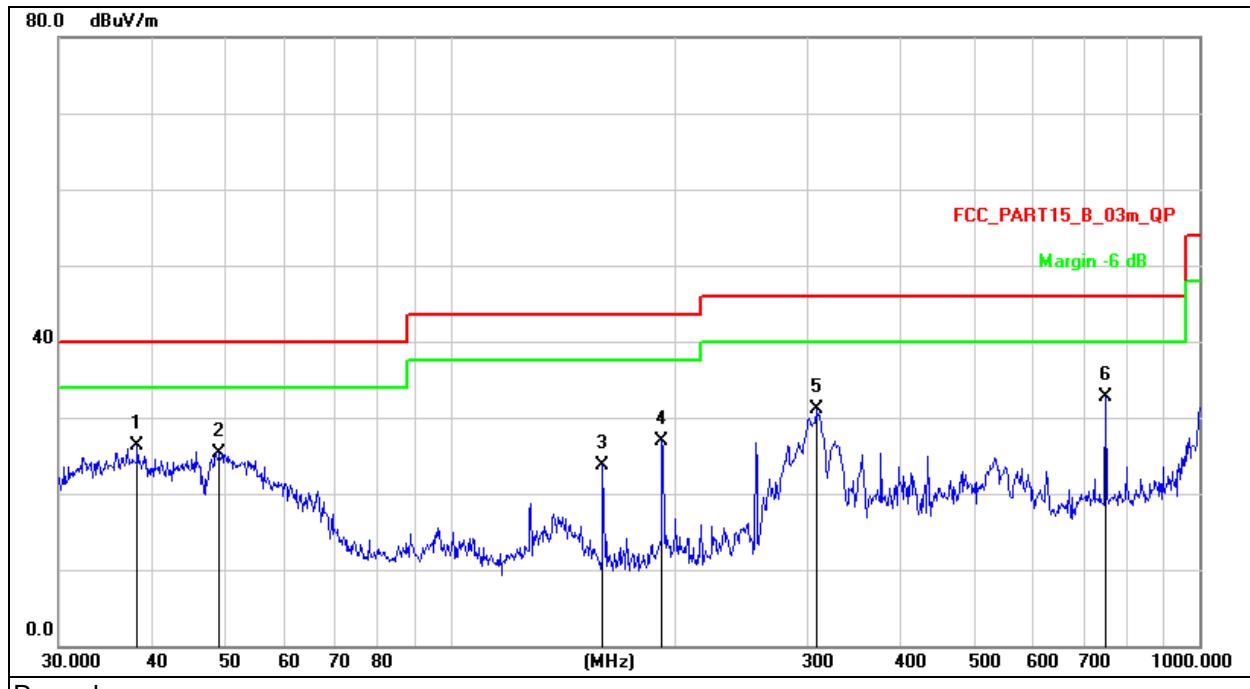

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	38.2120	41.47	-15.07	26.40	40.00	-13.60	QP	
2	49.1865	39.32	-13.97	25.35	40.00	-14.65	QP	
3	159.7844	42.50	-18.70	23.80	43.50	-19.70	QP	
4	191.7450	43.28	-16.33	26.95	43.50	-16.55	QP	
5	307.8313	44.14	-12.96	31.18	46.00	-14.82	QP	
6	* 750.1083	37.68	-4.99	32.69	46.00	-13.31	QP	

## 8. EUT Photographs

**EUT Photo 1**



**EUT Photo 2**




NOTE: Appendix-Photographs Of EUT Constructional Details.

## 9. EUT TEST SETUP Photographs

### Conducted Emissions Photo



### Radiated Measurement Photos

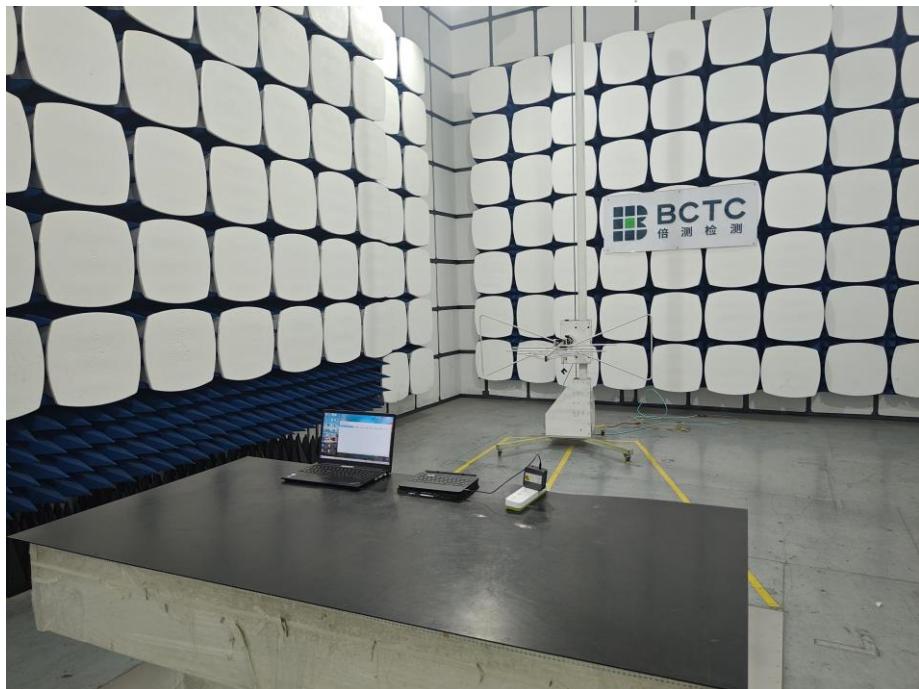

**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

Complaint/Advice E-mail: [advice@bctc-lab.com.cn](mailto:advice@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*

