

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-697_15.docx	Date of Report:	16-Sep-2010
Number of pages:	9	Customer's Contact person:	Mohammad El-Haj
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-697 / Battery BL-4U / AC-Charger AC-8E / Headset WH-102		
FCC ID:	QTKRM-697	IC:	
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Ruben Hansen, System Manager, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	31-Aug-2010
Testing completed	16-Sep-2010
The customer's contact person	09-Oct-10
Test Plan referred to	T:\Projects\RM-697\TestPlan\RS_testplan_RM-697 EMC FCC SAR.xls
Notes	-
Document name	T:\Projects\RM-697\EMC\FCC15B_RM-697_15.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/VIII) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and WLAN and Bluetooth.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-697	004402/13/108361/4	2200	-	0.0.109	24092
Battery	BL-4U	4955400203010405902;0670560	-	-	-	24084
AC-Charger	AC-8E	4868670162510602628;0675387	-	-	-	24078
Headset	WH-102	0694323022523104246	-	-	-	24079

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in ICES-003 (RSS-139)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15B Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions	
(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)	4
2.2. Test method and limit	4
2.3. WLAN Test results	6
3. Test Equipment	8
3.1. Conducted measurements	8
3.2. Radiated measurements	8

2. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)

EUT with DUT number	RM-697, DUT 24092
Accessories with DUT numbers	BL-4U, DUT 24084 ; AC-8E, DUT 24078 ; WH-102, DUT 24079
Operation Voltage [V] / [Hz]	115V / 60Hz
Results	PASSED
Remarks	GPS Receiver was active logging position during test
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 41 / 998
Date of measurements	16-Sep-2010
Measured by	Ruben Hansen

2.1.1 Test Setup

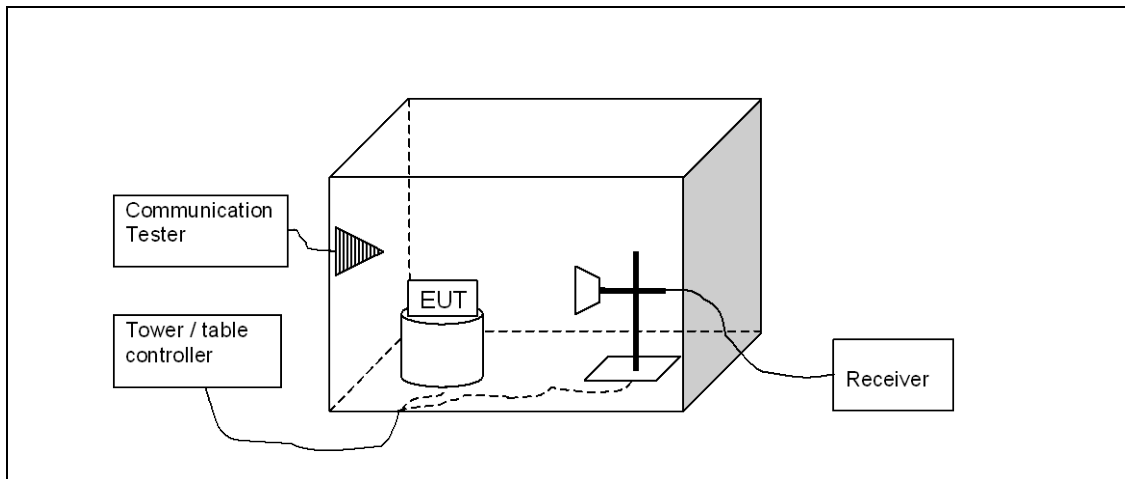

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

2.3. WLAN Test results

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.8	41.32	116.439	39.77	1.55	VERTICAL	PASSED
7234.3	49.06	283.857	39.05	10.01	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.8	28.22	25.775	26.67	1.55	VERTICAL	PASSED
7234.3	36.21	64.625	26.2	10.01	VERTICAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
72.934	19.79	9.766	39.49	-19.7	VERTICAL	PASSED
73.598	19.85	9.833	39.46	-19.61	VERTICAL	PASSED
73.666	19.86	9.844	39.46	-19.6	VERTICAL	PASSED
73.668	20.09	10.106	39.69	-19.6	VERTICAL	PASSED
73.676	19.9	9.88	39.5	-19.6	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1078.857	32.06	40.082	42.17	-10.11	VERTICAL	PASSED
10860.725	57.31	733.838	39.41	17.9	HORIZONTAL	PASSED
10923.95	57.04	711.295	38.8	18.24	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1078.857	19.45	9.381	29.56	-10.11	VERTICAL	PASSED
10860.725	44.04	159.203	26.14	17.9	HORIZONTAL	PASSED
10923.95	44.19	161.976	25.95	18.24	VERTICAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
-----------------	------------	----------	------------------------	-----------------------	--------------	--------

4925.4	42.52	133.66	40.13	2.39	HORIZONTAL	PASSED
7386.6	49.91	312.824	37.93	11.98	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4925.4	29.55	30.026	27.16	2.39	HORIZONTAL	PASSED
7386.6	37.37	73.858	25.39	11.98	VERTICAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
1999	Receiver	EMI Test Receiver 20Hz-26,5GHz ESI	Rohde&Schwarz	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B