




SAR Compliance Test Report

Test report no.:	Oulu_SAR_0504_01	Date of report:	2005-01-26
Template version:	2	Number of pages:	36
Testing laboratory:	TCC Nokia, Oulu Yrtipellontie 6 P.O. Box 300 FIN-90401 OULU Tel. +358-7180-08000 Fax. +358-7180-47222	Client:	Nokia Danmark A/S Fredrikskaj DK-1790 Copenhagen V Denmark Tel. +45-33-292929 Fax. +45-33-292934
Responsible test engineer:	Kai Niskala	Product contact person:	Emery Stefan
Measurements made by:	Kai Niskala		
Tested device:	RM-72		
FCC ID:	QTKRM-72	IC:	611AD-RM72
Supplement reports:			
Testing has been carried out in accordance with:	<p>47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices</p> <p>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</p> <p>RSS-102 Evaluation Procedure for Mobile and Portable Radio Transmitters with Respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields</p> <p>IEEE 1528 - 2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p>		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Oulu		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Date and signatures:	<p>2005-01-26</p>  <p>Kai Niskala</p>		
For the contents:	<p>Laboratory Engineer</p>		



CONTENTS

1. SUMMARY OF SAR TEST REPORT	3
1.1 TEST DETAILS	3
1.2 MAXIMUM RESULTS	3
1.2.1 <i>Head Configuration</i>	3
1.2.2 <i>Body Worn Configuration</i>	3
1.2.3 <i>Maximum Drift</i>	3
1.2.4 <i>Measurement Uncertainty</i>	3
2. DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 PICTURE OF THE DEVICE	4
2.2 DESCRIPTION OF THE ANTENNA	5
3. TEST CONDITIONS	5
3.1 TEMPERATURE AND HUMIDITY	5
3.2 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER	5
4. DESCRIPTION OF THE TEST EQUIPMENT	5
4.1 MEASUREMENT SYSTEM AND COMPONENTS	5
4.1.1 <i>Isotropic E-field Probe ET3DV6</i>	6
4.2 PHANTOMS	7
4.3 SIMULATING LIQUIDS	7
4.3.1 <i>Liquid Recipes</i>	8
4.3.2 <i>Verification of the System</i>	8
4.3.3 <i>Tissue Simulants used in the Measurements</i>	9
5. DESCRIPTION OF THE TEST PROCEDURE	9
5.1 DEVICE HOLDER	9
5.2 TEST POSITIONS	10
5.2.1 <i>Against Phantom Head</i>	10
5.2.2 <i>Body Worn Configuration</i>	10
5.3 SCAN PROCEDURES	11
5.4 SAR AVERAGING METHODS	11
6. MEASUREMENT UNCERTAINTY	12
7. RESULTS	13
APPENDIX A: VALIDATION SCANS	14
APPENDIX B: MEASUREMENT SCANS	19
APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)	29
APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)	33



1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Period of test	2005-01-18 to 2005-01-20
SN, HW and SW numbers of tested device	SN: 355386/00/000014/5, DUT# 28787 HW: 0400, SW: 03.06
Batteries used in testing	BL-5C DUT's: 30244,30245, 30246
Headsets used in testing	HDS-3 DUT:28786
Other accessories used in testing	MMC card DUT:30128
State of sample	Prototype Unit
Notes	

1.2 Maximum Results

The maximum measured SAR values for Head configuration and Body Worn configuration are given in section 1.2.1 and 1.2.2 respectively. The device conforms to the requirements of the standard(s) when the maximum measured SAR value is less than or equal to the limit.

1.2.1 Head Configuration

Mode	Ch / f(MHz)	EIRP	Position	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
2-SLOT GPRS 1900	512 / 1850.2	28.44 dBm	Left Tilt	1.6 W/kg	0.81 W/kg	PASSED

1.2.2 Body Worn Configuration

Mode	Ch / f(MHz)	EIRP	Separation distance	SAR limit (1g avg)	Measured SAR value (1g avg)	Result
2-SLOT GPRS 1900	512 / 1850.2	28.44 dBm	1.5	1.6 W/kg	0.62 W/kg	PASSED

1.2.3 Maximum Drift

Maximum drift during measurements	-0.3 dB
-----------------------------------	---------

1.2.4 Measurement Uncertainty

Extended Uncertainty (k=2) 95%	± 29.8 %
--------------------------------	----------



T117 (EN ISO/IEC 17025)

2. DESCRIPTION OF THE DEVICE UNDER TEST

Device category	portable
Exposure environment	general population/uncontrolled

Modes and Bands of Operation	GSM 1900	GPRS 1900	EGPRS 1900	BT
Modulation Mode	GMSK	GMSK	8PSK	GFSK
Duty Cycle	1/8	1/8 or 2/8	1/8 or 2/8	
Transmitter Frequency Range (MHz)	1850.2 - 1909.8	1850.2-1909.8	1850.2-1909.8	2402.0 – 2480

This device has Push-to-Talk/Voice-over-IP capability for use at the ear. Therefore, SAR for 2-slot GPRS mode was also evaluated against the head profile of the phantom.

Outside of USA and Canada, the transmitter is capable of operating also in GSM900 and GSM1800, which are not part of this filing.

2.1 Picture of the Device





T117 (EN ISO/IEC 17025)

2.2 Description of the Antenna

The device has an internal patch antenna.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Period of measurement:	2005-01-18 to 2005-01-20
Ambient temperature (°C):	22.2 to 24.0
Ambient humidity (RH %):	32 to 45

3.2 Test Signal, Frequencies, and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The power output was measured by a separate test laboratory on the same unit as used for SAR testing.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY 4 software version 4.4, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements on the device was the 'worst-case extrapolation' algorithm.



The following table lists calibration dates of SPEAG components:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
DAE3	555	12 months	02/05
E-field Probe ET3DV6	1765	12 months	02/05
Dipole Validation kit, D1900V2	5d030	24 months	04/05

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration interval	Calibration expiry
Signal Generator	HP 8657B	3630U08114	12 months	06/05
Amplifier	Amplifier Research 5S1G4	306024	-	-
Power Meter	R&S NRT	101143	12 months	04/05
Power Sensor	R&S NRT-Z43	100239	12 months	04/05
Thermometer	Fluke 51 II	84350048	12 months	06/05
Dielectric Probe Kit	Agilent 85070D	US01440162	-	-
Radio Communication Tester	CMU 200	100084	12 months	03/05
Radio Communication Tester	CMU 200	106354	12 months	10/05

4.1.1 Isotropic E-field Probe ET3DV6

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)



Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm
Application	Distance from probe tip to dipole centers: mm General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

The phantom used for all tests i.e. for both validation testing and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2003.

Validation tests were performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.3 Simulating Liquids

Recommended values for the dielectric parameters of the simulating liquids are given in IEEE 1528 - 2003 and FCC Supplement C to OET Bulletin 65. All tests were carried out using liquids whose dielectric parameters were within ± 5% of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the liquid was 15.0 ± 0.5 cm measured from the ear reference point during validation and device measurements.



T117 (EN ISO/IEC 17025)

4.3.1 Liquid Recipes

The following recipes were used for Head and Body liquids:

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Deionised Water	54.88	69.02
Butyl Diglycol	44.91	30.76
Salt	0.21	0.22

4.3.2 Verification of the System

The manufacturer calibrates the probes annually. Dielectric parameters of the simulating liquids were measured every day using the dielectric probe kit and the network analyser. A SAR measurement was made following the determination of the dielectric parameters of the liquids, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The validation results (dielectric parameters and SAR values) are given in the table below.

System verification, head tissue simulant

f[MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1900	Reference result	10.5	38.8	1.44	N/A
	$\pm 10\%$ window	9.45 - 11.55			
	2005-01-18	10.3	38.2	1.44	21.5

System verification, body tissue simulant

f[MHz]	Description	SAR [W/kg], 1g	Dielectric Parameters		Temp [°C]
			ϵ_r	σ [S/m]	
1900	Reference result	10.7	51.2	1.59	N/A
	$\pm 10\%$ window	9.63 - 11.77			
	2005-01-20	10.7	51.5	1.58	21.7

Plots of the Verification scans are given in Appendix A.



4.3.3 Tissue Simulants used in the Measurements

Head tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	40.0	1.40	22
	± 5% window	38.0 - 42.0	1.33 - 1.47	
	2005-01-18	38.3	1.42	22

Body tissue simulant measurements

f [MHz]	Description	Dielectric Parameters		Temp [°C]
		ϵ_r	σ [S/m]	
1880	Recommended value	53.3	1.52	22
	± 5% window	50.6 - 56.0	1.44 - 1.60	
	2005-01-20	51.6	1.56	22

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

A Nokia designed spacer (illustrated below) was used to position the device within the SPEAG holder. The spacer positions the device so that the holder has minimal effect on the test results but still holds the device securely. The spacer was removed before the tests.



Nokia spacer

5.2 Test Positions

5.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".



Photo of the device in “cheek” position



Photo of the device in “tilt” position

5.2.2 Body Worn Configuration

The device was placed in the SPEAG holder using the Nokia spacer and placed below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance indicated in the photo below using a separate flat spacer that was removed before the start of the measurements. The device was oriented with its antenna facing the phantom since this orientation gives higher results.



T117 (EN ISO/IEC 17025)



Photo of the device positioned for Body SAR measurement. The spacer was removed for the tests.

5.3 Scan Procedures

First coarse scans were used for determination of the field distribution. Next a cube scan, 5x5x7 points covering a volume of 30x30x30 mm was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the coarse scan and again at the end of the cube scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy4 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the cube scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the cube scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.



6. MEASUREMENT UNCERTAINTY

Table 6.1 – Measurement uncertainty evaluation

Uncertainty Component	Section in IEEE 1528	Tol. (%)	Prob Dist	Div	c_i	$c_i \cdot u_i$ (%)	v_i
Measurement System							
Probe Calibration	E2.1	± 5.8	N	1	1	± 5.8	∞
Axial Isotropy	E2.2	± 4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Hemispherical Isotropy	E2.2	± 9.6	R	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary Effect	E2.3	± 8.3	R	$\sqrt{3}$	1	± 4.8	∞
Linearity	E2.4	± 4.7	R	$\sqrt{3}$	1	± 2.7	∞
System Detection Limits	E2.5	± 1.0	R	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	E2.6	± 1.0	N	1	1	± 1.0	∞
Response Time	E2.7	± 0.8	R	$\sqrt{3}$	1	± 0.5	∞
Integration Time	E2.8	± 2.6	R	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Conditions - Noise	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
RF Ambient Conditions - Reflections	E6.1	± 3.0	R	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	± 0.4	R	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	± 2.9	R	$\sqrt{3}$	1	± 1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	± 3.9	R	$\sqrt{3}$	1	± 2.3	∞
Test sample Related							
Test Sample Positioning	E4.2.1	± 6.0	N	1	1	± 6.0	11
Device Holder Uncertainty	E4.1.1	± 5.0	N	1	1	± 5.0	7
Output Power Variation - SAR drift measurement	6.6.3	± 10.0	R	$\sqrt{3}$	1	± 5.8	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	± 4.0	R	$\sqrt{3}$	1	± 2.3	∞
Liquid Conductivity Target - tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.64	± 1.8	∞
Liquid Conductivity - measurement uncertainty	E3.3	± 5.5	N	1	0.64	± 3.5	5
Liquid Permittivity Target tolerance	E3.2	± 5.0	R	$\sqrt{3}$	0.6	± 1.7	∞
Liquid Permittivity - measurement uncertainty	E3.3	± 2.9	N	1	0.6	± 1.7	5
Combined Standard Uncertainty				RSS		± 14.9	206
Coverage Factor for 95%				k=2			
Expanded Standard Uncertainty						± 29.8	



T117 (EN ISO/IEC 17025)

7. RESULTS

The measured Head SAR values for the test device are tabulated below:

2-slot GPRS 1900 Head SAR results

Position	SAR, averaged over 1g (W/kg)		
	Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
2-slot GPRS 1900 EIRP	28.44 dBm	27.52 dBm	27.01 dBm
Left	Cheek	0.58	
	Tilt	0.81	0.78
Right	Cheek	0.57	
	Tilt	0.77	
Left tilt, BT active	0.80		
Left tilt without MMC card	0.79		
GSM 1900 EIRP	31.10 dBm	29.60 dBm	28.90 dBm
Left tilt	0.72		
2-slot EGPRS 1900 EIRP	29.95 dBm	29.0 dBm	28.44 dBm
Left tilt	0.54		

2-slot GPRS 1900 Body SAR results

Body-worn location setup	SAR, averaged over 1g (W/kg)		
	Ch 512 1850.2 MHz	Ch 661 1880.0 MHz	Ch 810 1909.8 MHz
2-slot GPRS 1900 EIRP	28.44 dBm	27.52 dBm	27.01 dBm
Without headset	0.62	0.55	0.45
Headset HDS-3	0.59	0.53	0.44
Without headset without MMC card	0.61		
Without headset with BT active	0.62		
GSM 1900 EIRP	31.10 dBm	29.60 dBm	28.90 dBm
Without headset	0.55		
2-slot EGPRS 1900 EIRP	29.95 dBm	29.0 dBm	28.44 dBm
Without headset	0.40		

Plots of the Measurement scans are given in Appendix B.



T117 (EN ISO/IEC 17025)

APPENDIX A: VALIDATION SCANS



T117 (EN ISO/IEC 17025)

Date/Time: 01/18/05 09:02:09

Test Laboratory: TCC Oulu

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN:5d030

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.24, 5.24, 5.24); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW, t=21.5 C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm**Info: Interpolated medium parameters used for SAR evaluation!**

Maximum value of SAR (interpolated) = 12.6 mW/g


d=10mm, Pin=250mW, t=21.5 C/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.8 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.37 mW/g**Info: Interpolated medium parameters used for SAR evaluation!**

Maximum value of SAR (measured) = 11.5 mW/g

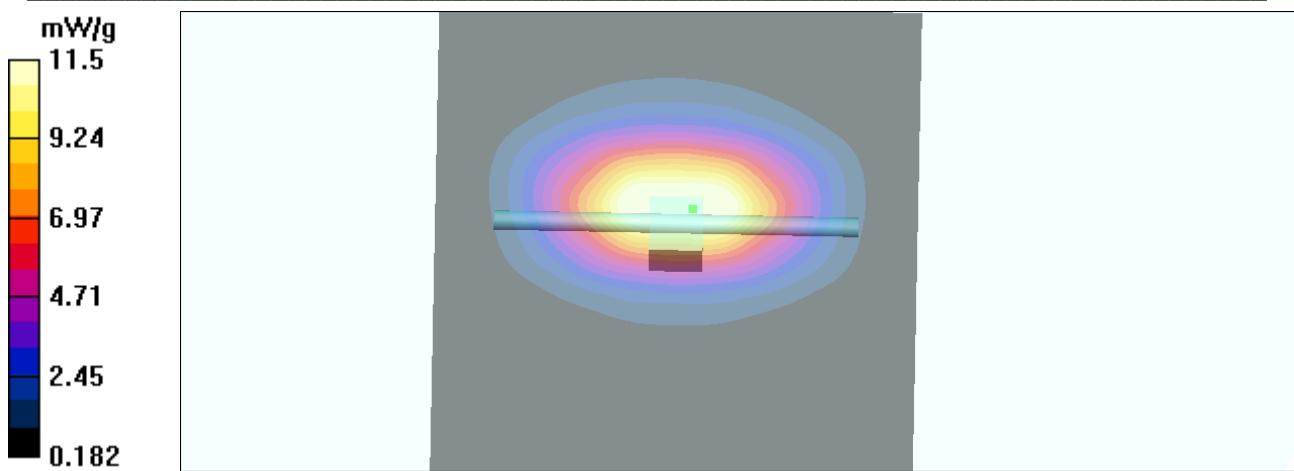



T117 (EN ISO/IEC 17025)

Date/Time: 01/20/05 09:32:49

Test Laboratory: TCC Oulu

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN:5d030

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: BSL1900 Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(4.59, 4.59, 4.59); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

d=10mm, Pin=250mW, t=21.7 C/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm**Info: Interpolated medium parameters used for SAR evaluation!**

Maximum value of SAR (interpolated) = 13.7 mW/g

d=10mm, Pin=250mW, t=21.7 C/Zoom Scan (7x7x7) (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.3 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.67 mW/g**Info: Interpolated medium parameters used for SAR evaluation!**


Maximum value of SAR (measured) = 12.3 mW/g

TCC

Nokia



T117 (EN ISO/IEC 17025)

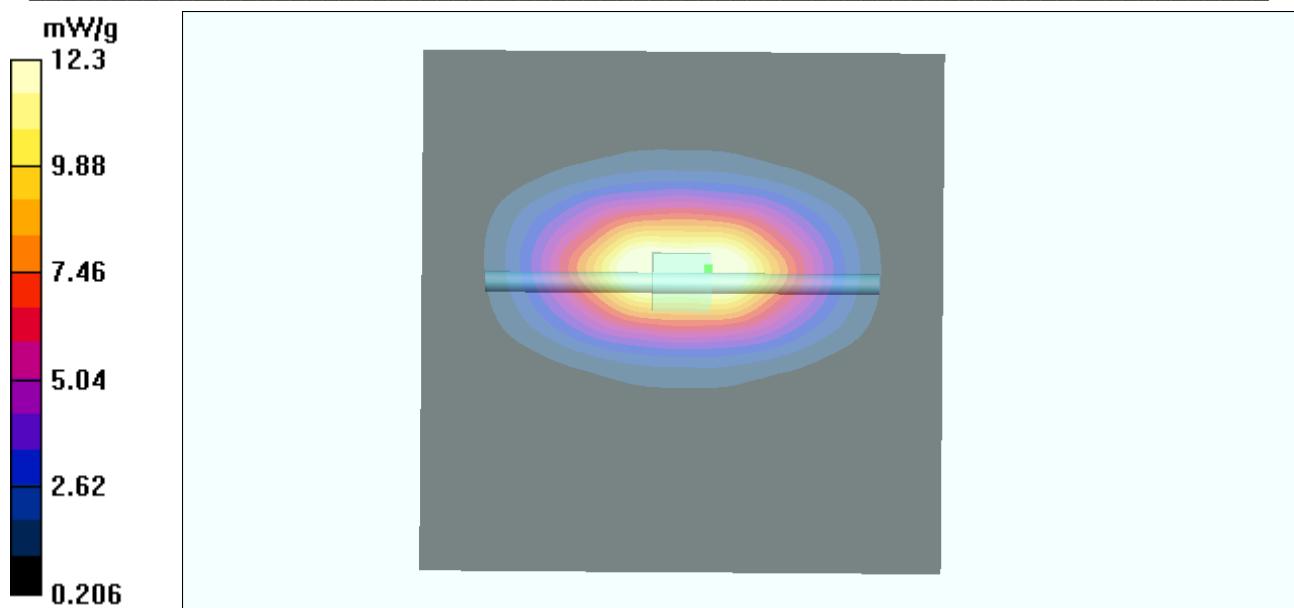

SAR Report
Oulu_SAR_0504_01
Applicant: Nokia Corporation

Type: RM-72

Copyright © 2005 TCC Nokia



T117 (EN ISO/IEC 17025)

APPENDIX B: MEASUREMENT SCANS



T117 (EN ISO/IEC 17025)

Date/Time: 01/18/05 09:31:22

Test Laboratory: TCC Oulu

TYPE: RM-72; Serial: 355386/00/000014/5; with MMC card

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Touch position - Middle, t=21.5 C, worst case extrapolation/Area Scan (61x91x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.662 mW/g

Touch position - Middle, t=21.5 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.577 mW/g


Touch position - Middle, t=21.5 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.577 mW/g; SAR(10 g) = 0.305 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

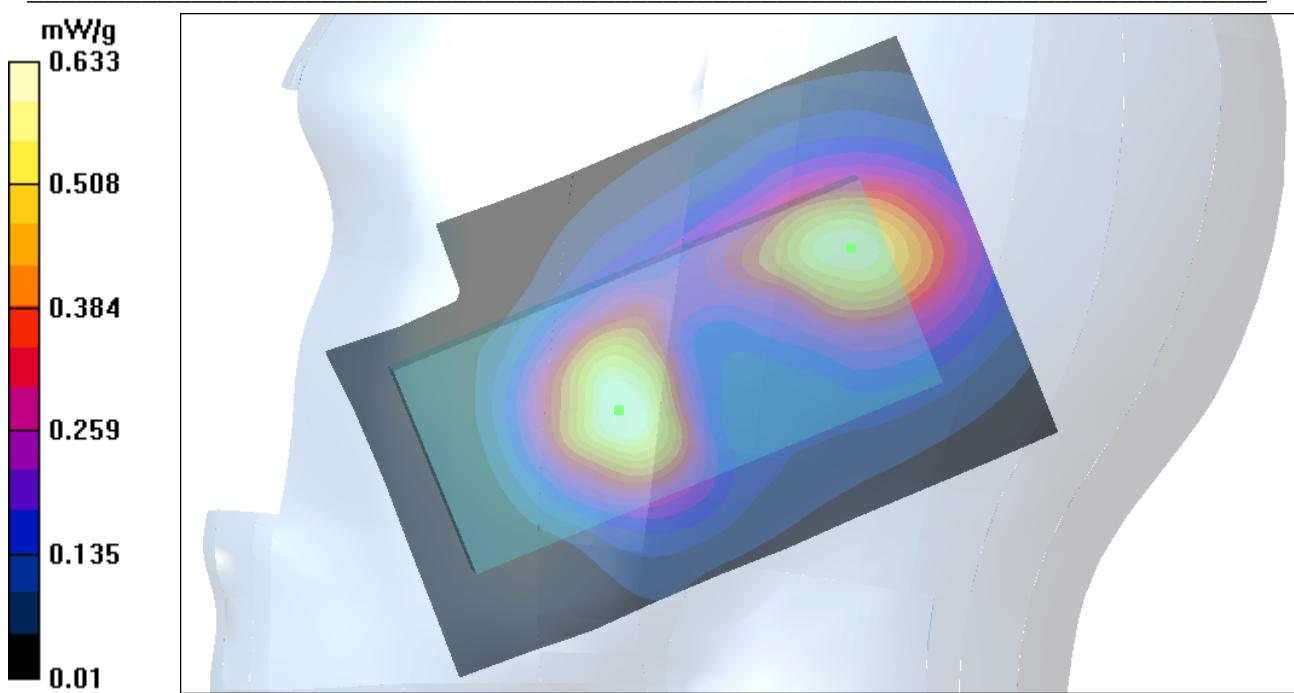



T117 (EN ISO/IEC 17025)

Date/Time: 01/18/05 11:55:46

Test Laboratory: TCC Oulu

TYPE: RM-72; Serial: 355386/00/000014/5; with MMC card

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Low, t=21.5 C, worst case extrapolation/Area Scan (61x91x1):

Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.915 mW/g


Tilt position - Low, t=21.5 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.811 mW/g; SAR(10 g) = 0.419 mW/g**Info: Interpolated medium parameters used for SAR evaluation!**

Maximum value of SAR (measured) = 0.882 mW/g

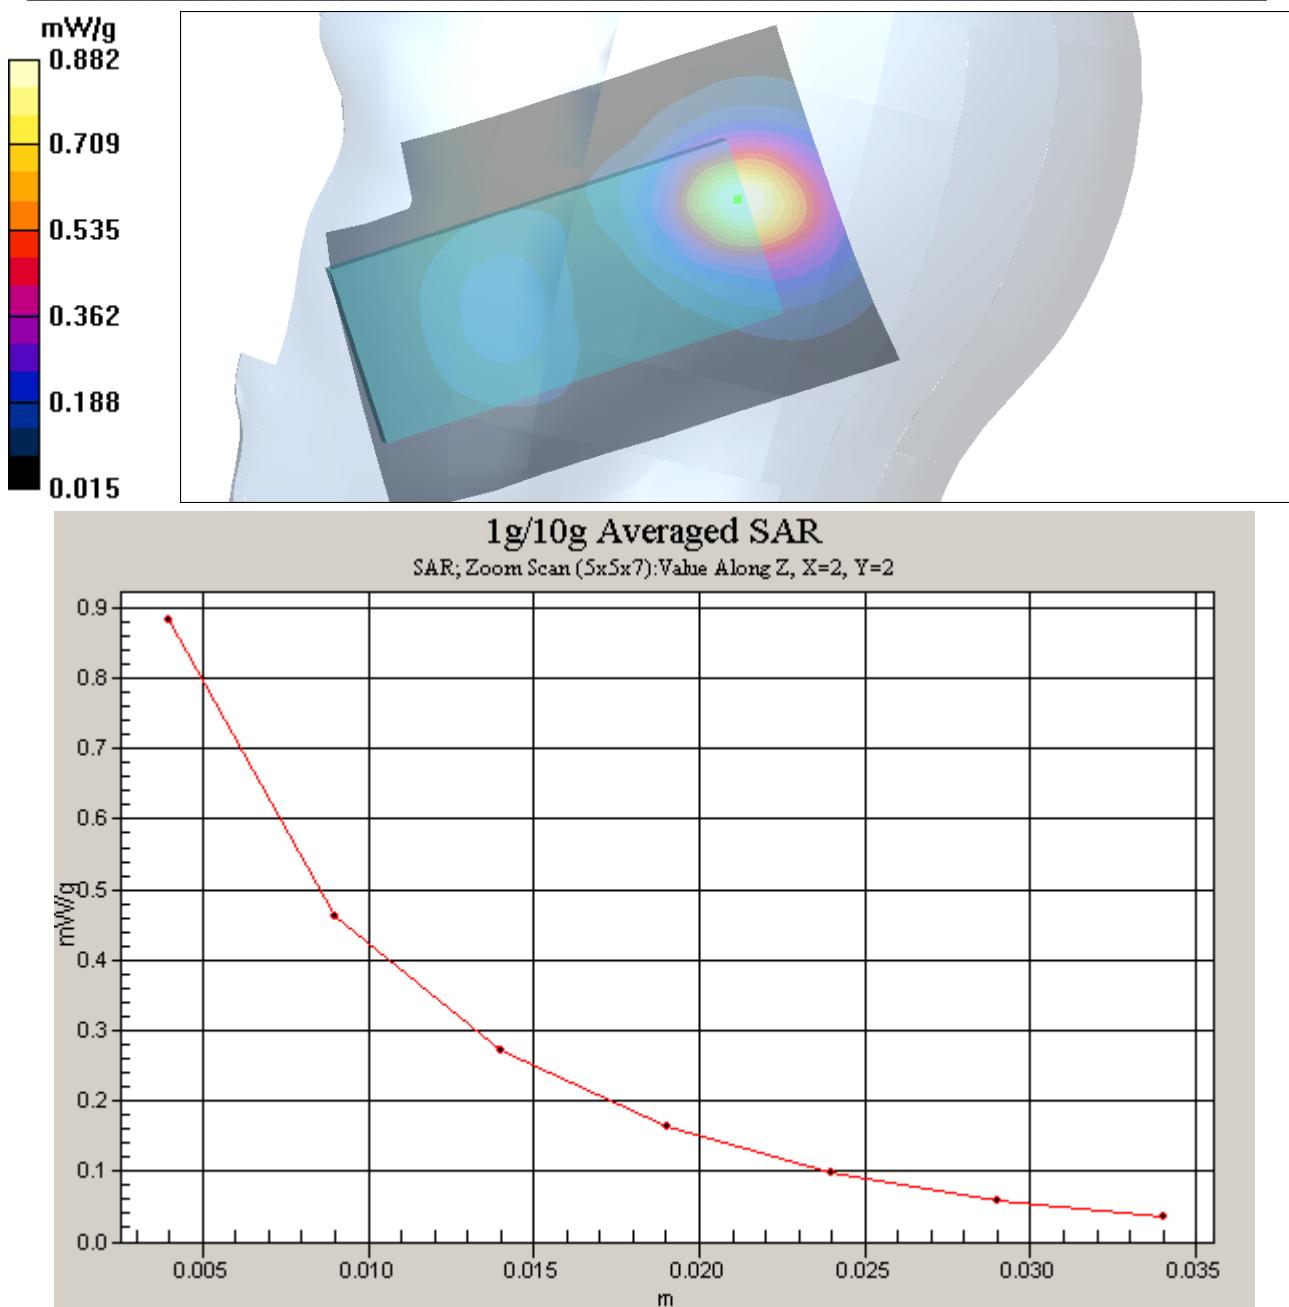



T117 (EN ISO/IEC 17025)

Date/Time: 01/18/05 10:22:51

Test Laboratory: TCC Oulu

TYPE: RM-72; Serial: 355386/00/000014/5; with MMC card

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Cheek position - Middle, t=21.5 C, worst case extrapolation/Area Scan (61x91x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.685 mW/g

Cheek position - Middle, t=21.5 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = -0.3 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 0.603 mW/g


Cheek position - Middle, t=21.5 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = -0.3 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.533 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.567 mW/g

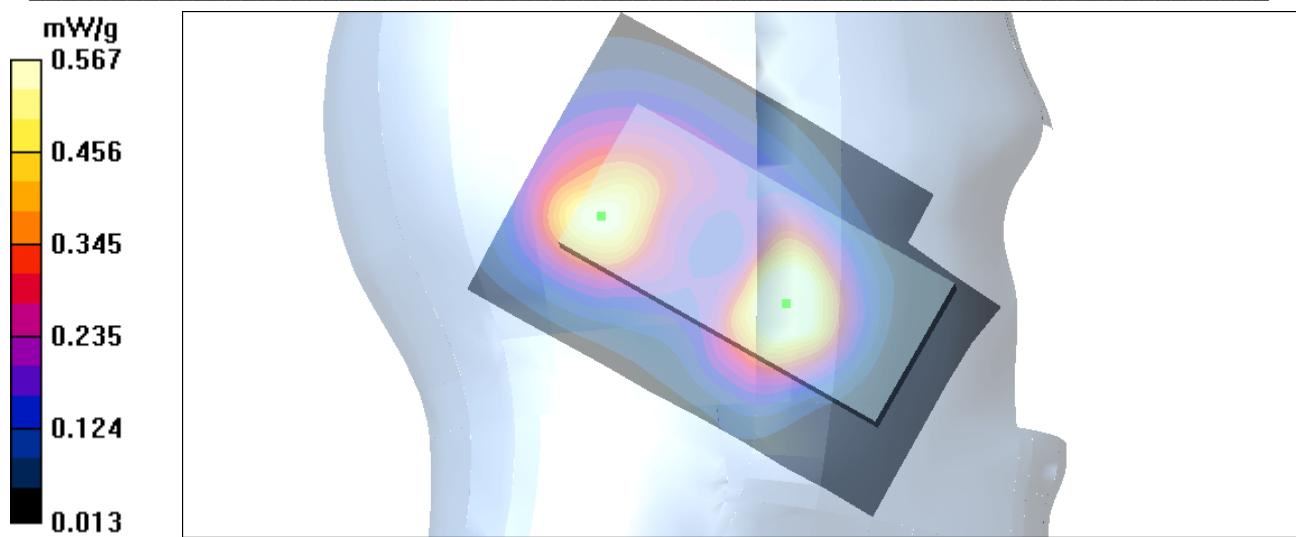



T117 (EN ISO/IEC 17025)

Date/Time: 01/18/05 10:22:51

Test Laboratory: TCC Oulu

TYPE: RM-72; Serial: 355386/00/000014/5; with MMC card

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(5.27, 5.27, 5.27); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Tilt position - Middle, t=21.5 C, worst case extrapolation/Area Scan (61x91x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.830 mW/g


Tilt position - Middle, t=21.5 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.769 mW/g; SAR(10 g) = 0.400 mW/g

Maximum value of SAR (measured) = 0.834 mW/g

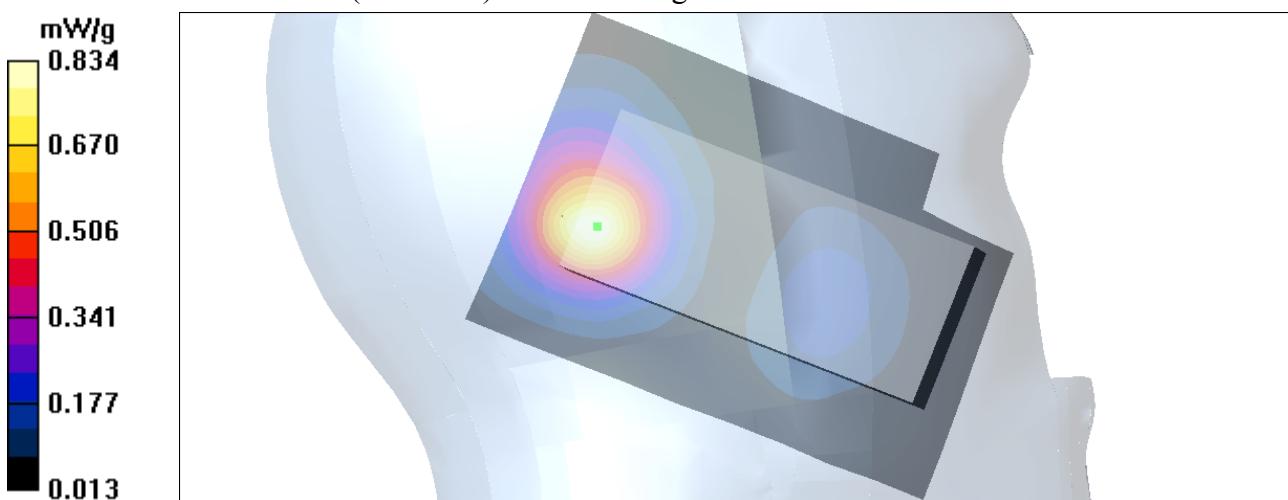



T117 (EN ISO/IEC 17025)

Date/Time: 01/20/05 09:54:29

Test Laboratory: TCC Oulu

TYPE: RM-72; Serial: 355386/00/000014/5; without headset, with MMC card

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: BSL1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1765; ConvF(4.65, 4.65, 4.65); Calibrated: 16.02.2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn555; Calibrated: 10.02.2004
- Phantom: SAM 3; Type: SAM 4.0; Serial: 1215
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Body worn - Low, t=21.6 C, worst case extrapolation/Area Scan (51x91x1):

Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (interpolated) = 0.681 mW/g


Body worn - Low, t=21.6 C, worst case extrapolation/Zoom Scan (5x5x7)**(5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.622 mW/g; SAR(10 g) = 0.362 mW/g**Info: Interpolated medium parameters used for SAR evaluation!****Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.**

Maximum value of SAR (measured) = 0.648 mW/g

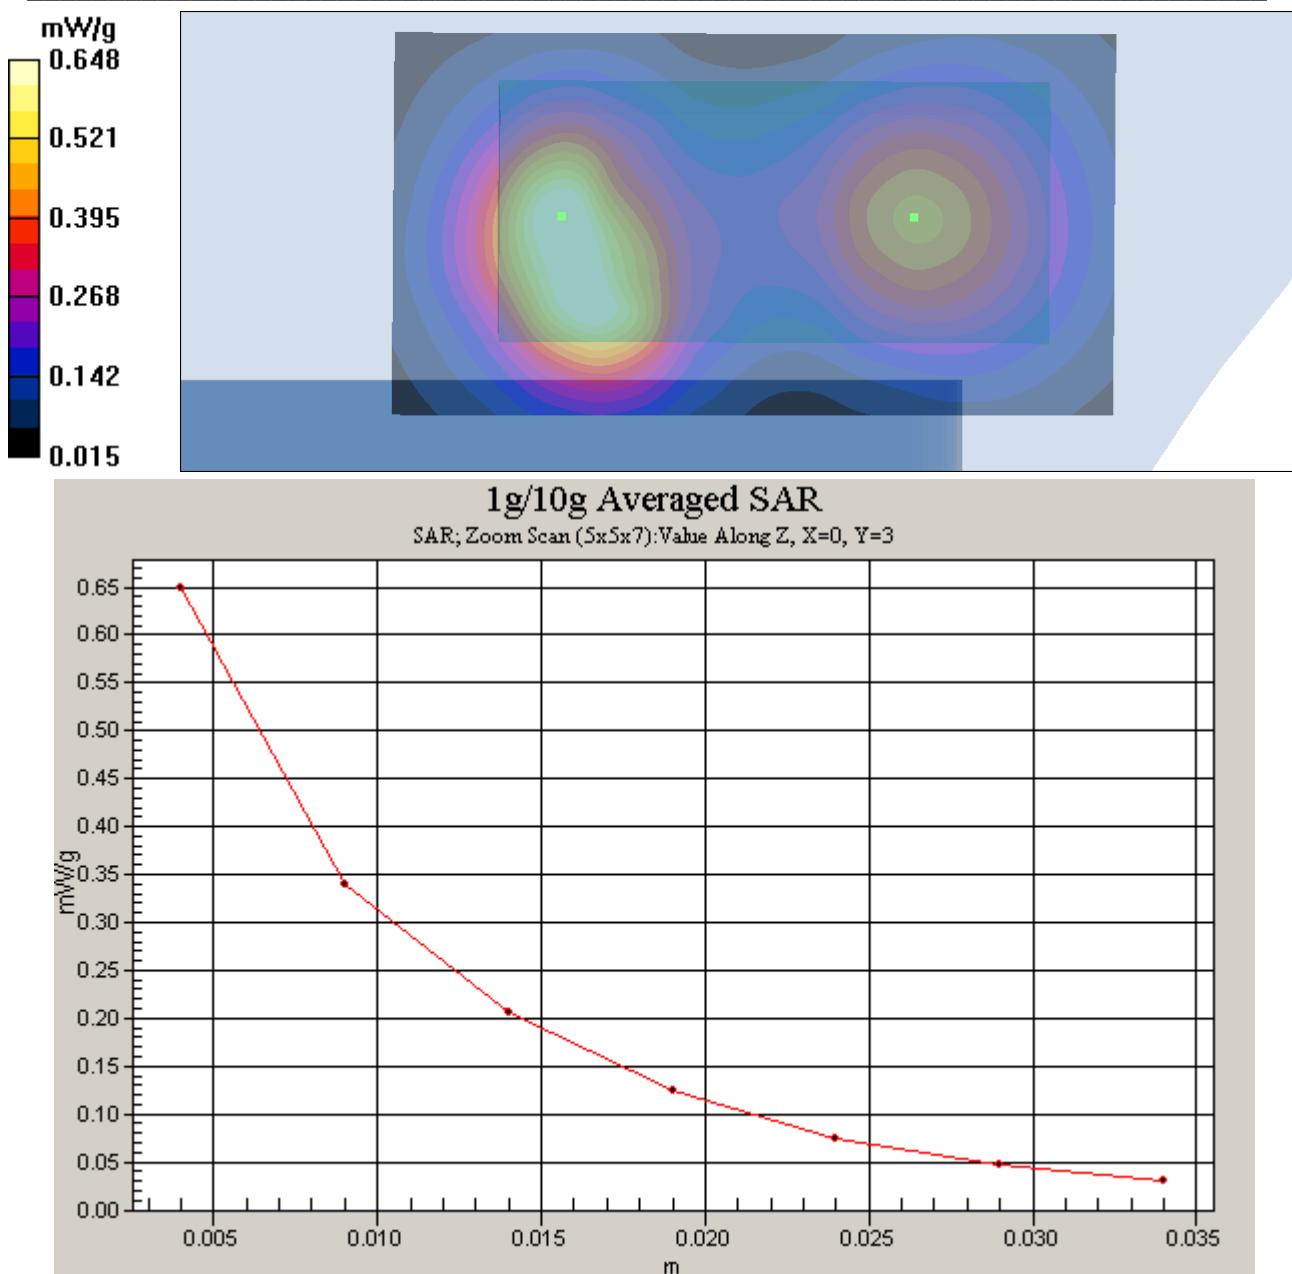



T117 (EN ISO/IEC 17025)

APPENDIX C: RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

Nokia Oulu

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN:1765**

Calibration procedure(s) **QA CAL-01.v2**
Calibration procedure for dosimetric E-field probes

Calibration date: **February 16, 2004**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.



All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS, No. 251-0340)	Apr-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05

Calibrated by: **Name** **Function** **Signature**
Katja Pokovic - Laboratory Director

Approved by: **Name** **Function**
Niels Kuster Quality Manager

Date issued: February 16, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

DASY - Parameters of Probe: ET3DV6 SN:1765

Sensitivity in Free Space

NormX	1.64 μ V/(V/m) ²
NormY	1.85 μ V/(V/m) ²
NormZ	1.92 μ V/(V/m) ²

Diode Compression^A

DCP X	94	mV
DCP Y	94	mV
DCP Z	94	mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	10.6	5.8
SAR _{be} [%] With Correction Algorithm	0.3	0.6

Head 1800 MHz Typical SAR gradient: 10 % per mm

Sensor to Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	13.4	8.8
SAR _{be} [%] With Correction Algorithm	0.2	0.1


Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	in tolerance	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A numerical linearization parameter: uncertainty not required

Conversion Factor Assessment

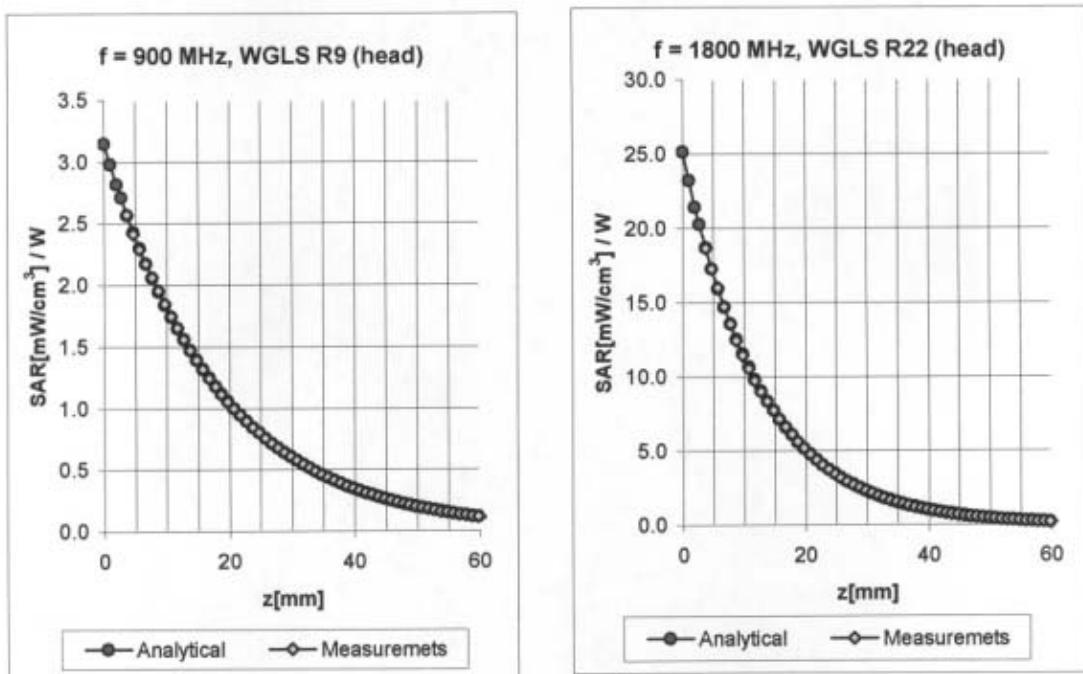

f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	793-877	Head	$41.5 \pm 5\%$	$0.90 \pm 5\%$	0.68	1.81	6.55	$\pm 9.5\% \text{ (k=2)}$
900	855-945	Head	$41.5 \pm 5\%$	$0.97 \pm 5\%$	0.44	2.37	6.45	$\pm 9.6\% \text{ (k=2)}$
1800	1710-1890	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.55	2.42	5.27	$\pm 10.9\% \text{ (k=2)}$
1880	1786-1974	Head	$40.0 \pm 5\%$	$1.40 \pm 5\%$	0.56	2.58	5.24	$\pm 11.0\% \text{ (k=2)}$
2450	2400-2500	Head	$39.2 \pm 5\%$	$1.80 \pm 5\%$	1.07	1.81	4.80	$\pm 9.7\% \text{ (k=2)}$

f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	793-877	Body	$55.2 \pm 5\%$	$0.97 \pm 5\%$	0.43	2.38	6.23	$\pm 9.5\% \text{ (k=2)}$
900	855-945	Body	$55.0 \pm 5\%$	$1.05 \pm 5\%$	0.47	2.29	6.02	$\pm 9.6\% \text{ (k=2)}$
1800	1710-1890	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.63	2.56	4.65	$\pm 10.9\% \text{ (k=2)}$
1880	1786-1974	Body	$53.3 \pm 5\%$	$1.52 \pm 5\%$	0.64	2.64	4.59	$\pm 11.0\% \text{ (k=2)}$
2450	2400-2500	Body	$52.7 \pm 5\%$	$1.95 \pm 5\%$	1.65	1.35	4.18	$\pm 9.7\% \text{ (k=2)}$

^B The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.



T117 (EN ISO/IEC 17025)

APPENDIX D: RELEVANT PAGES FROM DIPOLE VALIDATION KIT REPORT(S)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **Nokia Oyj, Oulu**

CALIBRATION CERTIFICATE

Object(s) **D1900V2 - SN:5d030**

Calibration procedure(s) **QA CAL-05.v2**
Calibration procedure for dipole validation kits

Calibration date: **April 8, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator R&S SML-03	100698	27-Mar-2002	In house check: Mar-05
Power sensor HP 8481A	MY41092317	18-Oct-02	Oct-04
Power sensor HP 8481A	US37292783	30-Oct-02	Oct-03
Power meter EPM E442	GB37480704	30-Oct-02	Oct-03
Network Analyzer HP 8753E	US38432426	3-May-00	In house check: May 03

Calibrated by: **Katja Pokovic** **Laboratory Director** 

Approved by: **Niels Kuster** **Quality Manager** 

Date issued: April 11, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Date/Time: 04/01/03 15:53:35

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d030_SN1507_HSL1900_010403.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d030
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz; ($\sigma = 1.44 \text{ mho/m}$, $\epsilon_r = 38.78$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.5 V/m

Peak SAR = 18.4 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.42 mW/g

Power Drift = 0.03 dB



Date/Time: 04/08/03 14:15:07

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN5d030_SN1507_M1900_080403.da4

DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d030
Program: Dipole Calibration

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz; ($\sigma = 1.59 \text{ mho/m}$, $\epsilon_r = 51.2$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m

Peak SAR = 18.7 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.52 mW/g

Power Drift = 0.03 dB

