

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-720_02.docx	Date of Report:	20-Oct-2010
Number of pages:	27	Customer's Contact person:	Mohammad El-Haj
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-720 / Battery BL-4U		
FCC ID:	QTKRM-720	IC:	661AD-RM720
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Hannu Söderholm, Senior Engineer, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	14-Oct-2010
Testing completed	14-Oct-2010
The customer's contact person	Mohammad El-Haj
Test Plan referred to	T:\Projects\RM-720\TestPlan\RS_testplan_RM-720.xls
Notes	-
Document name	FCC15C_RM-720_02.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/IV(1700)/VIII) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-720	004402132176599	3103	-	10.0.018	42361
Battery	BL-4U	4955400203210416902;0670560	-	-	-	42362

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2)).....	5
3.1. Test method and limit	5
3.2. Bluetooth Test results	6
4.....	9
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)	9
5.1. Test method and limit	9
5.2. Bluetooth Test results	10
6.....	12
7. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a)).....	13
7.1. Test method and limit	13
7.2. Bluetooth Test results	14
8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))	17
8.1. Test method and limit	17
8.2. Bluetooth Test results	18
9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d)).....	20
9.1. Test method and limit	20
9.2. Bluetooth Test results	21
10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	23
10.1. Test method and limit	23
10.2. Bluetooth test results	24
11.....	25
12. Test Equipment	26
12.1. Conducted measurements	26
12.2. Radiated measurements	26

2. Test setups


2.1. Conducted RF test setup

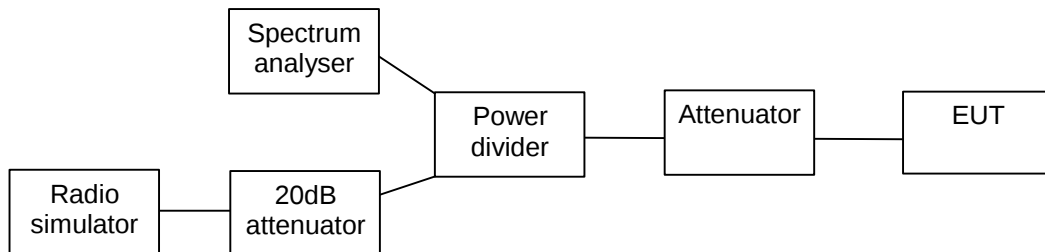

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

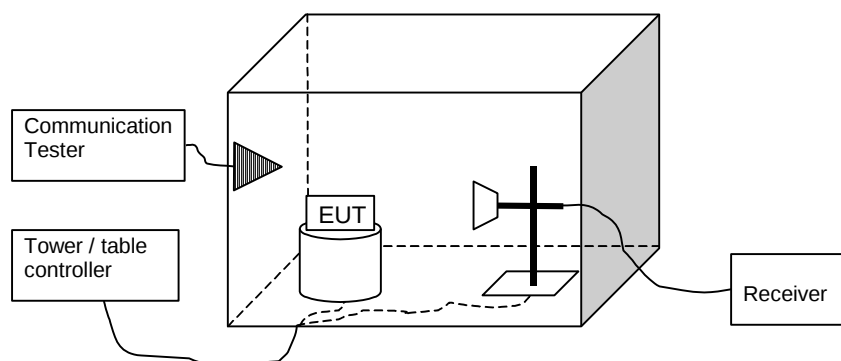

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-720 DUT 42361
Accessories with DUT numbers	BL-4U DUT 42362
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 99.7
Date of measurements	14-Oct-2010
Measured by	Jari Jantunen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	0.30	1.072	PASSED
40 / 2442	0.20	1.047	PASSED
78 / 2480	-0.30	0.933	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

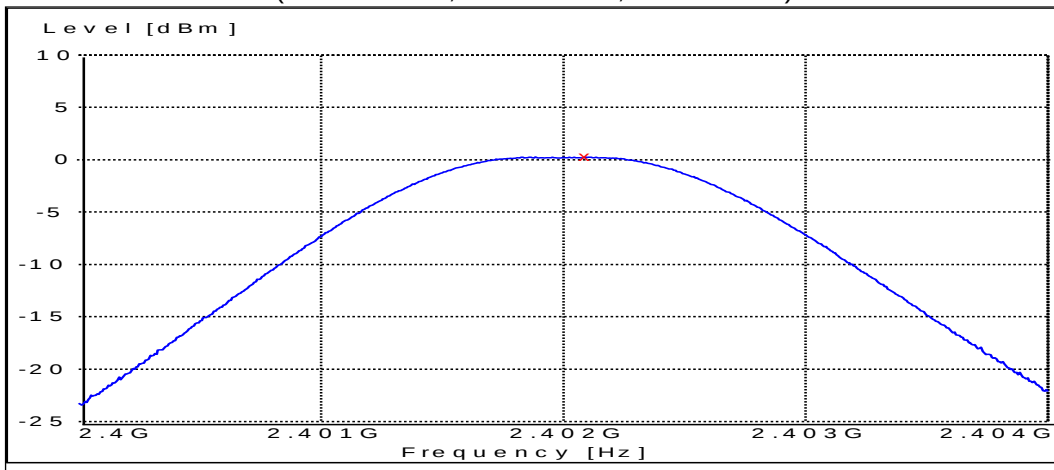

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

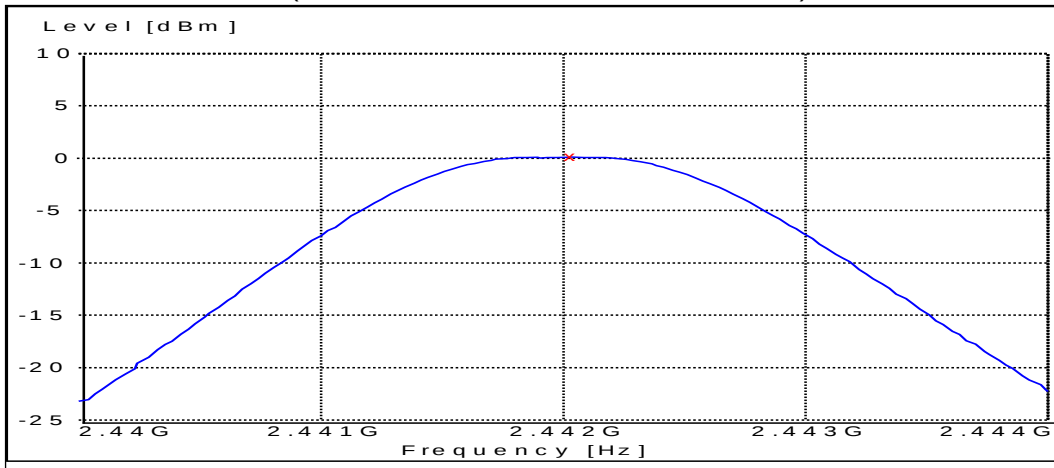


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

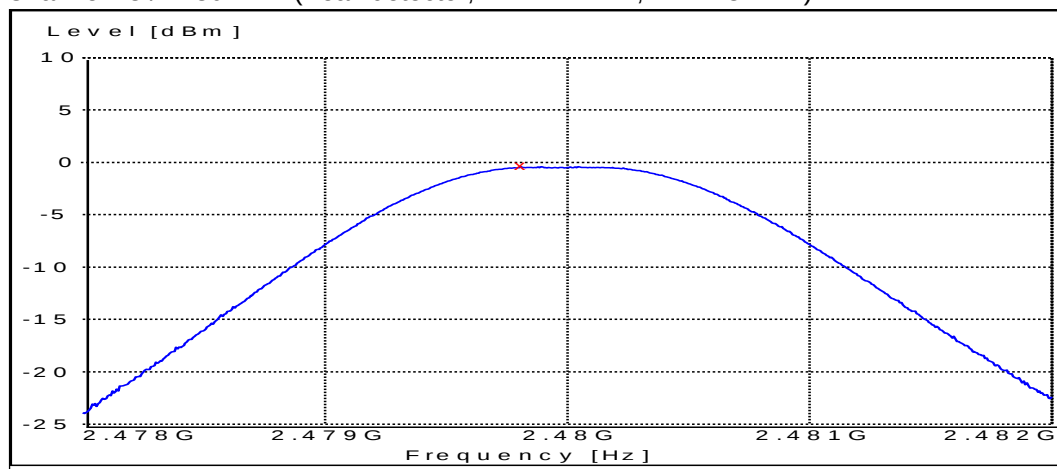


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.70	1.479	PASSED
40 / 2442	1.70	1.479	PASSED
78 / 2480	1.10	1.288	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

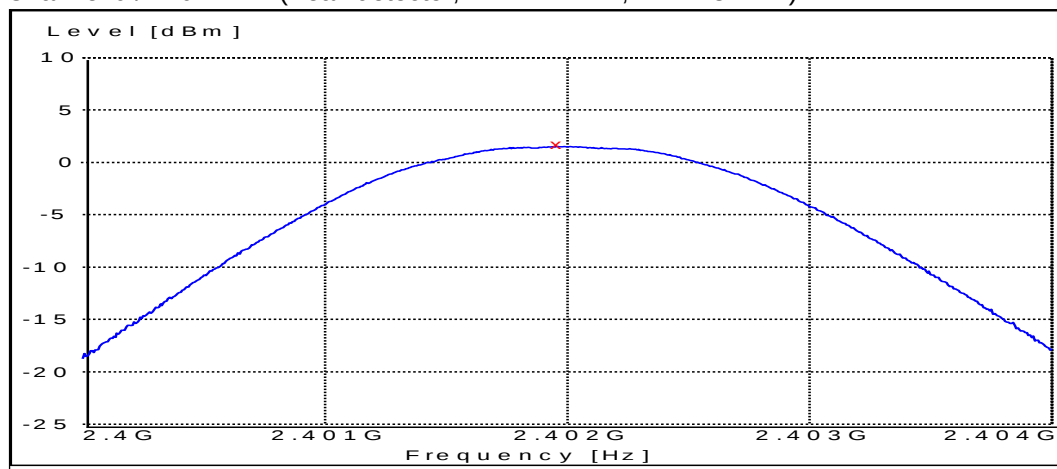

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

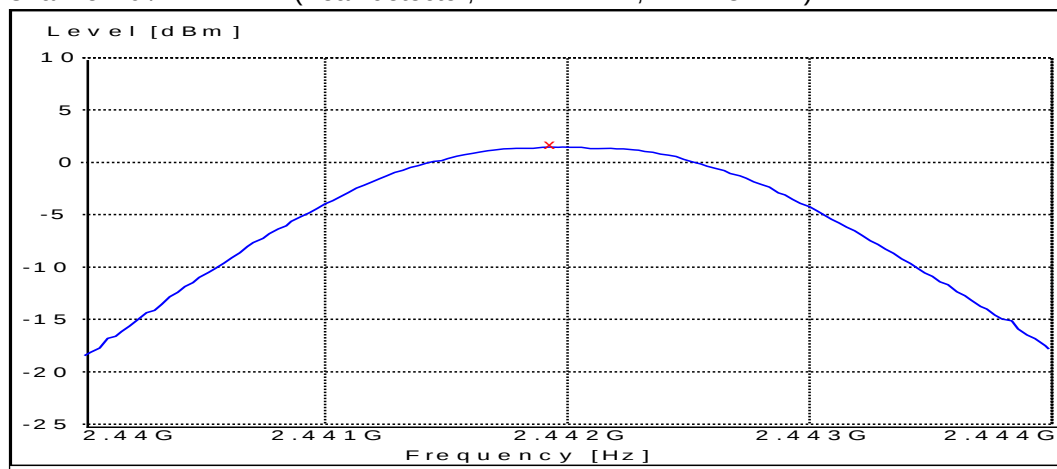

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

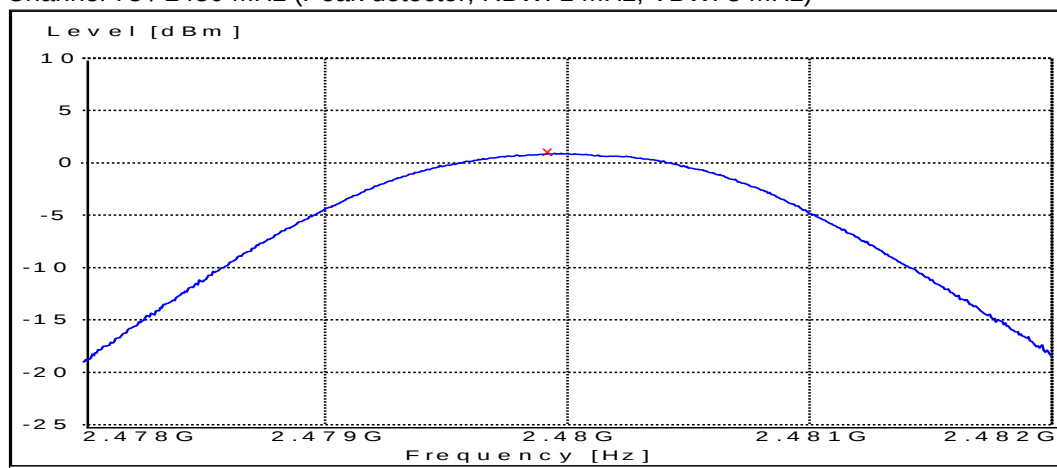

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-720 DUT 42361
Accessories with DUT numbers	BL-4U DUT 42362
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 99.7
Date of measurements	14-Oct-2010
Measured by	Jari Jantunen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

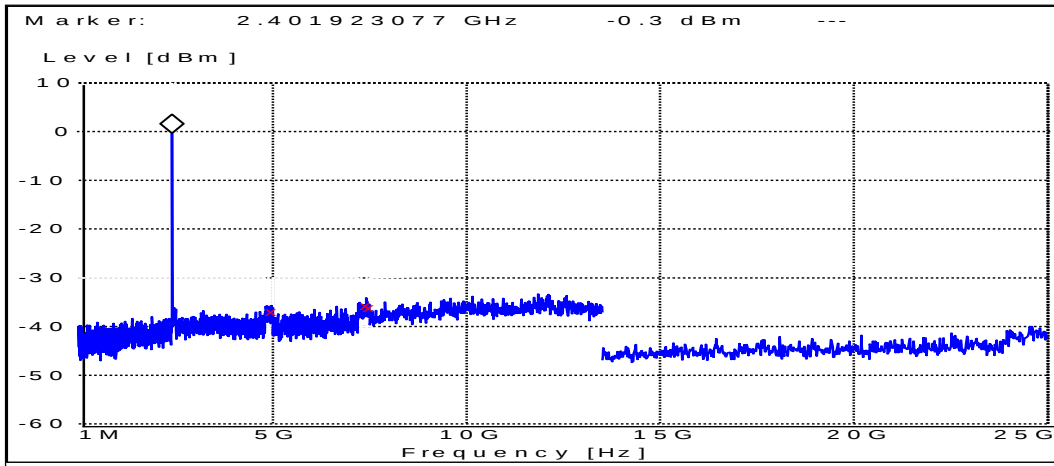

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4982.051282	-36.702243	PASSED
7415.865385	-35.502243	PASSED
7500.000000	-35.802243	PASSED


Channel 40 / 2442 MHz

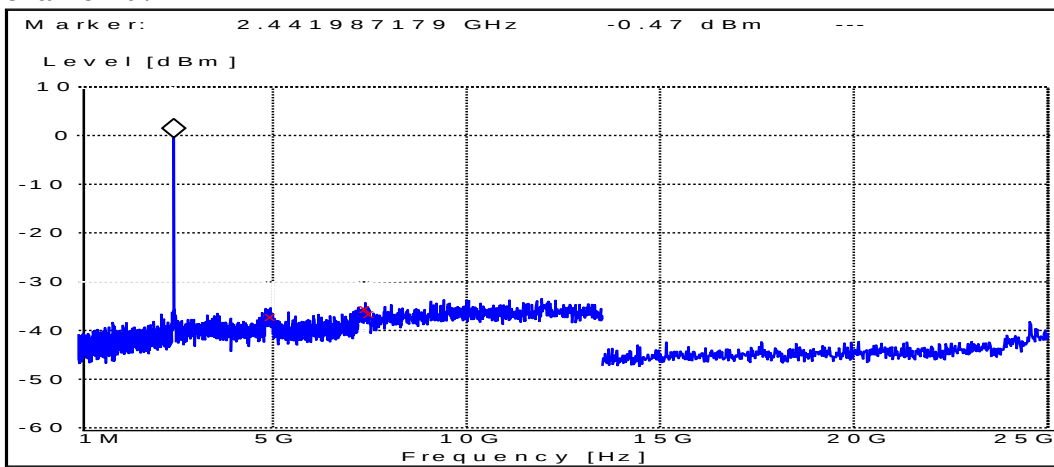

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4946.474359	-36.831793	PASSED
7389.903846	-35.131793	PASSED
7500.000000	-36.131793	PASSED

Channel 78 / 2480 MHz

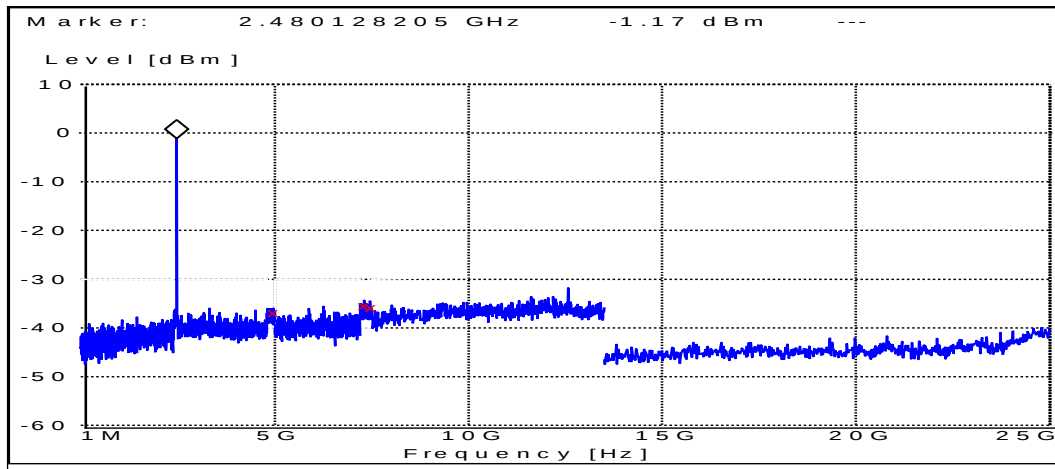


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4979.487179	-35.828517	PASSED
7306.730769	-34.328517	PASSED
7500.000000	-34.728517	PASSED

4.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

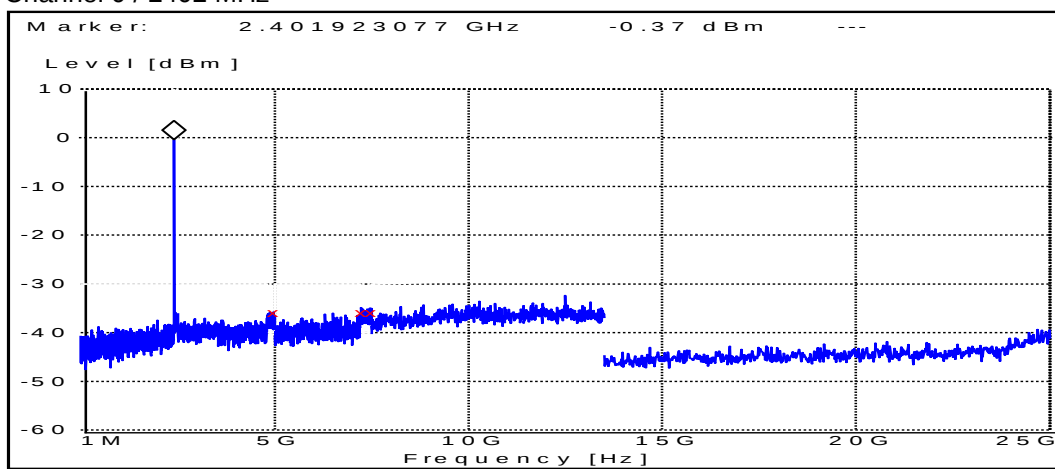

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4977.884615	-35.432816	PASSED
7229.807692	-35.432816	PASSED
7500.000000	-35.632816	PASSED


Channel 40 / 2442 MHz

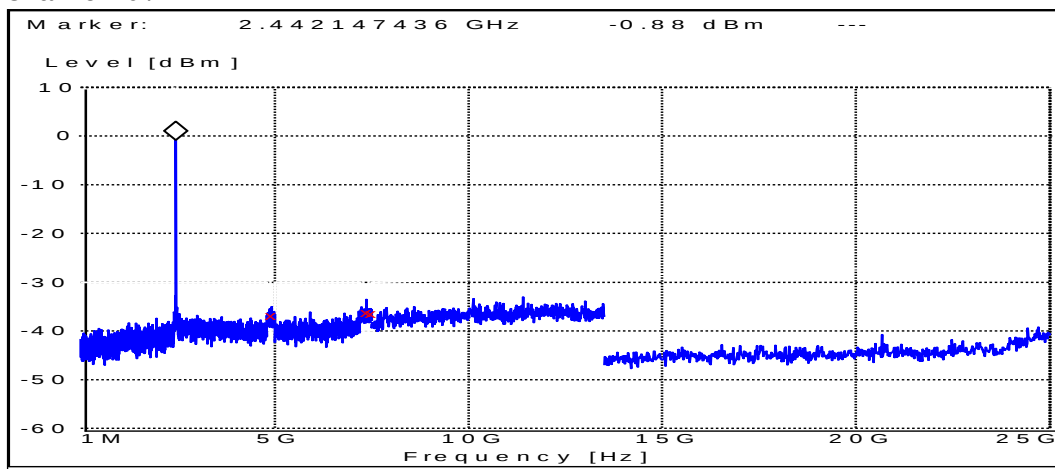

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4926.923077	-36.118117	PASSED
7363.942308	-35.318117	PASSED
7500.000000	-35.518117	PASSED

Channel 78 / 2480 MHz

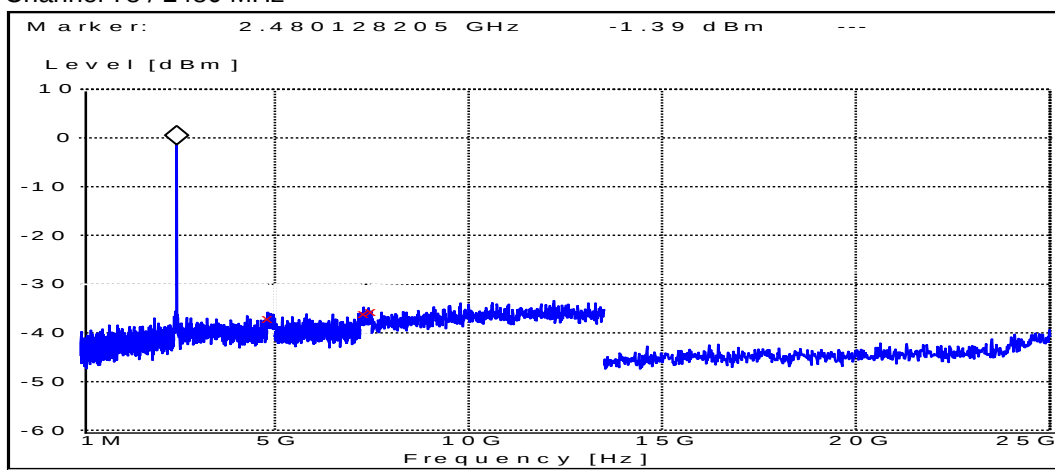

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4822.435897	-35.713834	PASSED
7294.711538	-34.613834	PASSED
7500.000000	-34.213834	PASSED

6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-720 DUT 42361
Accessories with DUT numbers	BL-4U DUT 42362
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 99.7
Date of measurements	14-Oct-2010
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

6.2. Bluetooth Test results


6.2.1 GFSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	833.333	PASSED
40 / 2442	788.462	PASSED
78 / 2480	839.744	PASSED


Channel 0 / 2402 MHz

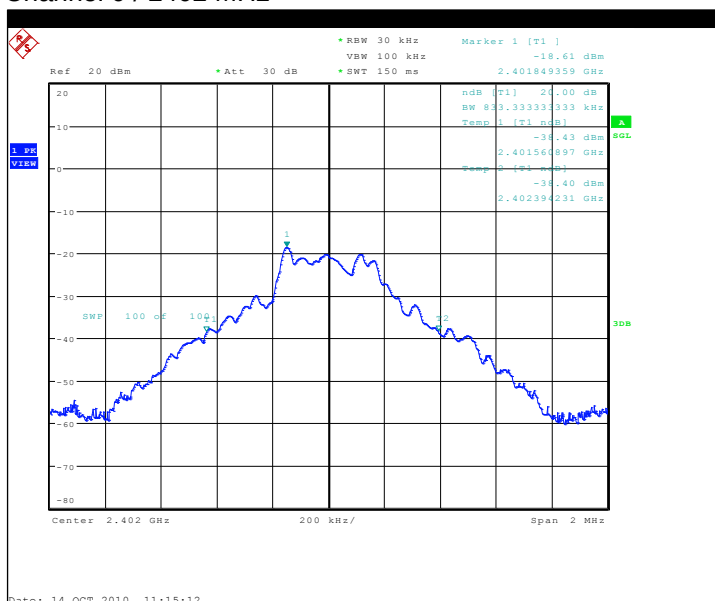

Channel 40 / 2442 MHz

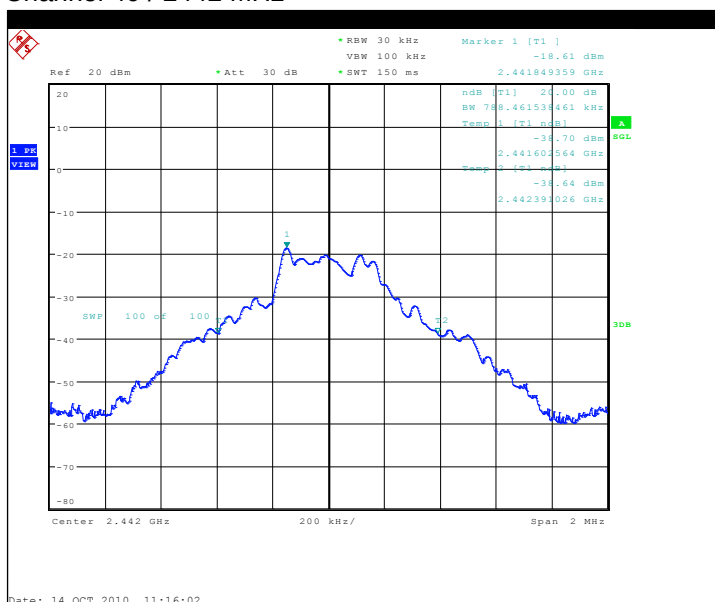

Channel 78 / 2480 MHz

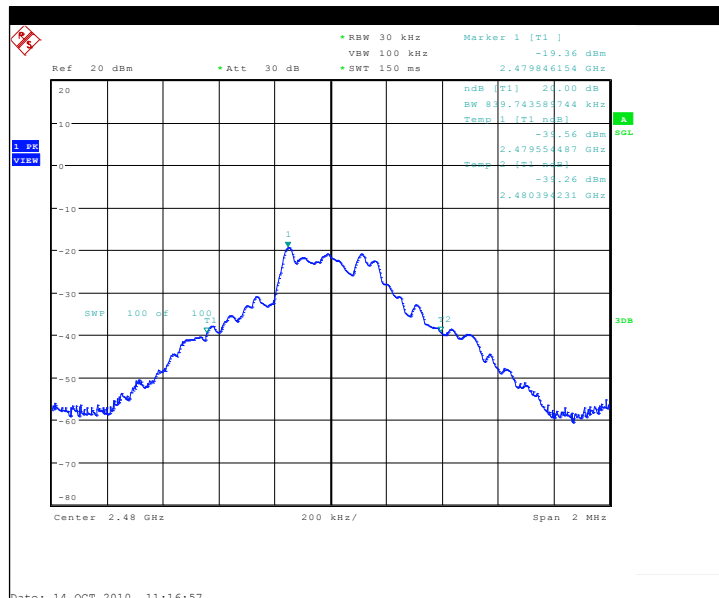


6.2.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1317.308	PASSED
40 / 2442	1320.513	PASSED
78 / 2480	1323.718	PASSED

Channel 0 / 2402 MHz



Channel 40 / 2442 MHz

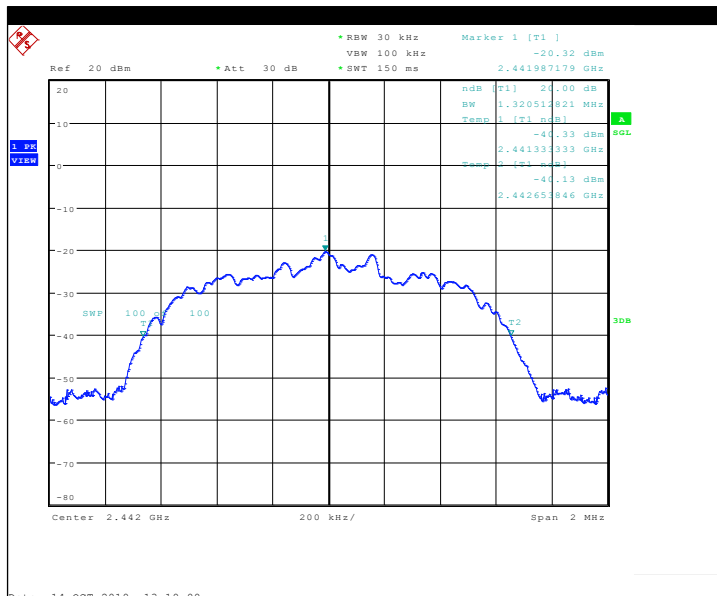

Channel 78 / 2480 MHz



7. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-720 DUT 42361
Accessories with DUT numbers	BL-4U DUT 42362
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 99.7
Date of measurements	14-Oct-2010
Measured by	Jari Jantunen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
993.59	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

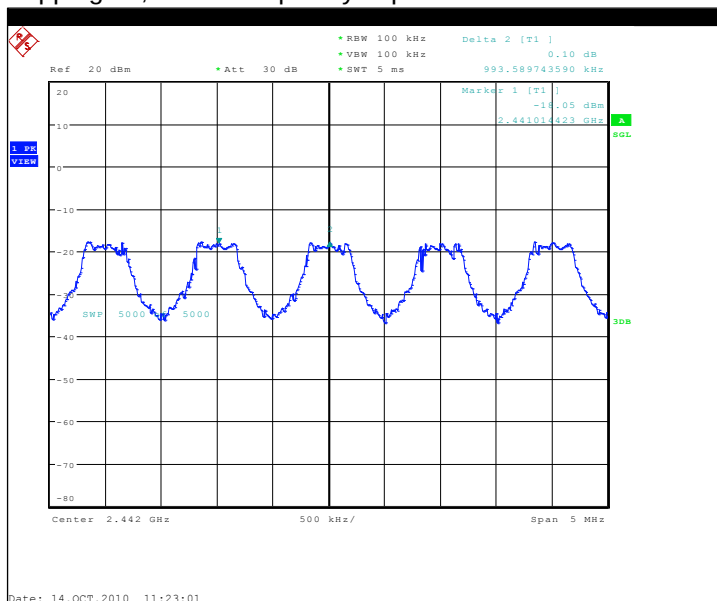

7.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1001.603	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

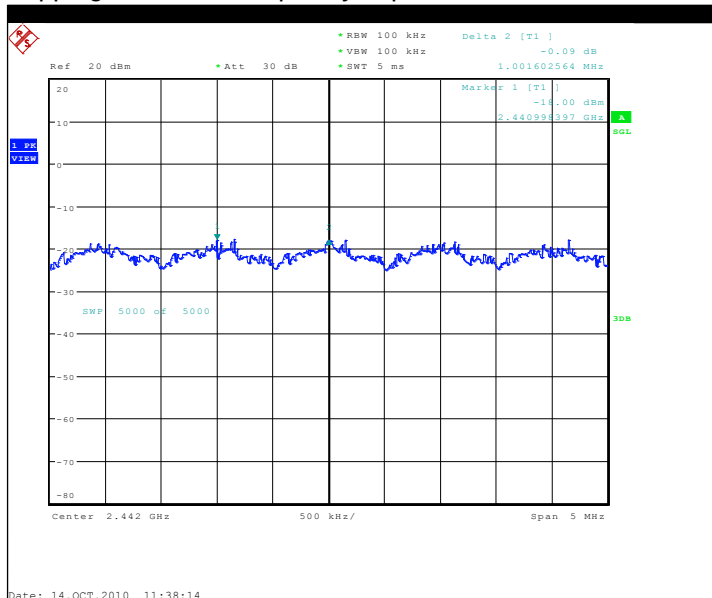

8. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-720 DUT 42361
Accessories with DUT numbers	BL-4U DUT 42362
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 99.7
Date of measurements	14-Oct-2010
Measured by	Jari Jantunen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

8.2. Bluetooth Test results

8.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

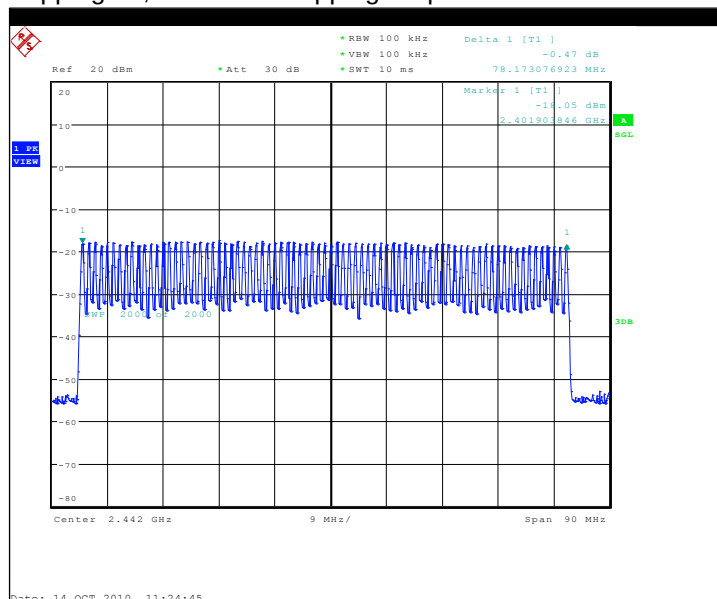

8.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
22	PASSED

Hopping on, number of hopping frequencies

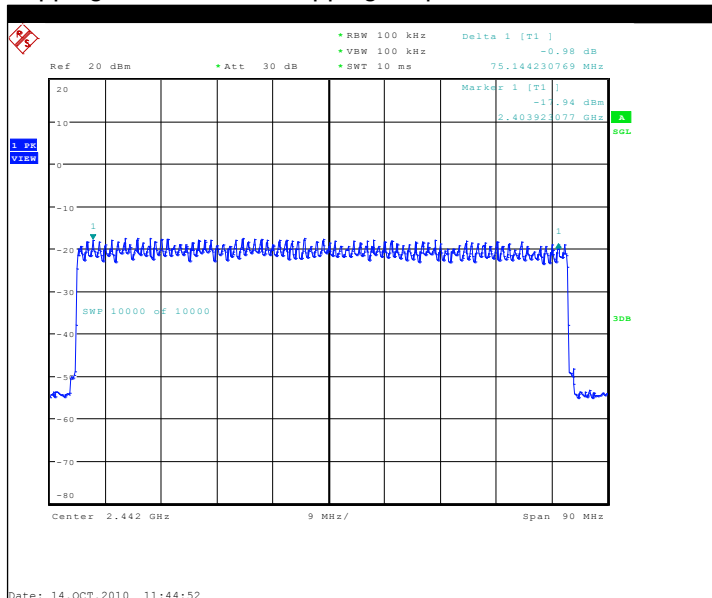

9. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-720 DUT 42361
Accessories with DUT numbers	BL-4U DUT 42362
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 99.7
Date of measurements	14-Oct-2010
Measured by	Jari Jantunen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

9.2. Bluetooth test results


9.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
90	2 917	0.262500	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

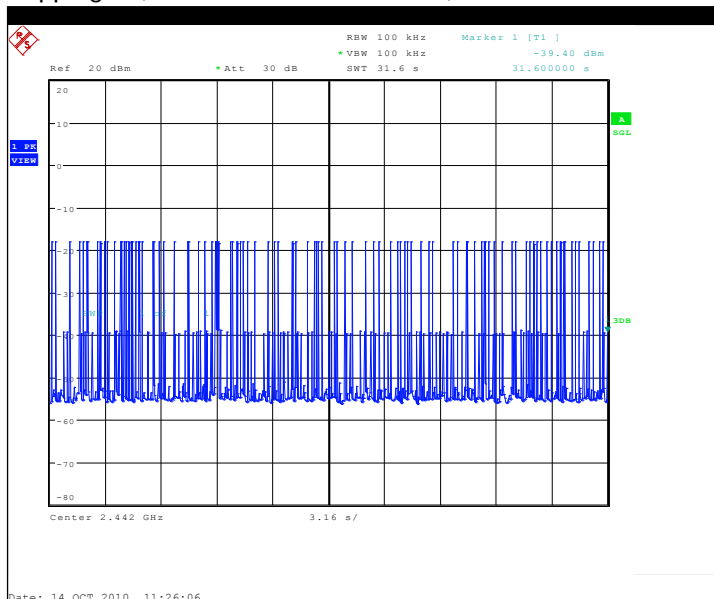


Hopping on, duration of one transmission, channel 40 / 2442 MHz

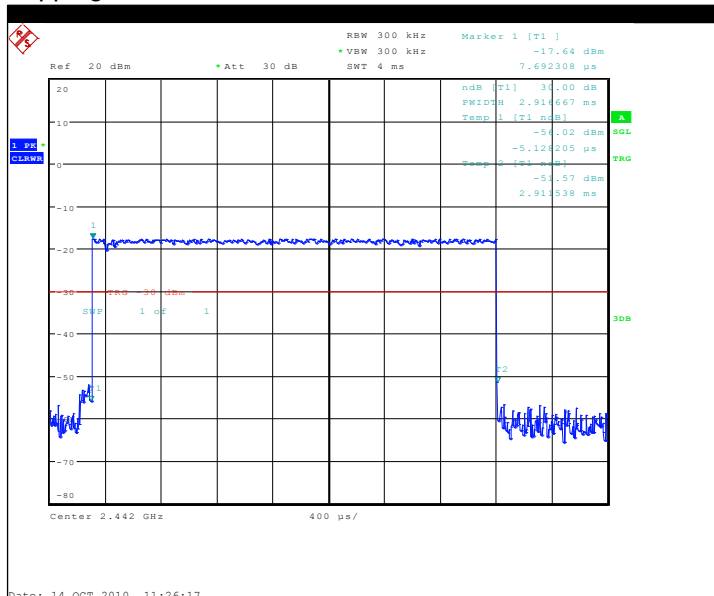


9.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
89	2 923	0.260154	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

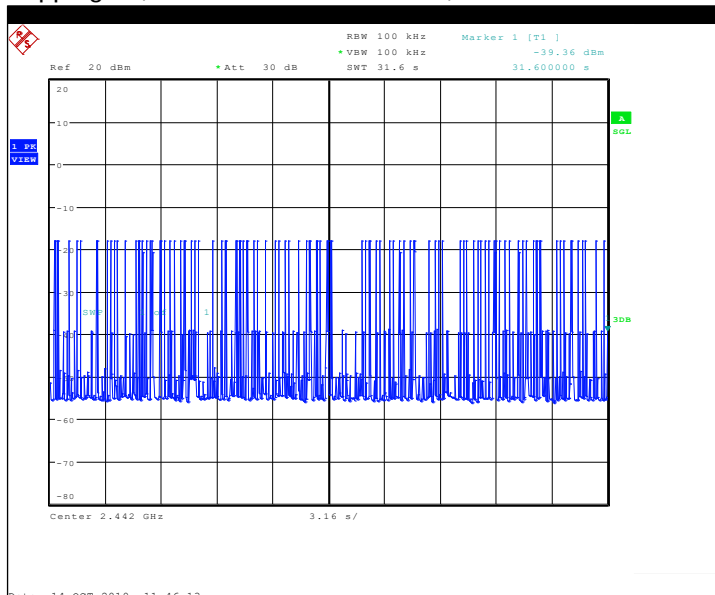

Hopping on, duration of one transmission, channel 40 / 2442 MHz

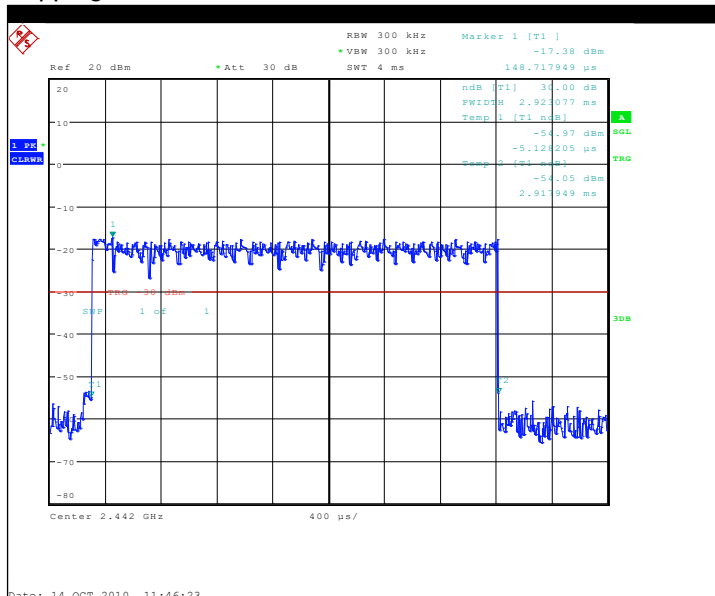

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM0631 2	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM30642	Mast/turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM38990	Remote switching module	RSM1	EMC Automation	22/24/27, 15C, 15B
TM38341	System interface	SI-300	EMC Automation	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Controller	2090	Emco	22/24/27, 15C, 15B
TM39158	Antenna	3116	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
-	Preamplifier	AFS4-00100300-20-23P6	Miteq	15C
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Torqueleader	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870/	Wainwright	27
TM38215	Band reject filter	WRCD 1920/1980-1918/1982-40/20	Wainwright UMTS	27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30/	Wainwright ISM	15C
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	27
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
-	Antenna	SBA 9113	Schwarzbeck	22/24/27
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C