


## FCC Part 22/24 Compliance Test Report

<b>Test Report no.:</b>	FCC22&24_RM-586_16.doc		<b>Date of Report:</b>	23-Mar-2010		
<b>Number of pages:</b>	7		<b>Customer's Contact person:</b>	Helen Hu		
<b>Testing laboratory:</b>	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550		<b>Customer:</b>	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550		
<b>FCC listing no.:</b>	975940		<b>IC recognition no.:</b>	661AH-1		
<b>Tested devices/ accessories:</b>	<b>Phone RM-586 / Battery BL-5C / AC-charger AC-3E / Headset HS-125</b>					
<b>FCC ID:</b>	QTLRM-586	<b>IC:</b>	661AB-RM586			
<b>Supplement reports:</b>	-					
<b>Testing has been carried out in accordance with:</b>	CFR 47, FCC rules Parts 22 and 24, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005) and RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".					
<b>Documentation:</b>	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.					
<b>Test Results:</b>	<b>The EUT complies with the requirements in respect of all parameters subject to the test.</b> The test results relate only to devices specified in this document.					
<b>Date and signature for the contents:</b>						

**Yin Hongpeng, System specialist, EMC**

## 1. Summary for FCC Part 22/24 Compliance Test Report

<b>Date of receipt</b>	17-Mar-2010
<b>Testing completed</b>	22-Mar-2010
<b>The customer's contact person</b>	Helen Hu
<b>Test Plan referred to</b>	T:\Projects\RM-586\TestPlan_RS\RS_Testplan_RM-586_CR_2010Mar041.xls
<b>Notes</b>	-
<b>Document name</b>	FCC22&24_RM-586_16.doc

### 1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-586	004401109865671	0403a	-	c16.00	51617
Battery	BL-5C	0670400382066Q41403GN91532	-	-	-	51618
AC-charger	AC-3E	4419298432052200896;0675370	-	-	-	51607
Headset	HS-125	06947869261C1R00224	-	-	-	51456

### 1.2. Summary of Test Results

#### GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	PASSED
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

#### GSM1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	NP
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	PASSED
§2.1055(a)	6.3	Frequency stability, temperature variation	NP
§2.1055(d)	6.3	Frequency stability, voltage variation	NP

PASSED  
FAILED  
NP

The EUT complies with the essential requirements in the standard.  
The EUT does not comply with the essential requirements in the standard.  
The test was not performed by the TCC Nokia Laboratory.

## CONTENTS


<b>1. Summary for FCC Part 22/24 Compliance Test Report .....</b>	<b>2</b>
1.1. EUT and Accessory Information .....	2
1.2. Summary of Test Results .....	2
<b>2. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5).....</b>	<b>4</b>
2.1. Test Setup .....	4
2.2. Test method and limit.....	4
2.3. GSM850 TX Test results .....	6
2.4. GSM1900 TX Test results .....	6
<b>3. Test Equipment.....</b>	<b>7</b>
3.1. Conducted measurements .....	7
3.2. Radiated measurements .....	7

## 2. Spurious radiated emissions

(FCC §22.917(a), §24.238(a), §2.1053, RSS-132 4.5, RSS-133 6.5)

<b>EUT with DUT number</b>	RM-586, DUT 51617
<b>Accessories with DUT numbers</b>	BL-5C, DUT 51618 ; AC-3E, DUT 51607 ; HS-125, DUT 51456
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	20 / 33 / 101.5
<b>Date of measurements</b>	22-Mar-2010
<b>Measured by</b>	Yin Hongpeng

### 2.1. Test Setup

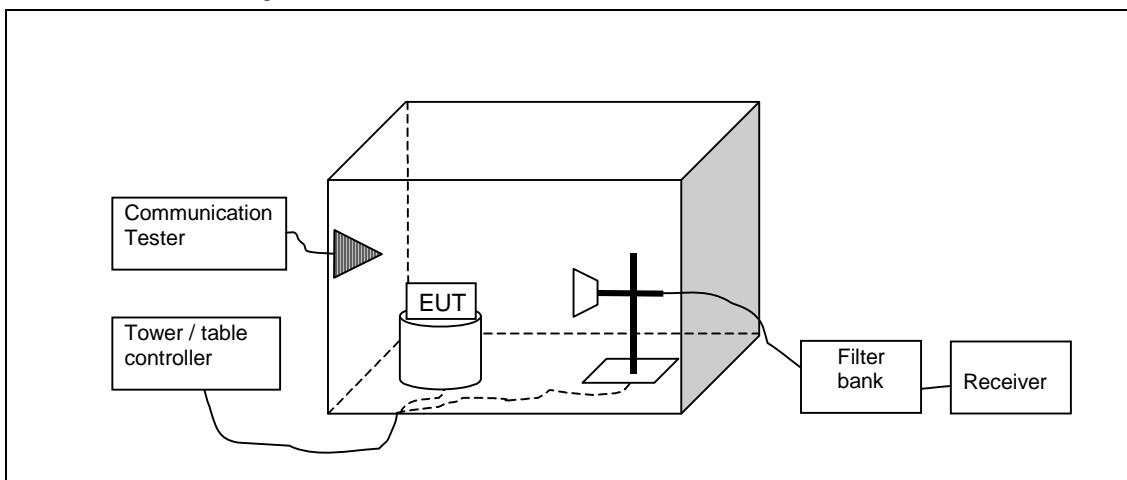

### 2.2. Test method and limit

The measurement is made according to TIA-603-C-2004 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured

beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST\ TX} - P_{SUBST\ RX} - L_{SUBST\ CABLES} + G_{SUBST\ TX\ ANT}$$

Where  $A_{SUBST}$  is the final substitution correction including receive antenna gain.  $P_{SUBST\ TX}$  is signal generator level,  $P_{SUBST\ RX}$  is receiver level,  $L_{SUBST\ CABLES}$  is cable losses including both TX and RX cables and  $G_{SUBST\ TX\ ANT}$  is substitution antenna gain.

The measurement results are obtained as described below:

$$P[dBm] = P_{MEAS} + A_{TOT}$$

Where  $P_{MEAS}$  is receiver reading in dBm and  $A_{TOT}$  is total correction factor including cable loss and substitution correction ( $A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$ ).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1700 / WCDMA 1900	30 - 18500	-13

### 2.3. GSM850 TX Test results

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P[dBm]	P [ $\mu$ W]	P <sub>MEAS</sub> [dBm]	A <sub>TOT</sub> [dB]	Polarisation	Result
1719.423	-57.3	0.00186	-62.97	5.67	VERTICAL	PASSED
1719.755	-57.85	0.00164	-63.52	5.67	VERTICAL	PASSED
2522.745	-52.78	0.00527	-65.21	12.43	VERTICAL	PASSED
2542.244	-51.27	0.00746	-63.69	12.42	HORIZONTAL	PASSED
3346.373	-45.95	0.02541	-54.33	8.38	VERTICAL	PASSED

### 2.4. GSM1900 TX Test results

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P[dBm]	P [ $\mu$ W]	P <sub>MEAS</sub> [dBm]	A <sub>TOT</sub> [dB]	Polarisation	Result
2758.992	-47.49	0.01782	-64.55	17.06	HORIZONTAL	PASSED
2816.14	-46.26	0.02366	-64.5	18.24	VERTICAL	PASSED
2913.591	-44.72	0.03373	-64.22	19.5	VERTICAL	PASSED
2919.097	-45.67	0.0271	-65.08	19.41	HORIZONTAL	PASSED
2927.905	-45.25	0.02985	-64.64	19.39	HORIZONTAL	PASSED
2947.537	-45.67	0.0271	-65.39	19.72	HORIZONTAL	PASSED

### 3. Test Equipment

#### 3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 $\mu$ H	ESH3-Z5	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 $\mu$ H	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperture Test	VT4002	Votsch	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIB-RS232 convertor	GPIB-RS232	NI	22/24/27, 15C

#### 3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-	Miteq	22/24/27, 15C, 15B