

Electromagnetic Emission

F C C M E A S U R E M E N T R E P O R T

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : LCD Monitor
MODEL/TYPE NO : OR1720S
FCC ID : QTMOR1720S
APPLICANT : YURI Electronics Co., Ltd.
122-6, Youngcheon-ri, Dongtan-myeon, Hawaseong-shi,
Kyunggi-do, Korea
Attn. : Jong-Bok, Oh / R & D Manager
FCC CLASSIFICATION : Class B personal computers and peripherals
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : Topsync
TEST REPORT No. : E05.0511.FCC.260N
DATES OF TEST : April 25 – May 11, 2005
DATES OF ISSUE : May 11, 2005
TEST LABORATORY : ETL Inc. (FCC Registration Number : 95422)
#584 Sangwhal-ri, Kanam-myon, Yoju-kun, Kyounggi-do,
469-885, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This LCD Monitor, Model OR1720S has been tested in accordance with the measurement procedures specified in ANSI C63.4-2001 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Yo Han, Park / Chief Engineer



ETL Inc.

**#584 Sangwhal-ri, Kanam-myon, Yoju-kun,
Kyounggi-do, 469-885, Korea**

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculation**
- 7. List of test Equipment for Measurement**

- Appendix A. FCC ID Label and Location**
- Appendix B. Test Setup Photographs**
- Appendix C. External Photographs**
- Appendix D. Internal Photographs**
- Appendix E. Block Diagram**
- Appendix F. User Manual**

Scope – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

General Information

Applicant Name : YURI Electronics Co., Ltd.

Address : 122-6, Youngcheon-ri, Dongtan-myeon,
Hawaseong-shi, Kyunggi-do, Korea

Attention : Jong-Bok, Oh / R & D Manager

- **EUT Type :** LCD Monitor
- **Model Number :** OR1720S
- **FCC ID :** QTMOR1720S
- **S/N :** N/A
- **FCC Rule Part(s) :** FCC Part 15 Subpart B
- **Test Procedure :** ANSI C63.4-2001
- **FCC Classification :** Class B personal computers and peripherals
- **Dates of Tests :** April 25 – May 11, 2005
ETL Inc.
EMC Testing Lab (FCC Registration Number : 95422)
- **Place of Tests :** 584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No. :** E05.0511.FCC.260N

1. INTRODUCTION

The measurement for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyoungki-do, Korea. The open area test site is constructed in conformance with the requirements of the ANSI C63.4-2001 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2001 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in American national standard for method of measurement of radio-noise emission from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz (ANSI C.63.4-2001) was used in determining radiated and conducted emissions from the YURI Electronics Co., Ltd. Model: OR1720S

2. PRODUCT INFORMATION

2.1 General Remark

The Equipment Under Test (EUT) is the YURI Electronics Co., Ltd., LCD Monitor, OR1720S has a minor changes to the basic model.

Model Difference: Basic model name: OR1720S

Multi listing model names: OR1720, OR1721, OR1721S, LCD170RT, HL1700W, HL-1700F, 17RCL and 17RPC

Technical Deviation:

Model names OR1720, OR1721, OR1721S, LCD170RT, HL1700W, HL-1700F, 17RCL and 17RPC are same with basic model except for model name, brand name, with/without signal input port and front design.

The model names OR1720S and OR1720 are denoting that keypad is situated on right of front.

The model names OR1721S and OR1721 are denoting that keypad is situated on center of front.

The model names LCD170RT, HL1700W, HL-1700F, 17RCL and 17RPC are same with basic model for all electric and electronic components. Only difference is model names.

2.2 Equipment Description

The Equipment Under Test (EUT) is the YURI Electronics Co., Ltd.; LCD Monitor; OR1720S

2.3 General Specification

Chassis Type	: Plastic and metal
List of Each OSC. Or X-Tal. Freq. (>=1MHz)	: X-Tal: 24.576, 20.25, 24.00 MHz
Display size	: 337.92mmx270.34mm
Screen coating	: Anti-glare & Hard-coating
Pixel pitch	: 0.264x0.264mm
Brightness	: 300cd/m ²
Contrast scaling	: 500/1
Viewing angle	: 75/75/75/60 (left/right/up/down)
Response time	: Tf=10msec , Tr=3msec
Response time	: Analog RGB 0.7Vp-p
SPAKER	: 2W x 2W
H-Frequency	: 30~81kHz
V-Frequency	: 55~75Hz
Resolution	: 1280x1024 @ 75Hz
Panel color	: 16.7M Colors
Power	: 35W (Normal mode)
Consumption	: 5W (Power-saving mode)
Product size	: 438x149x450 (WxDxH)

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2001. The measurements were performed over the frequency range of 0.15MHz to 30 MHz using a 50?/50uH LISN as the input transducer to a spectrum analyzer or test receiver. The measurements were made with the detector set for "Peak" amplitude within an bandwidth of 10 kHz or for "quasi-peak & average" within a bandwidth of 9 kHz.

- Procedure of Test

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1m x 1.5m x 0.8m wooden table which is placed 40cm away from the vertical wall and 1.5m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from another LISN. Powers to the LISN are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMC LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling (serpentine fashion) to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer or test receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using the detector function set to the CISPR Quasi-Peak and average mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the spectrum analyzer or test receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable, whichever determined the worst-case emission. Each emission reported was calibrated using self-calibrating mode.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-2001 "measurement of information technology equipment ". The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determine the frequency producing the maximized emission in shielded room. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using broadband antenna. For above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-able table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. Emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

Operating Mode	The worst operating condition
Stand-by mode	X
640 * 480, 75 Hz, Full "H" pattern display & MP3 play mode	X
720 * 400, 70 Hz, Full "H" pattern display & MP3 play mode	X
800 * 600, 75 Hz, Full "H" pattern display & MP3 play mode	X
1024 * 768, 75 Hz, Full "H" pattern display & MP3 play mode	X
1280 * 1024, 75 Hz, Full "H" pattern display & MP3 play mode	X

: Worst case investigated during the test.

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – 17" LCD Monitor

FCC ID : QTMOR1720S
Model Name : OR1720S
Serial No. : N/A
Manufacturer : YURI Electronics Co., Ltd.
Power Supply Type : Adapter
Input - AC100-240; V 50/60 Hz; 1.5 A, Output – DC12 V; 4.0 A
Power Cord : Non-Shielded, Detachable: 1.5 m
Data Cable : 1.8 m Shielded RGB Cable, 1.5 m Shielded BNC Cable, 1.5 m Shielded RCA Cable, 1.5 m Shielded S-Video Cable, 1.5 m Unshielded Adapter Cable, 1.5 m Unshielded Line Cable

Support unit 1 – Personal computer (DELL)

FCC ID : N/A (DoC)
Model Name : DHM
Serial No. : H9MB71S
Manufacturer : DELL
Power Supply Type : Switching
Power Cord : Non-Shielded, Detachable: 1.2 m
Data Port : RGB IN:1, Parallel:1, RS-232:1, PS/2: 2, USB: 4, RJ-45:1
: Audio in:1, Audio out:1, MIC IN:1

Support unit 2 –Keyboard (COMPAQ)

FCC ID	: N/A (DoC)
Model Name	: KB-9963
Serial No.	: B26960GBUKO13F
Manufacturer	: COMPAQ
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Shielded, 1.5m

Support unit 3 – Mouse (LOGITECH)

FCC ID	: DZL211029
Model Name	: M-S34
Serial No.	: LZC01002314
Manufacturer	: LOGITECH
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: None-Shielded, 1.2m

Support unit 4 – USB Mouse (N/A)

FCC ID	: N/A
Model Name	: HL898W
Serial No.	: HL80811837
Manufacturer	: N/A
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Shielded, 1.2m

Support unit 5 – Serial Mouse (PETRA)

FCC ID	: JKGMUS5S01
Model Name	: MUS5S
Serial No.	: E183027
Manufacturer	: PETRA
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Shielded, 1.2m

Support unit 6 – EAR-MIC (JETECH)

FCC ID	: N/A
Model Name	: JE101
Serial No.	: N/A
Manufacturer	: JETECH
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Shielded, 1.5m

Support unit 7 – DVD Box (Alphacast)

FCC ID	: N/A
Model Name	: DVDP-M100
Serial No.	: N/A
Manufacturer	: Alphacast
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Shielded, 1.5m

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Test Rule Parts	Measurement Required	Result
15.107	Conducted emissions measurement	Passed by 11.50 dB
15.109	Radiated emissions measurement	Passed by 4.55 dB

The data collected shows that the **YURI Electronics Co., Ltd.; LCD Monitor; OR1720S** complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits and CISPR Publication 22.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5. TEST RESULTS

5.2 Conducted Emissions Measurement

EUT	LCD Monitor / OR1720S (SN: N/A)
Limit apply to	FCC Part 15. 107(CISPR Pub.22 Class B)
Test Date	May 04, 2005
Operating Condition	Full "H" pattern display(1280*1024, 75Hz) & MP3 play mode
Environment Condition	Humidity Level: 45 %RH, Temperature: 23
Result	Passed by 11.50 dB

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.
Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth : 9 kHz)

Frequency [MHz]	Reading [dB μ V]		Phase [*H / **V]	Limit [dB μ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.168	40.60		N	65.06	55.06	24.46	
0.189	43.00		H	64.08	54.08	21.08	
0.212	51.60		N	63.13	53.13	11.53	
0.228	50.40		N	62.52	52.52	12.12	
0.428	40.40		H	57.29	47.29	16.89	
0.492	43.60		H	56.13	46.13	12.53	
1.349	43.70		H	56.00	46.00	12.30	
1.721	44.10		H	56.00	46.00	11.90	
2.090	44.20		H	56.00	46.00	11.80	
2.529	44.50		H	56.00	46.00	11.50	
2.904	44.30		H	56.00	46.00	11.70	
3.233	43.70		H	56.00	46.00	12.30	
5.159	42.50		H	60.00	50.00	17.50	
5.536	42.50		H	60.00	50.00	17.50	
5.913	42.00		H	60.00	50.00	18.00	
6.300	41.30		H	60.00	50.00	18.70	
7.165	40.20		H	60.00	50.00	19.80	
20.056	45.00		N	60.00	50.00	15.00	

NOTES:


- * H : HOT Line , **N : Neutral Line
- Margin value = Limit – Reading
- Measurement were performed at the AC/DC adapter in the frequency band of 150 kHz ~ 30 MHz according to the CISPR 22 Class B
- If the reading Quasi-Peak value is belowed the average limit, do not test average mode.




Test Engineer: H. S. Lee

5. TEST RESULTS

Line: HOT Line

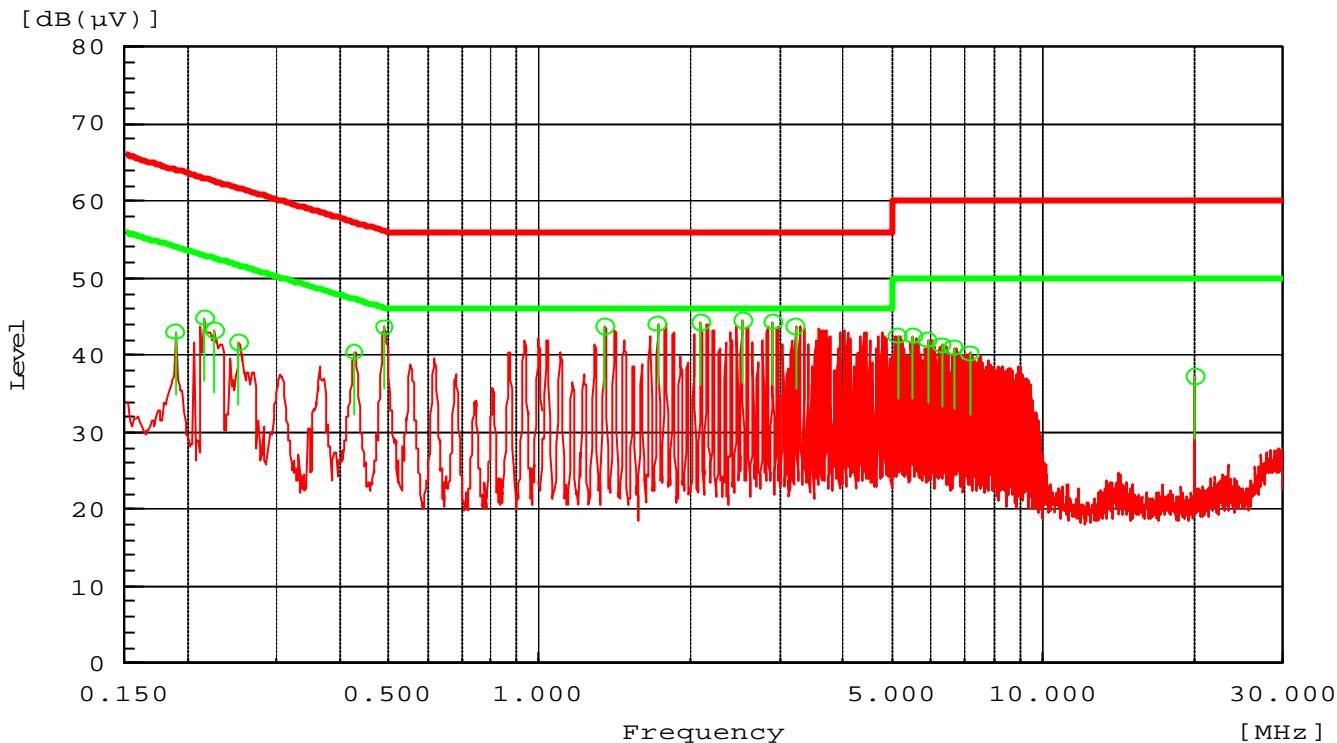

Line: Neutral Line

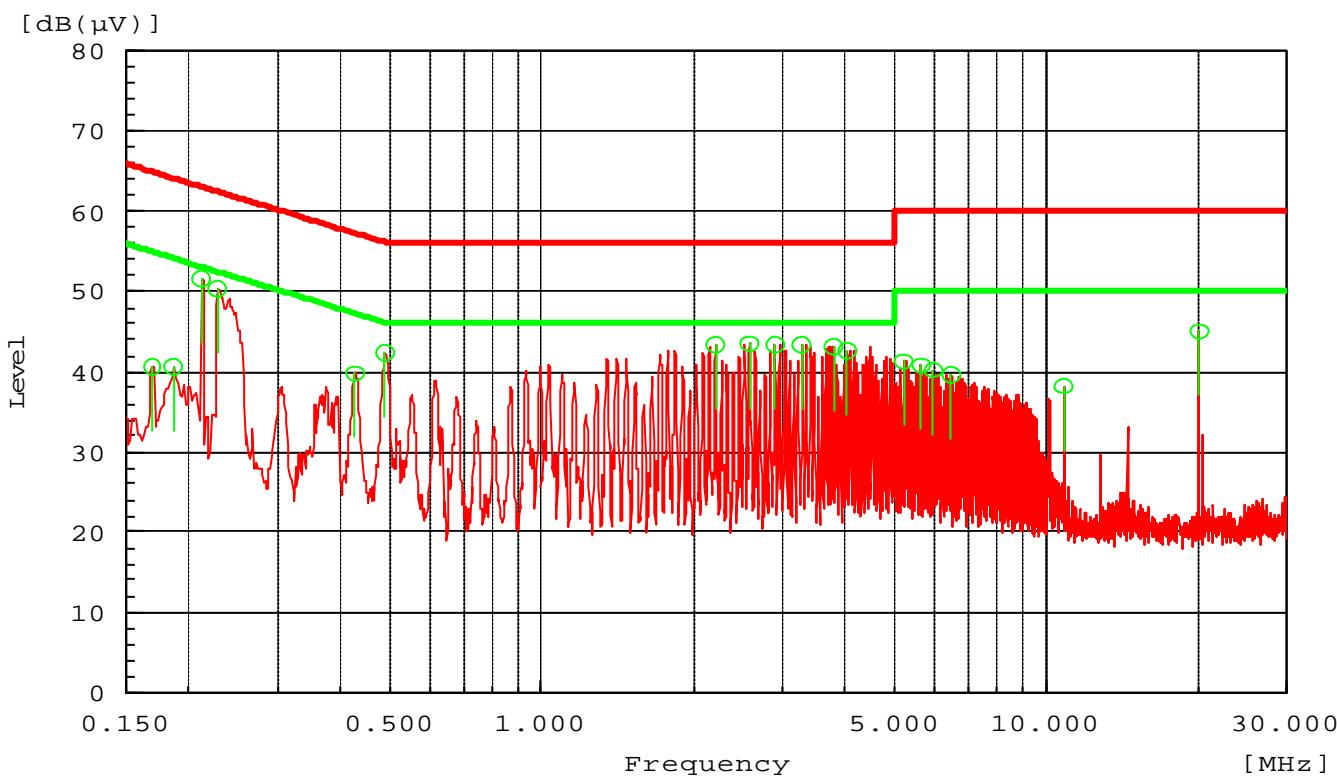

5. TEST RESULTS

5.3 Radiated Emissions Measurement

EUT	LCD Monitor / OR1720S (SN: N/A)
Limit apply to	FCC Part 15. 109(CISPR Pub.22 Class B)
Test Date	May 04, 2005
Operating Condition	Full "H" pattern display(1280*1024, 75Hz) & MP3 play mode
Environment Condition	Humidity Level: 40 %RH, Temperature: 26
Result	Passed by 4.55 dB

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Frequency [MHz]	Reading [dB μ V]	Polarization [*H/**V]	Ant.Factor [dB/m]	Cable Loss [dB]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
84.74	10.33	V	8.84	2.63	21.80	30.0	8.20
135.00	8.49	V	13.10	3.33	24.91	30.0	5.09
144.01	7.49	V	13.37	3.46	24.32	30.0	5.68
162.00	7.34	V	12.93	3.72	23.99	30.0	6.01
216.12	7.54	V	10.50	4.40	22.44	30.0	7.56
229.51	9.38	H	10.80	4.60	24.78	30.0	5.22
243.00	7.19	H	11.17	4.75	23.11	37.0	13.89
270.00	9.29	H	12.29	5.15	26.72	37.0	10.28
297.03	13.04	H	13.07	5.47	31.58	37.0	5.42
405.00	7.25	H	15.46	6.66	29.37	37.0	7.63
445.49	6.59	H	17.03	7.15	30.76	37.0	6.24
648.00	5.30	H	17.87	9.28	32.45	37.0	4.55

NOTES :* H : Horizontal polarization , ** V : Vertical polarization

1. Result = Reading + Antenna factor + Cable loss
2. Margin value = Limit - Result
3. The measurement was performed for the frequency range 30 MHz ~ 1000 MHz according to the CISPR 22 Class B



Test Engineer: H. S. Lee

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V / m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example: @ 648.00 MHz

Class B Limit	=	37.00 dB $\mu V/m$
Reading	=	5.30 dB μV
Antenna Factor + Cable Loss	=	17.87 + 9.28 = 27.15 dB/m
Total	=	32.45 dB $\mu V/m$
Margin	=	37.00 - 32.45 = 4.55 dB
	=	4.55 dB below Limit

7. List of test equipments used for measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7402A	H.P	US39110107	05-10-18
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3261A	Advantest	21720033	05-10-26
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	06-04-07
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESHS30	Rohde & Schwarz	0401901/002	05-10-18
<input type="checkbox"/>	Preamplifier	HP 8347A	HP	2834A00544	06-04-07
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	06-04-07
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	06-04-07
<input checked="" type="checkbox"/>	TriLog Antenna	VULB9160	Schwarz Beck	3082	05-07-27
<input type="checkbox"/>	LogBicon	VULB9165	Schwarz Beck	2023	05-07-06
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	05-06-10
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	05-07-09
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	05-07-09
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	05-06-10
<input type="checkbox"/>	Broad band Horn antenna	BBHA 9120D	Schwarz Beck	227	06-04-04
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input type="checkbox"/>	Thermo Hygrograph	3-3122	ISUZU	3312201	06-04-07
<input type="checkbox"/>	Aneriod BaroMeter	-	Regulus	-	06-03-15