

DATE: 29 May 2011

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
HomeFree Systems Ltd.

Equipment under test:

Universal Transmitter

UTX-830-2

Written by:




D. Shidowsky, Documentation

Approved by:



A. Moses, Test Engineer

Approved by:



I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for

HomeFree Systems Ltd.

Universal Transmitter

UTX-830-2

FCC ID: QUX-UTX-830-2

Equipment type: Part 15 Security/Remote Control Transceiver

47CFR15 Section 15231 (a-d)

Measurement procedure used is ANSI C63.4-2003.

Application for Certification:

prepared by:

Koby Cohen

Home Free

2 Habarzel St

Tel-Aviv 61131

Israel

Tel: 1972 3 647 8871

Fax: 1972 3 647 8872

e-mail: kobvc@dmatek.com

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	4
1.1 Administrative Information.....	4
1.2 List of Accreditations	5
1.3 Product Description	6
1.4 Test Methodology.....	6
1.5 Test Facility	6
1.6 Measurement Uncertainty	6
2. SYSTEM TEST CONFIGURATION-----	7
2.1 Justification.....	7
2.2 Special Accessories	7
2.3 Equipment Modifications	7
2.4 Configuration of Tested System.....	7
3. RADIATED MEASUREMENT TEST SET-UP PHOTOS -----	8
4. AVERAGE FACTOR CALCULATION -----	10
4.1 Test Instrumentation Used	11
5. PERIODIC OPERATION -----	12
5.1 Specification	12
5.2 Requirements	12
5.3 Results.....	12
5.4 Test Instrumentation Used	16
6. FIELD STRENGTH OF FUNDAMENTAL-----	17
6.1 Test Specification	17
6.2 Test Procedure	17
6.3 Measured Data.....	17
6.4 Test Instrumentation Used, Field Strength of Fundamental	21
7. RADIATED EMISSION, 9 KHZ – 30 MHZ -----	22
7.1 Test Specification	22
7.2 Test Procedure	22
7.3 Measured Data.....	22
7.4 Test Instrumentation Used, Radiated Measurements	23
7.5 Field Strength Calculation	23
8. RADIATED EMISSION 30 MHZ - 4330 MHZ-----	24
8.1 Test Specification	24
8.2 Test Procedure	24
8.3 Test Data.....	25
8.4 Test Instrumentation Used, Radiated Measurements	27
9. BANDWIDTH-----	28
9.1 Test procedure	28
9.2 Results table.....	29
9.3 Test Equipment Used.....	30
10. 11. APPENDIX A - CORRECTION FACTORS -----	31
10.1 Correction factors for CABLE.....	31
10.2 Correction factors for CABLE	32
10.3 Correction factors for CABLE	33
12.6 Correction factors for LOG PERIODIC ANTENNA	34
10.4 Correction factors for LOG PERIODIC ANTENNA	35
10.5 Correction factors for BICONICAL ANTENNA.....	36
10.6 Correction factors for ACTIVE LOOP ANTENNA	37

1. General Information

1.1 Administrative Information

Manufacturer: HomeFree Systems Ltd.

Manufacturer's Address: 2 Habarzel St.
Tel-Aviv 61131
Israel
Tel: +972-3-647-8871
Fax: +972-3-647-8872

Manufacturer's Representative: Lev Rusman

Equipment Under Test (E.U.T): Universal Transmitter

Equipment Model No.: UTX-830-2

Equipment Serial No.: Not Designated

Date of Receipt of E.U.T: 26.04.11

Start of Test: 26.04.11

End of Test: 27.04.11

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15 Subpart C

1.2 ***List of Accreditations***

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The Universal Transmitter (UTX) is a small, permanently fixed transmitting device that alerts care center Staff members whenever a connected sensor is activated. The UTX830 can be connected to any sensor that can open or close a dry contact. For example, it can be connected to a door status sensor (e.g., magnetic door sensor) that is located close to a monitored door or exit (e.g., monitored door is opened). The UTX830 comes in two versions. One features an external power supply with a backup battery and the other is powered by battery only. The Universal Transmitter is not for use outside the monitored area.

The battery powered version was tested operating at 433 MHz.

1.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

2. System Test Configuration

2.1 ***Justification***

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position.

2.2 ***Special Accessories***

No special accessories were needed.

2.3 ***Equipment Modifications***

No modifications were needed in order to achieve compliance

2.4 ***Configuration of Tested System***




Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photos



Figure 2. Radiated Emission Test 9 kHz – 30 MHz



Figure 3. Radiated Emission Test 30 MHz – 1000 MHz



Figure 4. Radiated Emission Test Above 1000 MHz

4. Average Factor Calculation

1. Burst duration = 5.67msec
2. Time between bursts = 255.0msec, >100ms

3. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

Note Pulse duration and pulse period was considered worst case always ON cines unit transmits randomly.

$$\text{Average Factor} = 20 \log \left[1 \times \frac{5.67}{100} \times 1 \right] = -24.92dB$$

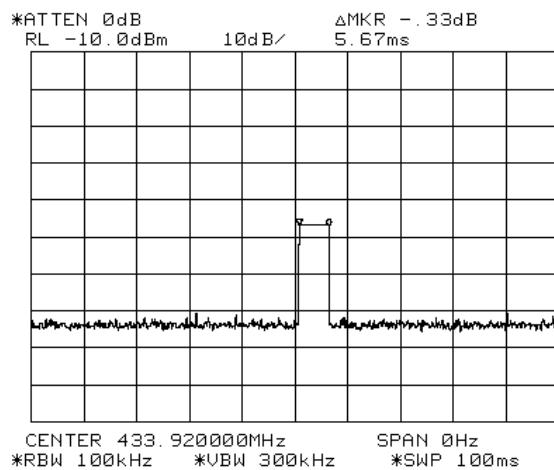


Figure 5. Transmission pulse duration = 5.67 msec

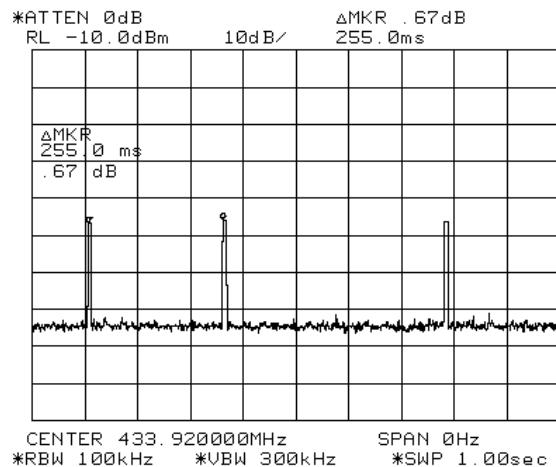


Figure 6. Transmission pulse period = 255.0msec , >100ms

4.1 *Test Instrumentation Used*

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 27, 2011	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	N/A	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	See plots in Figure 7 to Figure 9.	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	See plot in Figure 10	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature:  Date: 30.05.11

Typed/Printed Name: A. Moses

Periodic Operation

E.U.T Description Universal Transmitter
Type UTX-830-2
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

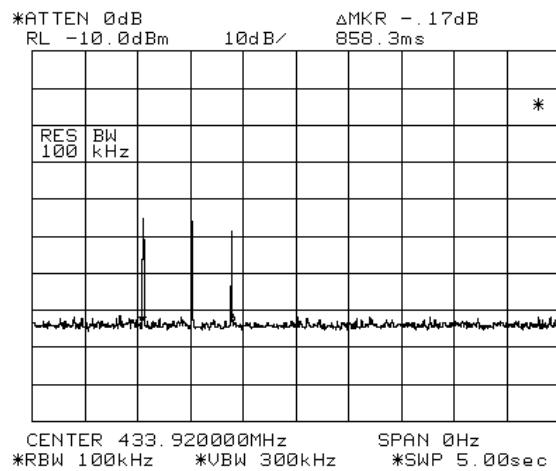


Figure 7. Automatic Operated Transmitter Close Door Situation

Periodic Operation

E.U.T Description Universal Transmitter
Type UTX-830-2
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)


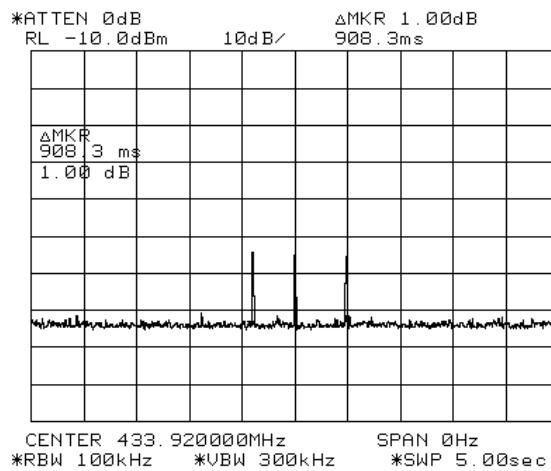


Figure 8. Automatic Operated Transmitter Open Door Situation

Periodic Operation

E.U.T Description Universal Transmitter
Type UTX-830-2
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

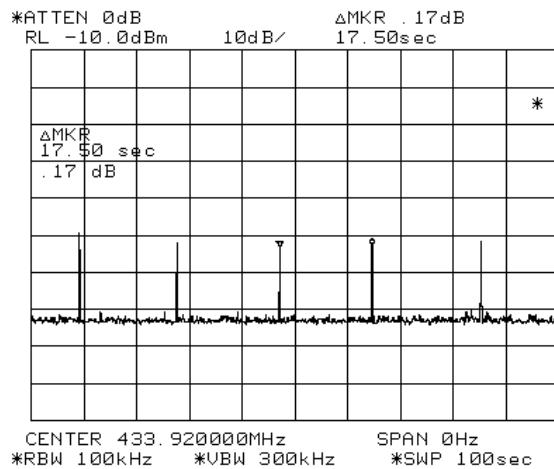

**Figure 9. Alarm Signal Transmitted While Door is Open
Once Every 17.5sec (5.67msec Single Burst)**

Periodic Operation

E.U.T Description Universal Transmitter
 Type UTX-830-2
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

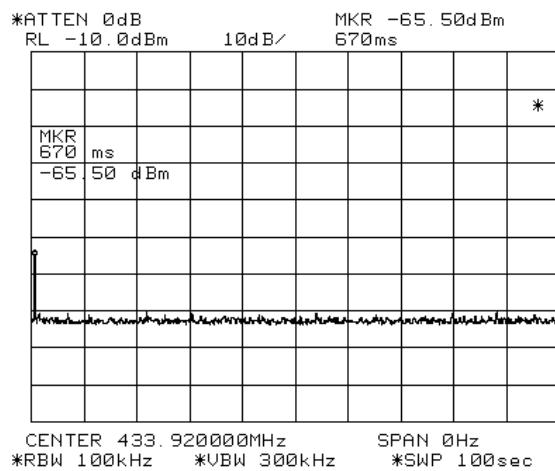


Figure 10. Supervision Signal Once Every One Hour (5.67 Single Burst)

5.4 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 Year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year

6. Field Strength of Fundamental

6.1 **Test Specification**

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 **Test Procedure**

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

6.3 **Measured Data**

JUDGEMENT: Passed by 10.57 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 11 to Figure 13.

TEST PERSONNEL:

Tester Signature:  Date: 30.05.11

Typed/Printed Name: A. Moses

Field Strength of Fundamental

E.U.T Description Universal Transmitter
 Type UTX-830-2
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters Detector: Peak

Freq. (MHz)	Pol. V/H	Peak Reading (dB μ V/m)	Average Factor (dB)	AVG Result (dB μ V/m)	AVG Specification (dB μ V/m)	Margin (dB)
433.92	H	92.22	-24.92	67.3	80.83	-13.53
433.92	V	95.18	-24.92	70.26	80.83	-10.57

Figure 11. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Reading.” (dB μ V/m) included the “Correction Factors”.
3. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. “Average Factor = $20 \log [(\text{burst duration}/100\text{msec}) * \text{Num of burst within 100msec}]$ = $20 \log [(2/100) * 1] = -34.0$
5. “Average Result” (dB μ V/m)=Peak Reading (dB μ V/m)+D.C.F. (dB)

Field Strength of Fundamental

E.U.T Description Universal Transmitter
 Type UTX-830-2
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal

Test Distance: 3 meters

Detector: Peak

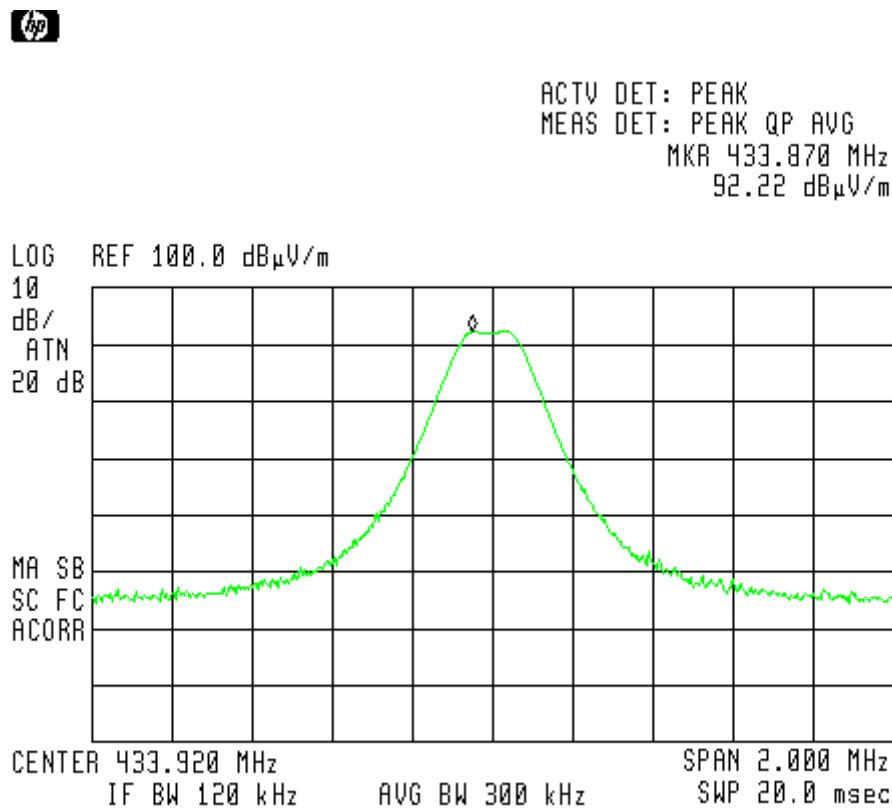


Figure 12. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL. Detector: Peak

Field Strength of Fundamental


E.U.T Description Universal Transmitter
 Type UTX-830-2
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detector: Peak

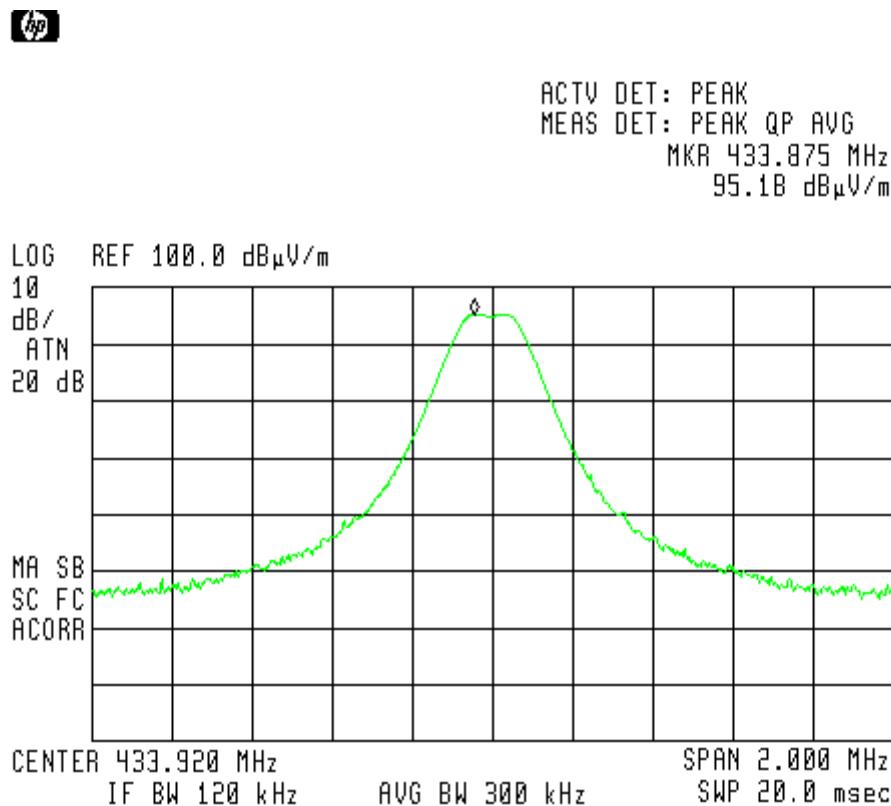

**Figure 13. Field Strength of Fundamental. Antenna Polarization: VERTICAL.
 Detector: Peak**

6.4 **Test Instrumentation Used, Field Strength of Fundamental**

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 318 MHz. This frequency was measured using a peak detector.

7.3 Measured Data

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

No signals were detected in the frequency range of 9 kHz – 30 MHz.

TEST PERSONNEL:

Tester Signature:  Date: 30.05.11

Typed/Printed Name: A. Moses

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2010	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
 RA: Receiver Amplitude [dB μ V]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

8. Radiated Emission 30 MHz - 4330 MHz

8.1 Test Specification

30 - 4330 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 4.33 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

8.3 **Test Data**

JUDGEMENT: Passed by 27.75 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 27.75 dB in the worst case at the frequency of 867.84 MHz, vertical polarization.

TEST PERSONNEL:

Tester Signature:  Date: 30.05.11

Typed/Printed Name: A. Moses

Radiated Emission

E.U.T Description Universal Transmitter
 Type UTX-830-2
 Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 4330 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency (MHz)	Antenna Polarity (H/V)	Peak Reading (dB μ V/m)	Average Factor (dB μ V/m)	Average Result dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
867.84	V	58.0	-24.92	33.08	60.83	-27.75
867.84	H	57.8	-24.92	32.88	60.83	-27.95
1301.76	V	52.0	-24.92	27.08	60.83	-33.75
1301.76	H	51.3	-24.92	26.38	60.83	-34.45

**Figure 14. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. “Peak Reading.” (dB μ V/m) included the “Correction Factors”.
3. “Correction Factors” (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. “Average Result” (dB μ V/m)=Peak Reading (dB μ V/m)+ Average Factor (dB)

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	January 13, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 1, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 27, 2011	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

9. Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 120 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

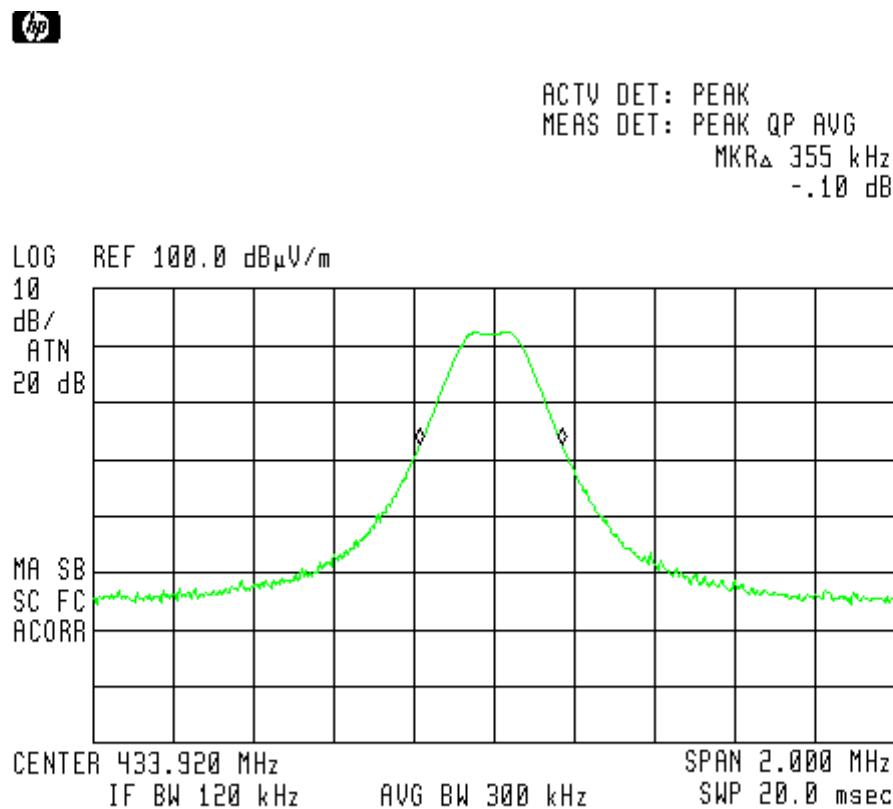


Figure 15 Bandwidth

9.2 Results table

E.U.T Description: Universal Transmitter

Model: UTX-830-2

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading (kHz)	Specification (1) (kHz)	Margin (kHz)
355	1084.80	-729.8

Figure 16 Bandwidth

JUDGEMENT: Passed by 729.8 kHz

TEST PERSONNEL:

Tester Signature: ITL Date: 30.05.11

Typed/Printed Name: A. Moses

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

9.3 **Test Equipment Used.**

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 25, 2010	1 year
RF Section	HP	85420E	3705A00248	November 25, 2010	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 23, 2011	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 17 Test Equipment Used

10. 11. APPENDIX A - CORRECTION FACTORS

10.1 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

10.3 Correction factors for

CABLE from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

10.4 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

10.5 Correction factors for

BICONICAL ANTENNA

**Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

10.6 Correction factors for ACTIVE LOOP ANTENNA

Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2