

Letter of acceptance

Customer name: Hanzi

Customer part number: Concentric circle coils

Our model: G43.5-0.8-6.7UH-12MM

Sample delivery date: July 12, 2024

supplier: Dongguan Jierith Technology Co., LTD

Draw	Check	Approval
Lu Lin	Deng Xianggui	Lu Rusheng

Customer recognition:

Appositional	Incongruent case	Acknowledge
Reserve injection		

Dongguan Jierith Technology Co., LTD


Tel: _____

Fax: 86+13632701380

Address: No.96 Longhu Road, Dalingshan Town, Dongguan (Jinxiongda Science Park L Building 3 / F)

Customer name	Customer part number	Our model	Edition	Day period
Hanzi		G43.5-0.8-6.7UH-12MM	A0	2024.07.12

一、Plane structure: unit:MM

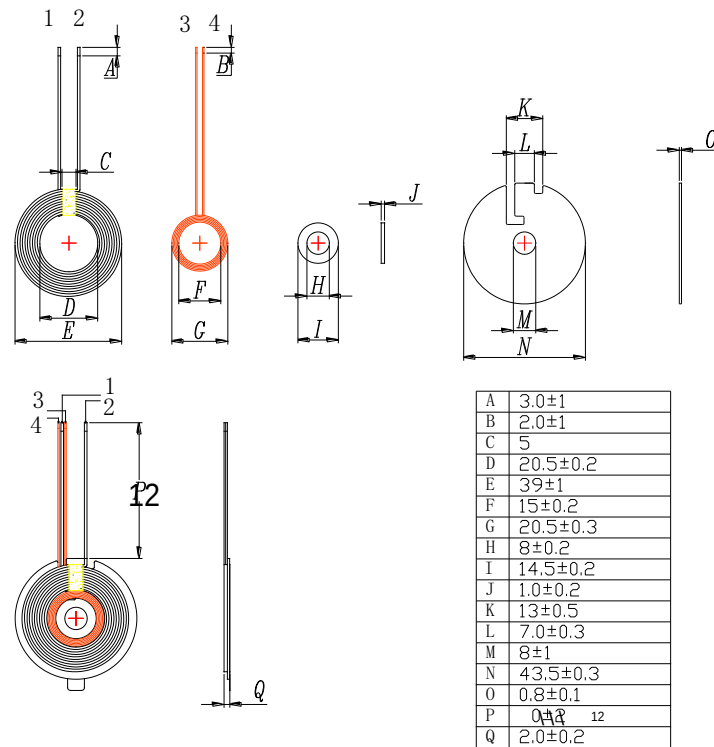

二、Product parameter:

Foot position	Wire diameter	Number of turns	Remark
1-2	0.08*24*2P	10	Hot air wire
3-4	0.08*24P	11	Hot air wire

三、Technical requirement:

1. Fix the end of the wire to prevent loose and broken wires
2. According to customer requirements, the long thread is cut and tinned, and the tinning depth is 3±1MM
3. Spot the appropriate white glue on the magnetic disc, attach the coil, and ensure that the product surface is clean and tidy during the process.
4. The magnetic disc used is with round hole, without damage

四、Electrical parameter:

1. Inductance value,:

$$\text{PIN } 1 - 2 = 6.7\mu\text{H} \pm 0.3\text{UH}$$

$$\text{PIN } 3 - 4 = 6.7\mu\text{H} \pm 0.3\text{UH}$$

The above inductance values are based on Quanhua 1062A instrument, 10KHZ/0.3Vrms as the standard or equivalent instrument.

五、Bill of materials:

Serial number	Name	Material	Supplier	Remark
1	Hot air wire	0.08*24*2P		1-2
3	Hot air wire	0.08*24P		3-4
4	Magnetic sheet	G43.5*0.8 Hard substrate		
5	Magnetic sheet	G14.5*8*1 Hard substrate		
6	tin	High temperature environmental protection		
7	White glue	BY882		
8	Double-sided adhesive	diameter 42mm		
9	High temperature tape	5MM		
10	magnet	7.65*2.0*3200GS		Match, not pack