



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>



Get Wired by Wireless Technology™

Dates of Tests: August 08 ~ 11, 2006
 Test Report S/N: LR500110608L
 Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

QWGS300

APPLICANT

HASSNET Inc.

FCC Classification : **FHSS Sequence Spread Spectrum (FHSS)**

Manufacturing Description : **Bluetooth Audio Headset**

Manufacturer : **HASSNET Inc.**

Model name : **S300**

Test Device Serial No.: : **Identification**

Rule Part(s) : **FCC Part 15.247 Subpart C; ANSI C-63.4-2003**

Frequency Range : **2402 ~ 2480MHz**

RF power : **0.89dBm - Conducted**

Data of issue : **August 11, 2006**

This test report is issued under the authority of:

Dong-Min JUNG, Technical Manager

The test was supervised by:

Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.

NVLAP[®]

NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S -----	3
2. INFORMATION'S ABOUT TEST ITEM -----	4
3. TEST REPORT -----	6
3.1 SUMMARY OF TESTS -----	6
3.2 TECHNICAL CHARACTERISTICS TEST -----	7
3.2.1 CARRIER FREQUENCY SEPARATION -----	7
3.2.2 NUMBER OF HOPPING FREQUENCIES -----	9
3.2.3 20 dB BANDWIDTH -----	12
3.2.4 TIME OF OCCUPANCY (Dwell Time) -----	14
3.2.5 TTANSMITTER OUTPUT POWER -----	16
3.2.6 BAND - EDGE -----	18
3.2.7 FIELD STRENGTH OF HARMONICS -----	27
3.2.9 AC CONDUCTED EMISSIONS -----	29
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS -----	34

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2006-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2007-07-13	EMC accredited Lab.
FCC	U.S.A	610755	2008-03-28	FCC filing
VCCI	JAPAN	R2133, C2307	2008-06-22	VCCI registration
IC	CANADA	IC5799	2008-04-23	IC filing

2. Information's about test item

2-1 Client

2-2 Manufacturer

2-3 Equipment Under Test (EUT)

Trade name	:	Bluetooth Audio Headset
FCC ID	:	QWGS300
Model name	:	S300
Serial number	:	Identification
Date of receipt	:	August 07, 2006
EUT condition	:	Pre-production, not damaged
Antenna type	:	Chip antenna Max Gain 2.46 dB
Frequency Range	:	2402 ~ 2480MHz
RF output power Range	:	-6dBm~+4dBm (Class 2)
Number of channels	:	79
Channel spacing	:	1MHz
Channel Access Protocol	:	Frequency Hopping
Type of Modulation	:	GFSK
Power Source	:	3.7V (Rechargeable Lithium Polymer)
AC/DC Adaptor	:	Model name: MCW4401-US Input: 100 ~ 240Vac 50/60Hz 0.3A Output: 5.2Vdc 650mA

2-4 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

2-5 Ancillary Equipment – Bluetooth mode

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-
-	-	-	-

2-6 Ancillary Equipment – Charging mode

Equipment	Model No.	Serial No.	Manufacturer
PC	Dimension TM 3000	8D2SF1S	DELL
Monitor	VS11353	N/A	ViewSonic
Keyboard	SK-8110	1030	DELL
Mouse	MO56UO	510022473	DELL
Print	Deskjet 600K	SG7631B1XX	HP

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 75 hops		C
15.247(a)	20 dB Bandwidth	< 1 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.207 /15.107	AC Conducted Emissions	EN 55022	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 Carrier Frequency Separation

Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz (1% of the span or more) Sweep = auto

VBW = 30 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
0.990	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup


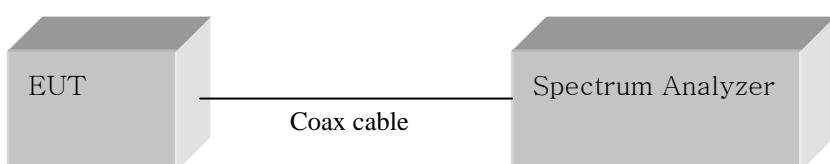


Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation

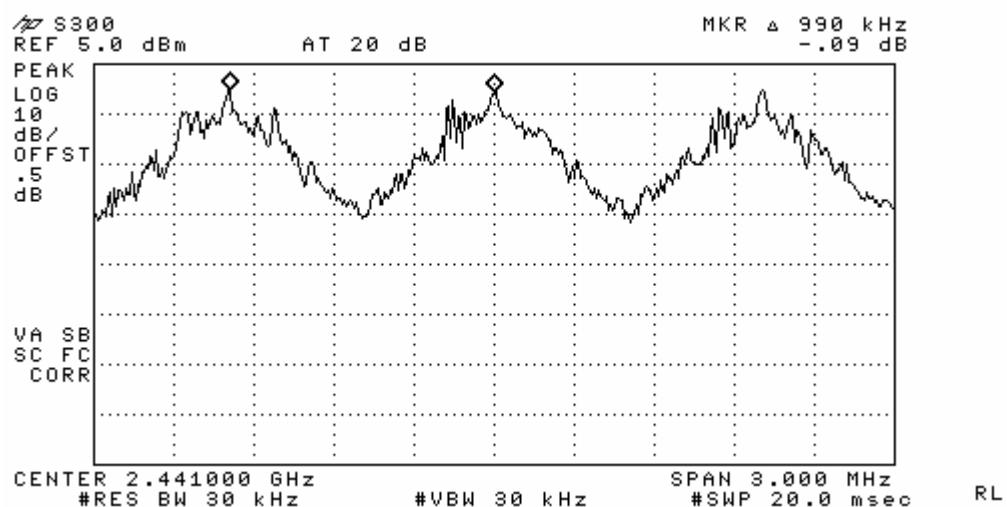

3.2.2 Number of Hopping Frequencies

Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5MHz, Stop = 2414.5 MHz

2: Start = 2414.5MHz, Stop = 2439.5 MHz

3: Start = 2439.5MHz, Stop = 2464.5 MHz

4: Start = 2464.5MHz, Stop = 2489.5 MHz

RBW = 300 kHz (1% of the span or more) Sweep = auto

VBW = 300 kHz (VBW \geq RBW) Detector function = peak

Trace = max hold Span = 25MHz

Measurement Data: Complies

Total number of Hopping Channels	79
---	----

- See next pages for actual measured spectrum plots.



Minimum Standard:

At least 75 hopes



Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Number of Hopping Frequencies

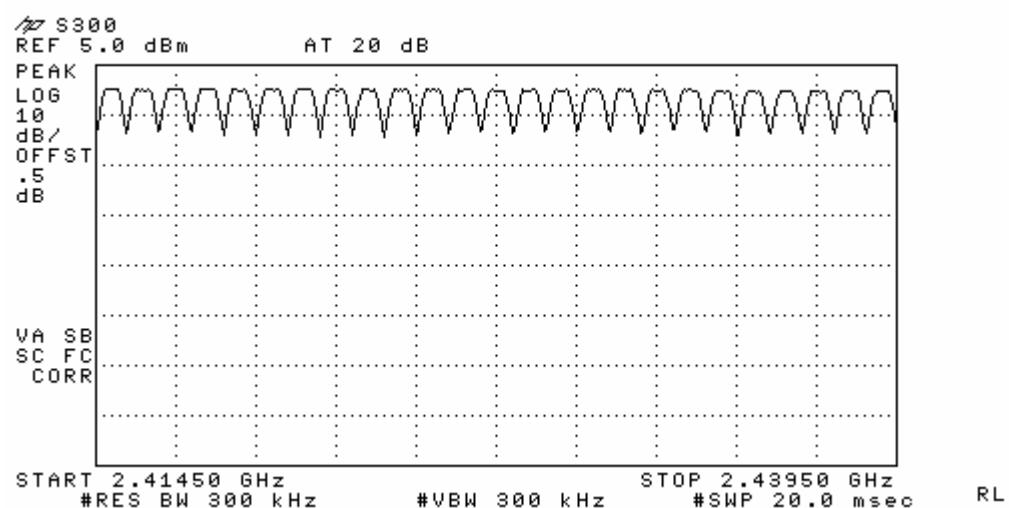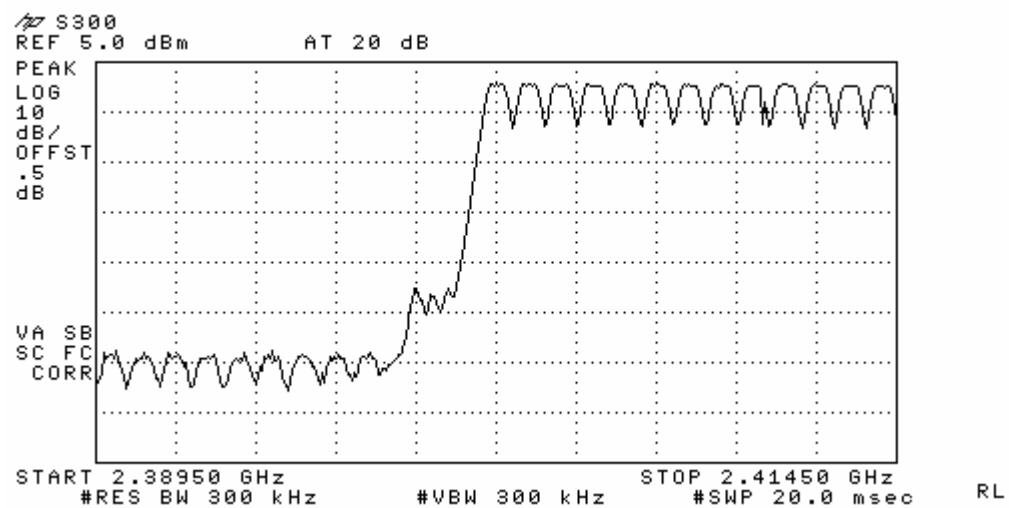

Number of Hopping Frequencies

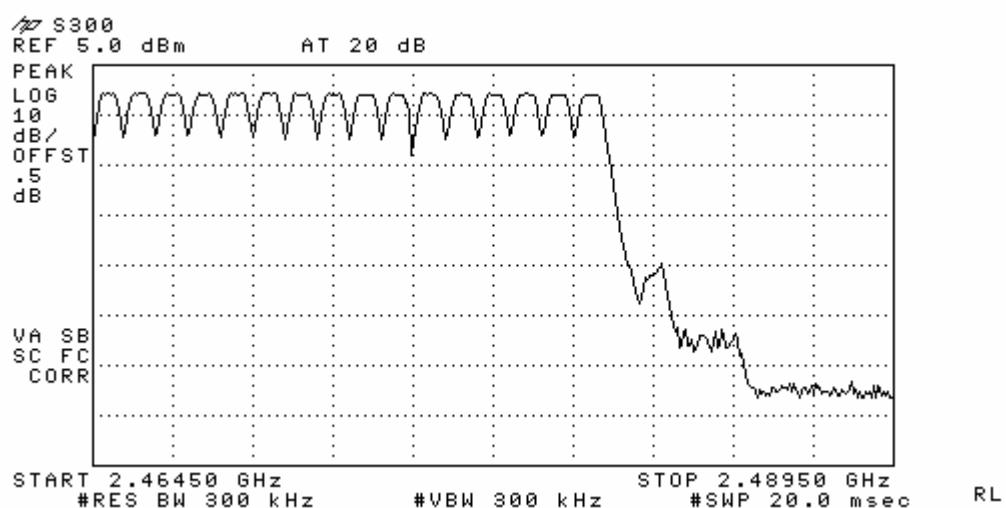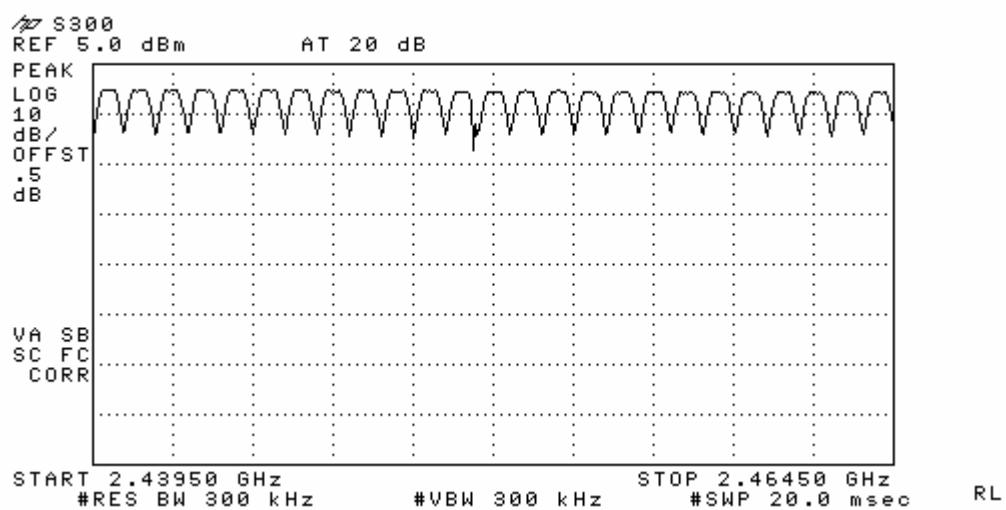

3.2.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz Sweep = auto

VBW = 30 kHz (VBW \geq RBW) Detector function = peak

Trace = max hold

Measurement Data:

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2441	39	0.920	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

The transmitter shall have a maximum 20dB bandwidth of 1 MHz.

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

20 dB Bandwidth

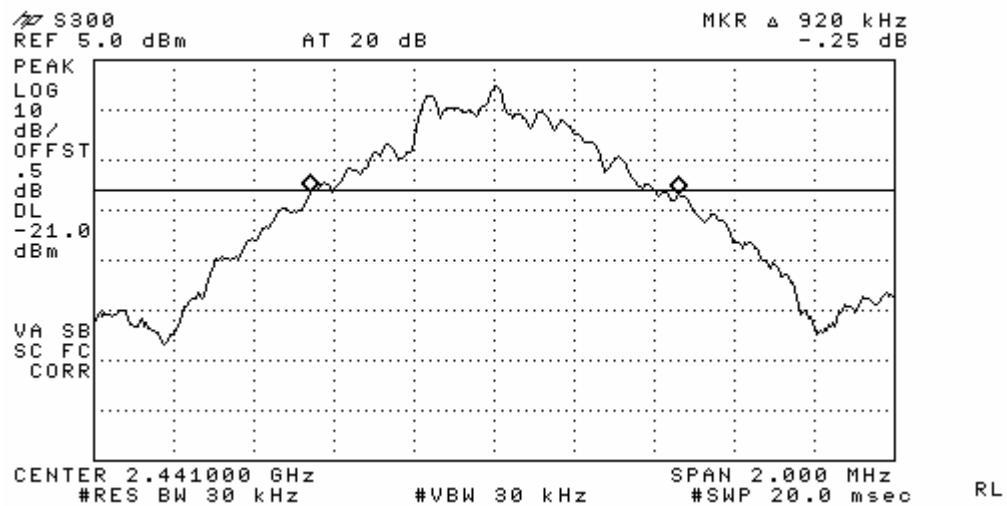

3.2.4 Time of Occupancy (Dwell Time)

Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW \geq RBW)

Trace = max hold

Detector function = peak

Measurement Data:

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results	
			Dwell Time (ms)	Result
39	2441	DH 1	135.21	Complies
		DH 3	270.23	Complies
		DH 5	310.78	Complies




- See next pages for actual measured spectrum plots.

Minimum Standard:

0.4 seconds within a 30 second period per any frequency

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

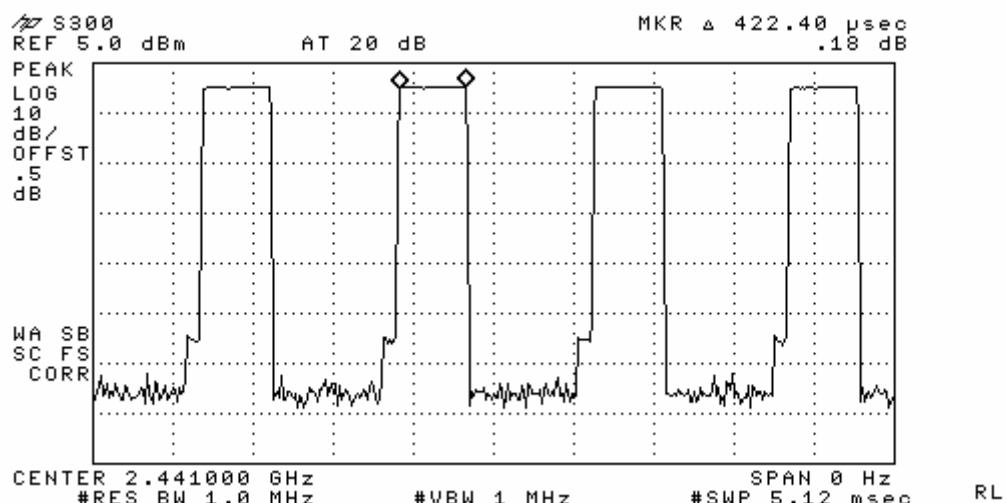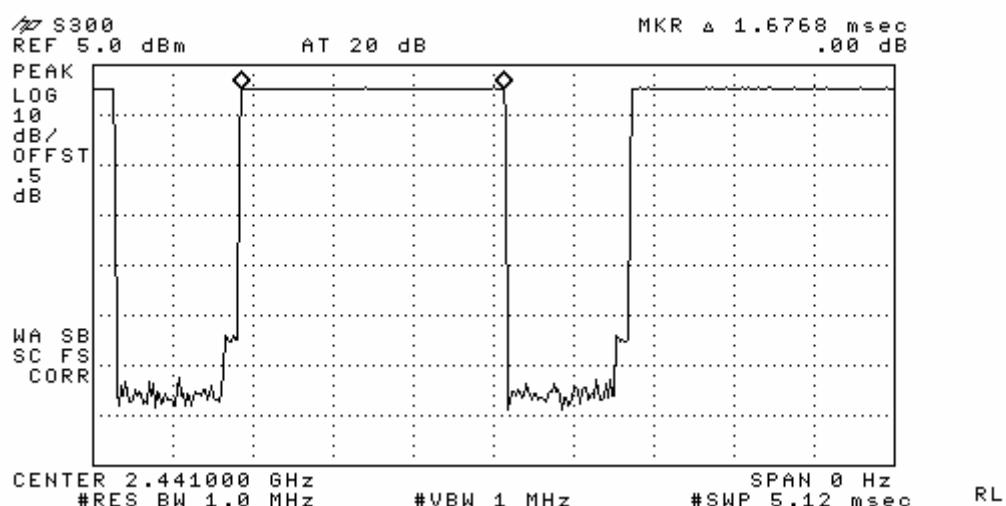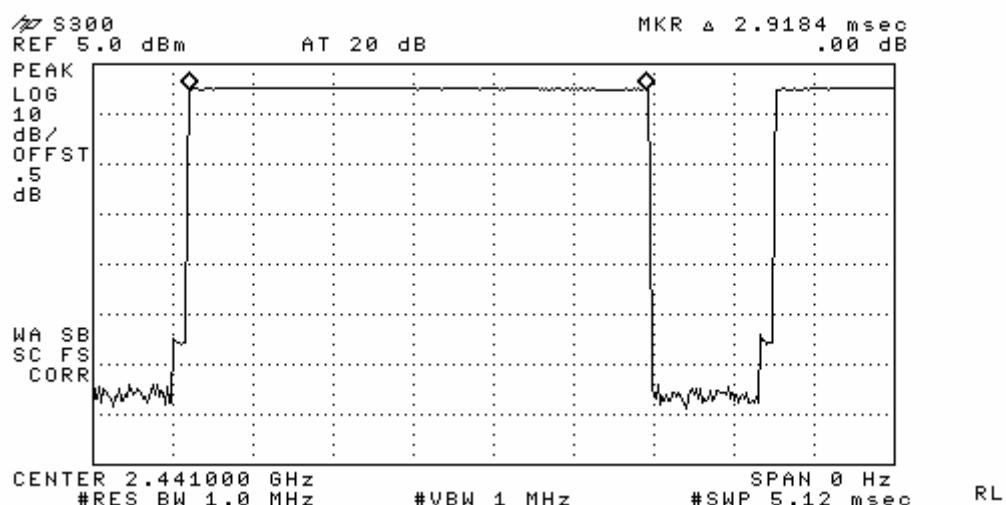DH 1**DH 3****DH 5**

3.2.5 Transmitter Output Power

Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW \geq RBW)

Detector function \equiv peak

Trace = max hold

Sweep = auto

Measurement Data:

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	0.89	1.227	Complies
2441	39	0.24	1.057	Complies
2480	78	-0.46	0.899	Complies




- See next pages for actual measured spectrum plots.

Minimum Standard:	< 1W
--------------------------	------

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Peak Output Power

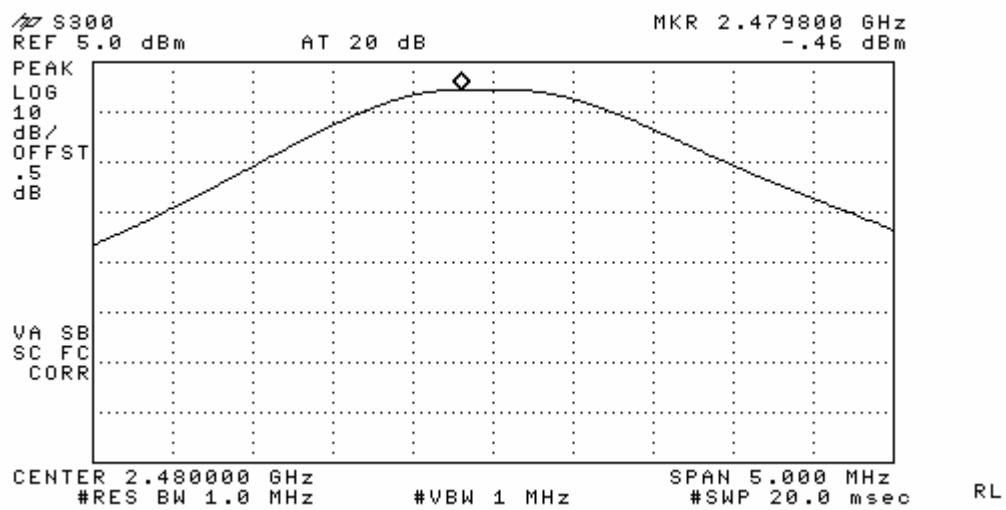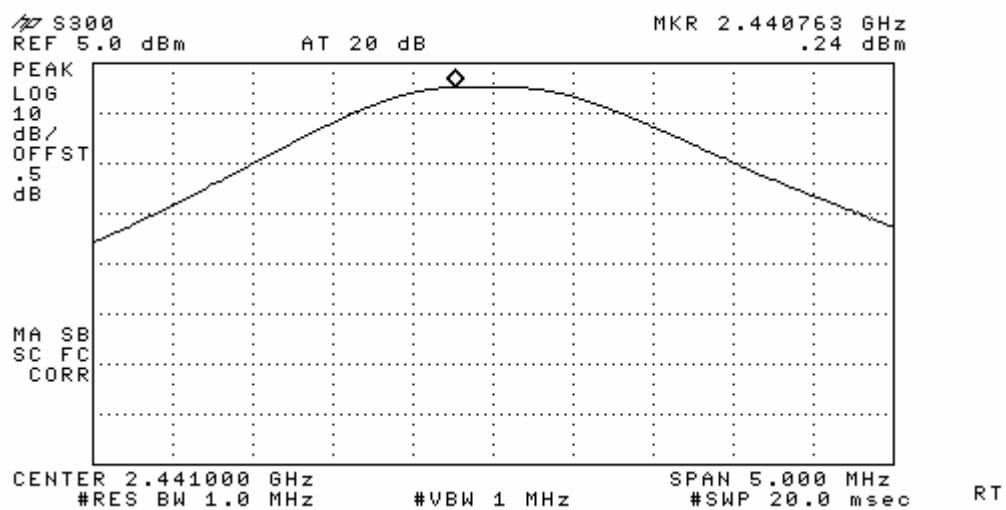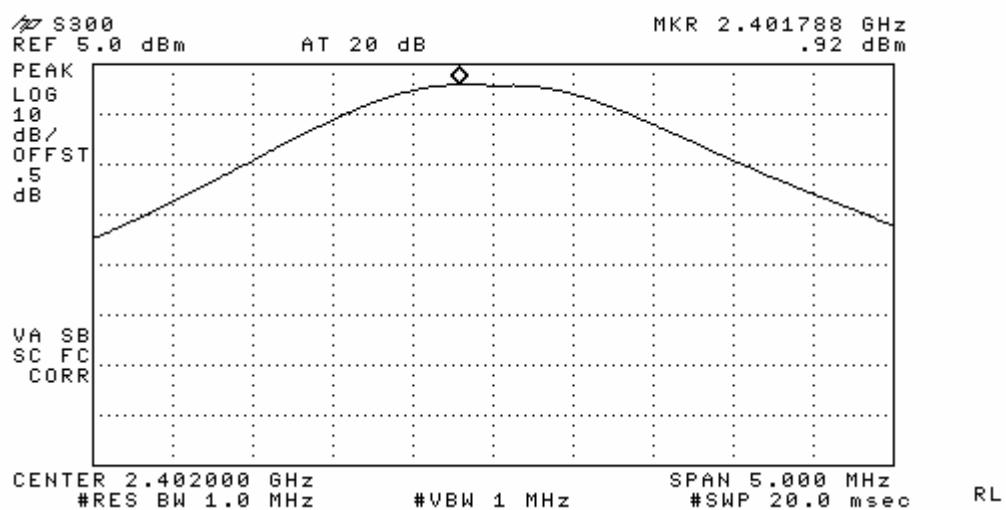

3.2.6 Band - edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz Detector function = peak

Trace = max hold Sweep = auto



Measurement Data: Complies



- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------



Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

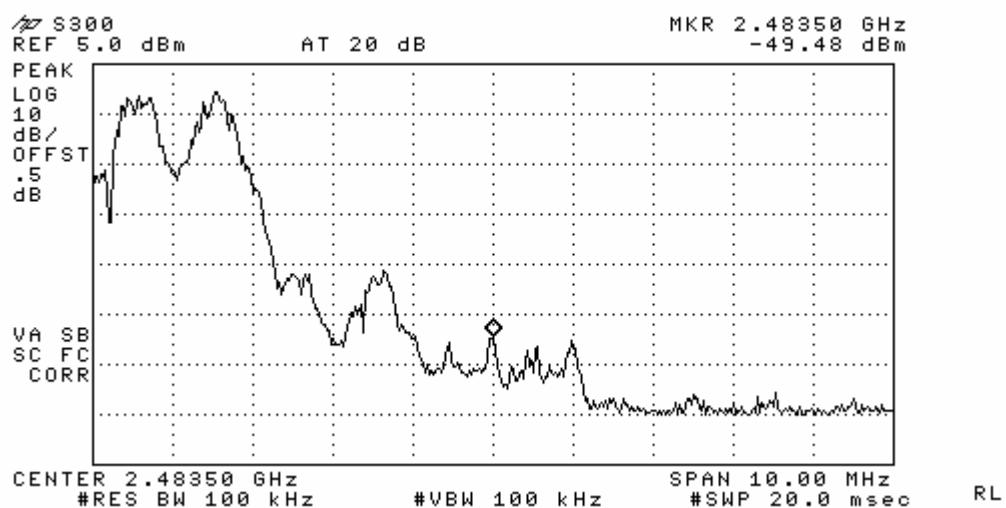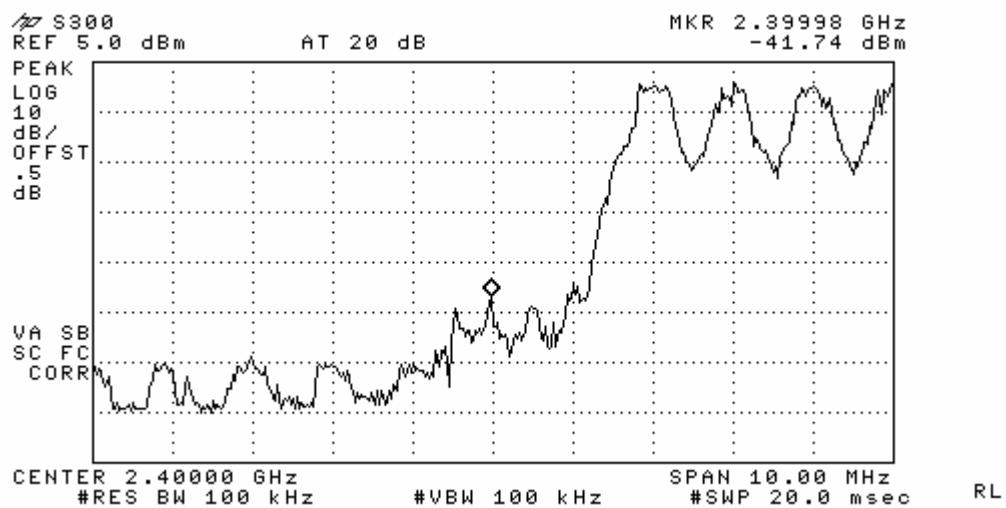Band - edge (with Hopping)

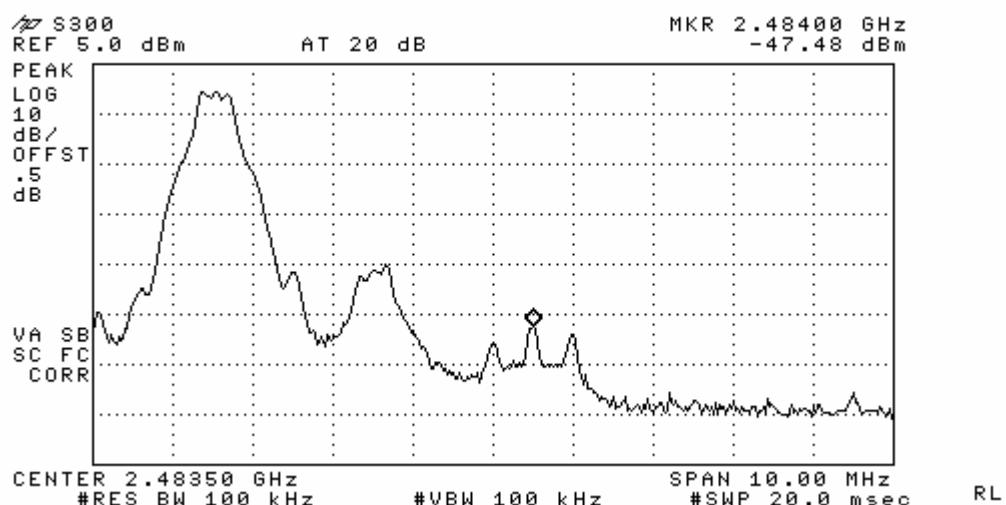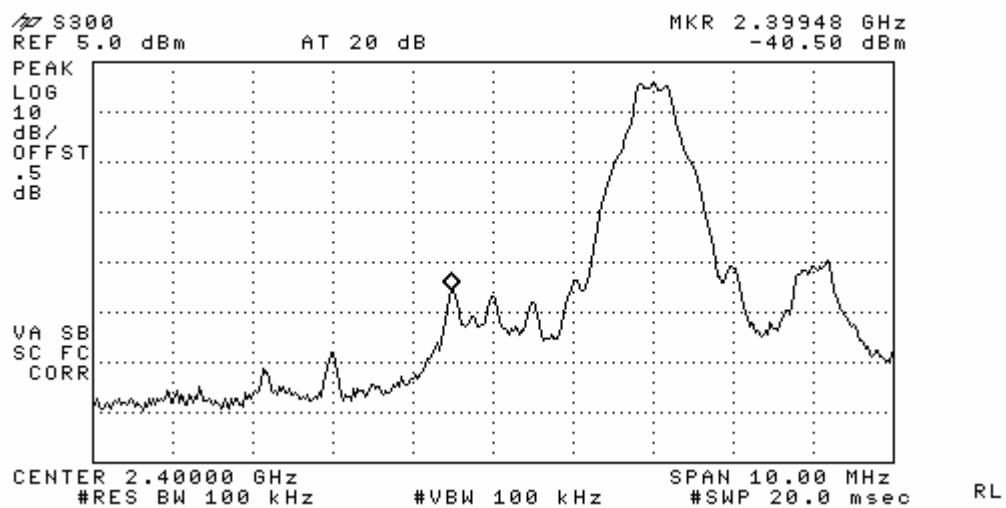
Band - edge (without Hopping)

**Band - edge (at 20 dB blow) – Low channel
Frequency Range = 30 MHz ~ 10th harmonic.**

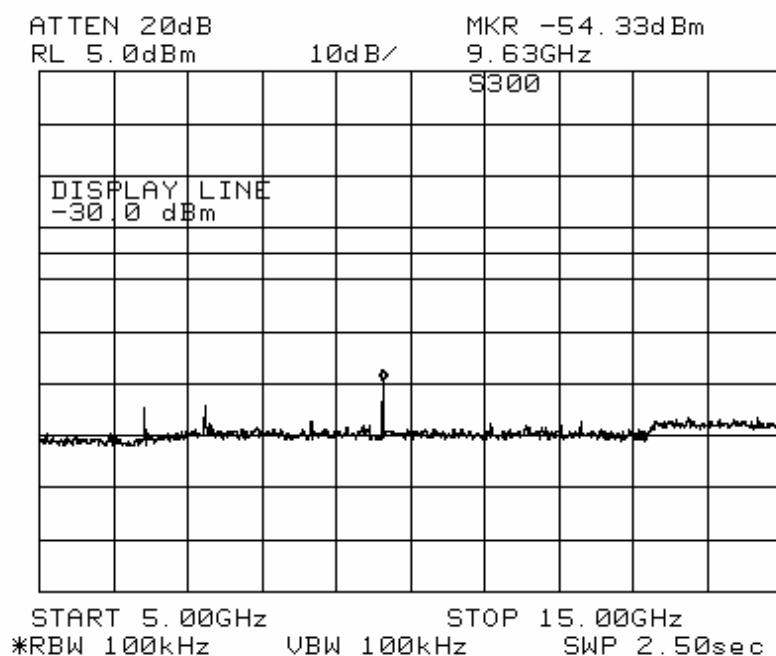
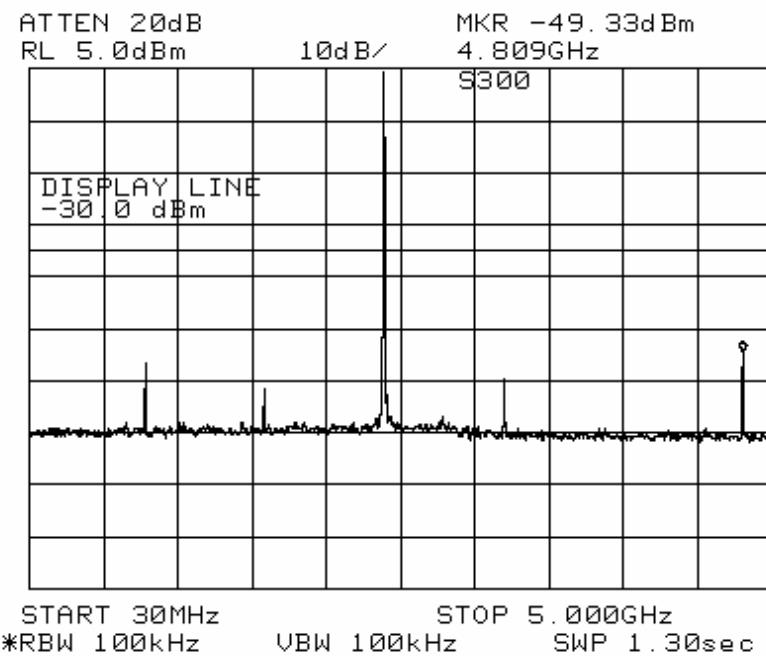


Band - edge (at 20 dB blow) – Low channel
Frequency Range = 30 MHz ~ 10th harmonics.

- Continues

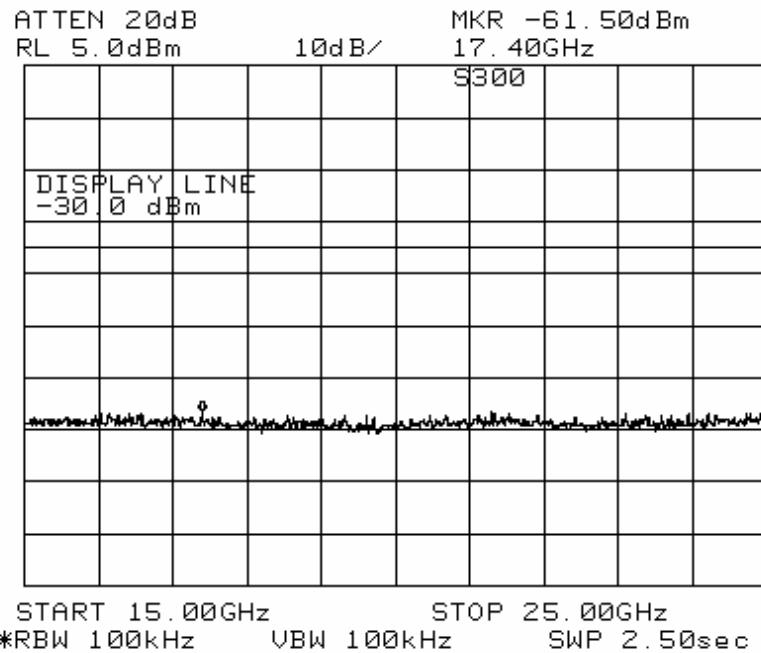


Band - edge (at 20 dB blow) – Mid channel
Frequency Range = 30 MHz ~ 10th harmonic.

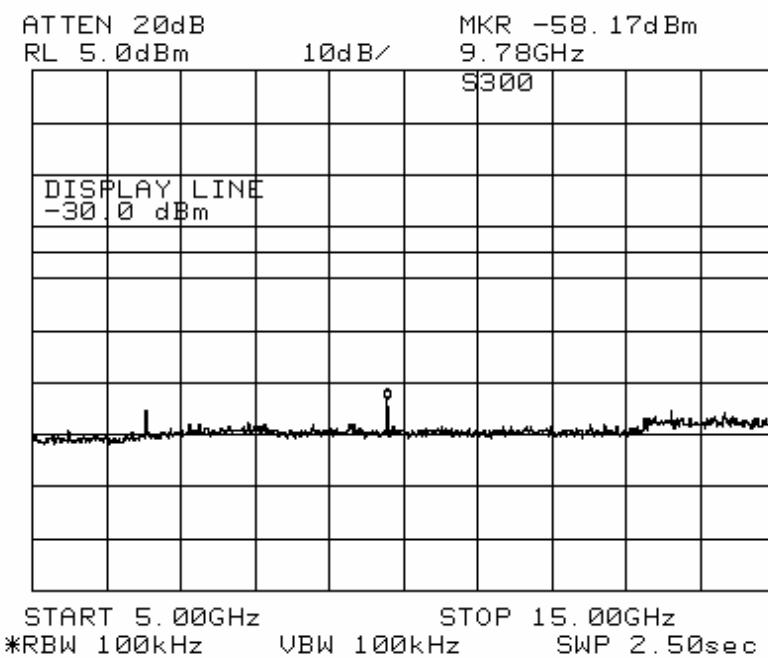
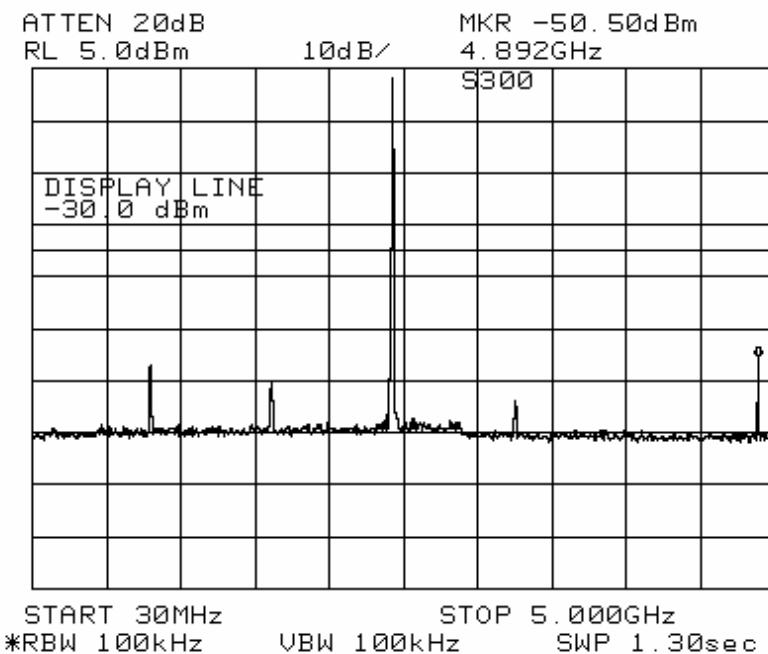


Band - edge (at 20 dB blow) – Mid channel
Frequency Range = 30 MHz ~ 10th harmonics.

- Continues

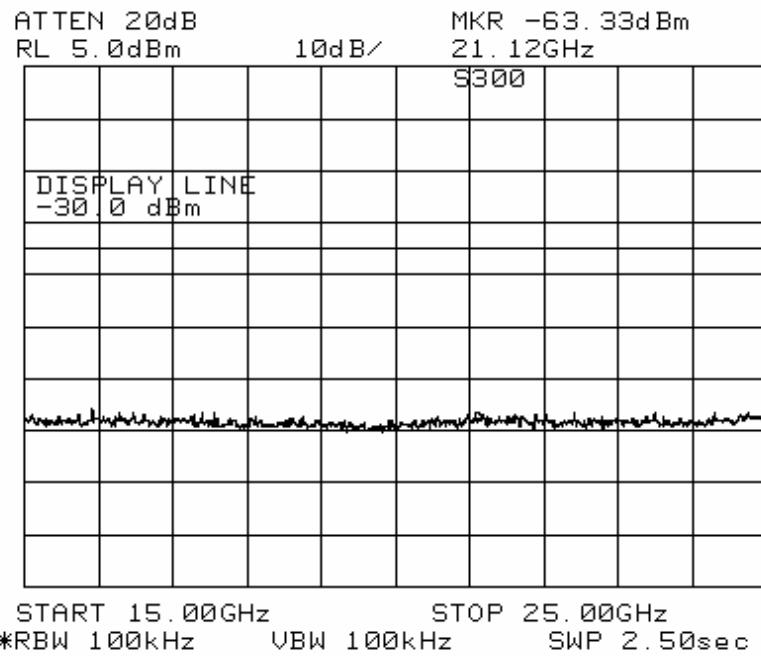


**Band - edge (at 20 dB blow) – High channel
Frequency Range = 30 MHz ~ 10th harmonic.**

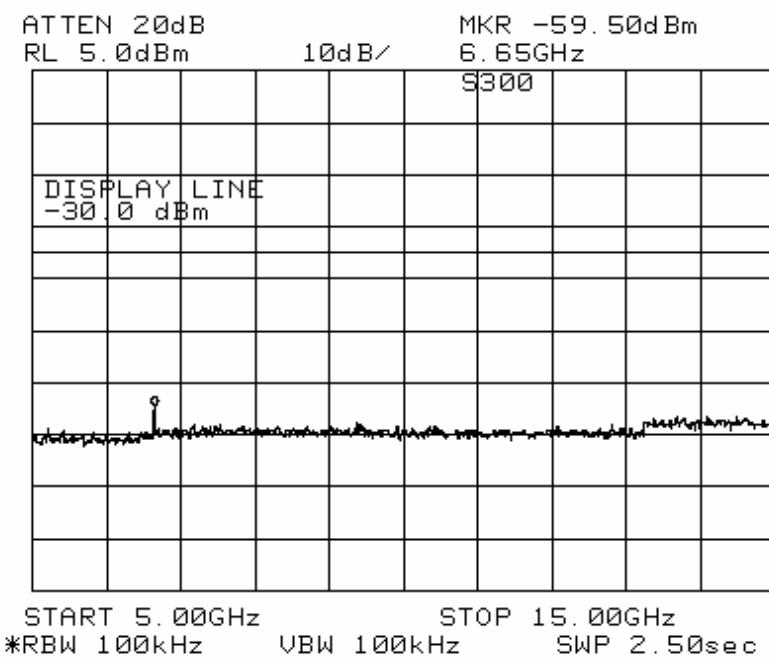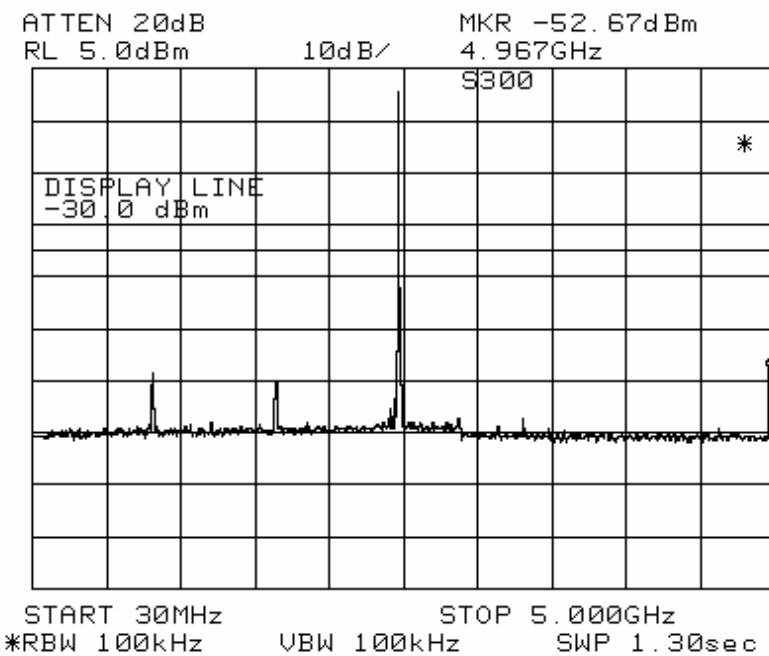

**Band - edge (at 20 dB blow) – High channel
Frequency Range = 30 MHz ~ 10th harmonics.**

- Continues

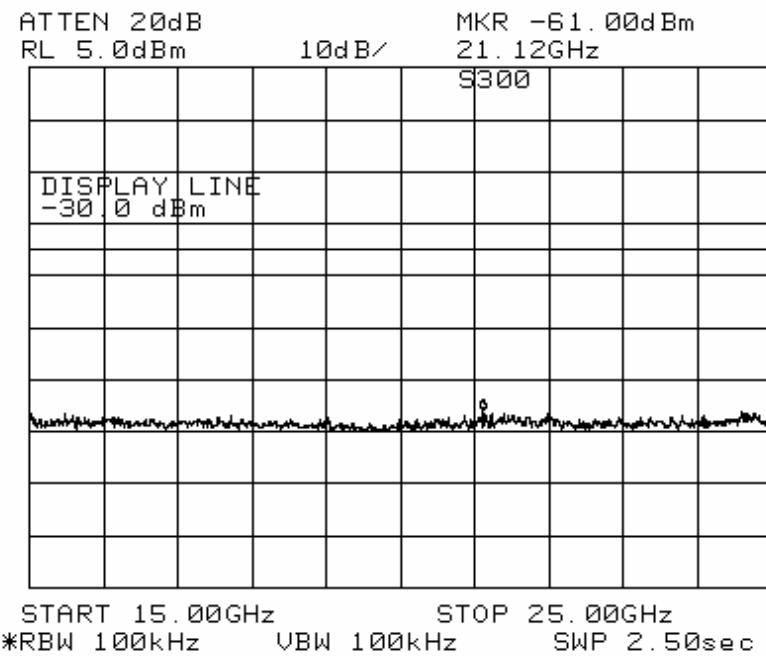

3.2.7 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

VBW \geq RBW

$\equiv 1$ MHz (1 GHz $\sim 10^{\text{th}}$ harmonic)

Span = 100 MHz

Detector function = peak

Trace = max hold

Spurious Measurement Data: Complies

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV)	Frequency (MHz)	Level (dBuV)	Frequency (MHz)	Level (dBuV)
-	-	-	-	-	-
No emissions were detected at a level greater than 10dB below limit.					
-	-	-	-	-	-
Measurement uncertainty		\pm 6 dB			

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.


Charging mode Measurement Data: Complies



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax :+82-31-3236010

EUT/Model No.: S300 Temp/Humi: 20 / 68

Test Mode : USB Charging mode Tested by: K. T. LEE

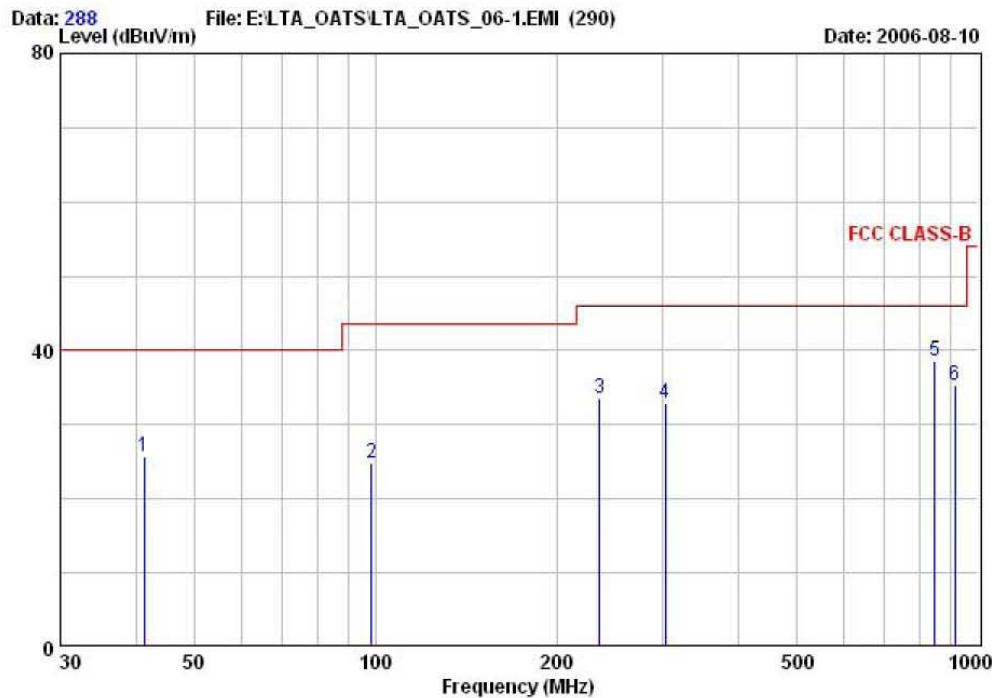

	Freq Reading (QP) MHz	Reading (QP) dBuV	C.F Result (QP) dB	Result (QP) dBuV/m	Limit dBuV/m	Margin dB	Height cm	Polarity
1	41.28	37.66	-11.85	25.81	40.00	14.19	100	VERTICAL
2	98.64	40.36	-15.48	24.88	43.50	18.62	100	VERTICAL
3	235.48	40.36	-6.77	33.59	46.00	12.41	200	HORIZONTAL
4	302.68	43.75	-10.90	32.85	46.00	13.15	200	HORIZONTAL
5	848.04	39.44	-0.79	38.65	46.00	7.35	110	VERTICAL
6	916.29	35.11	0.24	35.35	46.00	10.65	100	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.8 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


* Decreases with the logarithm of the frequency

AC Conducted Emissions – AC Adaptor - Line



243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax +82-31-323-6010

EUT / Model No. : S300 Phase : LINE
 Test Mode : Adaptor Charging mode Test Power : 120 / 60
 Temp./Humi. : 24 / 50 Test Engineer : K. T. LEE

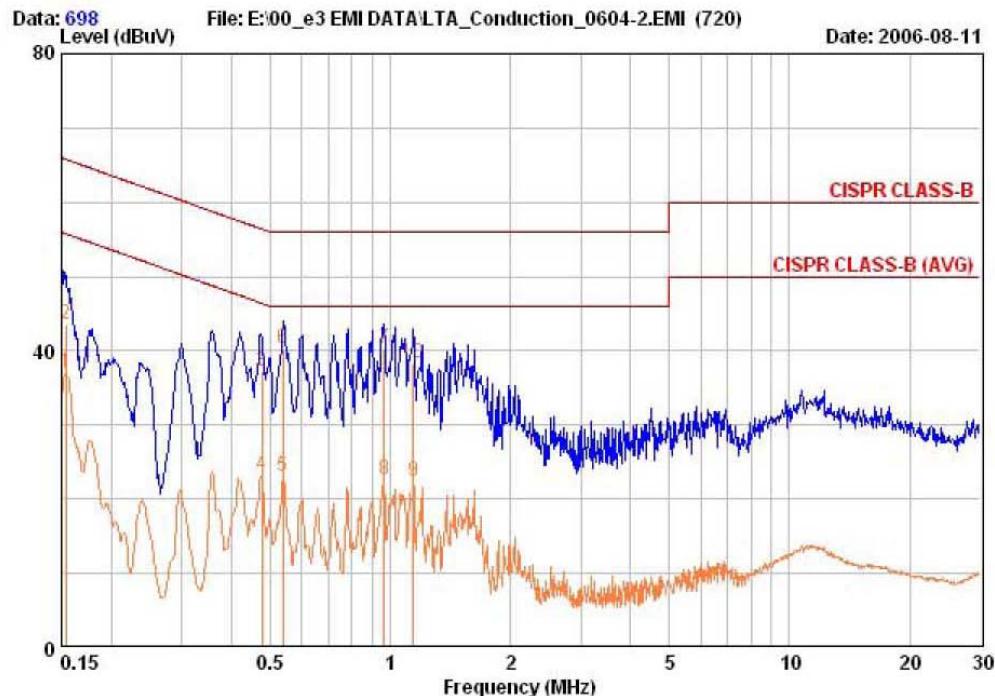

Freq MHz	RD QP dBuV	RD AV dBuV	C. F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.154	43.00	36.44	0.55	43.55	36.99	65.78	55.78	22.23	18.79
0.476	37.00	22.96	0.31	37.31	23.27	56.41	46.41	19.09	23.13
0.538	40.00	22.71	0.29	40.29	23.00	56.00	46.00	15.71	23.00
0.963	40.00	22.42	0.35	40.35	22.77	56.00	46.00	15.65	23.23
1.141	38.00	22.15	0.33	38.33	22.48	56.00	46.00	17.67	23.52


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions - AC Adaptor - Neutral



243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax +82-31-323-6010

EUT / Model No. : S300 Phase : NEUTRAL
Test Mode : Adaptor Charging mode Test Power : 120 / 60
Temp./Humi. : 24 / 50 Test Engineer : K. T. LEE

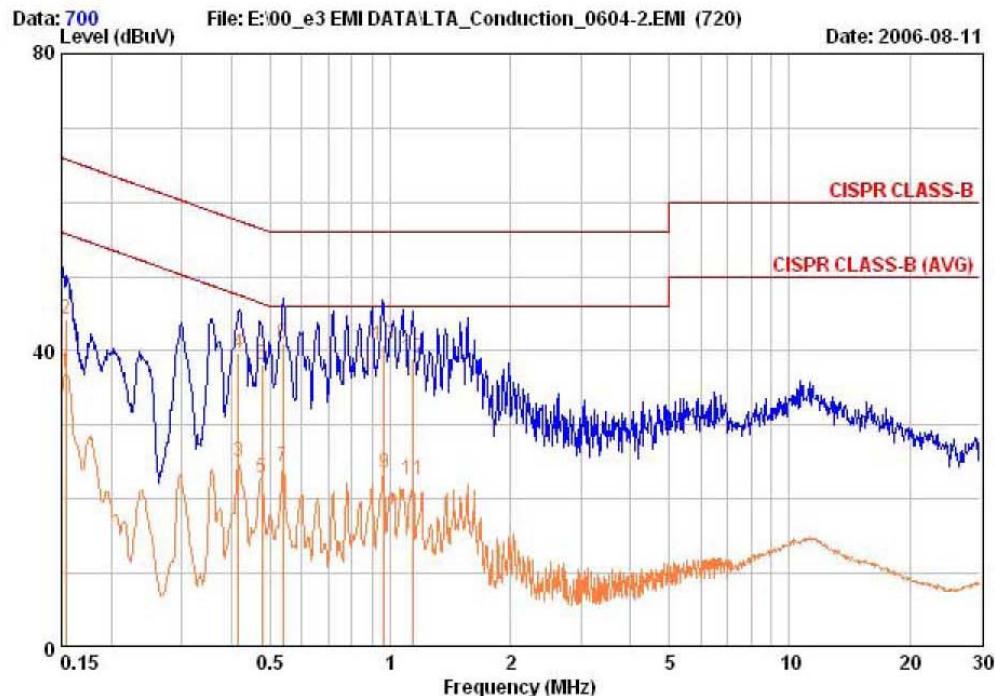

Freq MHz	RD QP		RD AV		C. F dB	Result dBuV	Result AV		Limit QP	Limit dBuV	Margin QP dB	Margin AV dB
	dBuV	dBuV	dBuV	dBuV			dBuV	dBuV				
0.154	43.70	36.44	0.54	44.24	44.24	36.98	65.78	55.78	21.54	21.54	21.54	18.80
0.417	39.30	24.68	0.36	39.66	39.66	25.04	57.51	47.51	17.84	17.84	17.84	22.46
0.476	37.80	22.58	0.30	38.10	38.10	22.88	56.41	46.41	18.30	18.30	18.30	23.52
0.538	40.80	24.21	0.28	41.08	41.08	24.49	56.00	46.00	14.92	14.92	14.92	21.51
0.963	40.50	23.20	0.34	40.84	40.84	23.54	56.00	46.00	15.16	15.16	15.16	22.46
1.141	38.80	22.36	0.32	39.12	39.12	22.68	56.00	46.00	16.88	16.88	16.88	23.32


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – USB Charging - Line



243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax +82-31-323-6010

EUT / Model No. : S300 Phase : LINE
 Test Mode : USB Charging mode Test Power : 120 / 60
 Temp./Humi. : 24 / 50 Test Engineer : K. T. LEE

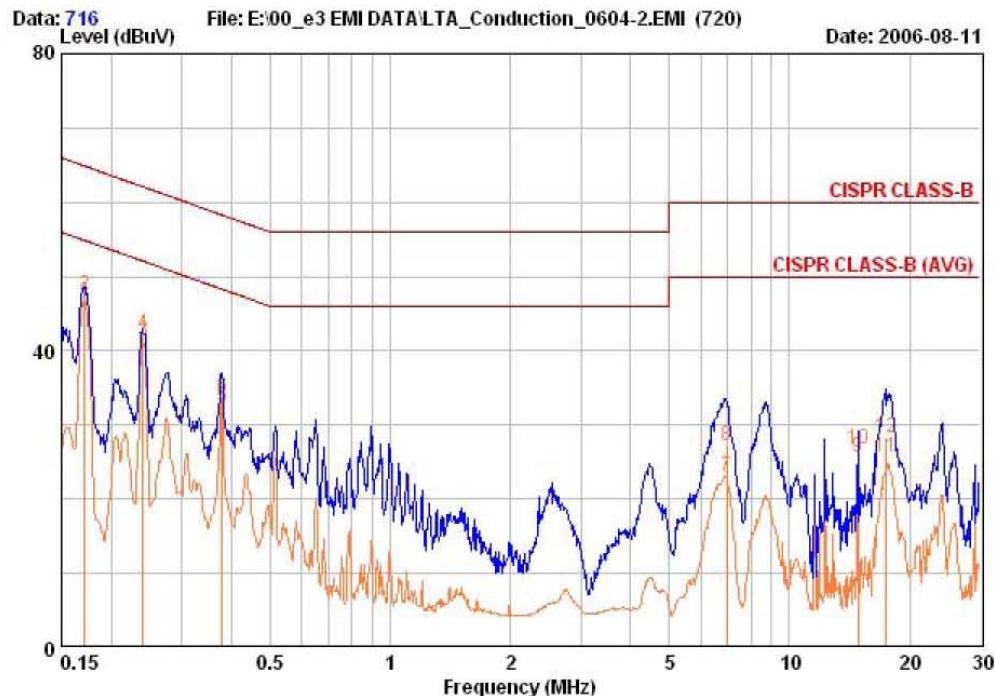

Freq MHz	RD QP		RD AV		C. F dB	Result dBuV	Result dBuV	Limit dBuV	Limit dBuV	Margin dB	Margin dB
	QP	AV	QP	AV							
0.171	47.01	46.27	0.41	47.42	46.68	64.90	54.90	17.48	8.22		
0.240	42.01	41.16	0.22	42.23	41.38	62.08	52.08	19.85	10.70		
0.379	33.45	32.15	0.37	33.82	32.52	58.30	48.30	24.48	15.78		
6.951	26.65	22.53	0.54	27.19	23.07	60.00	50.00	32.81	26.93		
14.828	25.74	24.58	1.16	26.90	25.74	60.00	50.00	33.10	24.26		
17.475	26.99	24.37	1.35	28.34	25.72	60.00	50.00	31.66	24.28		


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – USB Charging - Neutral



243 Jibug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax +82-31-323-6010

EUT / Model No. : S300 Phase : NEUTRAL
Test Mode : USB Charging mode Test Power : 120 / 60
Temp./Humi. : 24 / 50 Test Engineer : K. T. LEE

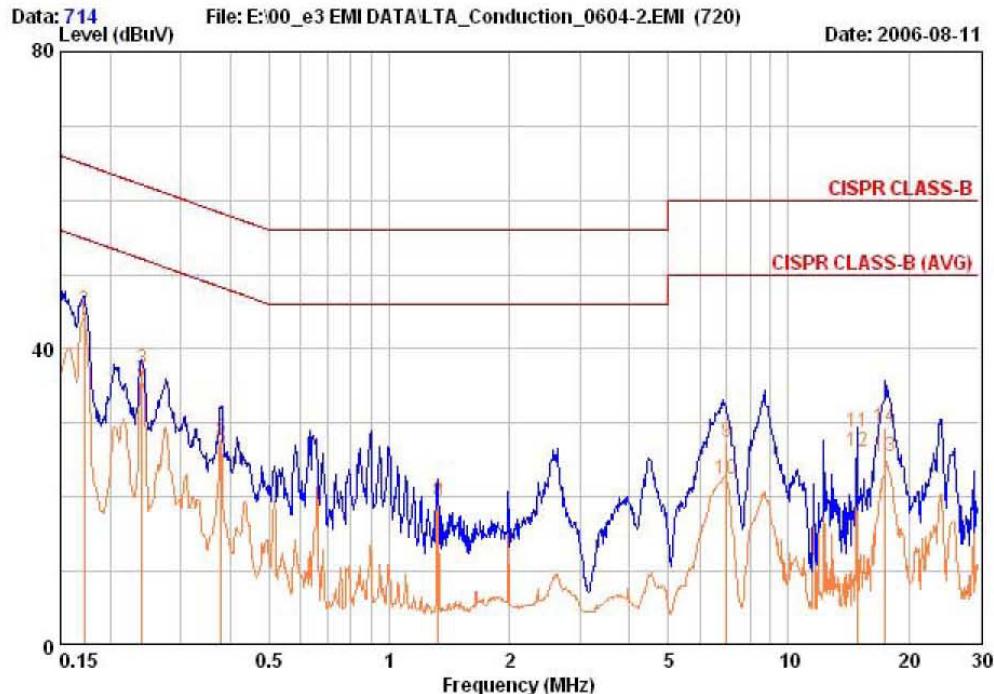

Freq MHz	RD QP		RD AV		C. F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
	dBuV	dBuV	dBuV	dBuV							
0.172	44.69	43.41	0.40	45.09	43.81	64.86	54.86	19.77	11.05		
0.240	37.02	35.59	0.22	37.24	35.81	62.08	52.08	24.84	16.27		
0.379	27.55	26.24	0.36	27.91	26.60	58.30	48.30	30.39	21.70		
1.324	19.05	18.76	0.34	19.39	19.10	56.00	46.00	36.61	26.90		
6.988	26.99	21.85	0.51	27.50	22.36	60.00	50.00	32.50	27.64		
14.828	27.66	25.13	1.09	28.75	26.22	60.00	50.00	31.25	23.78		
17.475	28.25	24.37	1.22	29.47	25.59	60.00	50.00	30.53	24.41		

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Dec-06
2	Signal Generator	8657A	3430U02049	HP	Dec-06
3	Attenuator (3dB)	8491A	37822	HP	Dec-06
4	Attenuator (3dB)	8491A	28881	HP	Dec-06
5	EMI Test Receiver	ESVD	843748/001	R&S	Dec-06
6	Spectrum Analyzer	8591E	3649A05888	HP	Jan-07
7	Spectrum Analyzer	8563E	3425A02505	HP	Jan-07
8	RF Amplifier	8447D	2949A02670	HP	Jan-07
9	RF Amplifier	8447D	2439A09058	HP	Jan-07
10	RF Amplifier	8449B	3008A02126	HP	Jun-07
11	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	Feb-07
12	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Feb-07
13	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Feb-07
14	Horn Antenna	3115	00055005	ETS LINDGREN	Jun-07
15	Horn Antenna	BBHA 9120D	0499	Schwarzbeck	Jun-07
16	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Feb-07
17	Splitter (BNC)	ZFM-150	15542	Mini-Circuits	-
18	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-
19	Power Divider	11636A	6243	HP	Apr-07
20	DC Power Supply	6622A	3448A03079	HP	Apr-07
21	Attenuator (30dB)	8498A	1801A06689	HP	Apr-07
22	Attenuator (10dB)	8491A	63196	HP	Apr-07
23	Power Meter	EPM-441A	GB32481702	HP	Apr-07
24	Power Sensor	8481A	2702A64048	HP	Apr-07
25	Audio Analyzer	8903B	3729A18901	HP	May-07
26	Modulation Analyzer	8901B	3749A05878	HP	May-07
27	Dipole Antenna	VHA9103	2116	Schwarzbeck	Oct-06
28	Dipole Antenna	VHA9103	2117	Schwarzbeck	Oct-06
29	Dipole Antenna	UHA9105	2261	Schwarzbeck	Oct-06
30	Dipole Antenna	UHA9105	2262	Schwarzbeck	Oct-06
31	Digital Multimeter	34401A	US36062141	HP	Apr-07
32	LISN	KNW-407	8-1430-1	Kyoritsu	Jan-07
33	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Jan-07
34	Test Receiver	ESHS10	828404009	R&S	Jan-07
35	TEMP & HUMIDITY Chamber	YJ-500	L05022	Jin Young Tech	-