


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	2.4GHz + 5GHz

Horizontal

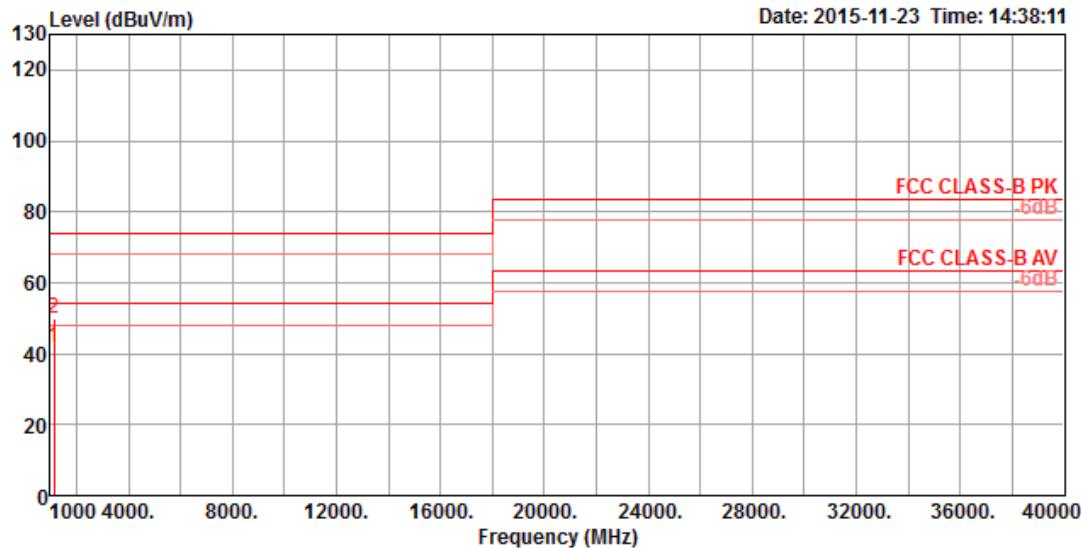

Freq	Level	Limit	Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit						
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg		
1	1129.38	41.78	54.00	-12.22	50.83	3.35	24.77	37.17	100	350	Average	HORIZONTAL
2	1129.38	49.78	74.00	-24.22	58.83	3.35	24.77	37.17	100	350	Peak	HORIZONTAL

Vertical

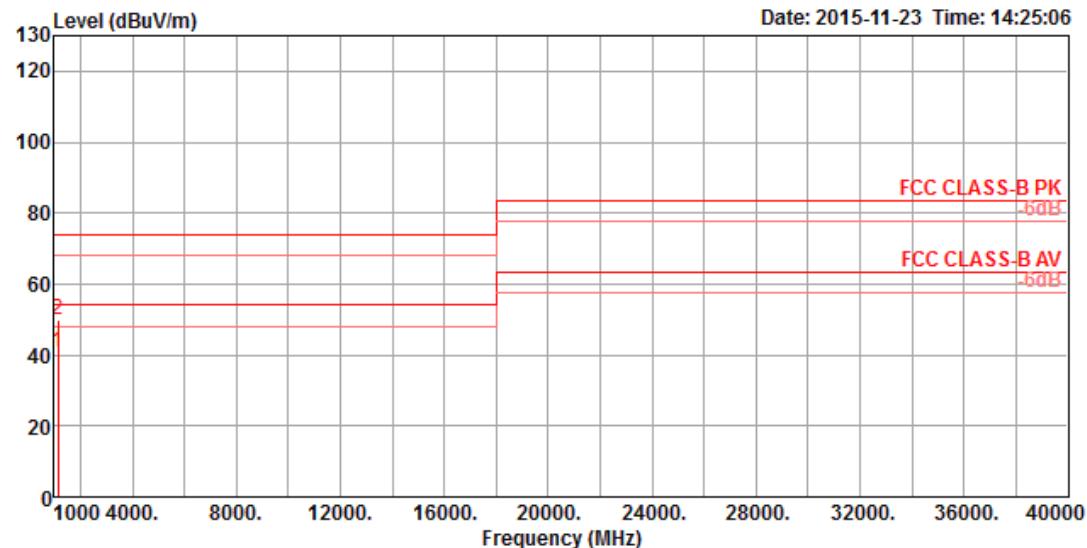

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	dB	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1129.38	41.00	54.00	-13.00	50.05	3.35	24.77	37.17	100	285	Average VERTICAL
2	1129.38	50.00	74.00	-24.00	59.05	3.35	24.77	37.17	100	285	Peak VERTICAL