


Appendix B. Radiated Emission

Below 1 GHz

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Transmit mode		
Polarization:	Horizontal		
Remark:			

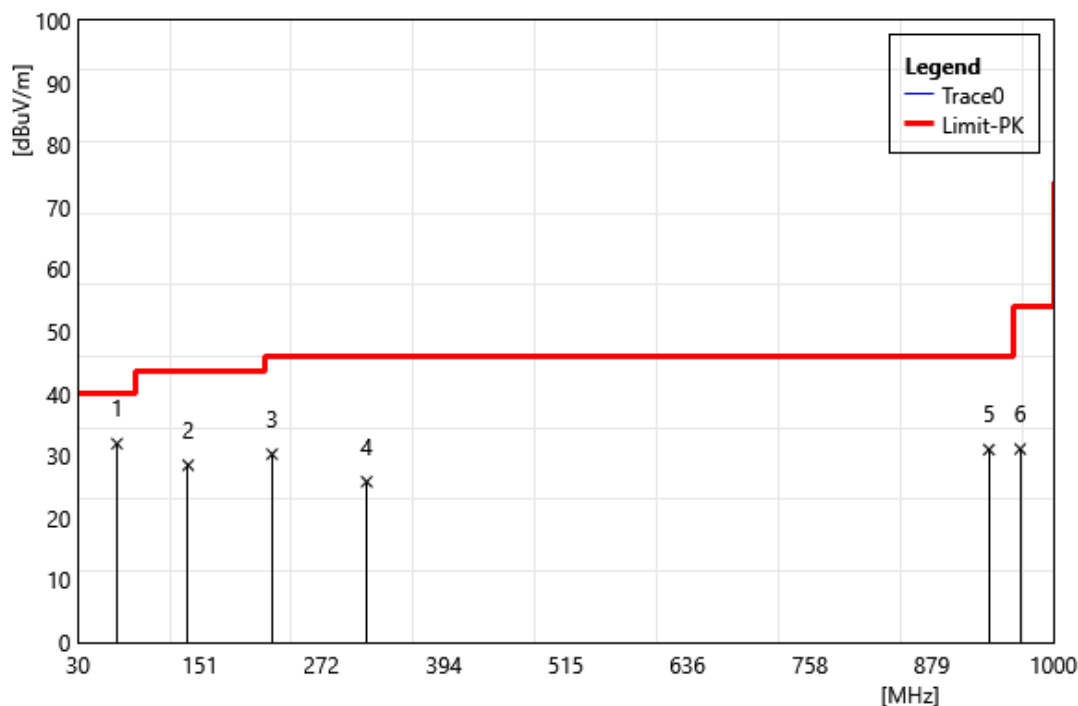


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	68.80	46.18	-14.22	31.96	40.00	-8.04	QP
2	139.61	41.00	-12.50	28.50	43.50	-15.00	QP
3	223.03	45.26	-15.00	30.26	46.00	-15.74	QP
4	317.12	36.99	-11.14	25.85	46.00	-20.15	QP
5	935.98	31.12	-0.12	31.00	46.00	-15.00	QP
6	967.02	31.39	-0.28	31.11	54.00	-22.89	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Transmit mode		
Polarization:	Vertical		
Remark:			

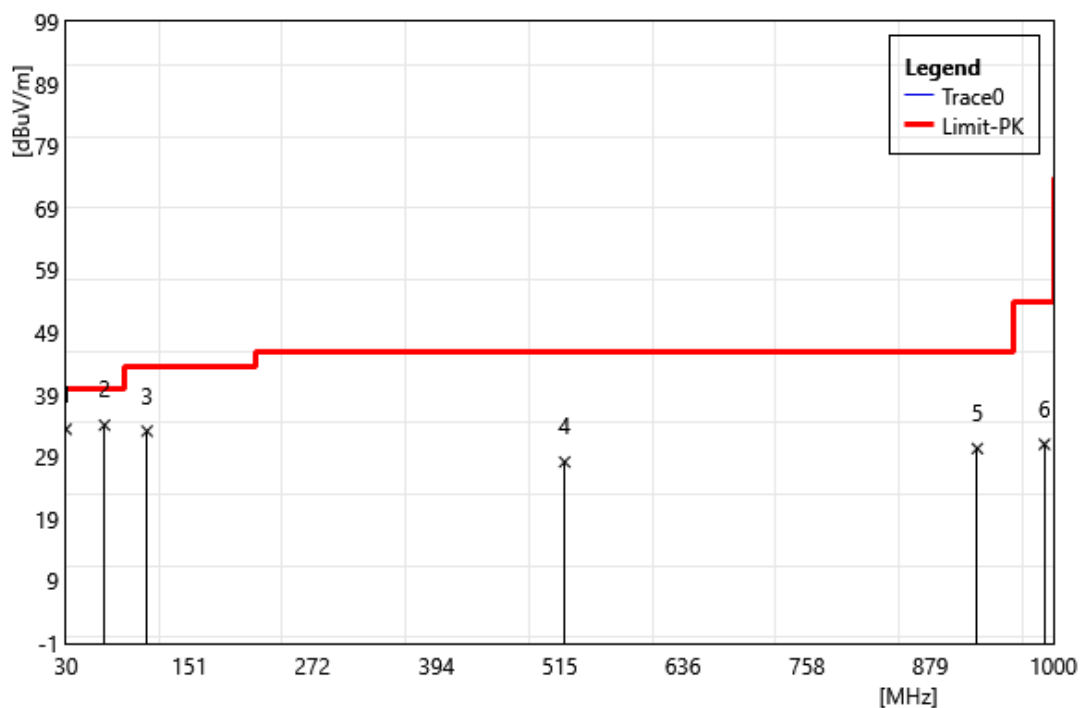

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.00	47.50	-14.05	33.45	40.00	-6.55	QP
2	67.83	48.02	-13.92	34.10	40.00	-5.90	QP
3	109.54	48.26	-15.11	33.15	43.50	-10.35	QP
4	519.85	34.91	-6.73	28.18	46.00	-17.82	QP
5	925.31	30.68	-0.33	30.35	46.00	-15.65	QP
6	991.27	31.25	-0.22	31.03	54.00	-22.97	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Harmonic


Above 1 GHz

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Horizontal		
Remark:			

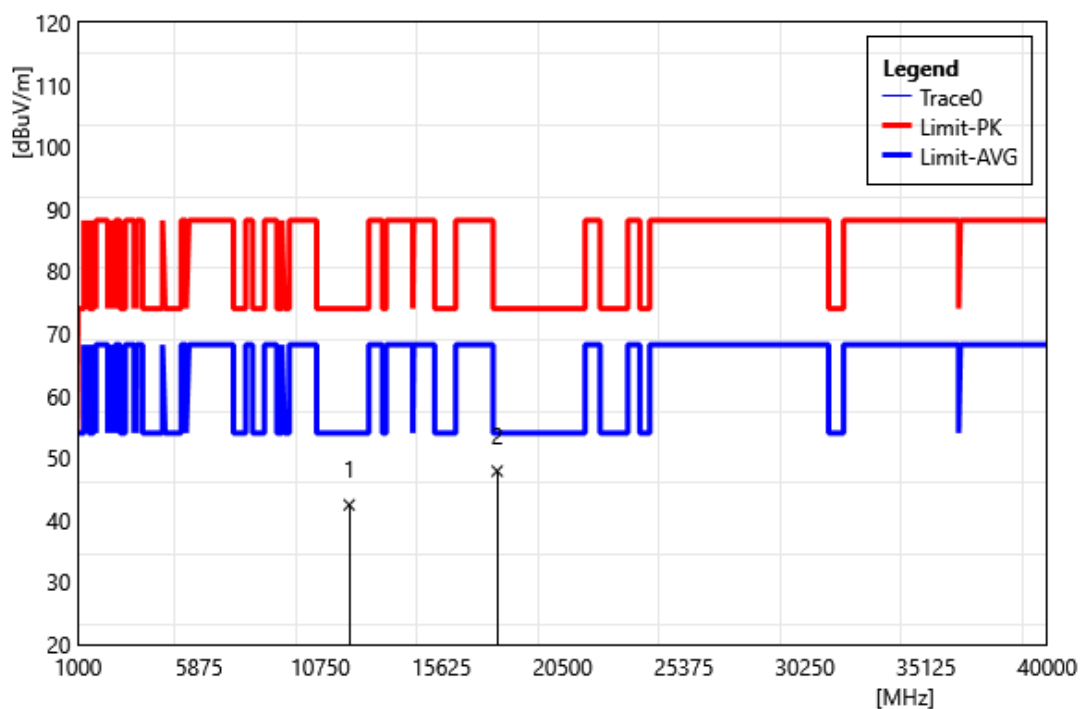


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	34.81	7.63	42.44	74.00	-31.56	PEAK
2	17865.00	40.62	7.25	47.87	74.00	-26.13	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Vertical		
Remark:			

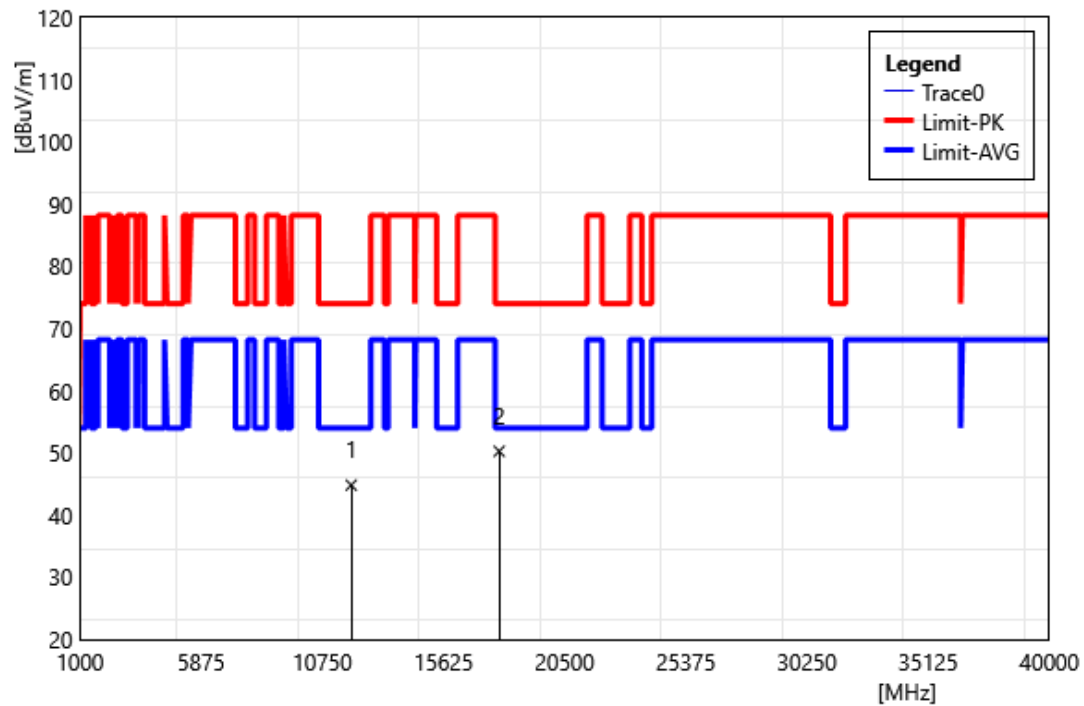


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	37.18	7.63	44.81	74.00	-29.19	PEAK
2	17865.00	43.01	7.25	50.26	74.00	-23.74	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6175 MHz		
Polarization:	Horizontal		
Remark:			

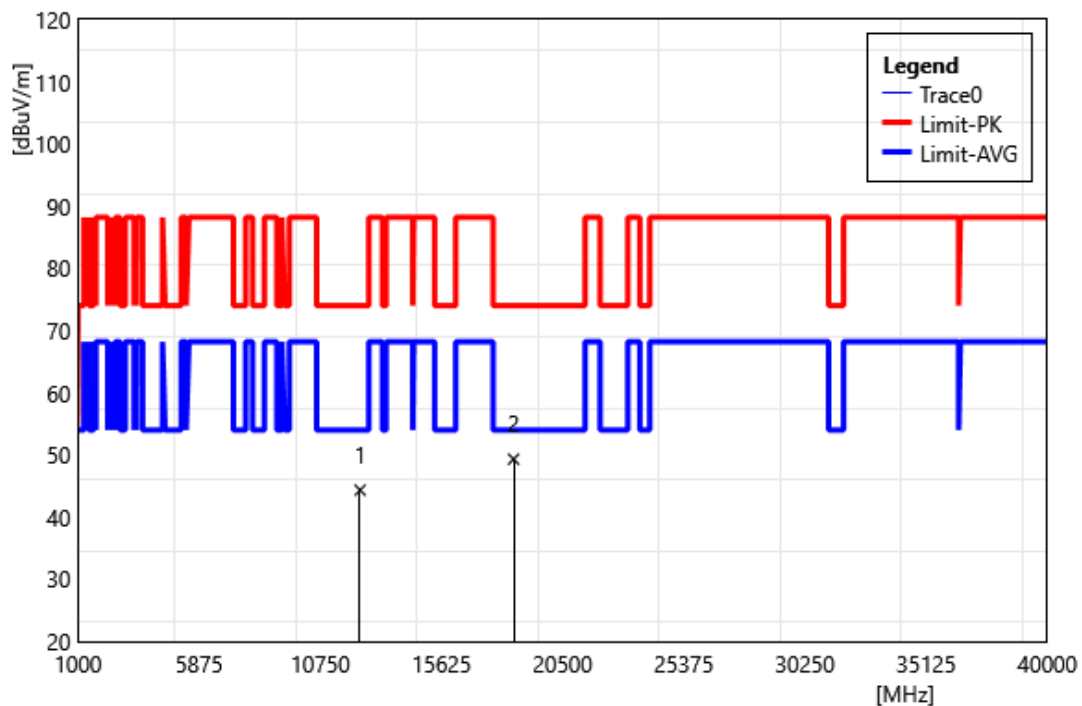


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	36.47	7.87	44.34	74.00	-29.66	PEAK
2	18525.00	41.05	8.26	49.31	74.00	-24.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6175 MHz		
Polarization:	Vertical		
Remark:			

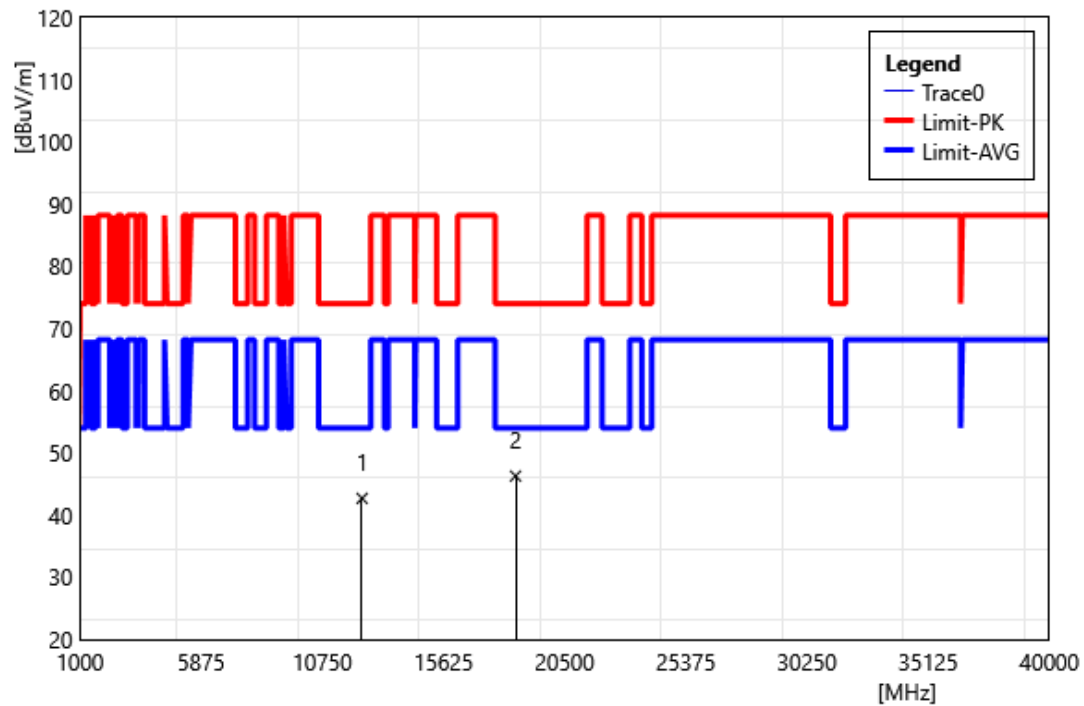


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	34.81	7.87	42.68	74.00	-31.32	PEAK
2	18525.00	38.01	8.26	46.27	74.00	-27.73	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6415 MHz		
Polarization:	Horizontal		
Remark:			

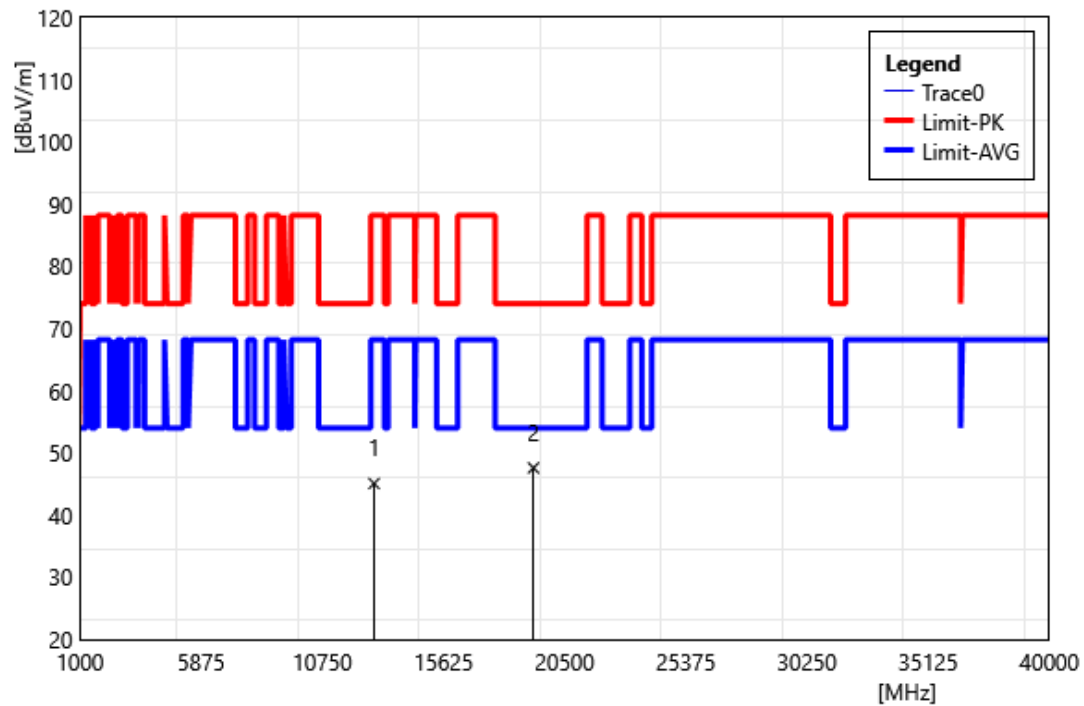


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	36.51	8.58	45.09	88.20	-43.11	PEAK
2	19245.00	39.00	8.58	47.58	74.00	-26.42	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6415 MHz		
Polarization:	Vertical		
Remark:			

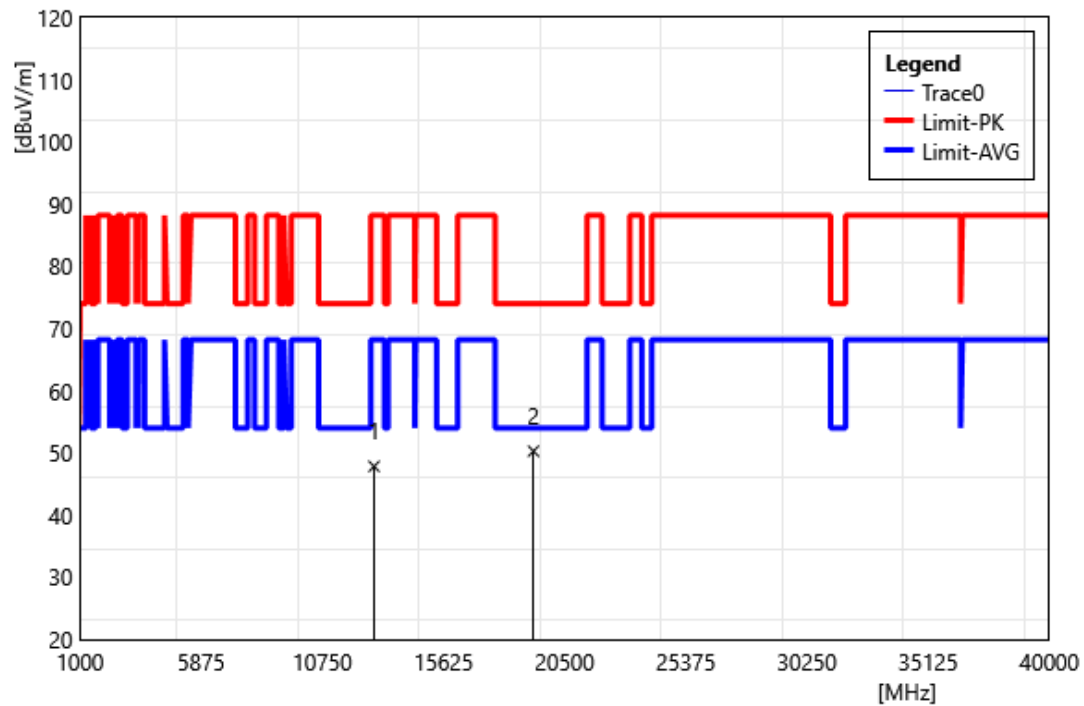


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	39.26	8.58	47.84	88.20	-40.36	PEAK
2	19245.00	41.69	8.58	50.27	74.00	-23.73	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6435 MHz		
Polarization:	Horizontal		
Remark:			

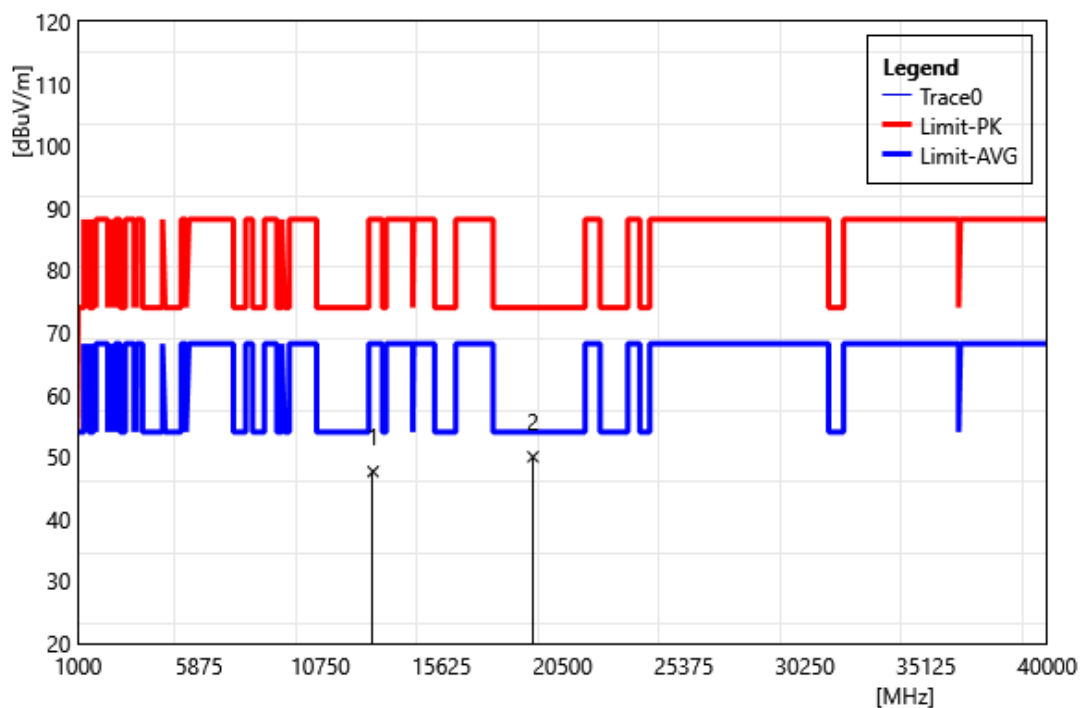


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	39.06	8.57	47.63	88.20	-40.57	PEAK
2	19305.00	41.40	8.61	50.01	74.00	-23.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6435 MHz		
Polarization:	Vertical		
Remark:			

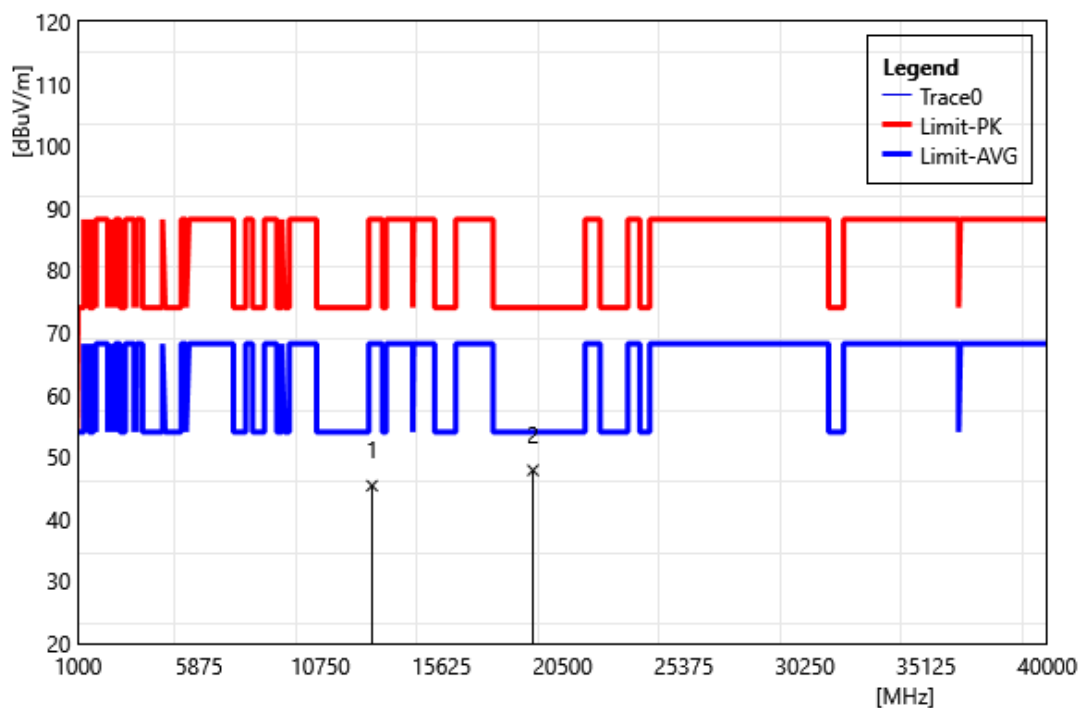


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	36.78	8.58	45.36	88.20	-42.84	PEAK
2	19305.00	39.23	8.61	47.84	74.00	-26.16	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6475 MHz		
Polarization:	Horizontal		
Remark:			

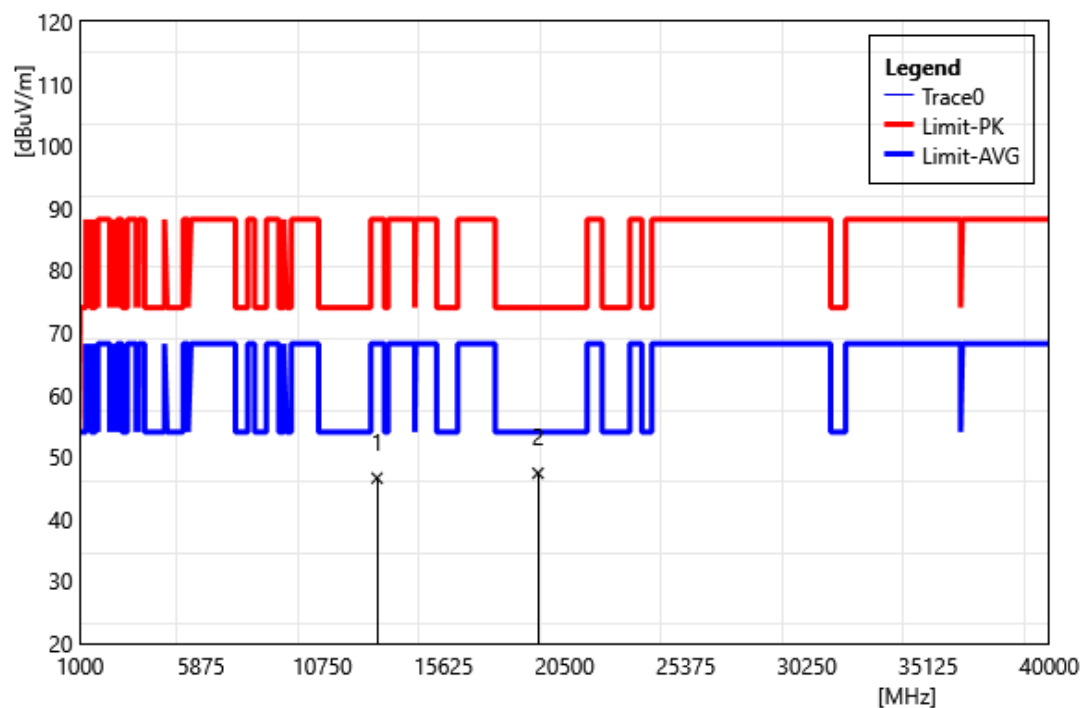


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	37.97	8.62	46.59	88.20	-41.61	PEAK
2	19425.00	38.72	8.66	47.38	74.00	-26.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6475 MHz		
Polarization:	Vertical		
Remark:			

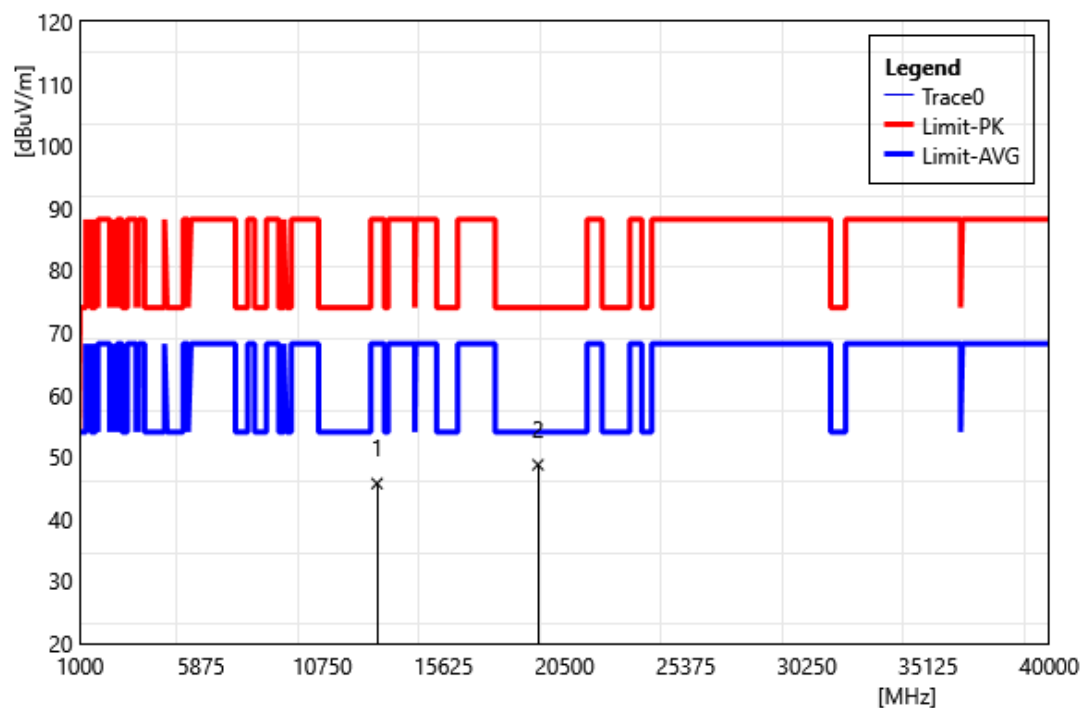


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	37.09	8.62	45.71	88.20	-42.49	PEAK
2	19425.00	40.07	8.66	48.73	74.00	-25.27	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6515 MHz		
Polarization:	Horizontal		
Remark:			

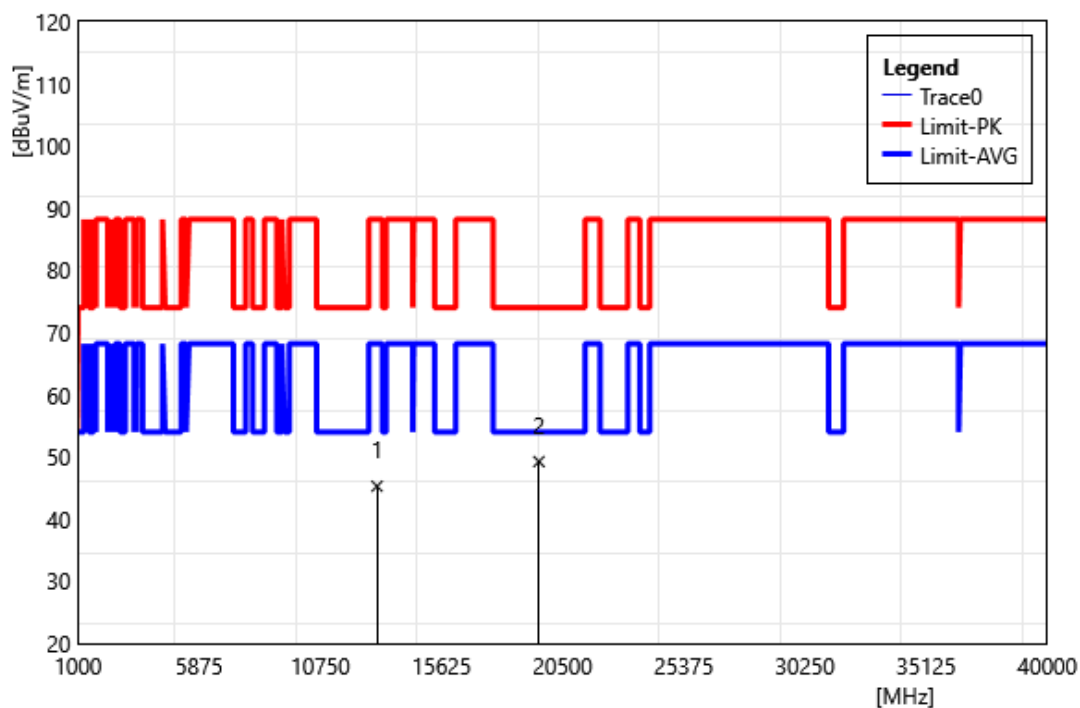


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	36.67	8.62	45.29	88.20	-42.91	PEAK
2	19545.00	40.53	8.72	49.25	74.00	-24.75	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6515 MHz		
Polarization:	Vertical		
Remark:			

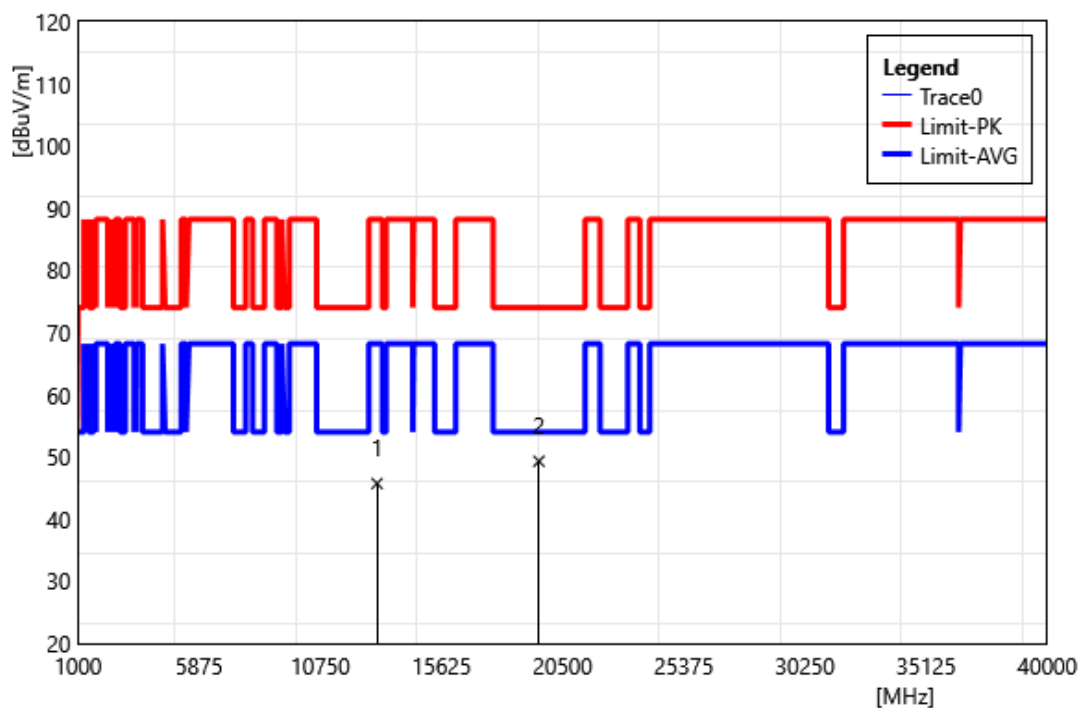


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	37.09	8.62	45.71	88.20	-42.49	PEAK
2	19545.00	40.58	8.72	49.30	74.00	-24.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6535 MHz		
Polarization:	Horizontal		
Remark:			

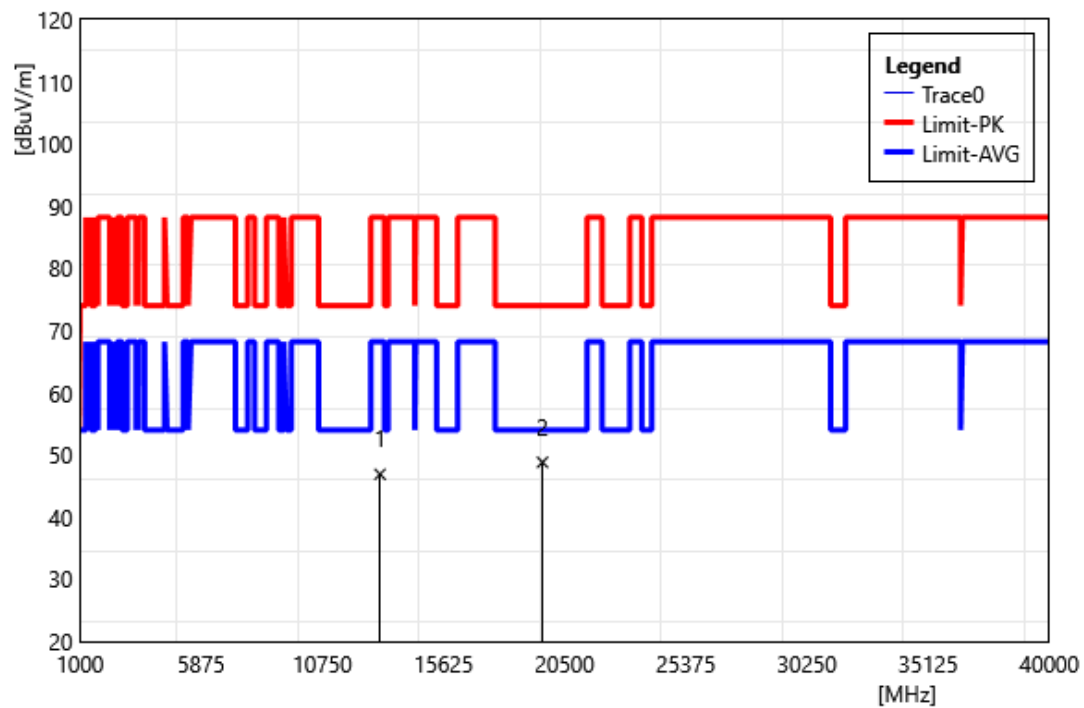


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	38.36	8.52	46.88	88.20	-41.32	PEAK
2	19605.00	40.07	8.74	48.81	74.00	-25.19	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6535 MHz		
Polarization:	Vertical		
Remark:			

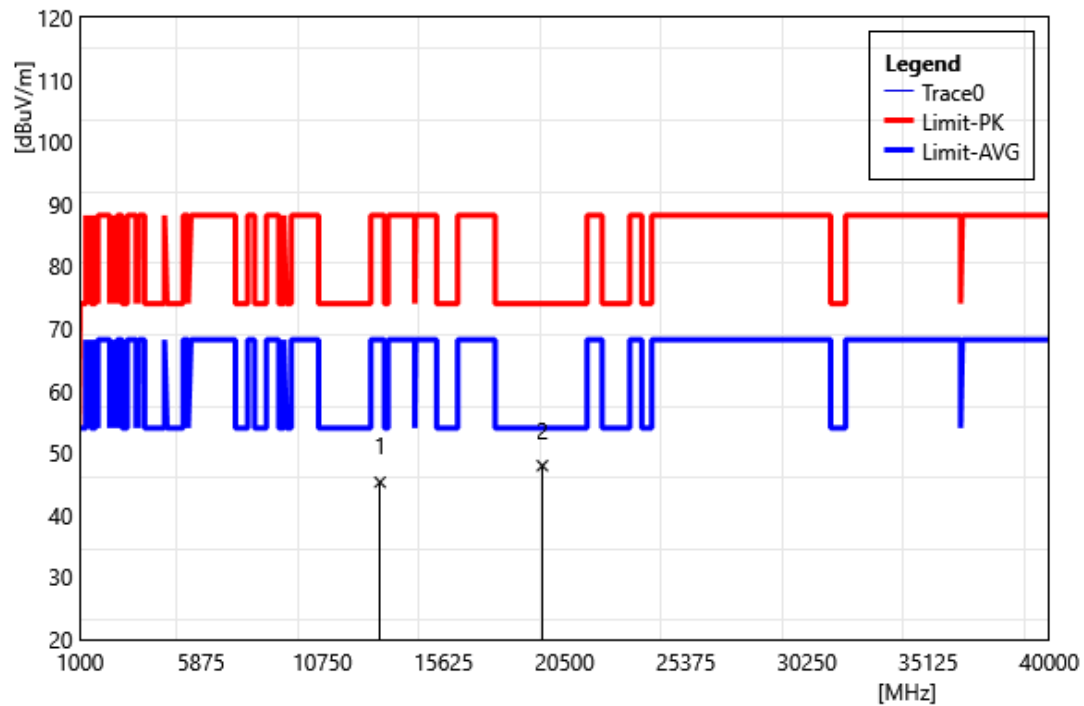


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	36.76	8.52	45.28	88.20	-42.92	PEAK
2	19605.00	39.20	8.74	47.94	74.00	-26.06	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6695 MHz		
Polarization:	Horizontal		
Remark:			

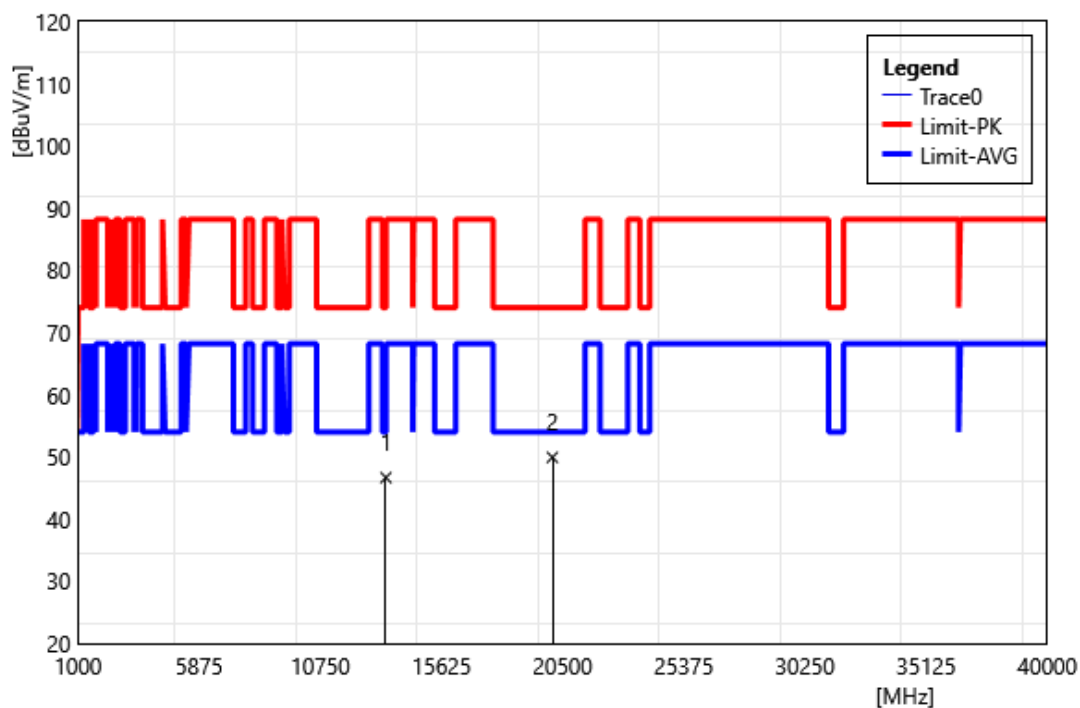


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	38.57	8.10	46.67	74.00	-27.33	PEAK
2	20085.00	40.96	8.96	49.92	74.00	-24.08	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6695 MHz		
Polarization:	Vertical		
Remark:			

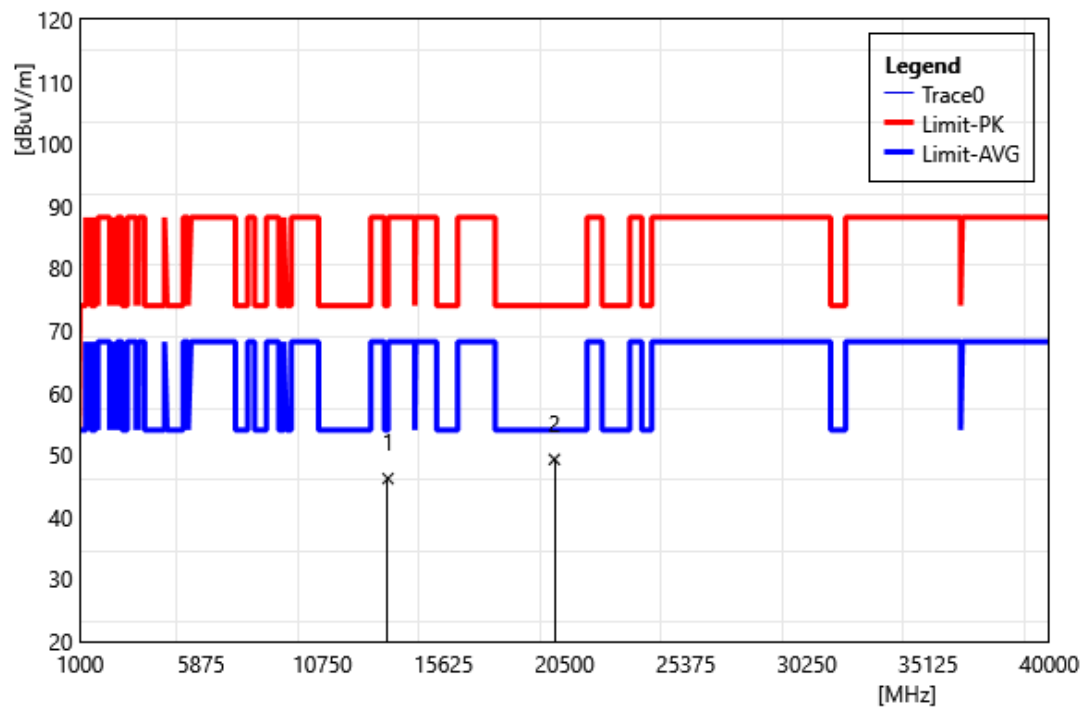


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	38.09	8.10	46.19	74.00	-27.81	PEAK
2	20085.00	40.31	8.96	49.27	74.00	-24.73	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6855 MHz		
Polarization:	Horizontal		
Remark:			

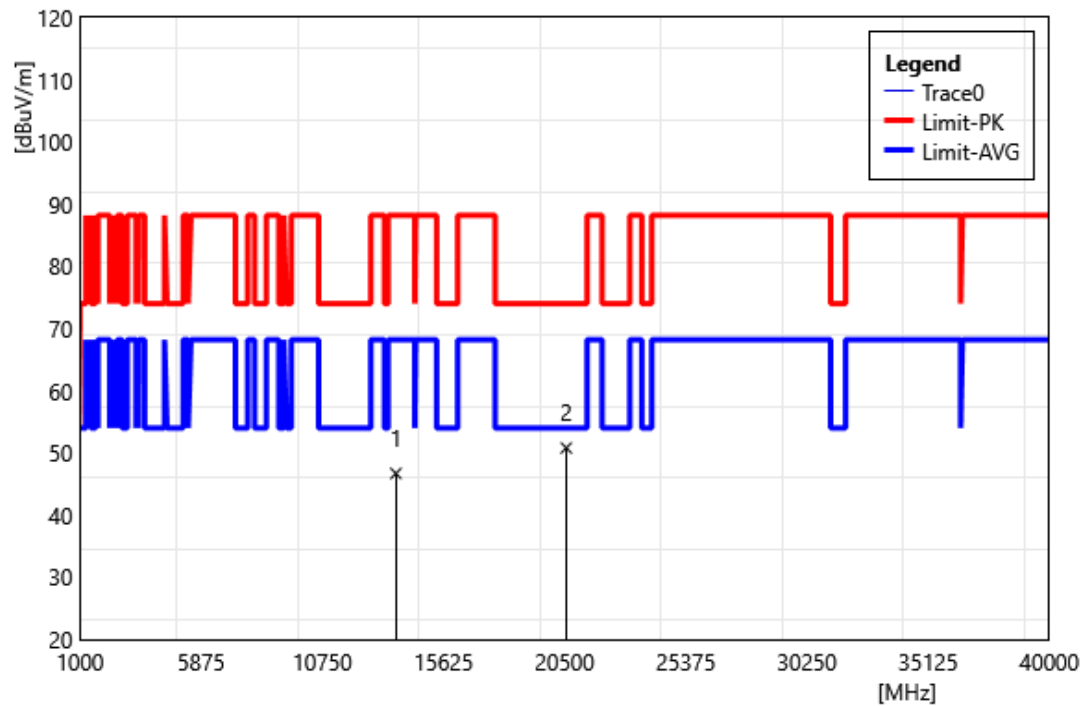


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	38.75	7.95	46.70	88.20	-41.50	PEAK
2	20565.00	41.61	9.18	50.79	74.00	-23.21	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6855 MHz		
Polarization:	Vertical		
Remark:			

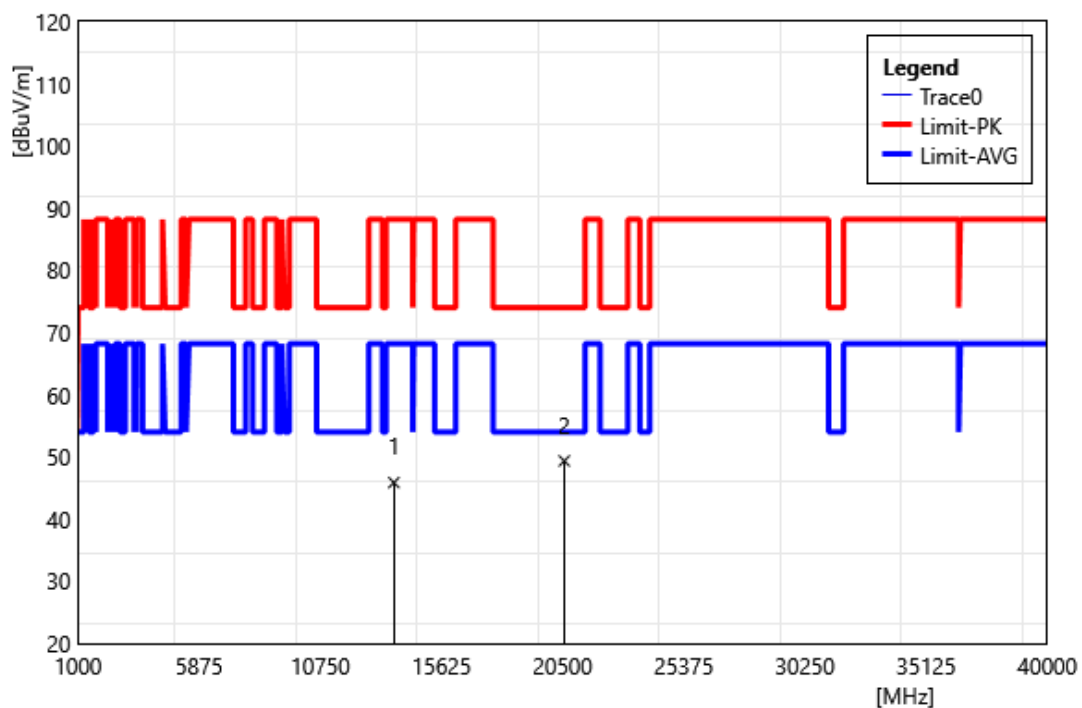


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	37.91	7.95	45.86	88.20	-42.34	PEAK
2	20565.00	40.18	9.18	49.36	74.00	-24.64	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6875 MHz		
Polarization:	Horizontal		
Remark:			

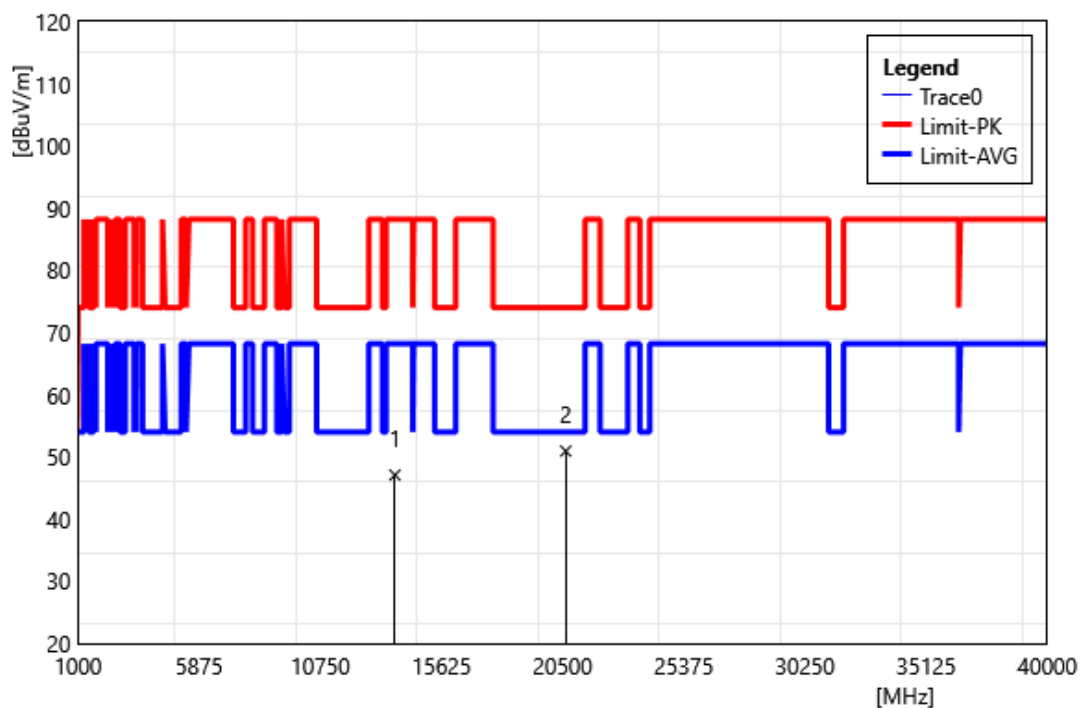


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	39.19	7.90	47.09	88.20	-41.11	PEAK
2	20625.00	41.74	9.20	50.94	74.00	-23.06	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6875 MHz		
Polarization:	Vertical		
Remark:			

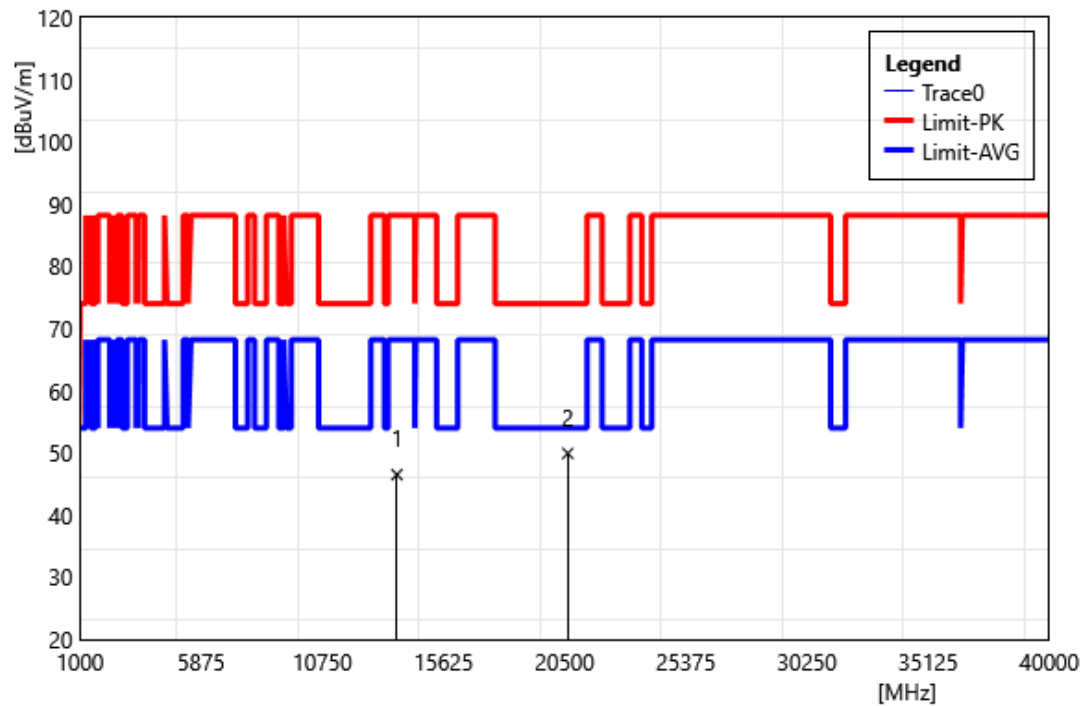


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	38.60	7.90	46.50	88.20	-41.70	PEAK
2	20625.00	40.72	9.20	49.92	74.00	-24.08	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6895 MHz		
Polarization:	Horizontal		
Remark:			

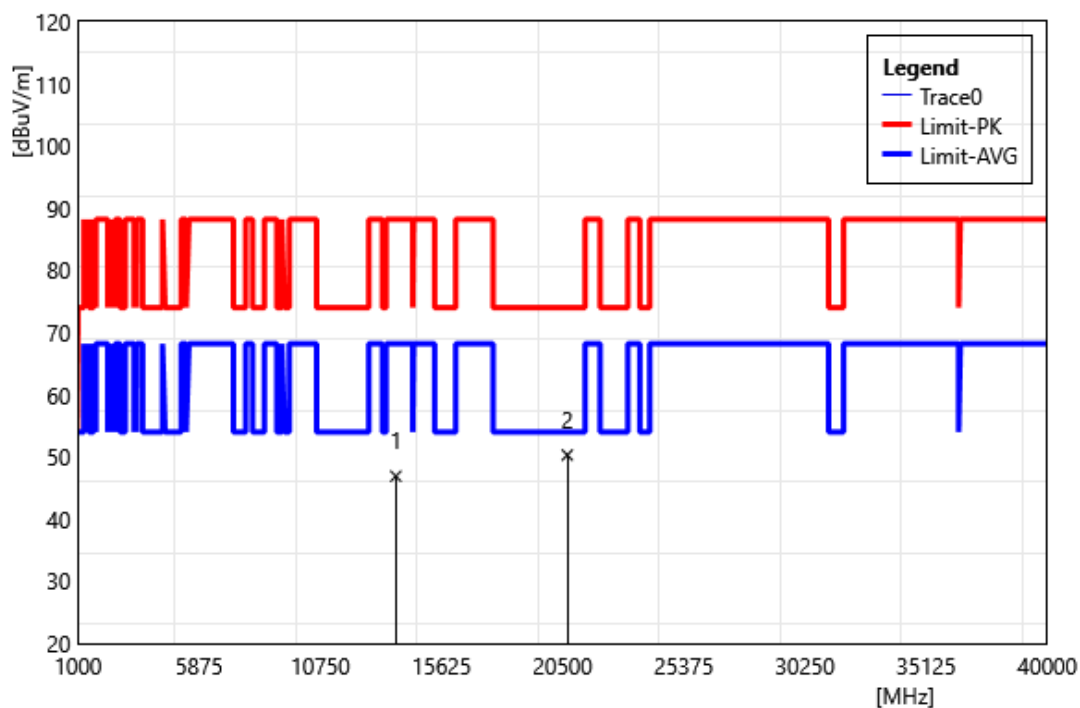


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	39.06	7.85	46.91	88.20	-41.29	PEAK
2	20685.00	41.08	9.22	50.30	74.00	-23.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6895 MHz		
Polarization:	Vertical		
Remark:			

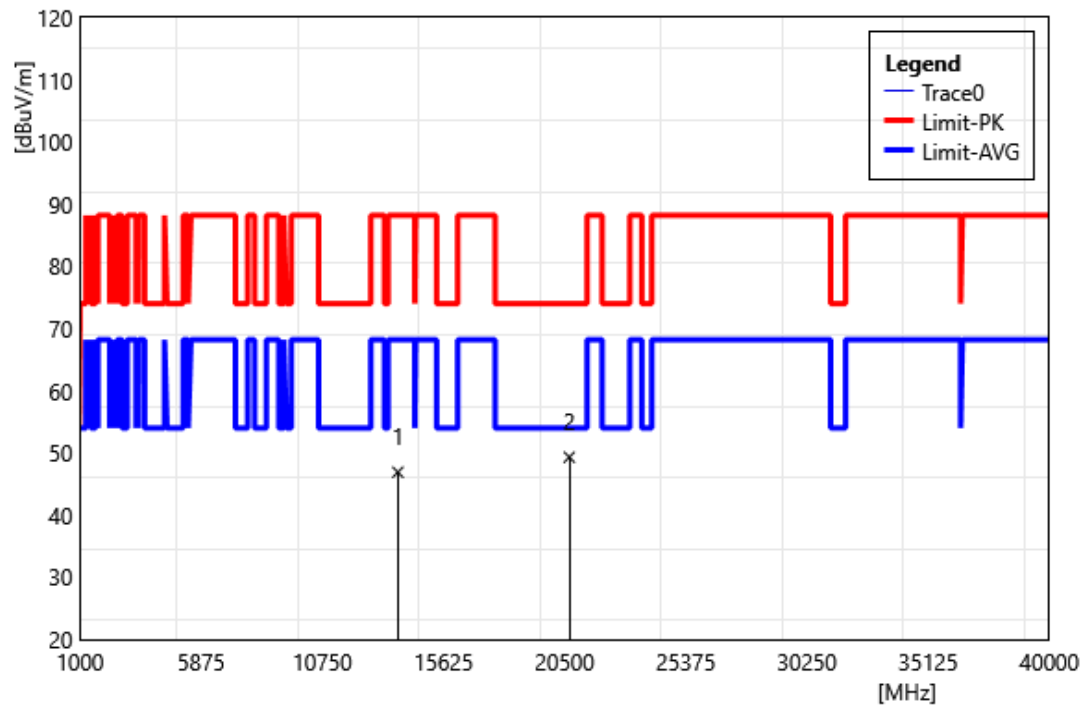


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	39.04	7.85	46.90	88.20	-41.31	PEAK
2	20685.00	40.08	9.22	49.30	74.00	-24.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6995 MHz		
Polarization:	Horizontal		
Remark:			

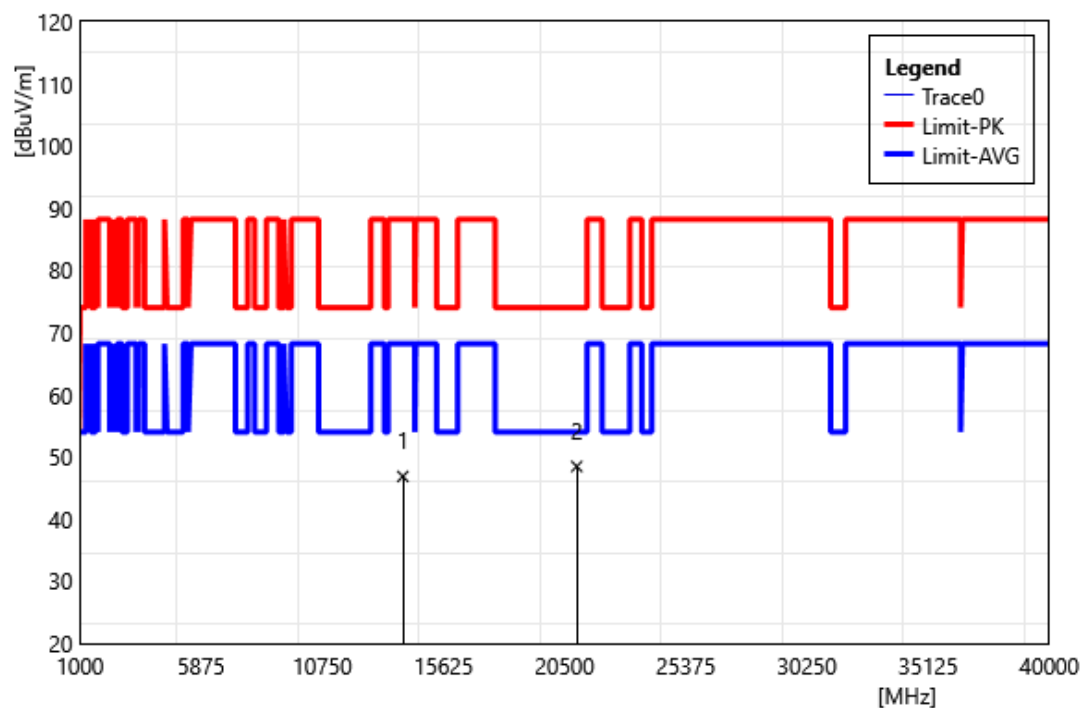


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	38.60	8.26	46.86	88.20	-41.34	PEAK
2	20985.00	39.11	9.36	48.47	74.00	-25.53	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6995 MHz		
Polarization:	Vertical		
Remark:			

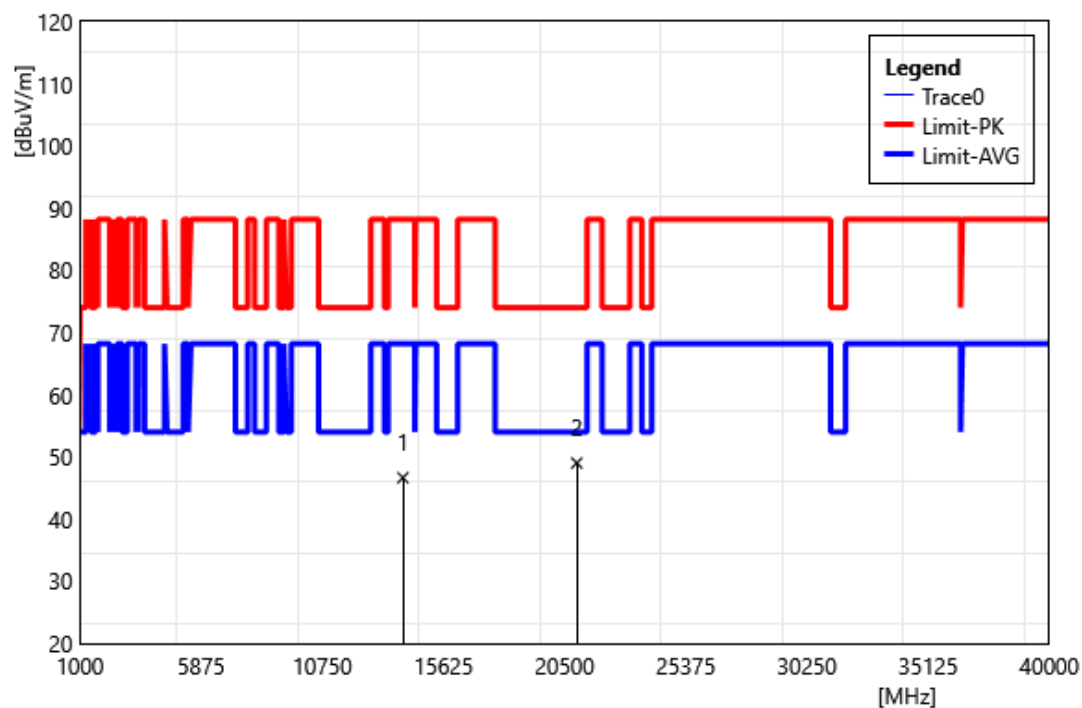


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	38.38	8.26	46.64	88.20	-41.56	PEAK
2	20985.00	39.65	9.36	49.01	74.00	-24.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 7115 MHz		
Polarization:	Horizontal		
Remark:			

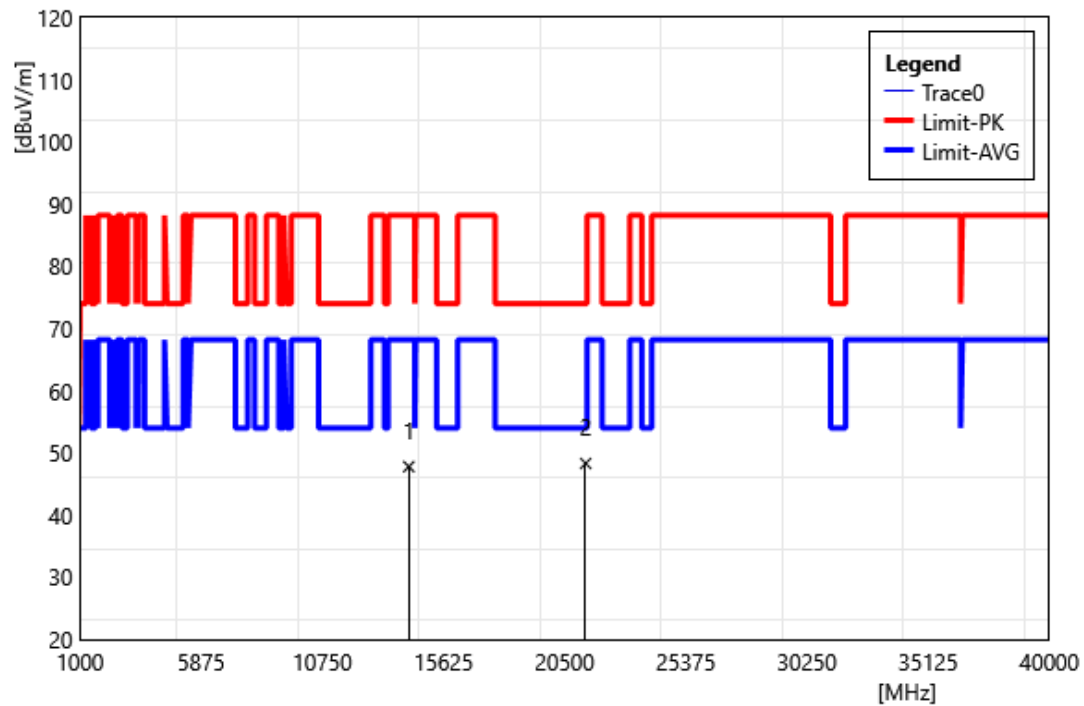


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	39.11	8.68	47.79	88.20	-40.41	PEAK
2	21345.00	38.77	9.53	48.30	74.00	-25.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 7115 MHz		
Polarization:	Vertical		
Remark:			

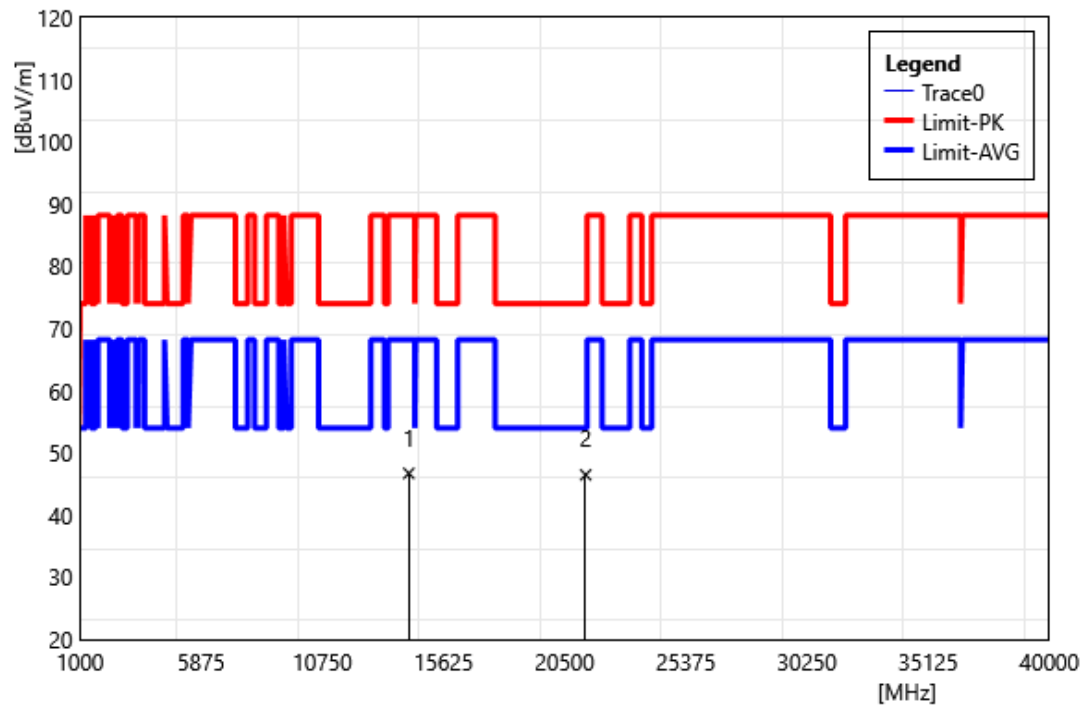


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	38.03	8.68	46.71	88.20	-41.49	PEAK
2	21345.00	36.93	9.53	46.46	74.00	-27.54	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5955 MHz		
Polarization:	Horizontal		
Remark:			

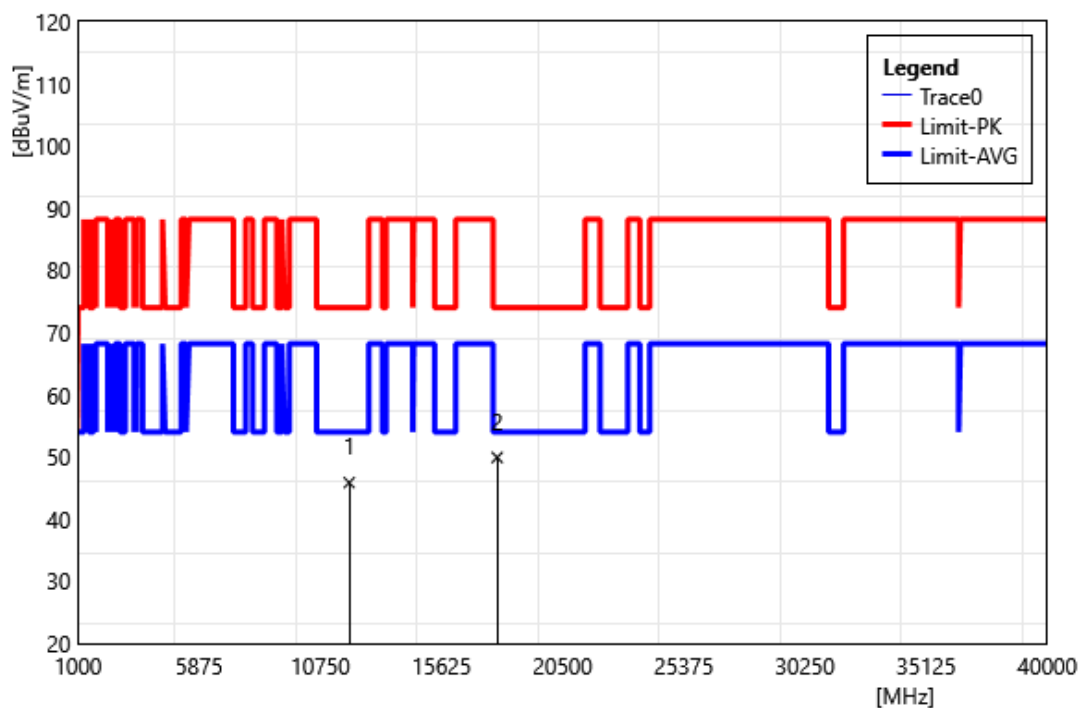


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	38.24	7.63	45.87	74.00	-28.13	PEAK
2	17865.00	42.66	7.25	49.91	74.00	-24.09	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5955 MHz		
Polarization:	Vertical		
Remark:			

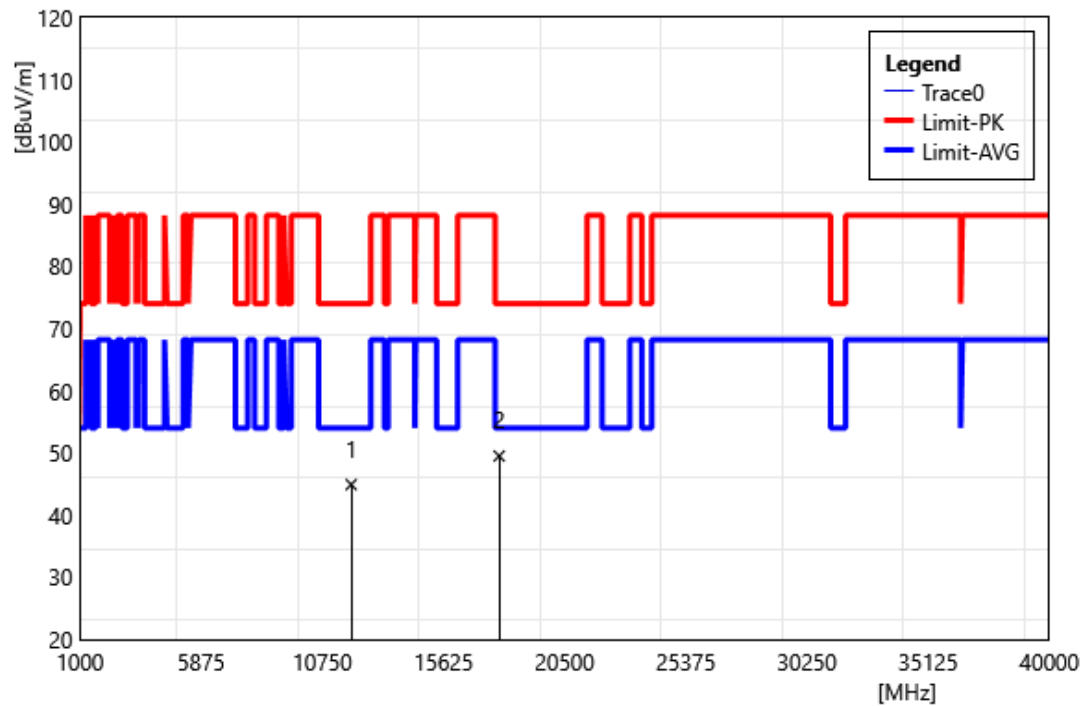


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	37.28	7.63	44.91	74.00	-29.09	PEAK
2	17865.00	42.25	7.25	49.50	74.00	-24.50	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6175 MHz		
Polarization:	Horizontal		
Remark:			

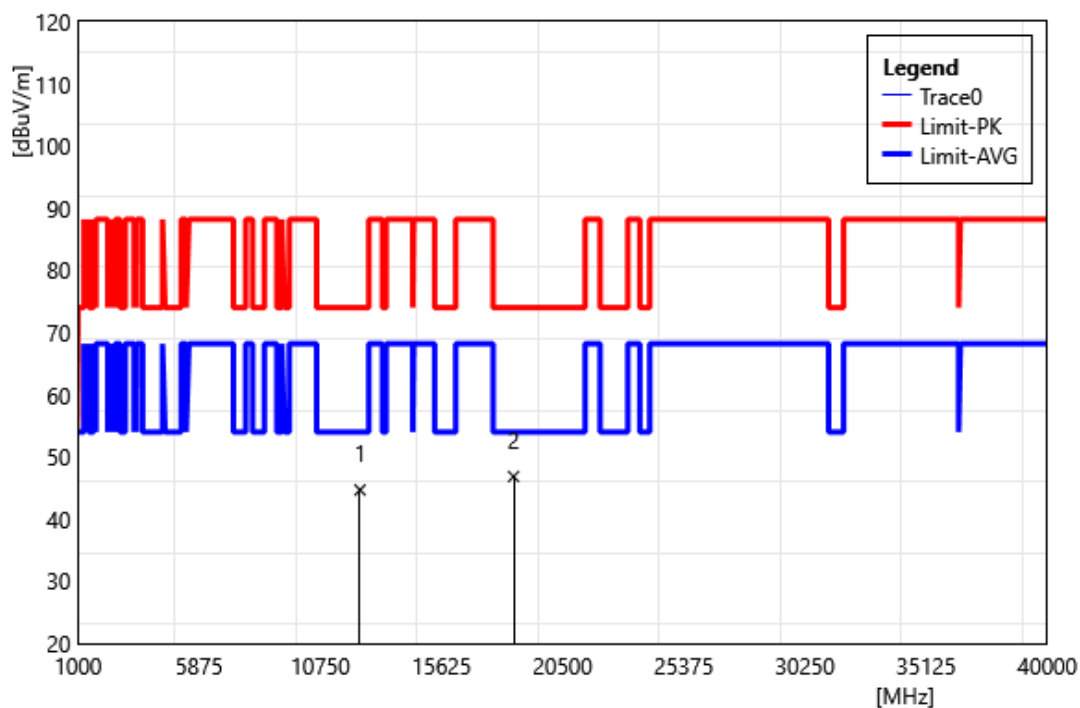


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	36.81	7.87	44.68	74.00	-29.32	PEAK
2	18525.00	38.59	8.26	46.85	74.00	-27.15	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6175 MHz		
Polarization:	Vertical		
Remark:			

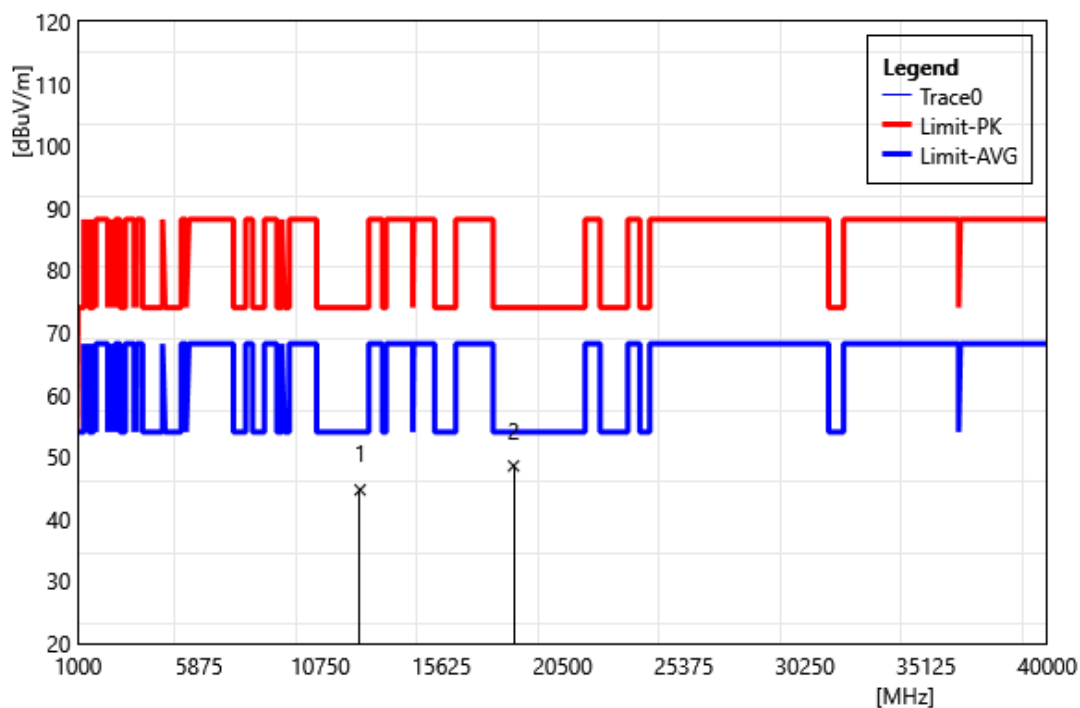


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	36.82	7.87	44.69	74.00	-29.31	PEAK
2	18525.00	40.27	8.26	48.53	74.00	-25.47	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6415 MHz		
Polarization:	Horizontal		
Remark:			

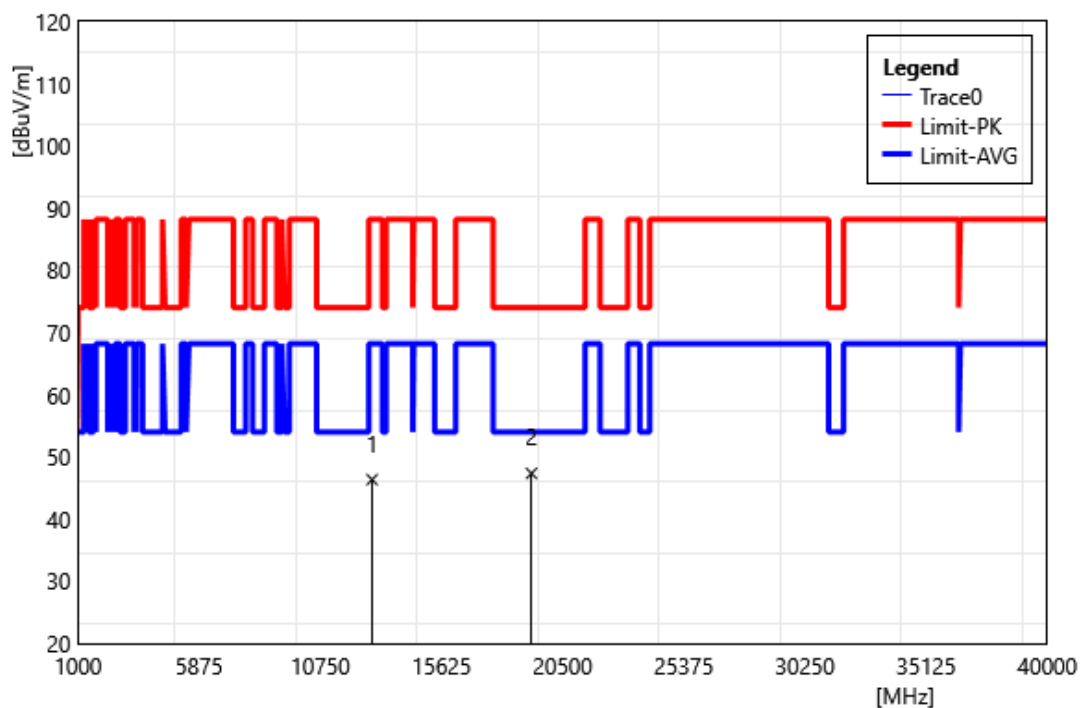


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	37.77	8.58	46.35	88.20	-41.85	PEAK
2	19245.00	38.77	8.58	47.35	74.00	-26.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6415 MHz		
Polarization:	Vertical		
Remark:			

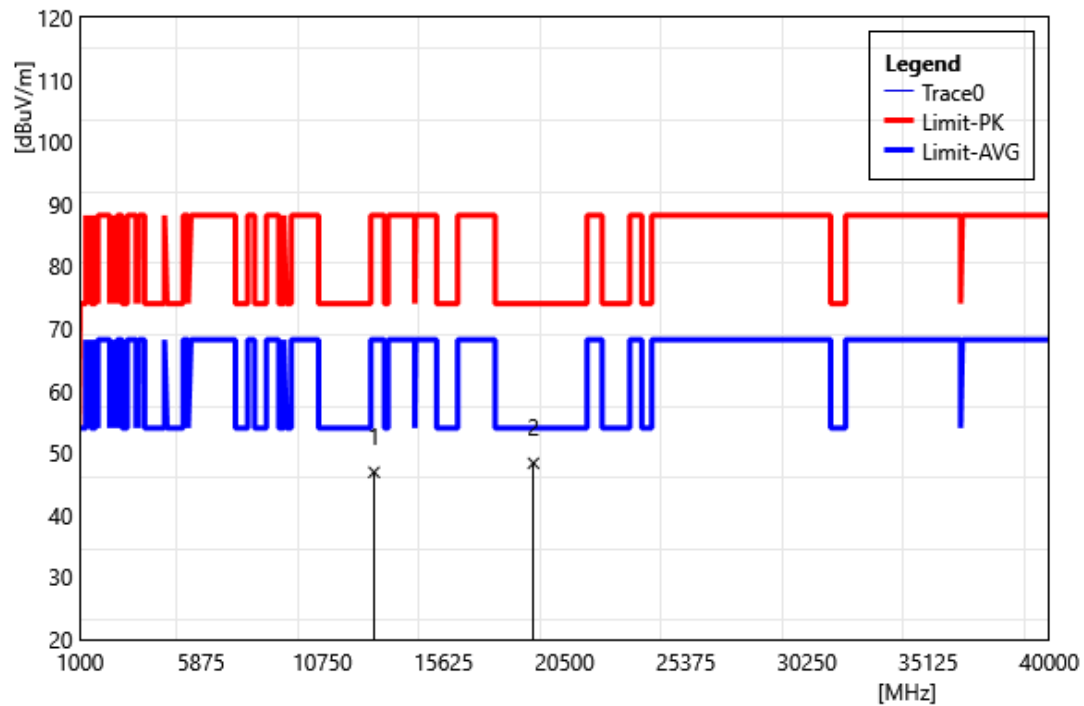


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	38.30	8.58	46.88	88.20	-41.32	PEAK
2	19245.00	39.76	8.58	48.34	74.00	-25.66	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6435 MHz		
Polarization:	Horizontal		
Remark:			

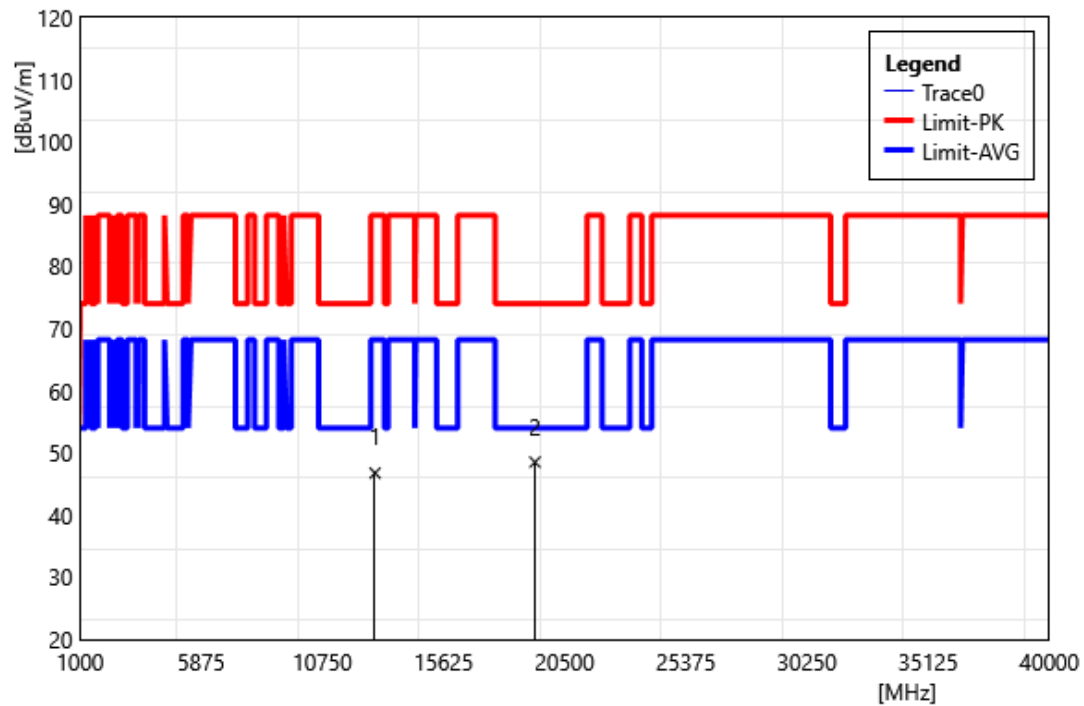


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	38.19	8.57	46.76	88.20	-41.44	PEAK
2	19305.00	39.91	8.61	48.52	74.00	-25.48	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6435 MHz		
Polarization:	Vertical		
Remark:			

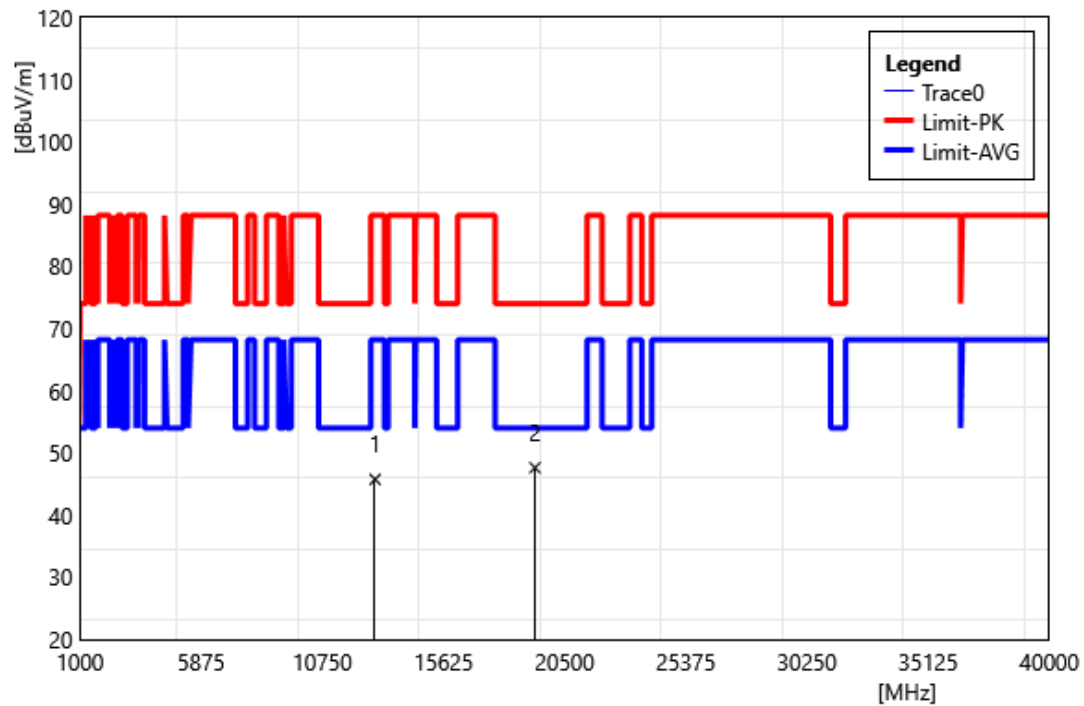


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	37.17	8.57	45.74	88.20	-42.46	PEAK
2	19305.00	39.01	8.61	47.62	74.00	-26.38	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6475 MHz		
Polarization:	Horizontal		
Remark:			

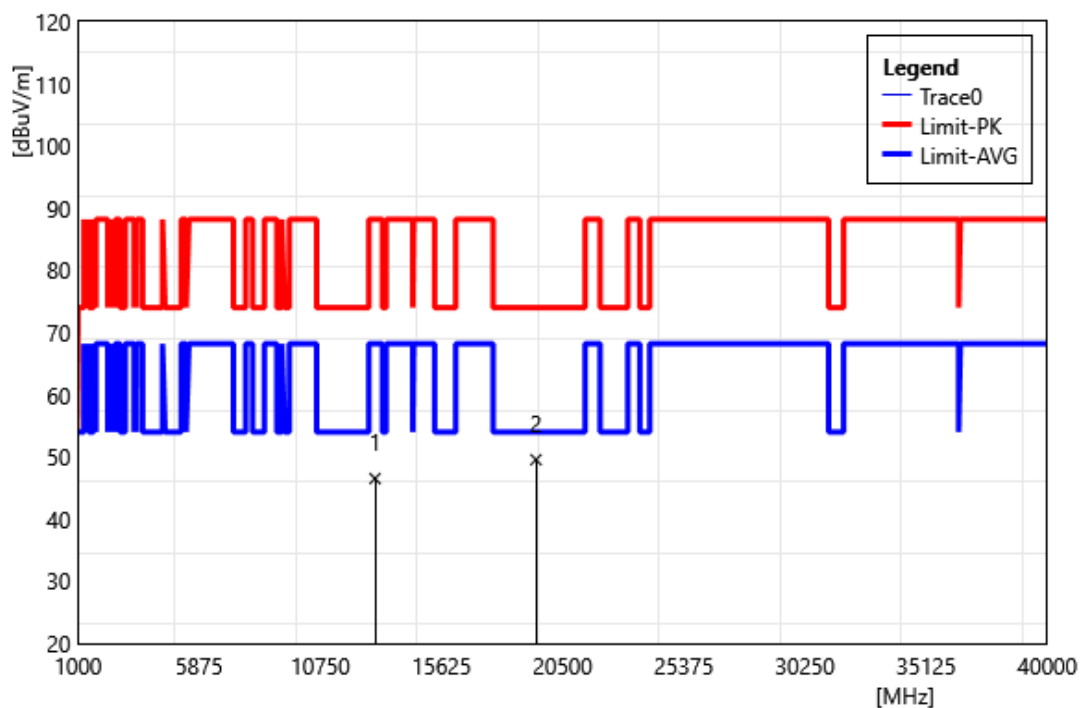


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	37.89	8.62	46.51	88.20	-41.69	PEAK
2	19425.00	40.88	8.66	49.54	74.00	-24.46	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6475 MHz		
Polarization:	Vertical		
Remark:			

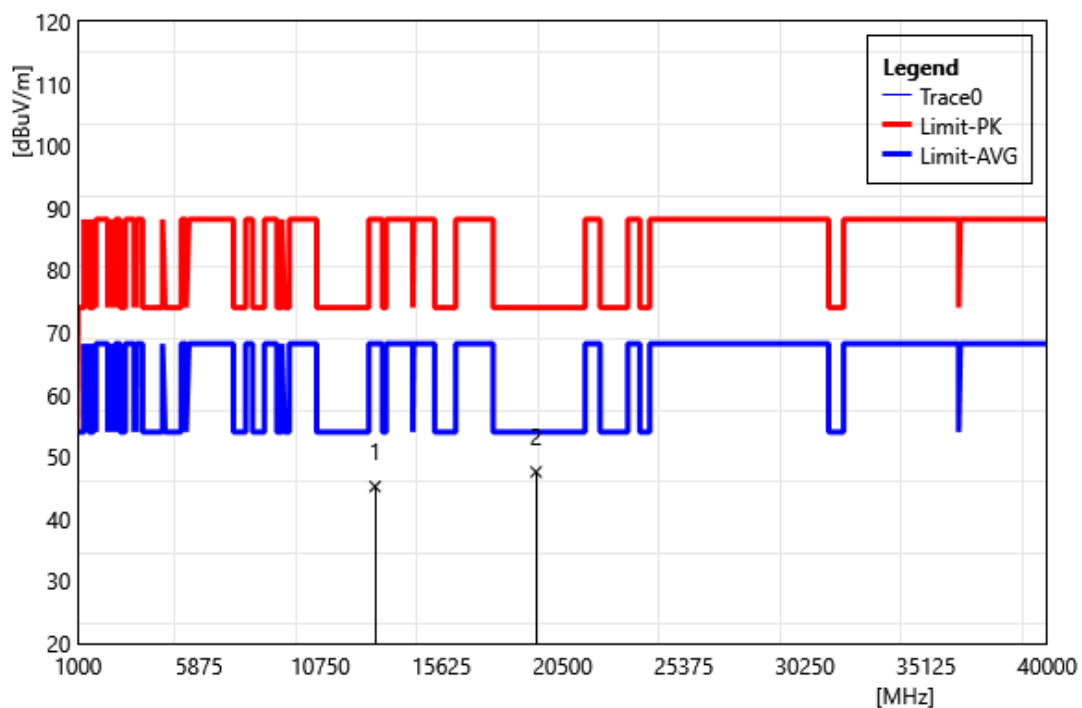


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	36.61	8.62	45.23	88.20	-42.97	PEAK
2	19425.00	38.92	8.66	47.58	74.00	-26.42	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6515 MHz		
Polarization:	Horizontal		
Remark:			

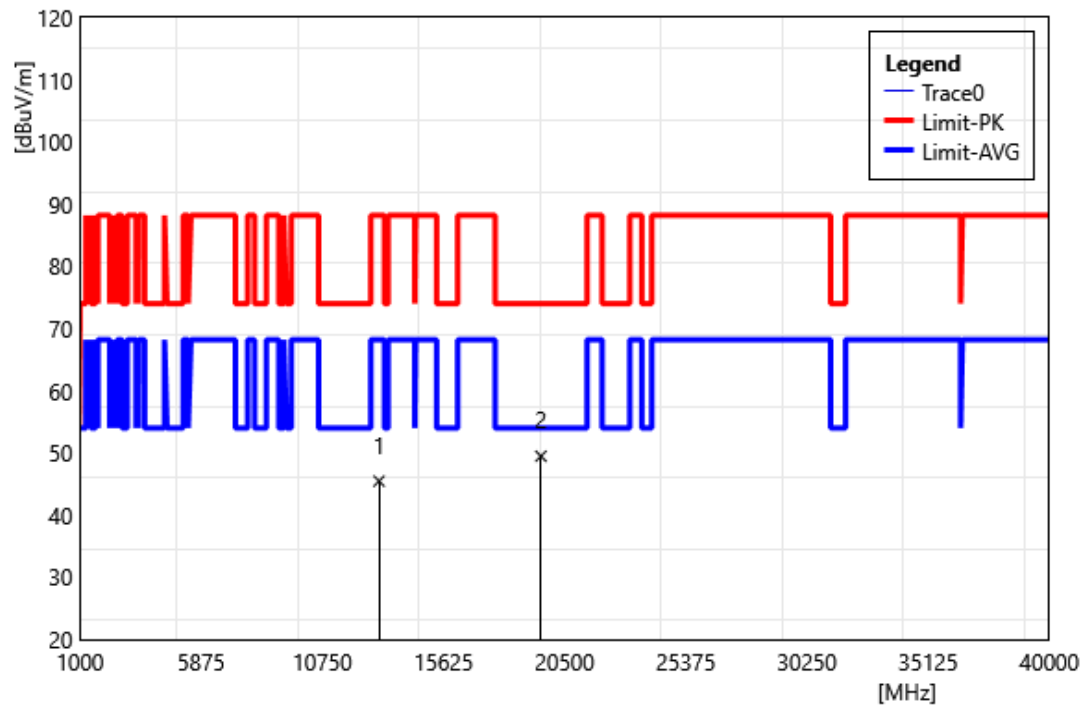


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	36.83	8.62	45.45	88.20	-42.75	PEAK
2	19545.00	40.75	8.72	49.47	74.00	-24.53	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6515 MHz		
Polarization:	Vertical		
Remark:			

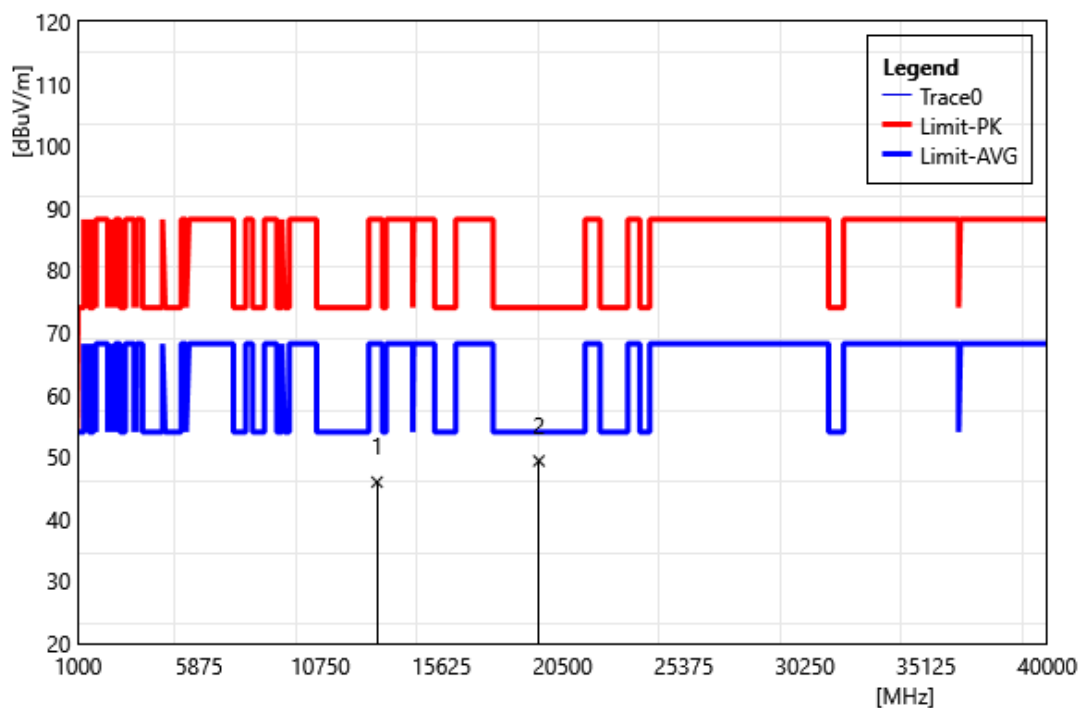


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	37.33	8.62	45.95	88.20	-42.25	PEAK
2	19545.00	40.64	8.72	49.36	74.00	-24.64	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6535 MHz		
Polarization:	Horizontal		
Remark:			

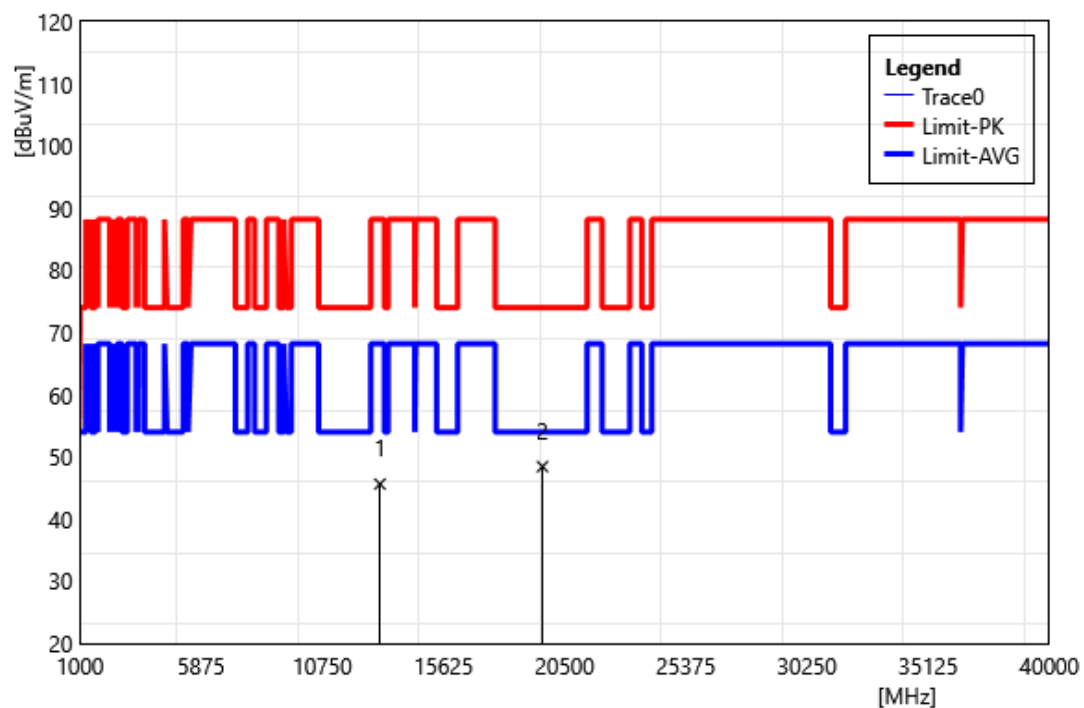


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	37.11	8.52	45.63	88.20	-42.57	PEAK
2	19605.00	39.70	8.74	48.44	74.00	-25.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6535 MHz		
Polarization:	Vertical		
Remark:			

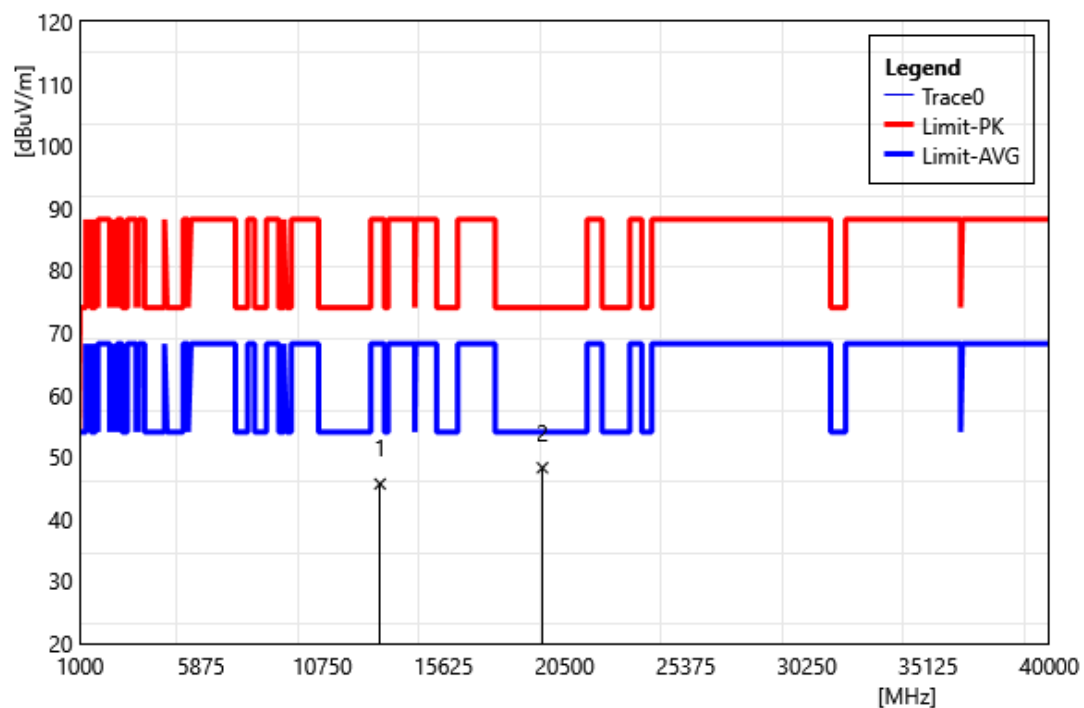


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	37.13	8.52	45.65	88.20	-42.55	PEAK
2	19605.00	39.50	8.74	48.24	74.00	-25.76	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6695 MHz		
Polarization:	Horizontal		
Remark:			

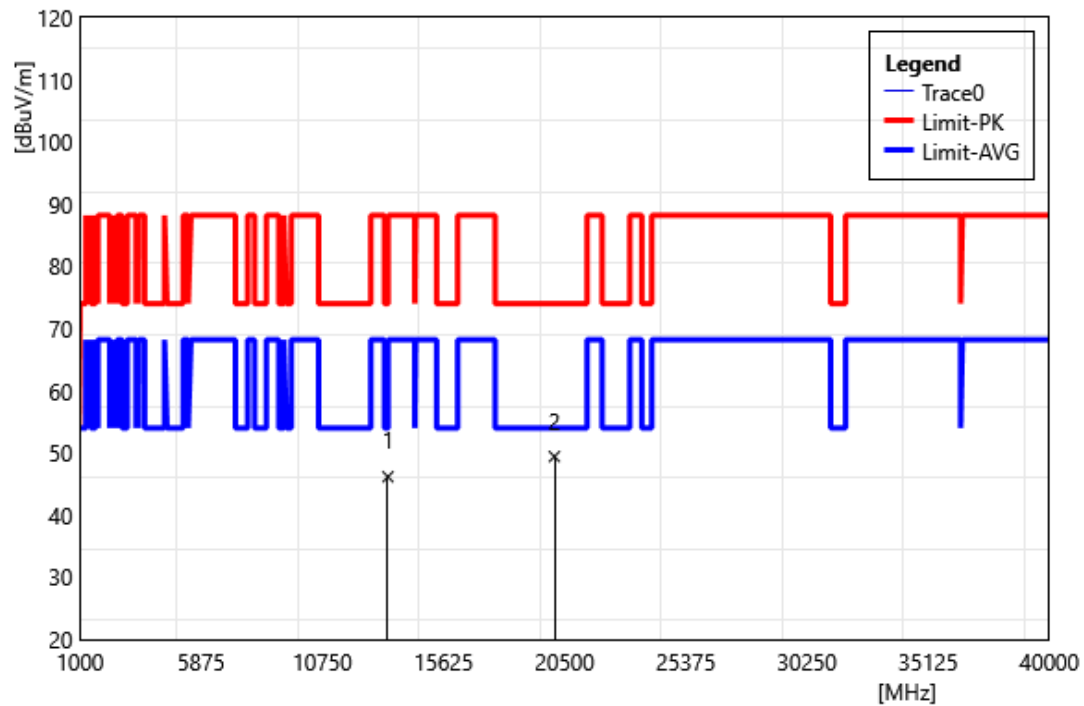


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	38.06	8.10	46.16	74.00	-27.84	PEAK
2	20085.00	40.46	8.96	49.42	74.00	-24.58	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6695 MHz		
Polarization:	Vertical		
Remark:			

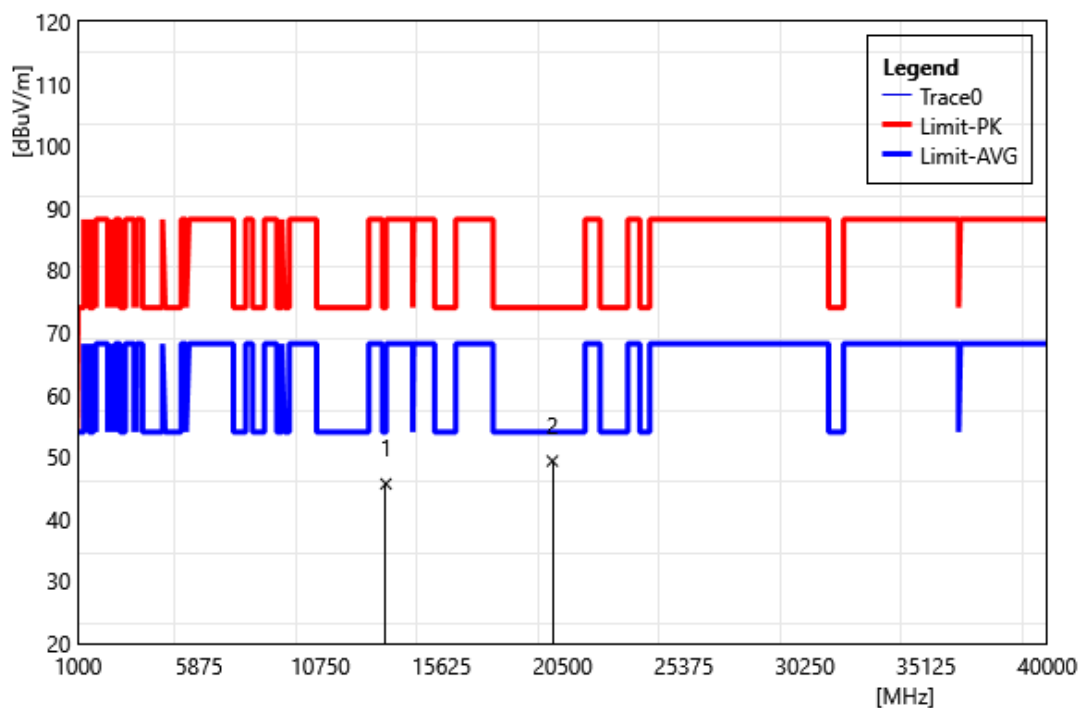


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	37.56	8.10	45.66	74.00	-28.34	PEAK
2	20085.00	40.38	8.96	49.34	74.00	-24.66	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6855 MHz		
Polarization:	Horizontal		
Remark:			

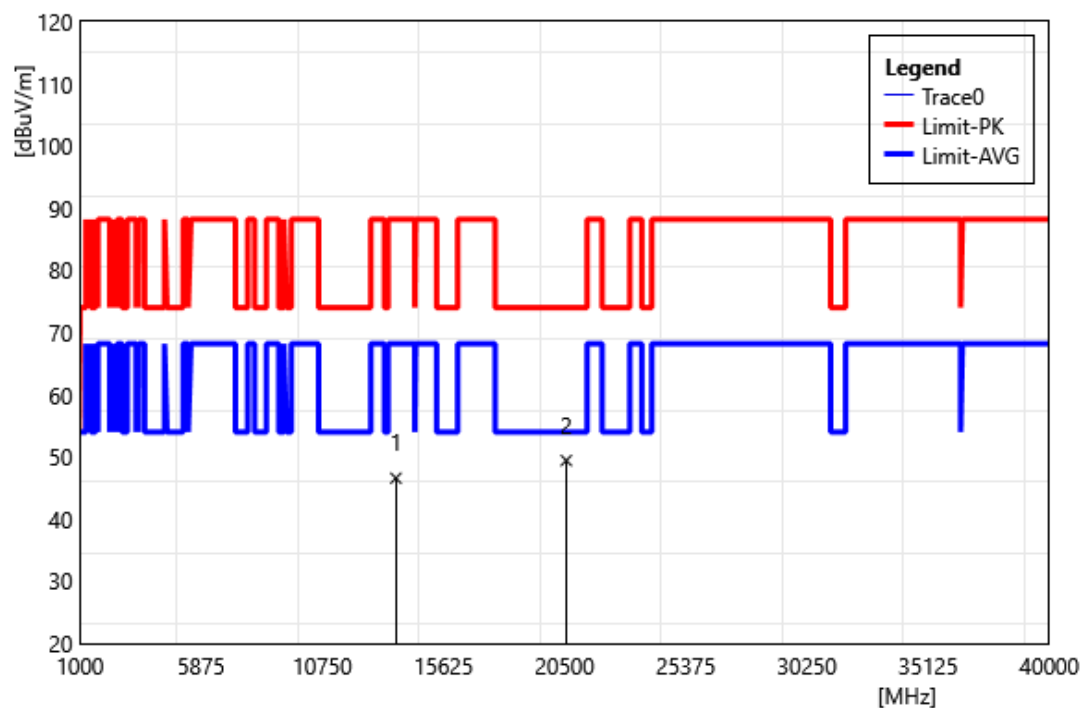


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	38.63	7.95	46.58	88.20	-41.62	PEAK
2	20565.00	40.24	9.18	49.42	74.00	-24.58	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6855 MHz		
Polarization:	Vertical		
Remark:			

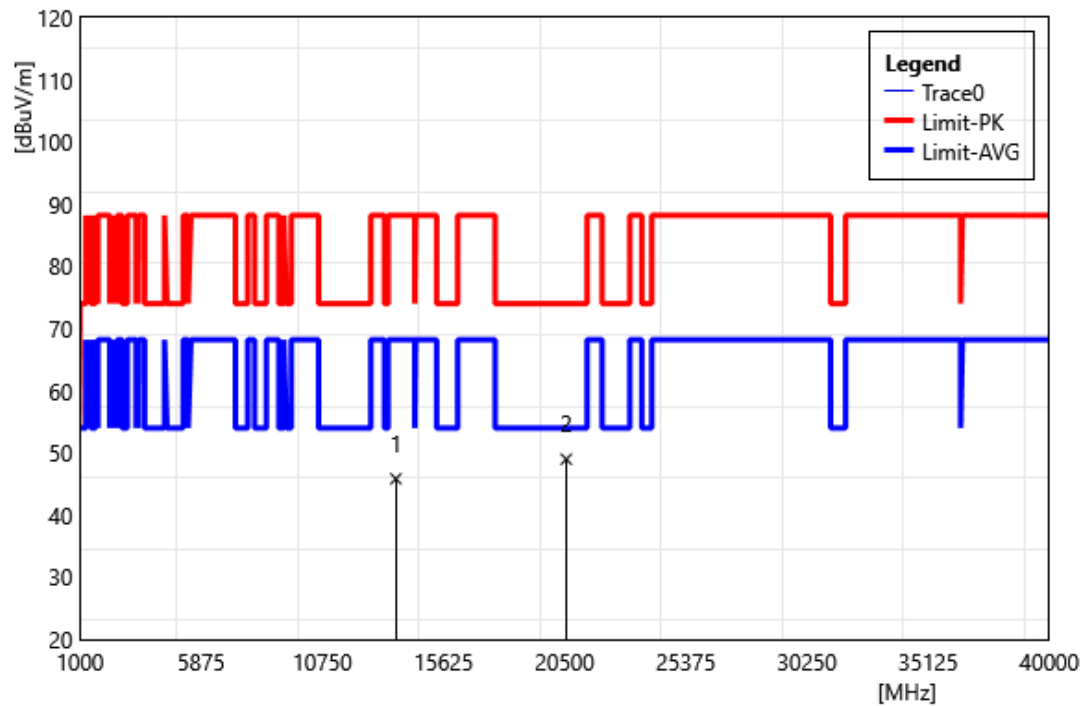


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	37.87	7.95	45.82	88.20	-42.38	PEAK
2	20565.00	39.80	9.18	48.99	74.00	-25.02	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6875 MHz		
Polarization:	Horizontal		
Remark:			

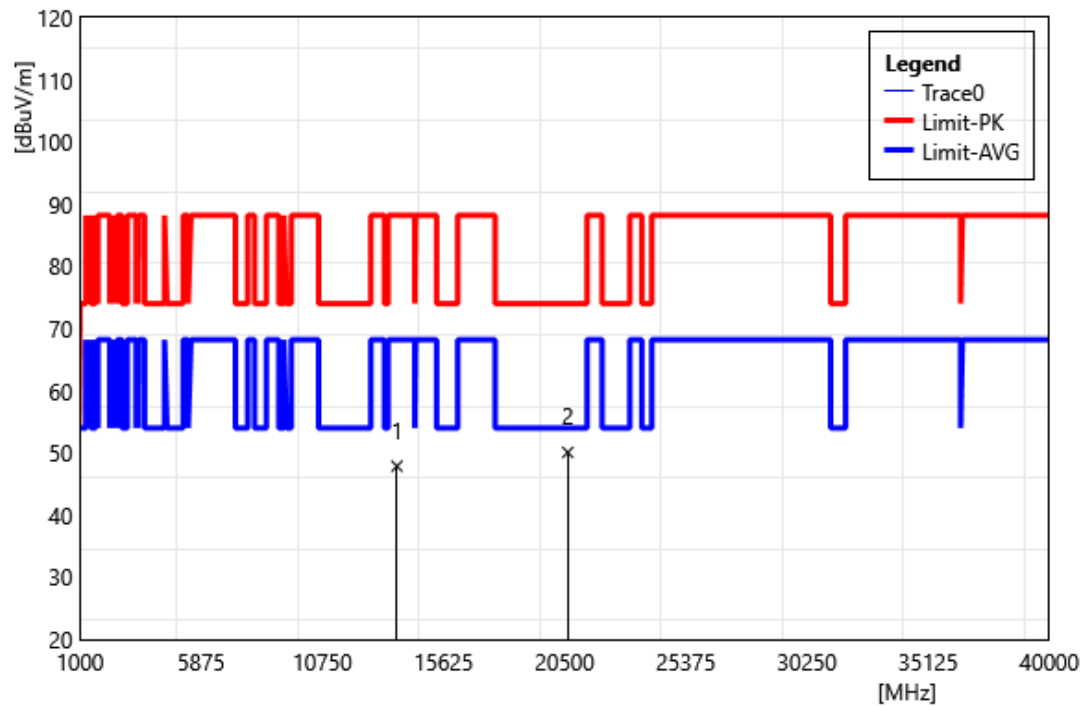


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	39.97	7.90	47.87	88.20	-40.33	PEAK
2	20625.00	40.88	9.20	50.08	74.00	-23.92	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6875 MHz		
Polarization:	Vertical		
Remark:			

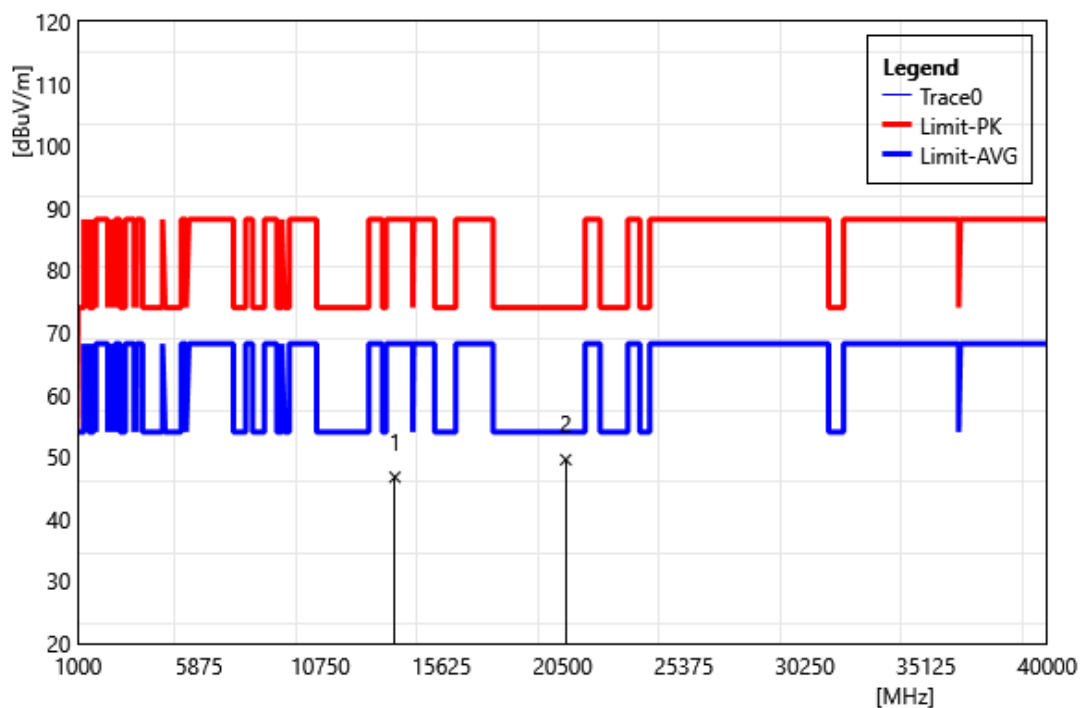


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	38.83	7.90	46.73	88.20	-41.47	PEAK
2	20625.00	40.34	9.20	49.54	74.00	-24.46	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6895 MHz		
Polarization:	Horizontal		
Remark:			

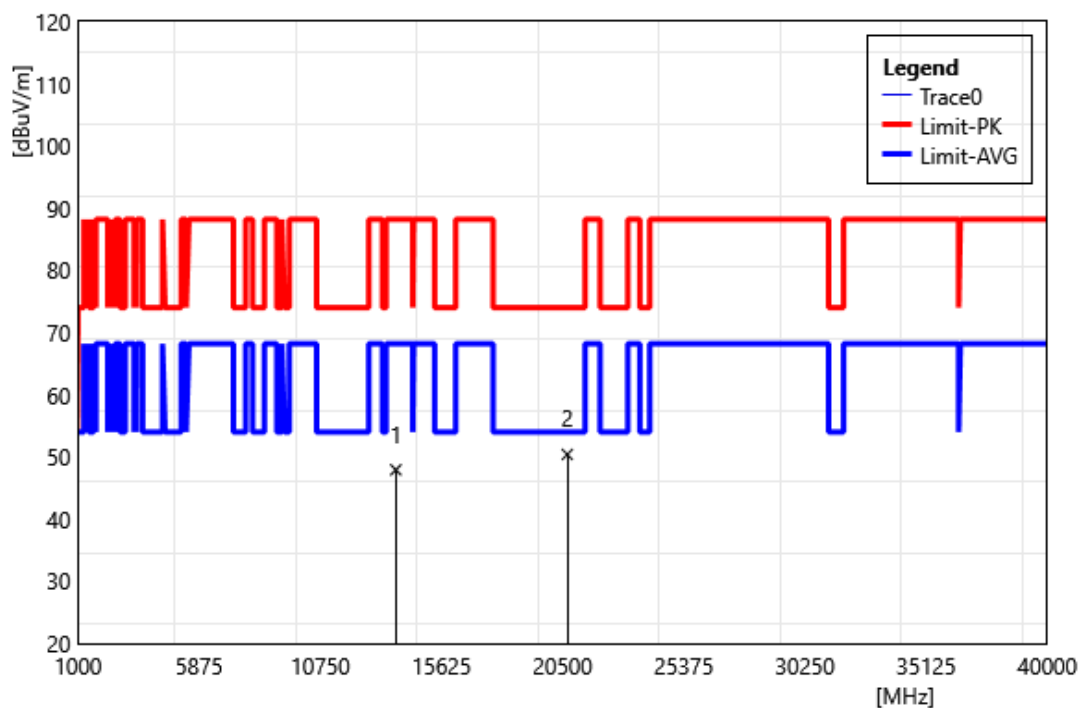


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	40.07	7.85	47.92	88.20	-40.28	PEAK
2	20685.00	41.18	9.22	50.40	74.00	-23.60	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6895 MHz		
Polarization:	Vertical		
Remark:			

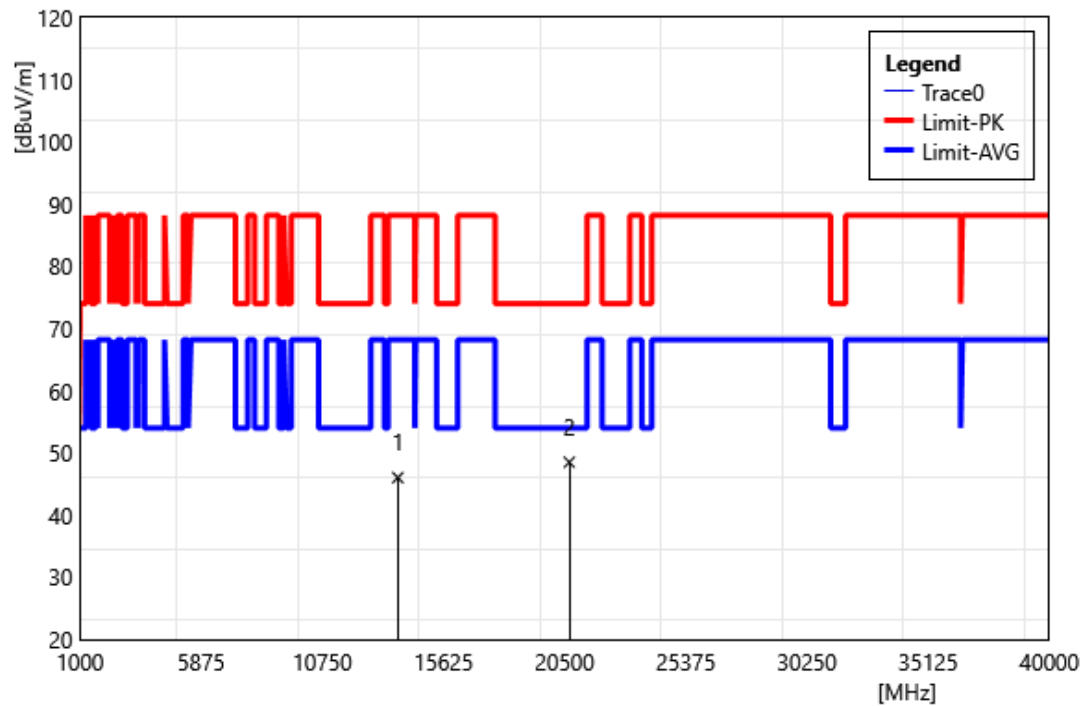


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	38.17	7.85	46.02	88.20	-42.18	PEAK
2	20685.00	39.28	9.22	48.50	74.00	-25.50	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6995 MHz		
Polarization:	Horizontal		
Remark:			

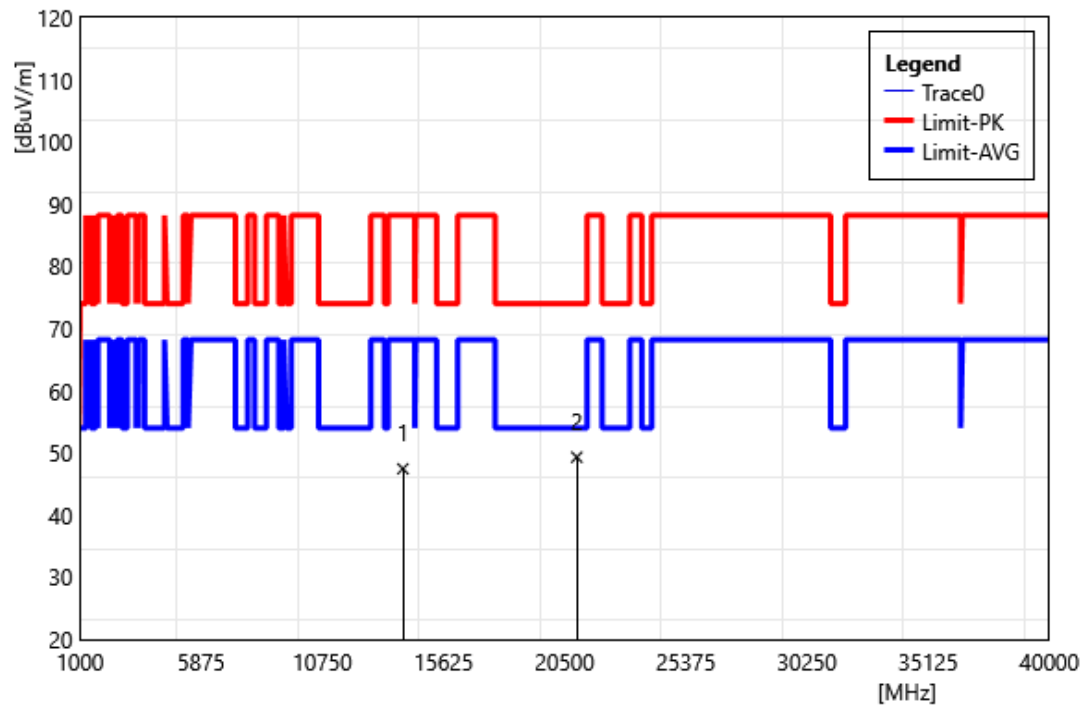


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	39.18	8.26	47.44	88.20	-40.76	PEAK
2	20985.00	39.95	9.36	49.31	74.00	-24.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 6995 MHz		
Polarization:	Vertical		
Remark:			

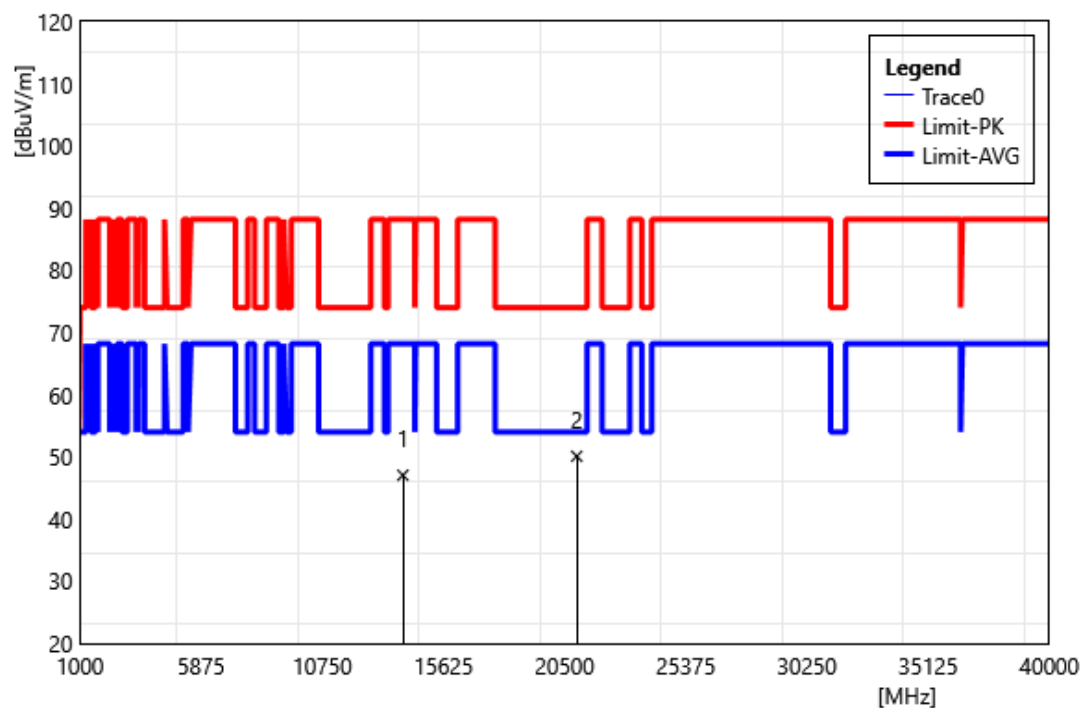


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	38.79	8.26	47.05	88.20	-41.15	PEAK
2	20985.00	40.75	9.36	50.11	74.00	-23.89	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 7115 MHz		
Polarization:	Horizontal		
Remark:			

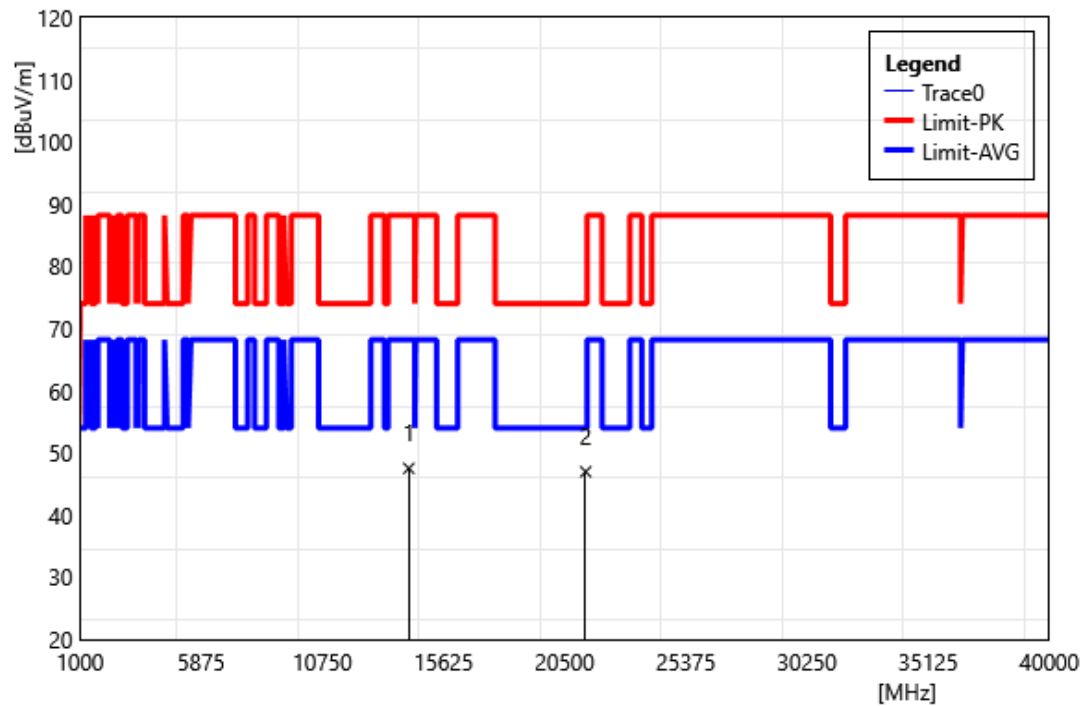


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	38.84	8.68	47.52	88.20	-40.68	PEAK
2	21345.00	37.45	9.53	46.98	74.00	-27.02	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 7115 MHz		
Polarization:	Vertical		
Remark:			

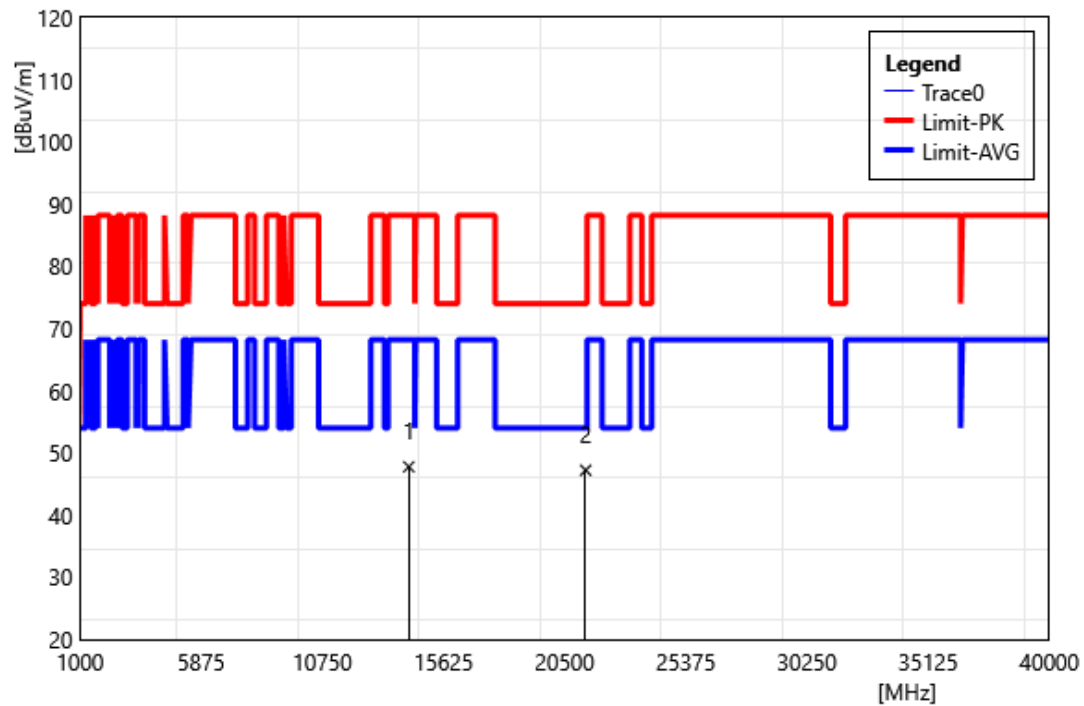


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	39.07	8.68	47.75	88.20	-40.45	PEAK
2	21345.00	37.68	9.53	47.21	74.00	-26.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5965 MHz		
Polarization:	Horizontal		
Remark:			

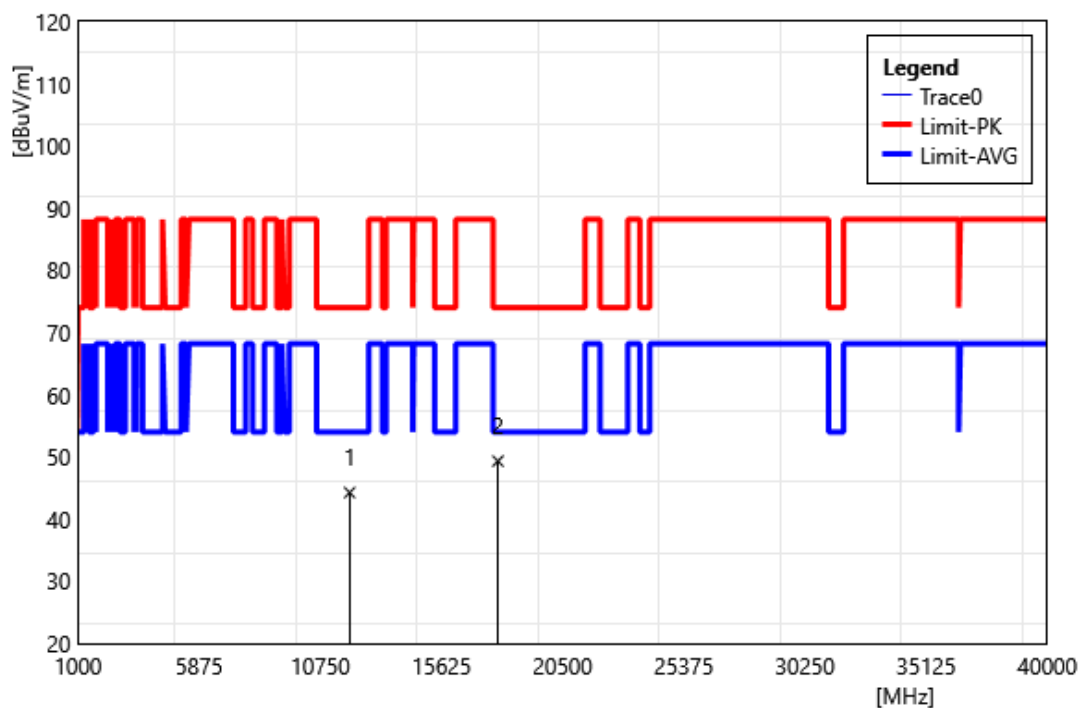


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	36.63	7.63	44.26	74.00	-29.74	PEAK
2	17895.00	41.91	7.42	49.33	74.00	-24.67	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5965 MHz		
Polarization:	Vertical		
Remark:			

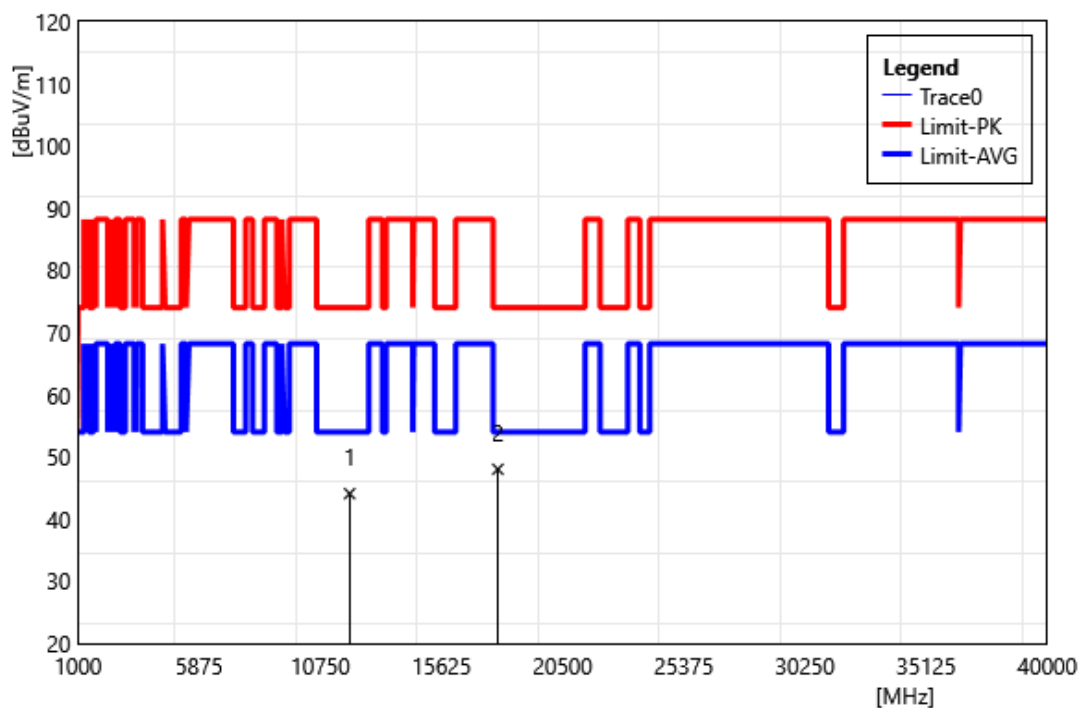


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	36.46	7.63	44.09	74.00	-29.91	PEAK
2	17895.00	40.59	7.42	48.01	74.00	-25.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6165 MHz		
Polarization:	Horizontal		
Remark:			

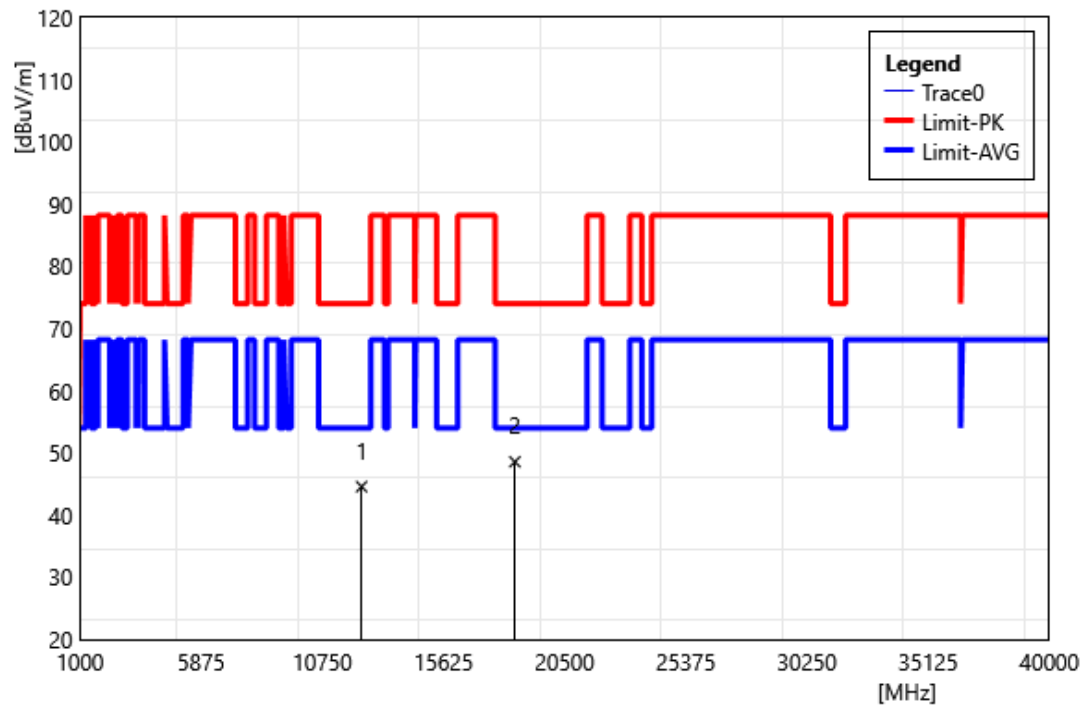


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	36.76	7.81	44.57	74.00	-29.43	PEAK
2	18495.00	40.32	8.25	48.57	74.00	-25.43	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6165 MHz		
Polarization:	Vertical		
Remark:			

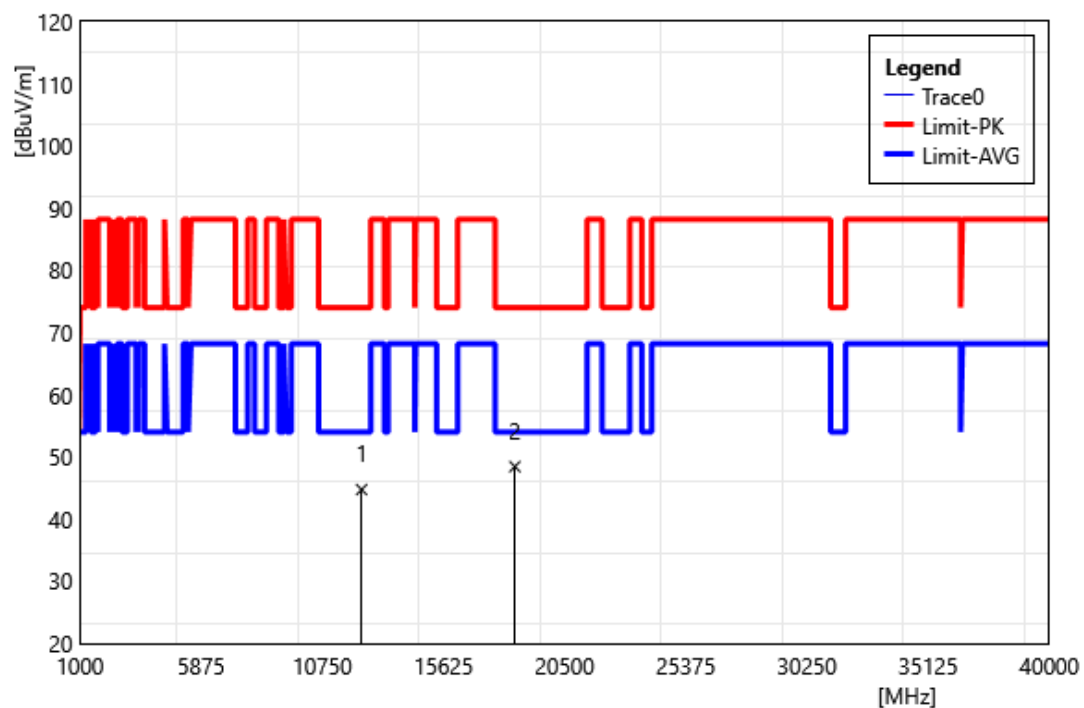


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	36.93	7.81	44.74	74.00	-29.26	PEAK
2	18495.00	40.17	8.25	48.42	74.00	-25.58	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6405 MHz		
Polarization:	Horizontal		
Remark:			

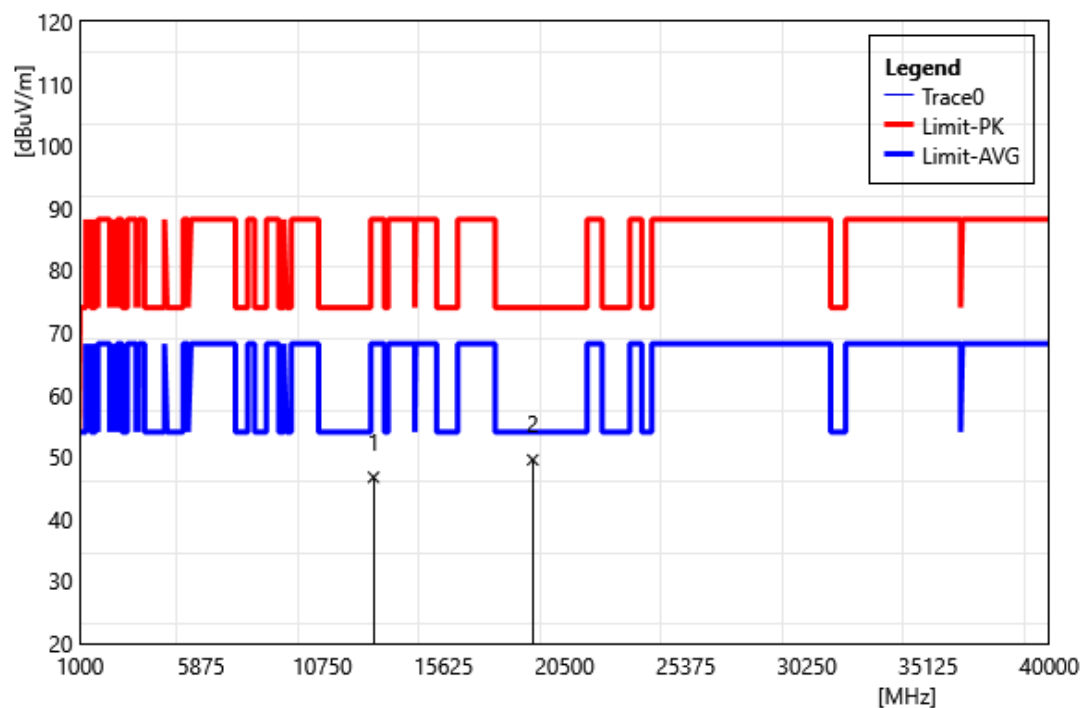


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	38.12	8.60	46.72	88.20	-41.48	PEAK
2	19215.00	40.95	8.57	49.52	74.00	-24.48	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6405 MHz		
Polarization:	Vertical		
Remark:			

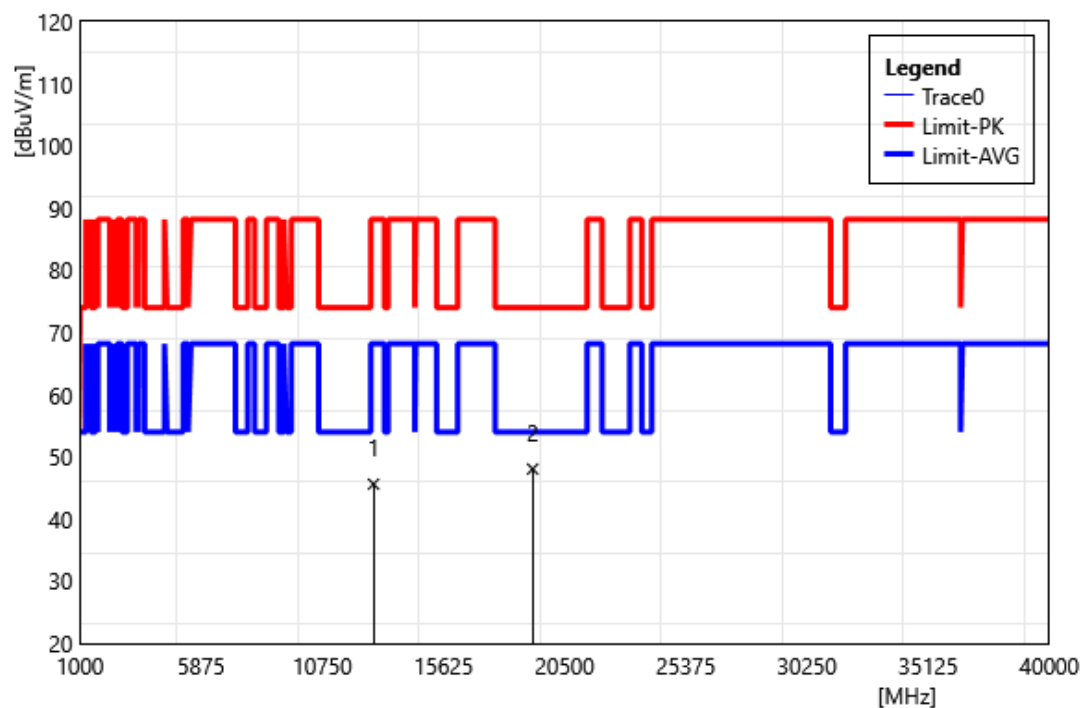


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	37.03	8.60	45.63	88.20	-42.57	PEAK
2	19215.00	39.48	8.57	48.05	74.00	-25.95	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6445 MHz		
Polarization:	Horizontal		
Remark:			

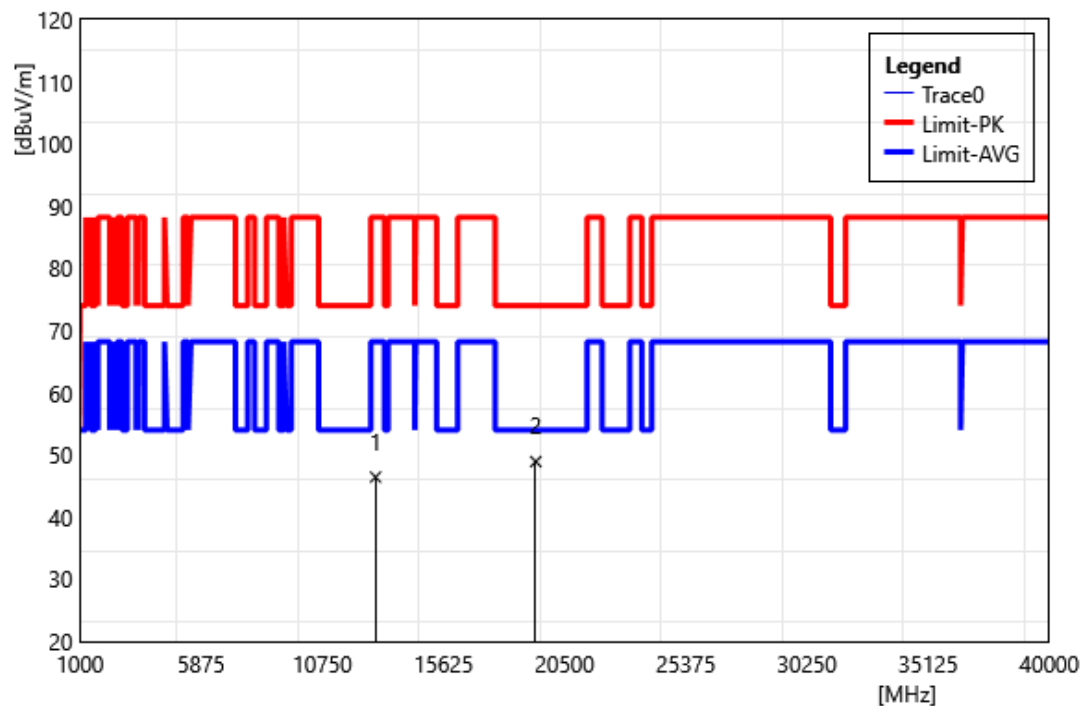


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	37.88	8.55	46.43	88.20	-41.77	PEAK
2	19335.00	40.29	8.63	48.92	74.00	-25.08	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6445 MHz		
Polarization:	Vertical		
Remark:			

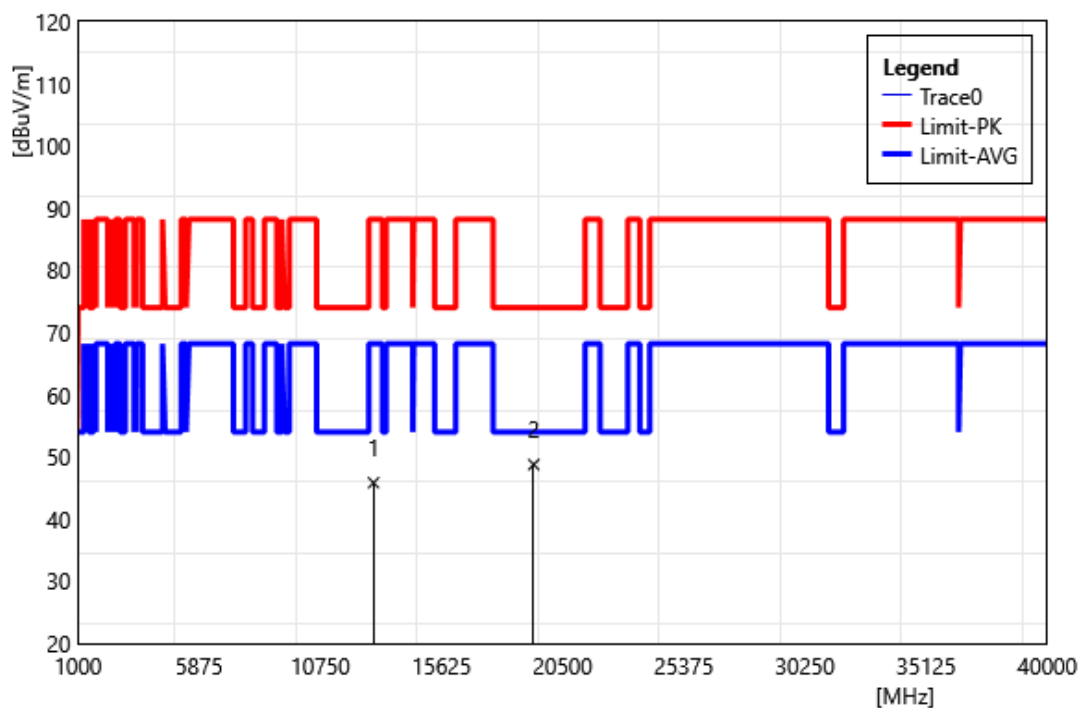


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	37.29	8.55	45.84	88.20	-42.36	PEAK
2	19335.00	40.13	8.63	48.76	74.00	-25.24	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6485 MHz		
Polarization:	Horizontal		
Remark:			

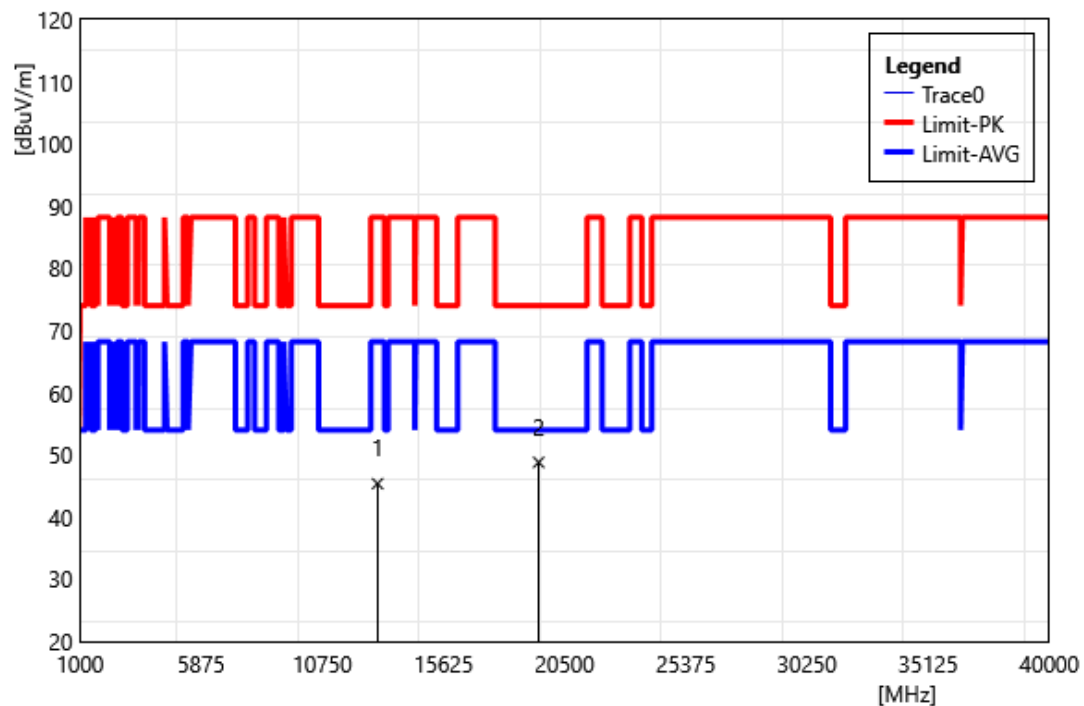


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	36.71	8.66	45.37	88.20	-42.83	PEAK
2	19455.00	40.13	8.67	48.80	74.00	-25.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6485 MHz		
Polarization:	Vertical		
Remark:			

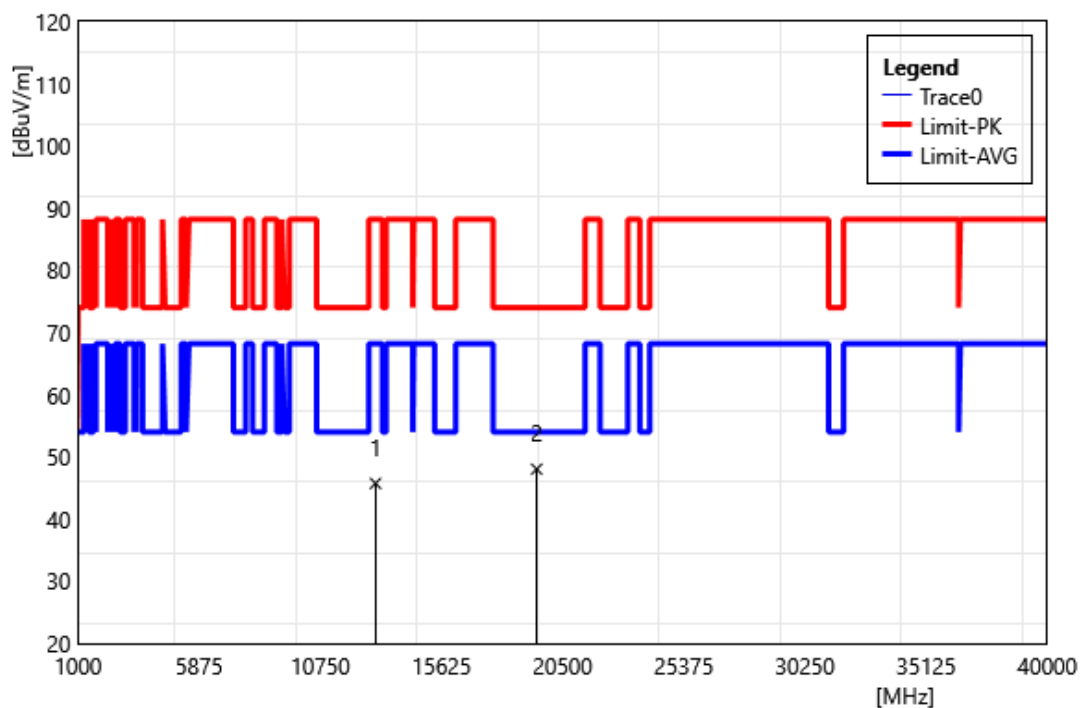


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	37.08	8.66	45.74	88.20	-42.46	PEAK
2	19455.00	39.37	8.67	48.04	74.00	-25.96	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6525 MHz		
Polarization:	Horizontal		
Remark:			

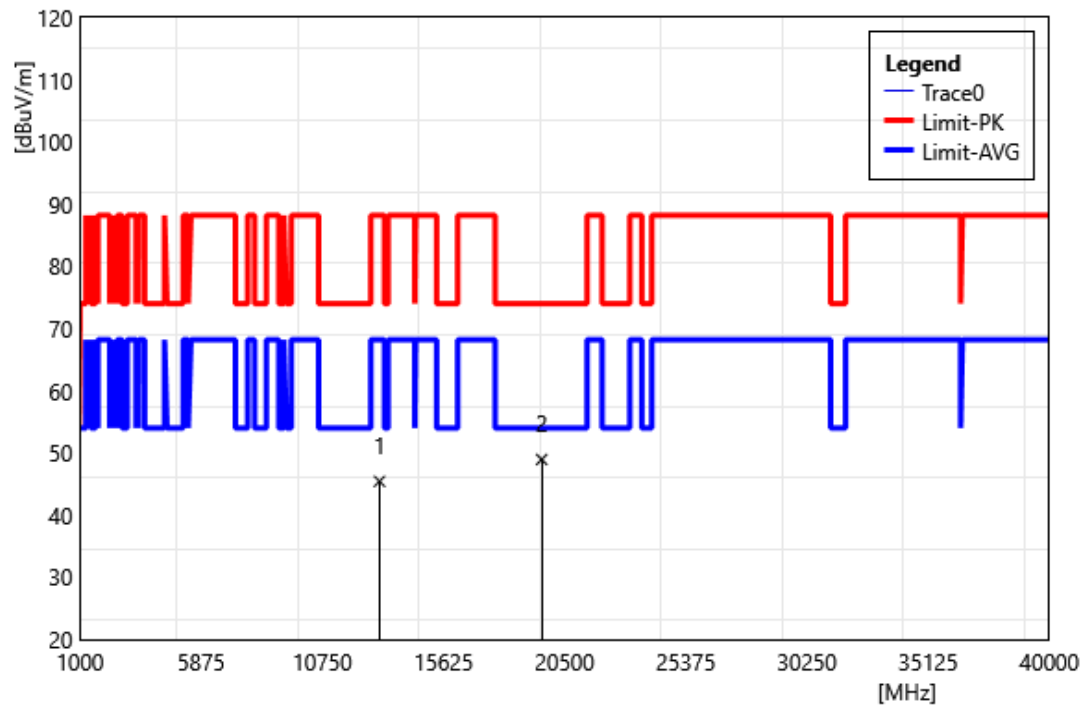


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	36.84	8.57	45.41	88.20	-42.79	PEAK
2	19575.00	40.21	8.73	48.94	74.00	-25.06	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6525 MHz		
Polarization:	Vertical		
Remark:			

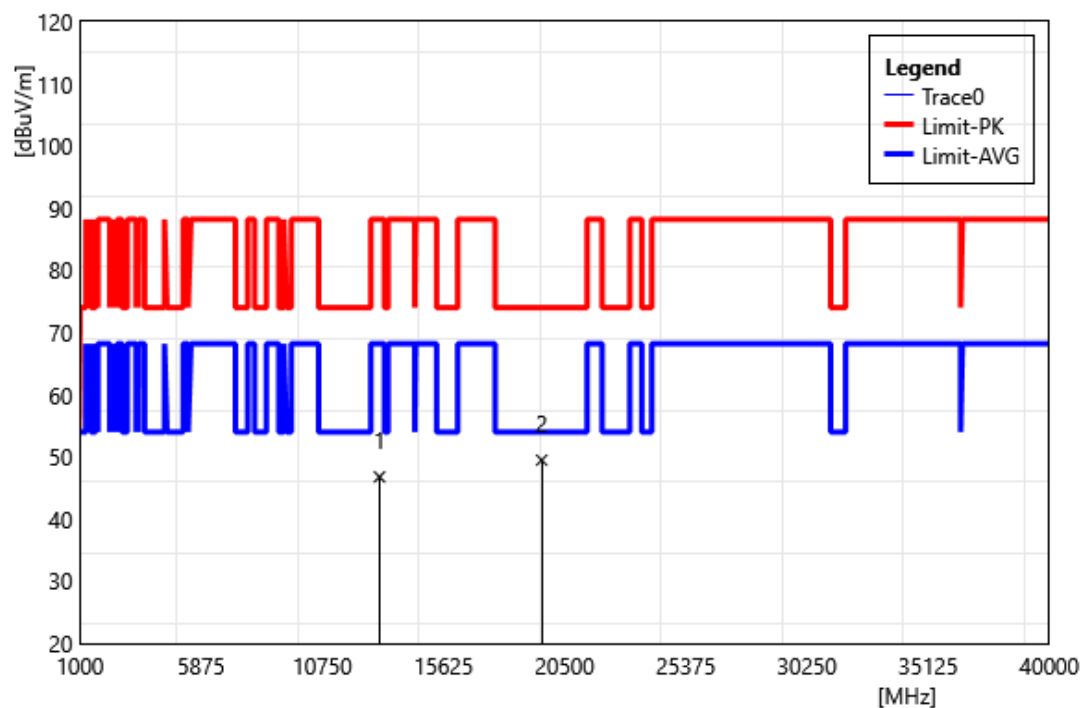


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	38.21	8.57	46.78	88.20	-41.42	PEAK
2	19575.00	40.75	8.73	49.48	74.00	-24.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6565 MHz		
Polarization:	Horizontal		
Remark:			

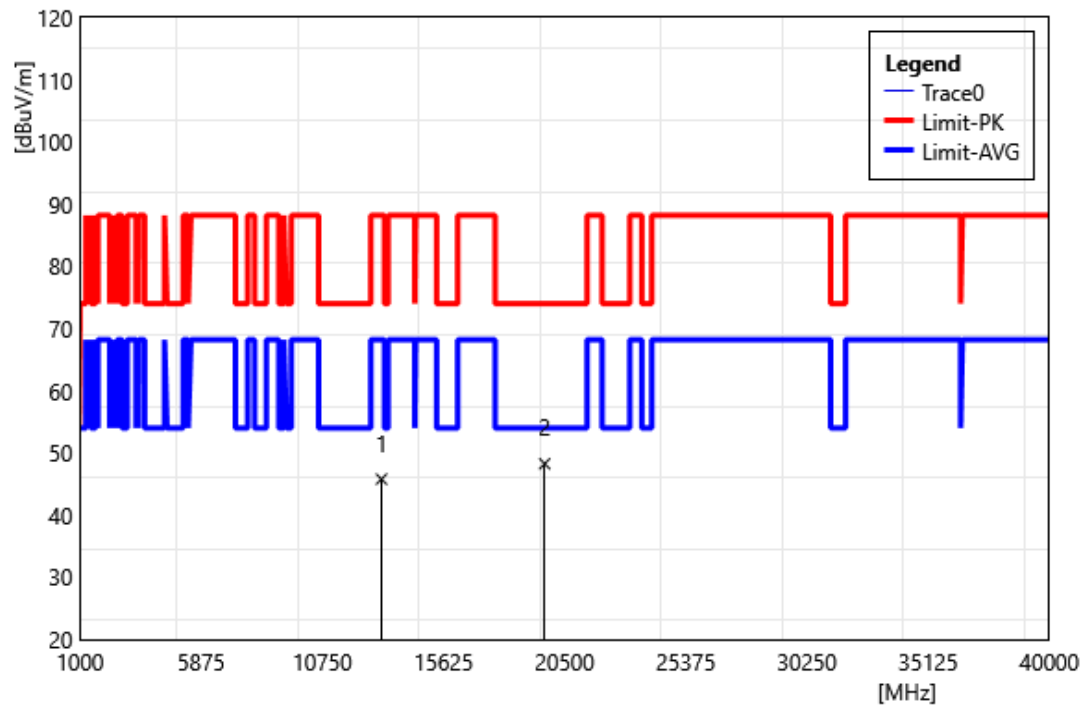


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	37.30	8.48	45.78	88.20	-42.42	PEAK
2	19695.00	39.46	8.79	48.25	74.00	-25.75	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6565 MHz		
Polarization:	Vertical		
Remark:			

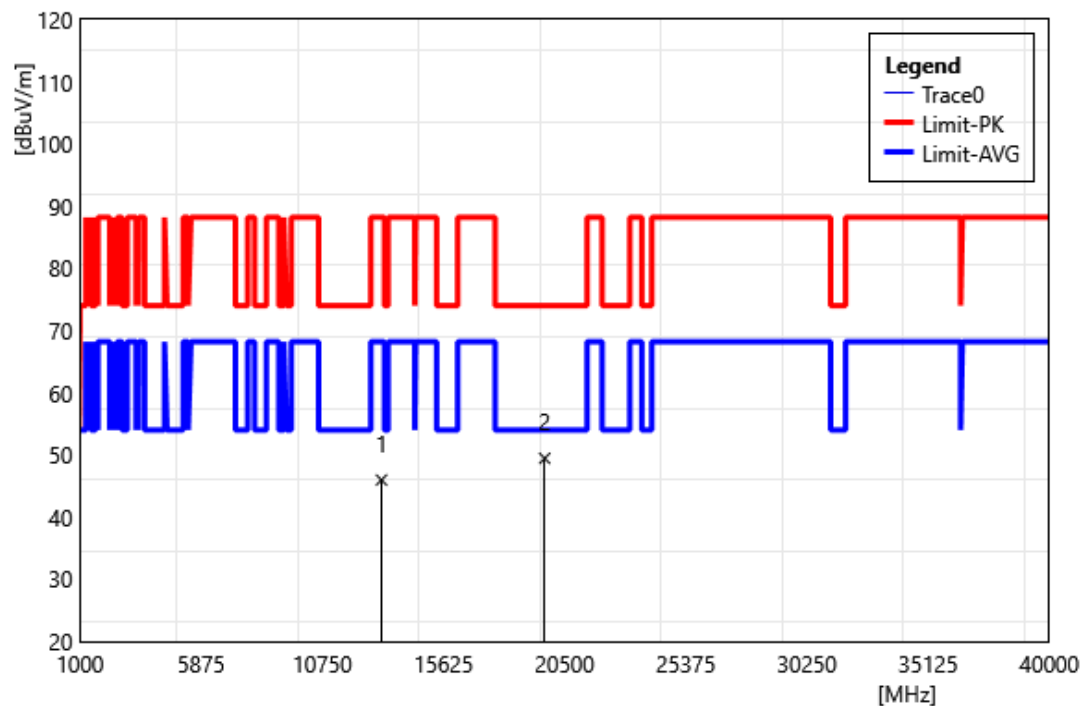


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	37.48	8.48	45.96	88.20	-42.24	PEAK
2	19695.00	40.67	8.79	49.46	74.00	-24.54	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6685 MHz		
Polarization:	Horizontal		
Remark:			

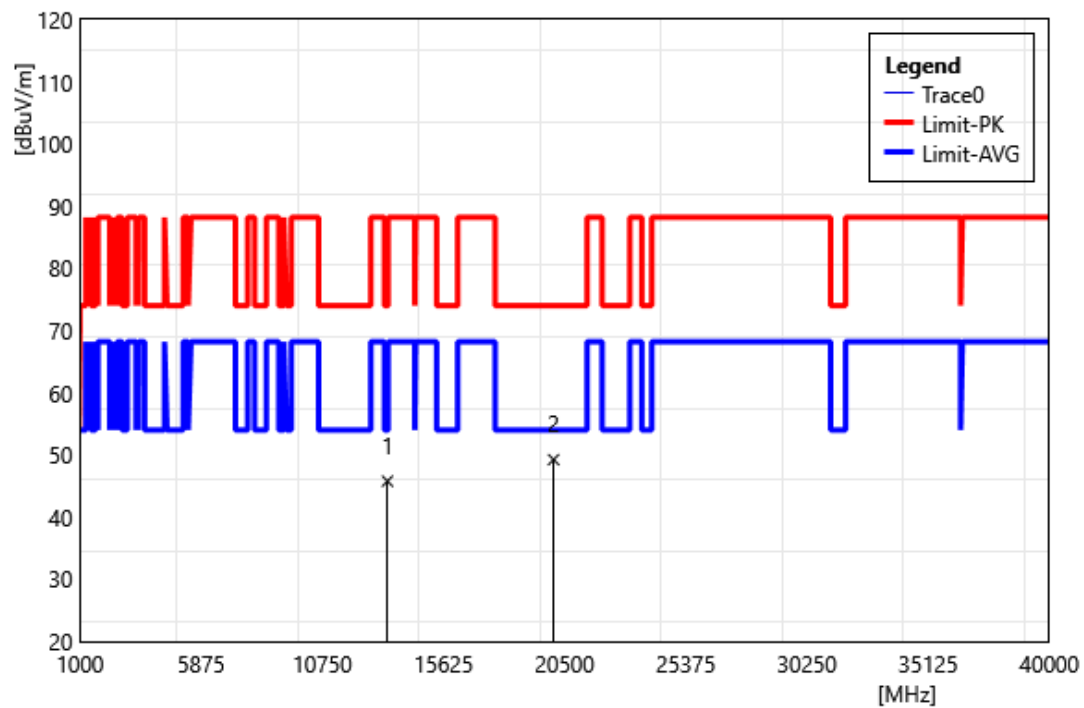


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	37.63	8.14	45.77	74.00	-28.23	PEAK
2	20055.00	40.28	8.94	49.22	74.00	-24.78	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6685 MHz		
Polarization:	Vertical		
Remark:			

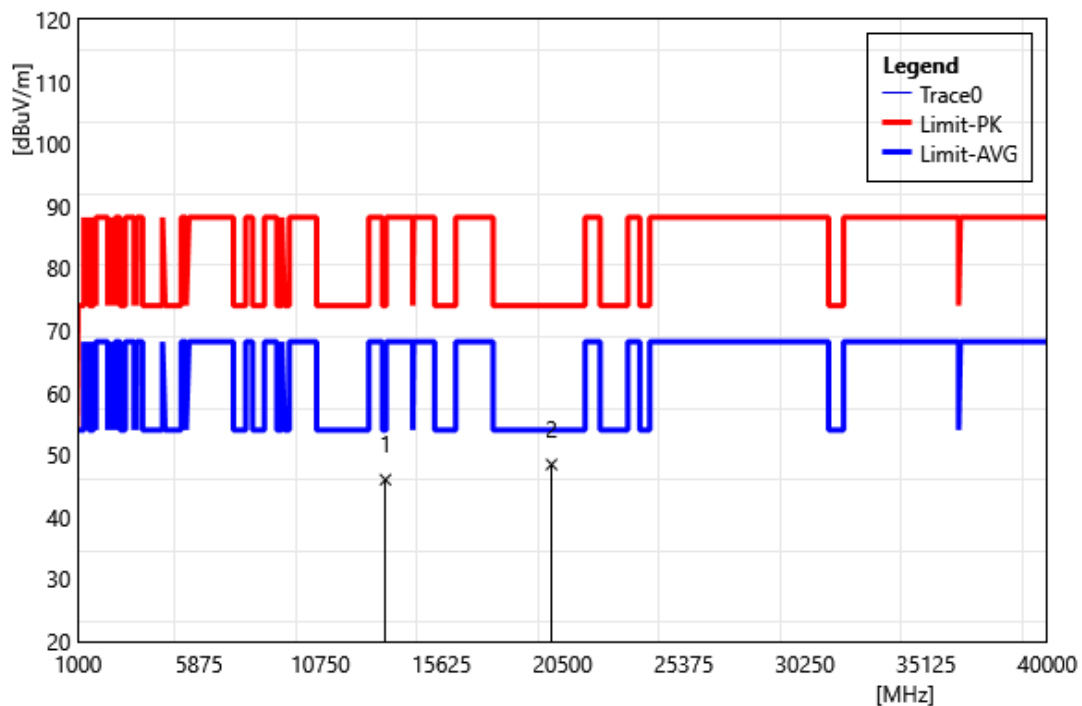


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	37.87	8.14	46.01	74.00	-27.99	PEAK
2	20055.00	39.51	8.94	48.45	74.00	-25.55	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6845 MHz		
Polarization:	Horizontal		
Remark:			

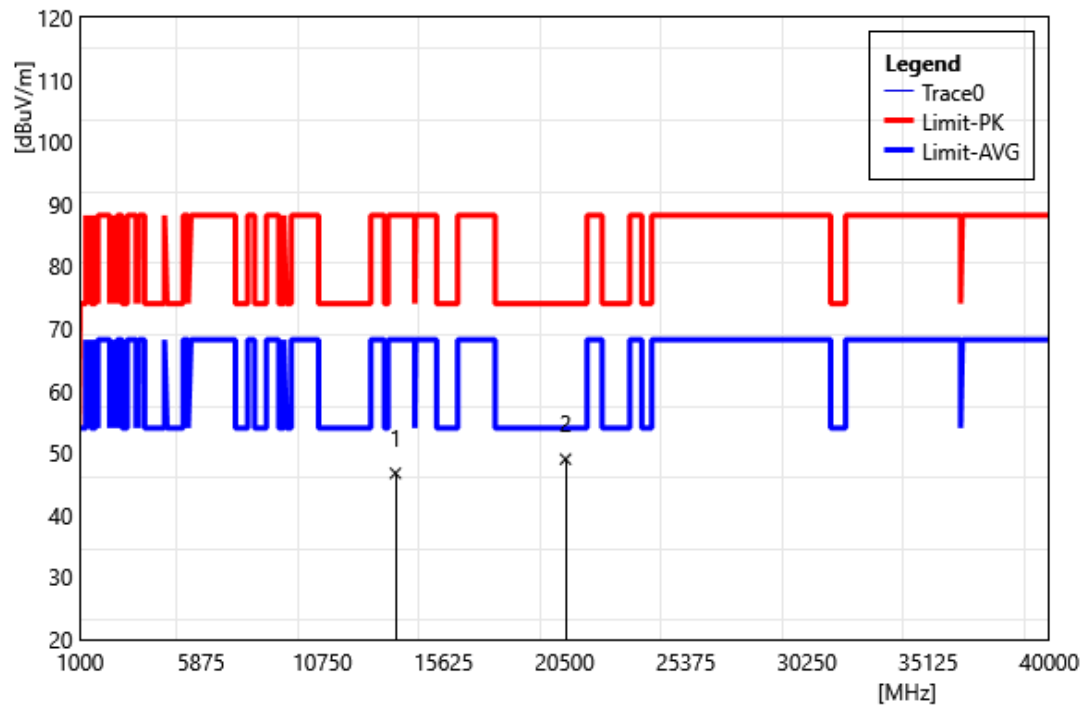


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	38.79	7.93	46.72	88.20	-41.48	PEAK
2	20535.00	39.82	9.16	48.98	74.00	-25.02	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6845 MHz		
Polarization:	Vertical		
Remark:			

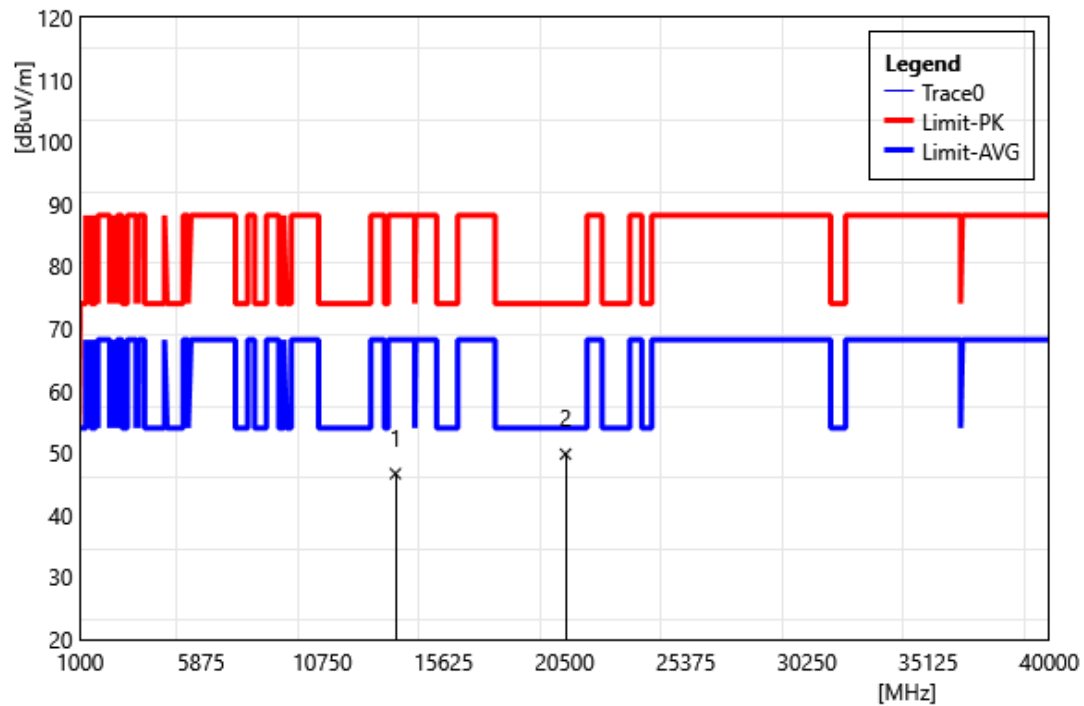


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	38.73	7.93	46.66	88.20	-41.54	PEAK
2	20535.00	40.64	9.16	49.80	74.00	-24.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6885 MHz		
Polarization:	Horizontal		
Remark:			

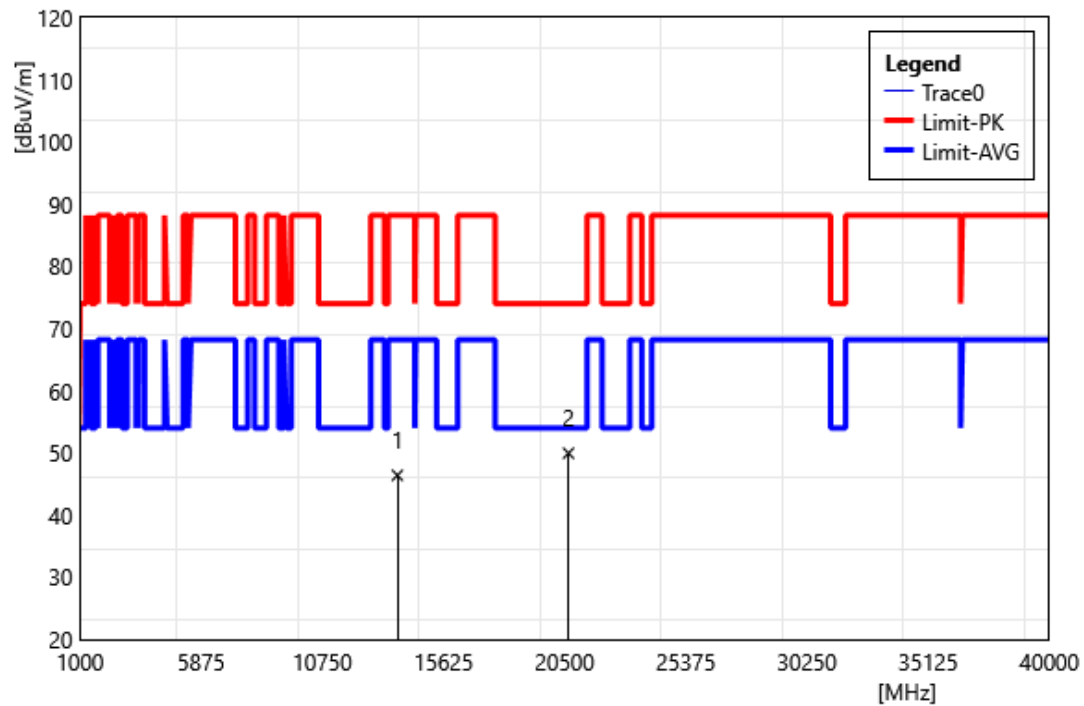


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	38.52	7.87	46.39	88.20	-41.81	PEAK
2	20655.00	40.73	9.21	49.94	74.00	-24.06	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6885 MHz		
Polarization:	Vertical		
Remark:			

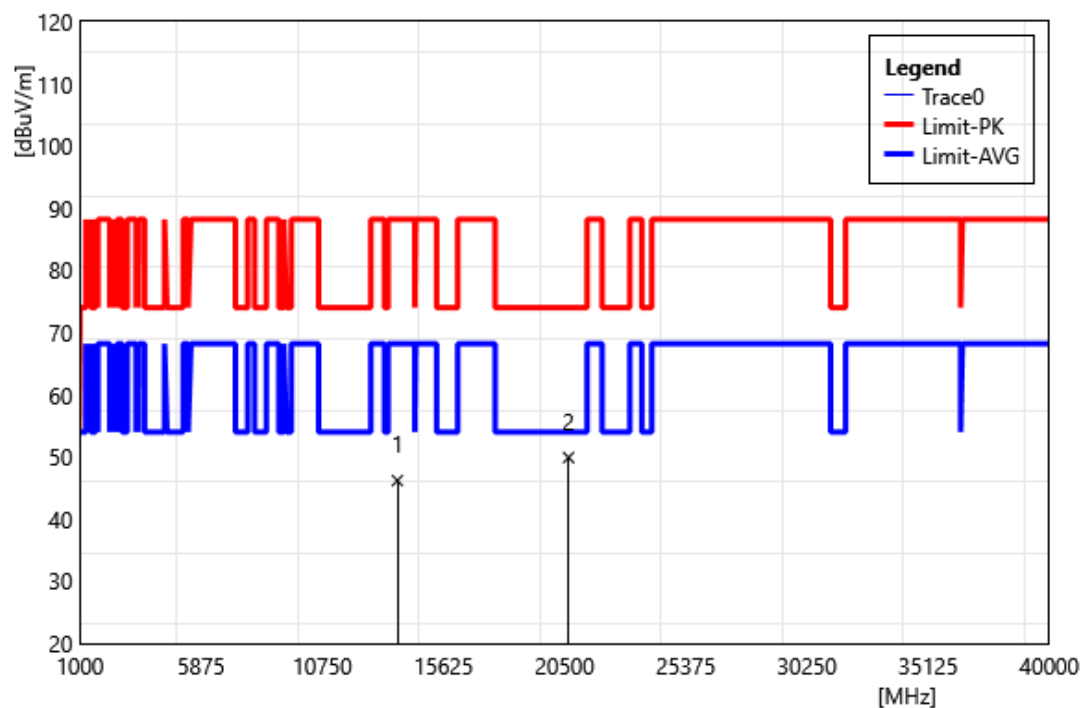


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	38.31	7.87	46.18	88.20	-42.02	PEAK
2	20655.00	40.68	9.21	49.89	74.00	-24.11	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6925 MHz		
Polarization:	Horizontal		
Remark:			

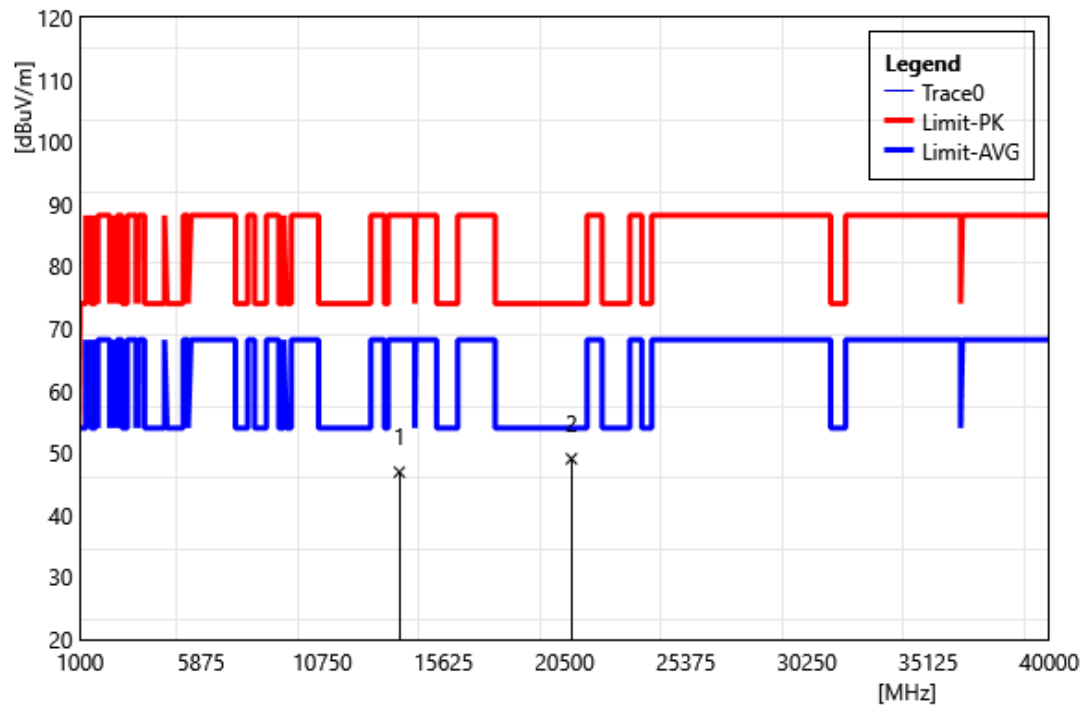


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	38.83	8.07	46.90	88.20	-41.30	PEAK
2	20775.00	39.78	9.27	49.05	74.00	-24.95	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 6925 MHz		
Polarization:	Vertical		
Remark:			

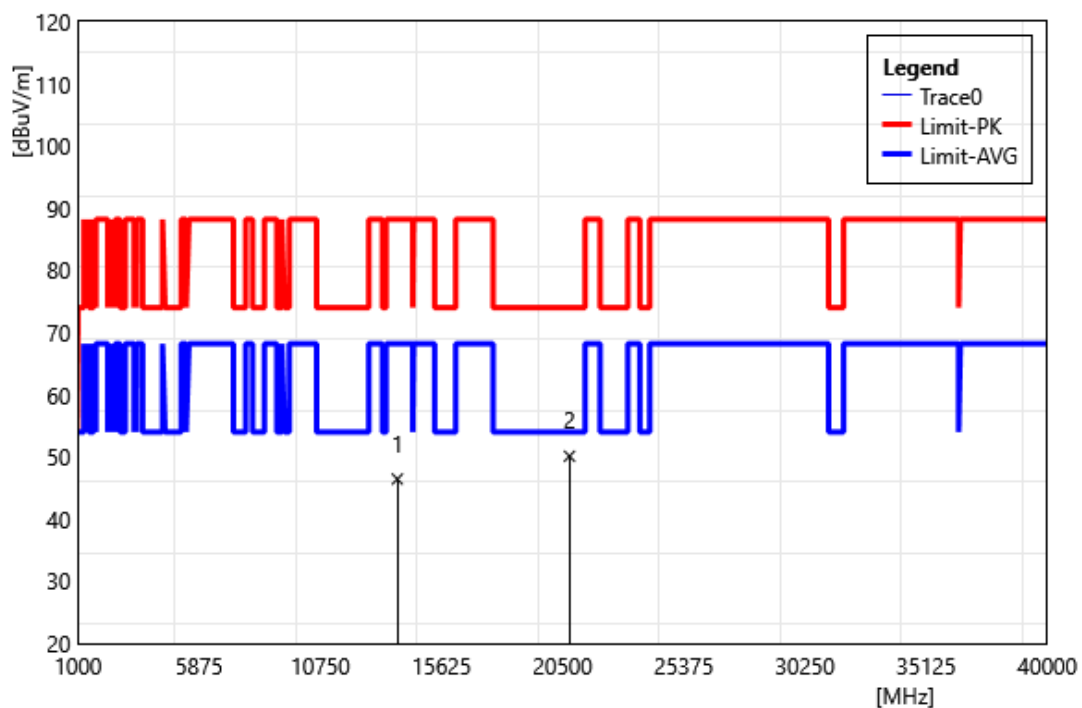


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	38.37	8.07	46.44	88.20	-41.76	PEAK
2	20775.00	40.84	9.27	50.11	74.00	-23.89	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 7005 MHz		
Polarization:	Horizontal		
Remark:			

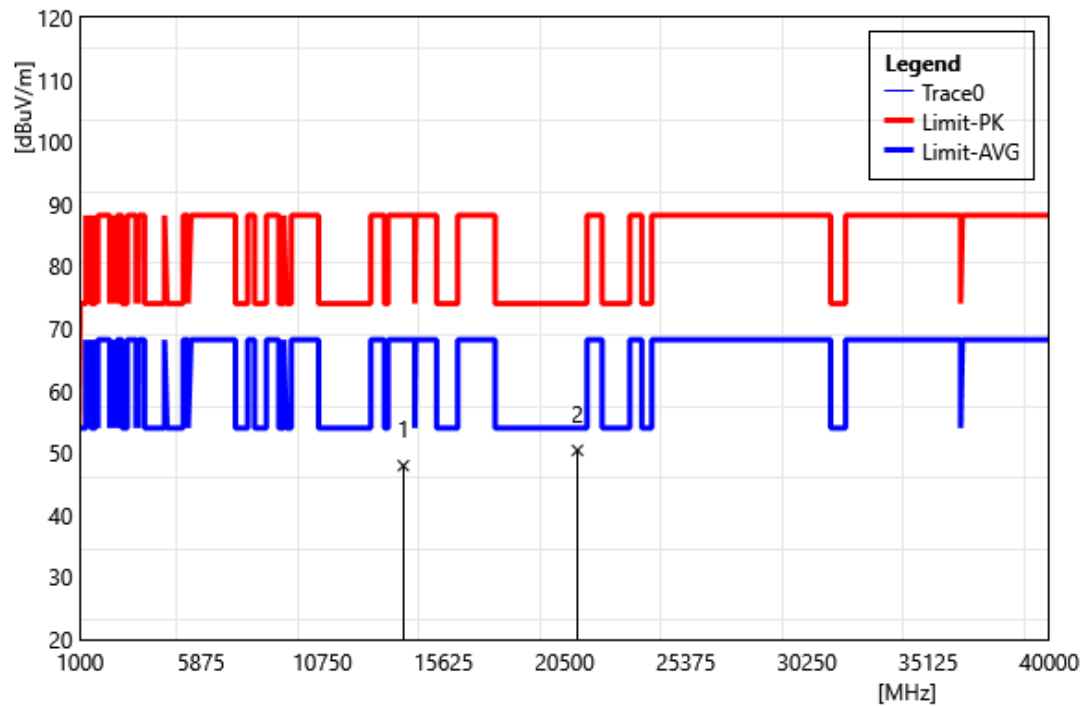


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	39.65	8.30	47.95	88.20	-40.25	PEAK
2	21015.00	41.02	9.37	50.39	74.00	-23.61	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 7005 MHz		
Polarization:	Vertical		
Remark:			

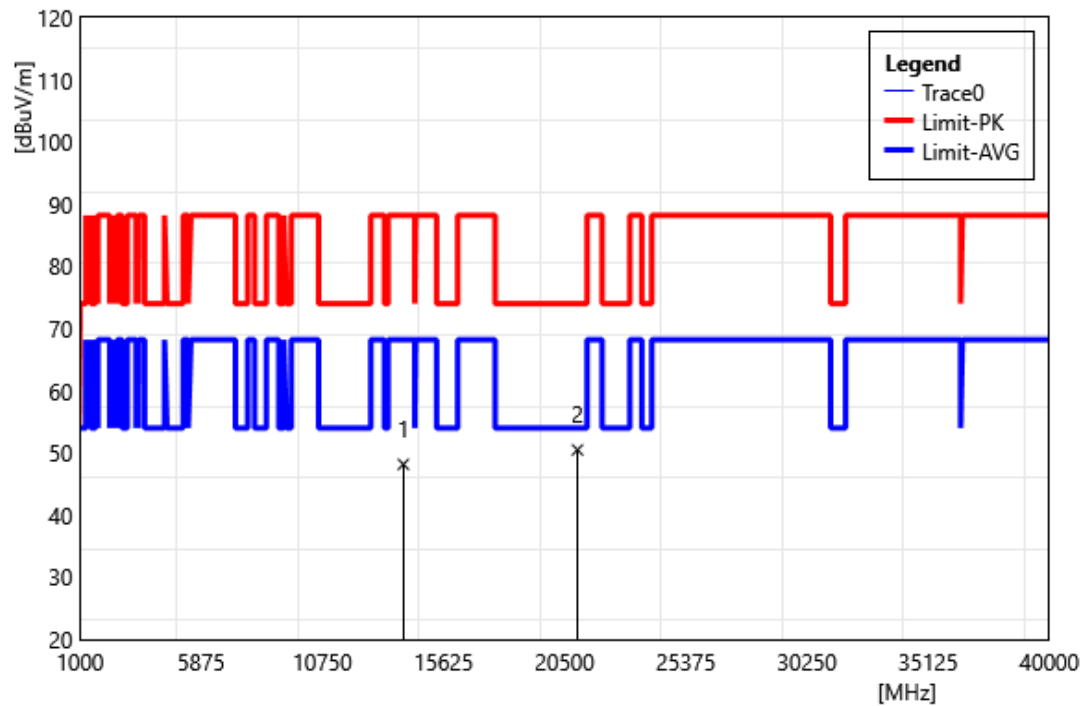


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	39.85	8.30	48.15	88.20	-40.05	PEAK
2	21015.00	41.11	9.37	50.48	74.00	-23.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

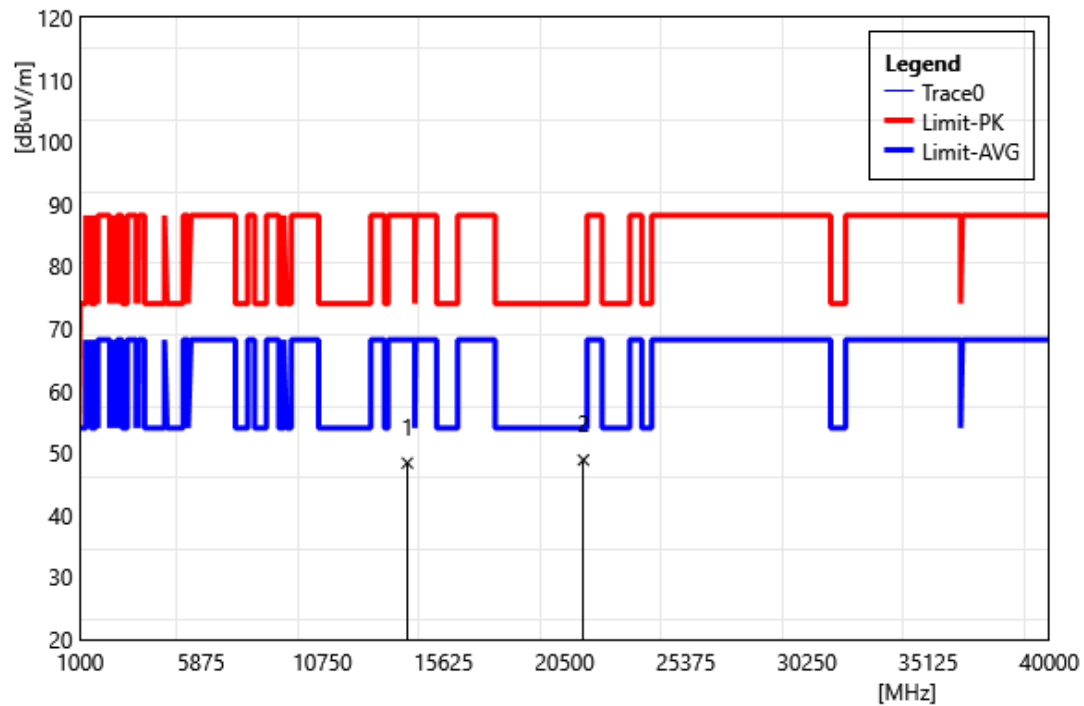


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	39.69	8.69	48.38	88.20	-39.82	PEAK
2	21255.00	39.38	9.48	48.86	74.00	-25.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

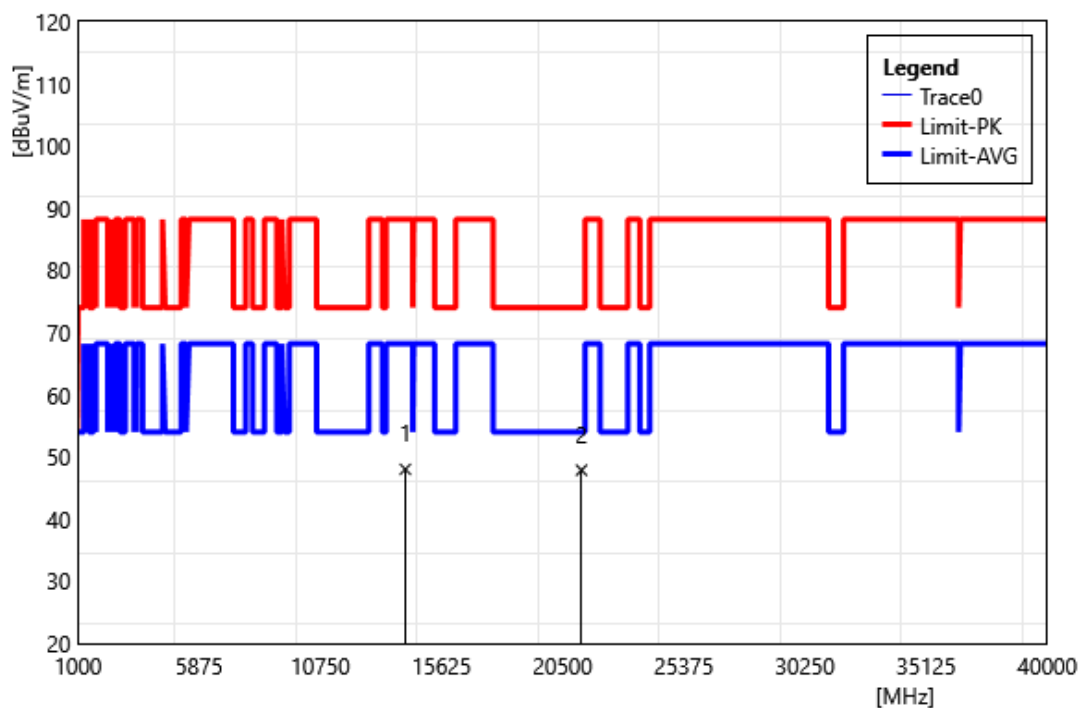


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	39.31	8.69	48.00	88.20	-40.20	PEAK
2	21255.00	38.38	9.48	47.86	74.00	-26.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

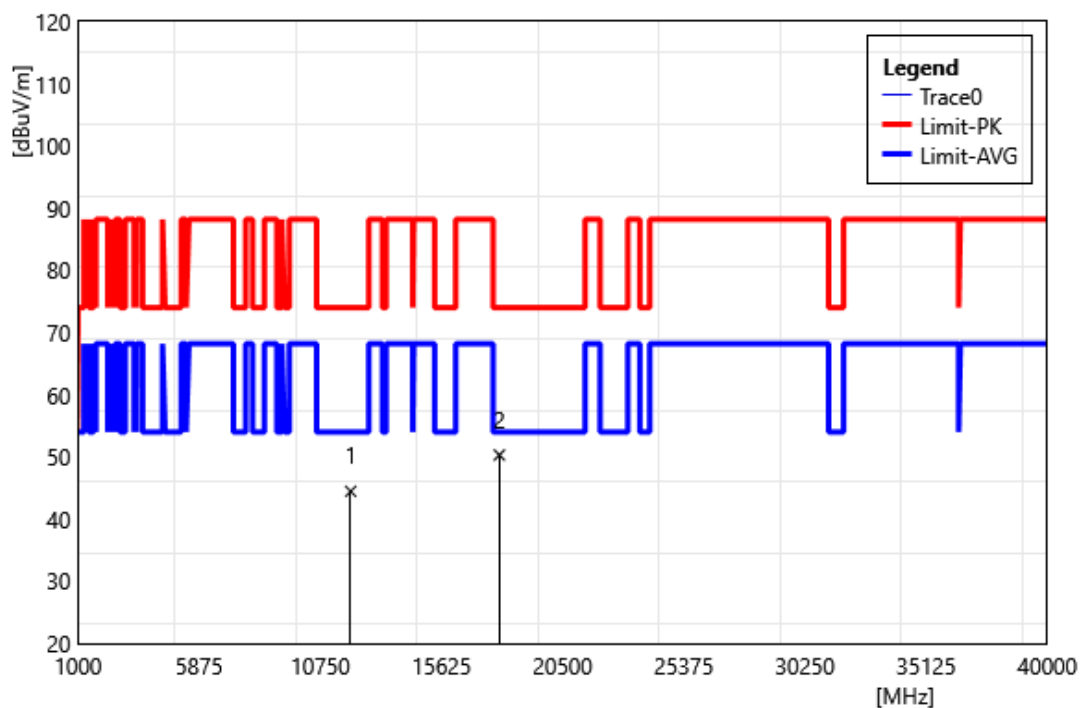


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	36.84	7.63	44.47	74.00	-29.53	PEAK
2	17955.00	42.53	7.77	50.30	74.00	-23.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

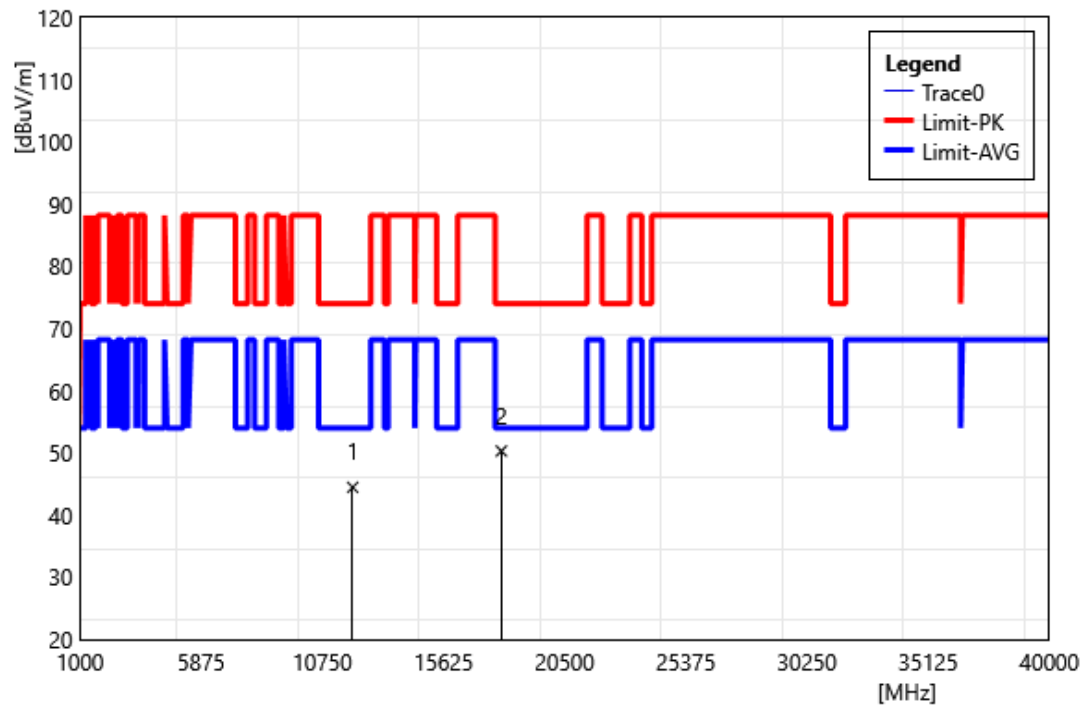


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	36.84	7.63	44.47	74.00	-29.53	PEAK
2	17955.00	42.53	7.77	50.30	74.00	-23.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6145 MHz		
Polarization:	Horizontal		
Remark:			

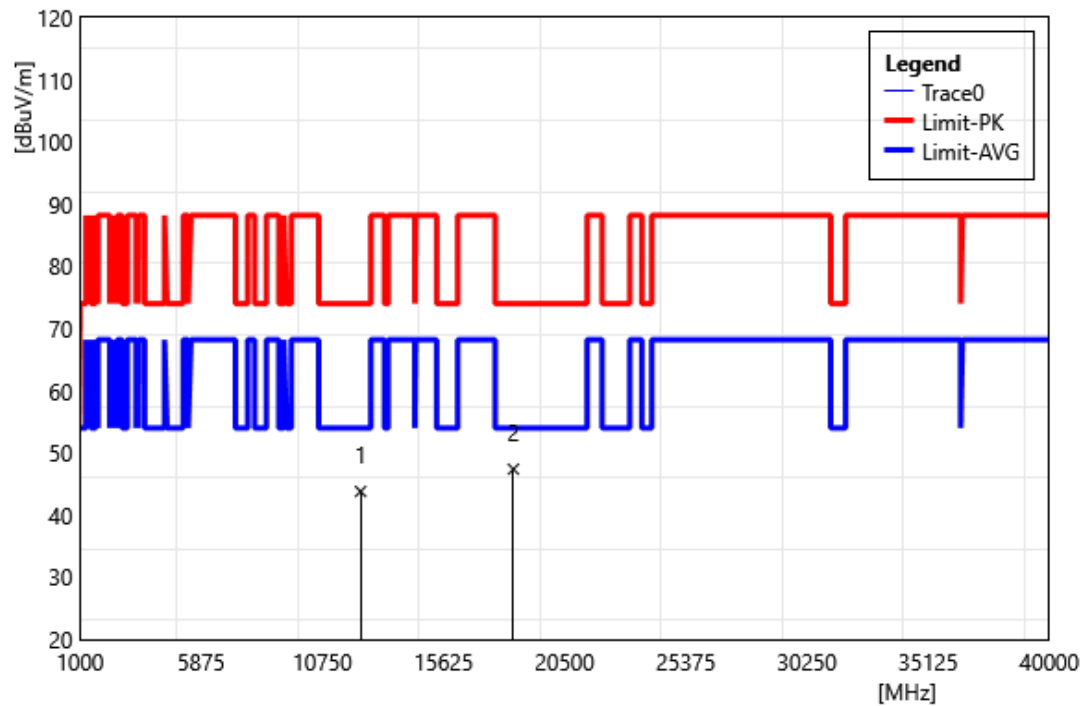


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	36.07	7.73	43.80	74.00	-30.20	PEAK
2	18435.00	39.17	8.22	47.39	74.00	-26.61	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6145 MHz		
Polarization:	Vertical		
Remark:			

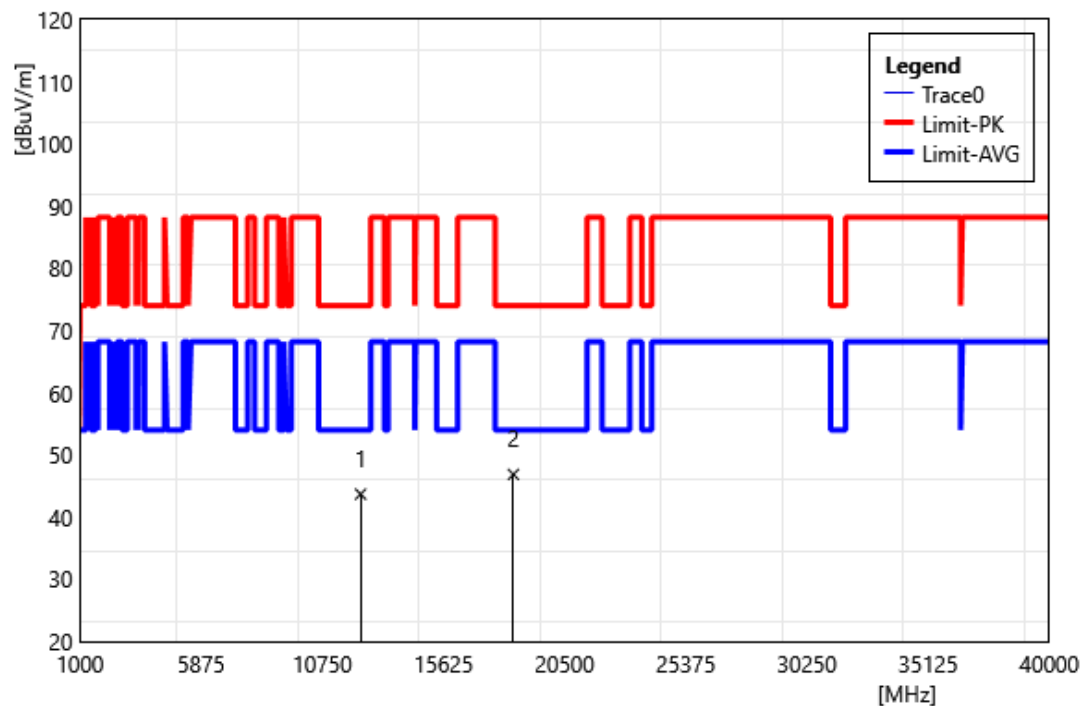


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	35.96	7.73	43.69	74.00	-30.31	PEAK
2	18435.00	38.65	8.22	46.87	74.00	-27.13	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6385 MHz		
Polarization:	Horizontal		
Remark:			

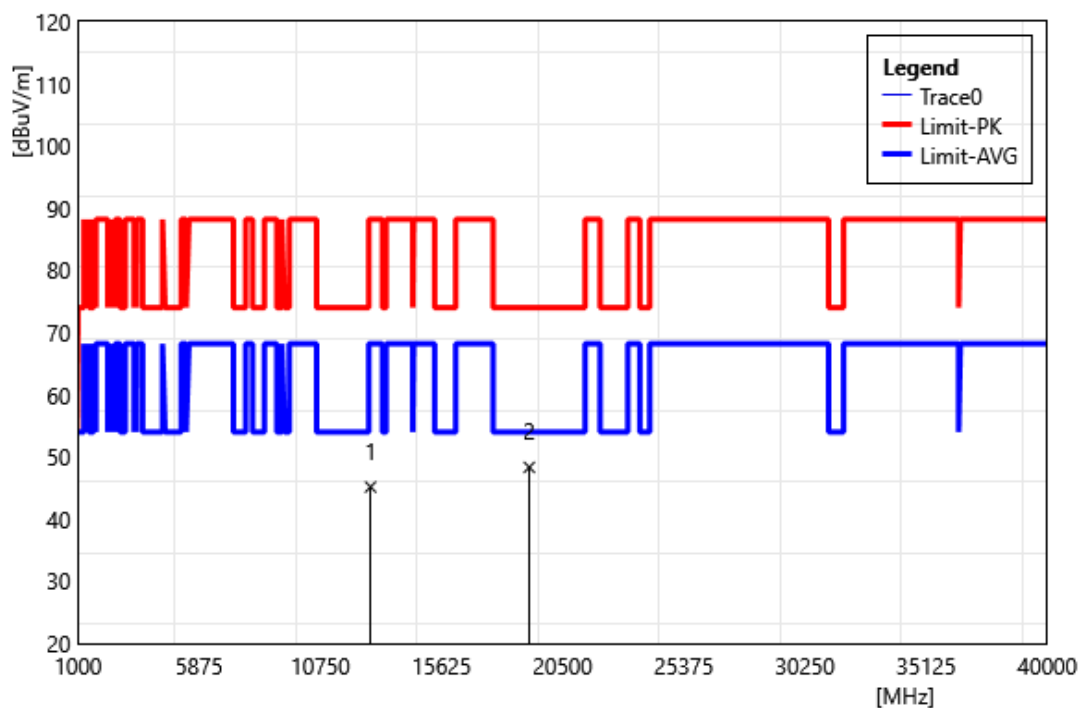


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	36.63	8.53	45.16	88.20	-43.04	PEAK
2	19155.00	39.77	8.55	48.32	74.00	-25.68	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6385 MHz		
Polarization:	Vertical		
Remark:			

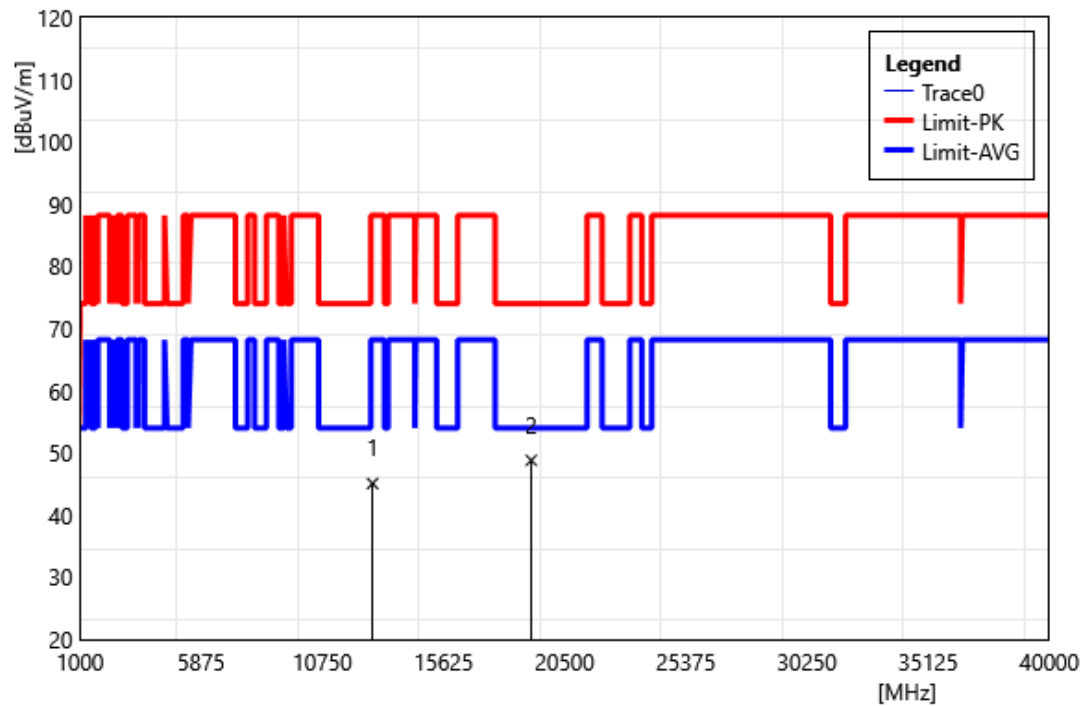


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	36.54	8.53	45.07	88.20	-43.13	PEAK
2	19155.00	40.25	8.55	48.80	74.00	-25.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6465 MHz		
Polarization:	Horizontal		
Remark:			

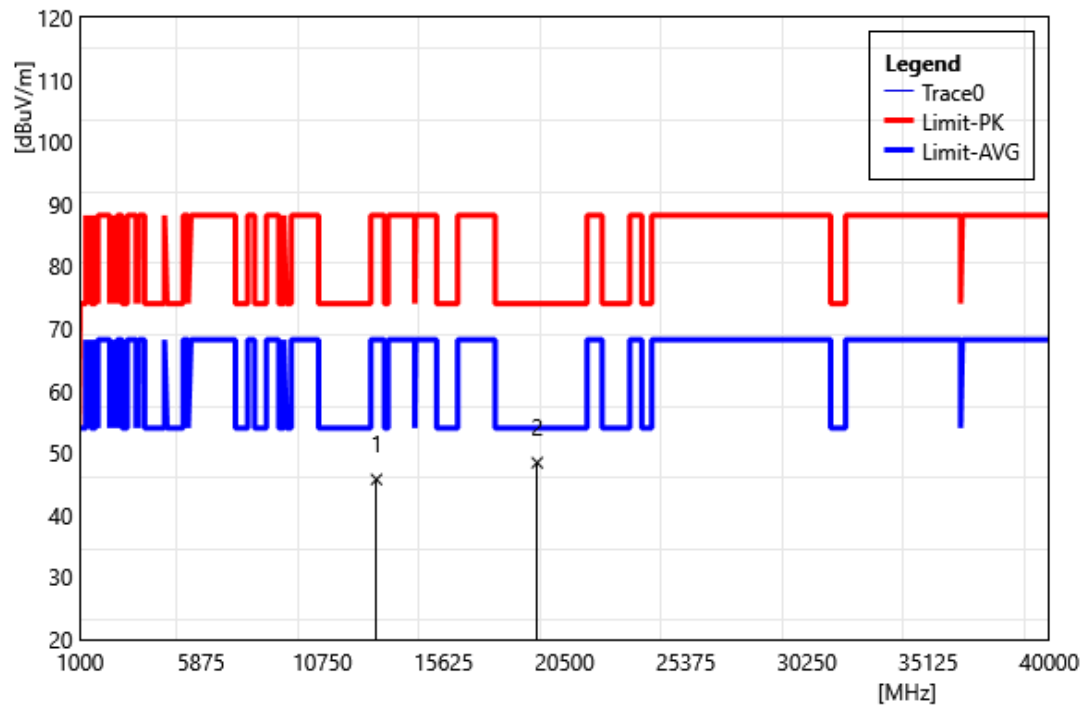


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	37.13	8.60	45.73	88.20	-42.47	PEAK
2	19395.00	39.76	8.66	48.42	74.00	-25.58	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6465 MHz		
Polarization:	Vertical		
Remark:			

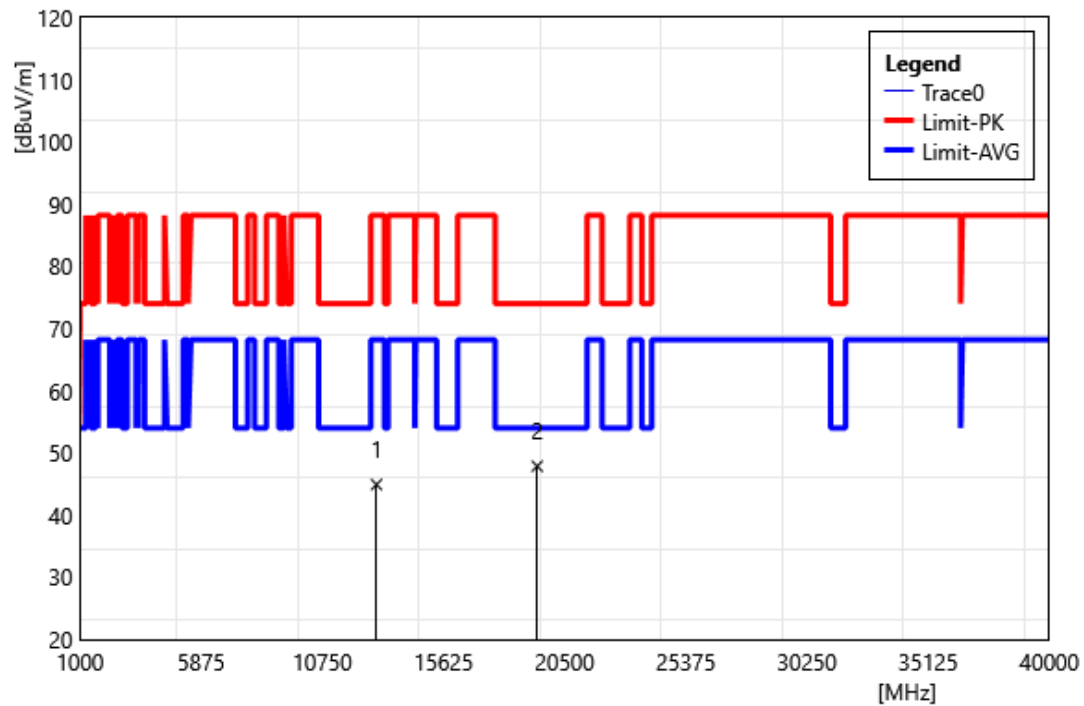


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	36.32	8.60	44.92	88.20	-43.28	PEAK
2	19395.00	39.20	8.66	47.86	74.00	-26.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6545 MHz		
Polarization:	Horizontal		
Remark:			

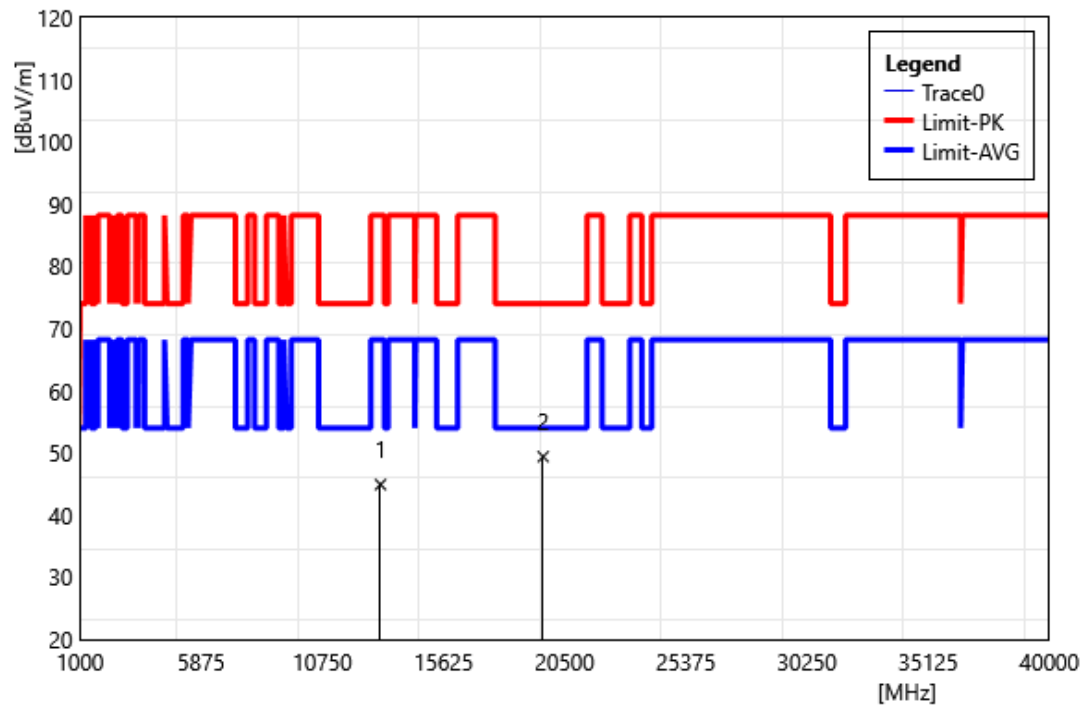


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	36.44	8.47	44.91	88.20	-43.29	PEAK
2	19635.00	40.64	8.76	49.40	74.00	-24.60	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6545 MHz		
Polarization:	Vertical		
Remark:			

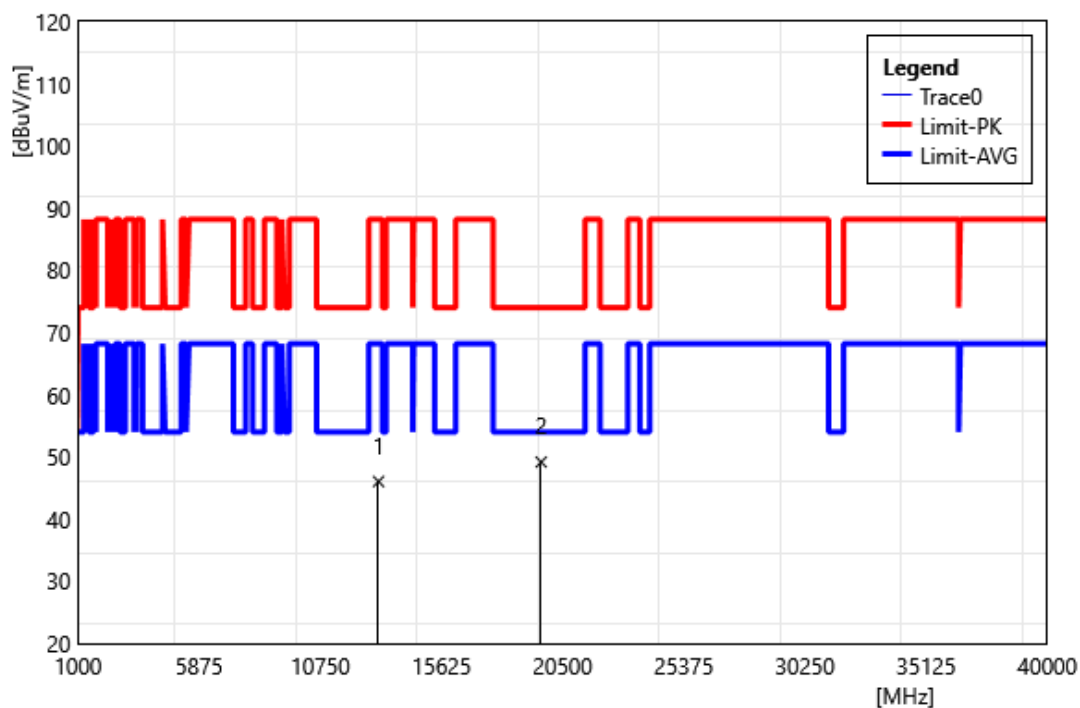


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	37.57	8.47	46.04	88.20	-42.16	PEAK
2	19635.00	40.42	8.76	49.18	74.00	-24.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6625 MHz		
Polarization:	Horizontal		
Remark:			

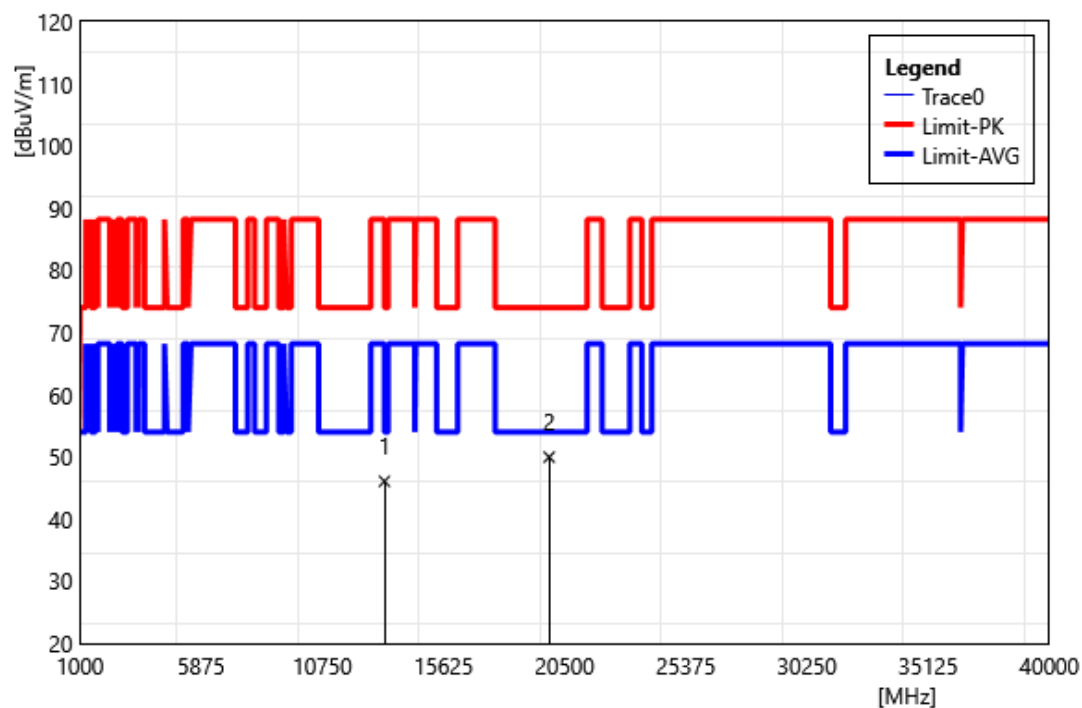


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	37.64	8.43	46.07	74.00	-27.93	PEAK
2	19875.00	41.10	8.86	49.96	74.00	-24.04	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6625 MHz		
Polarization:	Vertical		
Remark:			

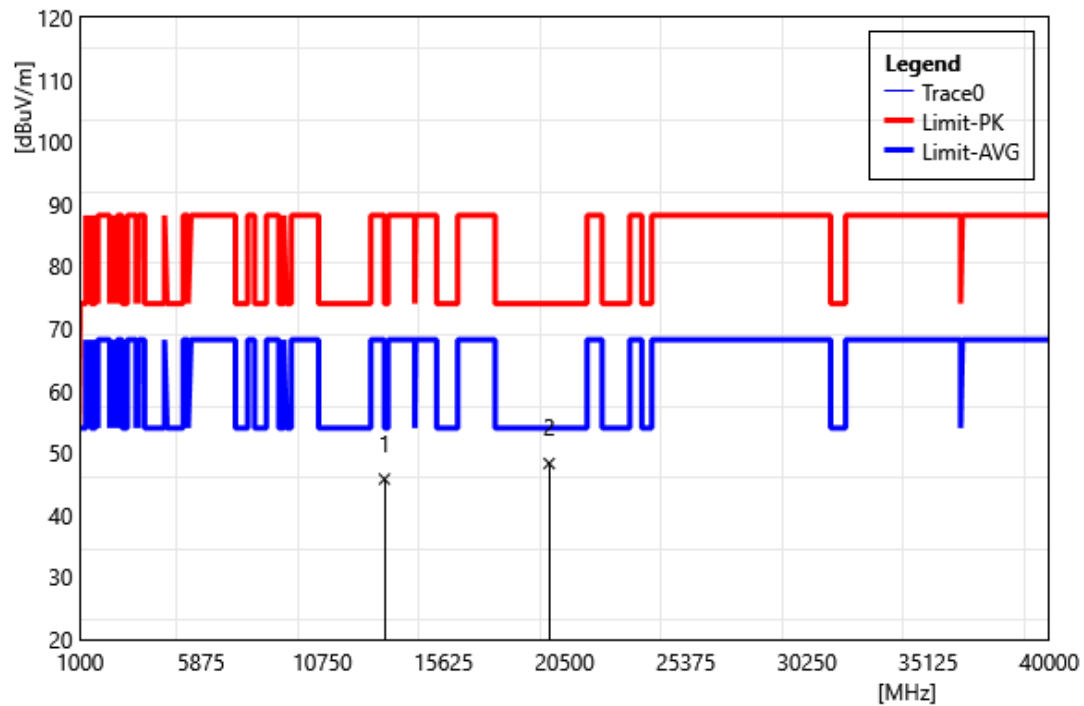


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	37.36	8.43	45.79	74.00	-28.21	PEAK
2	19875.00	39.44	8.86	48.30	74.00	-25.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6705 MHz		
Polarization:	Horizontal		
Remark:			

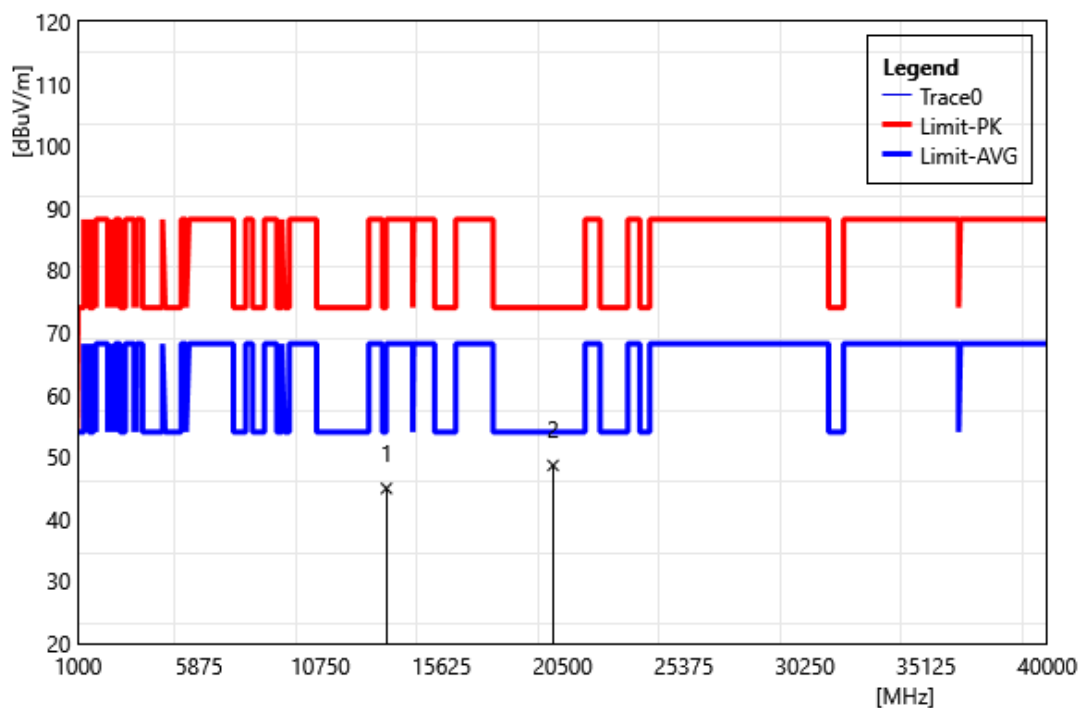


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	36.88	8.06	44.94	88.20	-43.26	PEAK
2	20115.00	39.65	8.98	48.63	74.00	-25.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6705 MHz		
Polarization:	Vertical		
Remark:			

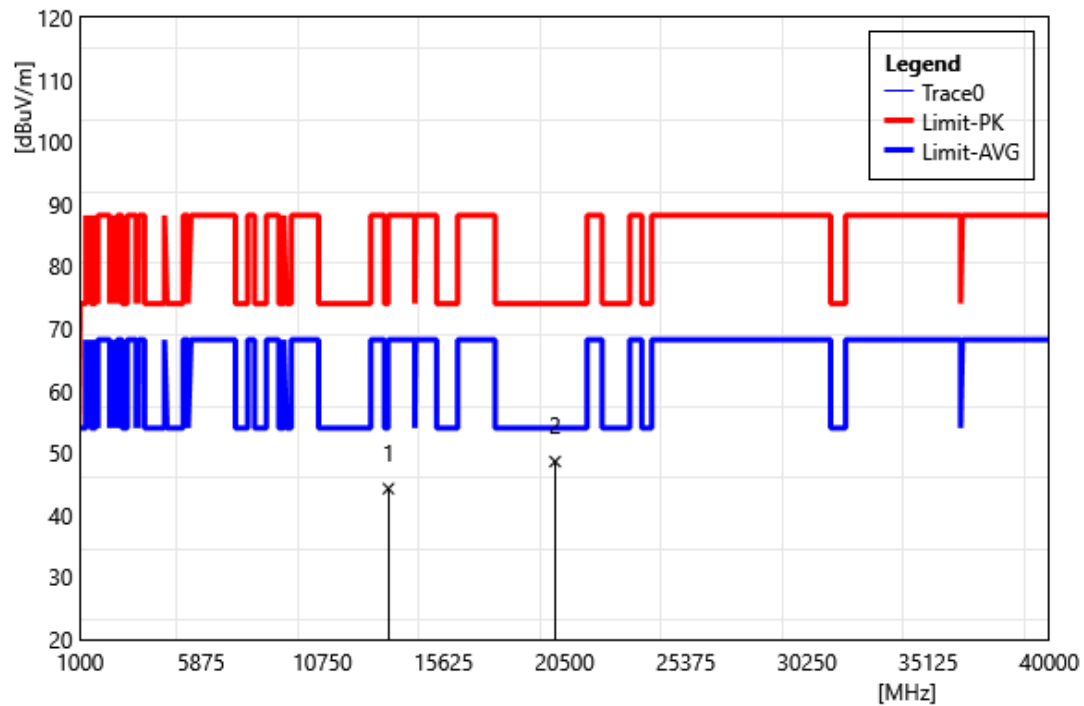


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	36.18	8.06	44.24	88.20	-43.96	PEAK
2	20115.00	39.62	8.98	48.60	74.00	-25.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6785 MHz		
Polarization:	Horizontal		
Remark:			

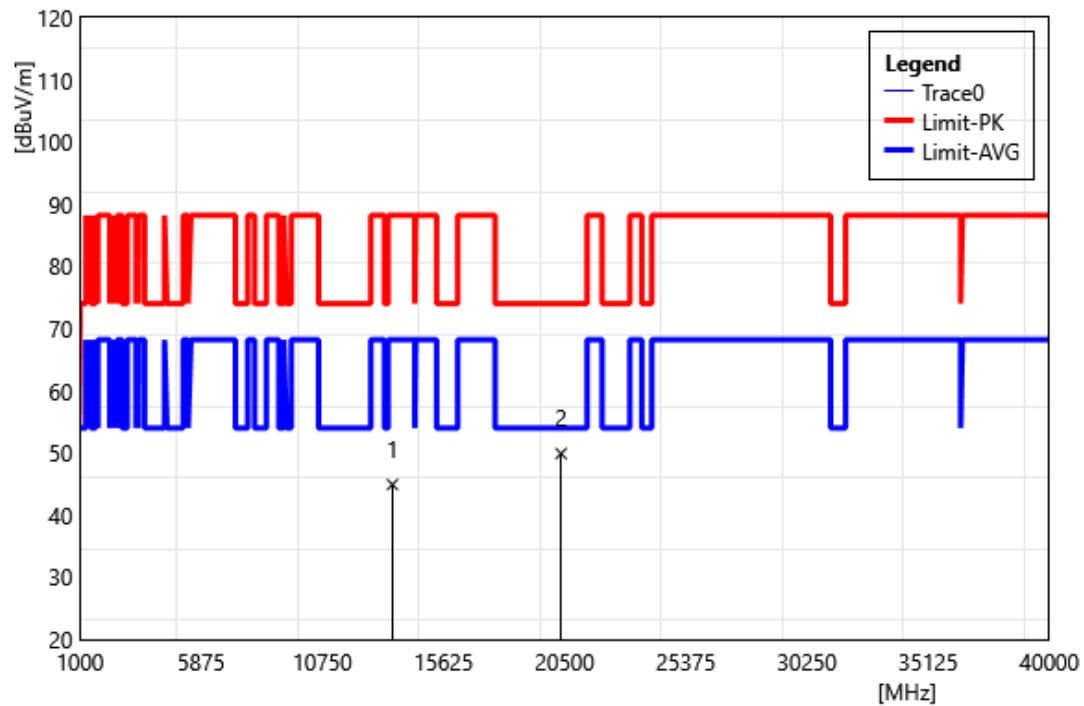


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	37.08	7.83	44.91	88.20	-43.29	PEAK
2	20355.00	40.81	9.08	49.89	74.00	-24.11	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6785 MHz		
Polarization:	Vertical		
Remark:			

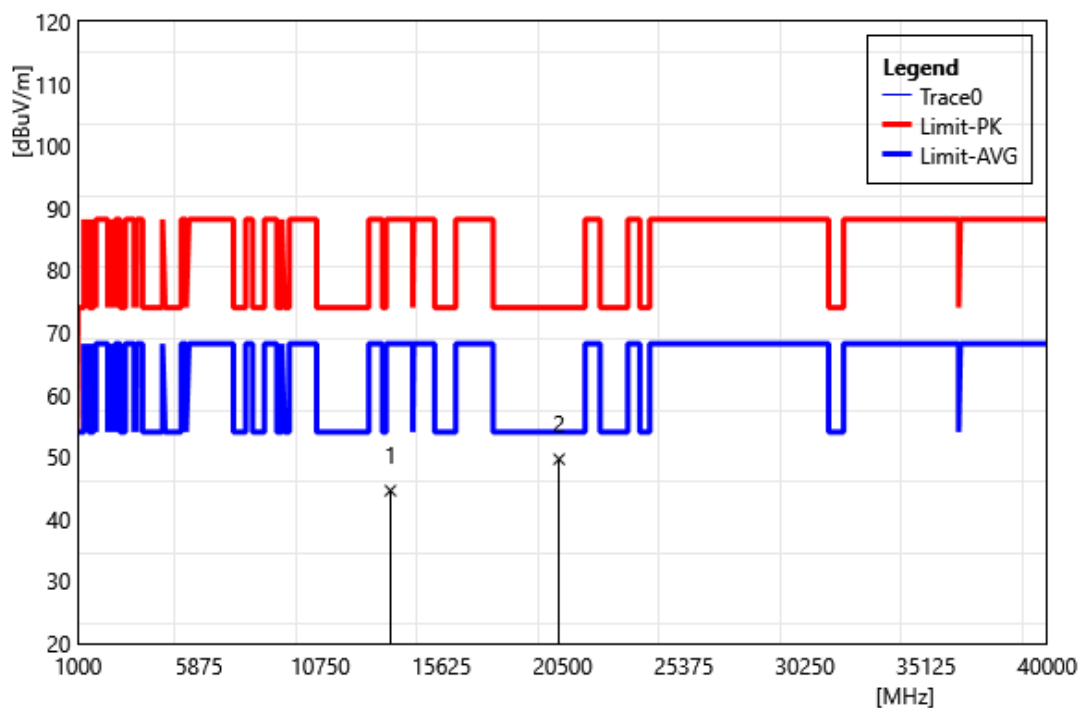


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	36.73	7.83	44.56	88.20	-43.64	PEAK
2	20355.00	40.54	9.08	49.62	74.00	-24.38	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6865 MHz		
Polarization:	Horizontal		
Remark:			

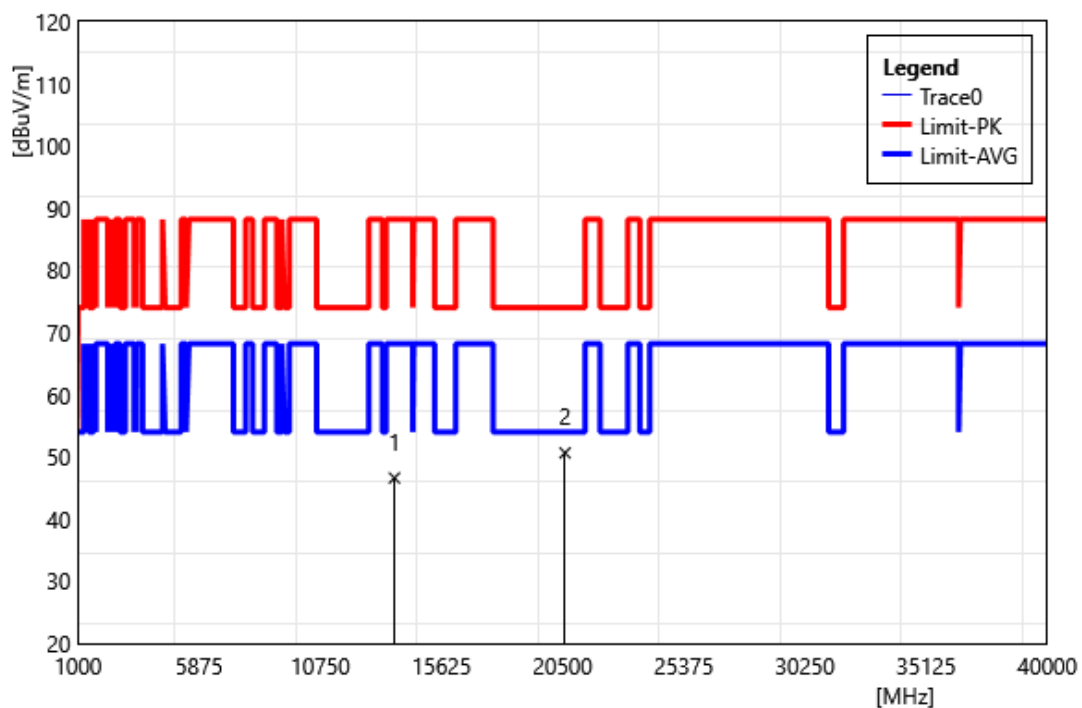


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	38.69	7.92	46.61	88.20	-41.59	PEAK
2	20595.00	41.45	9.19	50.64	74.00	-23.36	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6865 MHz		
Polarization:	Vertical		
Remark:			

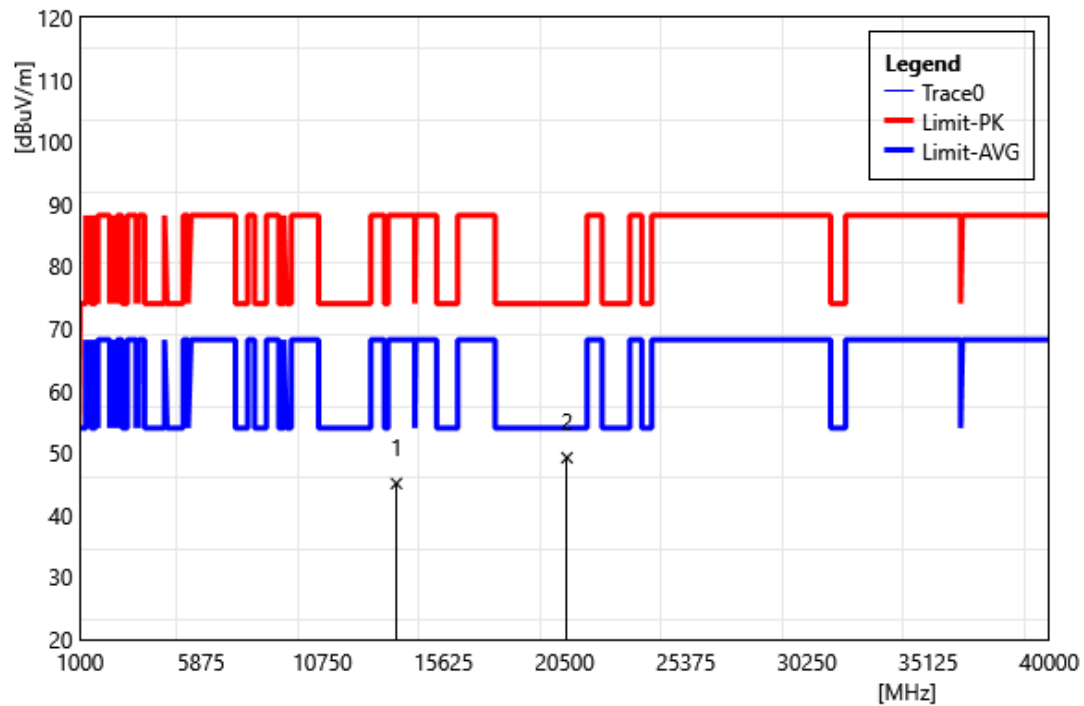


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	37.16	7.92	45.08	88.20	-43.12	PEAK
2	20595.00	40.03	9.19	49.22	74.00	-24.78	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6945 MHz		
Polarization:	Horizontal		
Remark:			

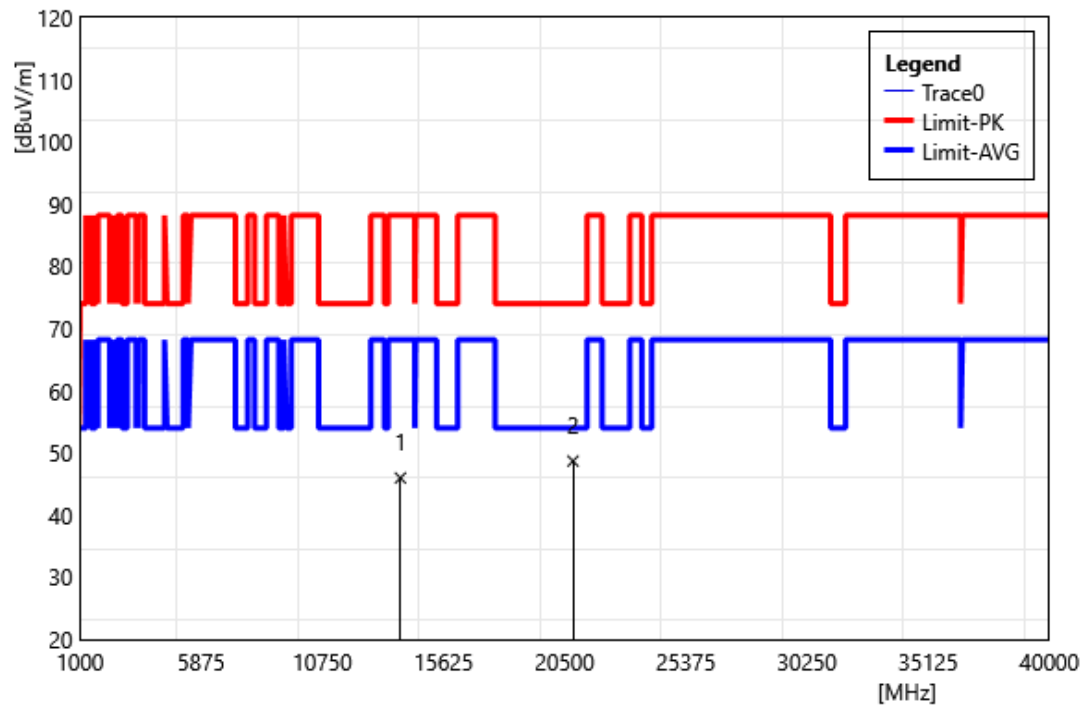


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	37.73	8.25	45.98	88.20	-42.22	PEAK
2	20835.00	39.40	9.29	48.69	74.00	-25.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 6945 MHz		
Polarization:	Vertical		
Remark:			

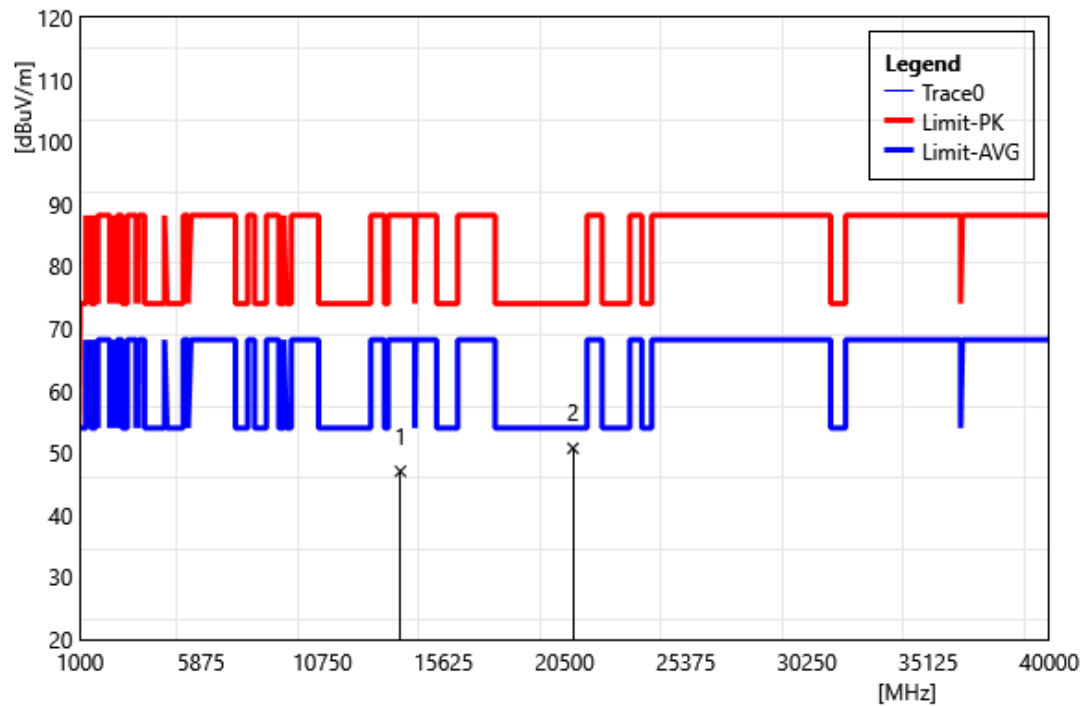


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	38.79	8.25	47.04	88.20	-41.16	PEAK
2	20835.00	41.45	9.29	50.74	74.00	-23.26	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 7025 MHz		
Polarization:	Horizontal		
Remark:			

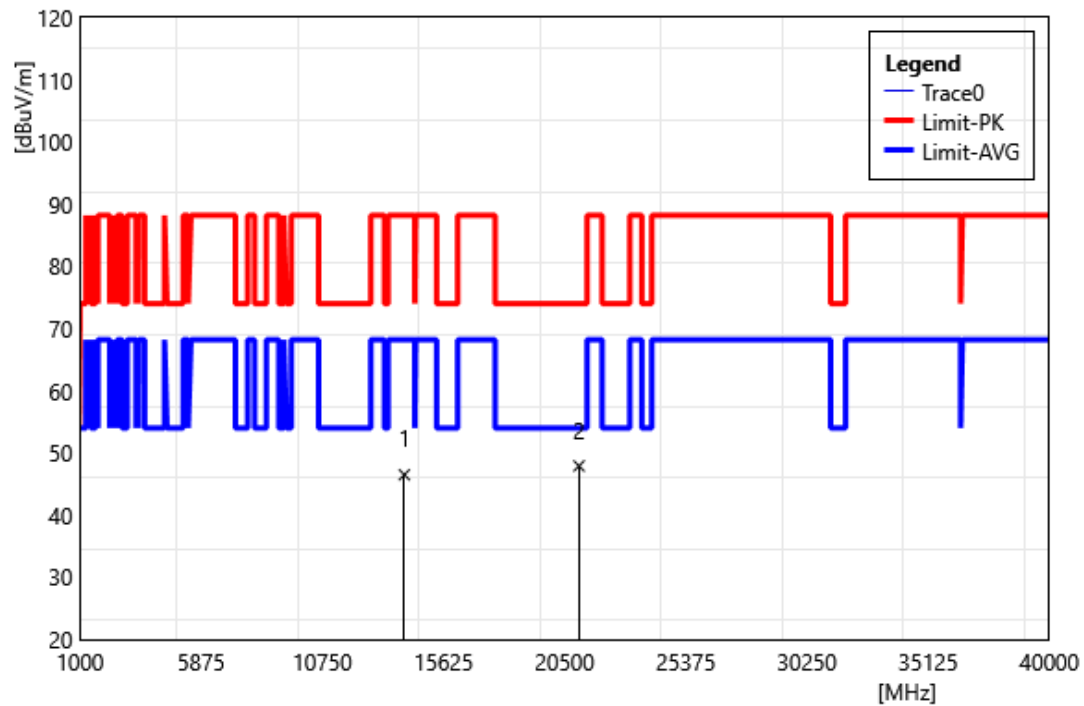


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	38.01	8.46	46.47	88.20	-41.73	PEAK
2	21075.00	38.50	9.40	47.90	74.00	-26.10	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 7025 MHz		
Polarization:	Vertical		
Remark:			

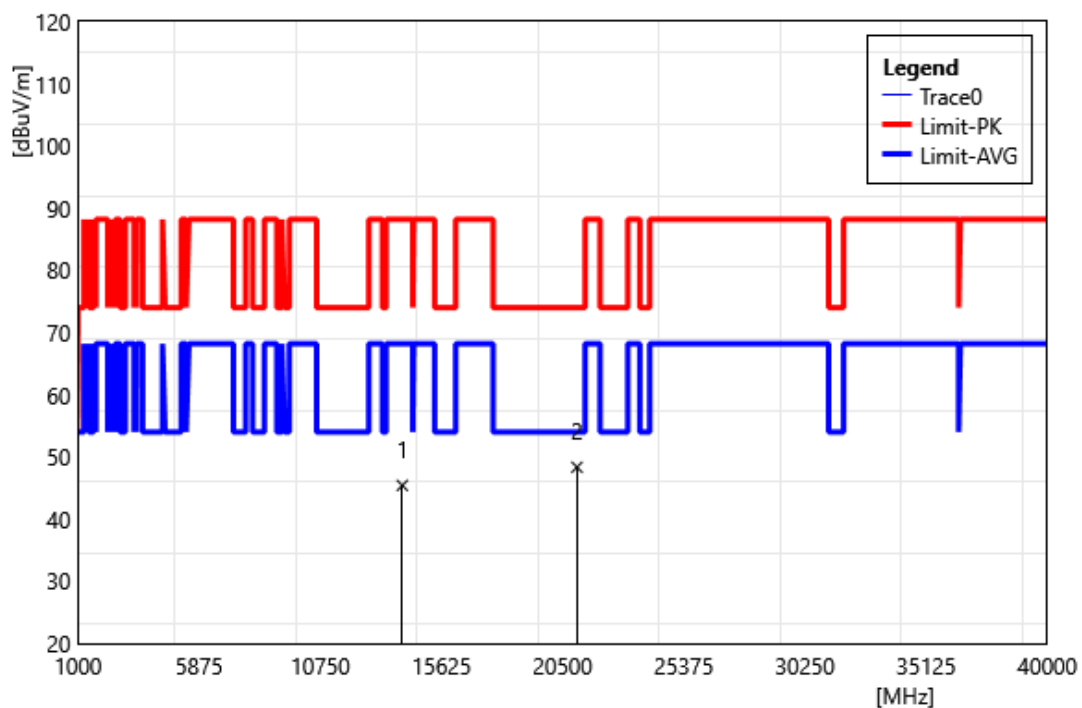


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	36.96	8.46	45.42	88.20	-42.78	PEAK
2	21075.00	38.94	9.40	48.34	74.00	-25.66	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6025 MHz		
Polarization:	Horizontal		
Remark:			

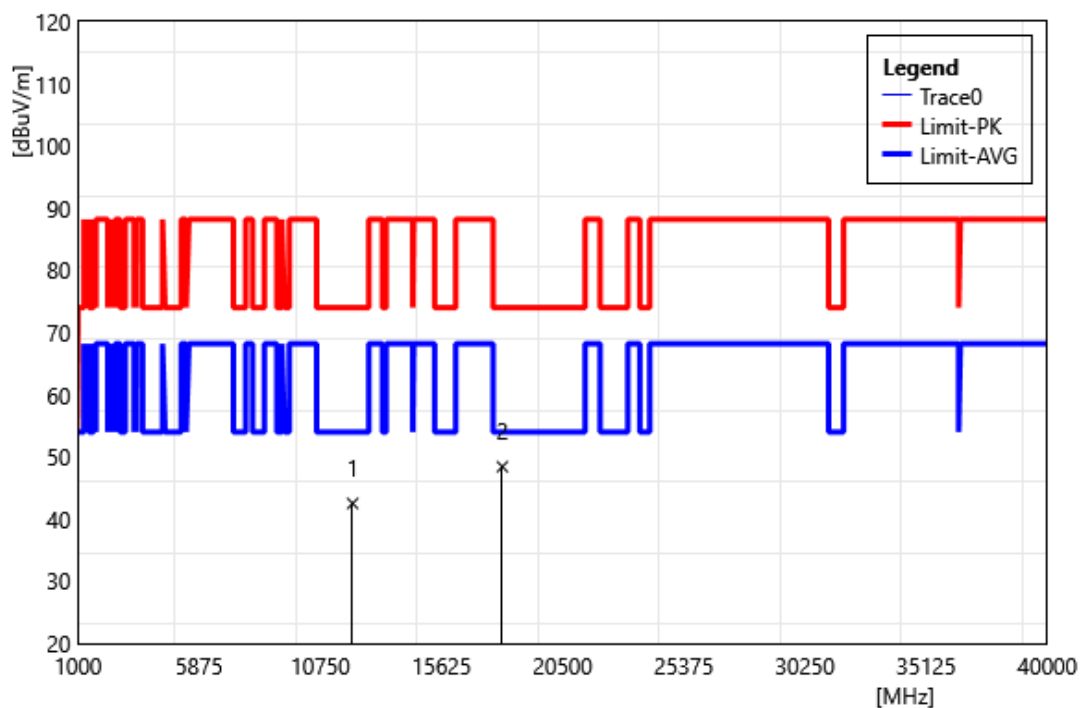


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	34.88	7.63	42.51	74.00	-31.49	PEAK
2	18075.00	40.36	8.06	48.42	74.00	-25.58	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6025 MHz		
Polarization:	Vertical		
Remark:			

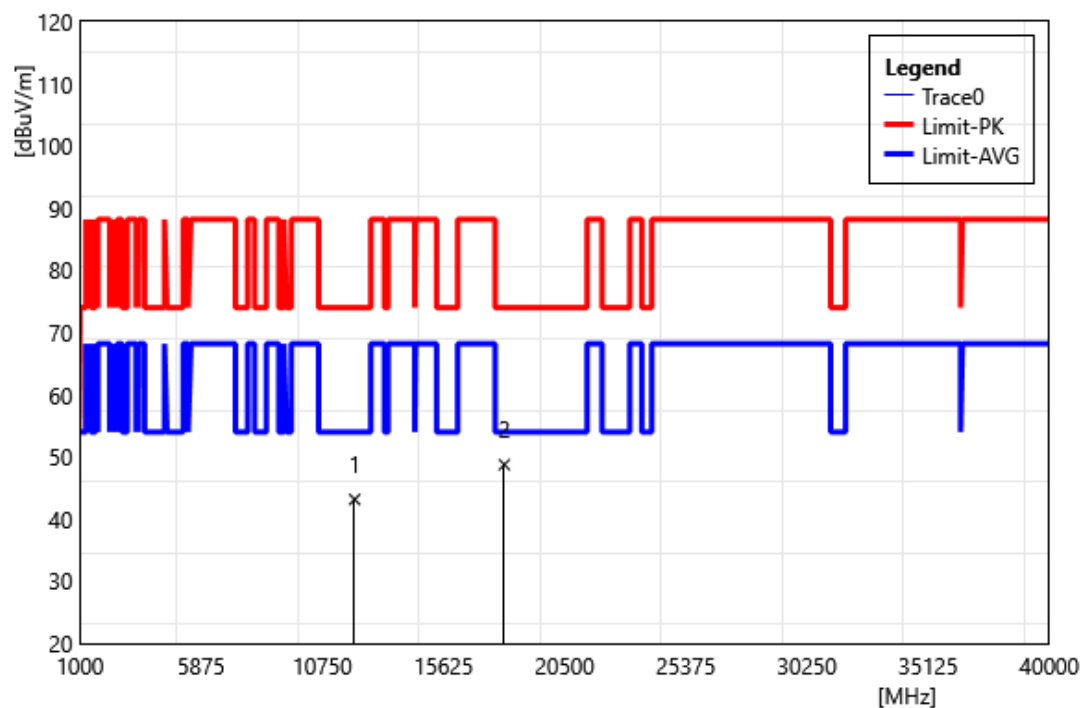


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.53	7.63	43.16	74.00	-30.84	PEAK
2	18075.00	40.68	8.06	48.74	74.00	-25.26	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6185 MHz		
Polarization:	Horizontal		
Remark:			

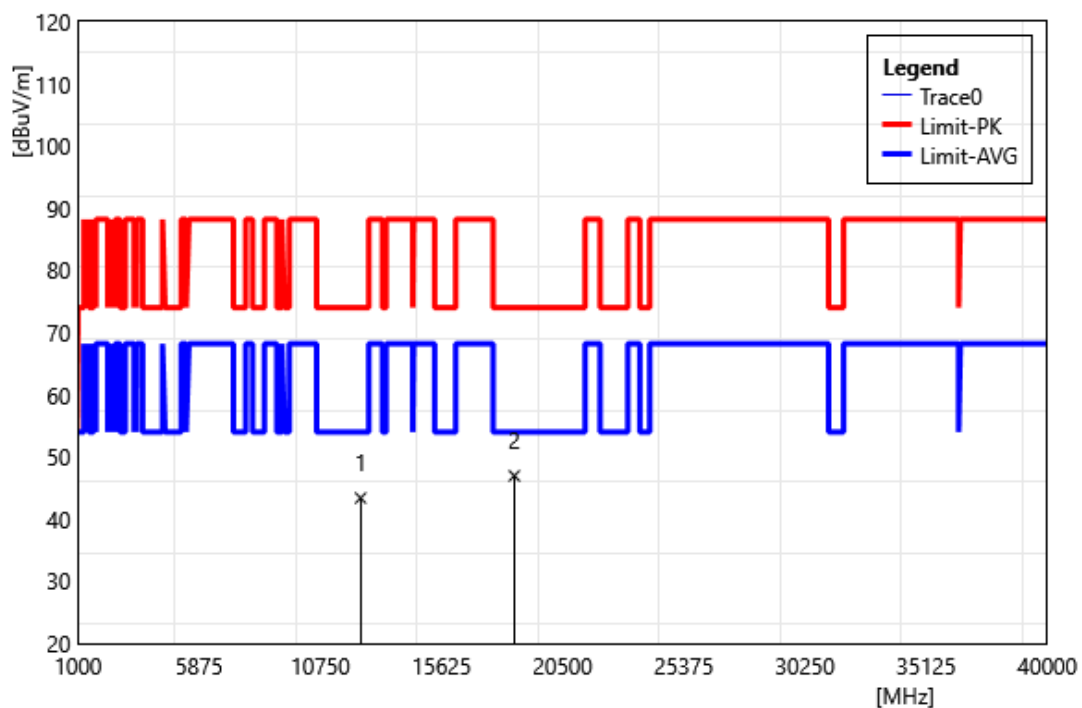


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	35.47	7.91	43.38	74.00	-30.62	PEAK
2	18555.00	38.68	8.28	46.96	74.00	-27.04	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6185 MHz		
Polarization:	Vertical		
Remark:			

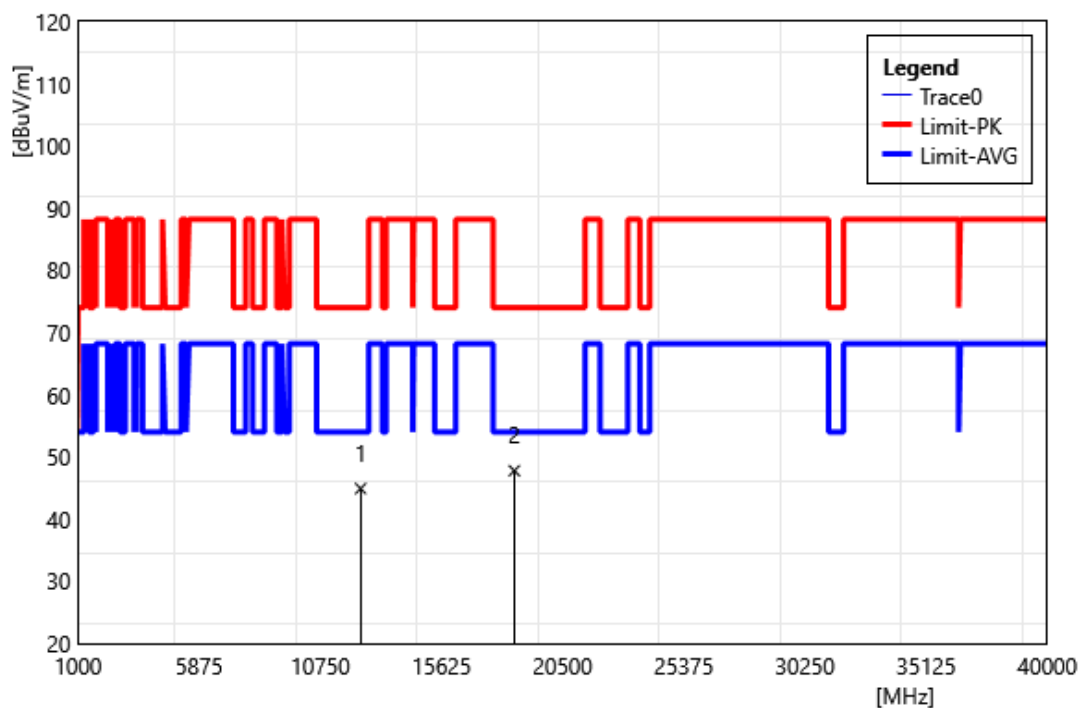


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	37.01	7.91	44.92	74.00	-29.08	PEAK
2	18555.00	39.50	8.28	47.78	74.00	-26.22	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6345 MHz		
Polarization:	Horizontal		
Remark:			

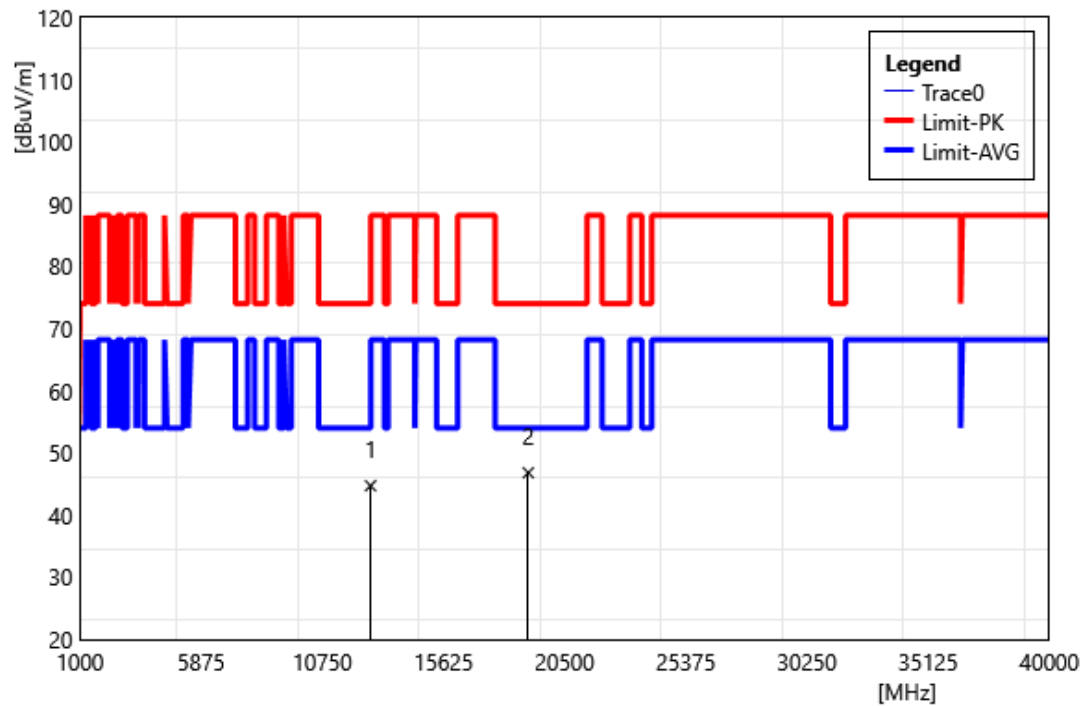


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	36.36	8.35	44.71	74.00	-29.29	PEAK
2	19035.00	38.32	8.49	46.81	74.00	-27.19	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6345 MHz		
Polarization:	Vertical		
Remark:			

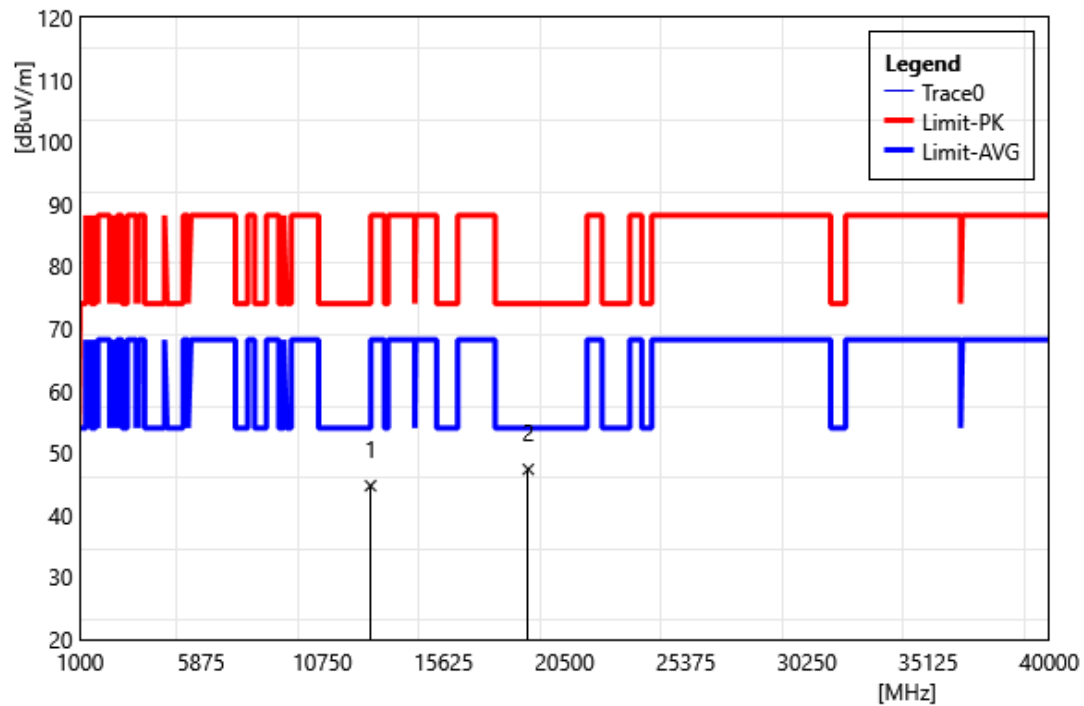


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	36.36	8.35	44.71	74.00	-29.29	PEAK
2	19035.00	38.86	8.49	47.35	74.00	-26.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6505 MHz		
Polarization:	Horizontal		
Remark:			

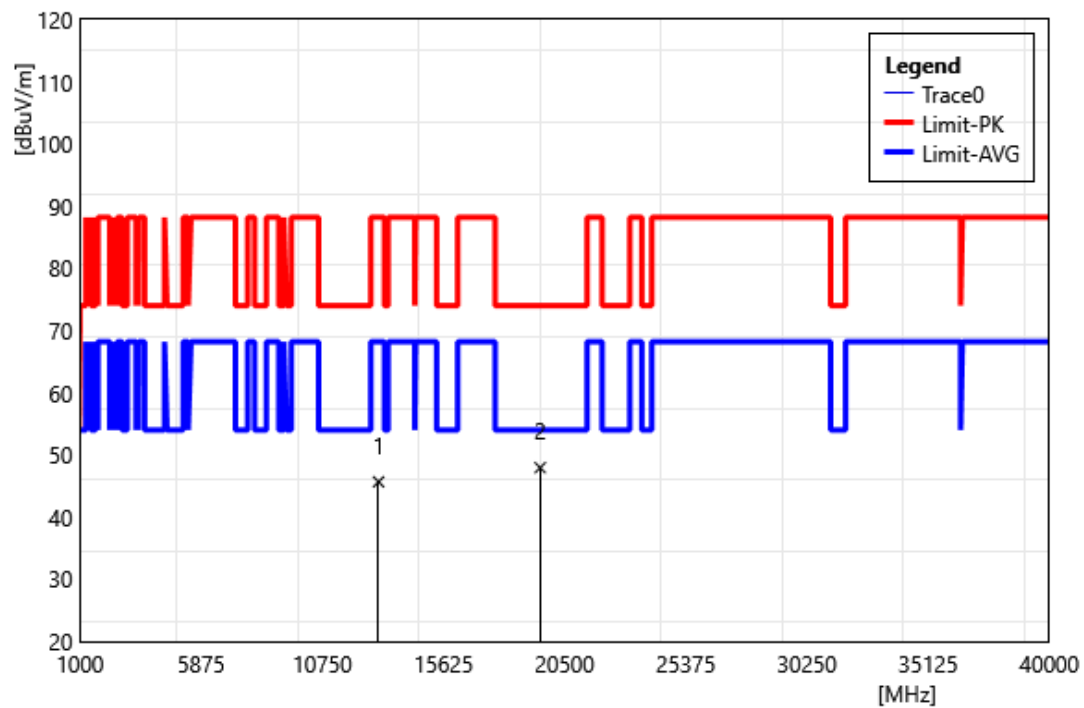


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	36.99	8.68	45.67	88.20	-42.53	PEAK
2	19515.00	39.24	8.71	47.95	74.00	-26.05	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6505 MHz		
Polarization:	Vertical		
Remark:			

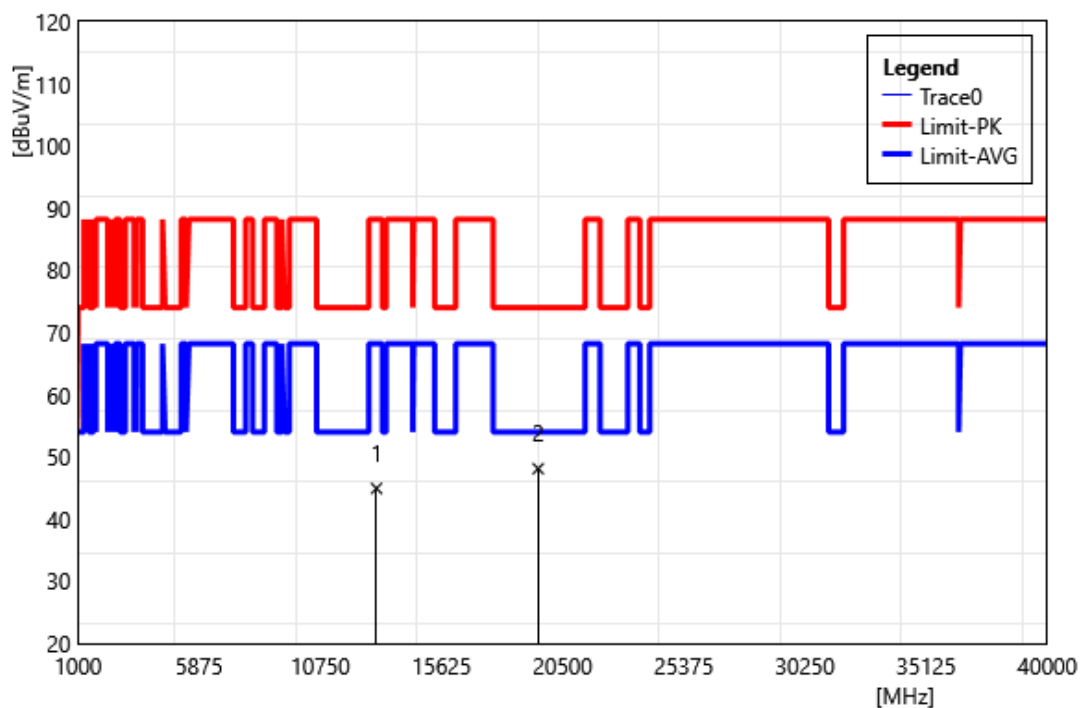


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	36.25	8.68	44.93	88.20	-43.27	PEAK
2	19515.00	39.39	8.71	48.10	74.00	-25.90	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6665 MHz		
Polarization:	Horizontal		
Remark:			

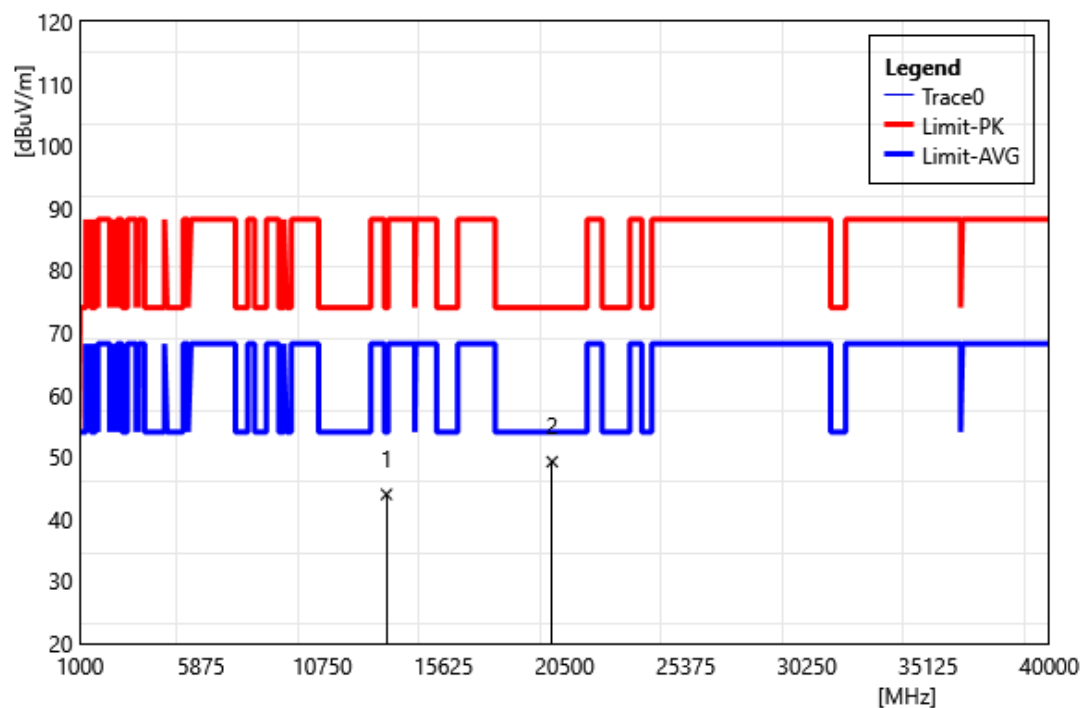


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	35.75	8.22	43.97	74.00	-30.03	PEAK
2	19995.00	40.29	8.93	49.22	74.00	-24.78	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6665 MHz		
Polarization:	Vertical		
Remark:			

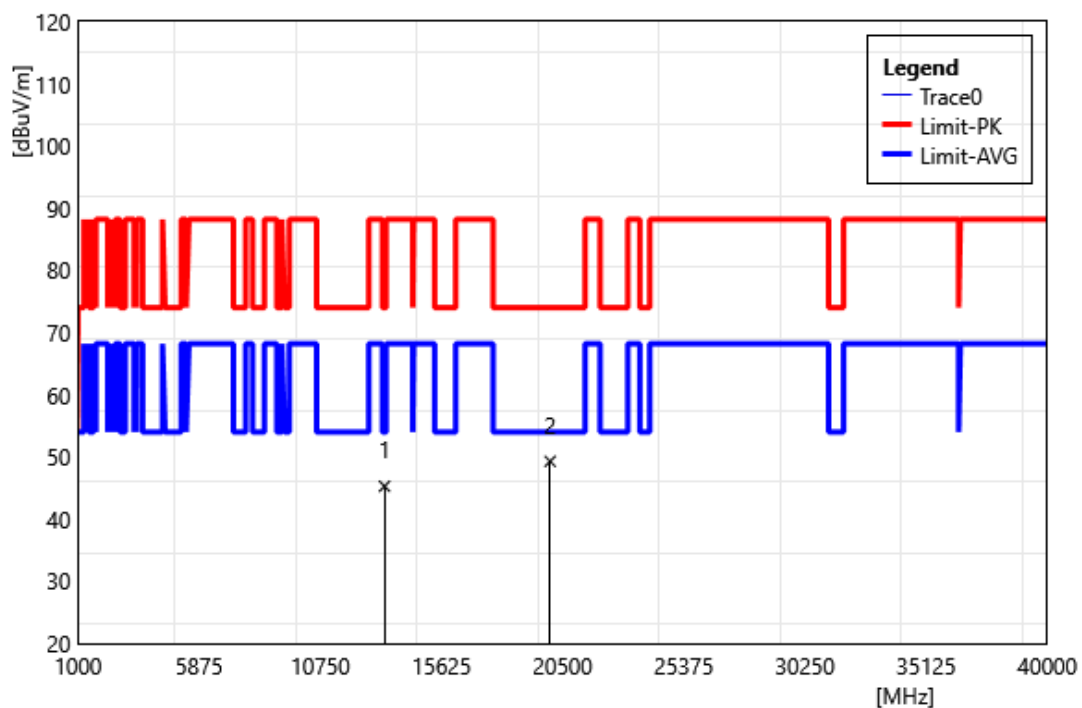


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	37.06	8.22	45.28	74.00	-28.72	PEAK
2	19995.00	40.35	8.93	49.28	74.00	-24.72	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6825 MHz		
Polarization:	Horizontal		
Remark:			

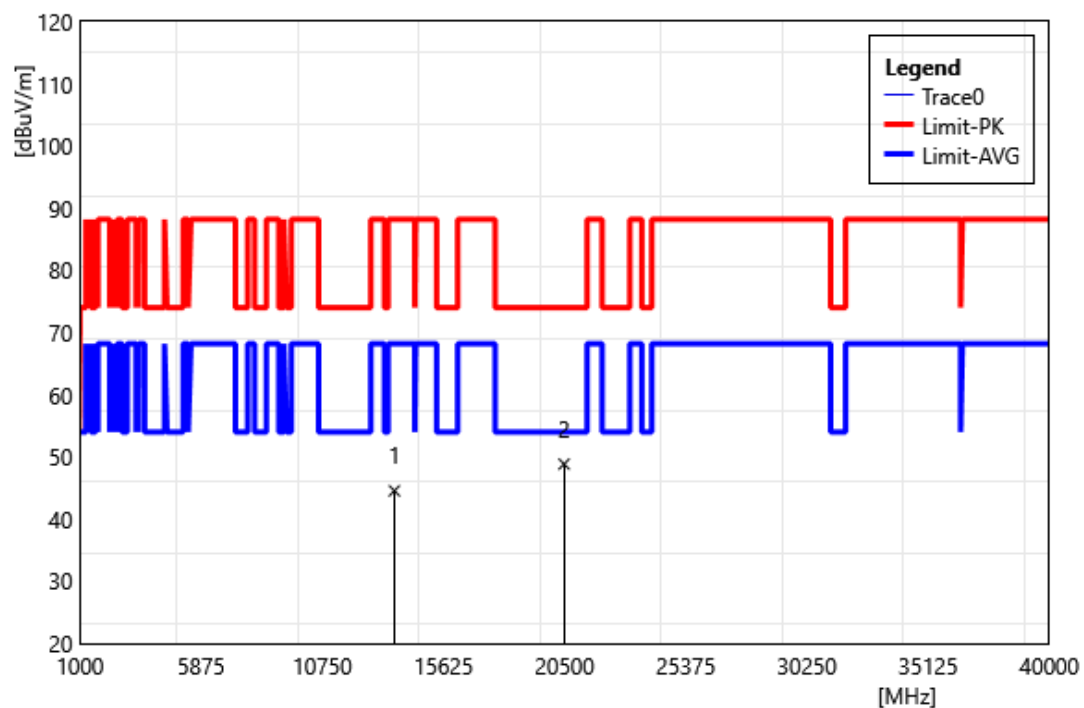


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	36.68	7.86	44.54	88.20	-43.66	PEAK
2	20475.00	39.70	9.13	48.83	74.00	-25.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6825 MHz		
Polarization:	Vertical		
Remark:			

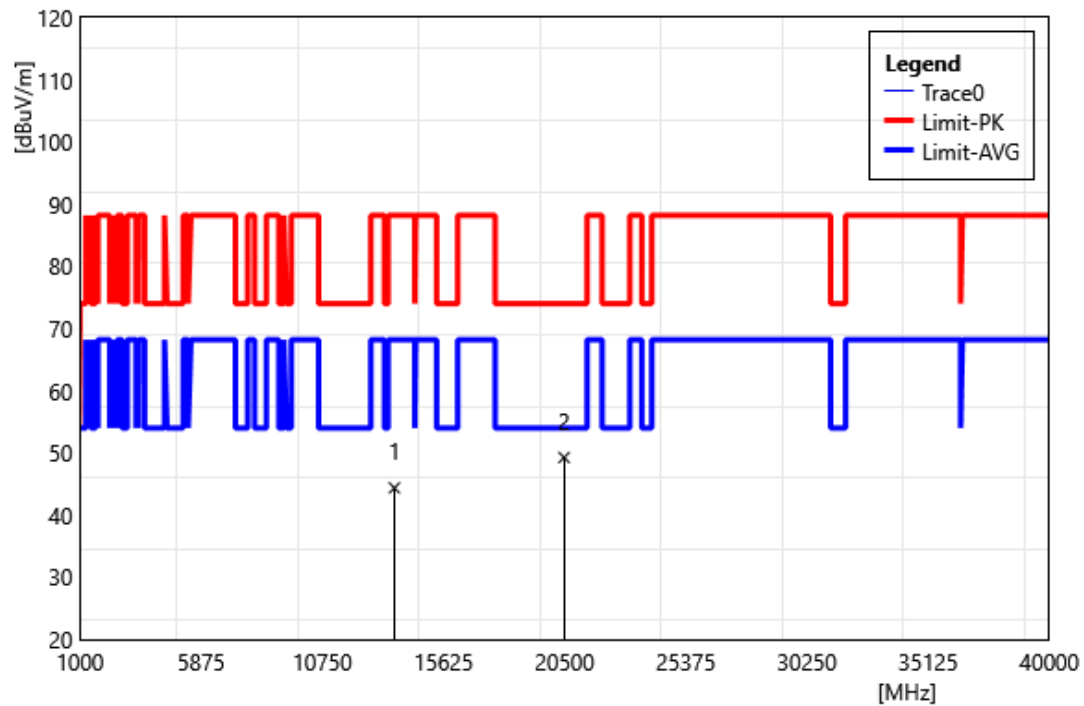


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	36.52	7.86	44.38	88.20	-43.82	PEAK
2	20475.00	40.13	9.13	49.26	74.00	-24.74	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

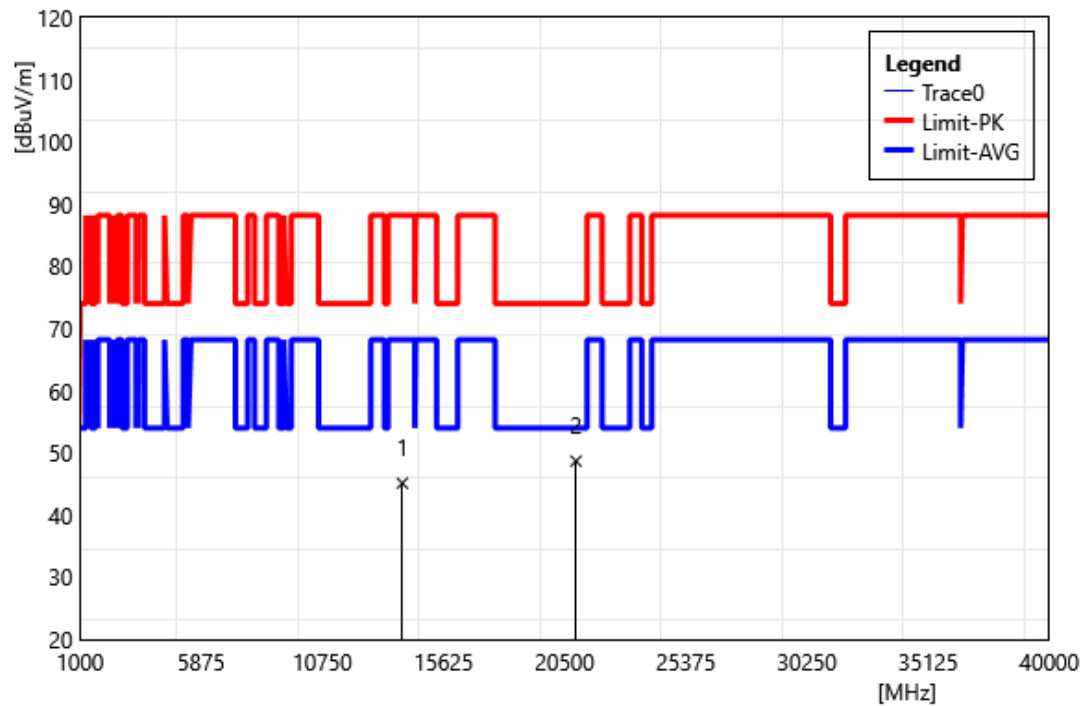


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	36.86	8.27	45.13	88.20	-43.07	PEAK
2	20955.00	39.34	9.35	48.69	74.00	-25.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

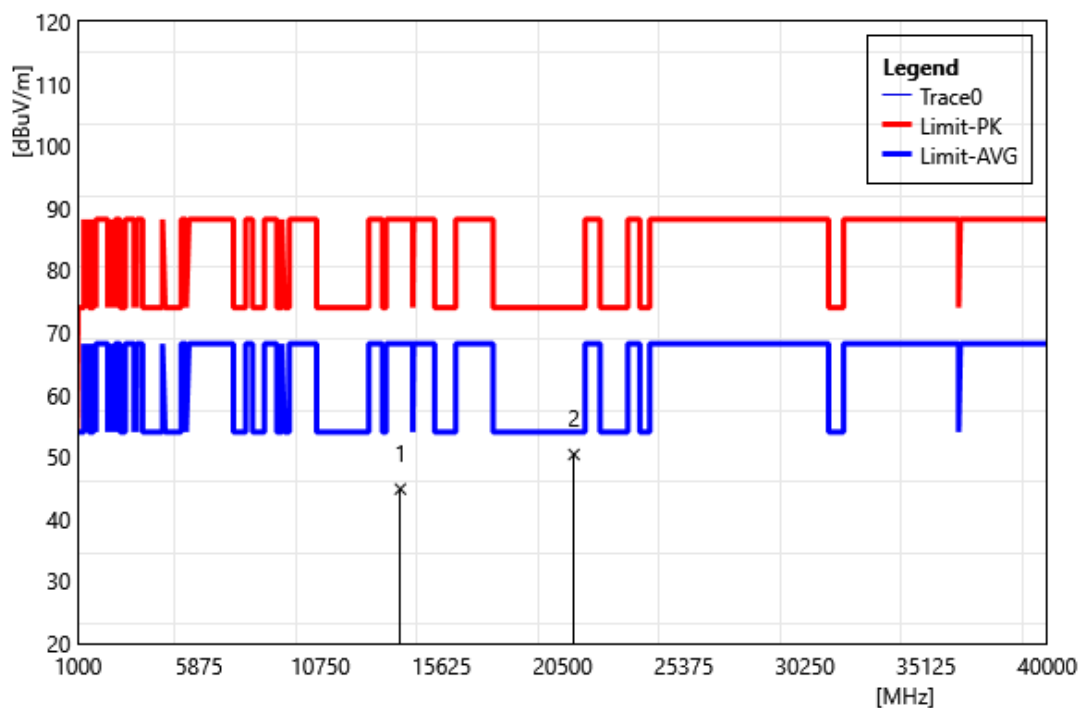


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	36.56	8.27	44.83	88.20	-43.37	PEAK
2	20955.00	41.03	9.35	50.38	74.00	-23.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5955 MHz		
Polarization:	Horizontal		
Remark:			

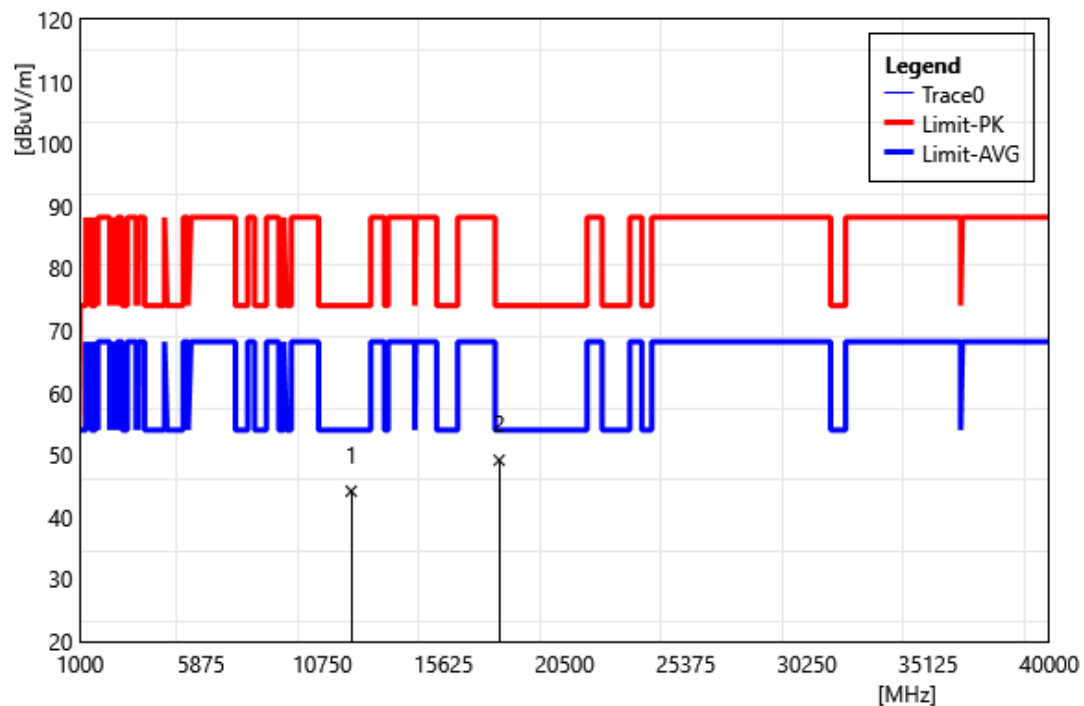


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	36.53	7.63	44.16	74.00	-29.84	PEAK
2	17865.00	41.89	7.25	49.14	74.00	-24.86	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5955 MHz		
Polarization:	Vertical		
Remark:			

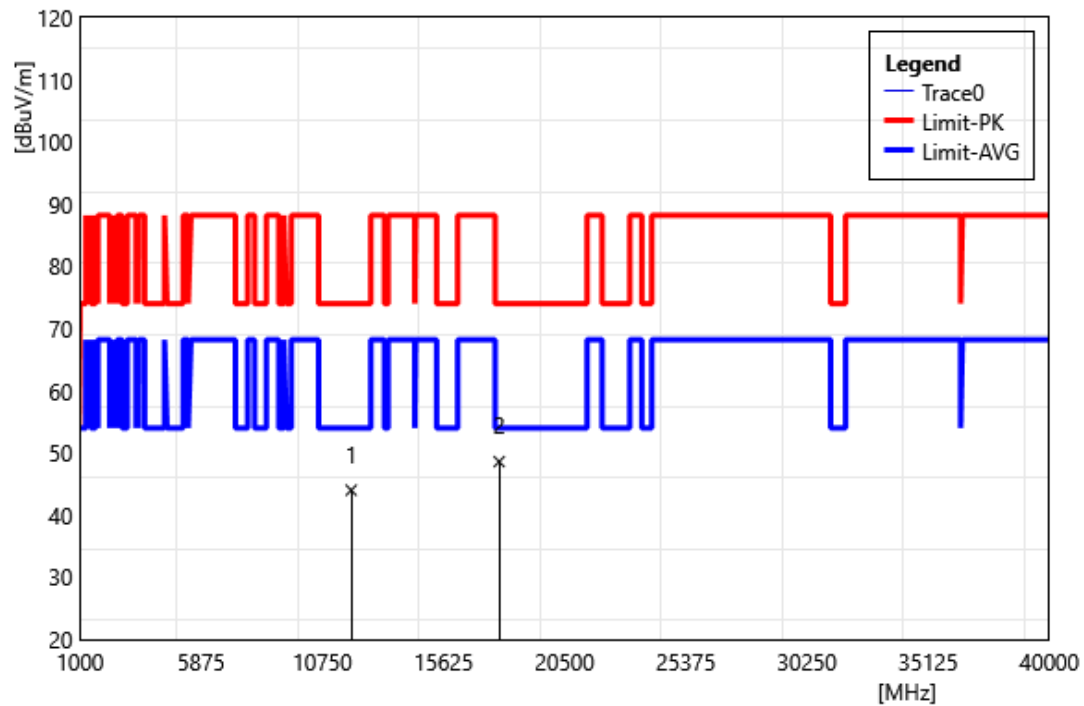


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	36.37	7.63	44.00	74.00	-30.00	PEAK
2	17865.00	41.35	7.25	48.60	74.00	-25.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6175 MHz		
Polarization:	Horizontal		
Remark:			

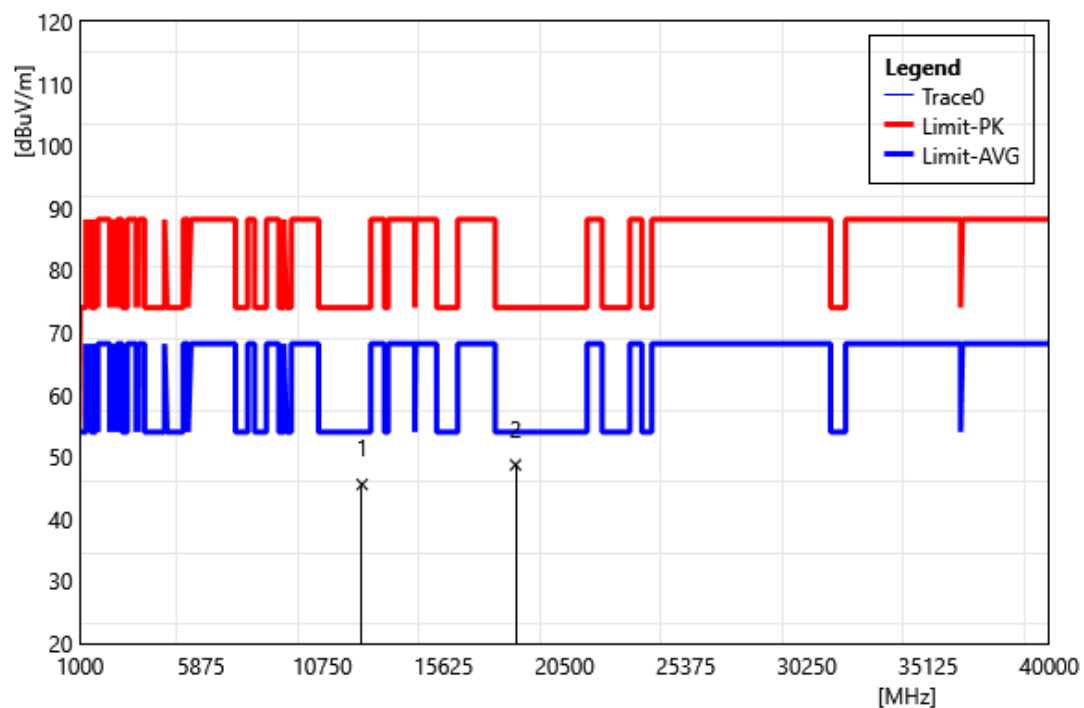


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	37.70	7.87	45.57	74.00	-28.43	PEAK
2	18525.00	40.46	8.26	48.72	74.00	-25.28	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6175 MHz		
Polarization:	Vertical		
Remark:			

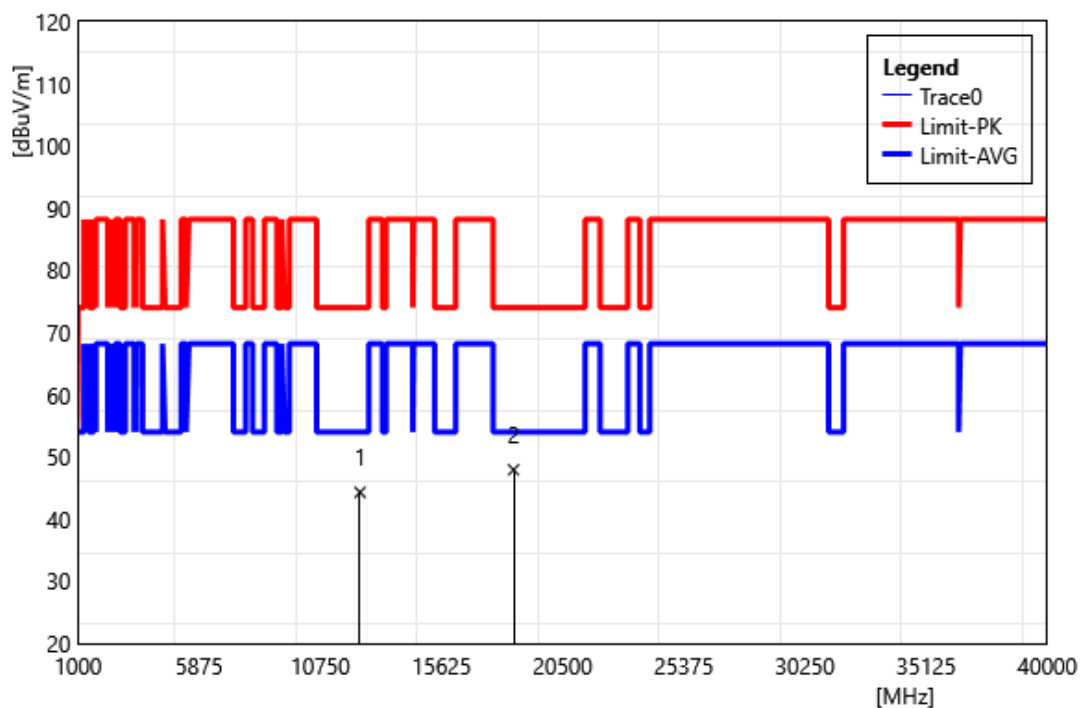


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	36.43	7.87	44.30	74.00	-29.70	PEAK
2	18525.00	39.67	8.26	47.93	74.00	-26.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6415 MHz		
Polarization:	Horizontal		
Remark:			

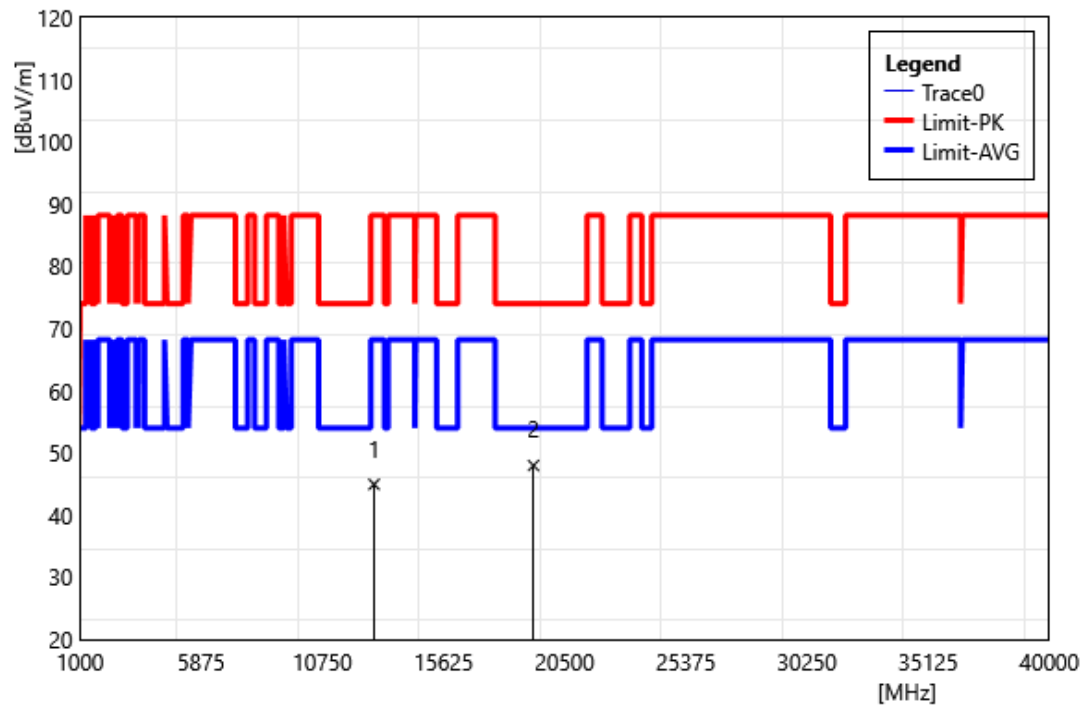


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	36.36	8.58	44.94	88.20	-43.26	PEAK
2	19245.00	39.39	8.58	47.97	74.00	-26.03	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6415 MHz		
Polarization:	Vertical		
Remark:			

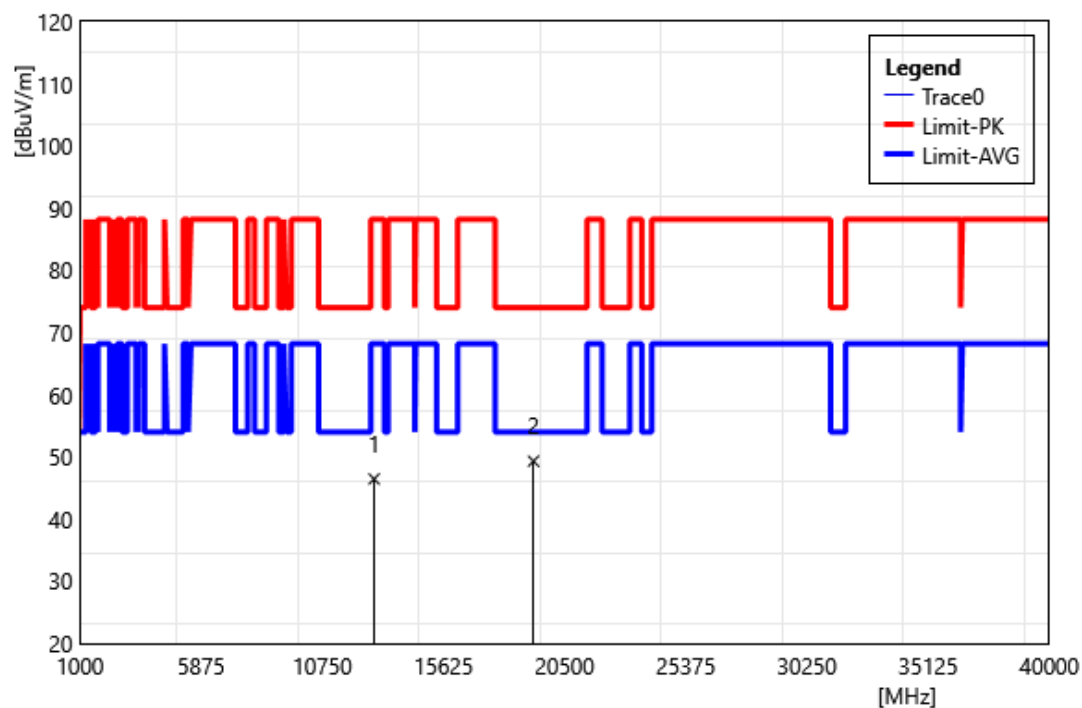


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	37.87	8.58	46.45	88.20	-41.75	PEAK
2	19245.00	40.73	8.58	49.31	74.00	-24.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6435 MHz		
Polarization:	Horizontal		
Remark:			

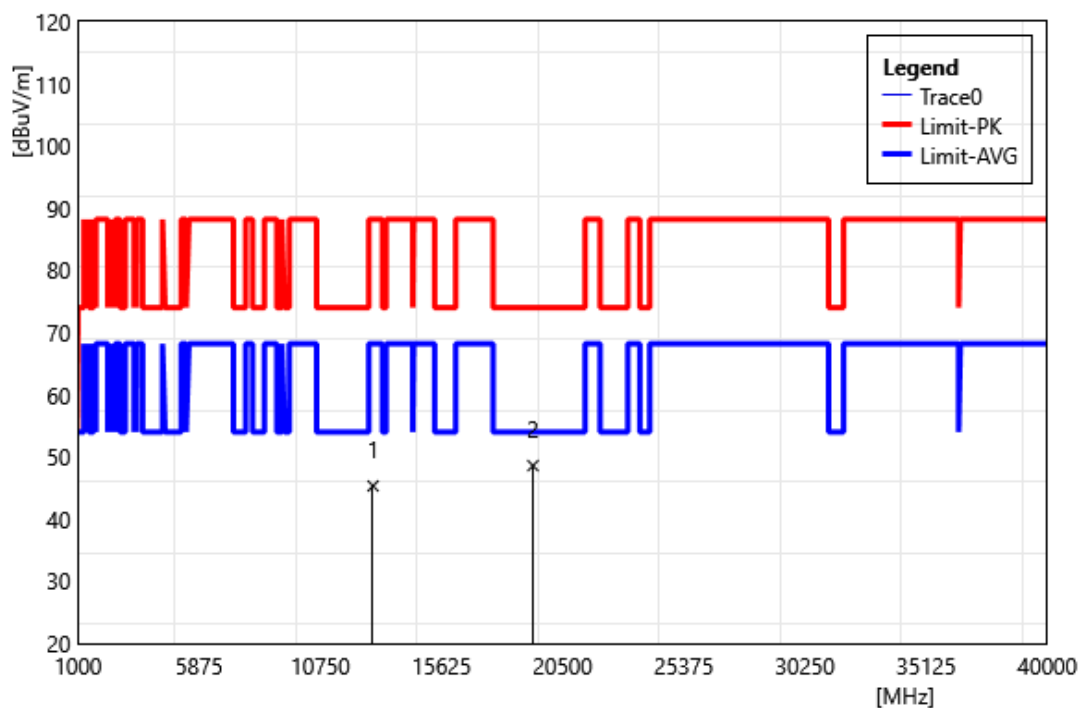


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	36.75	8.57	45.32	88.20	-42.88	PEAK
2	19305.00	39.98	8.61	48.59	74.00	-25.41	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6435 MHz		
Polarization:	Vertical		
Remark:			

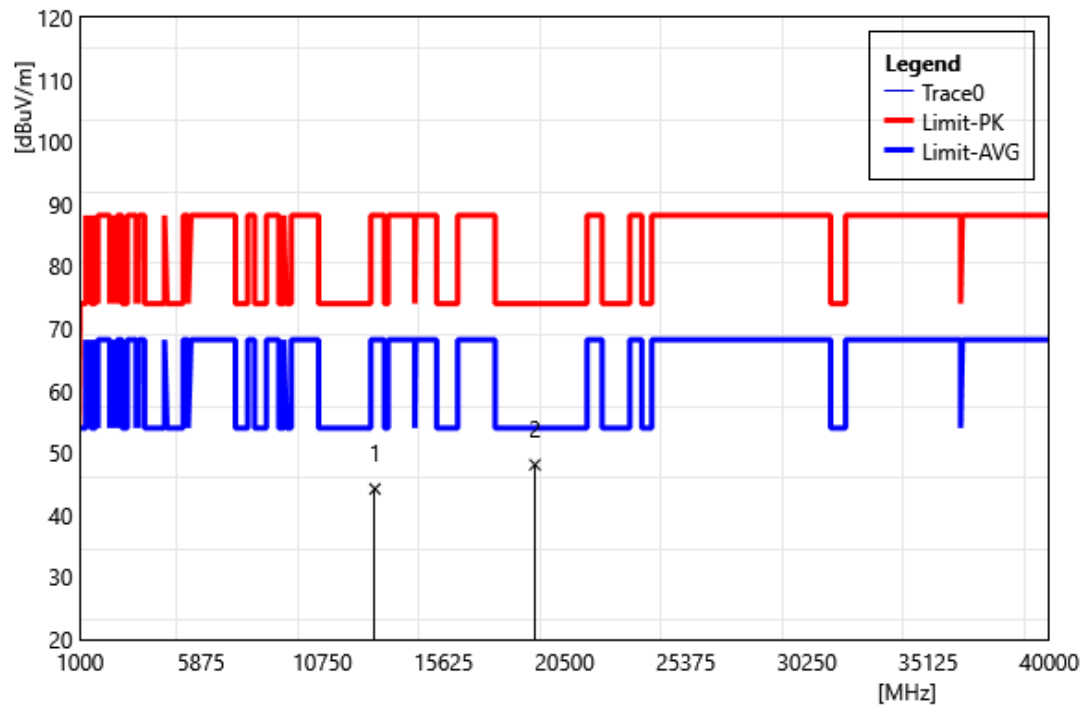


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	35.63	8.57	44.20	88.20	-44.00	PEAK
2	19305.00	39.49	8.61	48.10	74.00	-25.90	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6435 MHz		
Polarization:	Horizontal		
Remark:			

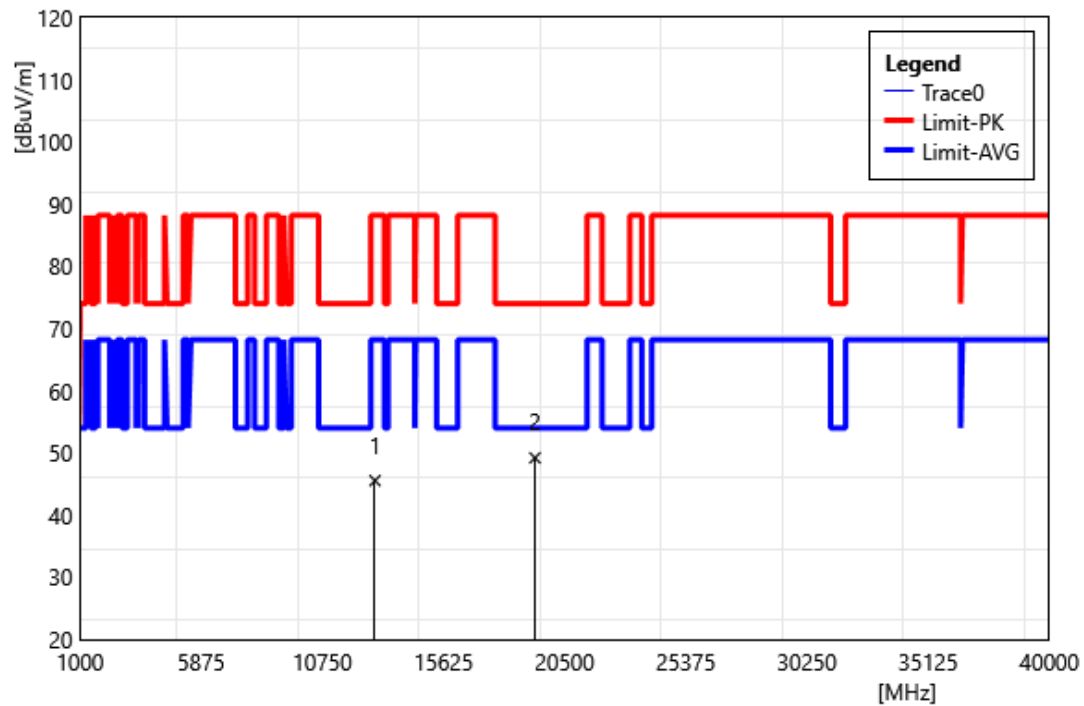


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	36.97	8.57	45.54	88.20	-42.66	PEAK
2	19305.00	40.59	8.61	49.20	74.00	-24.80	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6435 MHz		
Polarization:	Vertical		
Remark:			

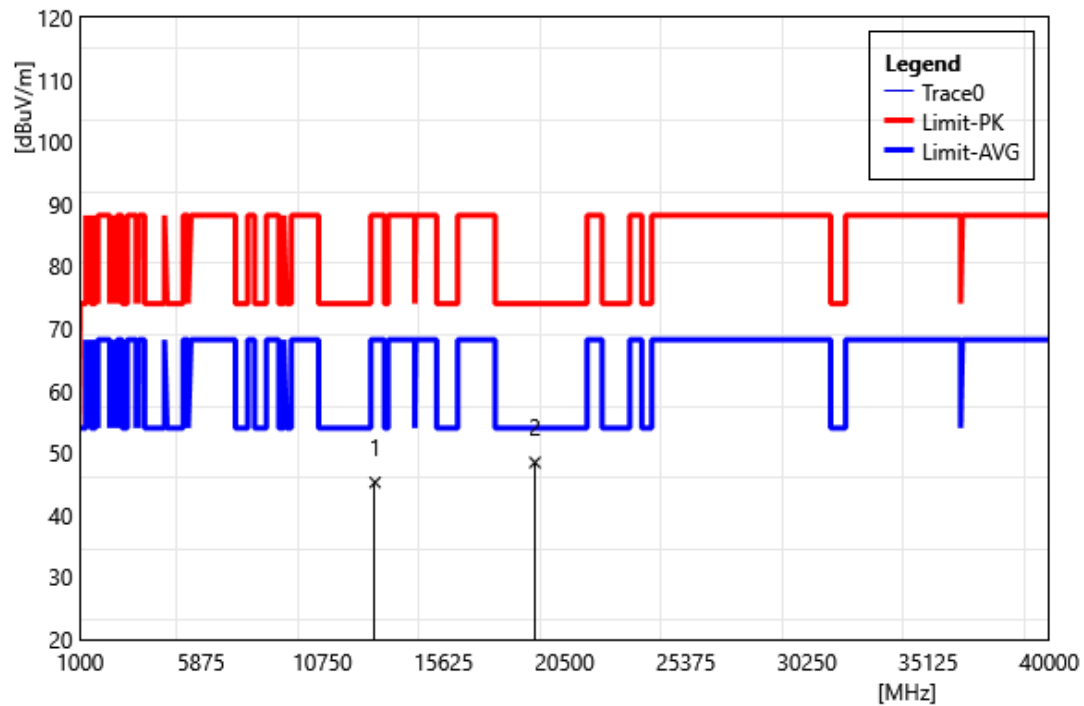


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	36.68	8.57	45.25	88.20	-42.95	PEAK
2	19305.00	39.85	8.61	48.46	74.00	-25.54	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6475 MHz		
Polarization:	Horizontal		
Remark:			

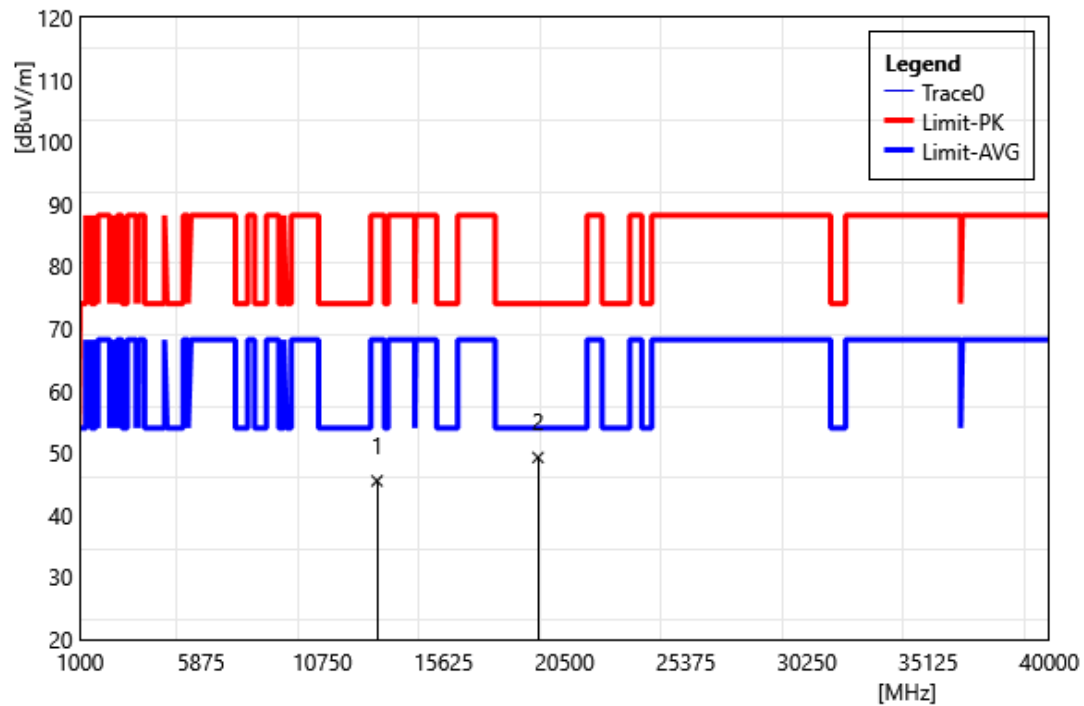


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	36.87	8.62	45.49	88.20	-42.71	PEAK
2	19425.00	40.60	8.66	49.26	74.00	-24.74	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6475 MHz		
Polarization:	Vertical		
Remark:			

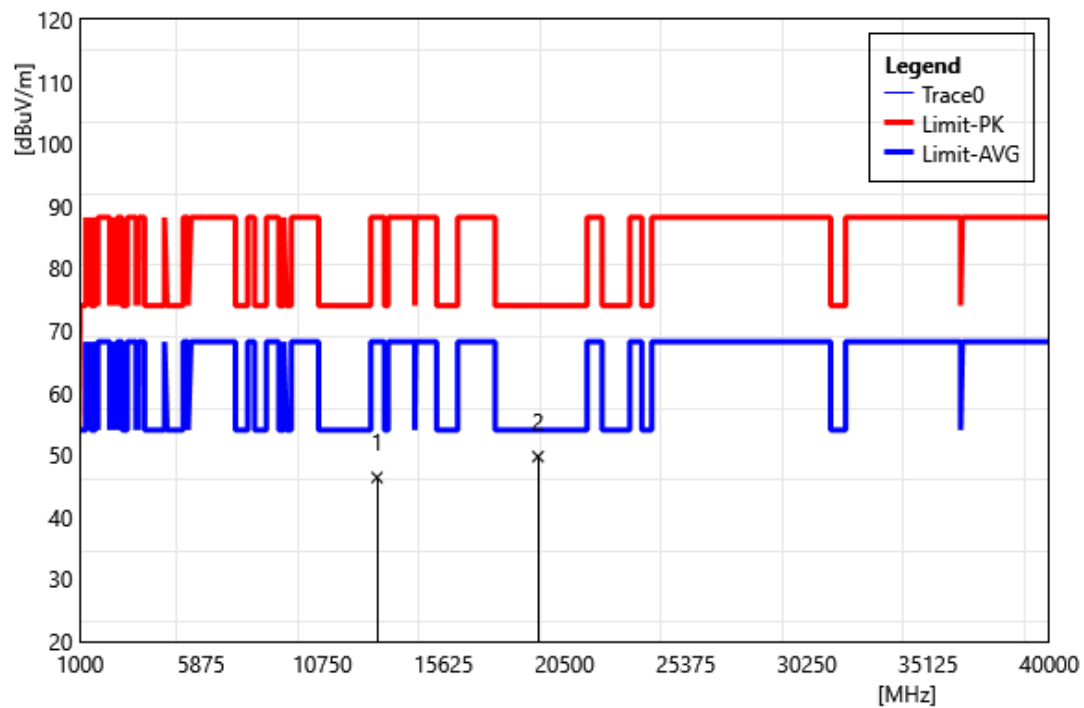


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	37.74	8.62	46.36	88.20	-41.84	PEAK
2	19425.00	41.06	8.66	49.72	74.00	-24.28	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6515 MHz		
Polarization:	Horizontal		
Remark:			

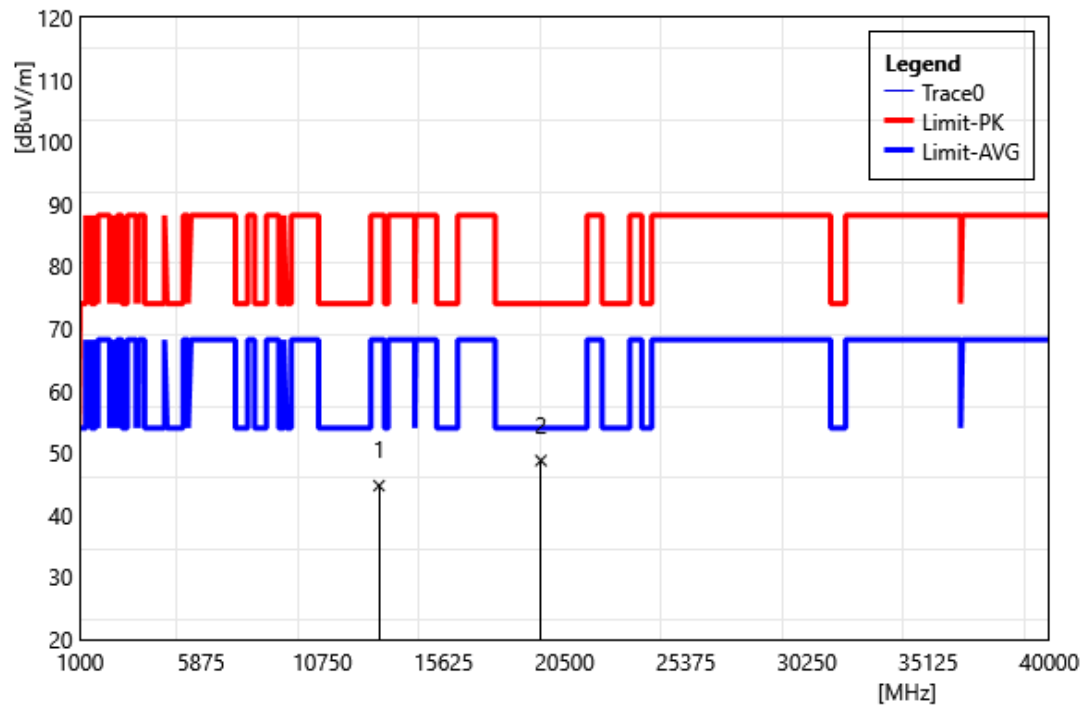


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	36.11	8.62	44.73	88.20	-43.47	PEAK
2	19545.00	40.05	8.72	48.77	74.00	-25.23	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6515 MHz		
Polarization:	Vertical		
Remark:			

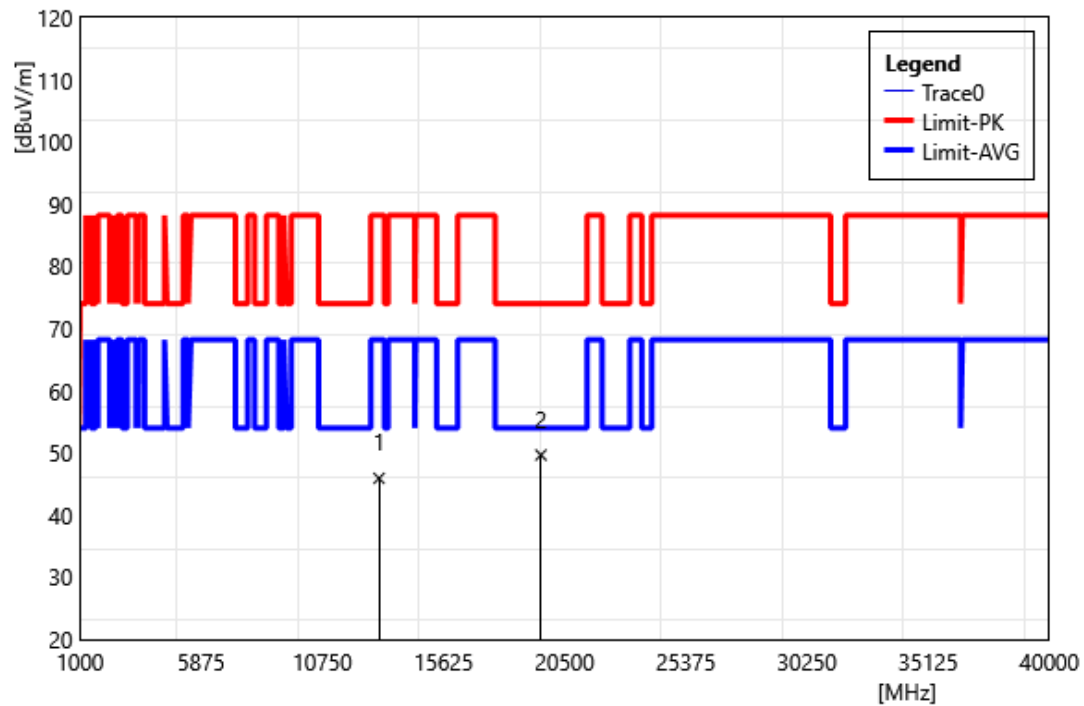


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	37.29	8.62	45.91	88.20	-42.29	PEAK
2	19545.00	40.94	8.72	49.66	74.00	-24.34	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6535 MHz		
Polarization:	Horizontal		
Remark:			

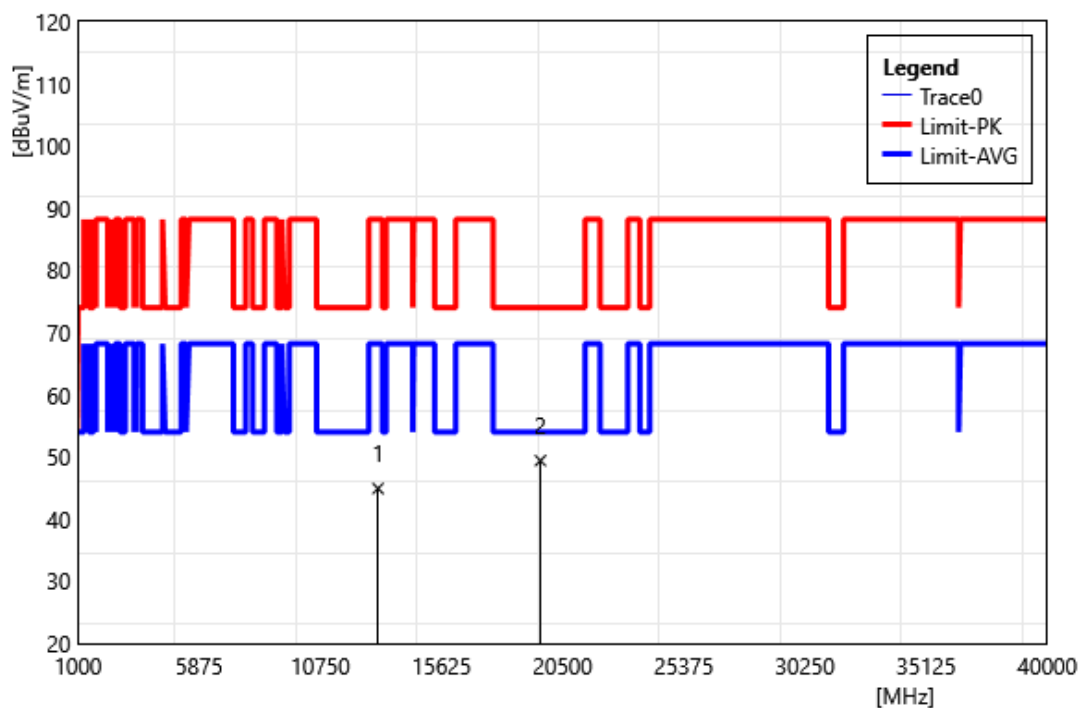


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	36.40	8.52	44.92	88.20	-43.28	PEAK
2	19605.00	40.66	8.74	49.40	74.00	-24.60	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6535 MHz		
Polarization:	Vertical		
Remark:			

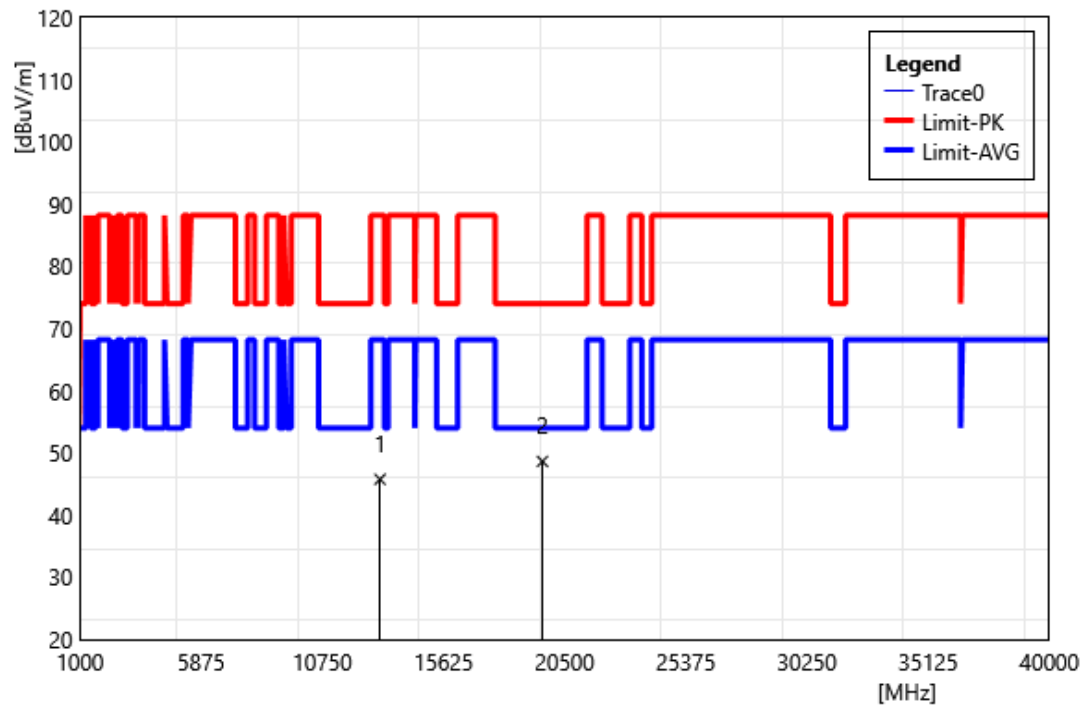


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	37.23	8.52	45.75	88.20	-42.45	PEAK
2	19605.00	39.89	8.74	48.63	74.00	-25.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6695 MHz		
Polarization:	Horizontal		
Remark:			

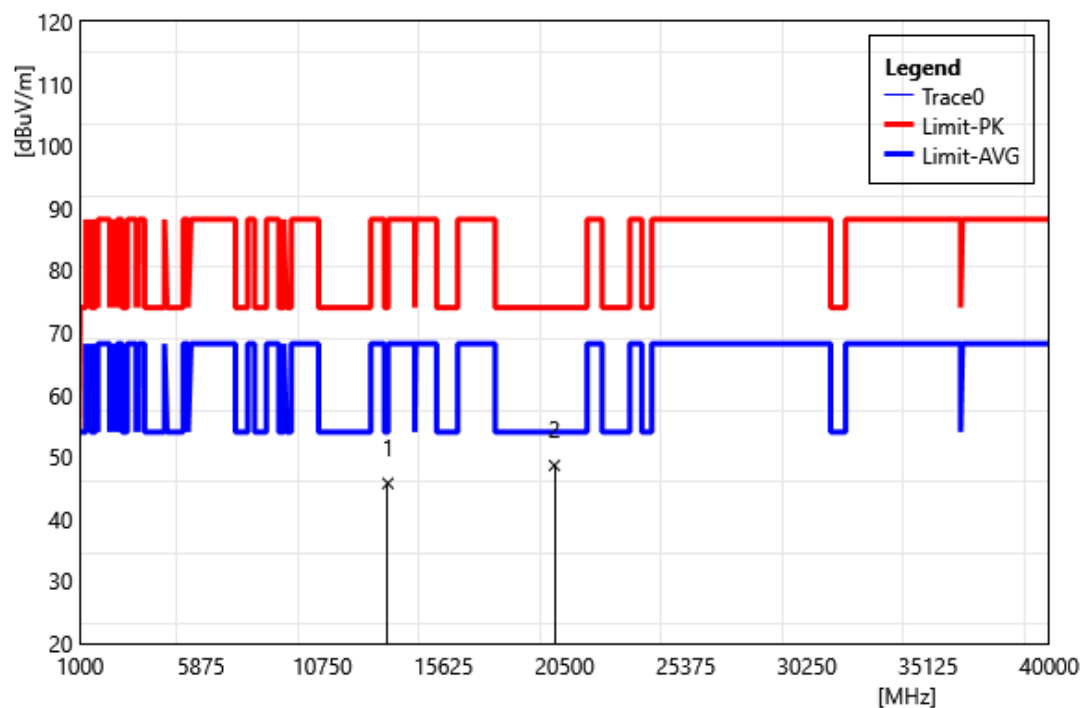


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	37.64	8.10	45.74	74.00	-28.26	PEAK
2	20085.00	39.67	8.96	48.63	74.00	-25.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6695 MHz		
Polarization:	Vertical		
Remark:			

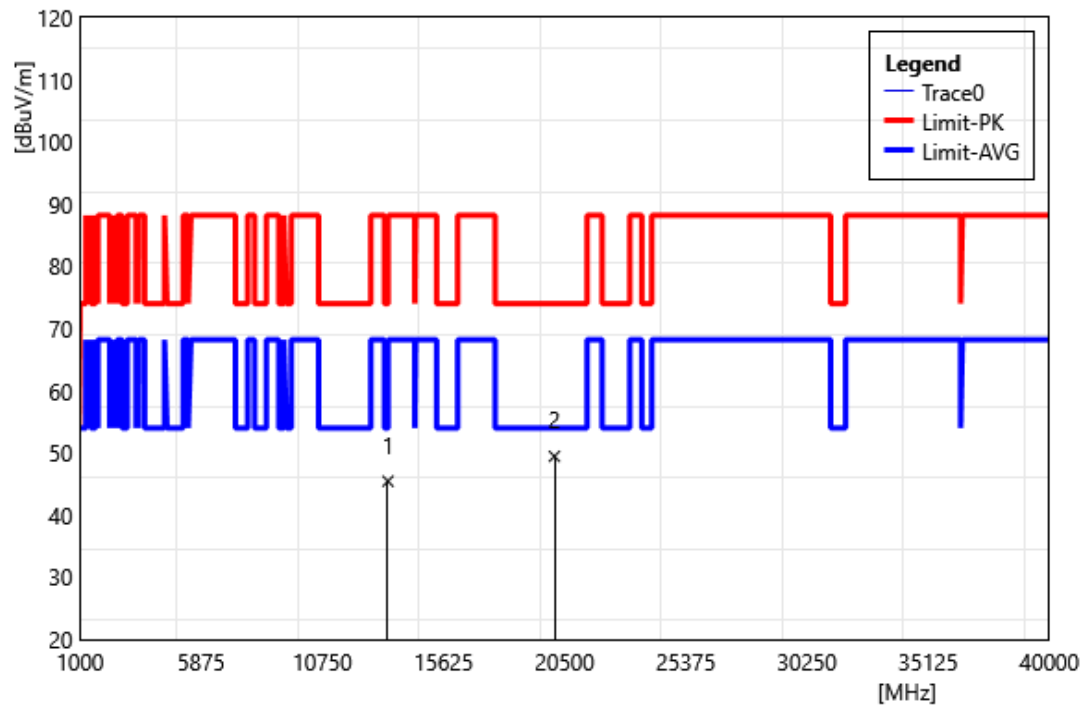


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	37.35	8.10	45.45	74.00	-28.55	PEAK
2	20085.00	40.48	8.96	49.44	74.00	-24.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6855 MHz		
Polarization:	Horizontal		
Remark:			

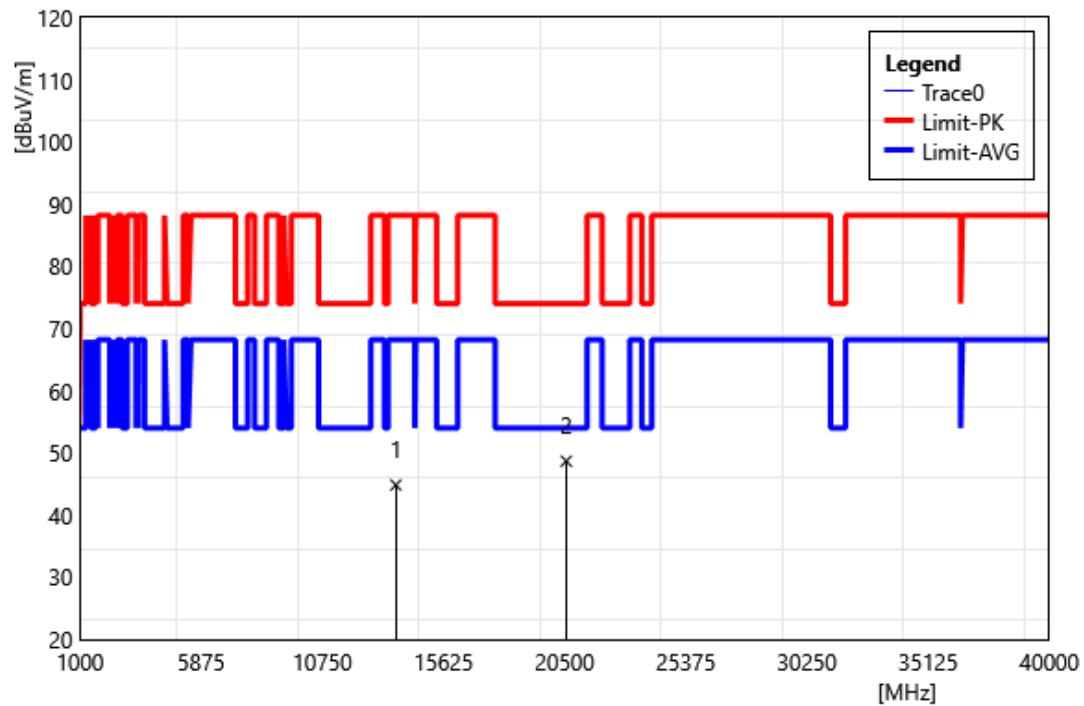


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	36.89	7.95	44.84	88.20	-43.36	PEAK
2	20565.00	39.49	9.18	48.67	74.00	-25.33	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6855 MHz		
Polarization:	Vertical		
Remark:			

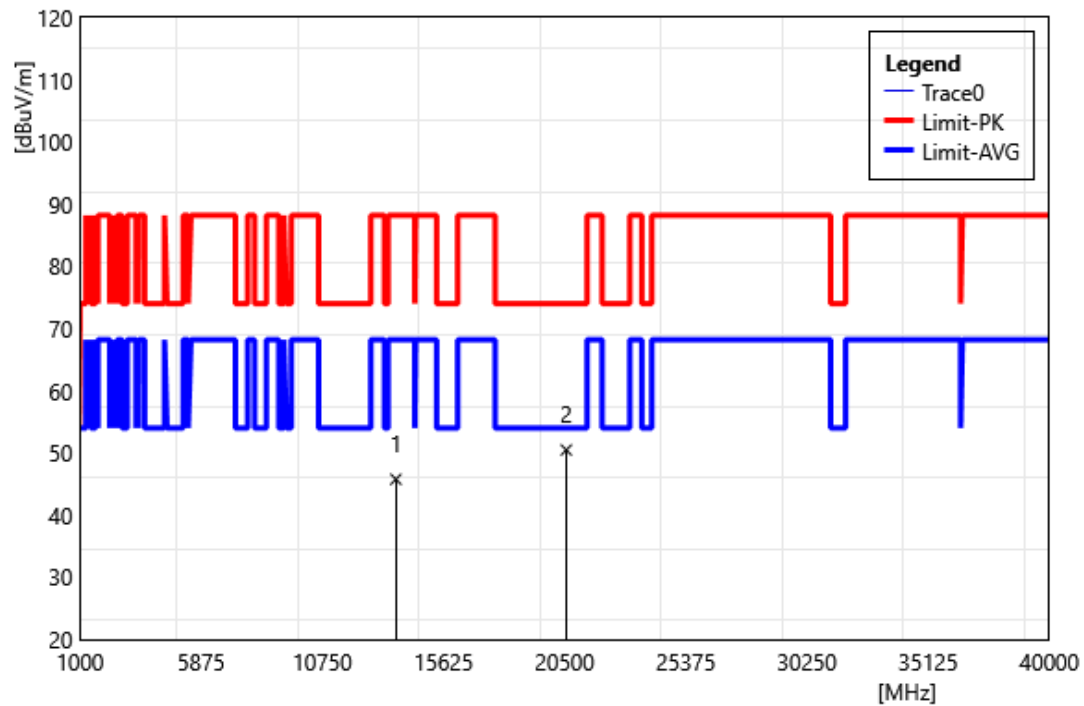


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	37.80	7.95	45.75	88.20	-42.45	PEAK
2	20565.00	41.30	9.18	50.48	74.00	-23.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6875 MHz		
Polarization:	Horizontal		
Remark:			

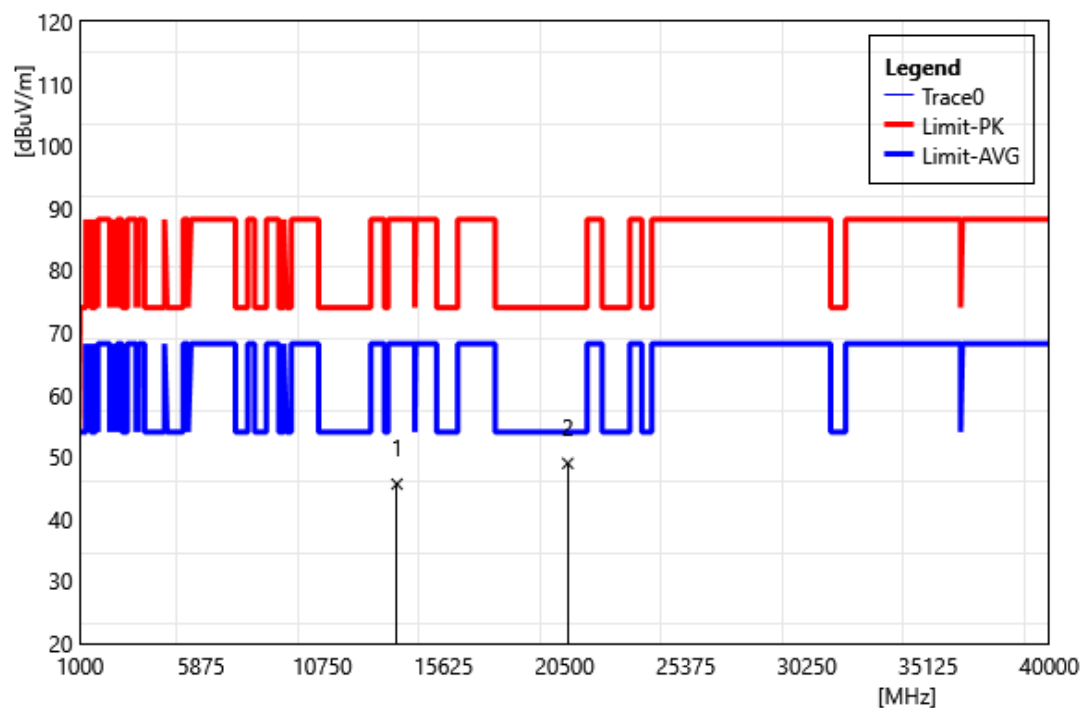


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	37.73	7.90	45.63	88.20	-42.57	PEAK
2	20625.00	39.76	9.20	48.96	74.00	-25.04	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6875 MHz		
Polarization:	Vertical		
Remark:			

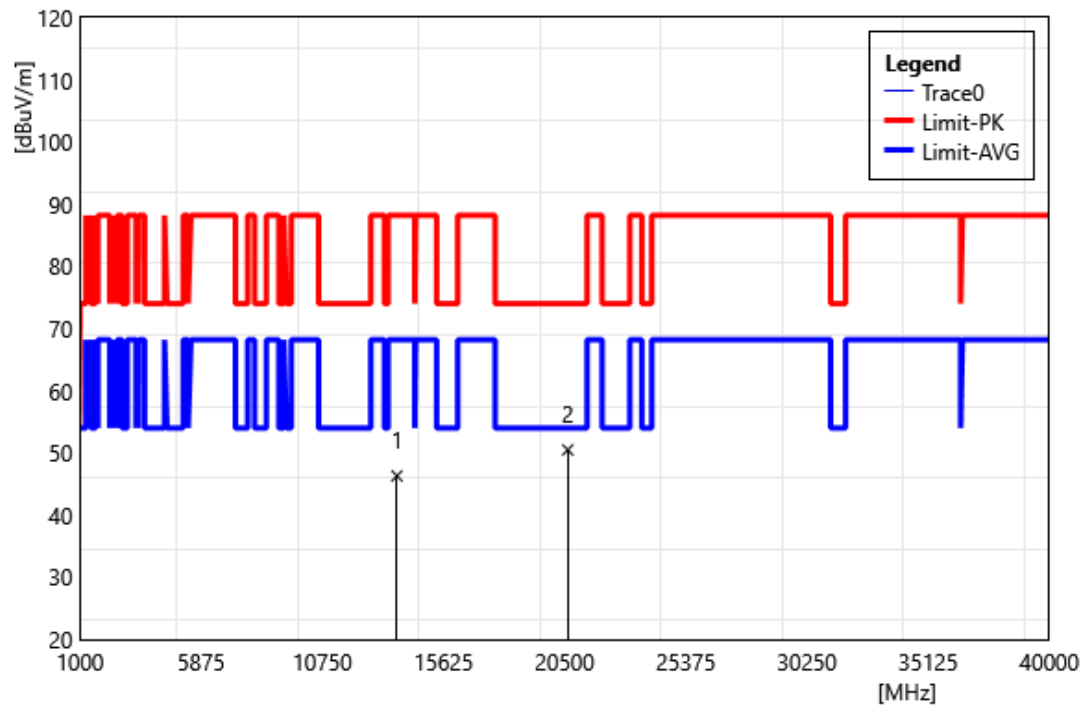


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	38.39	7.90	46.29	88.20	-41.91	PEAK
2	20625.00	41.28	9.20	50.48	74.00	-23.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6895 MHz		
Polarization:	Horizontal		
Remark:			

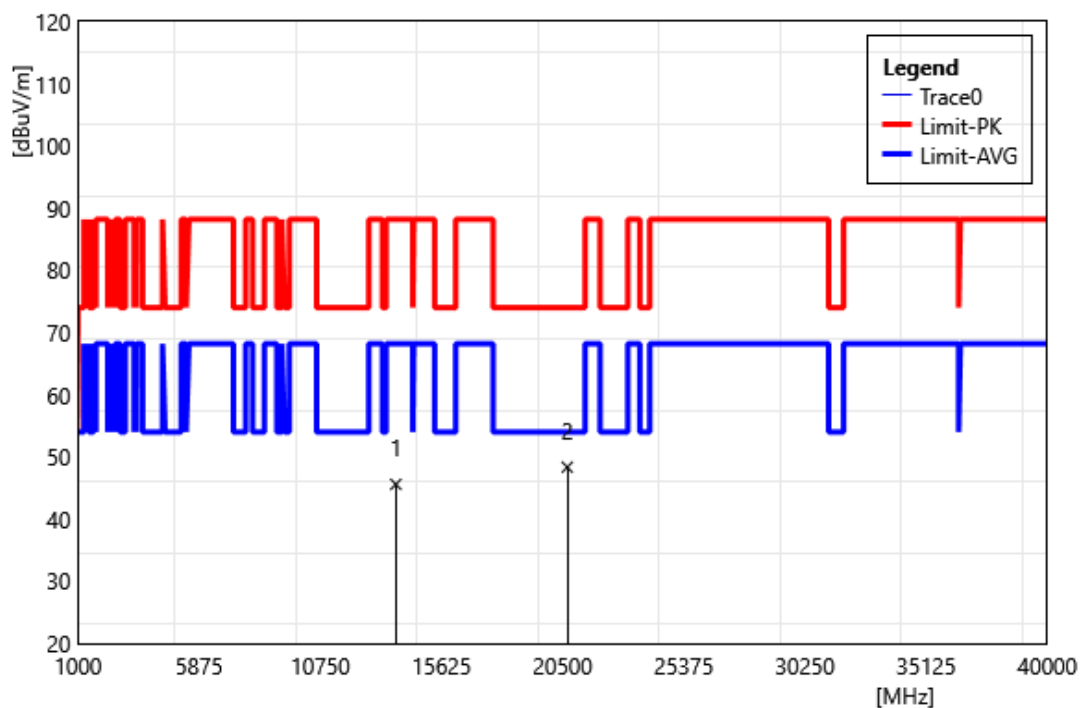


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	37.73	7.85	45.58	88.20	-42.62	PEAK
2	20685.00	39.13	9.22	48.35	74.00	-25.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6895 MHz		
Polarization:	Vertical		
Remark:			

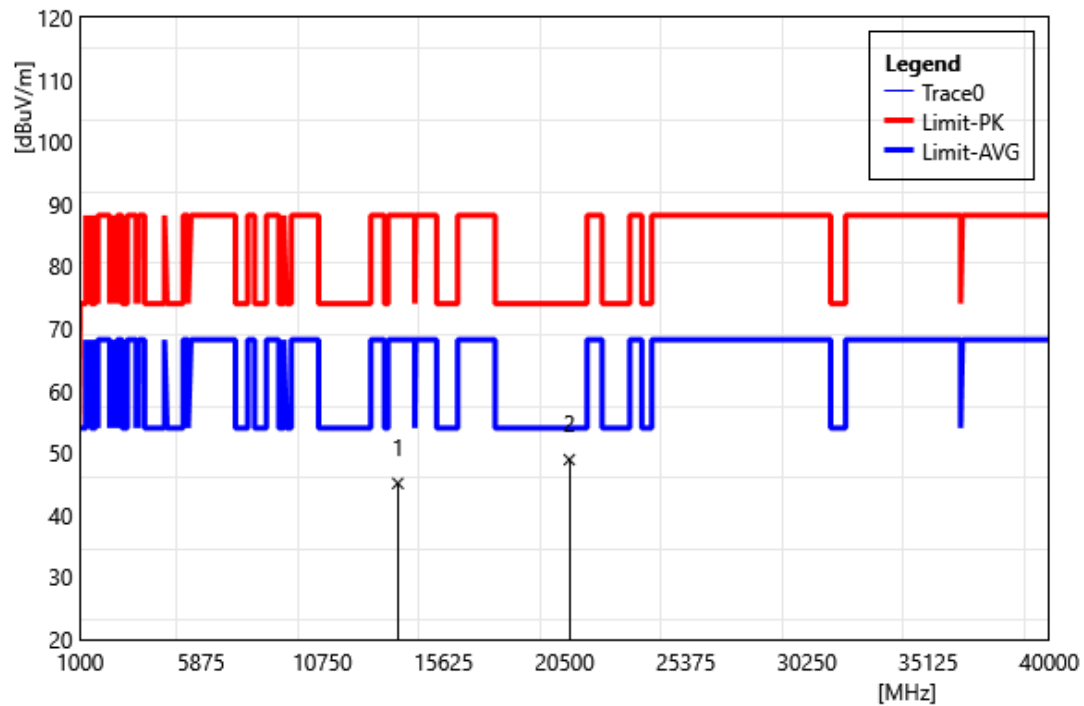


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	37.26	7.85	45.11	88.20	-43.09	PEAK
2	20685.00	39.69	9.22	48.91	74.00	-25.09	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6995 MHz		
Polarization:	Horizontal		
Remark:			

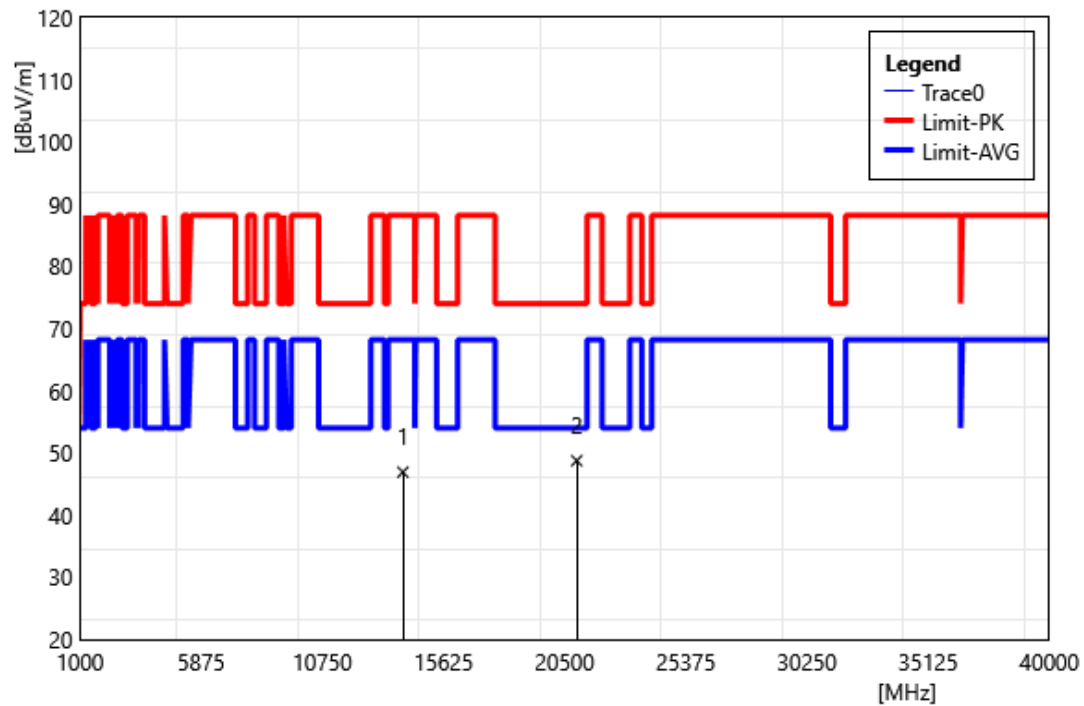


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	38.64	8.26	46.90	88.20	-41.30	PEAK
2	20985.00	39.39	9.36	48.75	74.00	-25.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 6995 MHz		
Polarization:	Vertical		
Remark:			

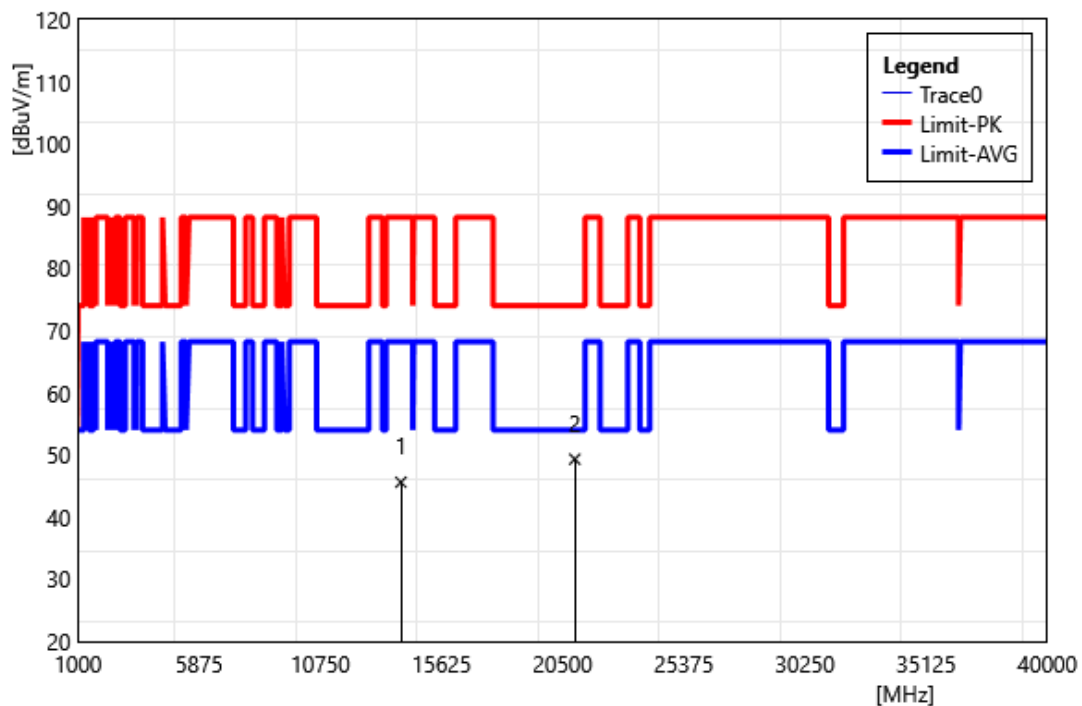


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	37.35	8.26	45.61	88.20	-42.59	PEAK
2	20985.00	39.95	9.36	49.31	74.00	-24.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Horizontal		
Remark:			

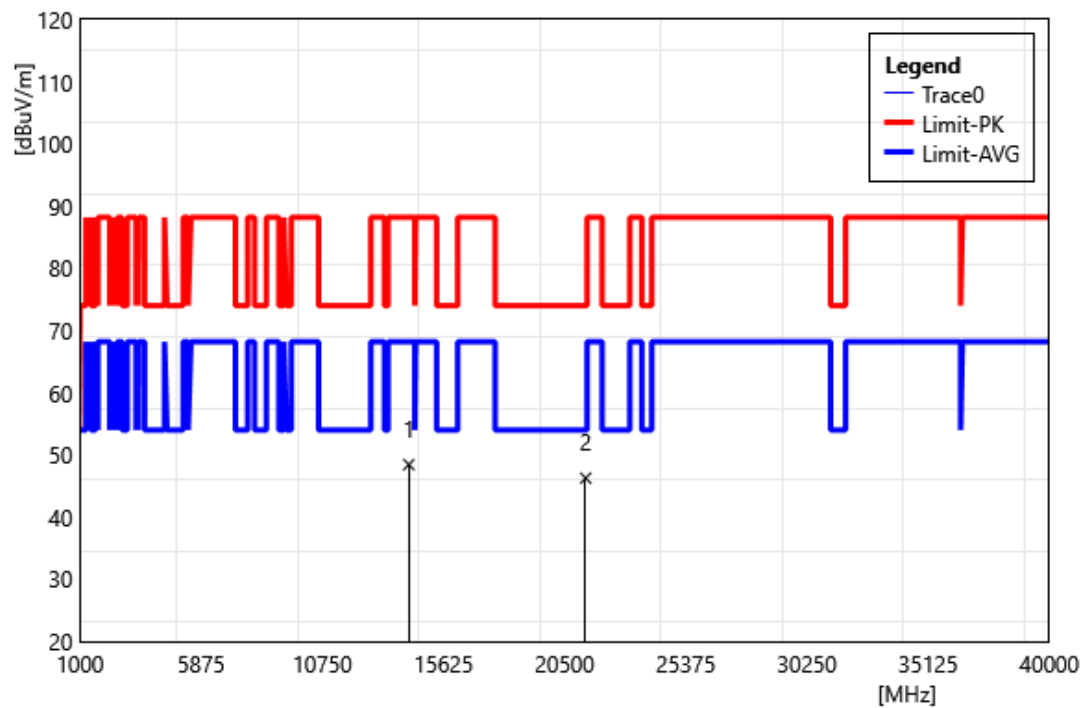


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	39.74	8.68	48.42	88.20	-39.78	PEAK
2	21345.00	36.73	9.53	46.26	74.00	-27.74	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Vertical		
Remark:			

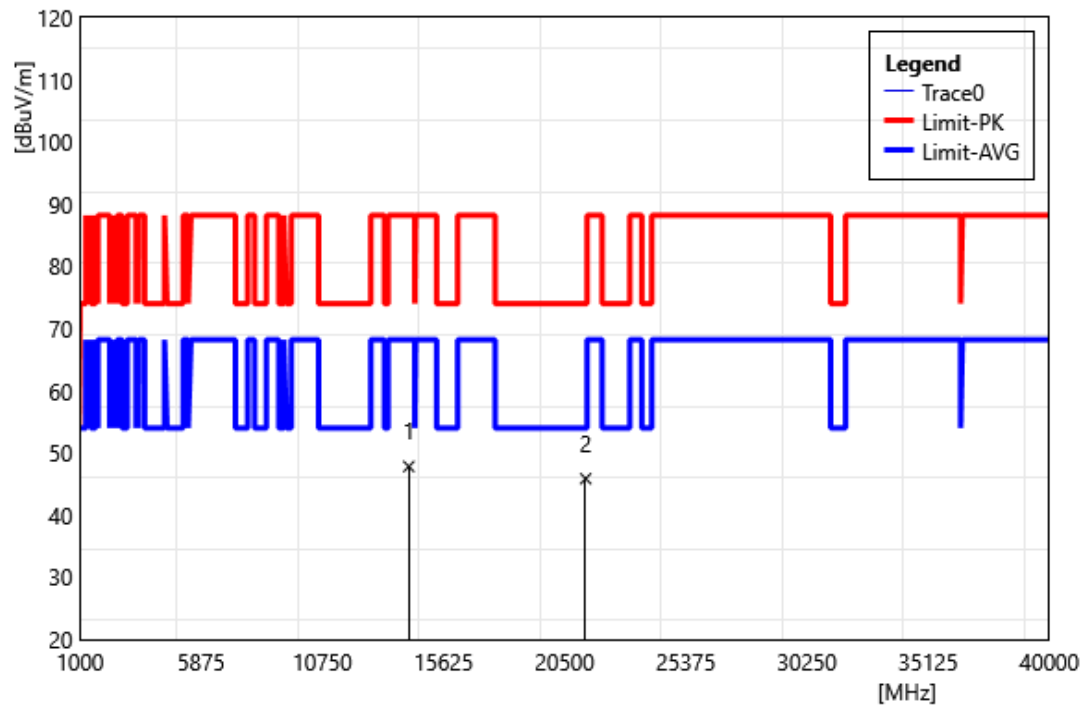


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	39.13	8.68	47.81	88.20	-40.39	PEAK
2	21345.00	36.31	9.53	45.84	74.00	-28.16	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5965 MHz		
Polarization:	Horizontal		
Remark:			

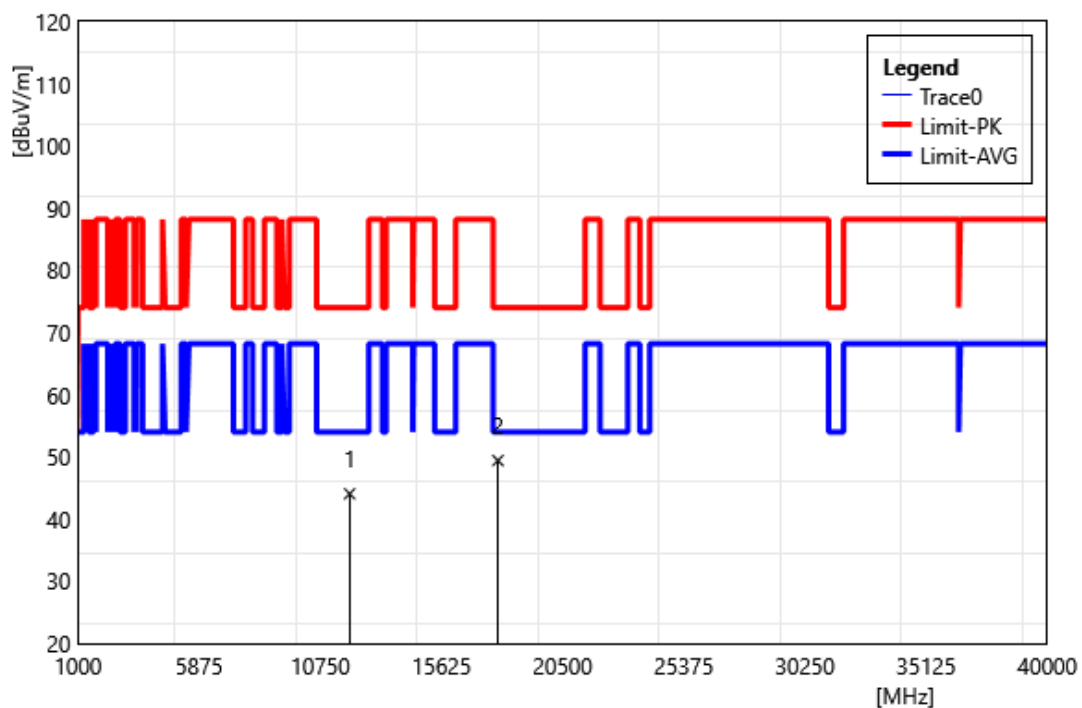


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	36.43	7.63	44.06	74.00	-29.94	PEAK
2	17895.00	41.99	7.42	49.41	74.00	-24.59	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5965 MHz		
Polarization:	Vertical		
Remark:			

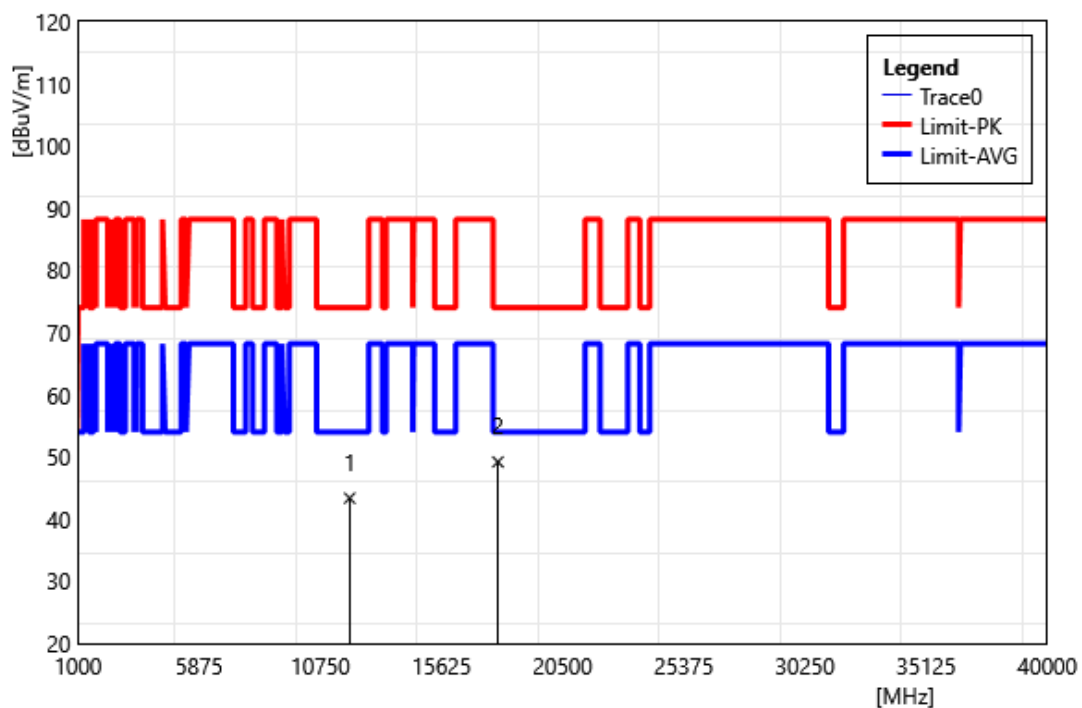


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	35.73	7.63	43.36	74.00	-30.64	PEAK
2	17895.00	41.78	7.42	49.20	74.00	-24.80	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6165 MHz		
Polarization:	Horizontal		
Remark:			

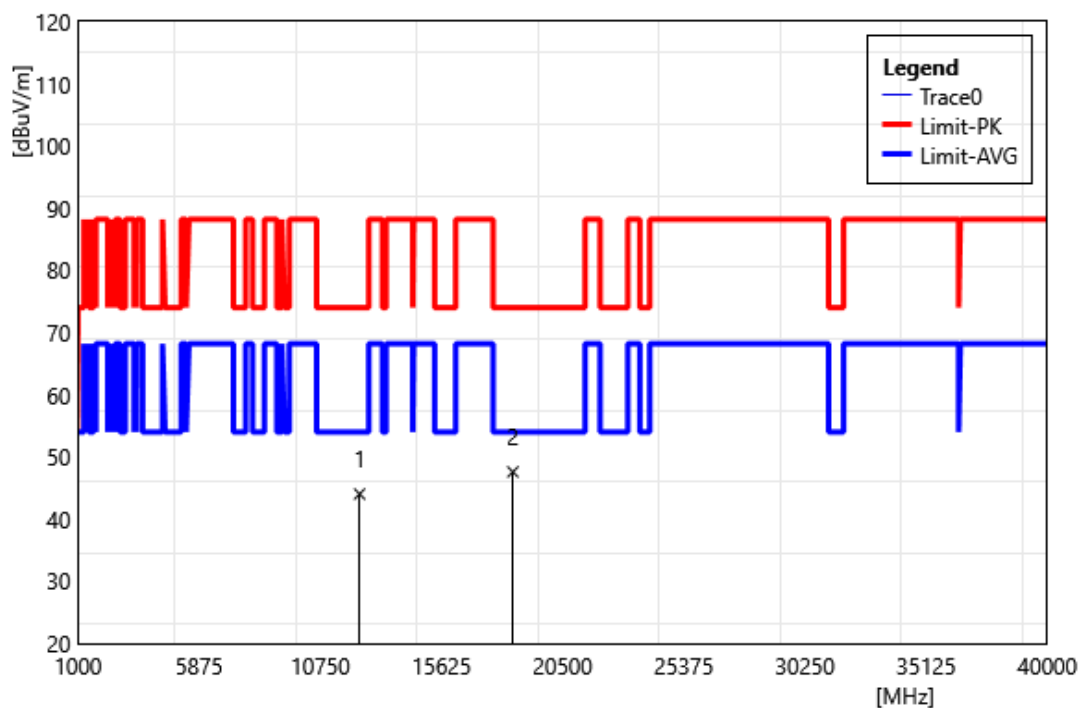


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	36.21	7.81	44.02	74.00	-29.98	PEAK
2	18495.00	39.35	8.25	47.60	74.00	-26.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6165 MHz		
Polarization:	Vertical		
Remark:			

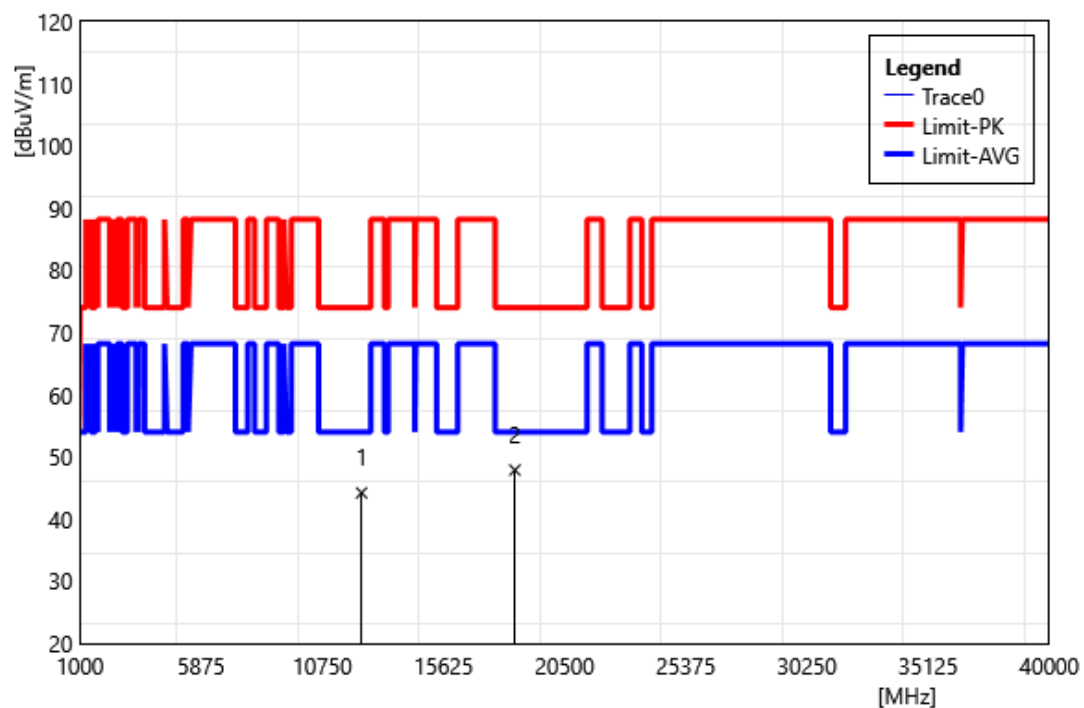


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	36.40	7.81	44.21	74.00	-29.79	PEAK
2	18495.00	39.64	8.25	47.89	74.00	-26.11	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6405 MHz		
Polarization:	Horizontal		
Remark:			

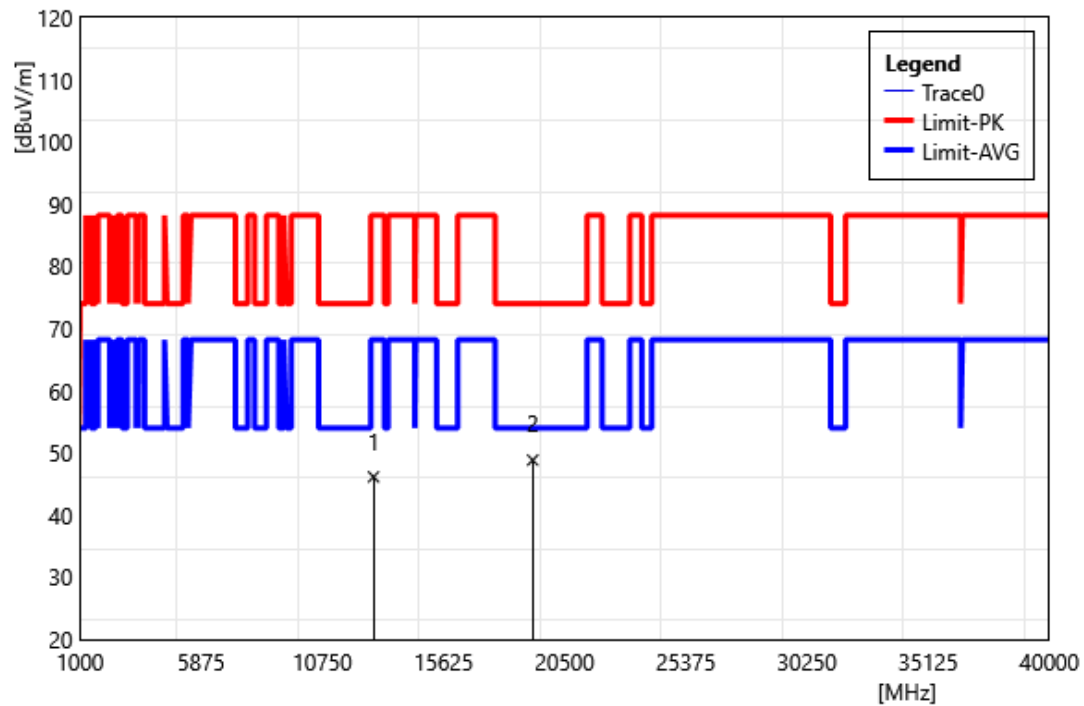


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	37.54	8.60	46.14	88.20	-42.06	PEAK
2	19215.00	40.27	8.57	48.84	74.00	-25.16	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6405 MHz		
Polarization:	Vertical		
Remark:			

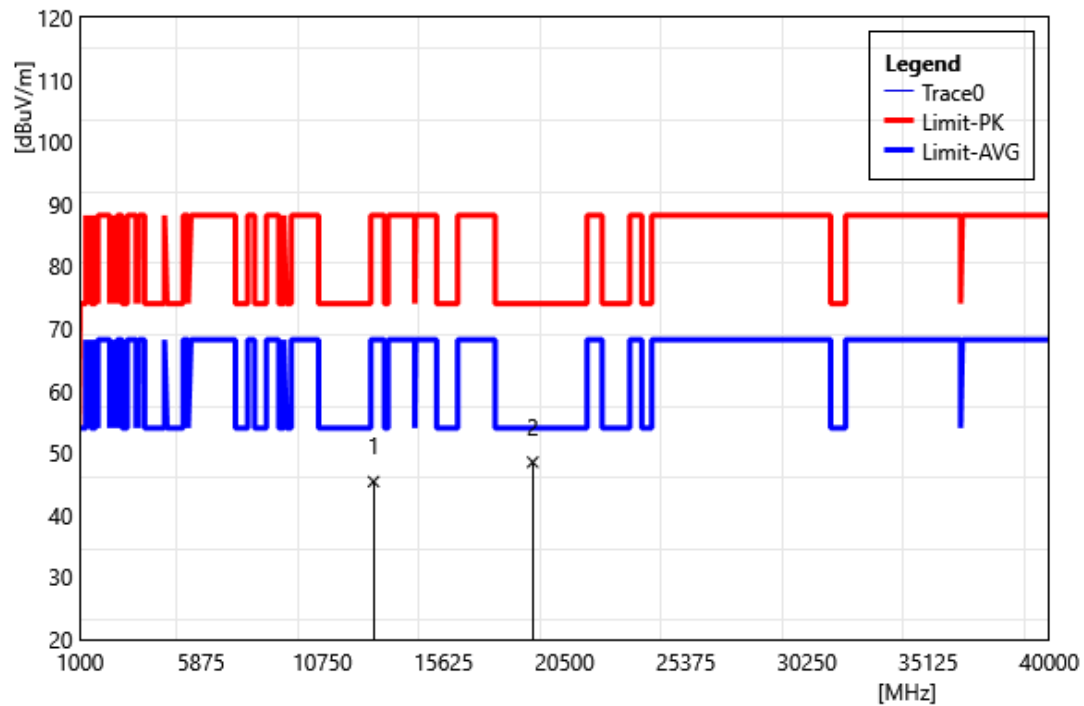


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	36.78	8.60	45.38	88.20	-42.82	PEAK
2	19215.00	39.93	8.57	48.50	74.00	-25.50	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6445 MHz		
Polarization:	Horizontal		
Remark:			

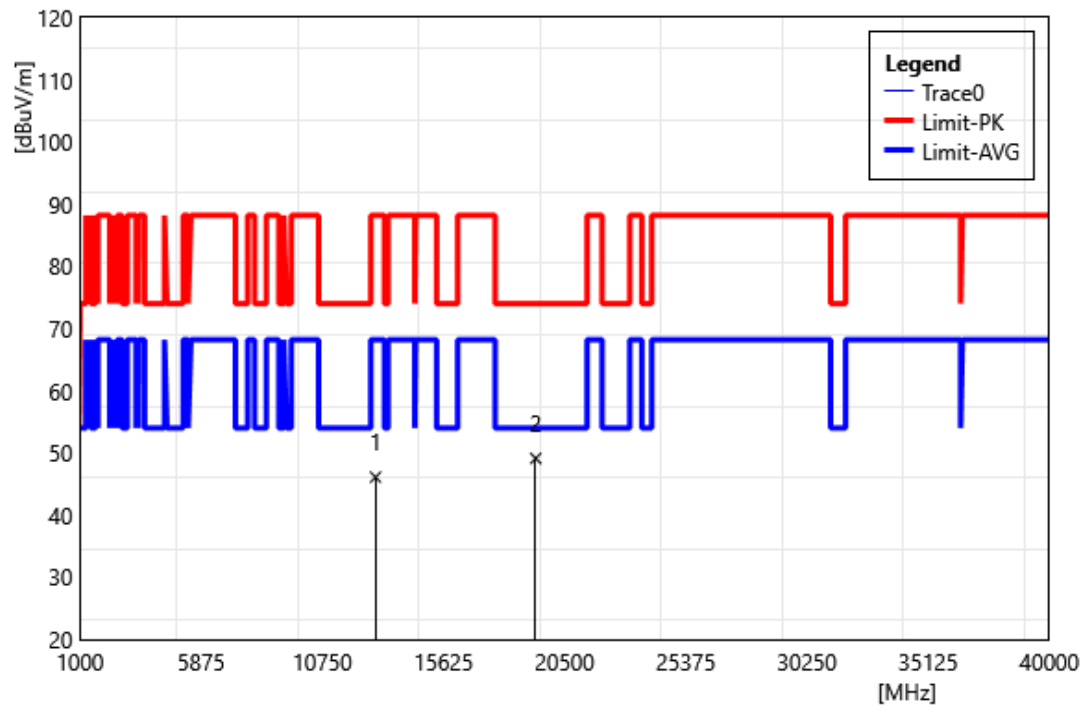


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	37.55	8.55	46.10	88.20	-42.10	PEAK
2	19335.00	40.49	8.63	49.12	74.00	-24.88	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6445 MHz		
Polarization:	Vertical		
Remark:			

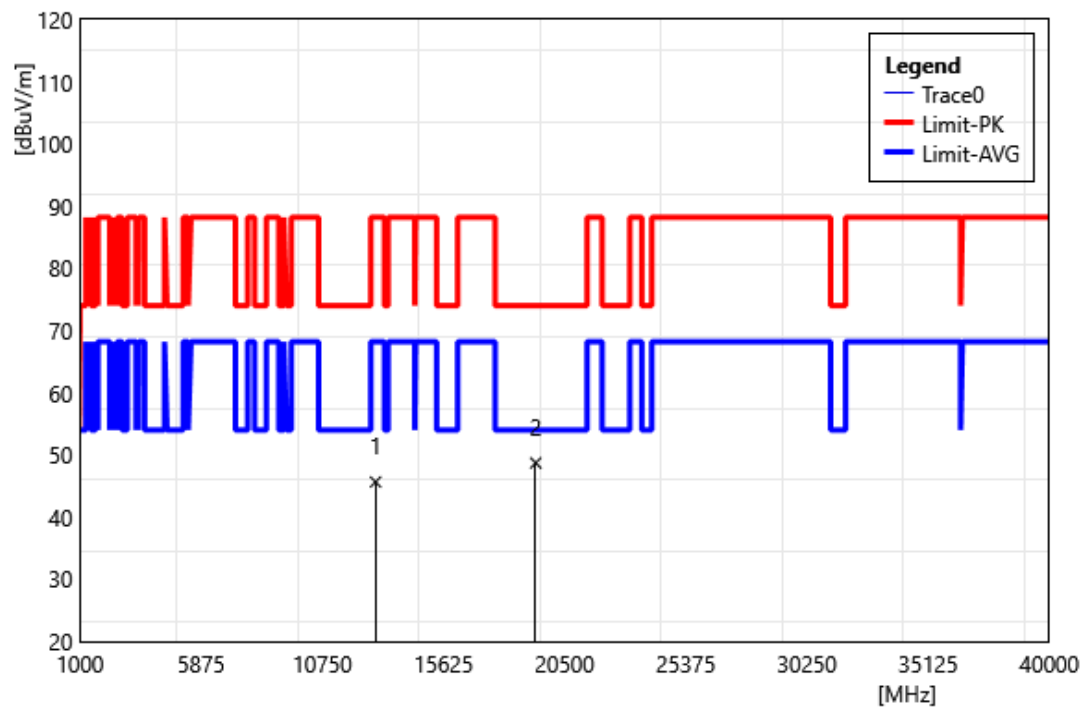


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	37.10	8.55	45.65	88.20	-42.55	PEAK
2	19335.00	40.07	8.63	48.70	74.00	-25.30	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6485 MHz		
Polarization:	Horizontal		
Remark:			

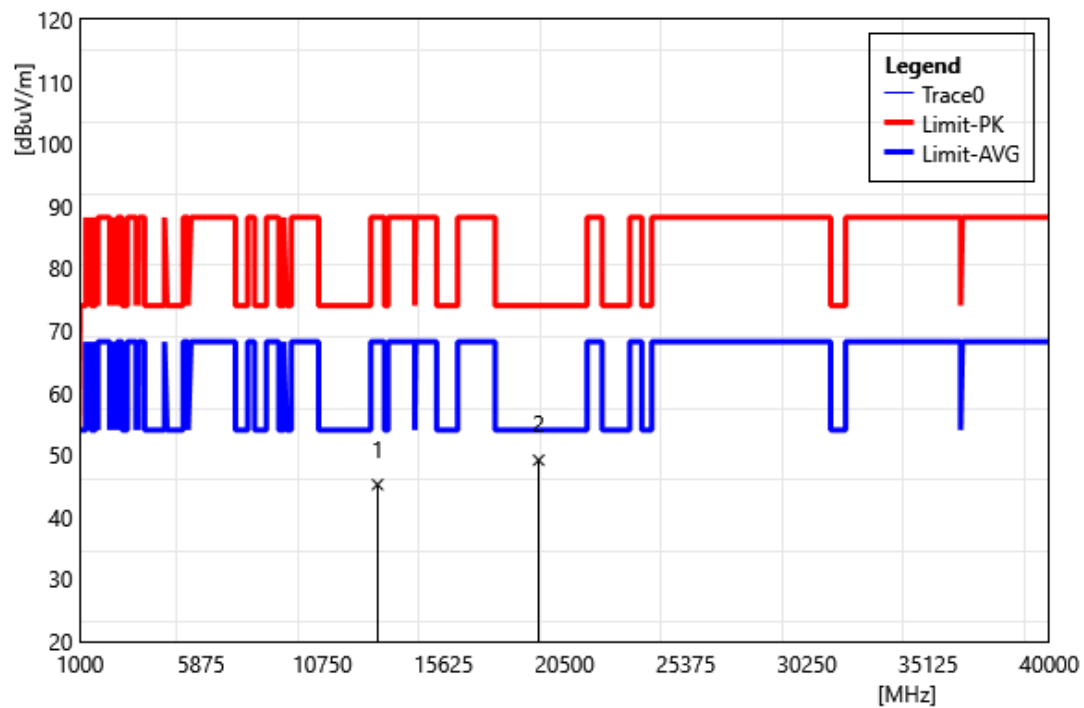


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	36.56	8.66	45.22	88.20	-42.98	PEAK
2	19455.00	40.49	8.67	49.16	74.00	-24.84	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6485 MHz		
Polarization:	Vertical		
Remark:			

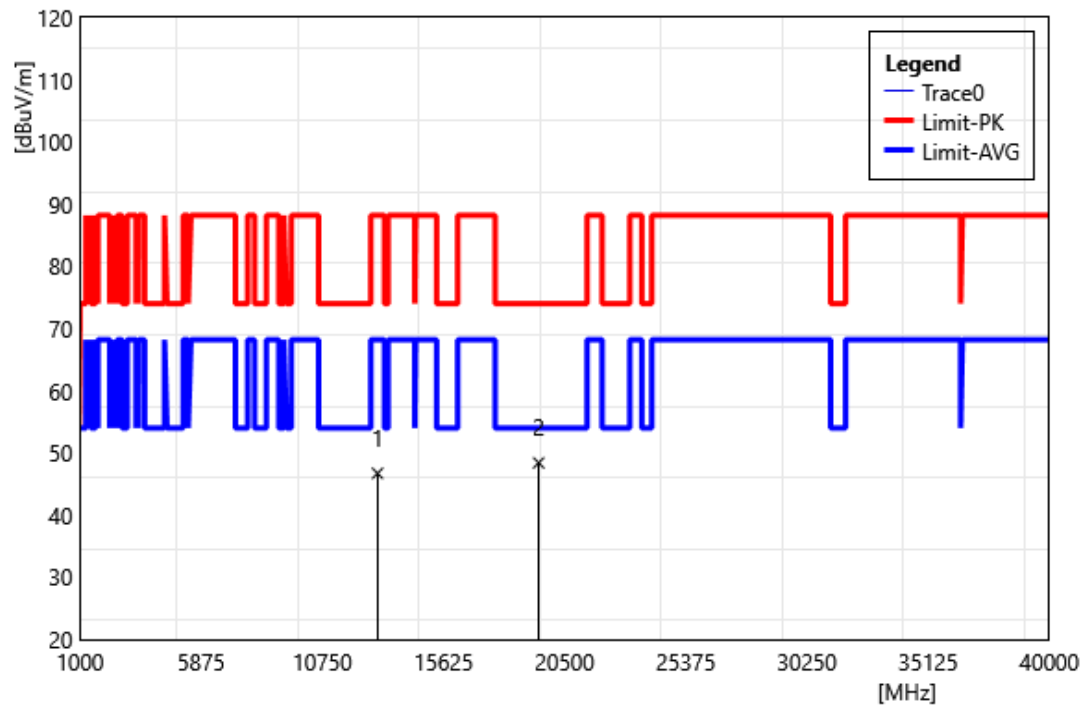


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	38.05	8.66	46.71	88.20	-41.49	PEAK
2	19455.00	39.73	8.67	48.40	74.00	-25.60	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6525 MHz		
Polarization:	Horizontal		
Remark:			

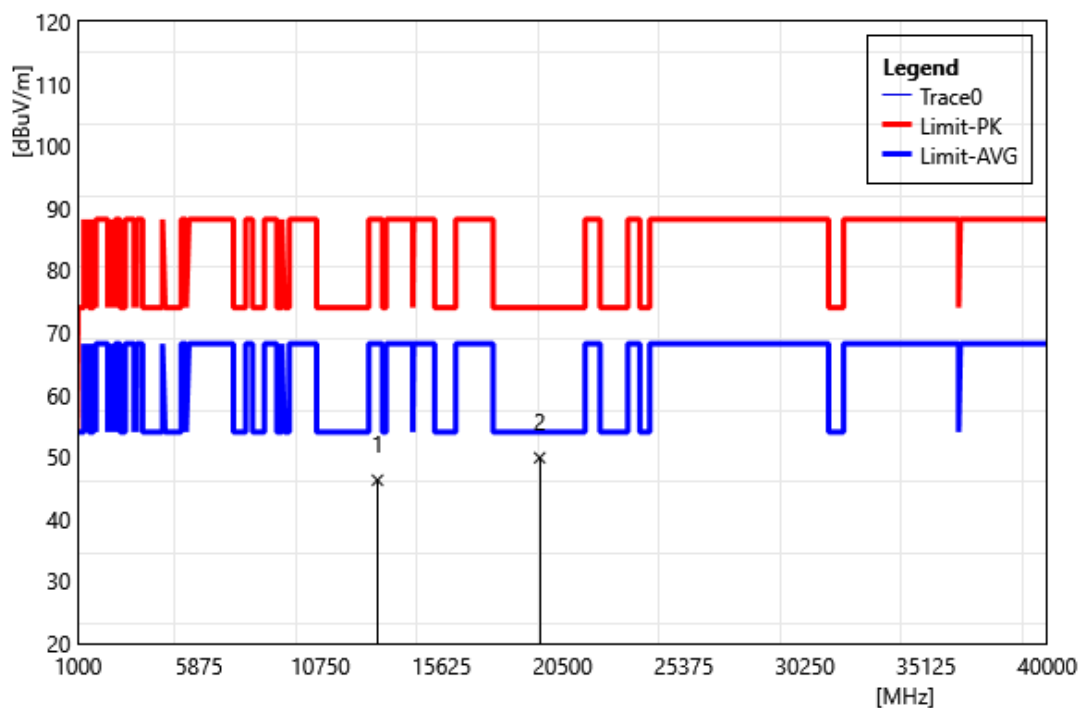


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	37.68	8.57	46.25	88.20	-41.95	PEAK
2	19575.00	41.13	8.73	49.86	74.00	-24.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6525 MHz		
Polarization:	Vertical		
Remark:			

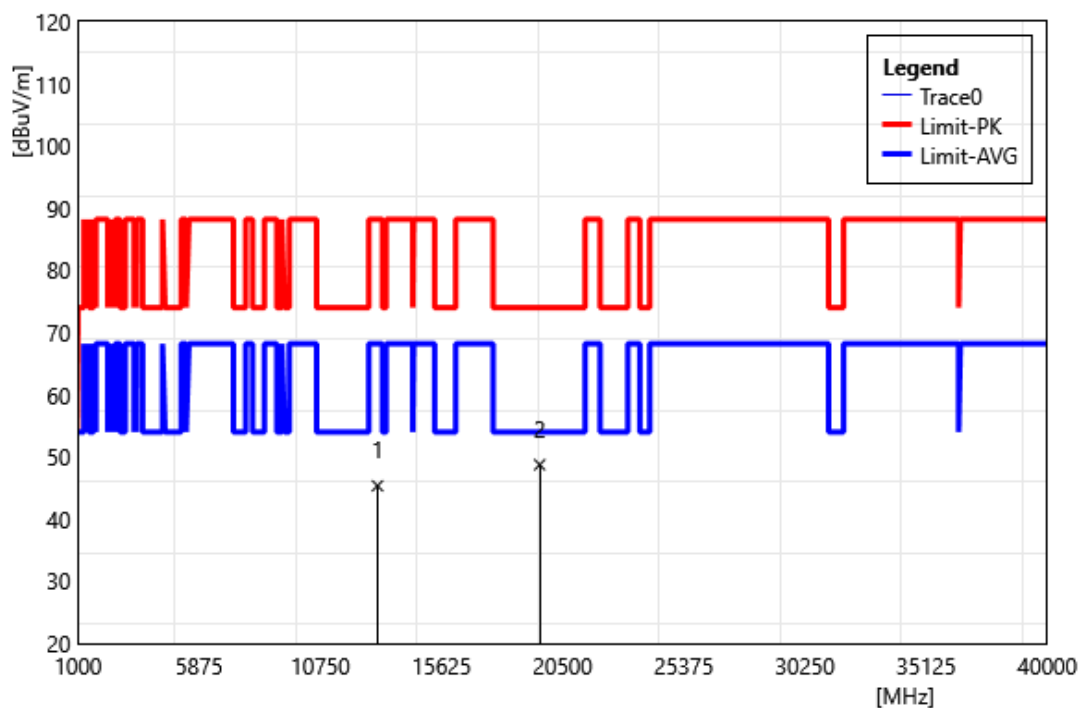


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	36.78	8.57	45.35	88.20	-42.85	PEAK
2	19575.00	40.01	8.73	48.74	74.00	-25.26	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6565 MHz		
Polarization:	Horizontal		
Remark:			

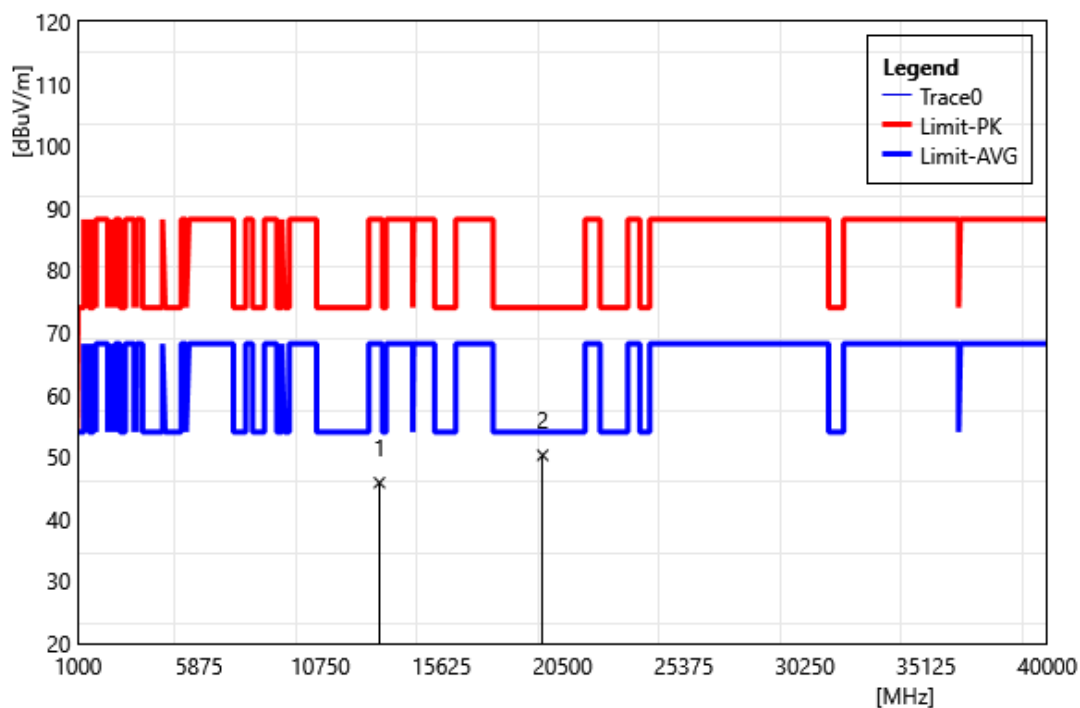


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	37.37	8.48	45.85	88.20	-42.35	PEAK
2	19695.00	41.47	8.79	50.26	74.00	-23.74	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6565 MHz		
Polarization:	Vertical		
Remark:			

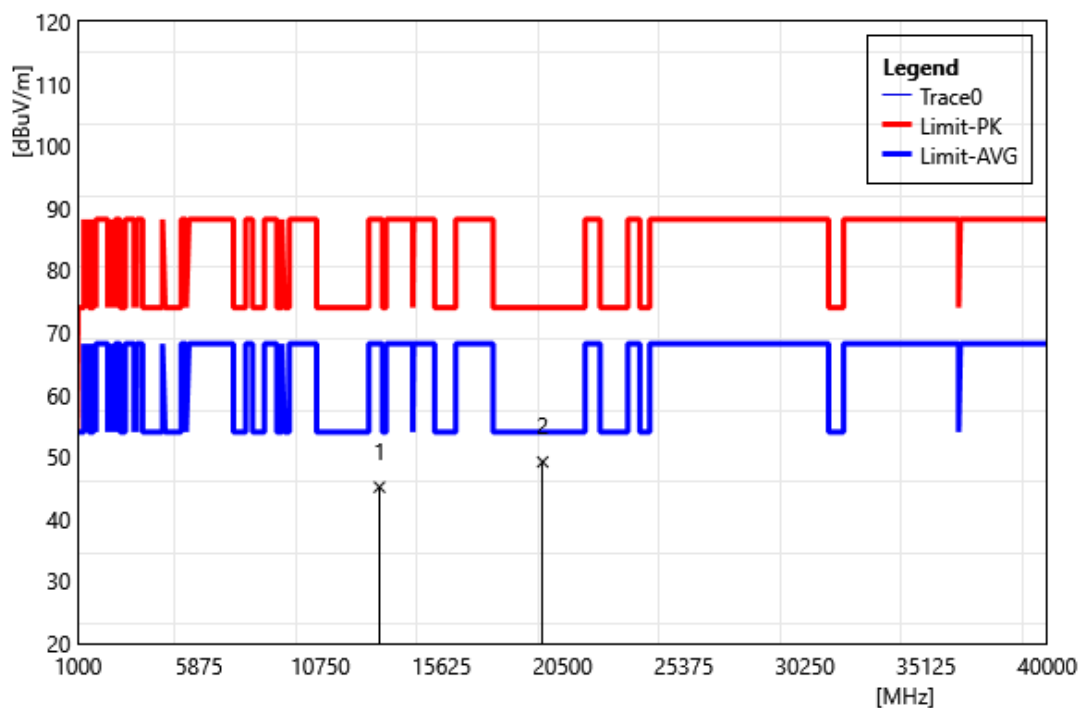


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	36.66	8.48	45.14	88.20	-43.06	PEAK
2	19695.00	40.39	8.79	49.18	74.00	-24.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6685 MHz		
Polarization:	Horizontal		
Remark:			

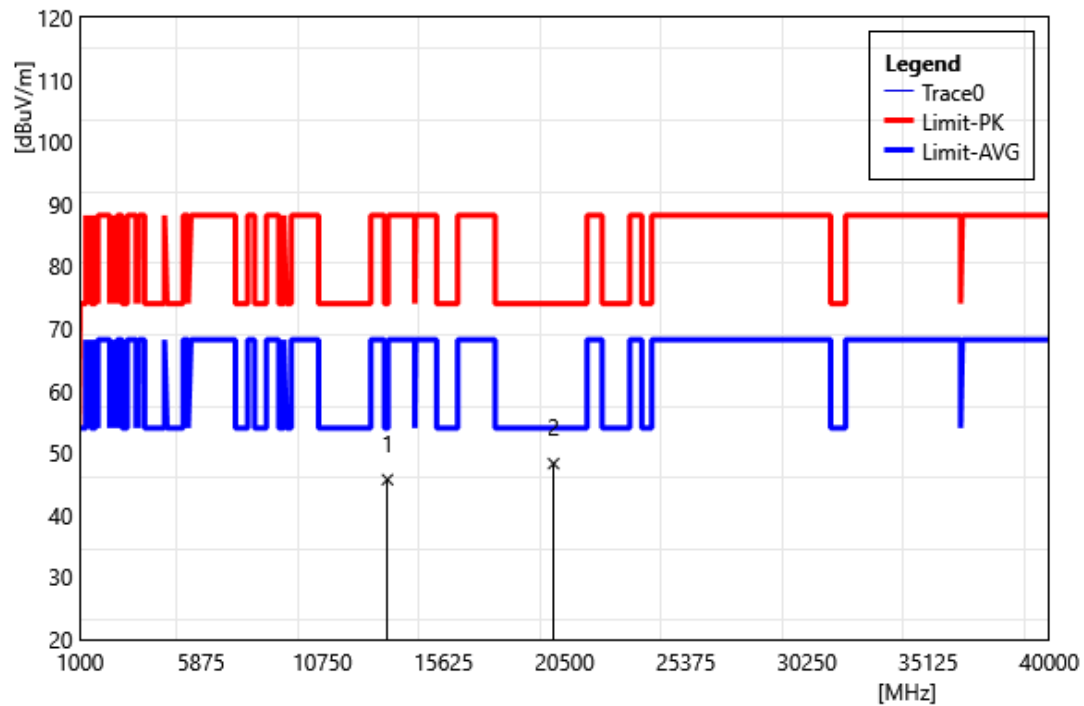


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	37.56	8.14	45.70	74.00	-28.30	PEAK
2	20055.00	39.33	8.94	48.27	74.00	-25.73	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6685 MHz		
Polarization:	Vertical		
Remark:			

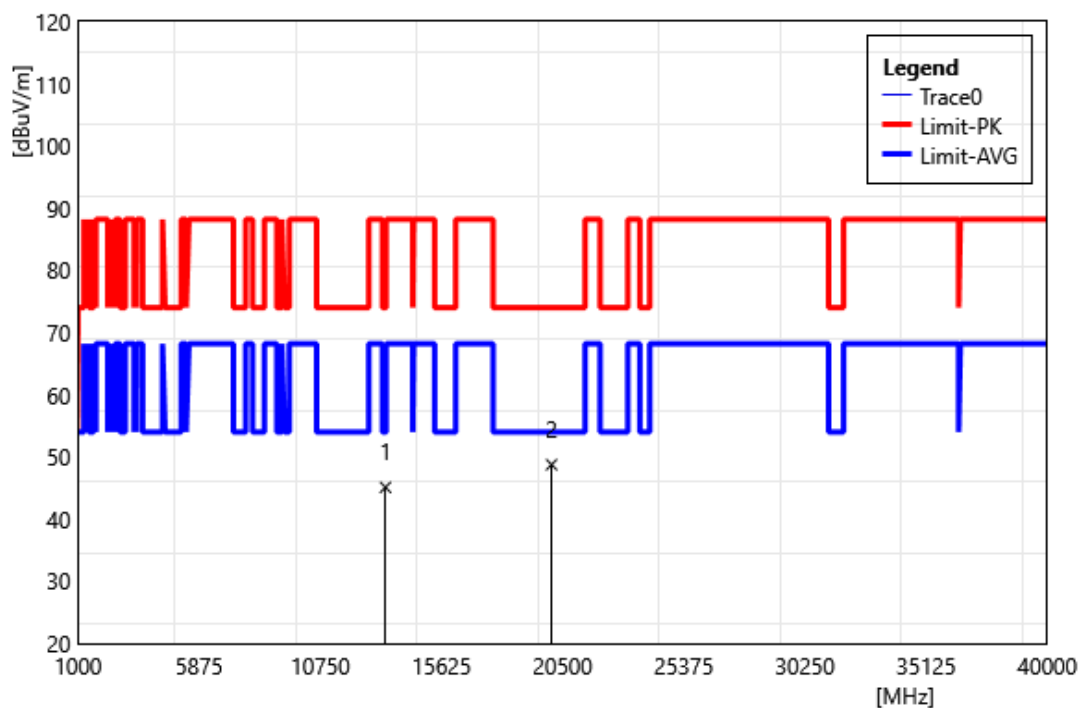


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	36.95	8.14	45.09	74.00	-28.91	PEAK
2	20055.00	39.81	8.94	48.75	74.00	-25.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6845 MHz		
Polarization:	Horizontal		
Remark:			

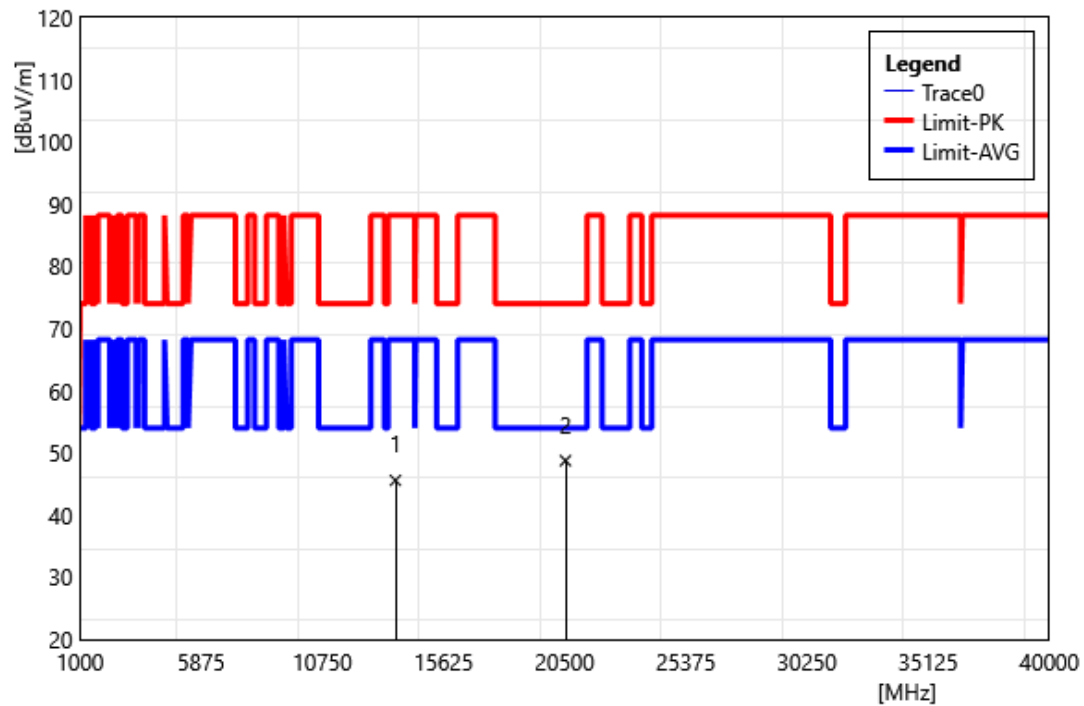


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	37.65	7.93	45.58	88.20	-42.62	PEAK
2	20535.00	39.59	9.16	48.75	74.00	-25.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6845 MHz		
Polarization:	Vertical		
Remark:			

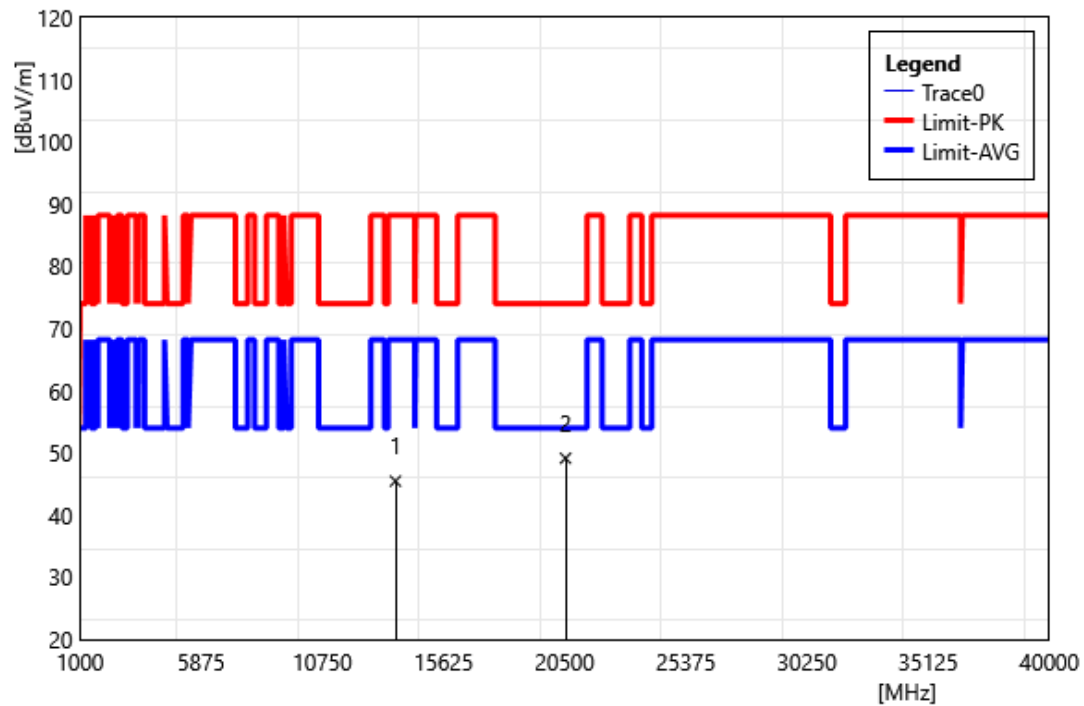


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	37.54	7.93	45.47	88.20	-42.73	PEAK
2	20535.00	39.97	9.16	49.13	74.00	-24.87	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6885 MHz		
Polarization:	Horizontal		
Remark:			

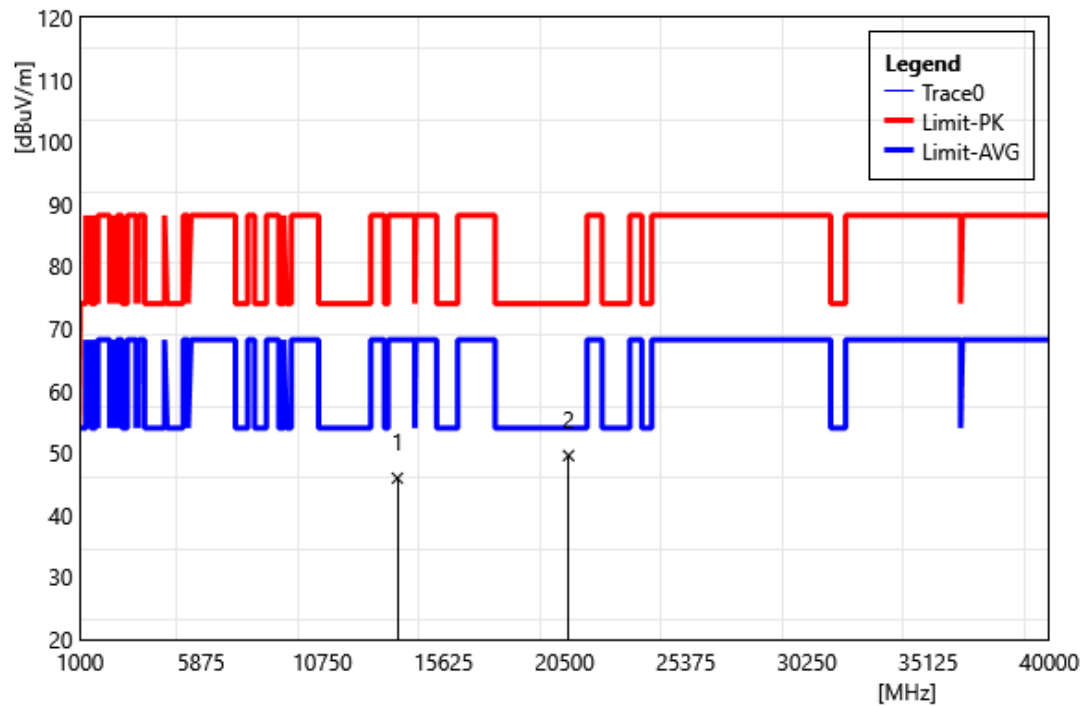


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	38.06	7.87	45.93	88.20	-42.27	PEAK
2	20655.00	40.35	9.21	49.56	74.00	-24.44	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6885 MHz		
Polarization:	Vertical		
Remark:			

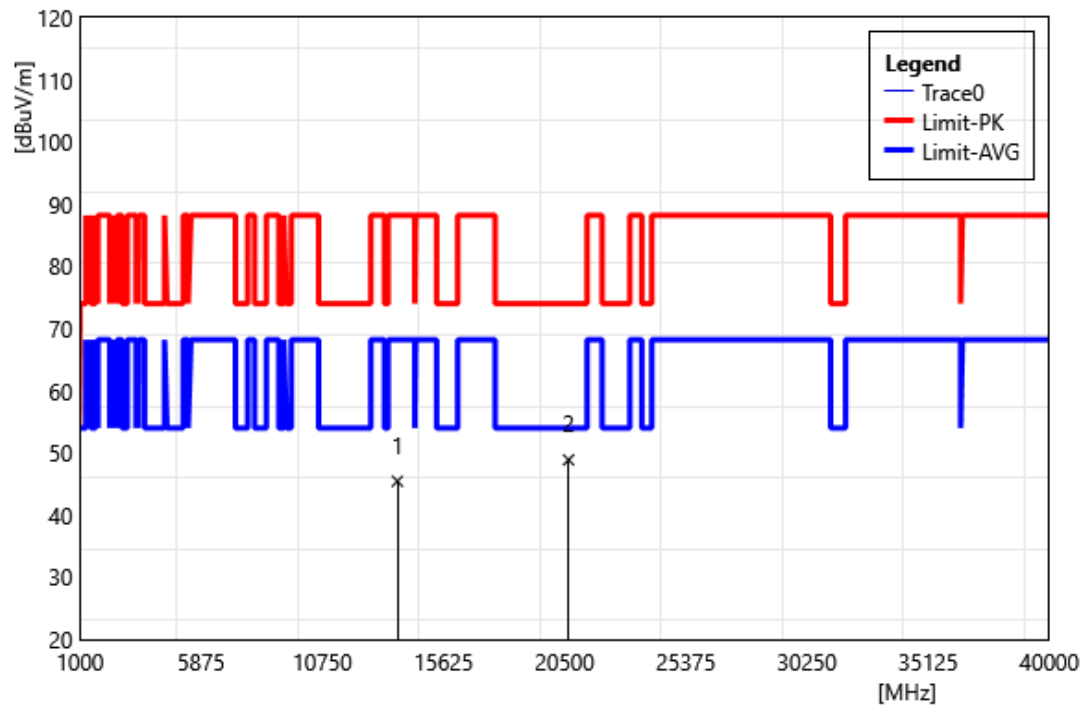


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	37.56	7.87	45.43	88.20	-42.77	PEAK
2	20655.00	39.66	9.21	48.87	74.00	-25.13	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6925 MHz		
Polarization:	Horizontal		
Remark:			

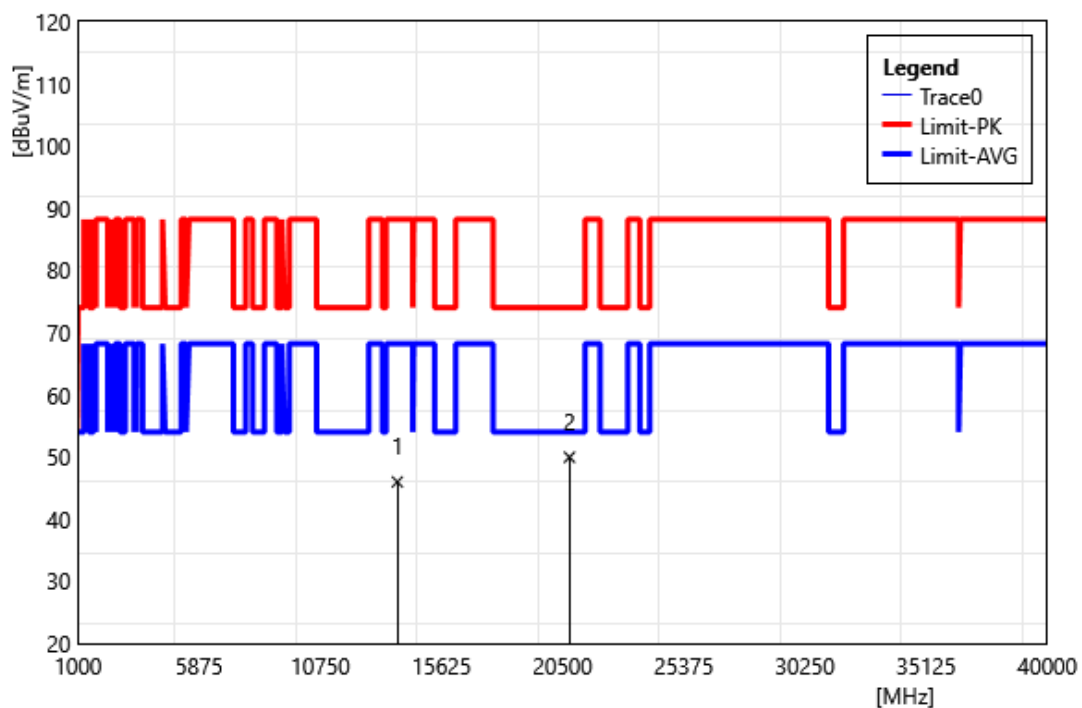


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	37.91	8.07	45.98	88.20	-42.22	PEAK
2	20775.00	40.68	9.27	49.95	74.00	-24.05	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 6925 MHz		
Polarization:	Vertical		
Remark:			

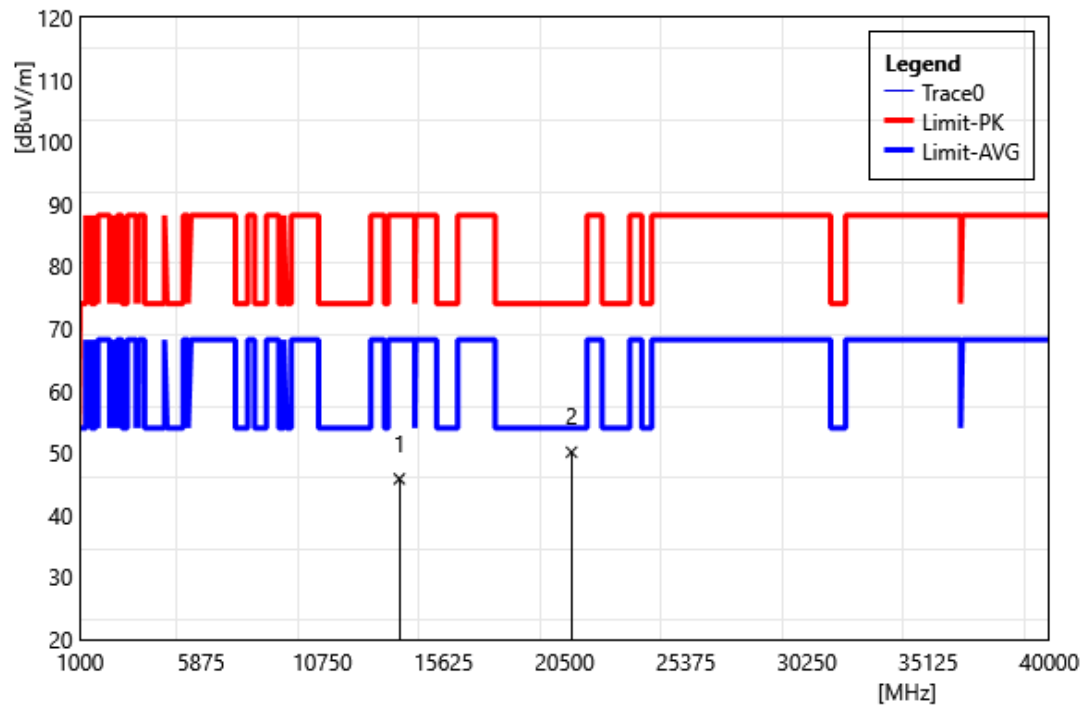


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	37.75	8.07	45.82	88.20	-42.38	PEAK
2	20775.00	40.84	9.27	50.11	74.00	-23.89	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 7005 MHz		
Polarization:	Horizontal		
Remark:			

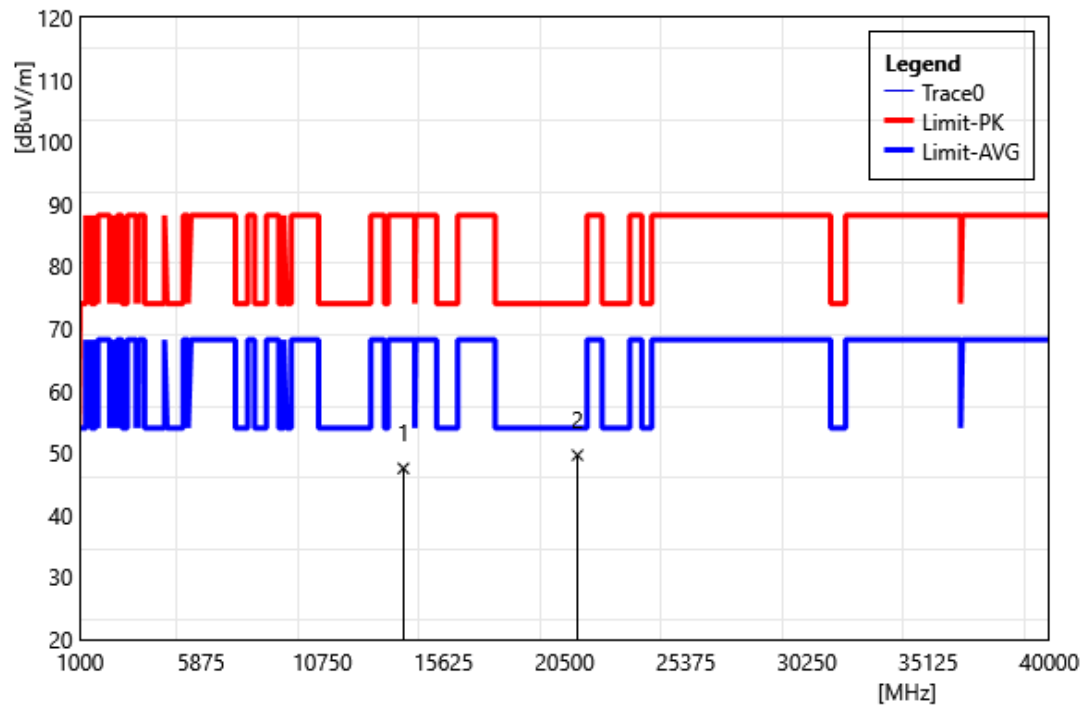


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	39.21	8.30	47.51	88.20	-40.69	PEAK
2	21015.00	40.27	9.37	49.64	74.00	-24.36	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 7005 MHz		
Polarization:	Vertical		
Remark:			

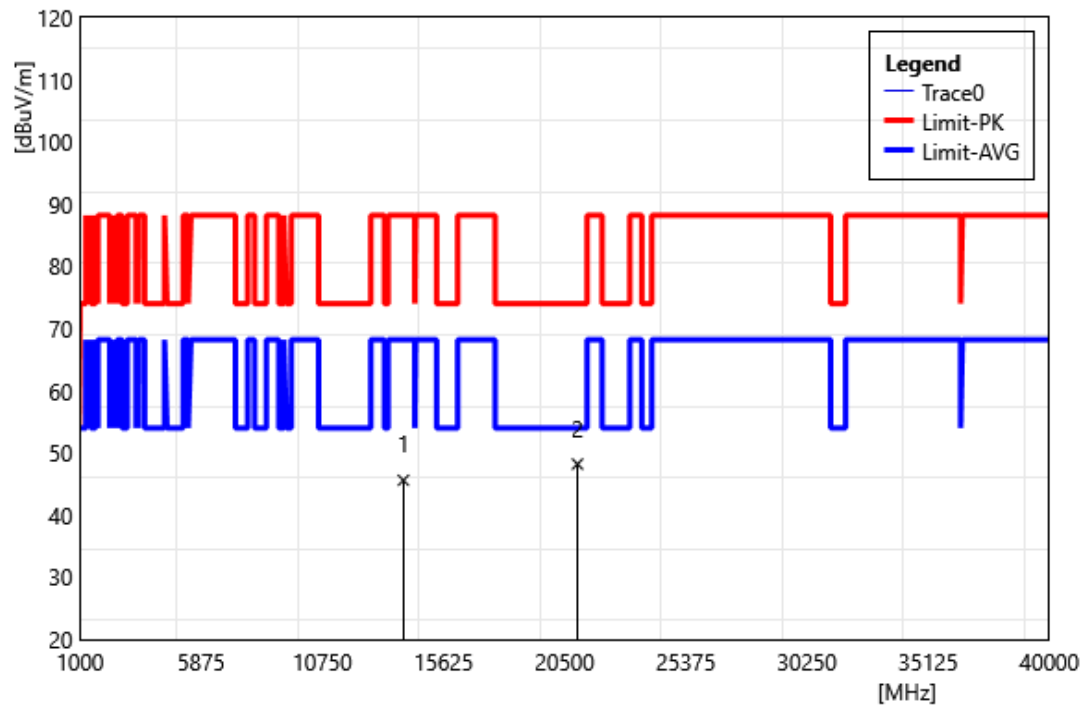


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	37.30	8.30	45.60	88.20	-42.60	PEAK
2	21015.00	38.82	9.37	48.19	74.00	-25.81	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 7085 MHz		
Polarization:	Horizontal		
Remark:			

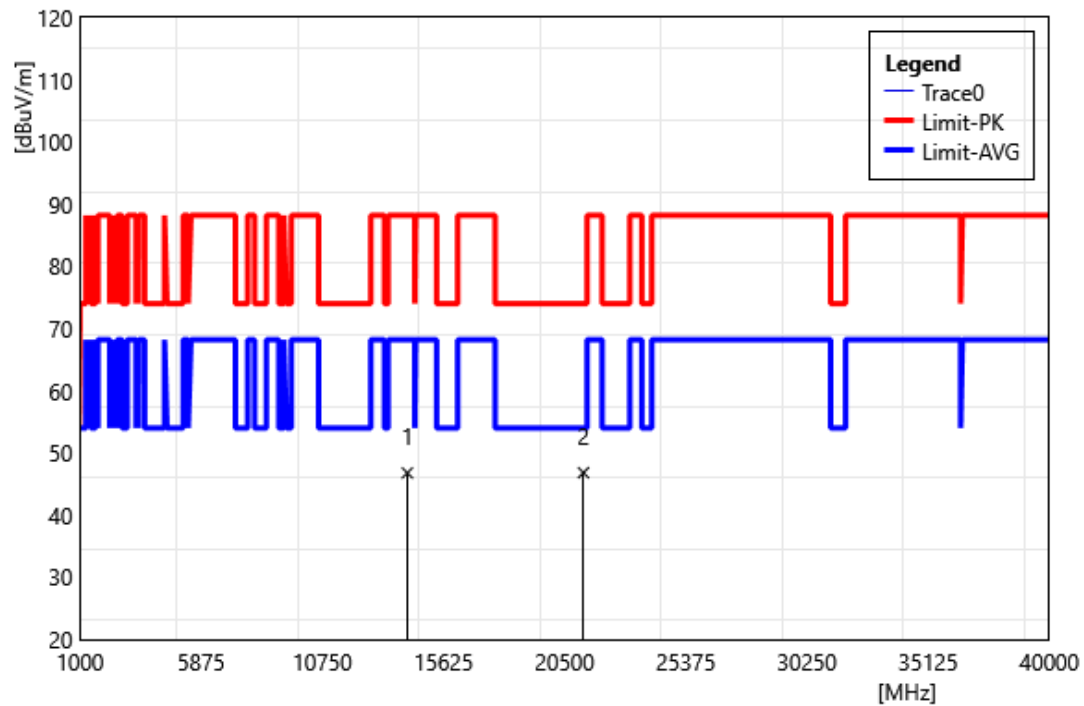


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	38.08	8.69	46.77	88.20	-41.43	PEAK
2	21255.00	37.34	9.48	46.82	74.00	-27.18	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 7085 MHz		
Polarization:	Vertical		
Remark:			

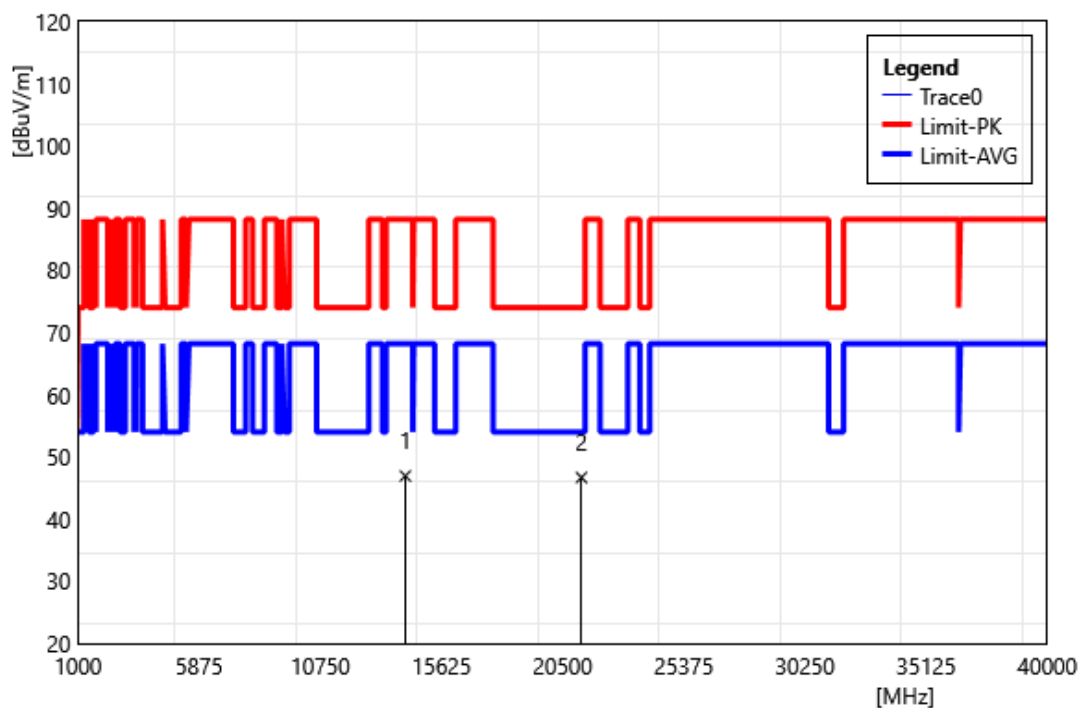


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	38.24	8.69	46.93	88.20	-41.27	PEAK
2	21255.00	37.20	9.48	46.68	74.00	-27.32	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5985 MHz		
Polarization:	Horizontal		
Remark:			

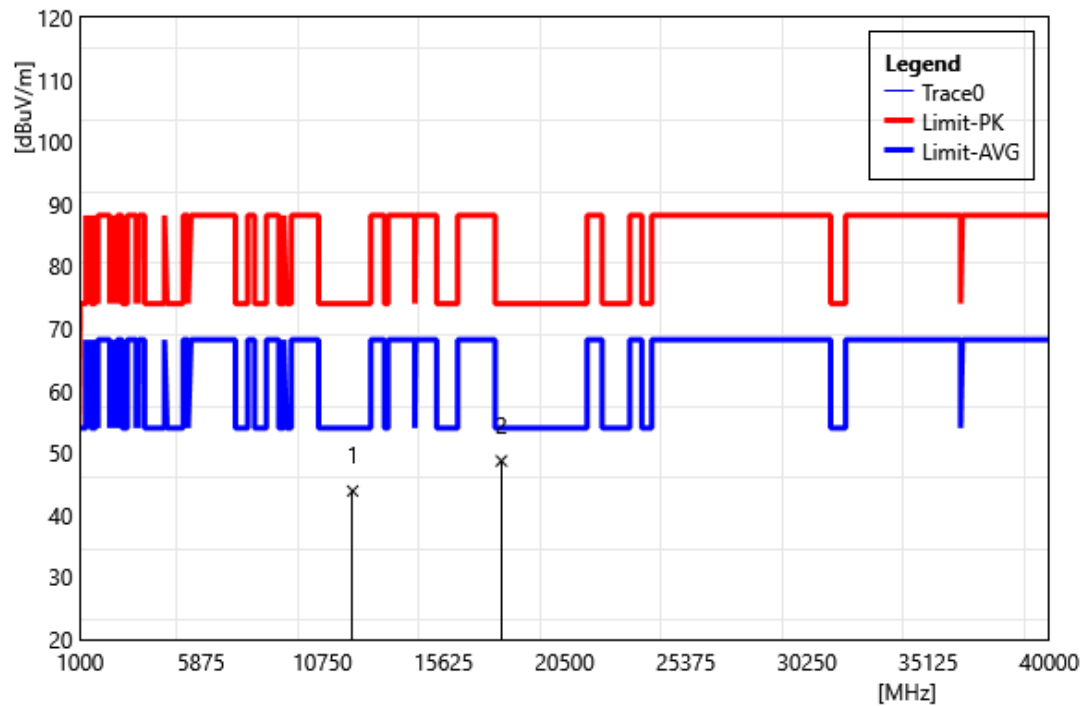


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	36.24	7.63	43.87	74.00	-30.13	PEAK
2	17955.00	40.94	7.77	48.71	74.00	-25.29	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5985 MHz		
Polarization:	Vertical		
Remark:			

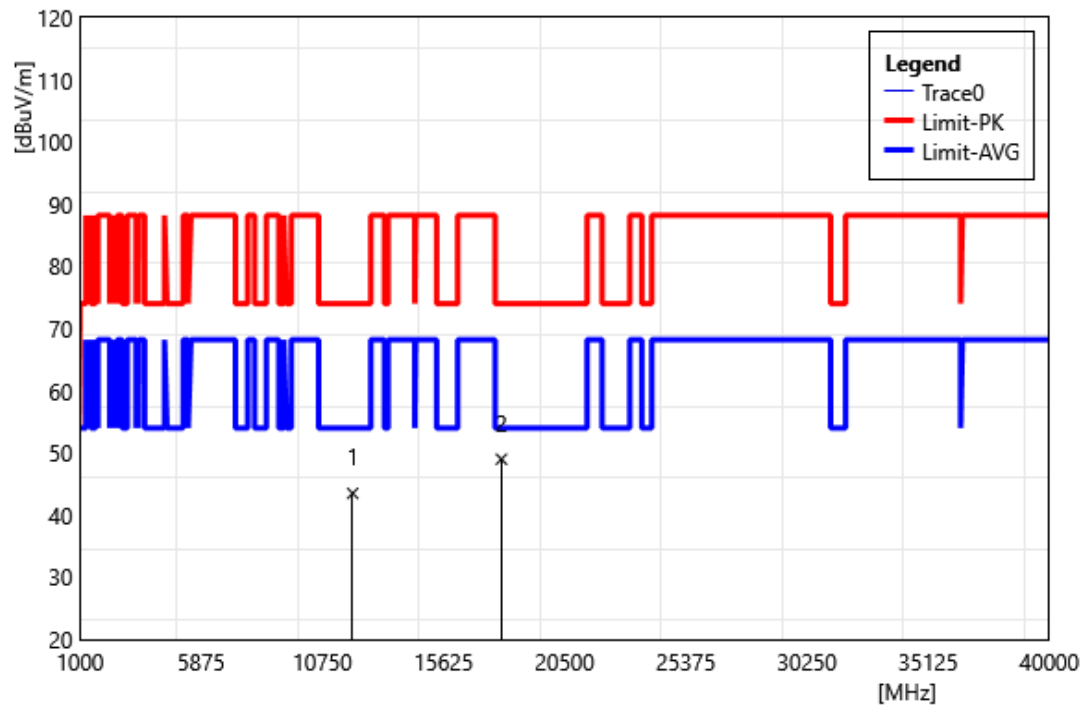


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	35.86	7.63	43.49	74.00	-30.51	PEAK
2	17955.00	41.22	7.77	48.99	74.00	-25.01	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6145 MHz		
Polarization:	Horizontal		
Remark:			

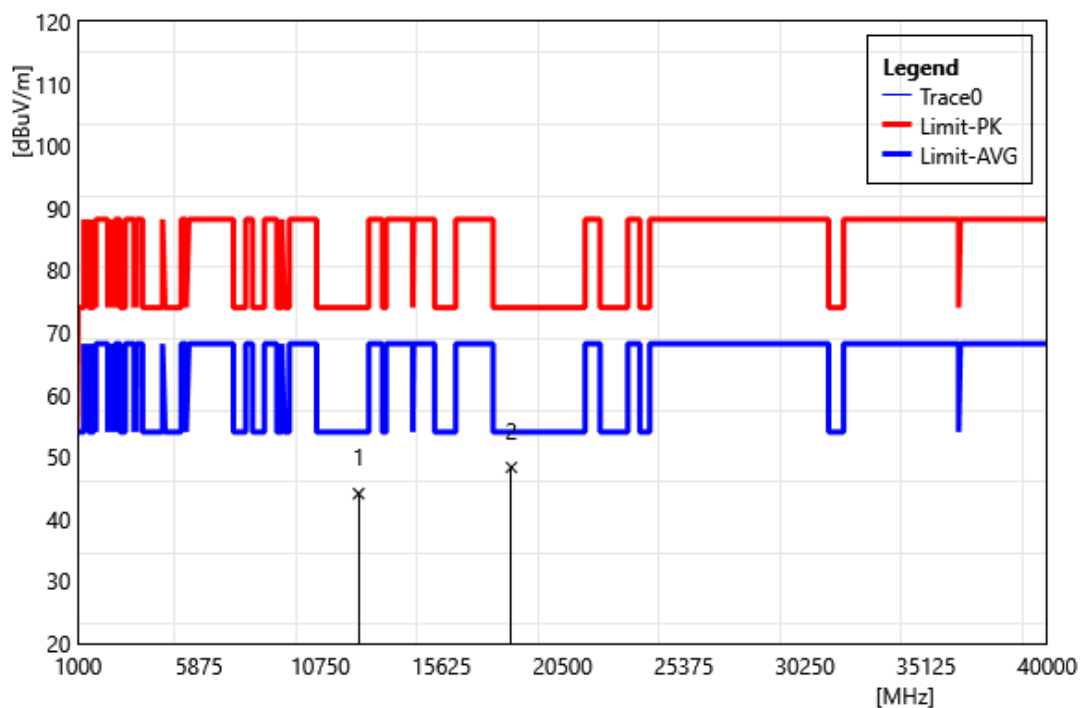


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	36.36	7.73	44.09	74.00	-29.91	PEAK
2	18435.00	40.08	8.22	48.30	74.00	-25.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6145 MHz		
Polarization:	Vertical		
Remark:			

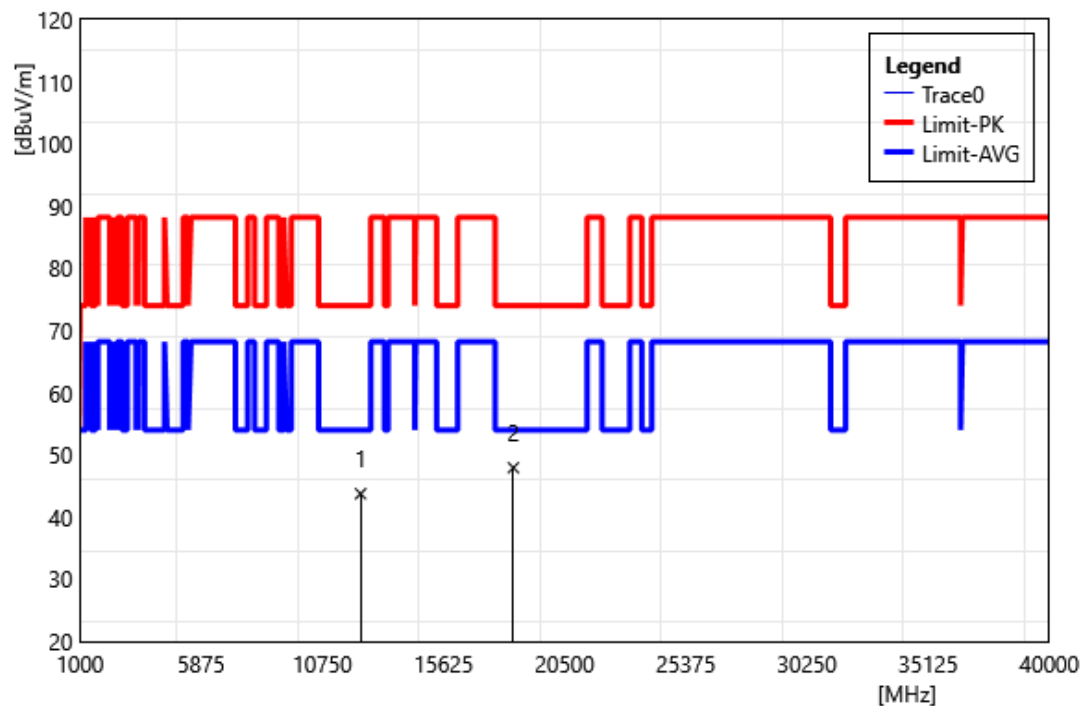


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	36.02	7.73	43.75	74.00	-30.25	PEAK
2	18435.00	39.71	8.22	47.93	74.00	-26.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6385 MHz		
Polarization:	Horizontal		
Remark:			

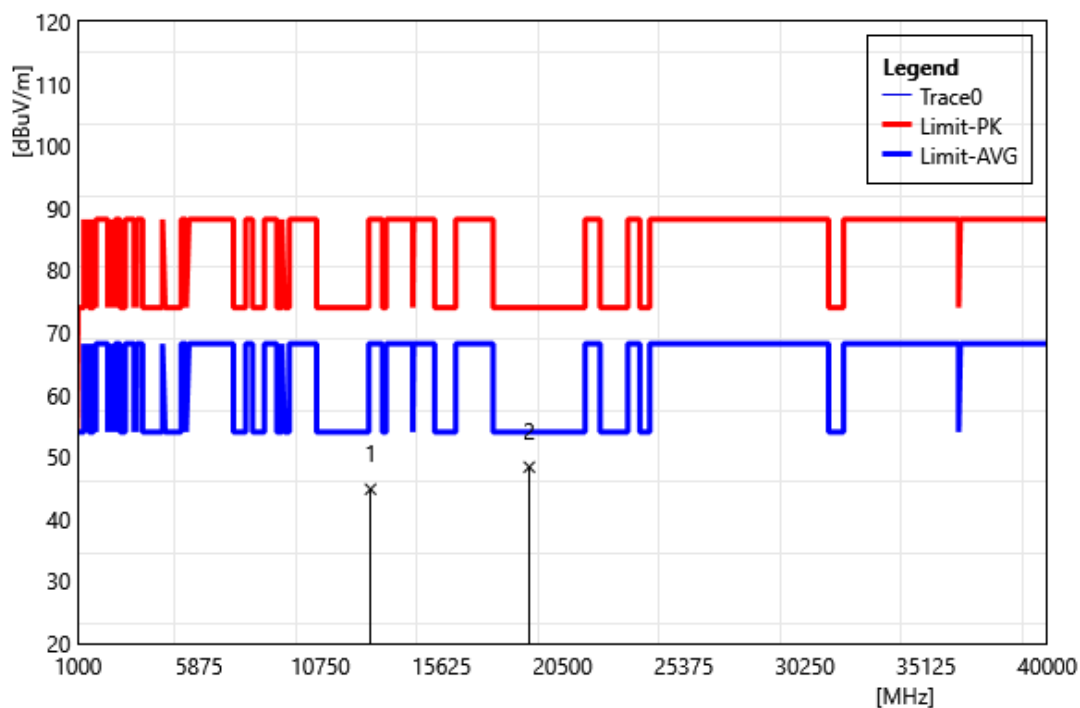


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	36.27	8.53	44.80	88.20	-43.40	PEAK
2	19155.00	39.80	8.55	48.35	74.00	-25.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6385 MHz		
Polarization:	Vertical		
Remark:			

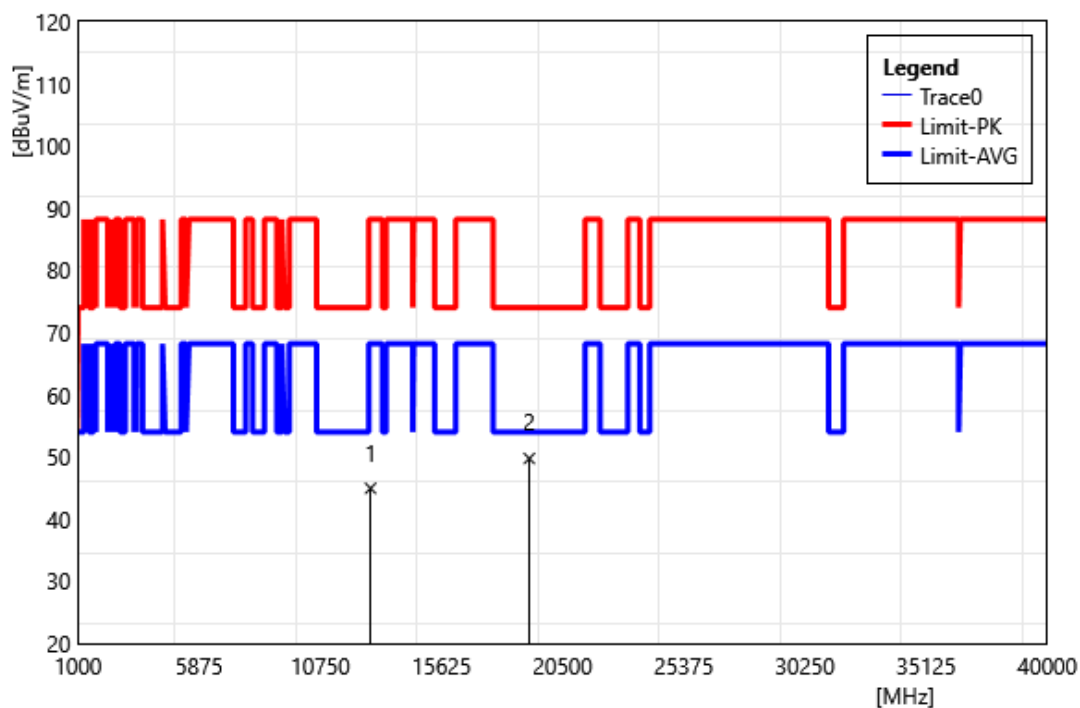


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	36.43	8.53	44.96	88.20	-43.24	PEAK
2	19155.00	41.20	8.55	49.75	74.00	-24.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6465 MHz		
Polarization:	Horizontal		
Remark:			

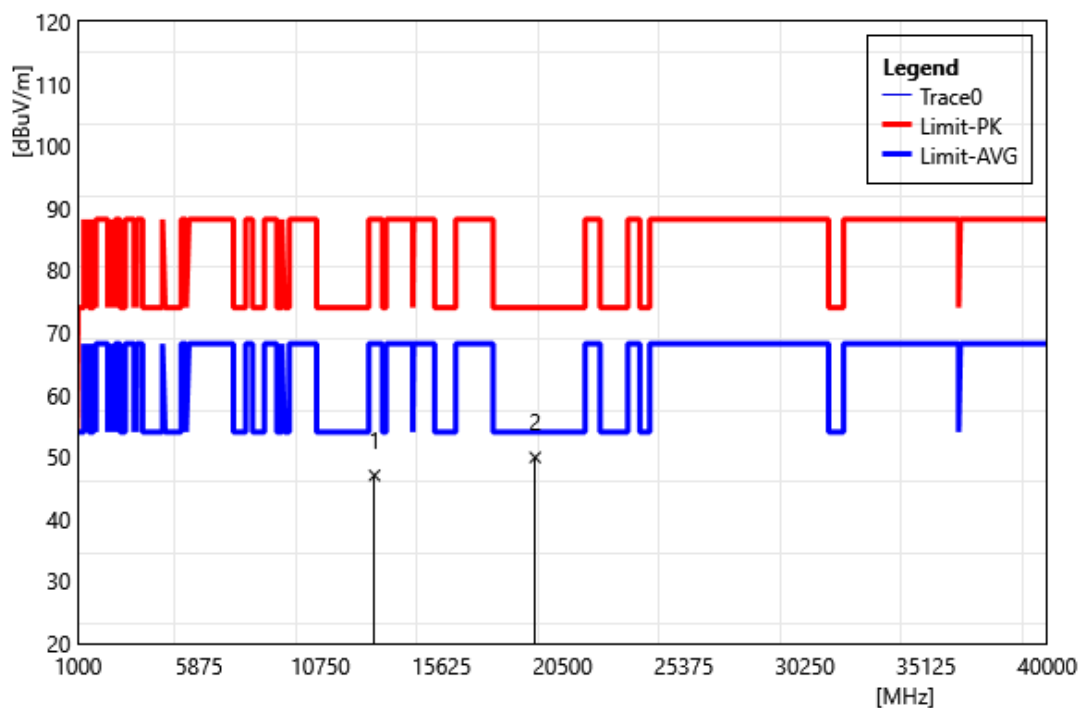


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	38.42	8.60	47.02	88.20	-41.18	PEAK
2	19395.00	41.26	8.66	49.92	74.00	-24.08	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6465 MHz		
Polarization:	Vertical		
Remark:			

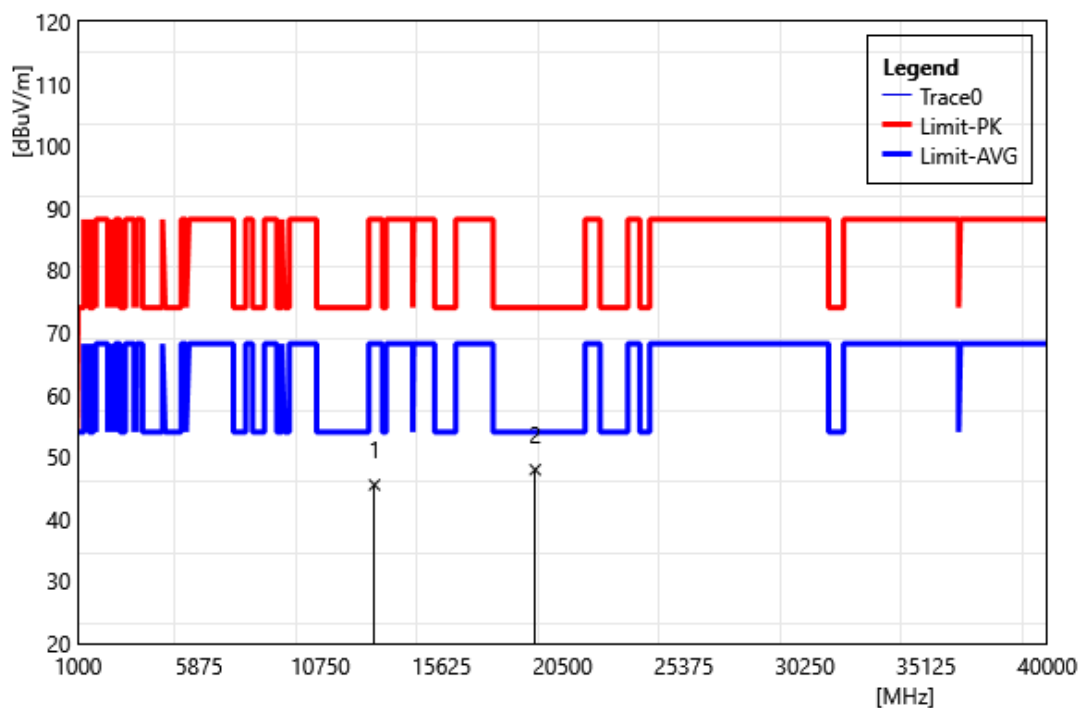


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	36.89	8.60	45.49	88.20	-42.71	PEAK
2	19395.00	39.27	8.66	47.93	74.00	-26.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6545 MHz		
Polarization:	Horizontal		
Remark:			

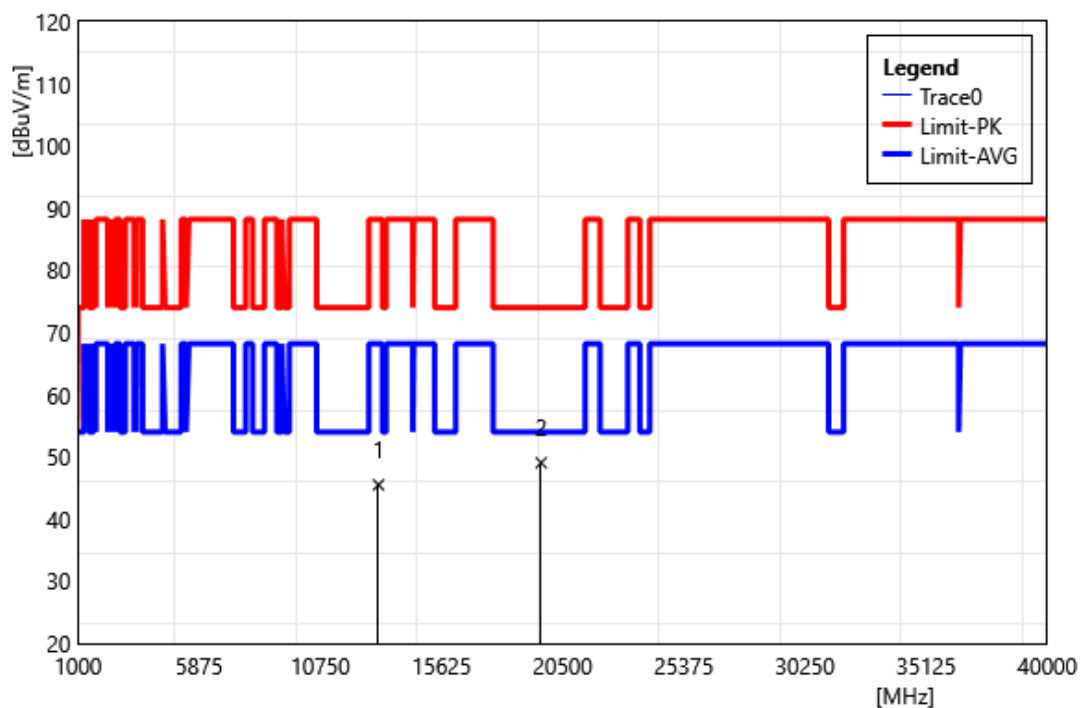


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	37.03	8.47	45.50	88.20	-42.70	PEAK
2	19635.00	40.29	8.76	49.05	74.00	-24.95	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6545 MHz		
Polarization:	Vertical		
Remark:			

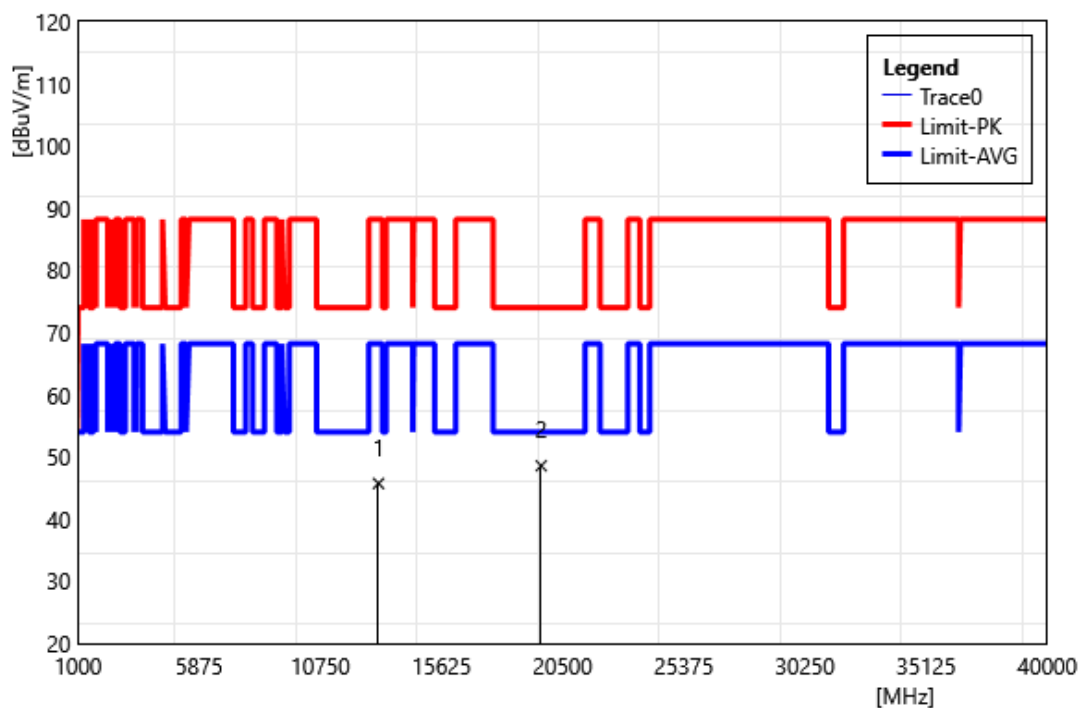


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	37.25	8.47	45.72	88.20	-42.48	PEAK
2	19635.00	39.81	8.76	48.57	74.00	-25.43	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6625 MHz		
Polarization:	Horizontal		
Remark:			

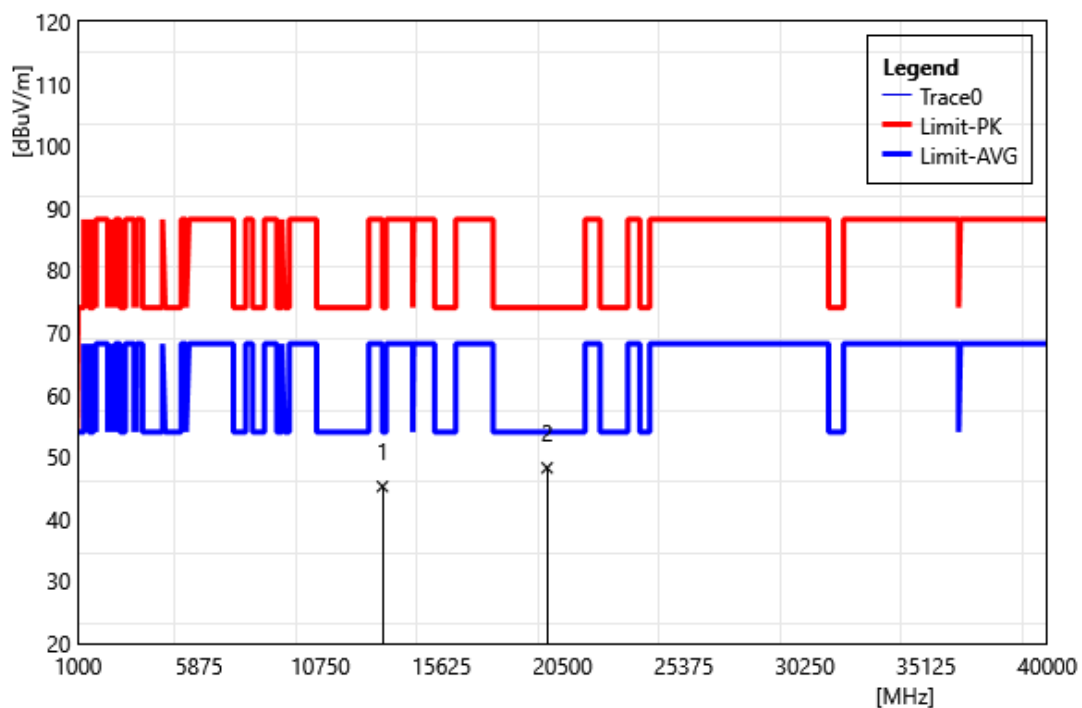


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	36.81	8.43	45.24	74.00	-28.76	PEAK
2	19875.00	39.37	8.86	48.23	74.00	-25.77	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6625 MHz		
Polarization:	Vertical		
Remark:			

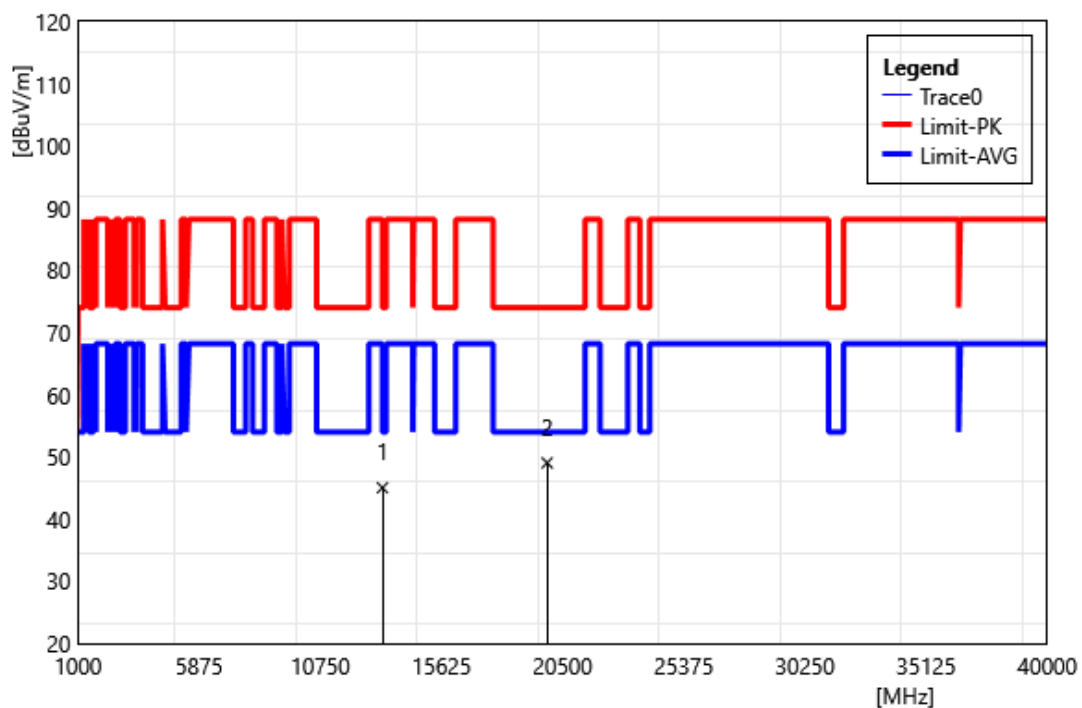


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	36.62	8.43	45.05	74.00	-28.95	PEAK
2	19875.00	40.18	8.86	49.04	74.00	-24.96	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6705 MHz		
Polarization:	Horizontal		
Remark:			

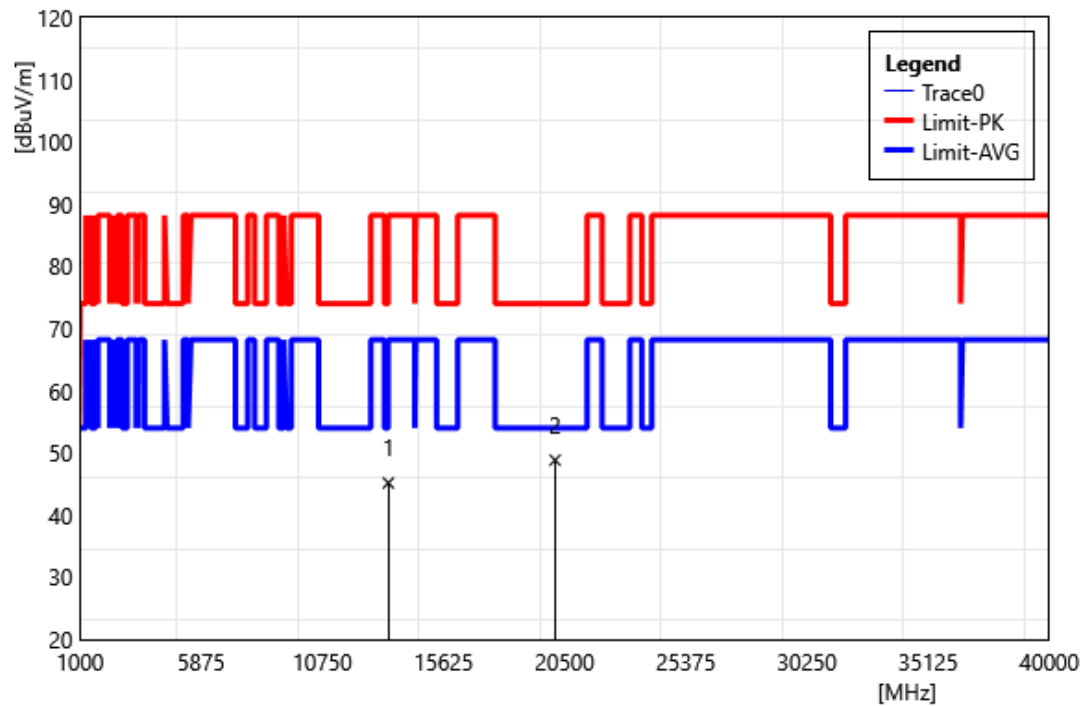


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	37.10	8.06	45.16	88.20	-43.04	PEAK
2	20115.00	39.85	8.98	48.83	74.00	-25.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6705 MHz		
Polarization:	Vertical		
Remark:			

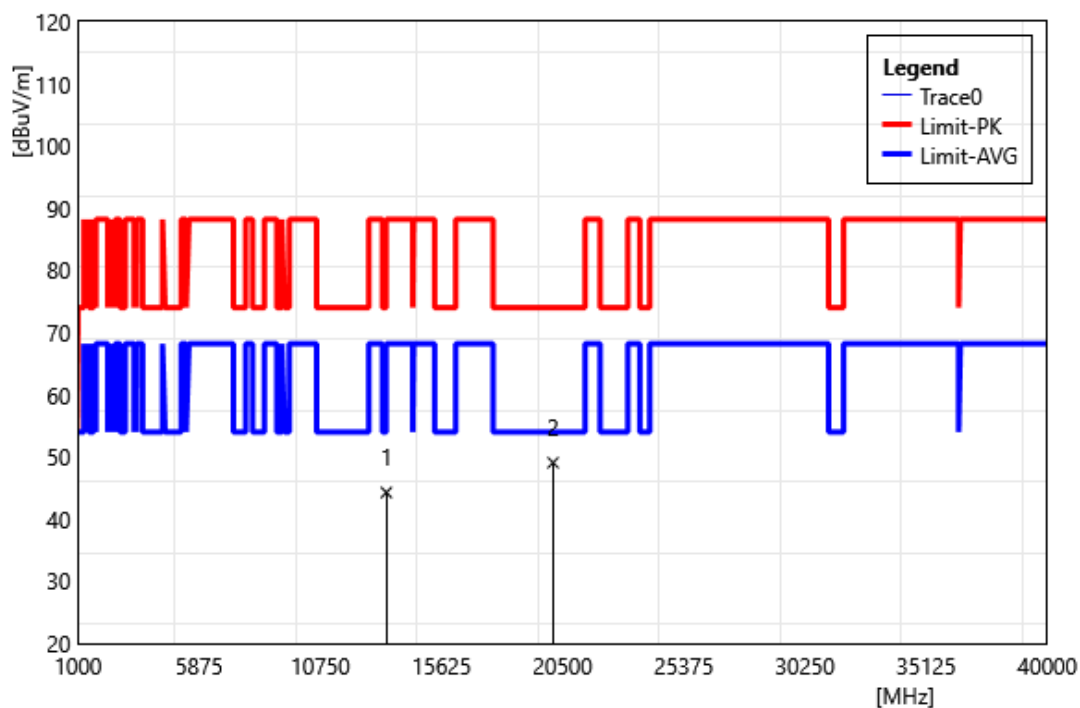


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	36.21	8.06	44.27	88.20	-43.93	PEAK
2	20115.00	40.08	8.98	49.06	74.00	-24.94	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6785 MHz		
Polarization:	Horizontal		
Remark:			

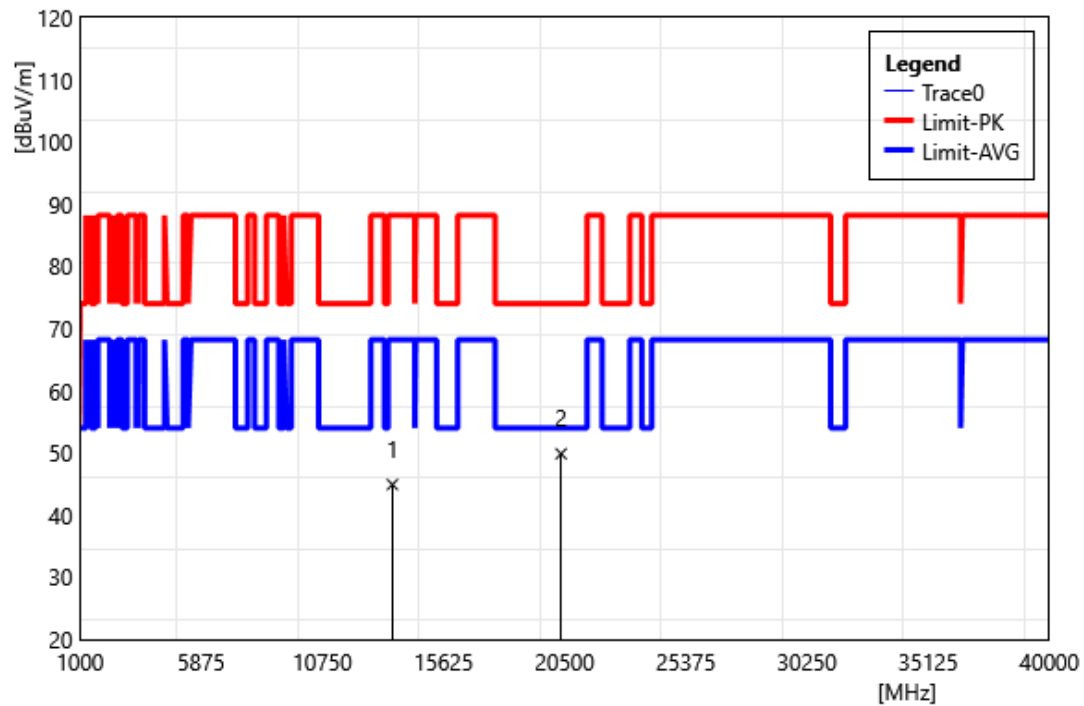


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	37.09	7.83	44.92	88.20	-43.28	PEAK
2	20355.00	40.78	9.08	49.86	74.00	-24.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6785 MHz		
Polarization:	Vertical		
Remark:			

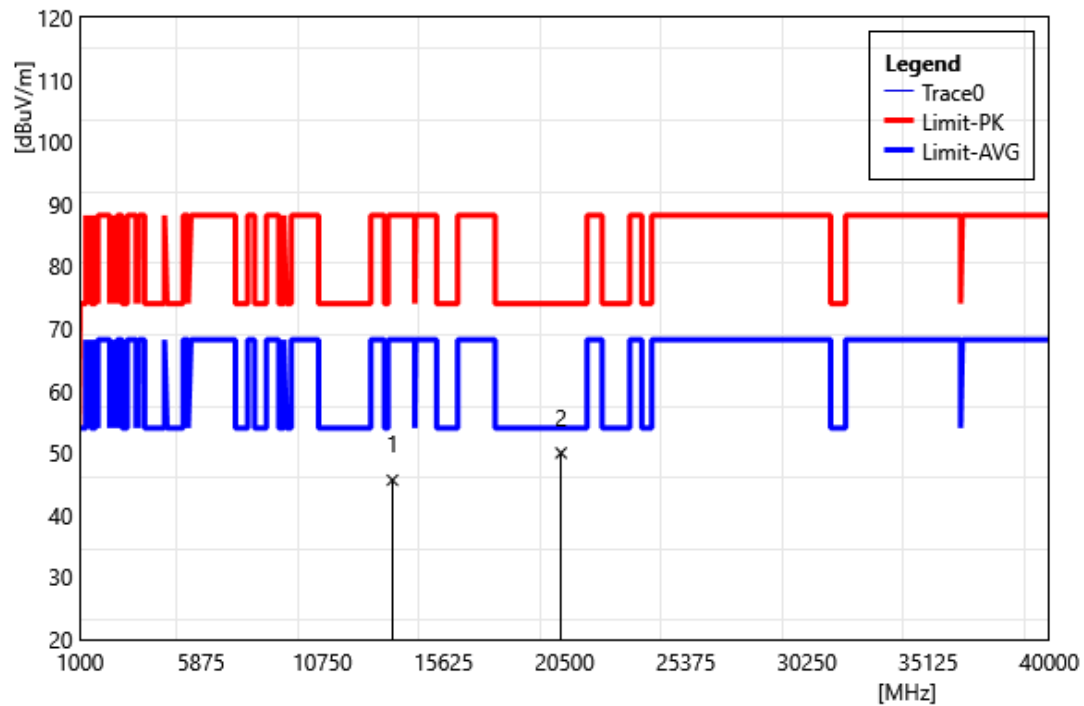


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	37.78	7.83	45.61	88.20	-42.59	PEAK
2	20355.00	40.90	9.08	49.98	74.00	-24.02	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6865 MHz		
Polarization:	Horizontal		
Remark:			

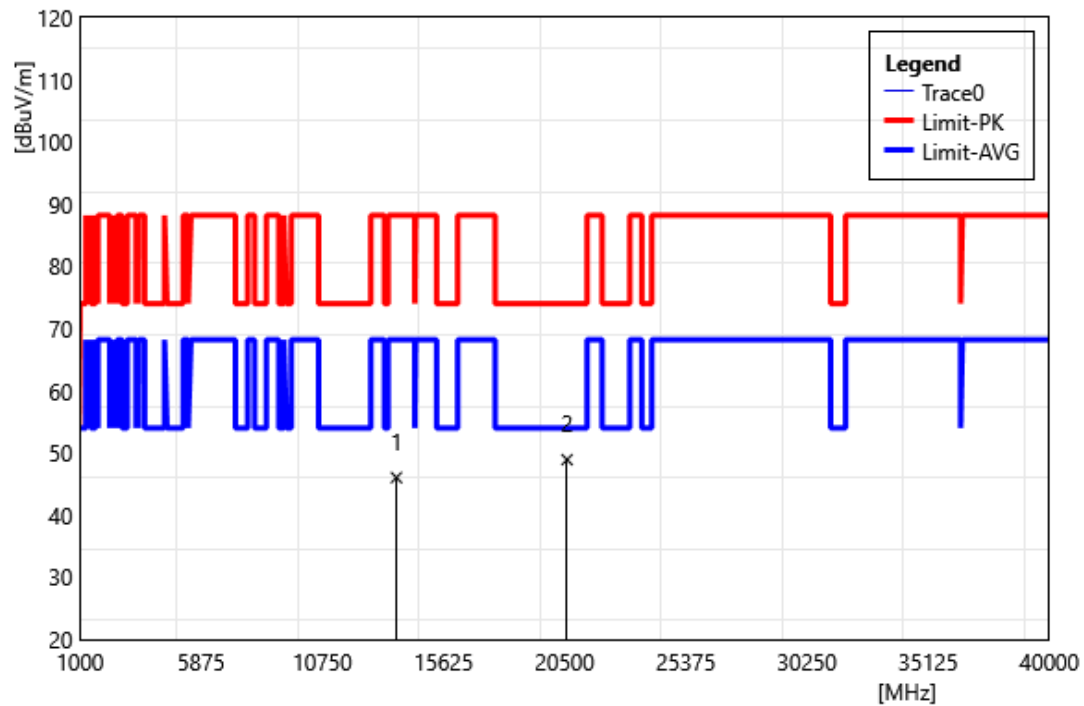


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	38.11	7.92	46.03	88.20	-42.17	PEAK
2	20595.00	39.73	9.19	48.92	74.00	-25.08	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6865 MHz		
Polarization:	Vertical		
Remark:			

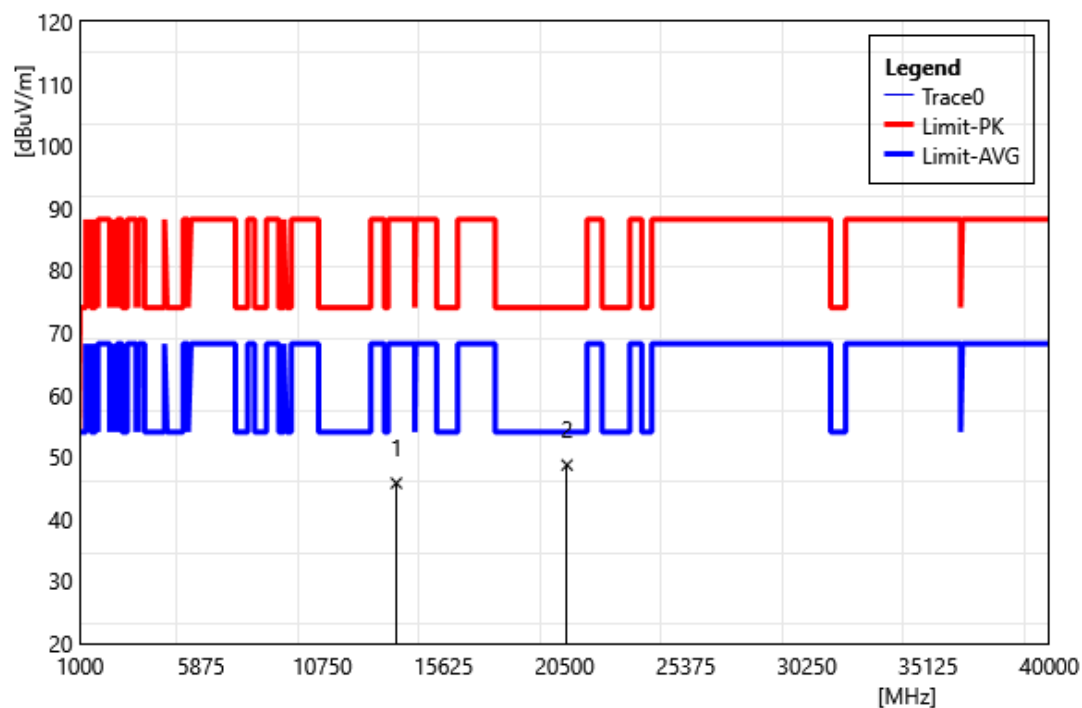


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	37.86	7.92	45.78	88.20	-42.42	PEAK
2	20595.00	39.50	9.19	48.69	74.00	-25.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6945 MHz		
Polarization:	Horizontal		
Remark:			

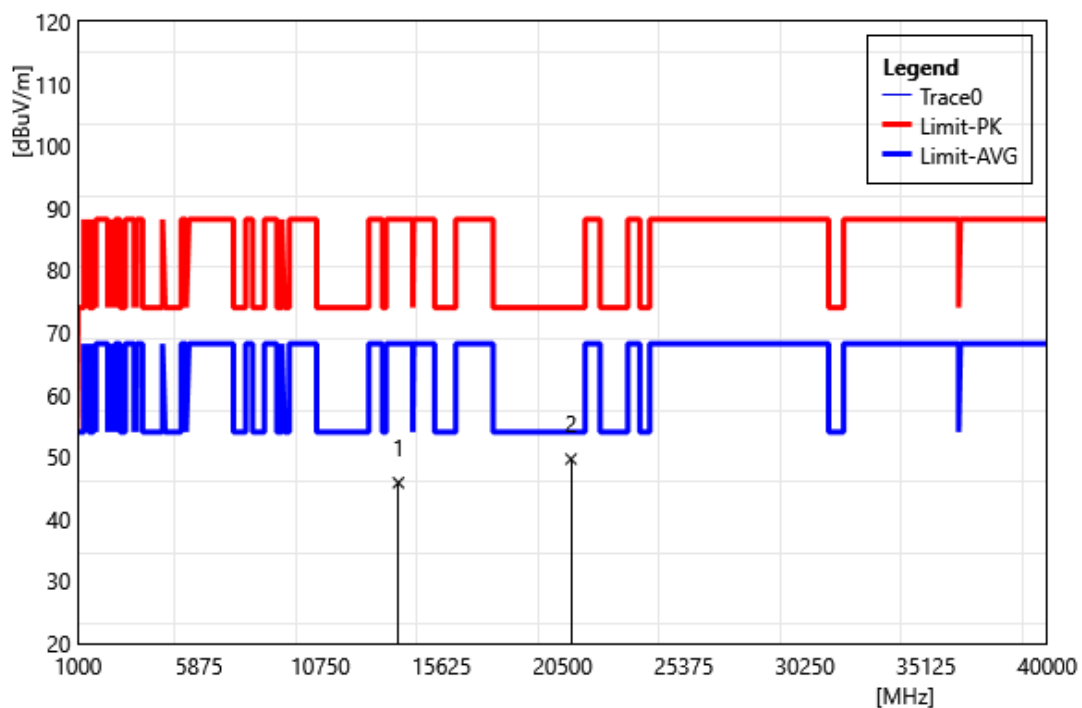


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	37.58	8.25	45.83	88.20	-42.37	PEAK
2	20835.00	40.37	9.29	49.66	74.00	-24.34	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 6945 MHz		
Polarization:	Vertical		
Remark:			

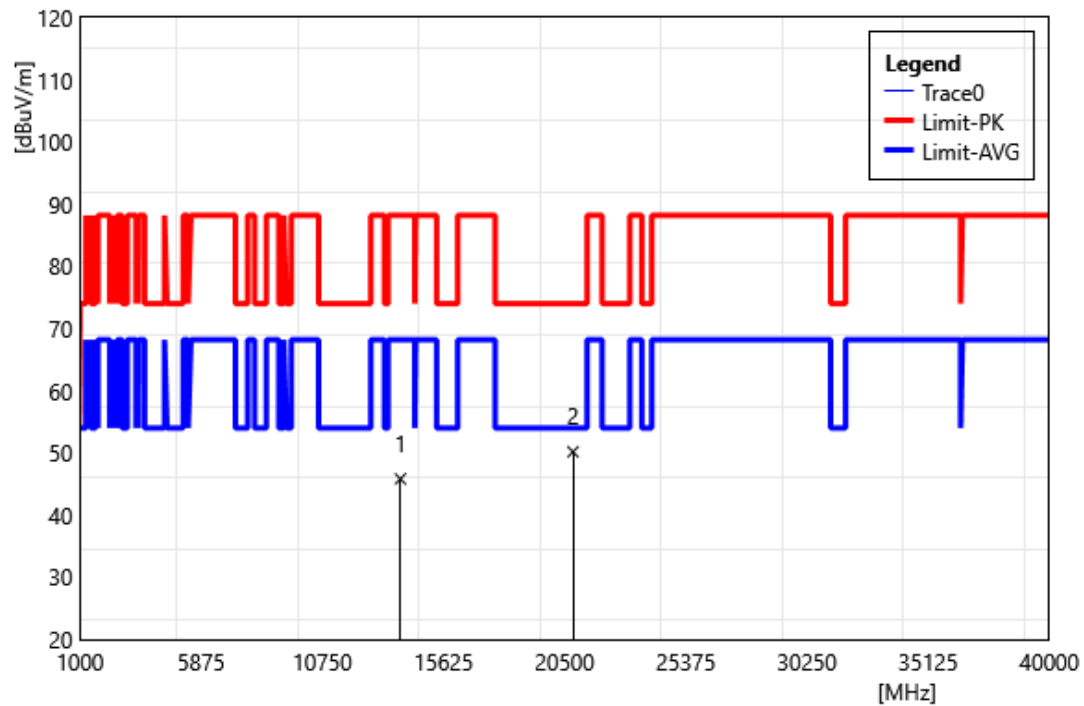


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	37.57	8.25	45.82	88.20	-42.38	PEAK
2	20835.00	40.89	9.29	50.18	74.00	-23.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 7025 MHz		
Polarization:	Horizontal		
Remark:			

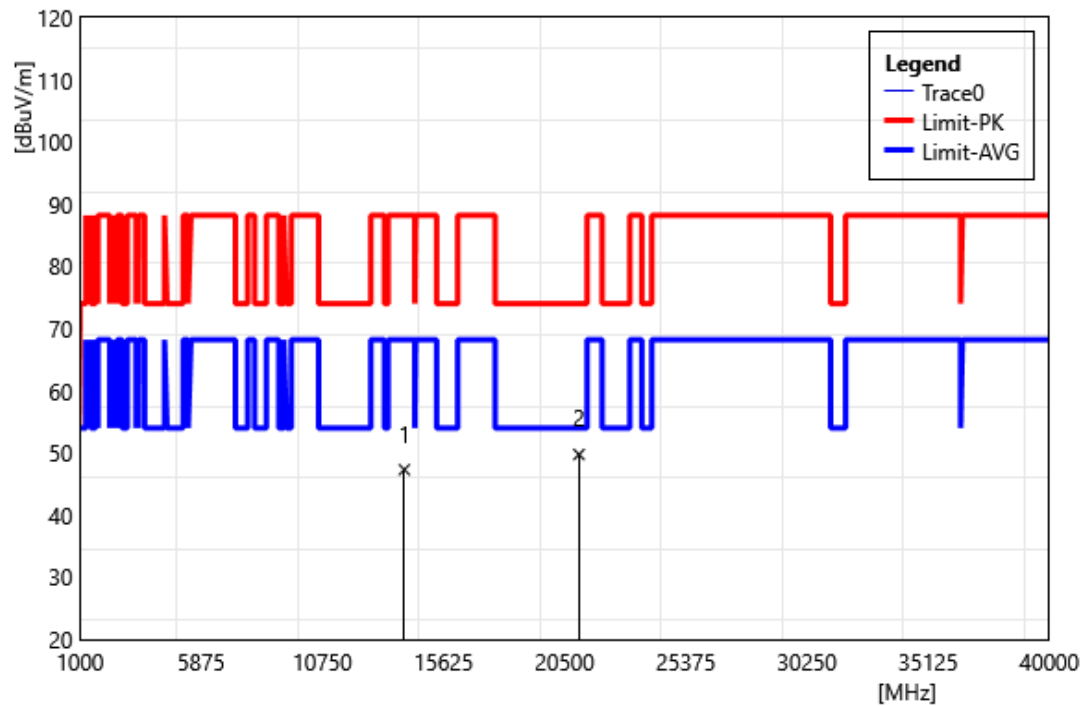


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	38.83	8.46	47.29	88.20	-40.91	PEAK
2	21075.00	40.34	9.40	49.74	74.00	-24.26	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 7025 MHz		
Polarization:	Vertical		
Remark:			

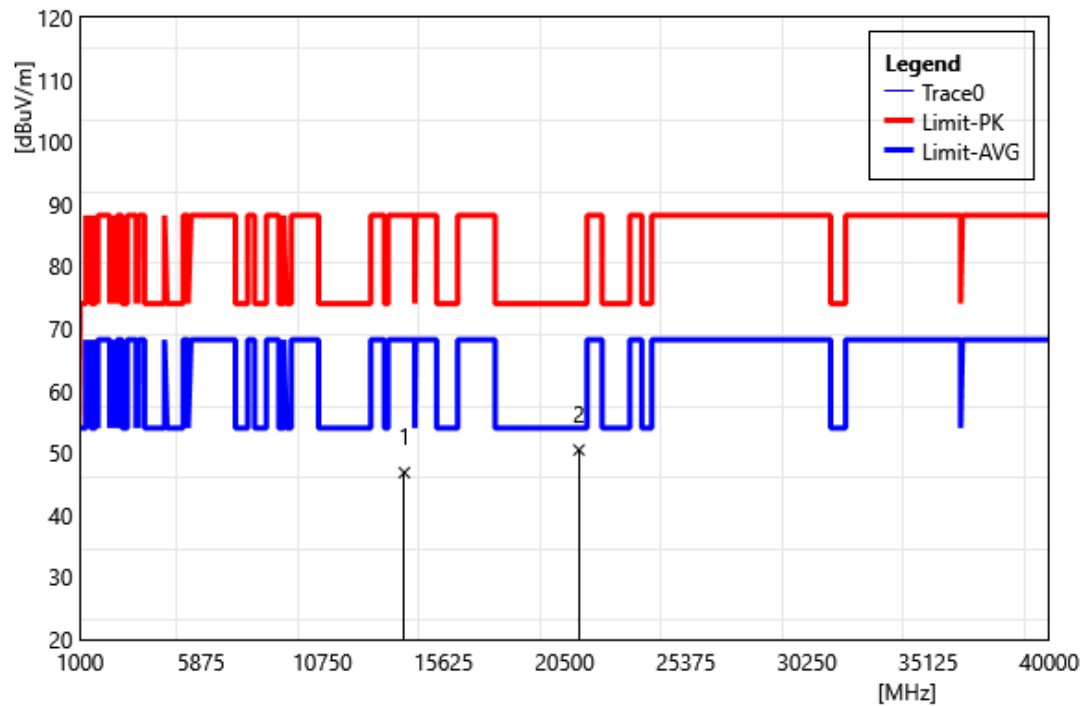


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	38.37	8.46	46.83	88.20	-41.37	PEAK
2	21075.00	41.07	9.40	50.47	74.00	-23.53	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6025 MHz		
Polarization:	Horizontal		
Remark:			

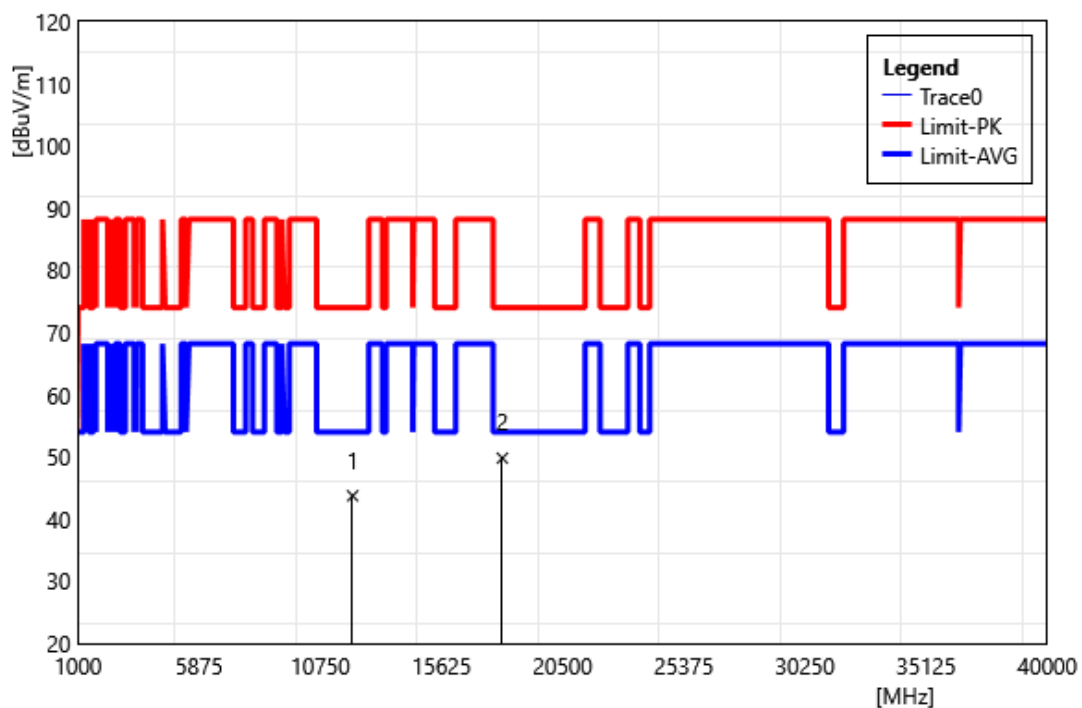


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	36.12	7.63	43.75	74.00	-30.25	PEAK
2	18075.00	41.75	8.06	49.81	74.00	-24.19	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6025 MHz		
Polarization:	Vertical		
Remark:			

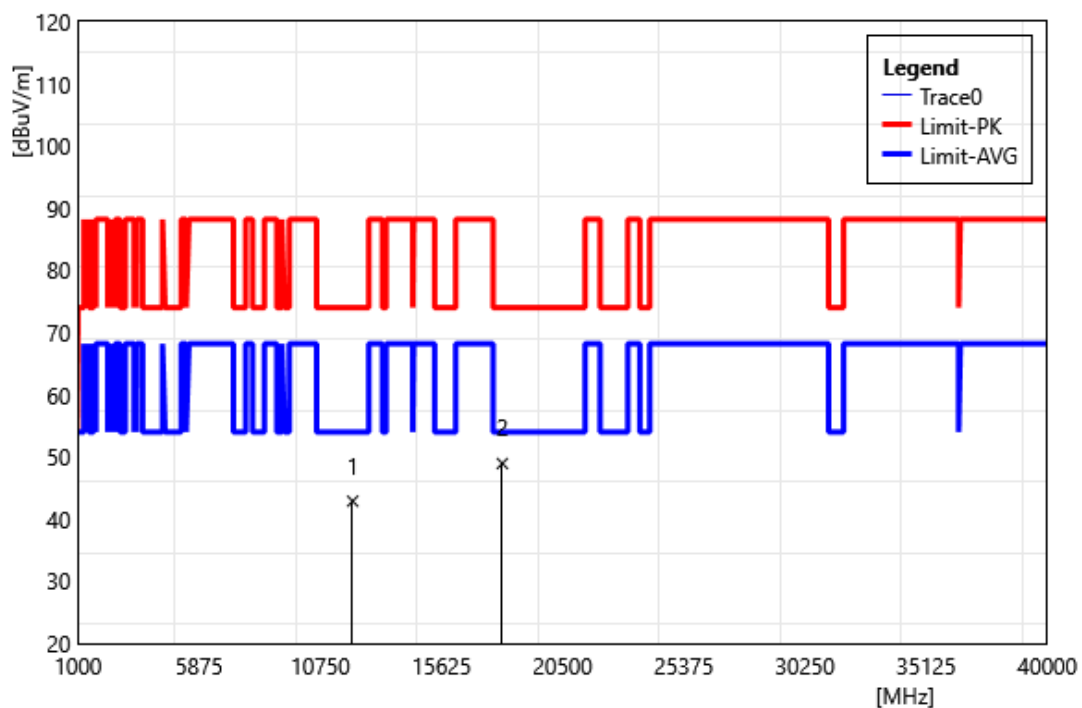


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.25	7.63	42.88	74.00	-31.12	PEAK
2	18075.00	40.87	8.06	48.93	74.00	-25.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6185 MHz		
Polarization:	Horizontal		
Remark:			

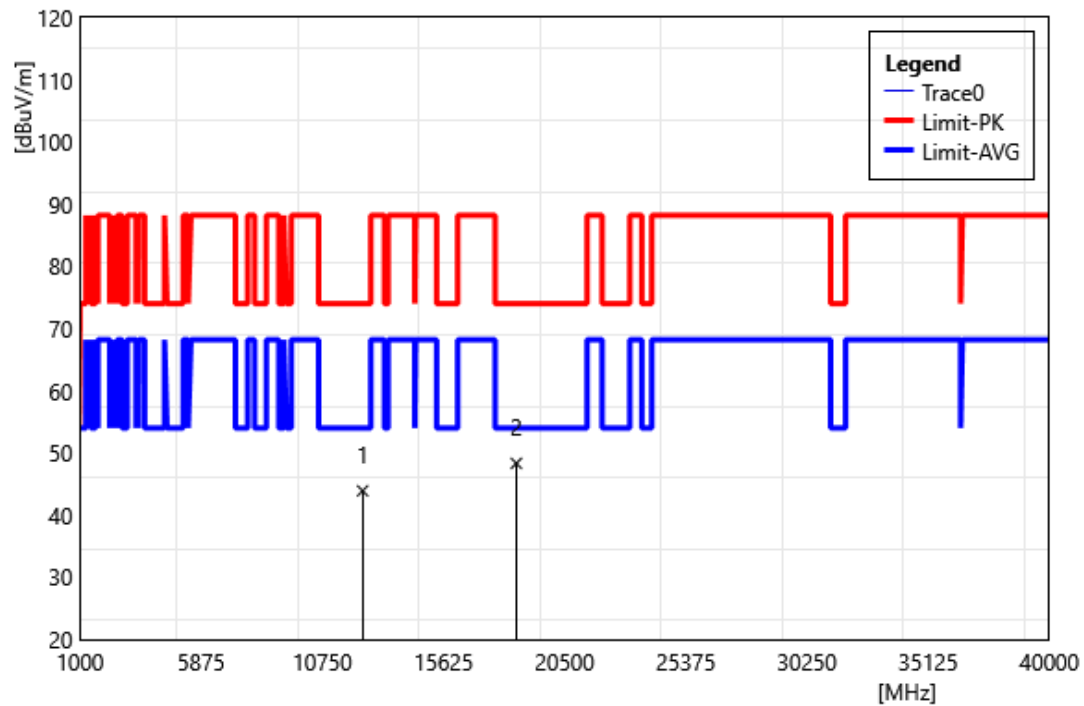


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	35.99	7.91	43.90	74.00	-30.10	PEAK
2	18555.00	40.03	8.28	48.31	74.00	-25.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6185 MHz		
Polarization:	Vertical		
Remark:			

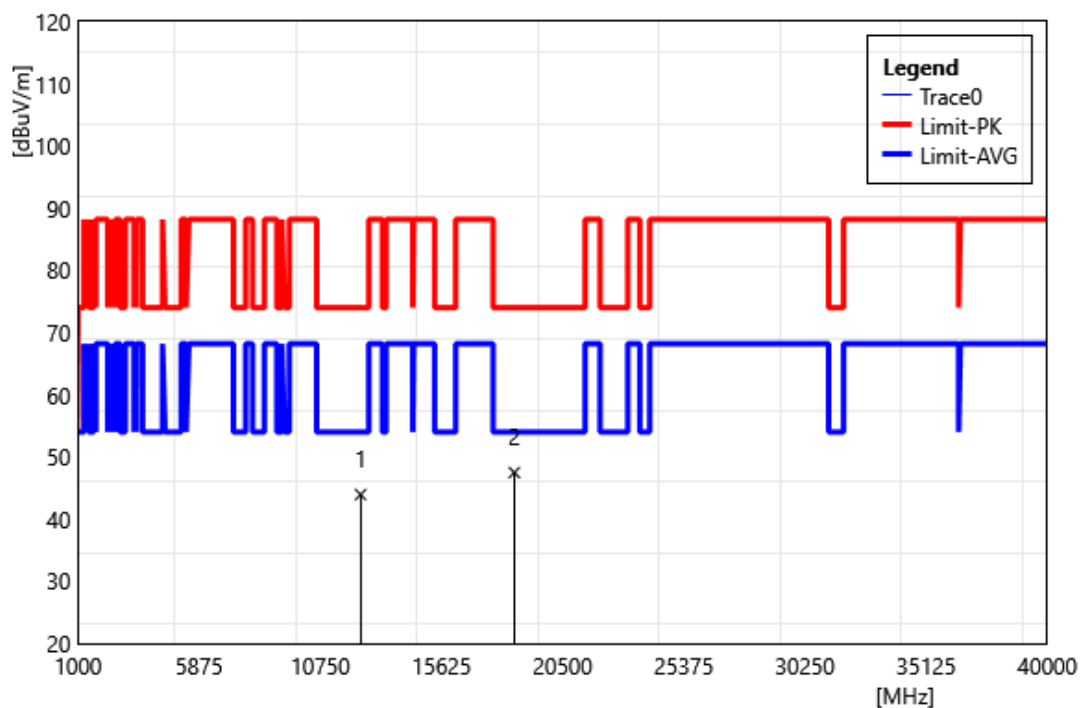


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	36.04	7.91	43.95	74.00	-30.05	PEAK
2	18555.00	39.20	8.28	47.48	74.00	-26.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6345 MHz		
Polarization:	Horizontal		
Remark:			

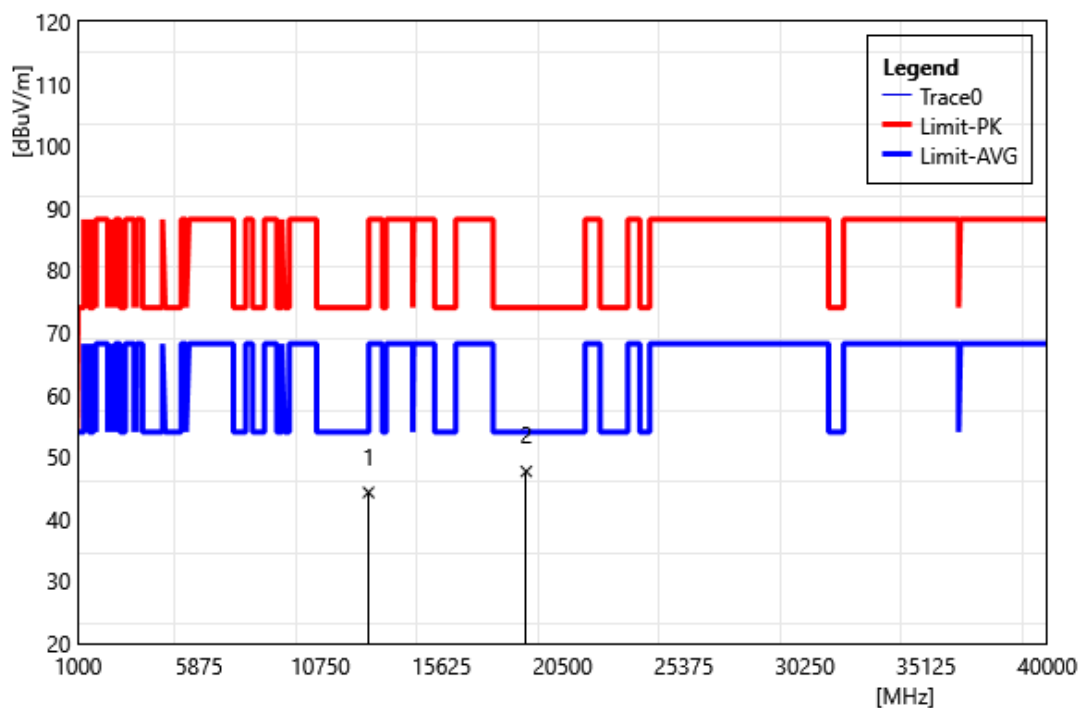


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	35.93	8.35	44.28	74.00	-29.72	PEAK
2	19035.00	39.17	8.49	47.66	74.00	-26.34	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6345 MHz		
Polarization:	Vertical		
Remark:			

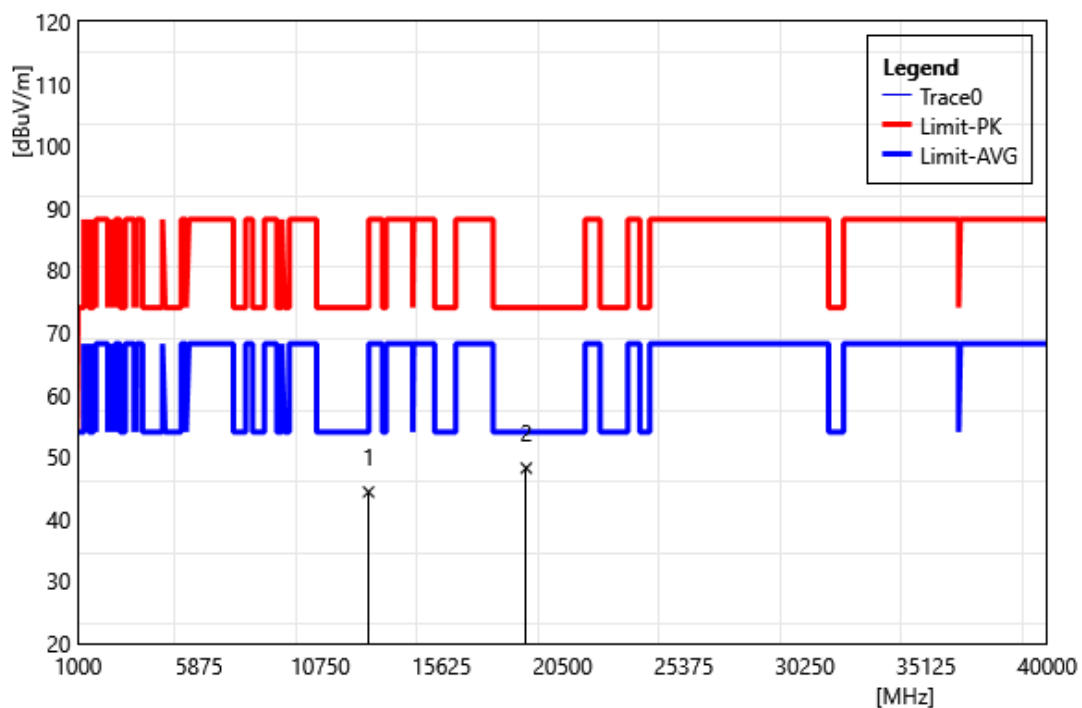


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	36.00	8.35	44.35	74.00	-29.65	PEAK
2	19035.00	39.71	8.49	48.20	74.00	-25.80	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6505 MHz		
Polarization:	Horizontal		
Remark:			

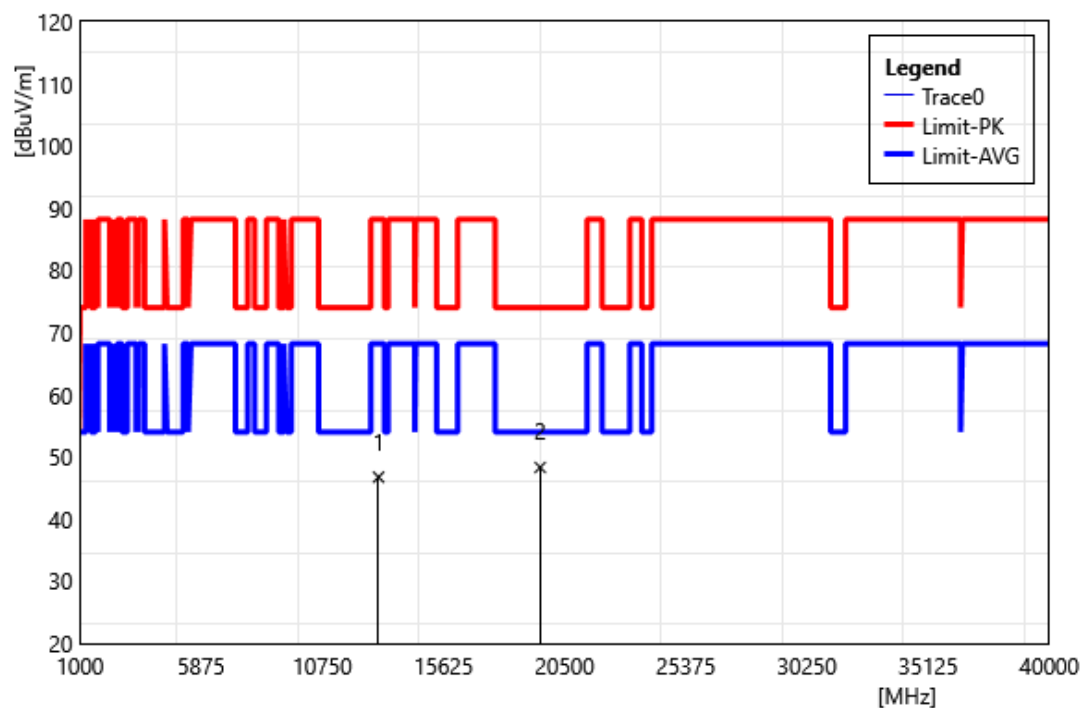


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	38.06	8.68	46.74	88.20	-41.46	PEAK
2	19515.00	39.59	8.71	48.30	74.00	-25.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6505 MHz		
Polarization:	Vertical		
Remark:			

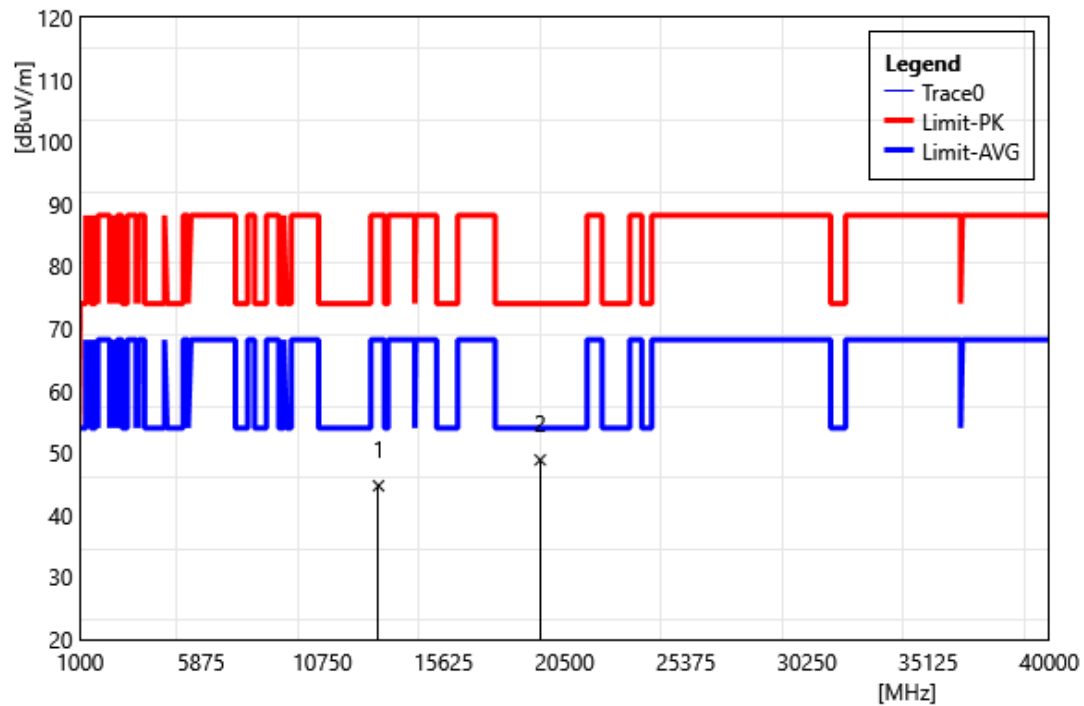


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	36.04	8.68	44.72	88.20	-43.48	PEAK
2	19515.00	40.16	8.71	48.87	74.00	-25.13	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6665 MHz		
Polarization:	Horizontal		
Remark:			

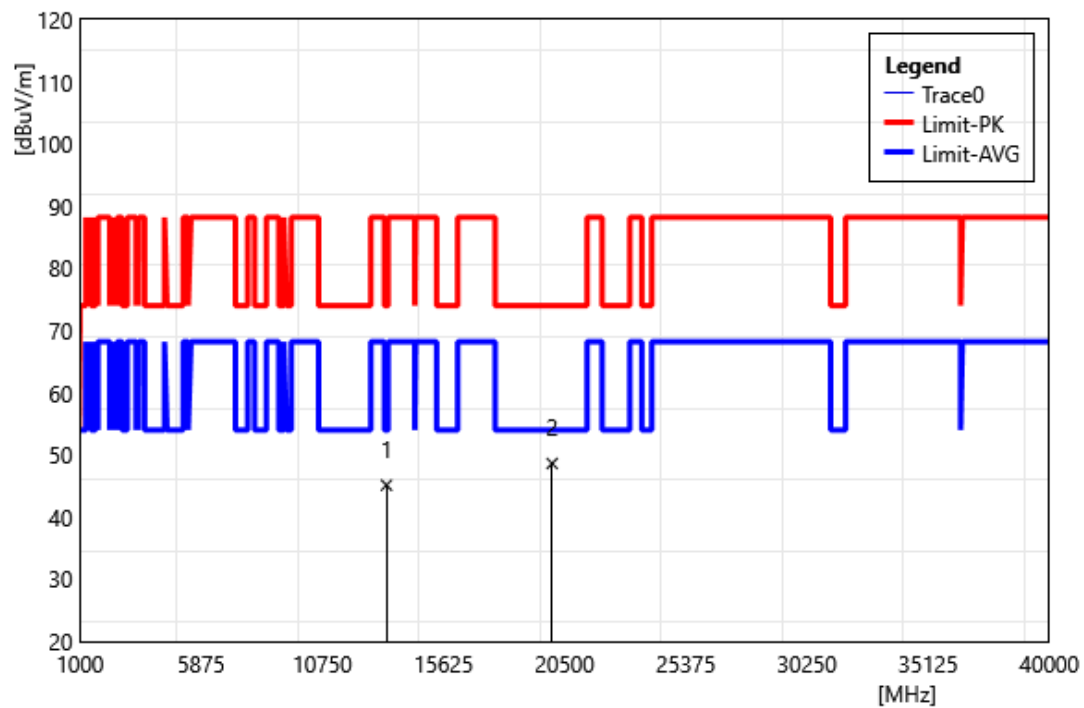


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	36.92	8.22	45.14	74.00	-28.86	PEAK
2	19995.00	39.69	8.93	48.62	74.00	-25.38	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6665 MHz		
Polarization:	Vertical		
Remark:			

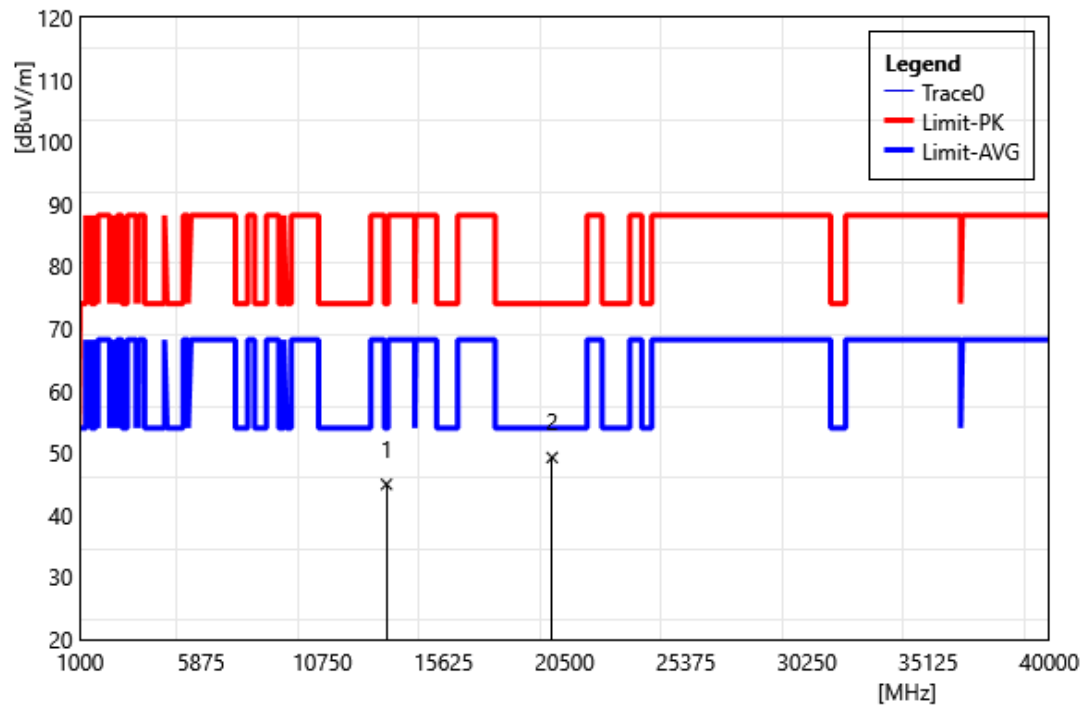


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	36.73	8.22	44.95	74.00	-29.05	PEAK
2	19995.00	40.32	8.93	49.25	74.00	-24.75	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6825 MHz		
Polarization:	Horizontal		
Remark:			

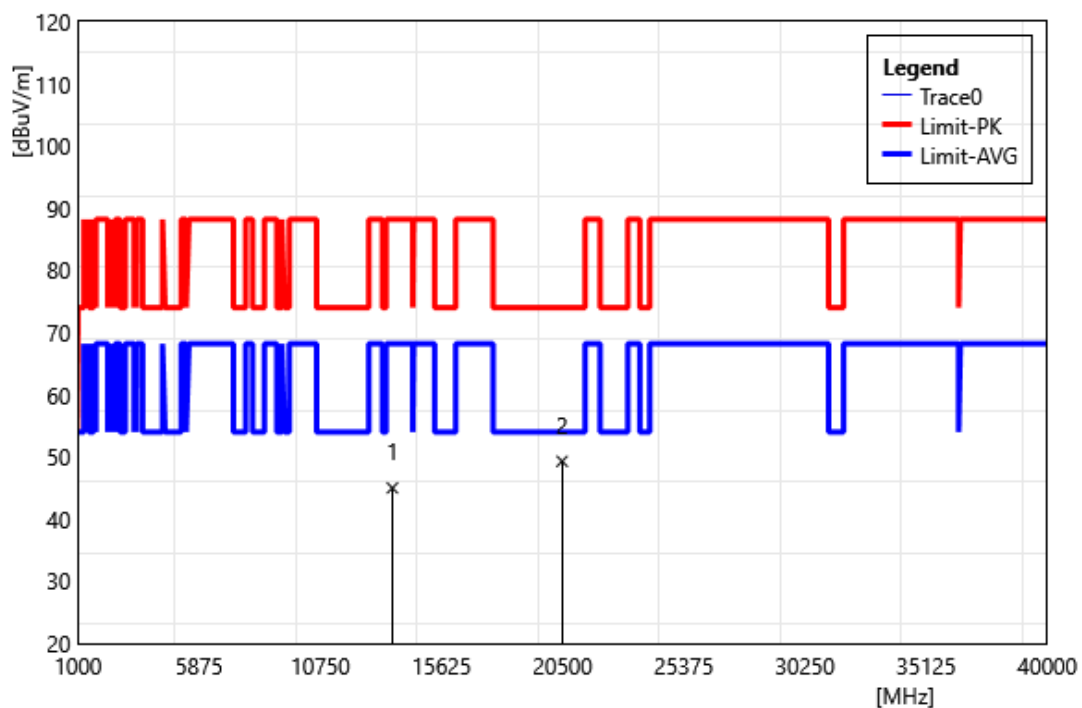


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	37.15	7.86	45.01	88.20	-43.19	PEAK
2	20475.00	40.15	9.13	49.28	74.00	-24.72	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6825 MHz		
Polarization:	Vertical		
Remark:			

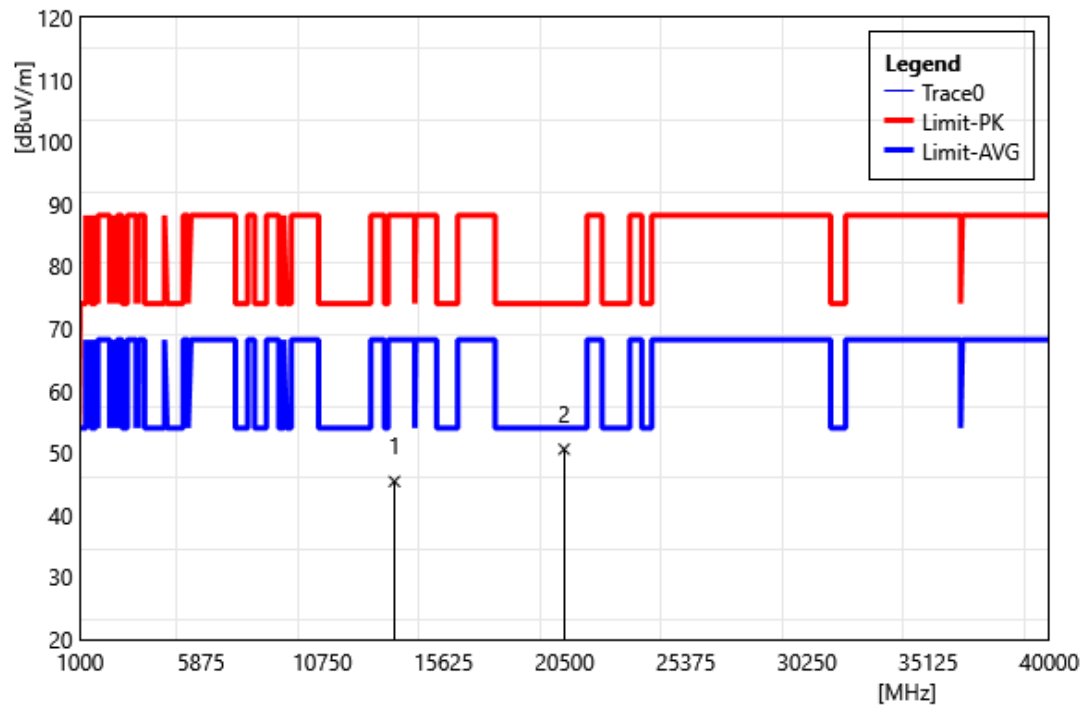


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	37.55	7.86	45.41	88.20	-42.79	PEAK
2	20475.00	41.46	9.13	50.59	74.00	-23.41	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6985 MHz		
Polarization:	Horizontal		
Remark:			

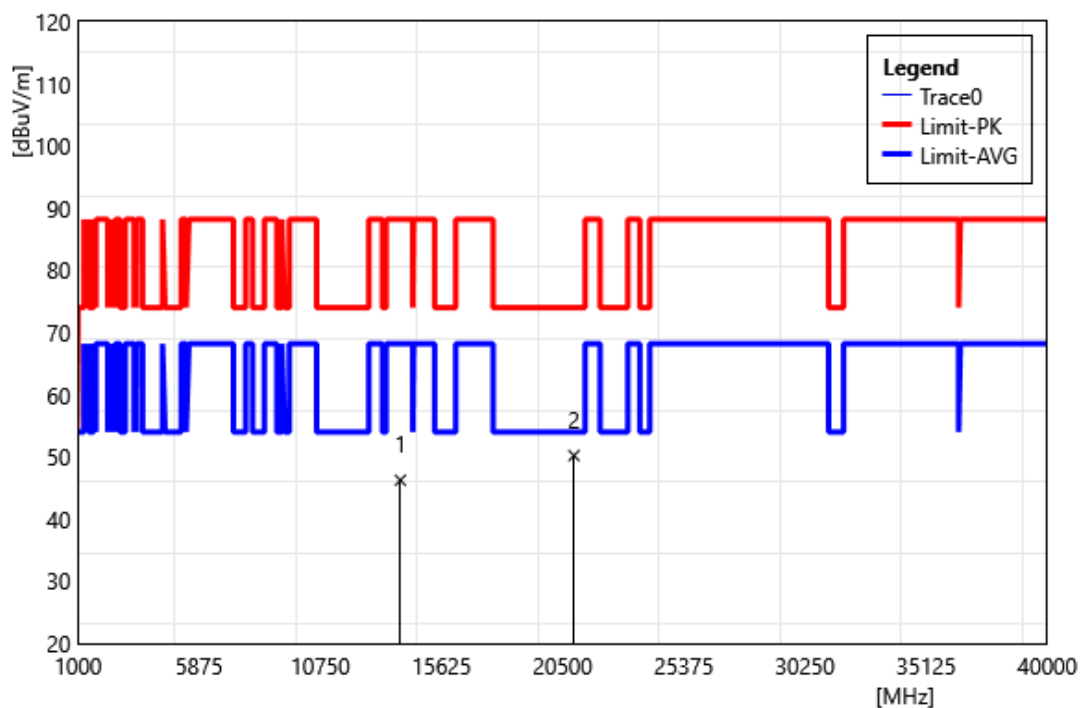


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	37.97	8.27	46.24	88.20	-41.96	PEAK
2	20955.00	40.87	9.35	50.22	74.00	-23.78	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6985 MHz		
Polarization:	Vertical		
Remark:			

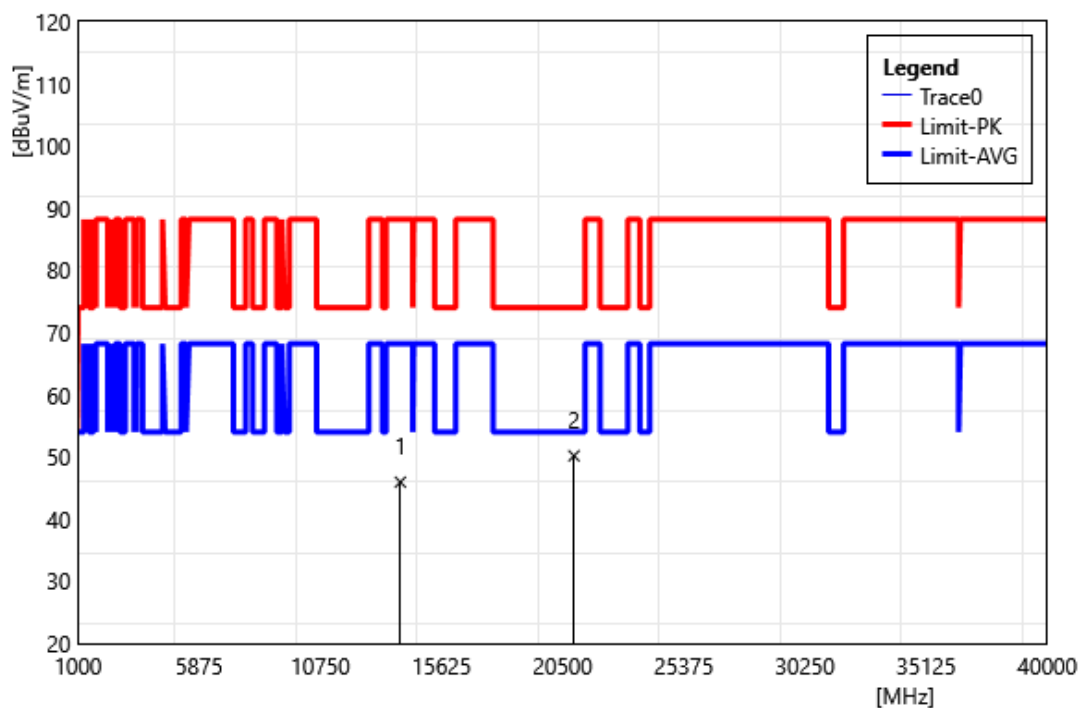


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	37.67	8.27	45.94	88.20	-42.26	PEAK
2	20955.00	40.83	9.35	50.18	74.00	-23.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Simultaneous Transmitting		
Polarization:	Horizontal		
Remark:	Bluetooth + WLAN 6E GHz		

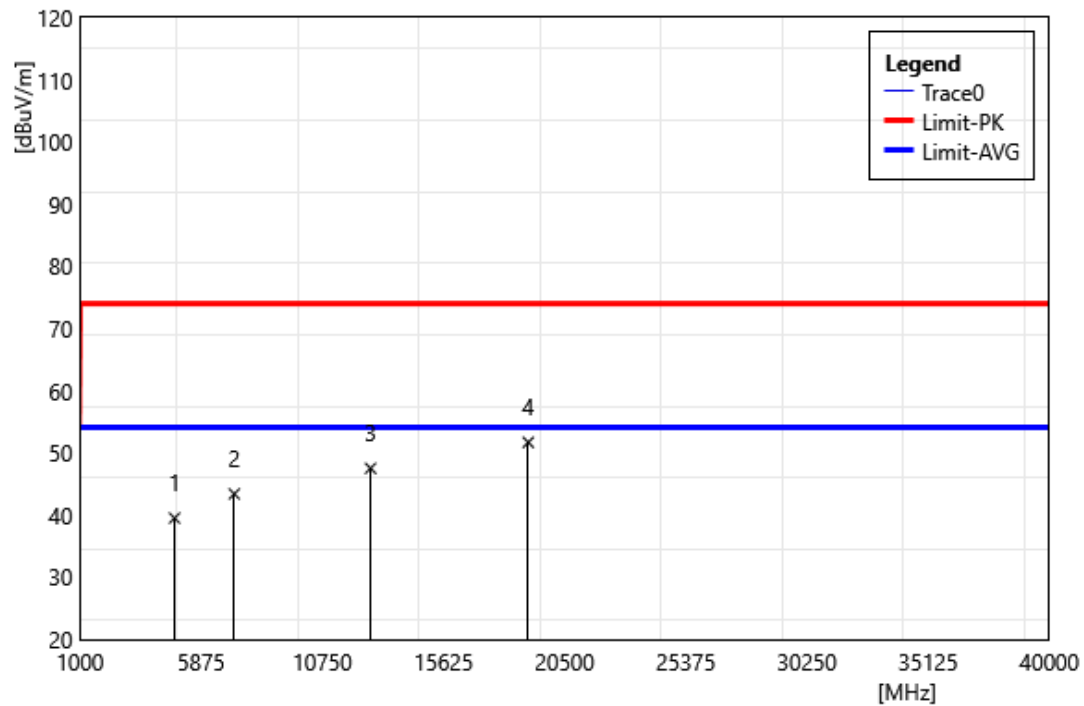

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4804.00	38.29	1.23	39.52	74.00	-34.48	PEAK
2	7206.00	36.93	6.48	43.41	74.00	-30.59	PEAK
3	12690.00	39.17	8.35	47.52	74.00	-26.48	PEAK
4	19035.00	43.20	8.49	51.69	74.00	-23.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Simultaneous Transmitting		
Polarization:	Vertical		
Remark:	Bluetooth + WLAN 6E GHz		

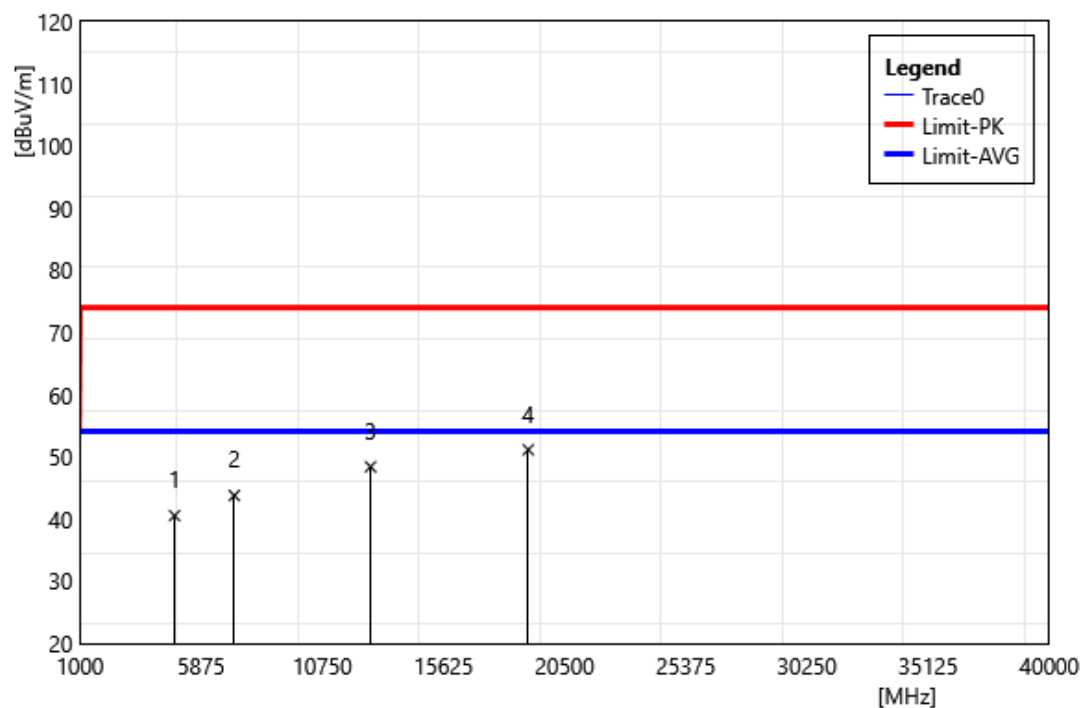


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4804.00	39.32	1.23	40.55	74.00	-33.45	PEAK
2	7206.00	37.31	6.48	43.79	74.00	-30.21	PEAK
3	12690.00	40.06	8.35	48.41	74.00	-25.59	PEAK
4	19035.00	42.66	8.49	51.15	74.00	-23.85	PEAK

Band Edge


Peak

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Horizontal		
Remark:			

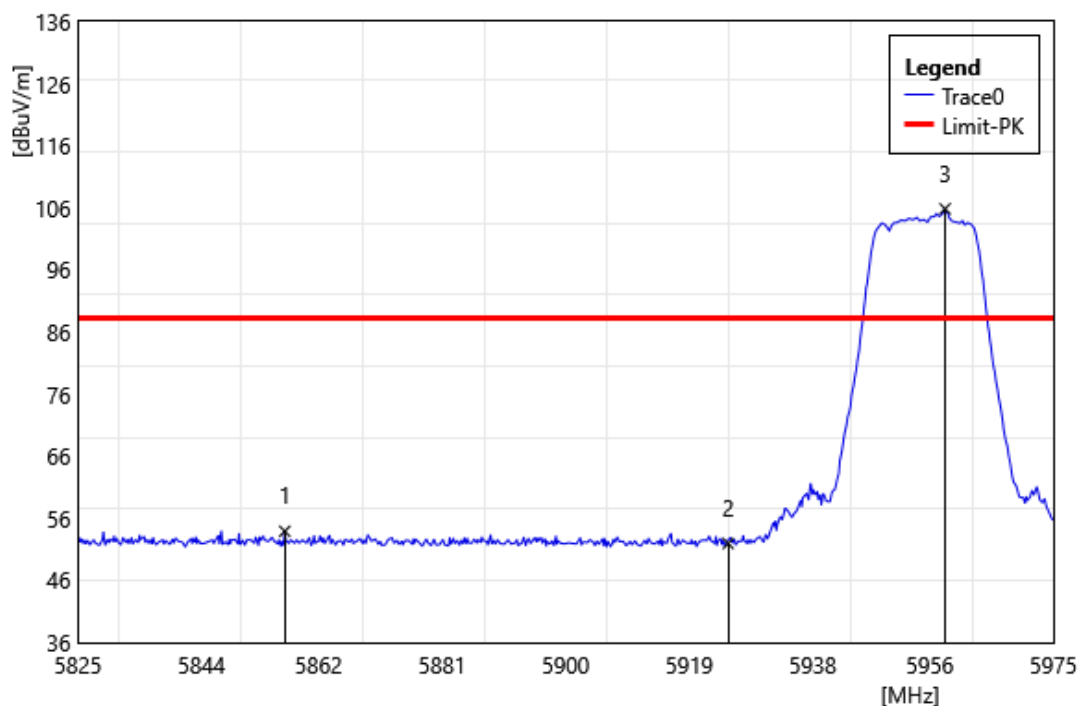


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5856.80	50.63	3.30	53.93	88.20	-34.27	PEAK
2	5925.00	48.80	3.15	51.95	88.20	-36.25	PEAK
3	5958.35	102.77	3.08	105.85	88.20	17.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Vertical		
Remark:			

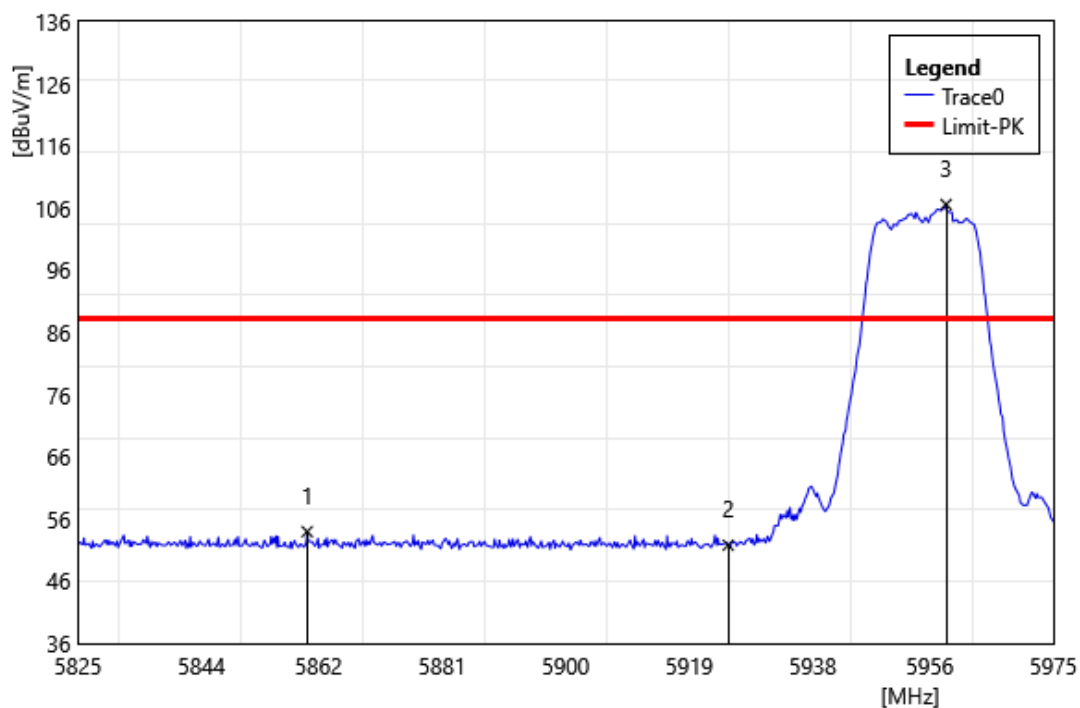


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5860.25	50.68	3.29	53.97	88.20	-34.23	PEAK
2	5925.00	48.64	3.15	51.79	88.20	-36.41	PEAK
3	5958.50	103.51	3.08	106.59	88.20	18.39	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 7115 MHz		
Polarization:	Horizontal		
Remark:			

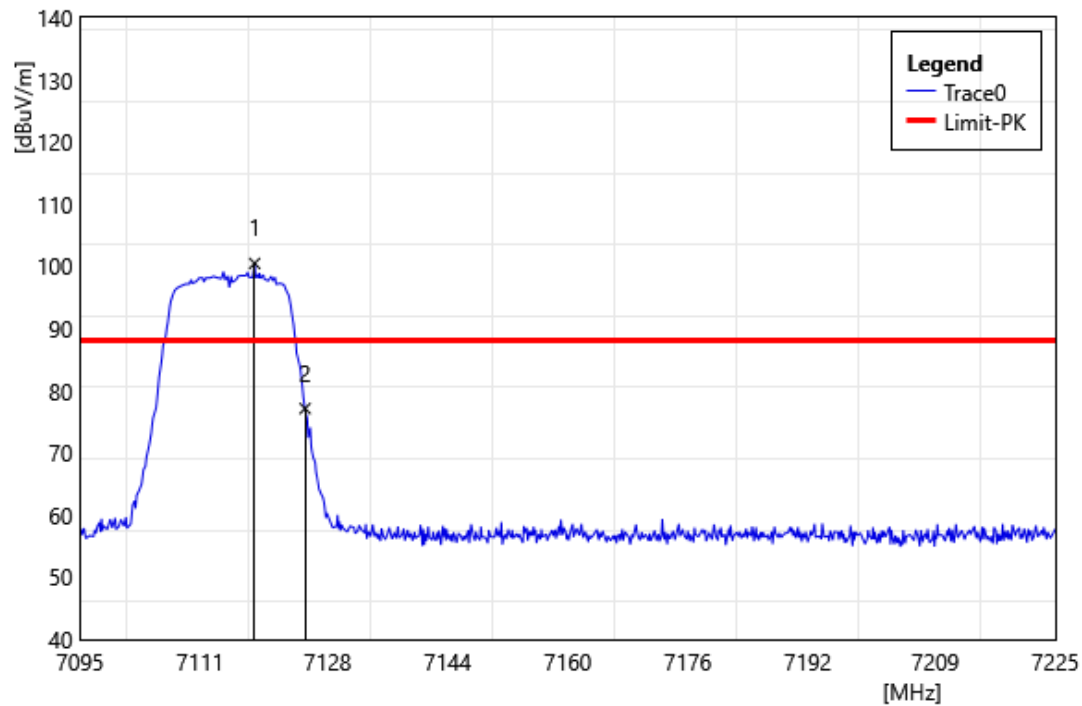


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7118.27	94.14	6.33	100.47	88.20	12.27	PEAK
2	7125.00	70.81	6.32	77.13	88.20	-11.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 7115 MHz		
Polarization:	Vertical		
Remark:			

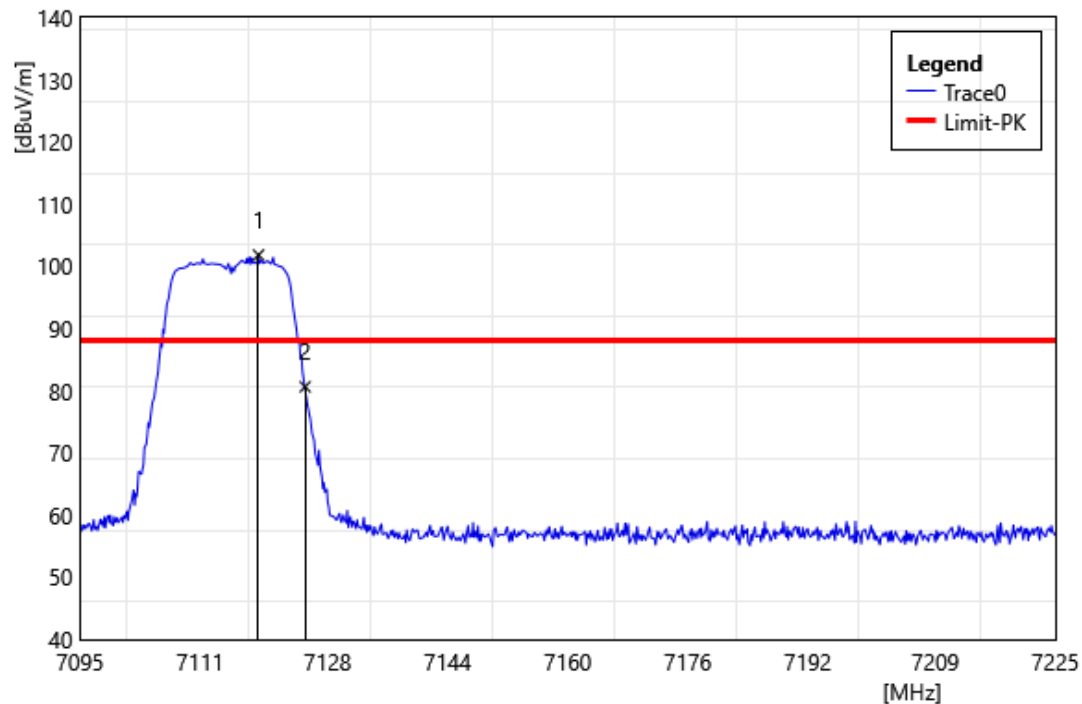


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7118.79	95.50	6.33	101.83	88.20	13.63	PEAK
2	7125.00	74.32	6.32	80.64	88.20	-7.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5955 MHz		
Polarization:	Horizontal		
Remark:			

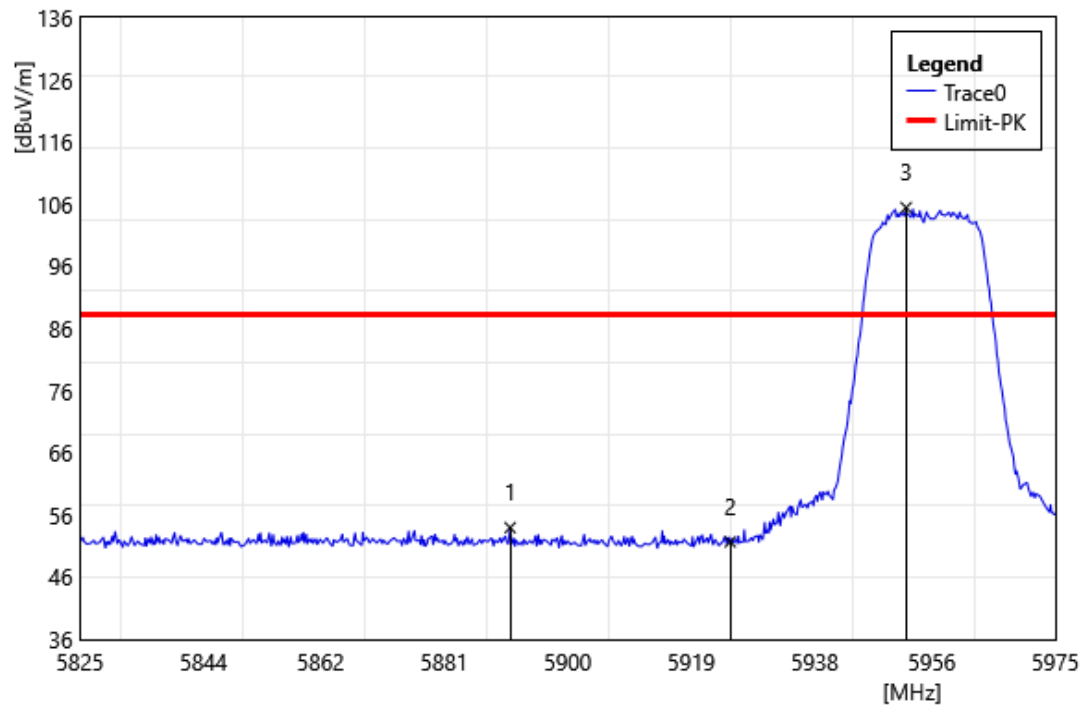


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5891.15	50.75	3.23	53.98	88.20	-34.22	PEAK
2	5925.00	48.55	3.15	51.70	88.20	-36.50	PEAK
3	5952.05	102.36	3.09	105.45	88.20	17.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5955 MHz		
Polarization:	Vertical		
Remark:			

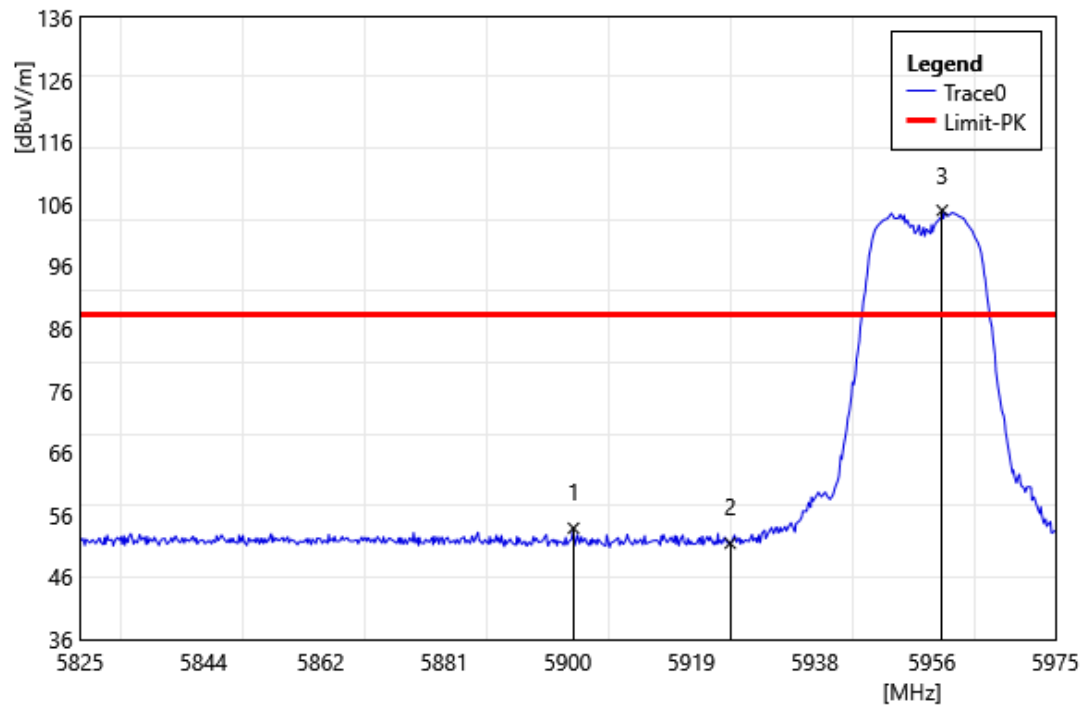


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5900.90	50.67	3.21	53.89	88.20	-34.32	PEAK
2	5925.00	48.31	3.15	51.46	88.20	-36.74	PEAK
3	5957.60	101.92	3.08	105.00	88.20	16.80	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 7115 MHz		
Polarization:	Vertical		
Remark:			

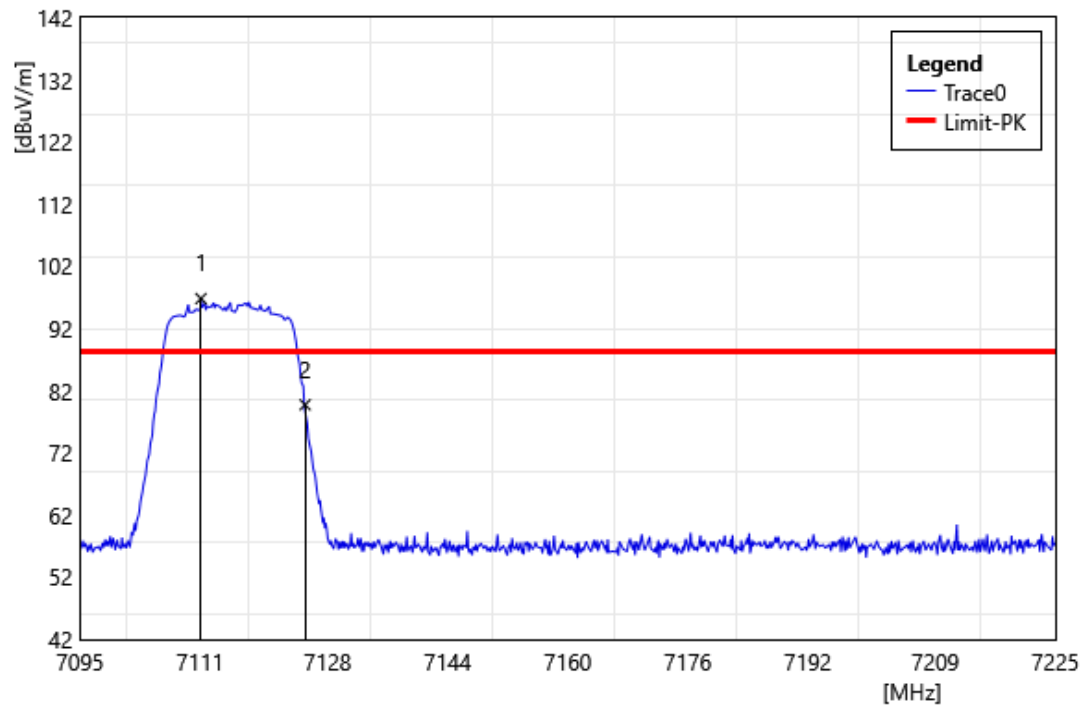


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7111.12	90.48	6.34	96.82	88.20	8.62	PEAK
2	7125.00	73.42	6.32	79.74	88.20	-8.46	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 7115 MHz		
Polarization:	Horizontal		
Remark:			

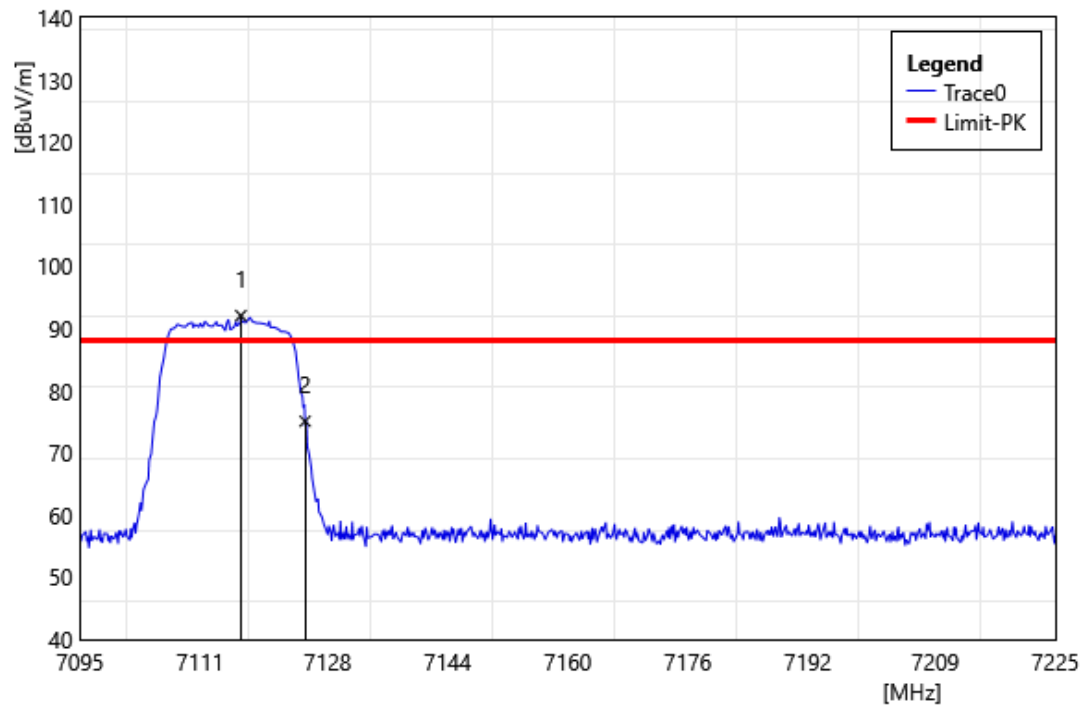


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7116.45	85.74	6.33	92.07	88.20	3.87	PEAK
2	7125.00	68.77	6.32	75.09	88.20	-13.11	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5965 MHz		
Polarization:	Horizontal		
Remark:			

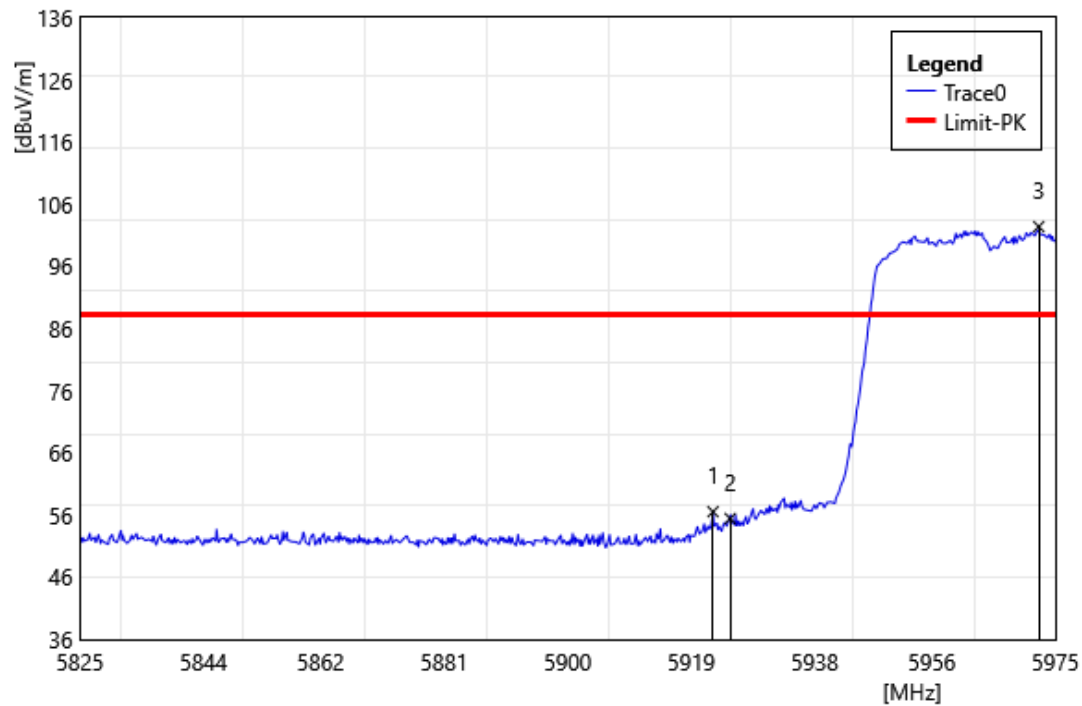


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.35	53.39	3.16	56.55	88.20	-31.65	PEAK
2	5925.00	52.30	3.15	55.45	88.20	-32.75	PEAK
3	5972.45	99.29	3.09	102.38	88.20	14.18	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5965 MHz		
Polarization:	Vertical		
Remark:			

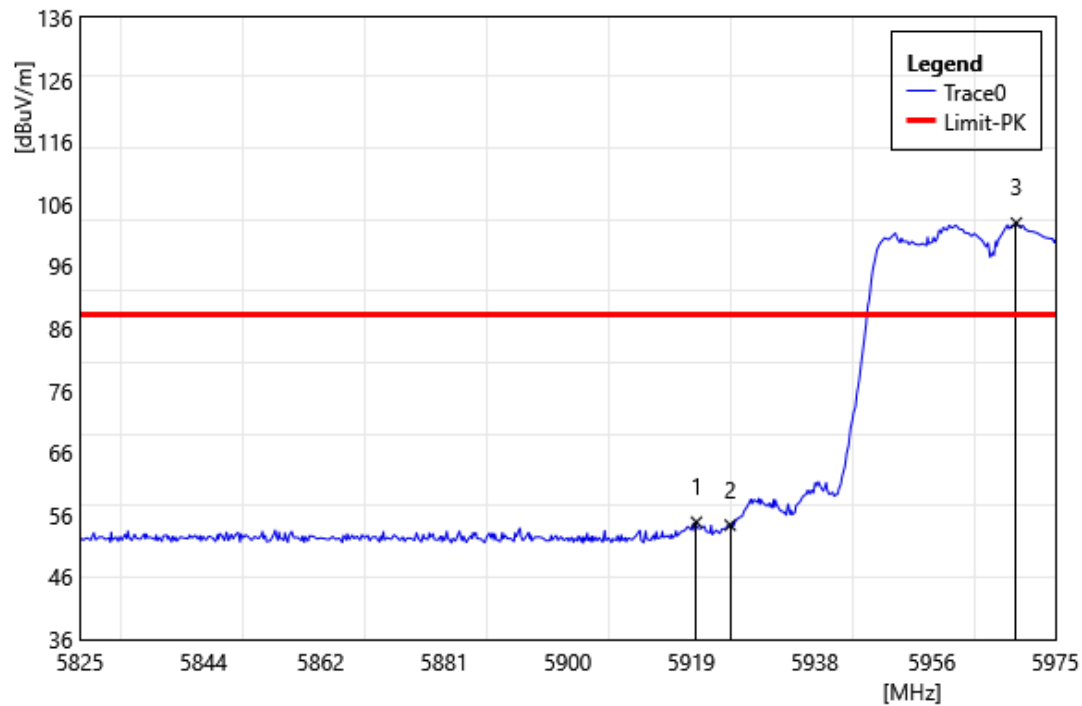


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5919.80	51.70	3.16	54.86	88.20	-33.34	PEAK
2	5925.00	51.23	3.15	54.38	88.20	-33.82	PEAK
3	5969.00	99.91	3.08	102.99	88.20	14.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

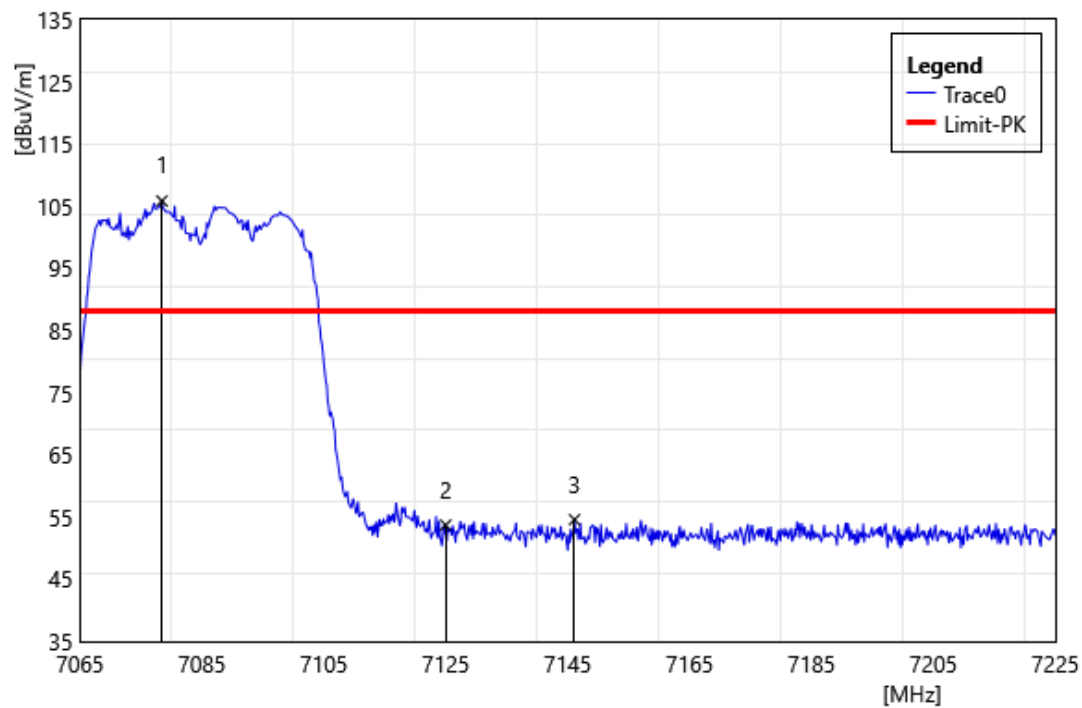


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7078.44	99.44	6.40	105.84	88.20	17.64	PEAK
2	7125.00	47.38	6.32	53.70	88.20	-34.50	PEAK
3	7146.12	48.31	6.27	54.58	88.20	-33.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

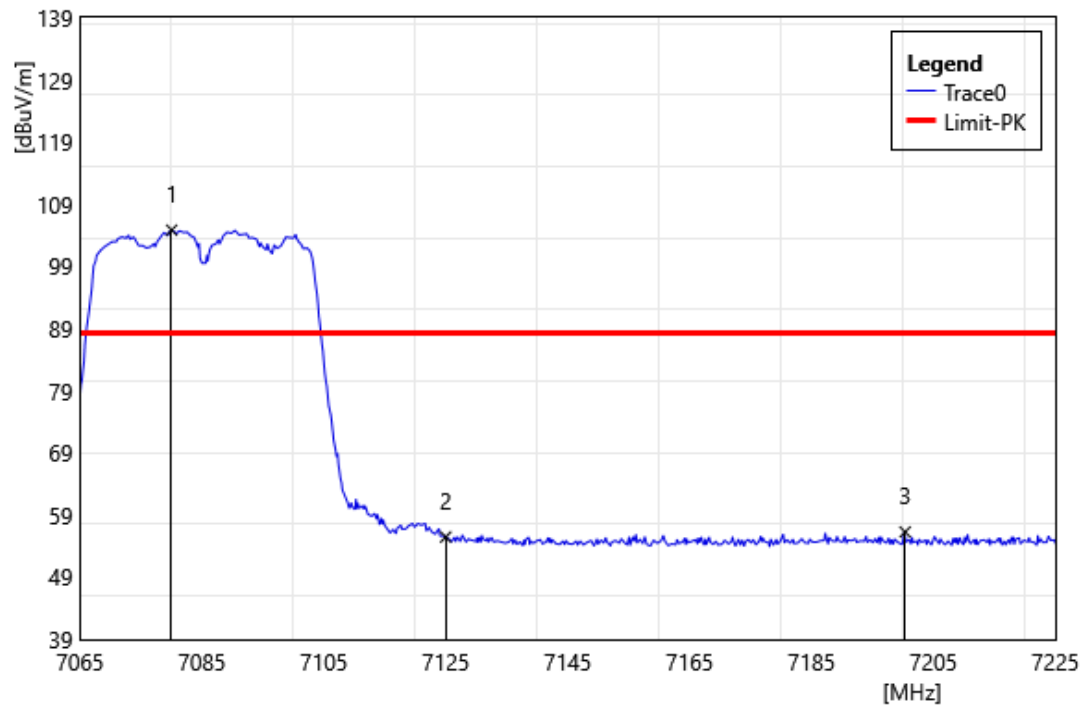


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7080.04	98.43	6.40	104.83	88.20	16.63	PEAK
2	7125.00	49.16	6.32	55.48	88.20	-32.72	PEAK
3	7200.36	49.82	6.47	56.29	88.20	-31.91	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

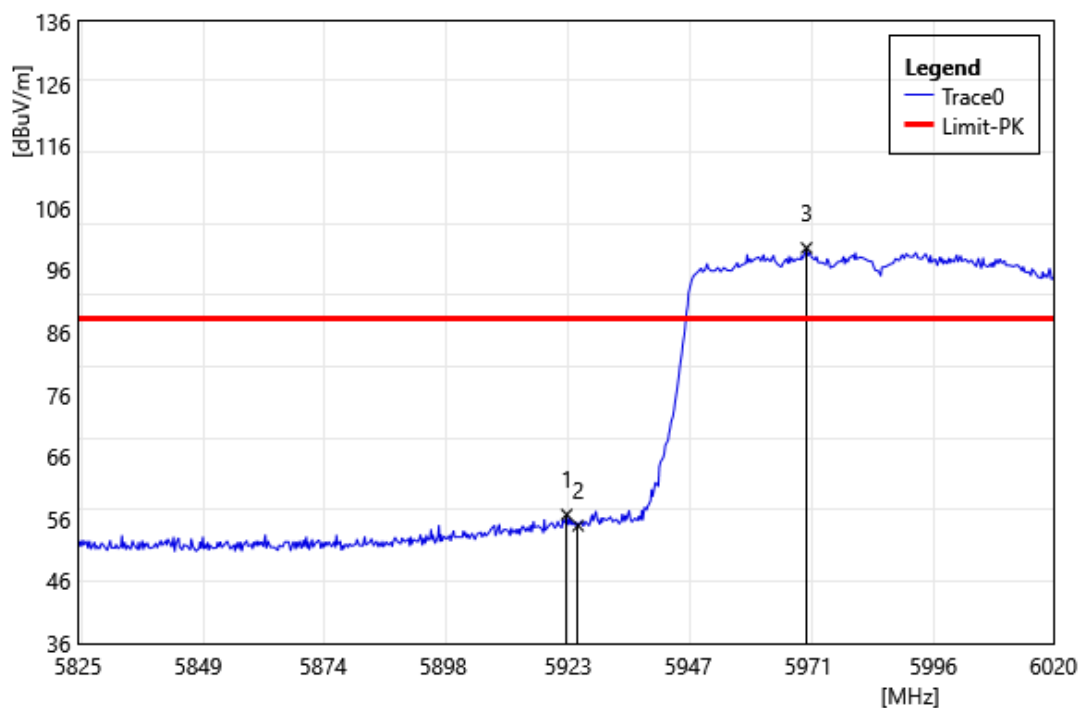


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.70	53.56	3.16	56.72	88.20	-31.48	PEAK
2	5925.00	51.78	3.15	54.93	88.20	-33.27	PEAK
3	5970.67	96.52	3.08	99.60	88.20	11.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

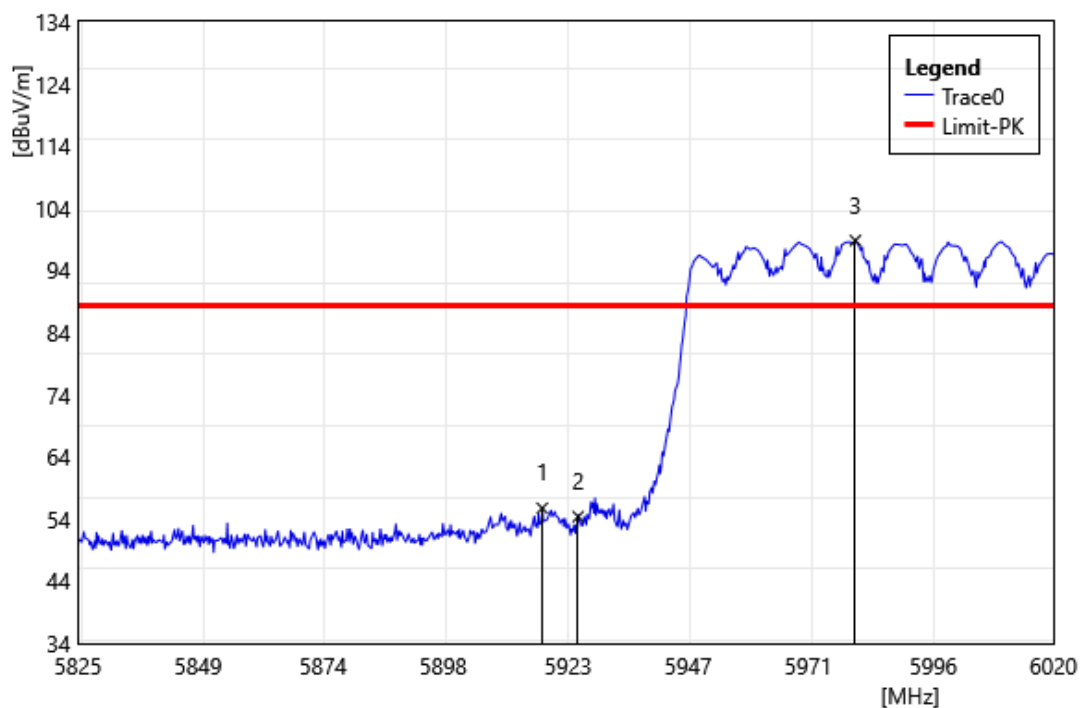


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5917.82	52.59	3.17	55.76	88.20	-32.44	PEAK
2	5925.00	51.24	3.15	54.39	88.20	-33.81	PEAK
3	5980.42	95.72	3.08	98.80	88.20	10.60	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

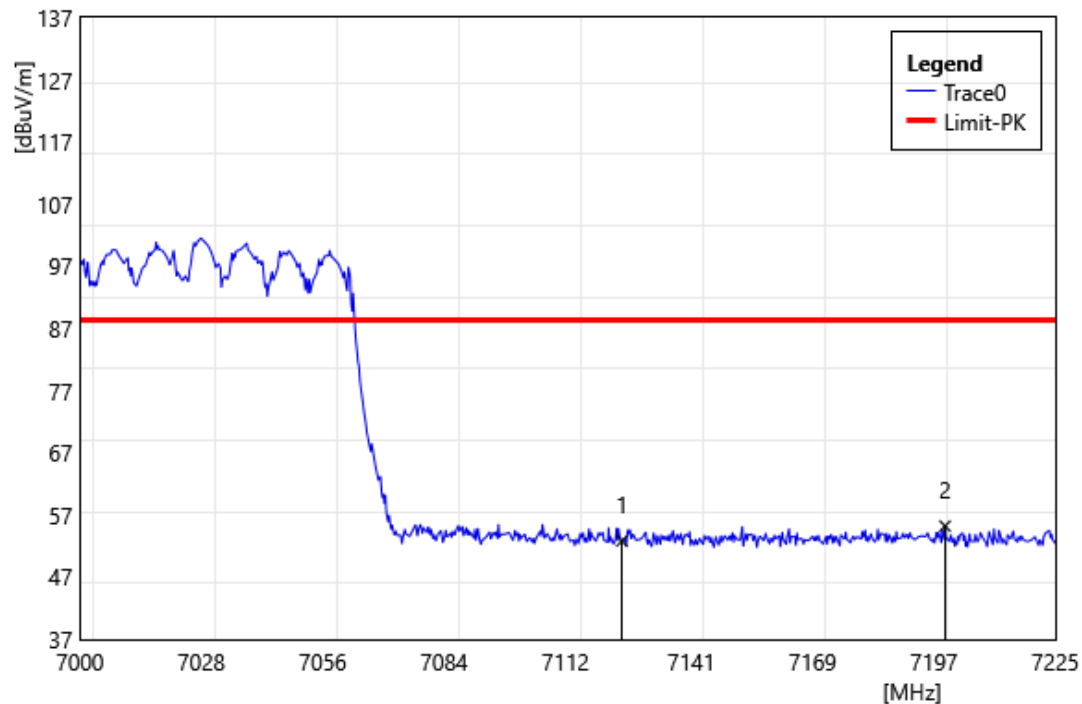


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	46.50	6.32	52.82	88.20	-35.38	PEAK
2	7199.58	48.76	6.47	55.23	88.20	-32.97	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

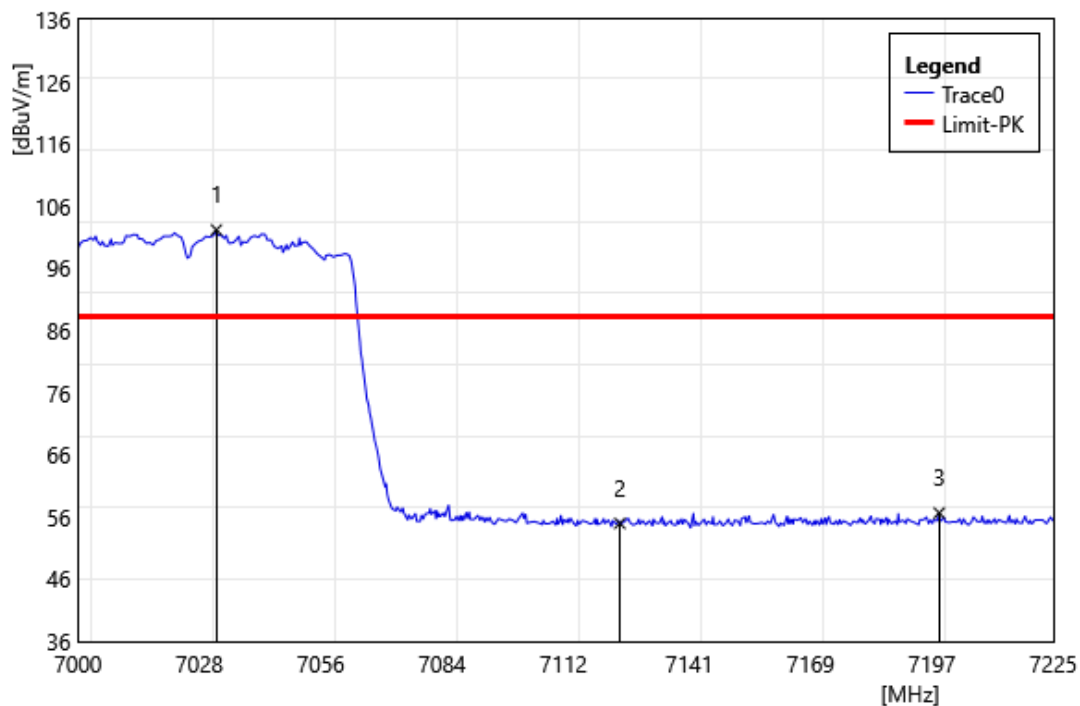


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7031.95	95.73	6.44	102.17	88.20	13.97	PEAK
2	7125.00	48.66	6.32	54.98	88.20	-33.22	PEAK
3	7198.68	50.20	6.46	56.66	88.20	-31.54	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6025 MHz		
Polarization:	Horizontal		
Remark:			

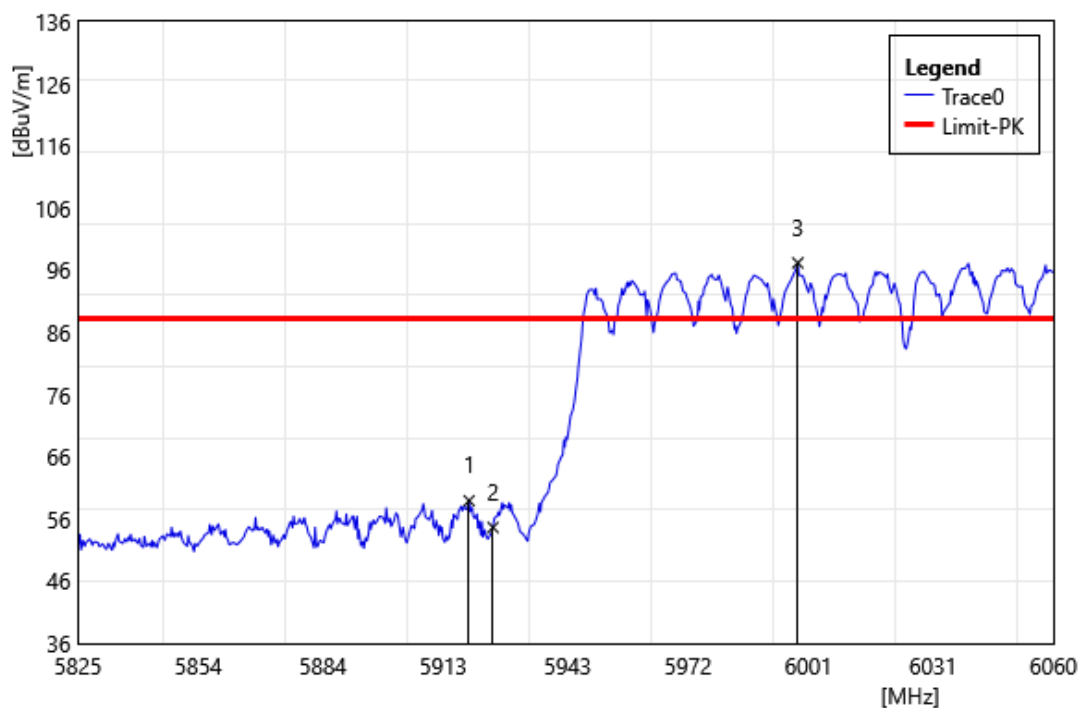


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5919.24	55.79	3.16	58.95	88.20	-29.25	PEAK
2	5925.00	51.49	3.15	54.64	88.20	-33.56	PEAK
3	5998.43	94.12	3.07	97.19	88.20	8.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6025 MHz		
Polarization:	Vertical		
Remark:			

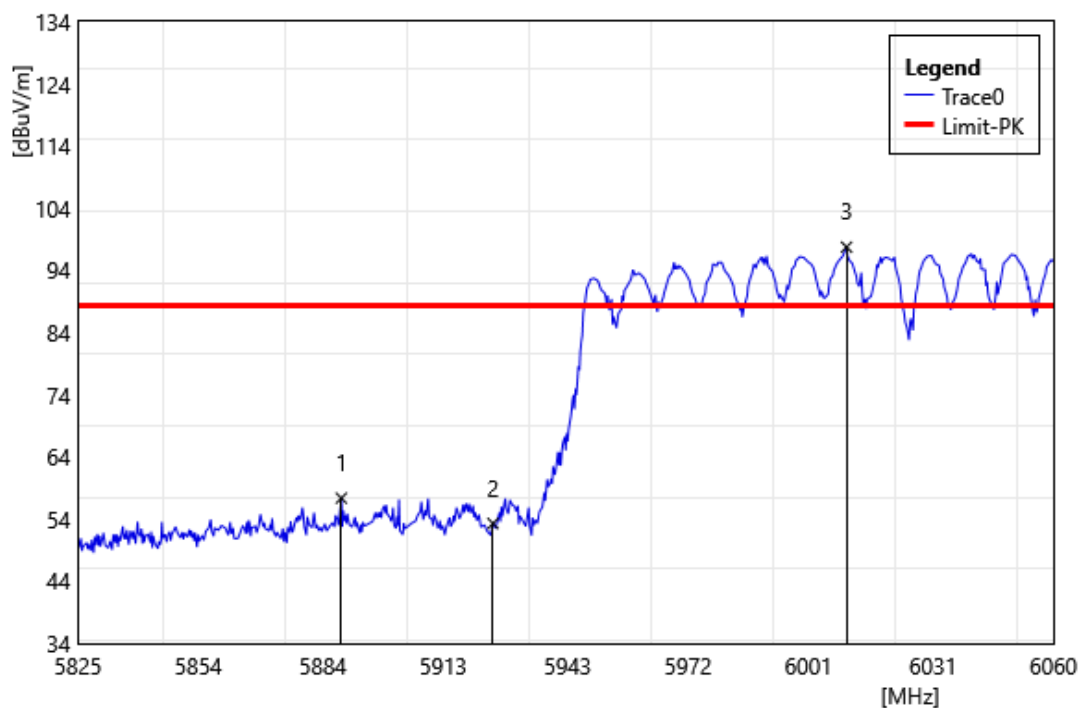


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5888.45	54.14	3.23	57.37	88.20	-30.83	PEAK
2	5925.00	50.15	3.15	53.30	88.20	-34.90	PEAK
3	6010.18	94.61	3.13	97.74	88.20	9.54	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

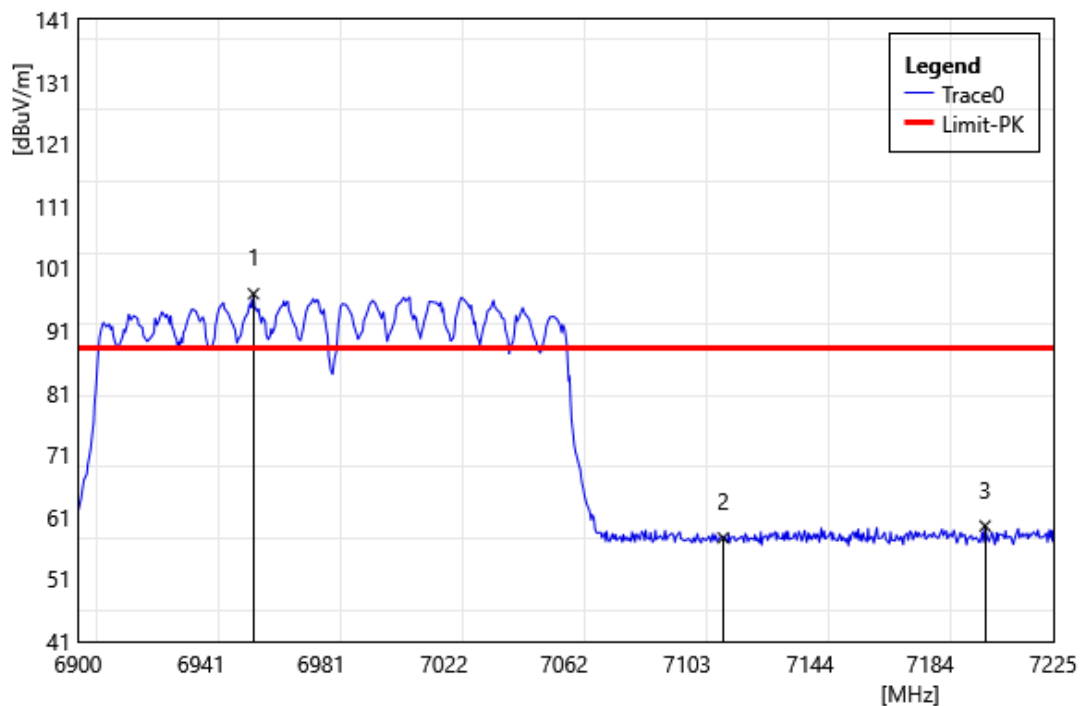


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6958.50	90.64	6.28	96.92	88.20	8.72	PEAK
2	7115.00	51.33	6.33	57.66	88.20	-30.54	PEAK
3	7202.25	53.10	6.48	59.58	88.20	-28.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

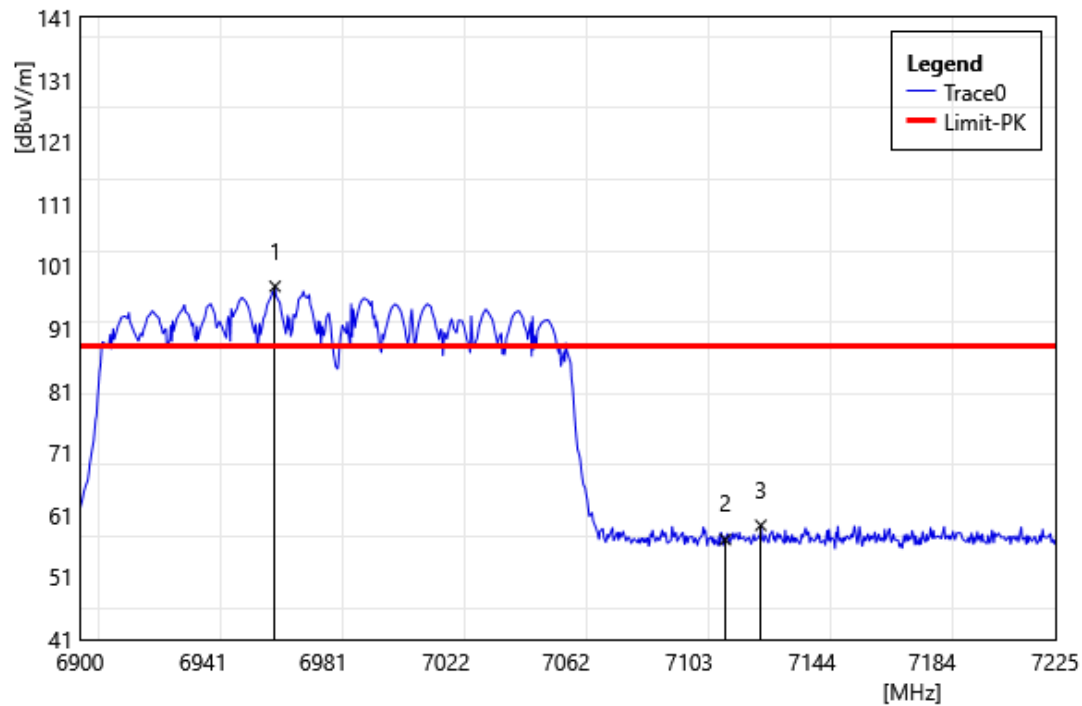


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6965.00	91.49	6.30	97.79	88.20	9.59	PEAK
2	7115.00	50.72	6.33	57.05	88.20	-31.15	PEAK
3	7126.85	53.04	6.31	59.35	88.20	-28.85	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5955 MHz		
Polarization:	Horizontal		
Remark:			

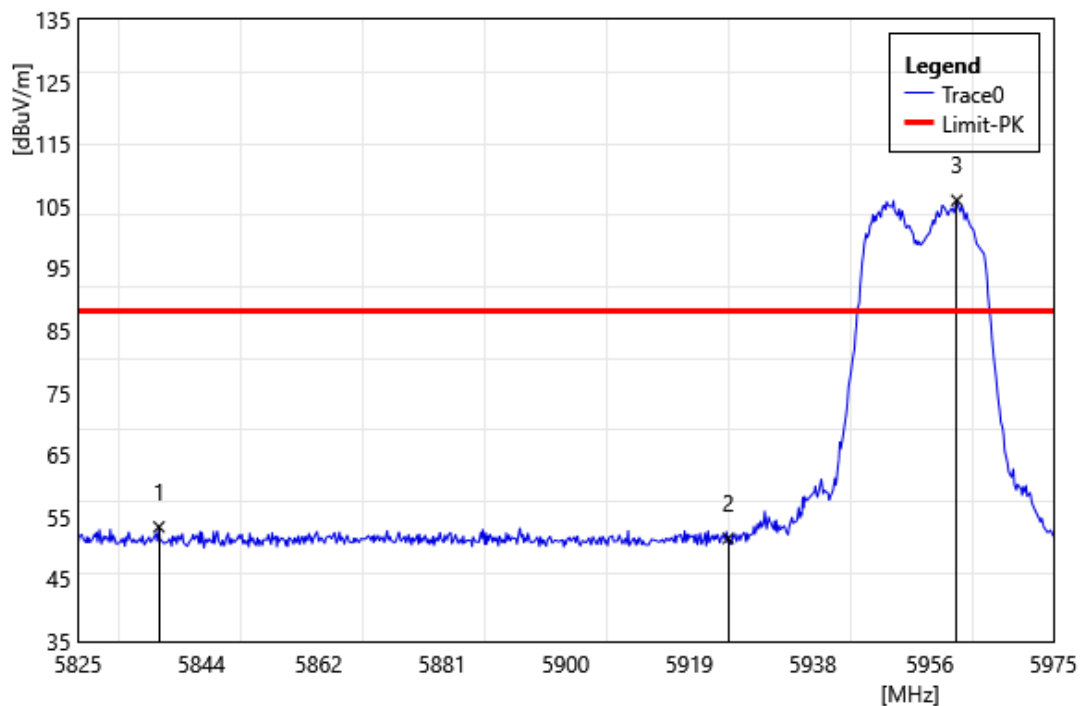


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5837.45	50.05	3.36	53.41	88.20	-34.79	PEAK
2	5925.00	48.43	3.15	51.58	88.20	-36.62	PEAK
3	5960.15	102.86	3.09	105.95	88.20	17.75	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5955 MHz		
Polarization:	Vertical		
Remark:			

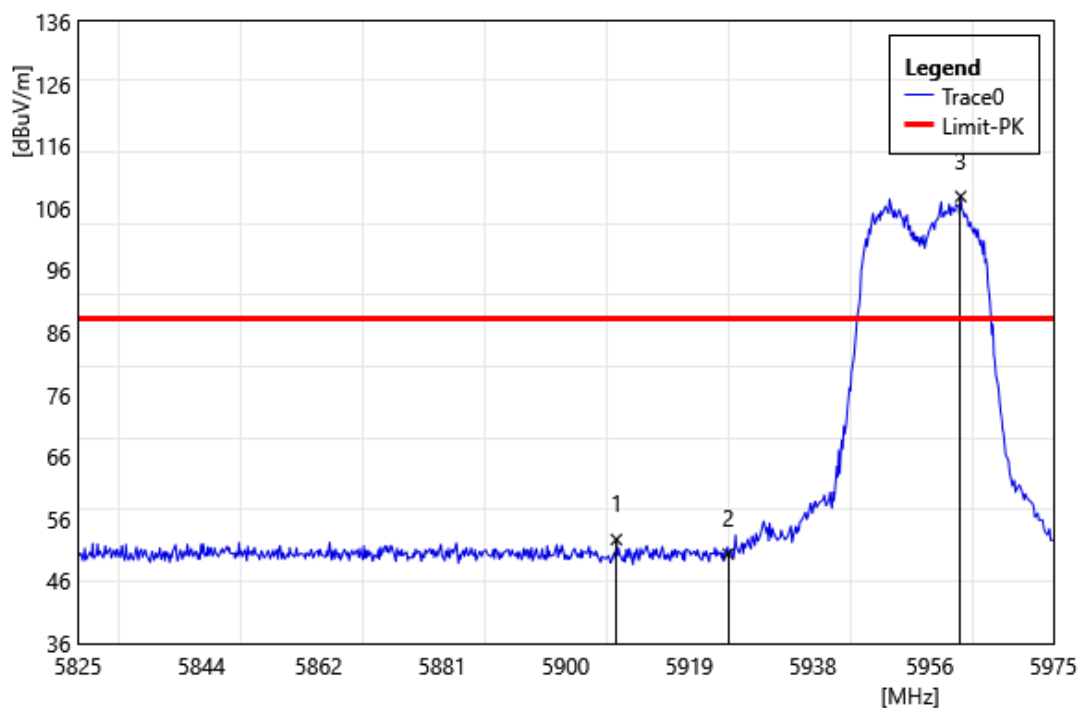


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5907.80	49.51	3.19	52.70	88.20	-35.50	PEAK
2	5925.00	47.24	3.15	50.39	88.20	-37.81	PEAK
3	5960.75	104.80	3.09	107.89	88.20	19.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Vertical		
Remark:			

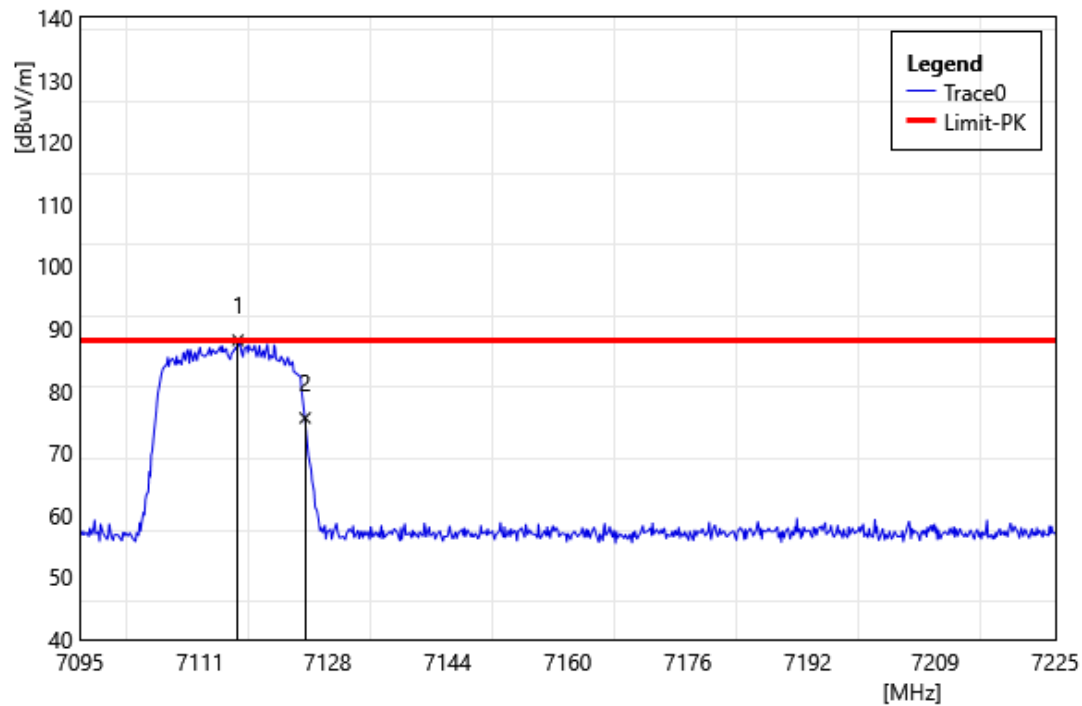


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7116.06	81.79	6.33	88.12	88.20	-0.08	PEAK
2	7125.00	69.30	6.32	75.62	88.20	-12.58	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Horizontal		
Remark:			

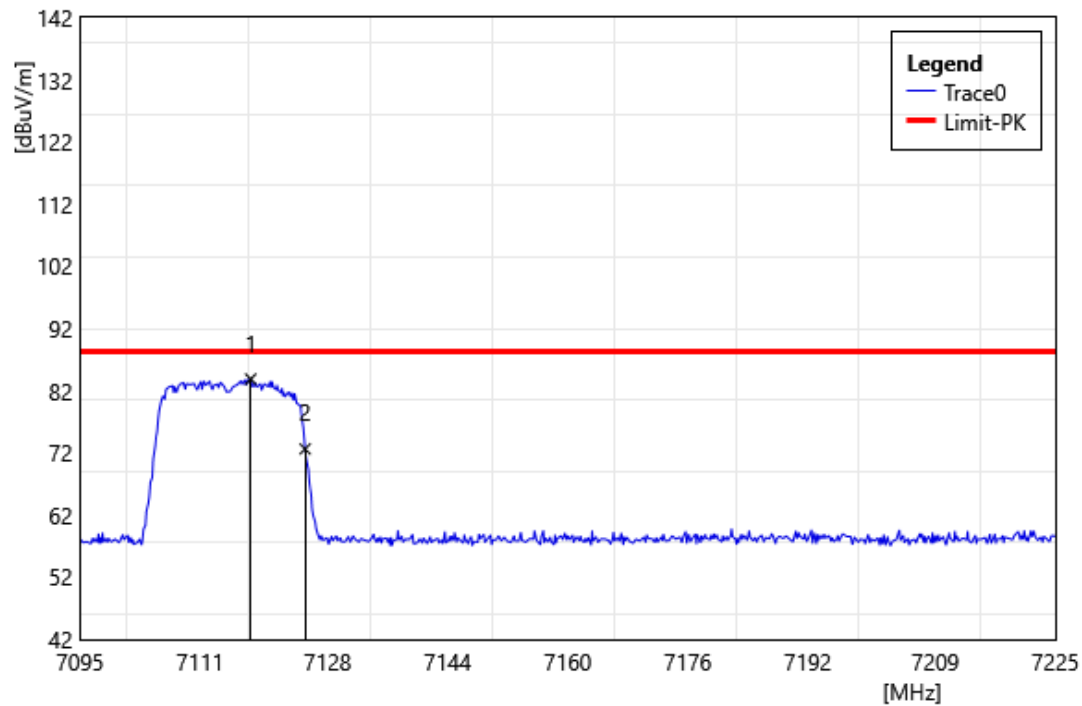


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7117.75	77.54	6.33	83.87	88.20	-4.33	PEAK
2	7125.00	66.31	6.32	72.63	88.20	-15.57	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5965 MHz		
Polarization:	Horizontal		
Remark:			

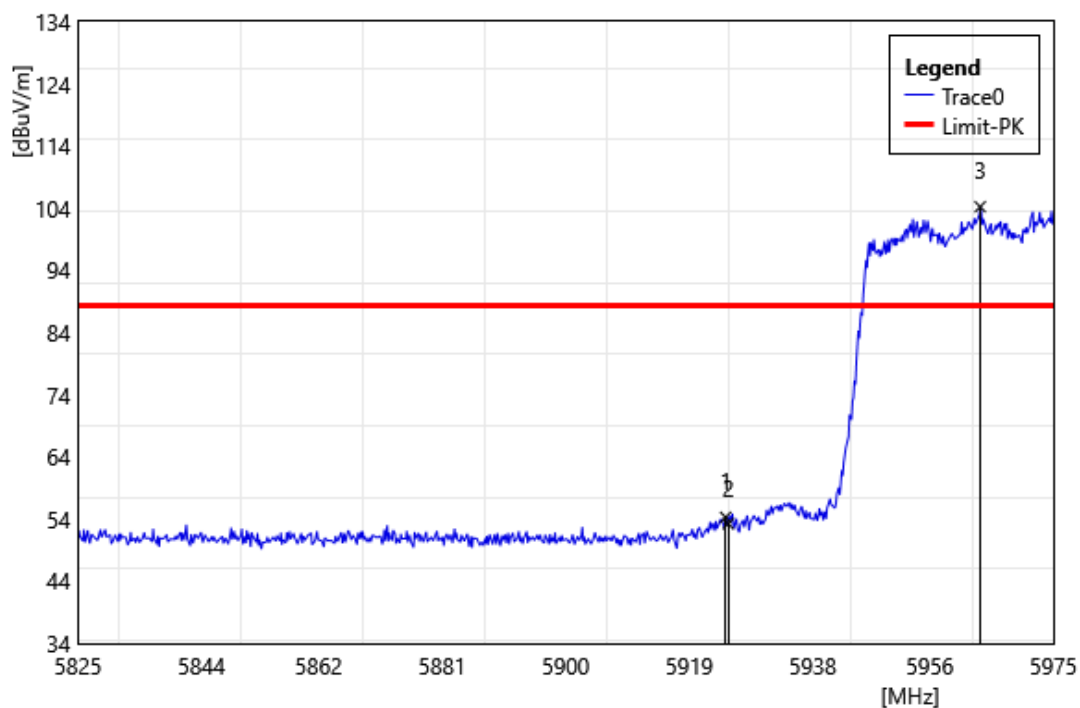


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.60	51.14	3.15	54.29	88.20	-33.91	PEAK
2	5925.00	50.10	3.15	53.25	88.20	-34.95	PEAK
3	5963.75	101.15	3.08	104.23	88.20	16.03	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5965 MHz		
Polarization:	Vertical		
Remark:			

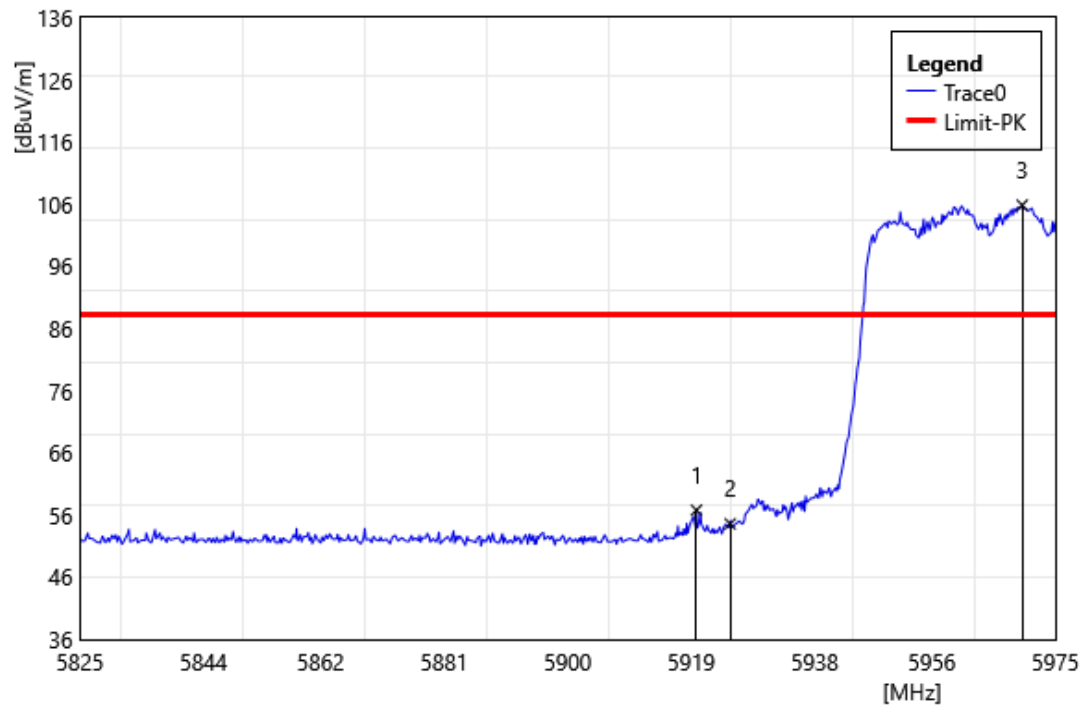


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5919.80	53.63	3.16	56.79	88.20	-31.41	PEAK
2	5925.00	51.45	3.15	54.60	88.20	-33.60	PEAK
3	5969.90	102.76	3.08	105.84	88.20	17.64	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 7085 MHz		
Polarization:	Horizontal		
Remark:			

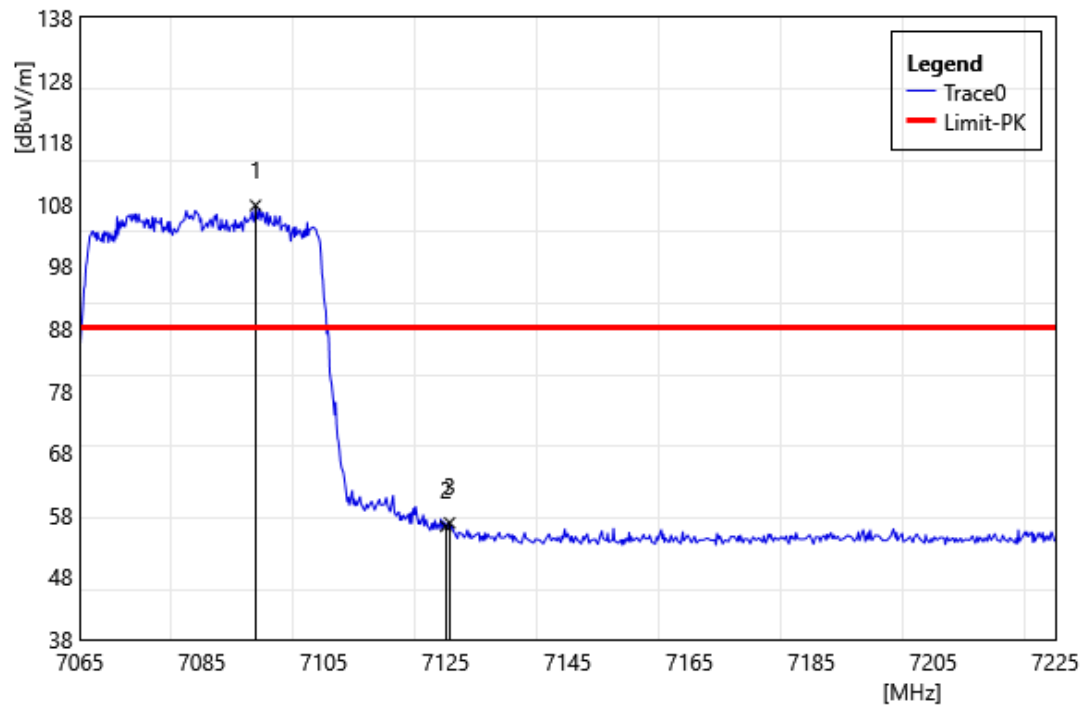


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7093.80	101.44	6.37	107.81	88.20	19.61	PEAK
2	7125.00	49.87	6.32	56.19	88.20	-32.01	PEAK
3	7125.64	50.43	6.31	56.74	88.20	-31.46	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 7085 MHz		
Polarization:	Vertical		
Remark:			

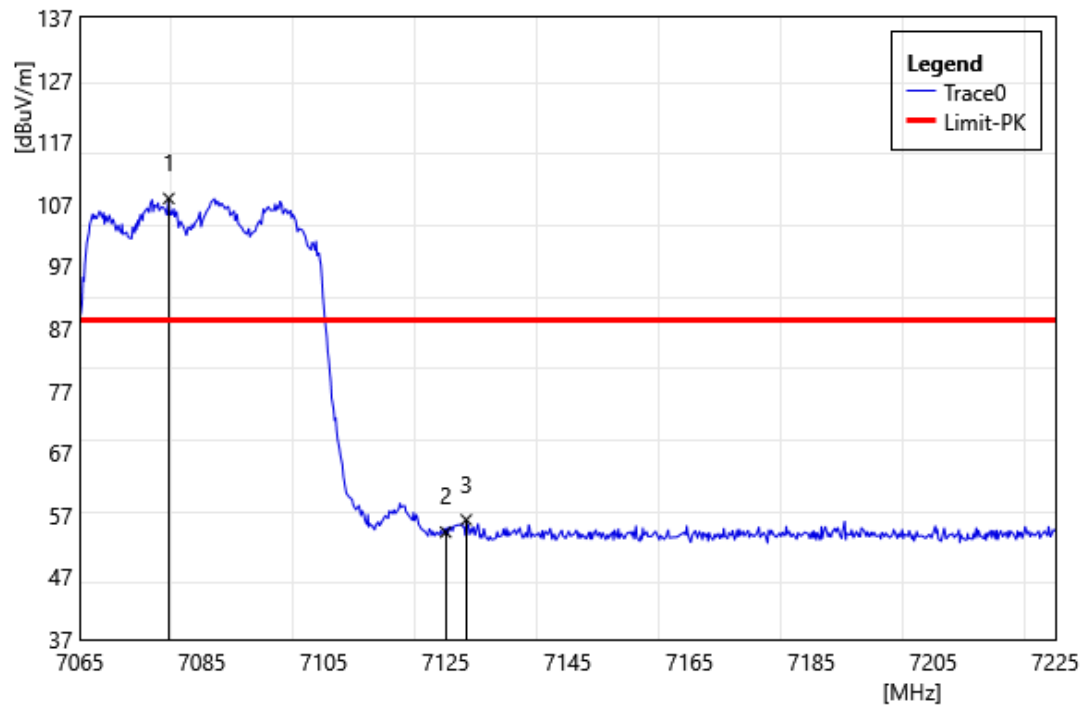


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7079.56	101.52	6.40	107.92	88.20	19.72	PEAK
2	7125.00	47.92	6.32	54.24	88.20	-33.96	PEAK
3	7128.36	49.93	6.31	56.24	88.20	-31.96	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5985 MHz		
Polarization:	Horizontal		
Remark:			

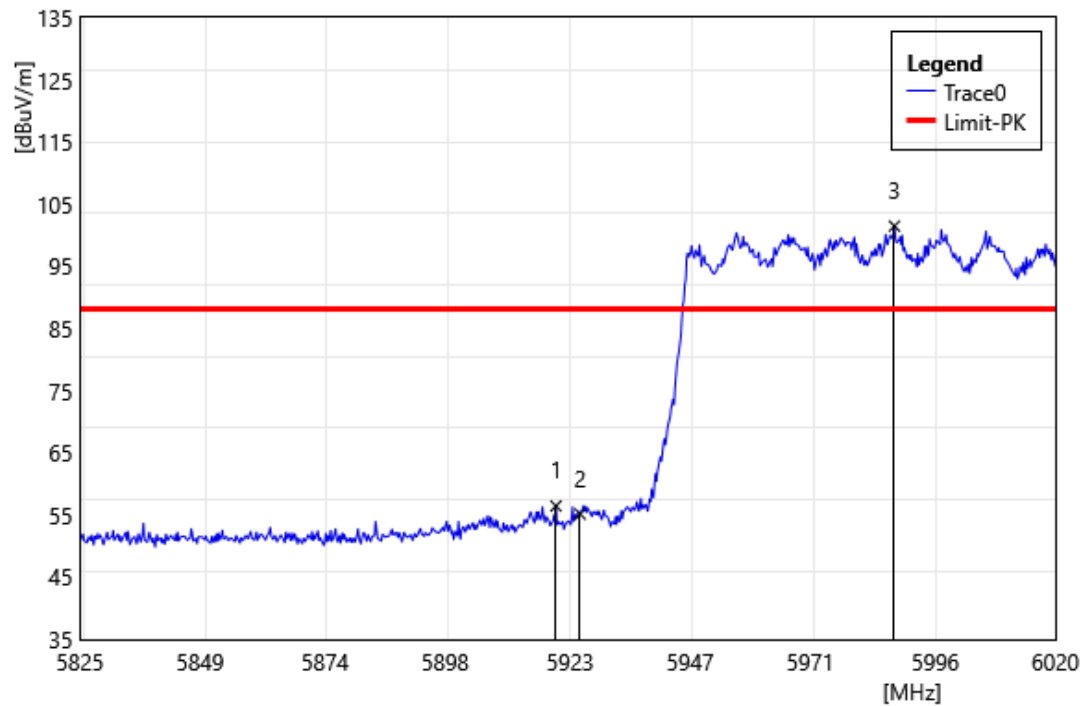


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.16	53.29	3.16	56.45	88.20	-31.75	PEAK
2	5925.00	52.01	3.15	55.16	88.20	-33.04	PEAK
3	5987.83	98.41	3.07	101.48	88.20	13.28	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5985 MHz		
Polarization:	Vertical		
Remark:			

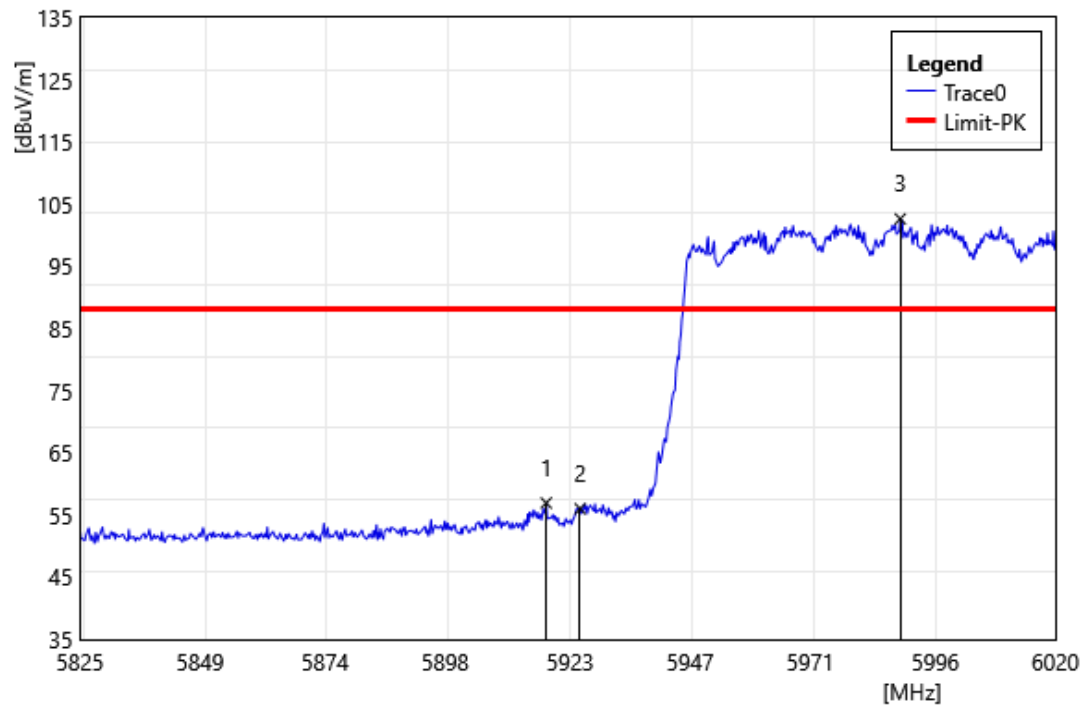


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.21	53.78	3.17	56.95	88.20	-31.25	PEAK
2	5925.00	52.87	3.15	56.02	88.20	-32.18	PEAK
3	5989.00	99.56	3.07	102.63	88.20	14.43	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 7025 MHz		
Polarization:	Horizontal		
Remark:			

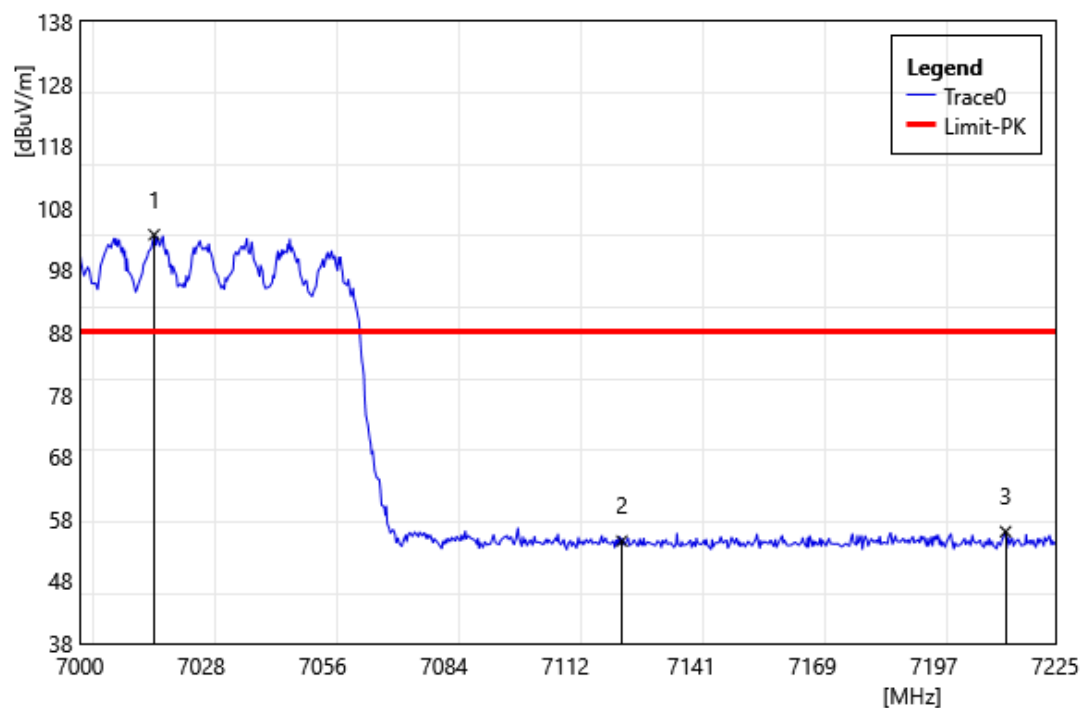


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7017.10	97.29	6.44	103.73	88.20	15.53	PEAK
2	7125.00	48.14	6.32	54.46	88.20	-33.74	PEAK
3	7213.53	49.49	6.48	55.97	88.20	-32.23	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 7025 MHz		
Polarization:	Vertical		
Remark:			

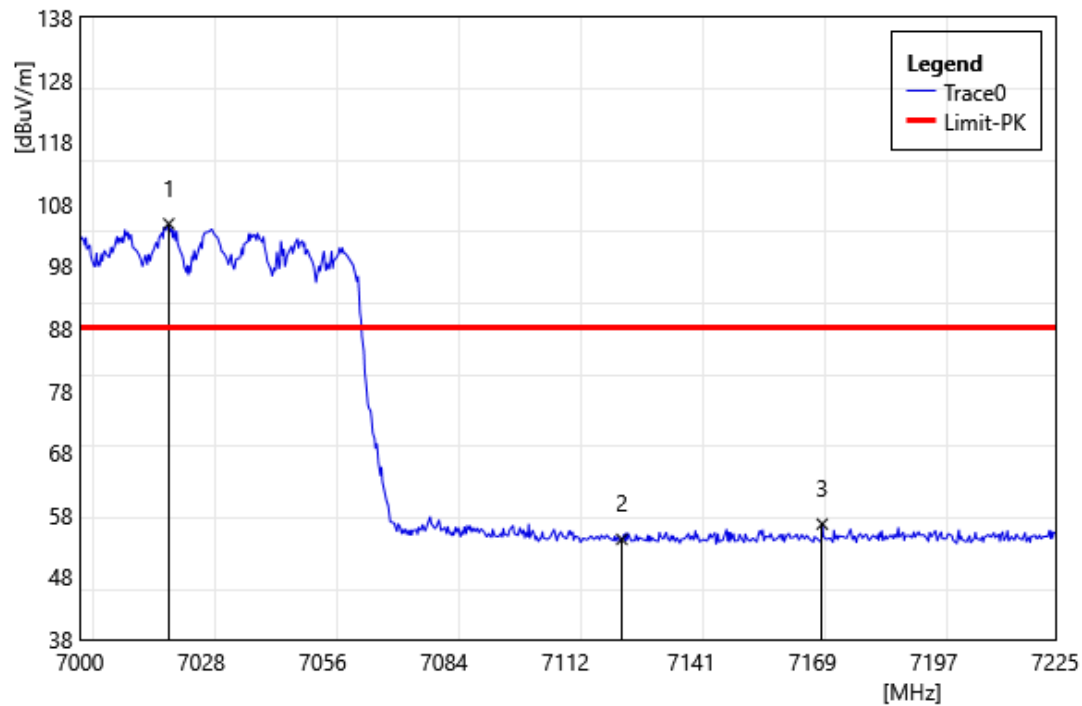


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7020.48	98.41	6.44	104.85	88.20	16.65	PEAK
2	7125.00	47.78	6.32	54.10	88.20	-34.10	PEAK
3	7171.23	50.20	6.35	56.55	88.20	-31.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6025 MHz		
Polarization:	Horizontal		
Remark:			

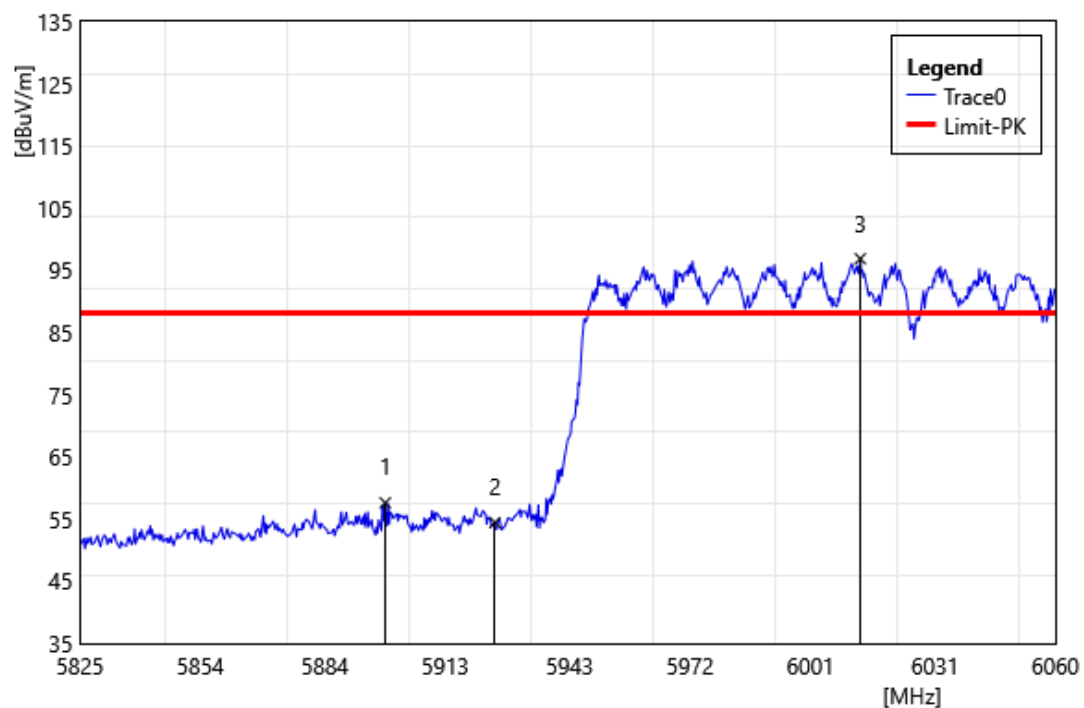


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5898.56	54.39	3.21	57.60	88.20	-30.60	PEAK
2	5925.00	51.27	3.15	54.42	88.20	-33.78	PEAK
3	6013.00	93.71	3.15	96.86	88.20	8.66	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6025 MHz		
Polarization:	Vertical		
Remark:			

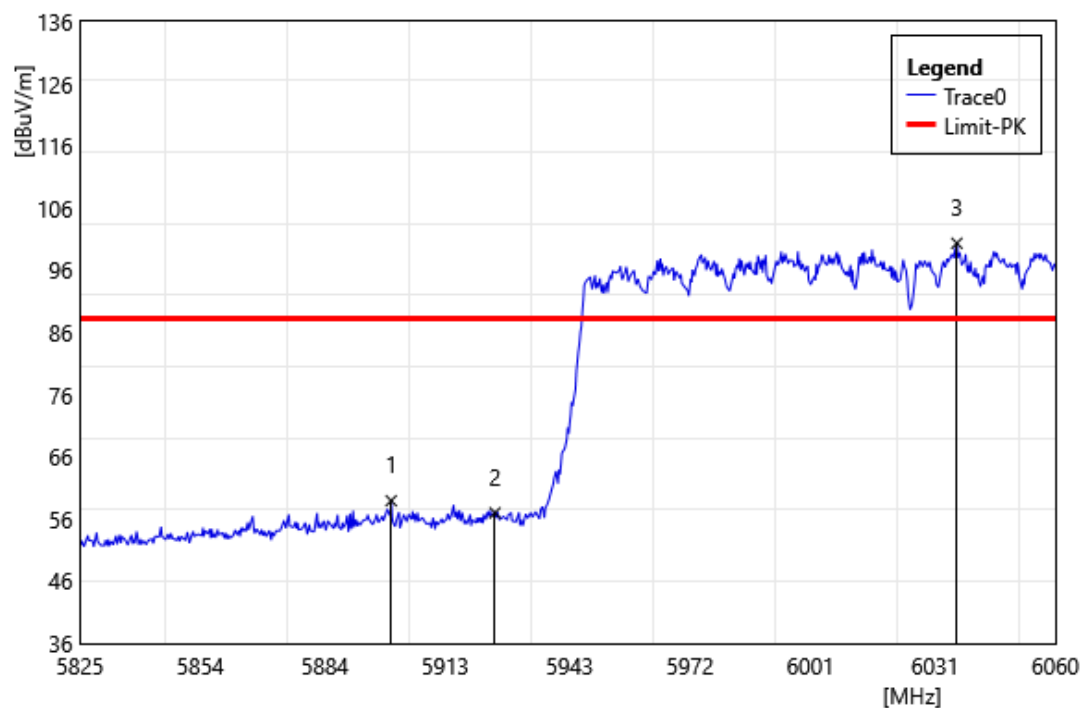


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5899.97	55.73	3.21	58.94	88.20	-29.26	PEAK
2	5925.00	53.84	3.15	56.99	88.20	-31.21	PEAK
3	6036.27	97.05	3.31	100.36	88.20	12.16	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6985 MHz		
Polarization:	Horizontal		
Remark:			

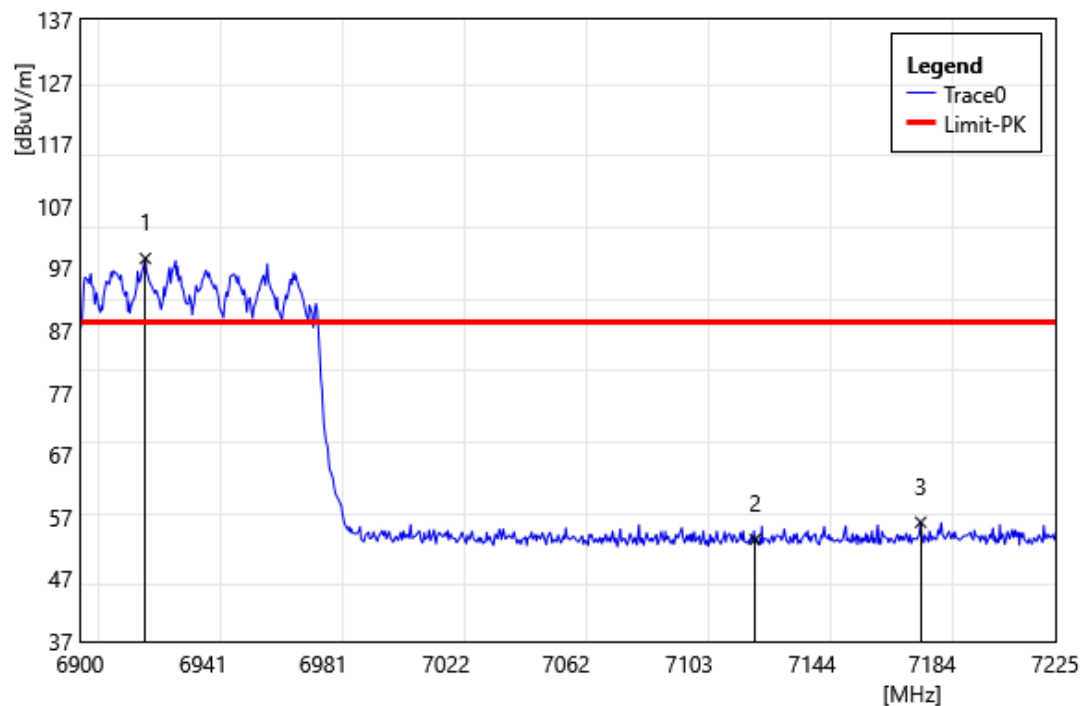

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6921.78	92.32	6.26	98.58	88.20	10.38	PEAK
2	7125.00	47.10	6.32	53.42	88.20	-34.78	PEAK
3	7180.15	49.77	6.39	56.16	88.20	-32.04	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 6985 MHz		
Polarization:	Vertical		
Remark:			

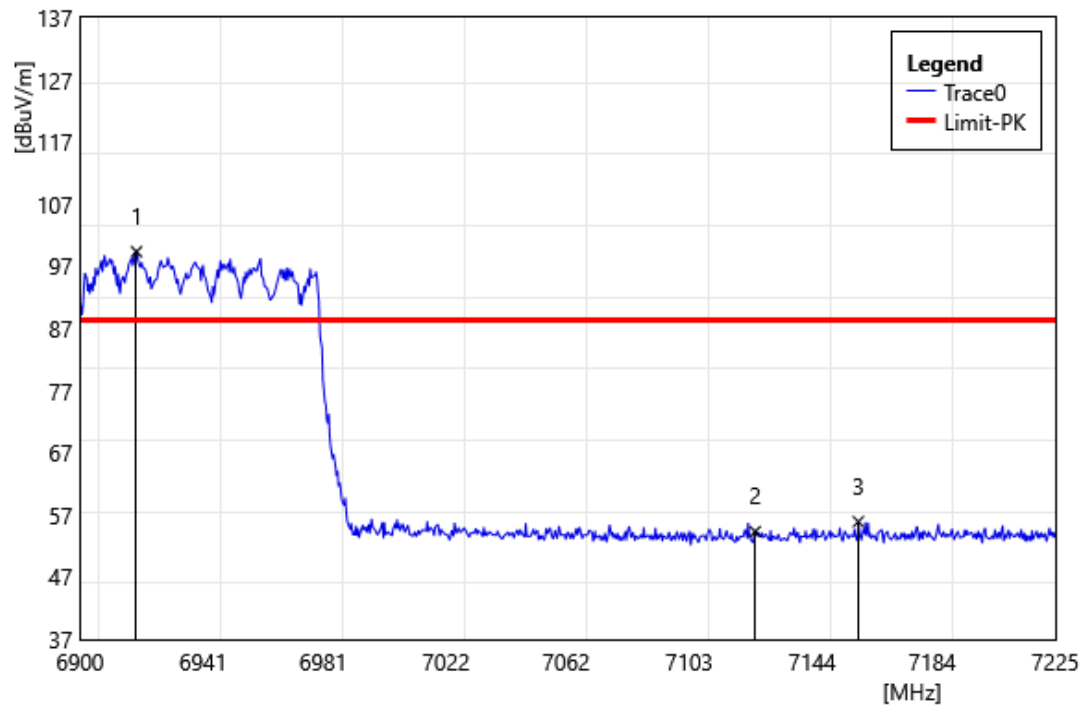

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6918.85	93.10	6.26	99.36	88.20	11.16	PEAK
2	7125.00	48.02	6.32	54.34	88.20	-33.86	PEAK
3	7159.35	49.64	6.31	55.95	88.20	-32.25	PEAK


Average

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 7115 MHz		
Polarization:	Horizontal		
Remark:			

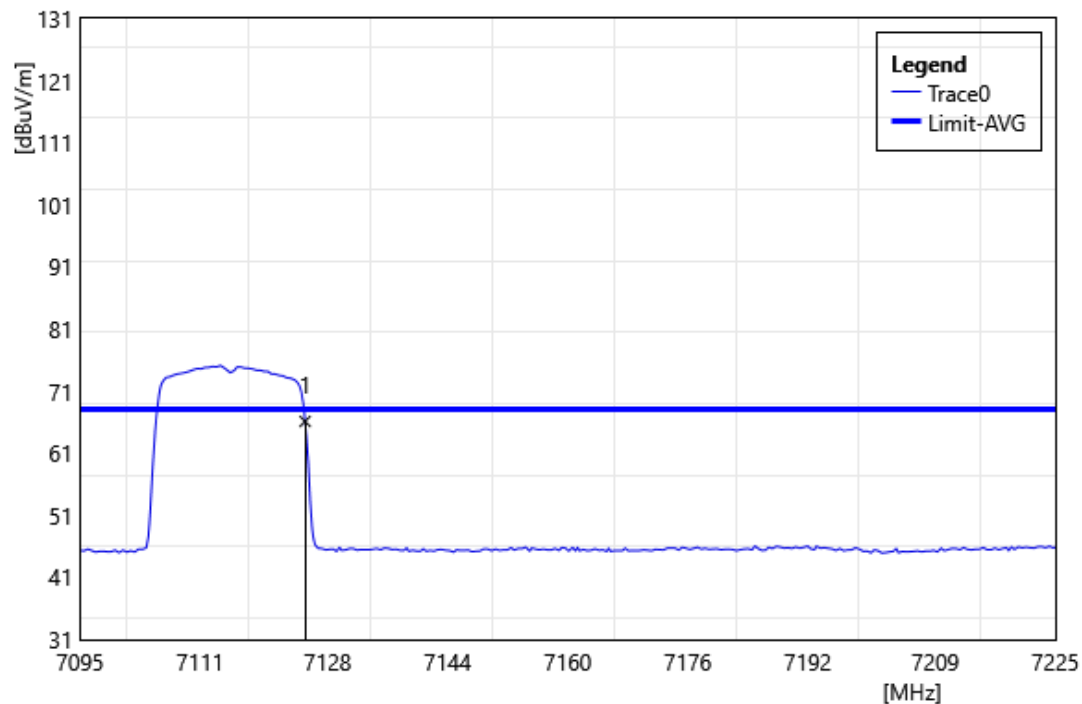


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.81	6.32	66.13	68.20	-2.07	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 7115 MHz		
Polarization:	Vertical		
Remark:			

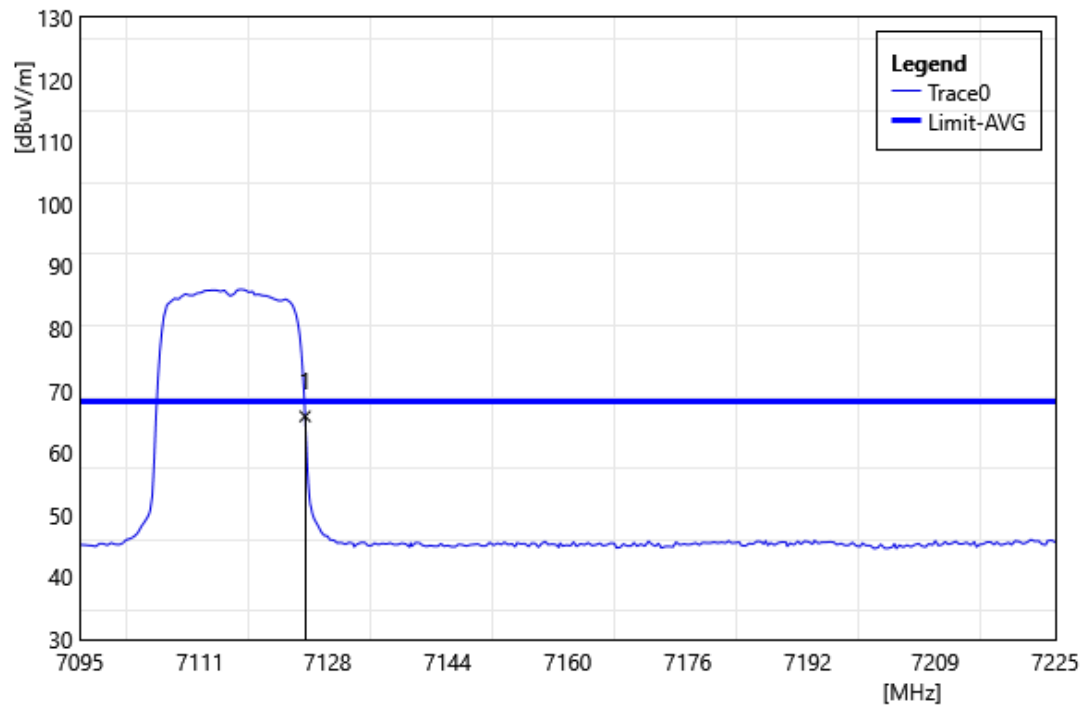


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.55	6.32	65.87	68.20	-2.33	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Horizontal		
Remark:			

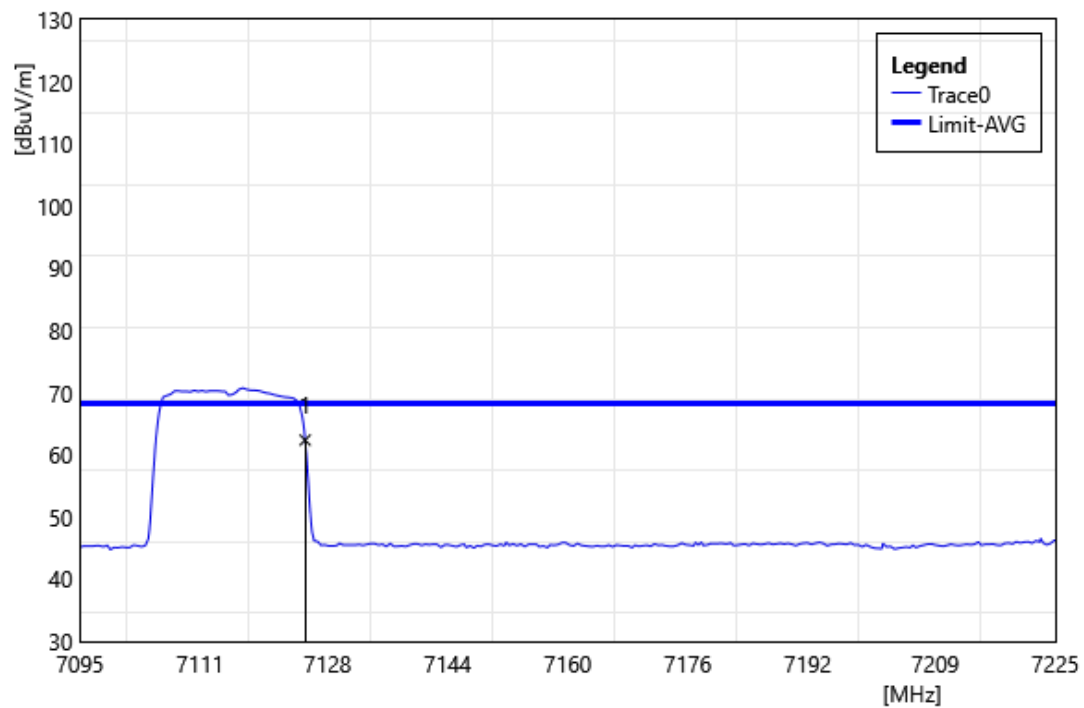

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	56.06	6.32	62.38	68.20	-5.82	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Vertical		
Remark:			

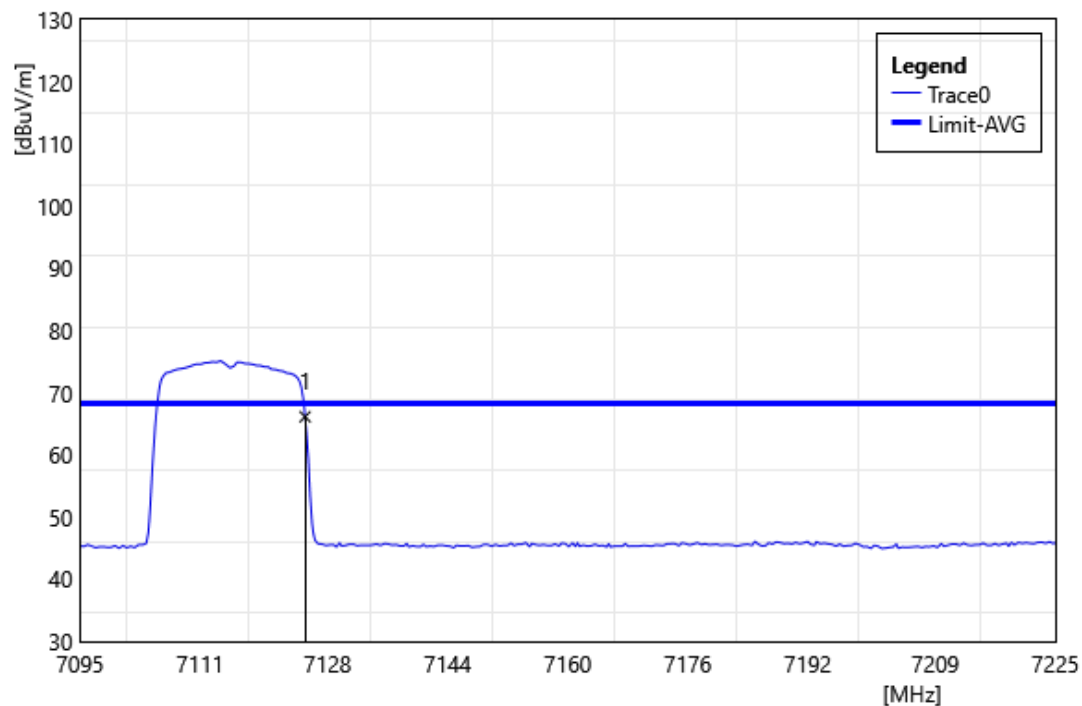

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.81	6.32	66.13	68.20	-2.07	AVG