



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 22 & 24

Applicant Name:

Elster Solutions, LLC
208 S. Rogers Lane
Raleigh, NC 27610
United States

Date of Testing:

May 27 - June 01, 2015

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1505260992.QZC

FCC ID:**QZCWWIC3EV****APPLICANT:****ELSTER SOLUTIONS, LLC****Application Type:**

Class II Permissive Change

Model(s):

EA_GKWWIC3_EVXV

EUT Type:

EA_Gatekeeper with Wireless WIC3G

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

§2 §22(H) §24(E)

Test Procedure(s):

ANSI/TIA-603-C-2004, KDB 971168 v02r02

Test Device Serial No.:

identical prototype [S/N: 16672623]

Class II Permissive Change:

Please see FCC change document

Original Grant Date:

December 26, 2013

Mode	Tx Frequency (MHz)	ERP/EIRP	
		Max. Power (W)	Max. Power (dBm)
CDMA850	824.70 - 848.31	0.127	21.04
CDMA1900	1851.25 - 1908.75	0.308	24.89

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortañez
President




FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 1 of 18

TABLE OF CONTENTS

FCC PART 22 & 24 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES.....	5
2.3 TEST CONFIGURATION.....	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
3.0 DESCRIPTION OF TESTS	6
3.1 EVALUATION PROCEDURE	6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....	6
3.4 PCS - BASE FREQUENCY BLOCKS.....	6
3.5 PCS - MOBILE FREQUENCY BLOCKS.....	7
3.6 RADIATED MEASUREMENTS.....	7
4.0 TEST EQUIPMENT CALIBRATION DATA	8
5.0 SAMPLE CALCULATIONS	9
6.0 TEST RESULTS.....	10
6.1 SUMMARY.....	10
6.2 RADIATED POWER (ERP/EIRP)	11
6.3 RADIATED SPURIOUS EMISSIONS MEASUREMENTS	13
7.0 CONCLUSION.....	18

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 2 of 18



MEASUREMENT REPORT

FCC Part 22 & 24




§2.1033 General Information

APPLICANT: Elster Solutions, LLC
APPLICANT ADDRESS: 208 S. Rogers Lane
 Raleigh, NC 27610, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA
FCC RULE PART(S): §2 §22(H) §24(E)
BASE MODEL: EA_GKWWIC3_EVXV
FCC ID: QZCWWIC3EV
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
MODE: CDMA
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm)
Test Device Serial No.: 16672623 ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: May 27 - June 01, 2015
TEST REPORT S/N: 0Y1505260992.

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025:2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 3 of 18

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

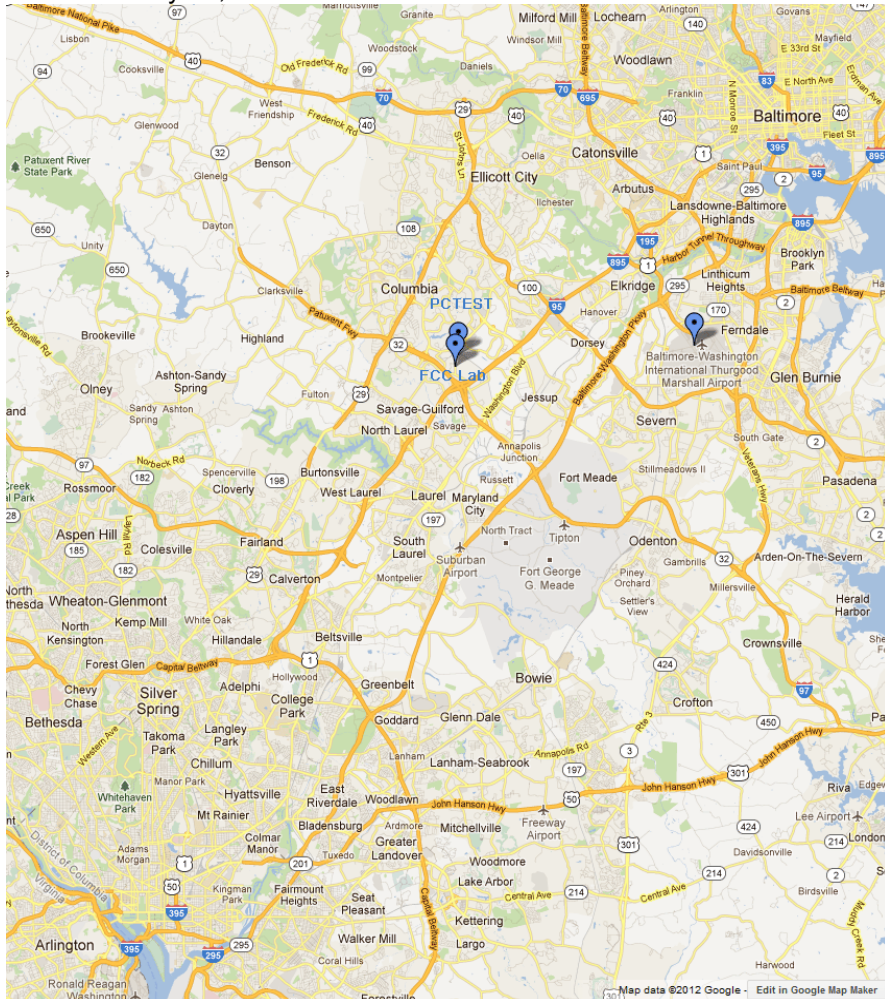


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: QZCWWIC3EV	 FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G	Page 4 of 18

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Elster EA_Gatekeeper with Wireless WIC3G FCC ID: QZCWWIC3EV**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO, 900MHz ISM Tx

2.3 Test Configuration

The Elster EA_Gatekeeper with Wireless WIC3G FCC ID: QZCWWIC3EV was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168 v02r02. See Section 6.0 of this test report for a description of the radiated tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 5 of 18

3.0 DESCRIPTION OF TESTS


3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 v02r02) were used in the measurement of the **Elster EA_Gatekeeper with Wireless WIC3G FCC ID: QZCWWIC3EV**.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

§22.905

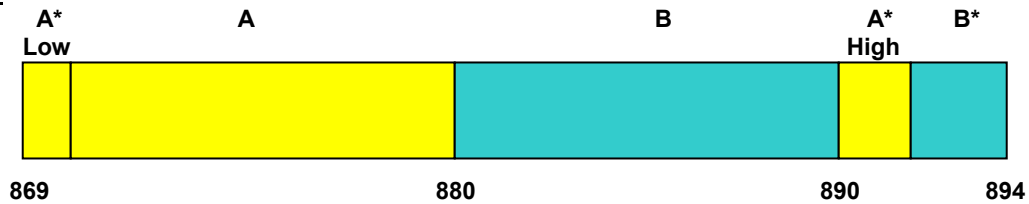

BLOCK 1: 869 – 880 MHz (A* Low + A)


BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

§22.905

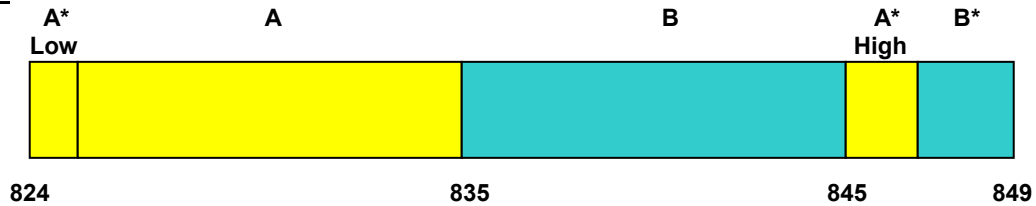

BLOCK 1: 824 – 835 MHz (A* Low + A)


BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

§24.229

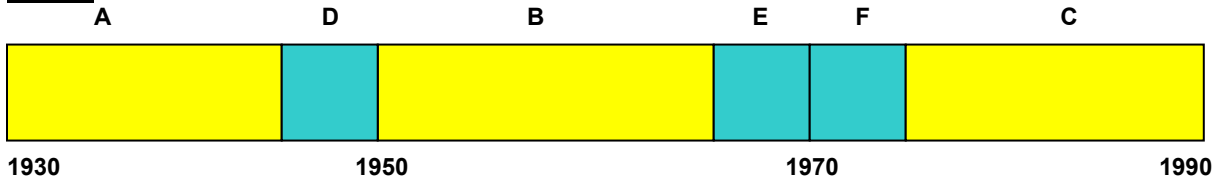

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 6 of 18

3.5 PCS - Mobile Frequency Blocks

§24.229

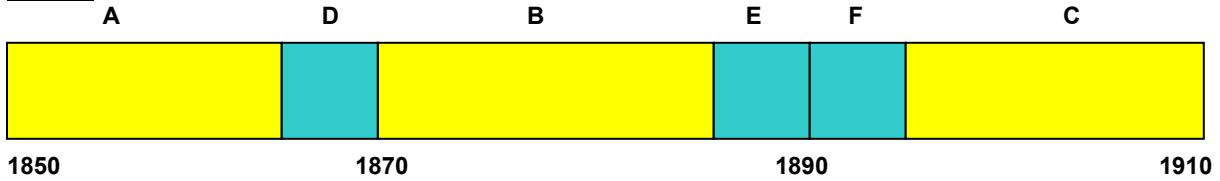

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.6 Radiated Measurements

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a)

Radiated power measurements are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

Radiated power levels are investigated with the receive antenna vertically polarized while radiated spurious emissions levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-C-2004.

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 7 of 18

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	10/24/2014	Annual	10/24/2015	N/A
Agilent	8447D	Broadband Amplifier	6/2/2014	Annual	6/2/2015	1937A03348
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/28/2014	Annual	10/28/2015	3613A00315
Agilent	E5515C	Wireless Communications Test Set	2/23/2015	Biennial	2/23/2017	GB41450275
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	6/8/2014	Annual	6/8/2015	MY49432391
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Anritsu	MA2411B	Pulse Sensor	4/8/2014	Biennial	4/8/2016	846215
Com-Power	PAM-118A	Pre-Amplifier	4/10/2015	Annual	4/10/2016	551042
Emco	6502	Active Loop Antenna (10k - 30 MHz)	6/24/2014	Biennial	6/24/2016	267
K & L	11SH10	Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	3
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	6/19/2013	Biennial	6/19/2015	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/19/2013	Biennial	6/19/2015	A042511
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

Table 4-1. Test Equipment

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 8 of 18

5.0 SAMPLE CALCULATIONS

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 9 of 18

6.0 TEST RESULTS

6.1 Summary

Company Name: Elster Solutions, LLC
 FCC ID: QZCWWIC3EV
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.2
2.1053 22.917(a) 24.238(a)	Radiated Spurious Emissions	> 43 + log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.3

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G	Page 10 of 18	

6.2 Radiated Power (ERP/EIRP)

§22.913(a)(2) 24.232(c)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: QZCWWIC3EV			FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G	Page 11 of 18	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

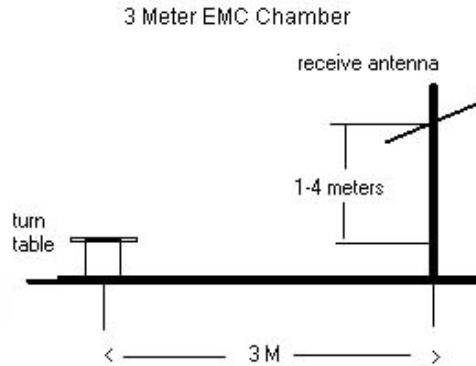


Figure 6-1. Test Instrument & Measurement Setup

Test Notes

- 1) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested while powered by an AC power source.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

Frequency [MHz]	Mode	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	22.56	-1.85	V	20.71	0.118	38.45	-17.74
836.52	CDMA850	22.98	-1.94	V	21.04	0.127	38.45	-17.41
848.31	CDMA850	22.74	-2.04	V	20.70	0.118	38.45	-17.75

Table 6-2. ERP (Cellular CDMA)

Frequency [MHz]	Mode	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	16.91	7.97	V	24.89	0.308	33.01	-8.12
1880.00	CDMA1900	14.91	8.02	V	22.94	0.197	33.01	-10.07
1908.75	CDMA1900	15.19	8.10	V	23.30	0.214	33.01	-9.71

Table 6-3. EIRP (PCS CDMA)

FCC ID: QZCWWIC3EV	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 12 of 18

6.3 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) 24.238(a)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

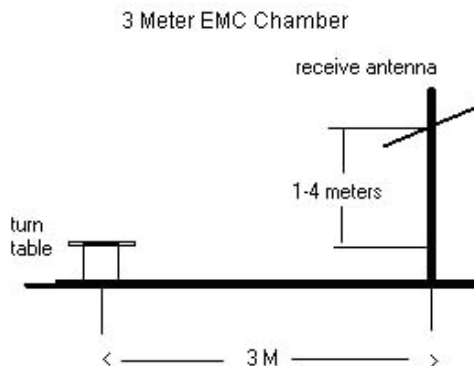


Figure 6-2. Test Instrument & Measurement Setup

FCC ID: QZCWWIC3EV	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G	Page 13 of 18

Test Notes

- 1) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested while powered by an AC power source.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 20.71 dBm = 0.118 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.71

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1649.40	-58.12	6.34	-51.78	V	72.5
2474.10	-54.56	6.59	-47.97	V	68.7
3298.80	-70.31	6.97	-63.34	V	84.1
4123.50	-71.34	7.61	-63.73	V	84.4

Table 6-4. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 14 of 18

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 21.04 dBm = 0.127 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.04

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.04	-58.90	6.19	-52.71	V	73.8
2509.56	-52.67	6.58	-46.09	V	67.1
3346.08	-60.35	7.16	-53.19	V	74.2
4182.60	-71.99	7.99	-64.00	V	85.0

Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 20.70 dBm = 0.118 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.70

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1696.62	-55.39	6.04	-49.36	V	70.1
2544.93	-56.72	6.71	-50.01	V	70.7
3393.24	-73.24	7.35	-65.89	V	86.6
4241.55	-71.98	8.26	-63.72	V	84.4

Table 6-6. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 24.89 dBm = 0.308 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.89

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3702.50	-49.43	9.92	-39.51	V	64.4
5553.75	-51.77	11.11	-40.66	V	65.5
7405.00	-64.19	10.75	-53.45	V	78.3

Table 6-7. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 22.94 dBm = 0.197 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.94

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3760.00	-49.73	9.70	-40.03	V	64.9
5640.00	-57.65	11.25	-46.41	V	71.3
7520.00	-64.40	10.99	-53.41	V	78.3

Table 6-8. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 23.30 dBm = 0.214 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.30

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3817.50	-48.88	9.49	-39.39	V	64.3
5726.25	-56.35	11.30	-45.06	V	69.9
7635.00	-64.85	11.22	-53.63	V	78.5

Table 6-9. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 17 of 18

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Elster EA_Gatekeeper with Wireless WIC3G FCC ID: QZCWWIC3EV** complies with all the requirements of Parts 22 & 24 of the FCC rules.

FCC ID: QZCWWIC3EV		FCC Pt. 22 & 24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1505260992.QZC	Test Dates: May 27 - June 01, 2015	EUT Type: EA_Gatekeeper with Wireless WIC3G		Page 18 of 18