



TCP Dr. Genz (HK) Co., Ltd.


# Test Report

**FCC RULES 47CFR PART 15 / SUBPART C (Section 15.231)**

**Test report no.: H1M20810-7070-P-15**

**FCC ID: QZHSCILRFK100T**

**Accredited Laboratory by:**

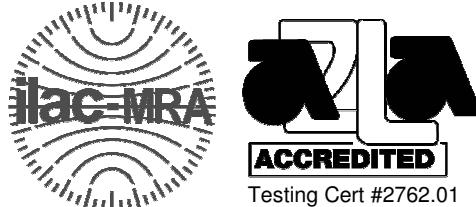

## TEST REPORT

### Summary | FCC RULES 47CFR PART 15 / SUBPART C

Test Report No. ....: H1M20810-7070-P-15

Date of issue .....: 13.11.2008

**Testing Laboratory name** ....: TCP Dr. Genz (HK) Co., Ltd.

Address .....: 26/F., Tamson Plaza, 161 Wai Yip Street,  
Kwun Tong, Kowloon, Hong Kong

**Applicant's name** .....: Styling City Industries Limited

Address .....: Kowloon Bay, Kowloon, Hong Kong

**Manufacturer's name** .....: Styling City Industries Limited

Address .....: Kowloon Bay, Kowloon, Hong Kong

#### Test specification

Standard(s) applied .....: FCC Rules 47 CFR Part15 Subpart C (Section 15.231) /1

.....:

**Test item description** .....: Remote Control Switch Transmitter

Brand Name .....: ---

Model and/or type reference ...: RFK100T

Rating(s) .....: 12V battery (Type 23A)

#### Summary of Test Results

**Pass**

*The Summary of Test Results based on a technical opinion belongs to the applied standard(s).*

#### Disclaimer

*Further details of testing are provided in particular chapters of this Test Report.*

*This document base on General Terms and Conditions of TCP Dr. Genz (HK) Co., Ltd., which the applicant accepted with order confirmation.*

#### Emphasized conditions or project related conditions:

*Released Test Reports apply only to the specific samples tested under stated test conditions. It is the applicant's responsibility to assure that additional production units of the tested model(s) are manufactured in same construction and with identical electrical and mechanical components to meet the same quality as tested model(s). The applicant/manufacturer/importer is responsible for any modifications made to the production units which result in non-compliance to the applied and/or relevant regulations. TCP Dr. Genz (HK) Co., Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from any kind of issued reports. Reports are confidential property of the client. As a mutual protection to the applicant, the clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*

## TABLE OF CONTENTS

<b>1. General Information</b>	<b>3</b>
<b>1.1 Tester</b>	<b>3</b>
<b>1.2 Testing laboratory</b>	<b>4</b>
<b>1.3 Details of applicant</b>	<b>5</b>
<b>1.4 Application details</b>	<b>5</b>
<b>1.5 Manufacturer</b>	<b>5</b>
<b>1.6 Test item</b>	<b>6</b>
<b>2 Technical test</b>	<b>7</b>
<b>2.1 Summary of test results</b>	<b>7</b>
<b>2.2 Test environment</b>	<b>7</b>
<b>2.3 Test equipment utilized</b>	<b>7</b>
<b>2.4 Test procedure</b>	<b>8</b>
<b>2.5 Test results Overview</b>	<b>9</b>
<b>3 Transmitter parameter</b>	<b>10</b>
<b>3.1 Field Strength of the Fundamental Wave</b>	<b>10</b>
<b>3.2 Radiated Spurious Emissions</b>	<b>11</b>
<b>3.3 Emission Bandwidth</b>	<b>14</b>
<b>3.4 Automatically Deactivation</b>	<b>14</b>
<b>4 Disclaimer</b>	<b>15</b>
<b>5 Normative references</b>	<b>16</b>
<b>Annex: A – Photos</b>	<b>Number of Pages</b>
<b>Annex: B – Field Strength of the Fundamental Wave</b>	<b>7</b>
<b>Annex: C – Radiated Spurious Emissions</b>	<b>Number of Pages</b>
<b>Annex: D – Emission Bandwidth</b>	<b>2</b>
<b>Annex: C – Radiated Spurious Emissions</b>	<b>6</b>
<b>Annex: D – Emission Bandwidth</b>	<b>2</b>


## 1. General Information

### 1.1 Tester

Operator:

13.11.2008

Mr. Scott Li



Date

Test Engineer

Signature

Approved by:

13.11.2008

Mr. F. Schulz



Date

Laboratory Manager

Signature



## 1.2 Testing laboratory

Name : TCP Dr. Genz (HK) Co., Ltd.  
Street : 26/F., Tamson Plaza, 161 Wai Yip Street  
Town : Kwun Tong, Kowloon  
Country : Hong Kong  
Telephone : +852 2389 2200  
Fax : +852 2389 3073

**Note:** Test environment and test equipment available in accordance to ISO/IEC/EN 17025 requirements. Accreditation certificates for confirmation can be shown on request.

### **A2LA Accredited Testing Laboratory**

Testing Cert# 2762.01

Name : Hong Kong Productivity Council  
Street : EMC Centre, LG1, HKPC Building, 78 Tat Chee Avenue  
Town : Kowloon  
Country : Hong Kong

**Note:** Test environment and test equipment available in accordance to ISO/IEC/EN 17025 requirements. Accreditation certificates for confirmation can be shown on request.

### **The Hong Kong Laboratory Accreditation Scheme (HOKLAS)**

Reg. No.082

### **FCC registered measurement facility**

Reg. No.90656

### **1.3 Details of applicant**

Name : : Styling City Industries Limited  
Street : : Unit 418, International Plaza, 20 Sheung Yuet Road

Town : Kowloon Bay, Kowloon  
Country : Hong Kong  
Telephone : +852 2751 9023  
Fax : +852 2751 9817  
E-mail : lam@stylingcity.com.hk

Contact : Mr. K.W. Lam  
Telephone : +852 2751 9023

### **1.4 Application details**

Date of receipt of application : 09.10.2008  
Date of receipt of test item : 09.10.2008  
Date of test : 09.10.2008 – 13.11.2008

### **1.5 Manufacturer (if different from applicant in point 1.3)**

Name :  
Street :  
Town :  
Country :

## 1.6 Test item

Description of test item	Remote Control Switch Transmitter
Type identification	RFK100T
Brand Name	---
Operation Frequency	305 MHz
Operation frequency drift	± 100 kHz
Operation mode	simplex
Class of emission	A1D
Type of antenna	integral
Power supply	12V battery (Type 23A)

## 2 Technical test

### 2.1 Summary of test results

Following conclusion has to be considered as technical opinion belongs to the applied standard(s).

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified in 2.4 were ascertained in the course of the tests performed.

### 2.2 Test environment

Temperature : **23 ± 2 °C**

Relative humidity content : **48 ± 2 %**

Air pressure : **990 ± 5 hPa**

No.	Test equipment	Type	Manufacturer
G003	Humidity/Temperature Meter	TES-1364	TES
E016	Air pressure meter	Standard	Raumklima

### 2.3 Test equipment utilized

**Test Equipment list (Hong Kong Productivity Council, registration number: 90656)**

Test equipment	Type	S/N	Manufacturer	Cal Due Date
Semi-anechoic Chamber	Nil	Nil	Frankonia	28 Mai 09
Test Reciever	ESU 26	100050	Rohde & Schwarz	06 Aug 09
Bi-conical Antenna	HK116	841489/016	Rohde & Schwarz	08 Mar 09
Log.-Periodic Antenna	HL223	841516/020	Rohde & Schwarz	28 Feb 09
Horn Antenna	3115	9002-3351	EMCO	27 Feb 10
Active Loop Antenna	6502	9107-2651	EMCO	20 Dec 09

## 2.4 Test procedure

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.4-2003 6.4/3 using a spectrum analyzer. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was the 100 kHz and the video bandwidth was 300 kHz.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

$$\begin{array}{ll} \text{Freq (MHz)} & \text{METER READING + ACF + CABLE LOSS (to the receiver) = FS} \\ 20 \text{ dB}\mu\text{V} & 20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m @3m} \end{array}$$

**ANSI STANDARD C63.4-2003 6.2.1 MEASUREMENT PROCEDURES:** The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table). The UUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrums were scanned from 9 kHz to 30 MHz and 30 MHz to 10<sup>th</sup> harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings. Measurements were made by Hong Kong Productivity Council at the registered test site located at EMC Centre, LG1, HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong. The registration number is 90656.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

## 2.5 Test results Overview

Report-No. : H1M20810-7070-P-15

Test item : Remote Control Switch Transmitter

Model No. : RFK100T

Brand Name : ---

1<sup>st</sup> test

test after modification

production test

Standard	Description	Remarks	Verdict
<b>FCC Rules 47CFR PART 15.231</b>			
Section 15.231	Field strength of the Fundamental Wave		P
Section 15.231, 15.209	Radiated spurious emission		P
Section 15.231(c)	Emission bandwidth		P
Section 15.231(a)	Automatically deactivation		P

### Test case verdicts

P - Pass

*Test item does meet the requirement*

F - Fail

*Test item does not meet the requirement*

N.A. - Not Applicable

*Test case does not apply to the test object*

### 3 Transmitter parameter

#### 3.1 Field Strength of the Fundamental Wave

##### Test results

###### Calculation of test results:

Such factors like antenna factor and cable loss are already included in the provided measurement results. All results measured with peak detector.

Frequency [MHz]	Antenna Polarization	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin (dB)
305.046	Vertical	68.96	75	6.04
305.050	Horizontal	52.97	75	22.03

Note: The limit is met. For the diagrams see Appendix B.

**Limit 15.231(b)**

Fundamental Frequency [MHz]	Limit	
	[ $\mu$ V/m]	[dB $\mu$ V/m]
	5,625	75

Fundamental Frequency [MHz]	Field strength of fundamental limit [ $\mu$ V/m]
40,66 – 40,70	2,250
70 - 130	1.250
130 - 174	1,250 to 3,750**
174 - 260	3.750
260 - 470	3,750 to 12,000**
Above 470	12,000

According to section 15.35(b), When average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.

### 3.2 Radiated Spurious Emissions

#### (a) Measurement up to 30 MHz

Note: No Relevant emissions are expected in the frequency range 9 kHz to 30 MHz. Nevertheless a check using a near field probe was performed. No relevant emissions have been observed. Consequently no final measurement was performed.

#### (b) Measurement above 30 MHz

##### Calculation of test results:

Such factors like antenna factor and cable loss are already included in the provided measurement results. All results measured with peak detector.

Frequency [MHz]	Antenna Polarization	Result [dB $\mu$ V/m]	Limit Field Strength [dB $\mu$ V/m]	Margin (dB)
*610.420	Vertical	40.95	46	5.05
*610.420	Horizontal	35.82	46	10.18
916.63	Vertical	44.57	55	10.43
915.63	Horizontal	40.00	55	15.00
*1216.43	Vertical	42.37	54	11.63
*1216.43	Horizontal	31.65	54	22.35

\* This frequency fall into the restricted band.

Note: The limit is met. The measurement was performed up to the 10<sup>th</sup> harmonic.

No (further) spurious emissions in the range 20 dB below the limit found.

The measurement was performed up to the 10<sup>th</sup> harmonic. For the diagram see appendix C.

**Limits for Spurious Emission:**

**1. Limit 15.231(b)**

Fundamental Frequency [MHz]	Limit [dB $\mu$ V/m]
305	55

Fundamental Frequency [MHz]	Field strength of Spurious Emission limit [ $\mu$ V/m]
40,66 – 40,70	225
70 - 130	125
130 - 174	125 to 375**
174 - 260	375
260 - 470	375 to 1,250**
Above 470	1,250

According to section 15.35(b), When average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.

**2. A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1GHz) and average (> 1GHz) field strength is listed in § 15.209(a).**

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36-13.41			

**3. FCC Part 15, Subpart C, §15.209, Radiated Emission Limits**

Frequency of Emission [MHz]	Field strength [ $\mu$ V/m]	Field Strength [dB $\mu$ V/m]
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

### 3.3 Emission Bandwidth

#### Limit

The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

#### Test result

Measurement of Necessary Bandwidth (BN)

Used Frequency	Measured Bandwidth	Limit	Passed
305 MHz	9.55 kHz	762.5 kHz	<input checked="" type="checkbox"/>
Measurement uncertainty	<10Hz		

Note: The limit is met. For the diagram see appendix D.

### 3.4 Automatically Deactivation

This transmitter is activated manually by a switch and is deactivated automatically within 5 seconds after release the switch as confirmed by testing engineer.  
It fulfills all requirements according Section 15.231(a).

## 4 Disclaimer

This document based on General Terms and Conditions of TCP Dr. Genz (HK) Co., Ltd., which the applicant accepted with order confirmation.

### Emphasized conditions or project related conditions:

Released Test Reports apply only to the specific samples tested under stated test conditions. It is the applicant's responsibility to assure that additional production units of the tested model(s) are manufactured in same construction and with identical electrical and mechanical components to meet the same quality as tested model(s). The applicant/manufacturer/importer is responsible for any modifications made to the production units which result in non-compliance to the applied and/or relevant regulations.

TCP Dr. Genz (HK) Co., Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from any kind of issued reports. Reports are confidential property of the client. As a mutual protection to the applicant, the clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate. The complexity of the technical specifications means that full and thorough testing is impractical for both technical and economic reasons. Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification. Neither is there any guarantee that such a test sample will interact with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in clause 1.6 of this report. The test report may only be reproduced or published in full.

Reproducing or publishing extracts of the report requires the prior written approval of TCP Dr. Genz (HK) Co., Ltd.

## 5 Normative references

- /1/ FCC Rules 47 CFR PART 15: 2008  
Radio Frequency Devises
- /2/ CISPR 22:2005  
Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
- /3/ ANSI C63.4-2003  
Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## **Appendix**

- A Photos**
- B Field Strength of the Fundamental Wave**
- C Radiated Spurious Emissions**
- D Emission Bandwidth**

## **Appendix B**

### Field Strength of the Fundamental Wave

---


Test Report No.: H1M20810-7070-P-15

**Field Strength of Fundamental**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section15.231  
Comment 1: Dist.: 3m, Ant.: HL223  
Freq: 305.046MHz, Emax: 68.96dB $\mu$ V/m, RBW: 100kHz

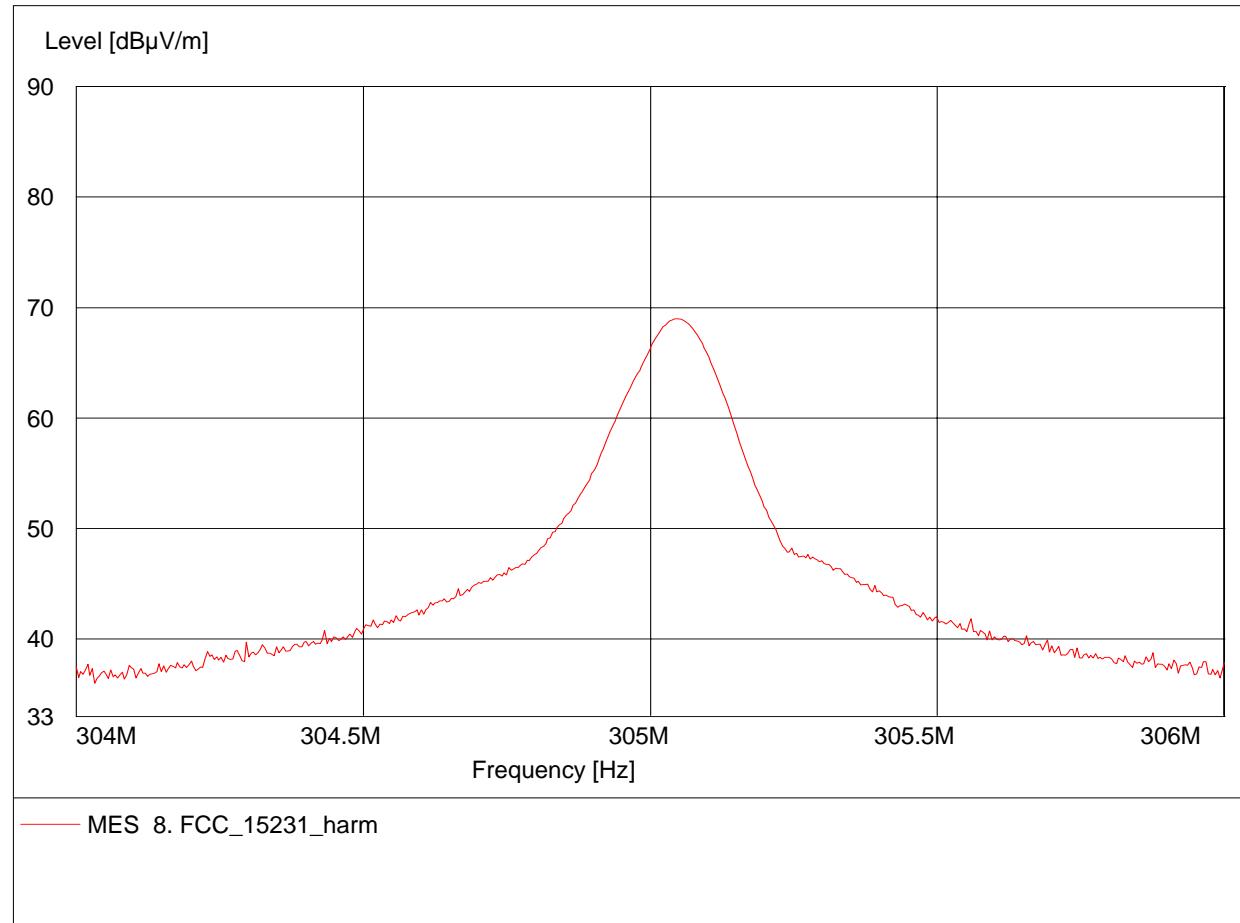


**Field Strength of Fundamental**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section 15.231  
Comment 1: Dist.: 3m, Ant.: HL223  
Freq: 305.050MHz, Emax: 52.97dB $\mu$ V/m, RBW: 100kHz

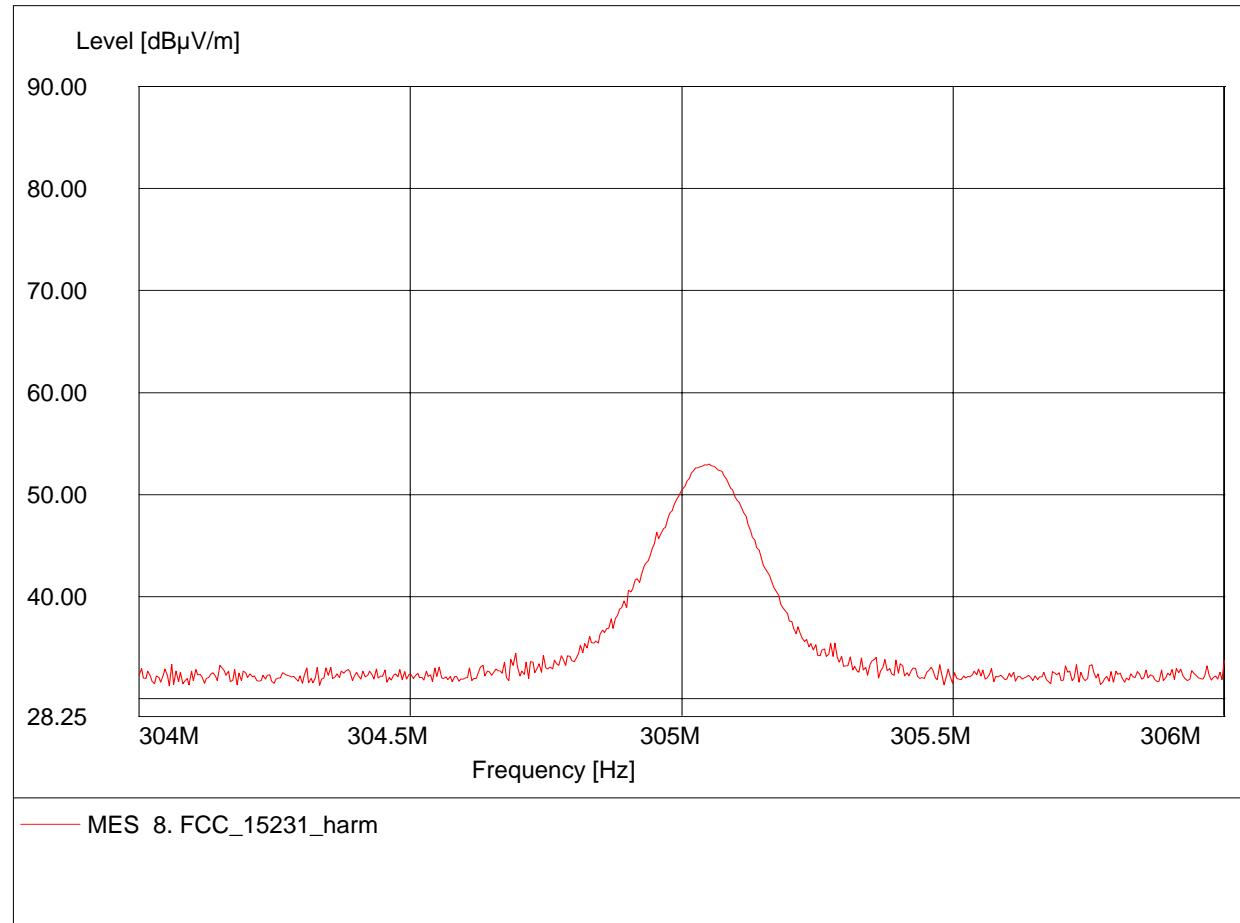

## **Appendix C**

### Radiated Spurious Emissions

---


Test Report No.: H1M20810-7070-P-15

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section 15.231  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 199.659MHz, Emax: 32.21dB $\mu$ V/m, RBW: 100kHz

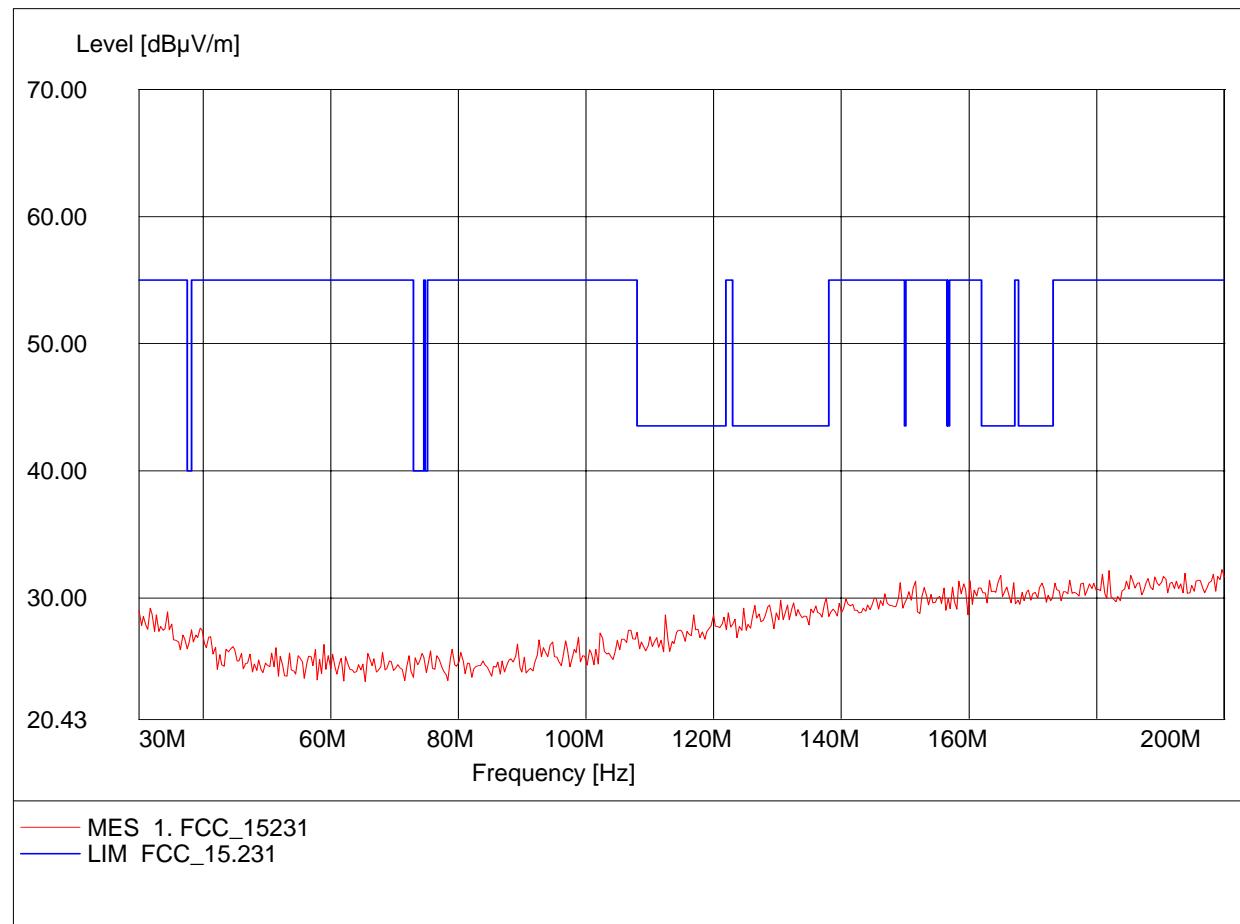


**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section 15.231  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 159.800MHz, Emax: 32.65dB $\mu$ V/m, RBW: 100kHz

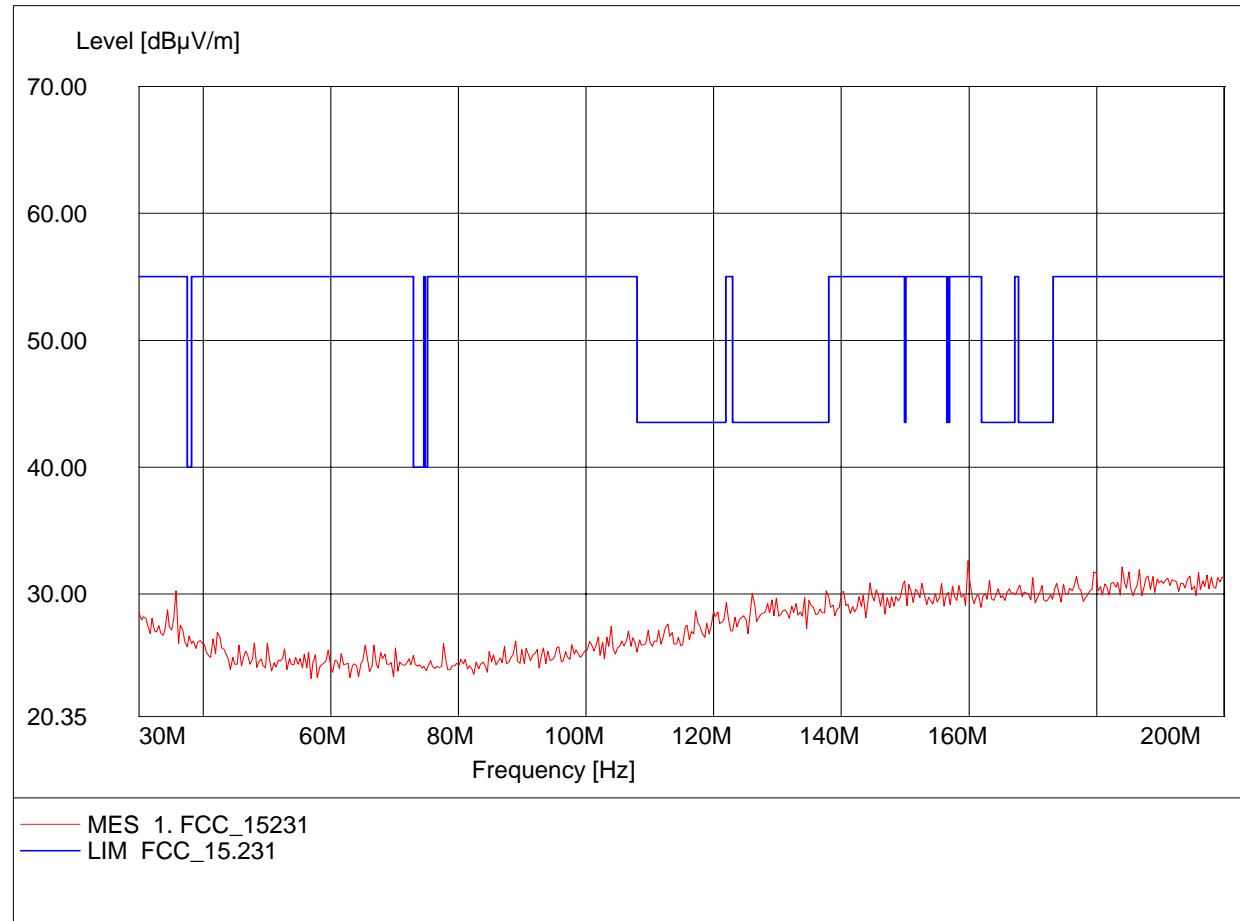


**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section 15.231  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 304.208MHz, Emax: 70.16dB $\mu$ V/m, RBW: 100kHz

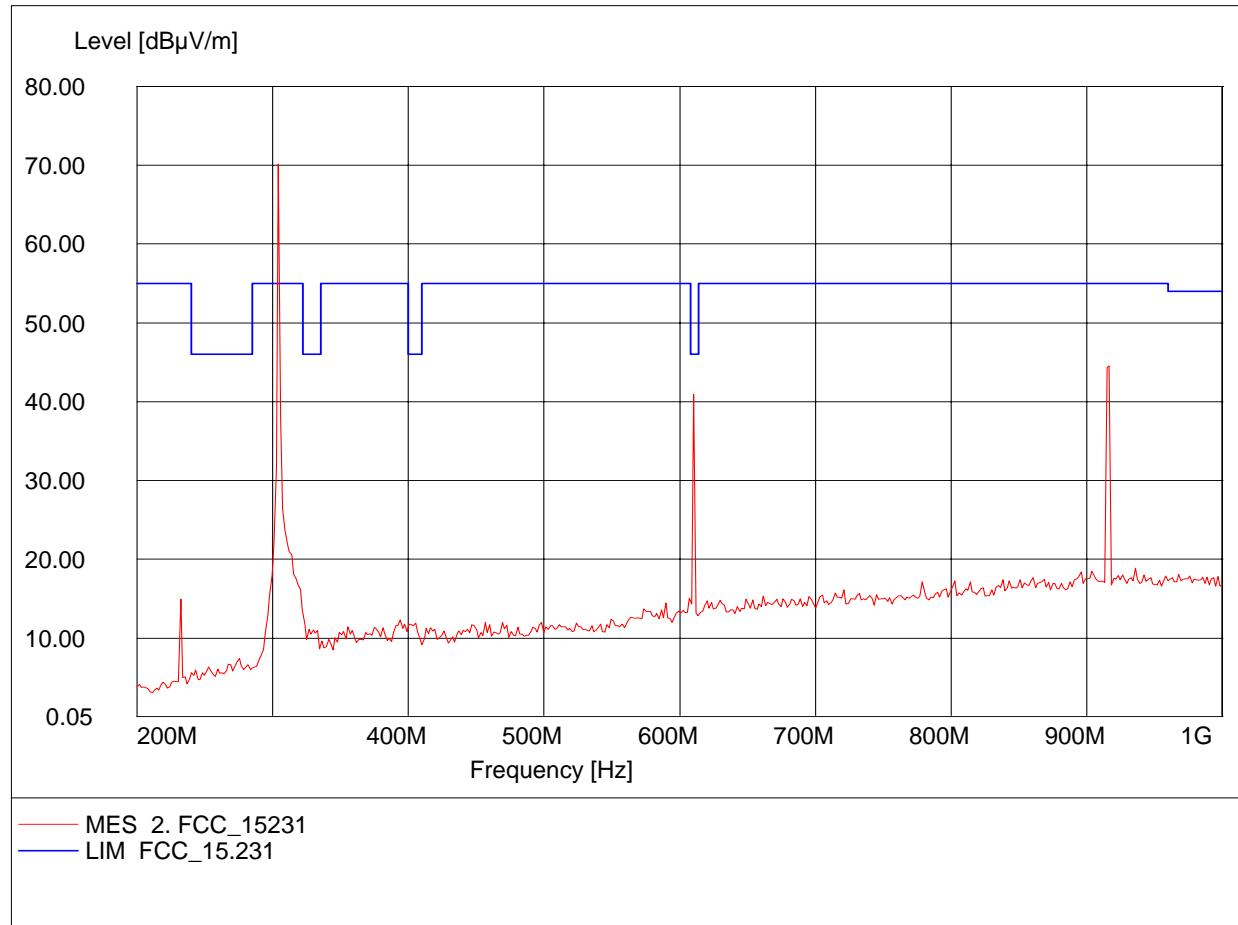

Frequency (MHZ)      Result (dB $\mu$ V/m)


610.420842	40.95
916.633267	44.57

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section 15.231  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 304.208MHz, Emax: 55.04dB $\mu$ V/m, RBW: 100kHz

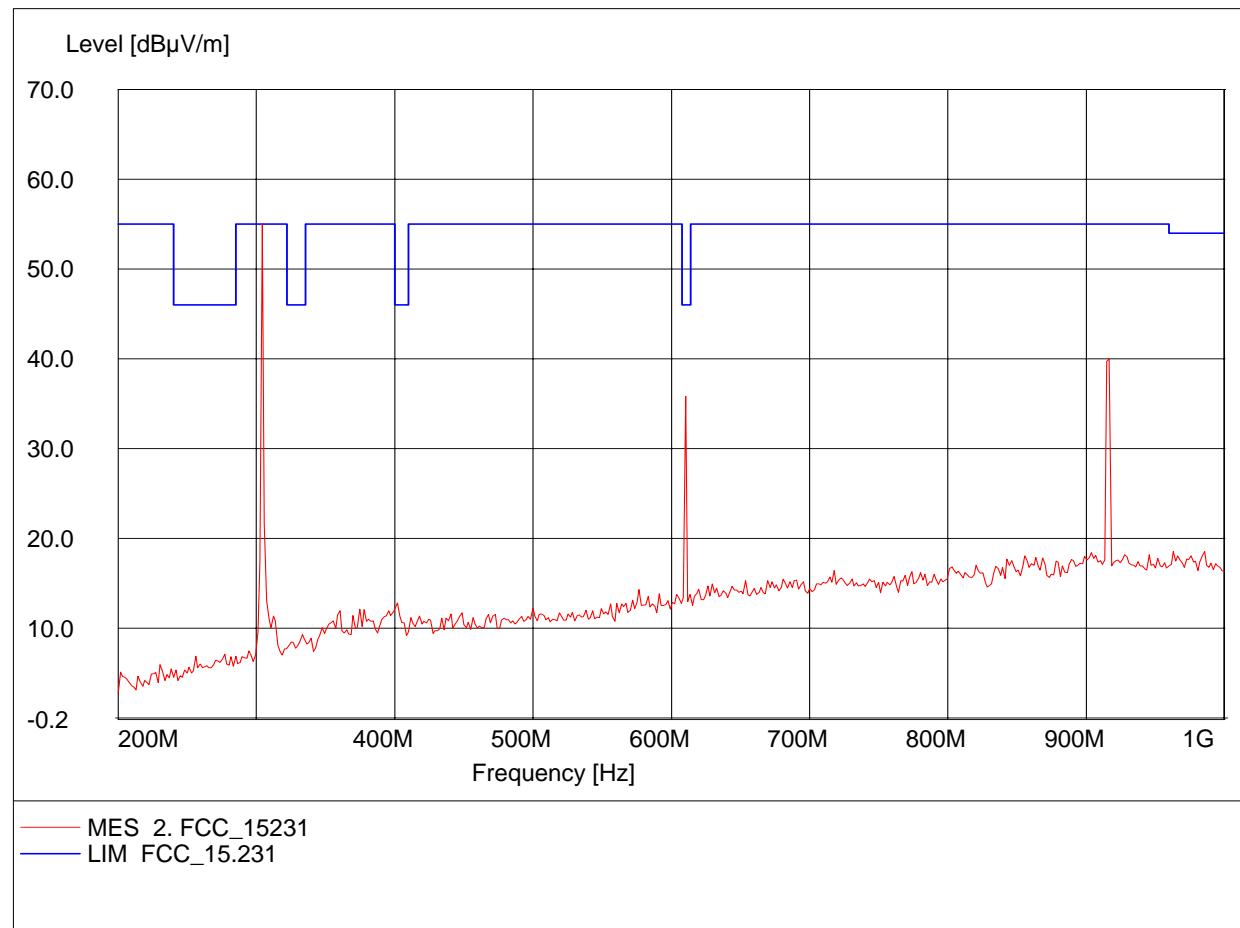

Frequency (MHZ)      Result (dB $\mu$ V/m)


610.420842	35.82
916.633267	40.00

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section 15.231  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 1.216GHz, Emax: 42.37dB $\mu$ V/m, RBW: 1MHz

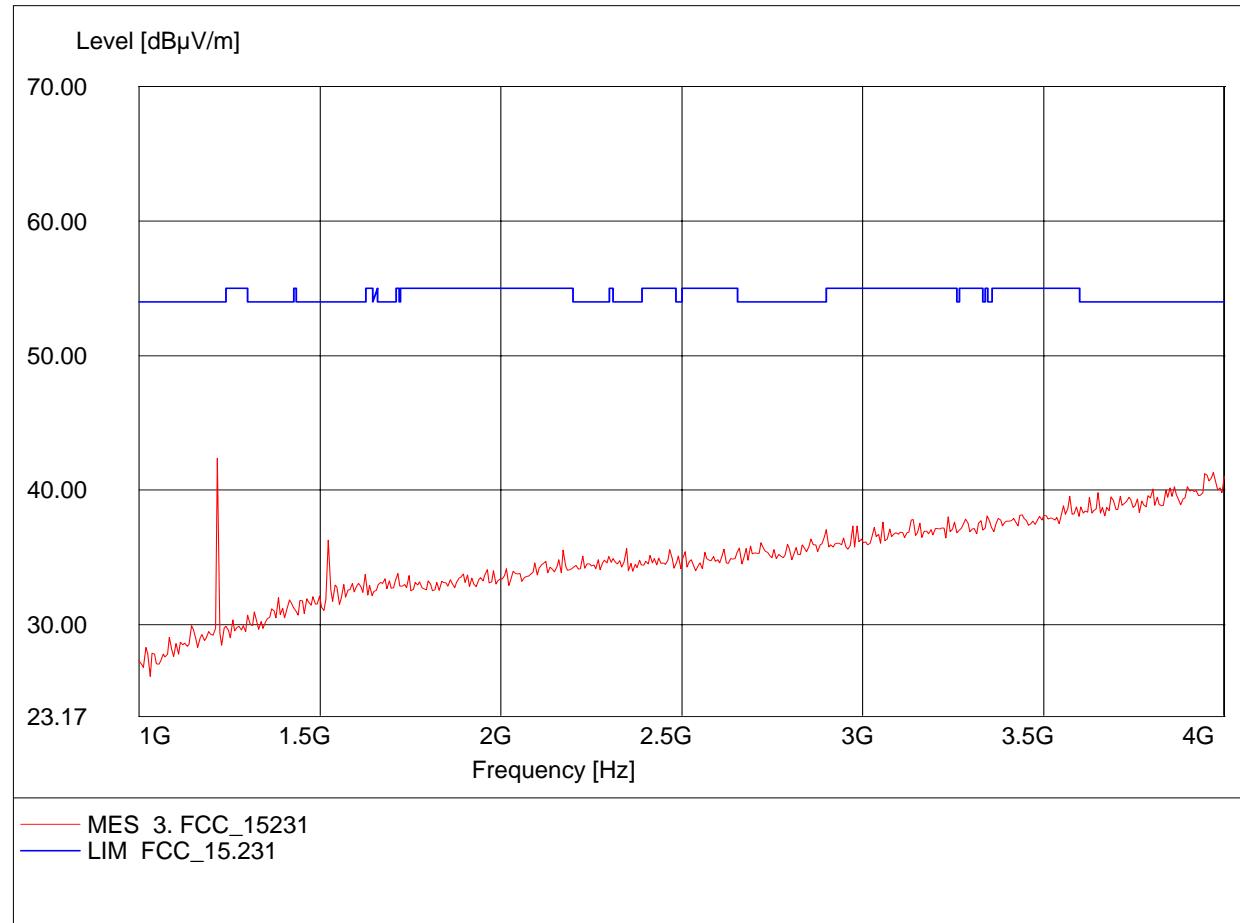


**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

Project No.: H1M20810-7070  
Detector: Peak

Test Site / Operator: HKPC / Mr. Scott Li  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12V battery  
Test Specification: according to Section 15.231  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 4.000GHz, Emax: 41.64dB $\mu$ V/m, RBW: 1MHz

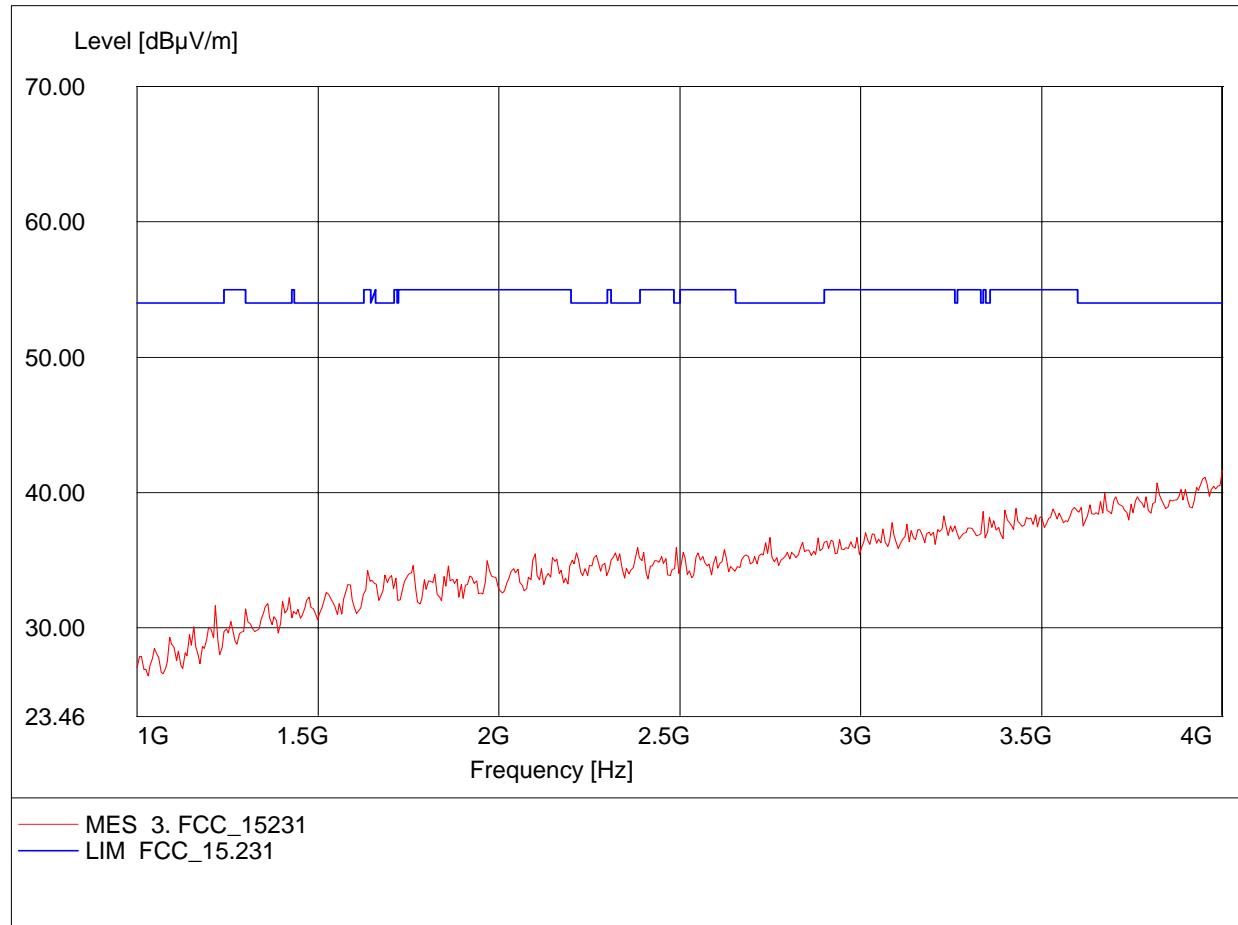


Frequency (MHZ)      Result (dB $\mu$ V/m)

1216.432866      31.65


## Appendix D

### Emission Bandwidth

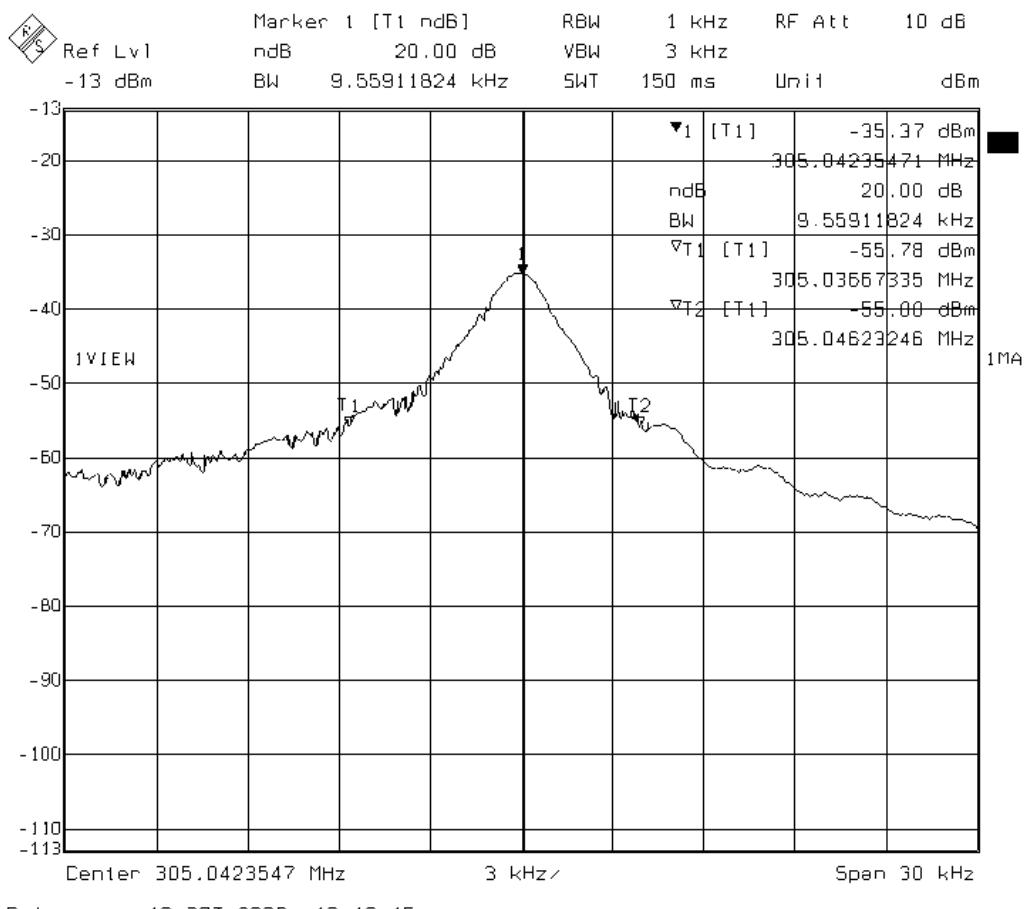

Test Report No.: H1M20810-7070-P-15

## Occupied Bandwidth

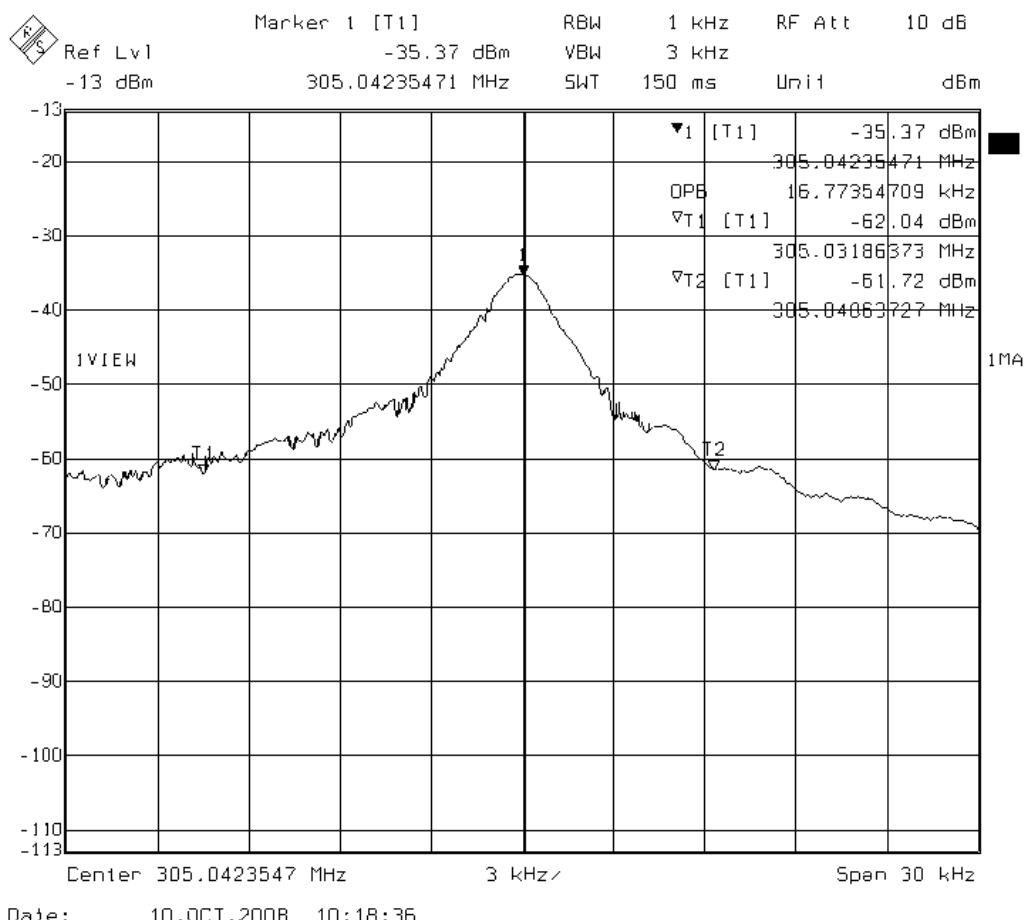

Test Report No.: H1M20810-7070-P-15