



# SAR TEST REPORT

No. I16N01168-SAR

For

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd**

**Smartphone**

**Model Name: Coolpad 3622A**

**Marketing Name: Coolpad Catalyst**

**With**

**Hardware Version: P2**

**Software Version: 091.00.160130**

**FCC ID:R38YL3622A**

**Issued Date:2016-11-11**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email:[cttl\\_terminals@catr.cn](mailto:cttl_terminals@catr.cn), website:[www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

| <b>Report Number</b> | <b>Revision</b> | <b>Issue Date</b> | <b>Description</b>              |
|----------------------|-----------------|-------------------|---------------------------------|
| I16N01168-SAR        | Rev.0           | 2016-11-11        | Initial creation of test report |

## TABLE OF CONTENT

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>1 TEST LABORATORY .....</b>                                         | <b>6</b>  |
| 1.1 TESTING LOCATION .....                                             | 6         |
| 1.2 TESTING ENVIRONMENT.....                                           | 6         |
| 1.3 PROJECT DATA .....                                                 | 6         |
| 1.4 SIGNATURE.....                                                     | 6         |
| <b>2 STATEMENT OF COMPLIANCE .....</b>                                 | <b>7</b>  |
| <b>3 CLIENT INFORMATION .....</b>                                      | <b>9</b>  |
| 3.1 APPLICANT INFORMATION .....                                        | 9         |
| 3.2 MANUFACTURER INFORMATION .....                                     | 9         |
| <b>4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>10</b> |
| 4.1 ABOUT EUT .....                                                    | 10        |
| 4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....          | 11        |
| 4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....           | 11        |
| <b>5 TEST METHODOLOGY .....</b>                                        | <b>12</b> |
| 5.1 APPLICABLE LIMIT REGULATIONS .....                                 | 12        |
| 5.2 APPLICABLE MEASUREMENT STANDARDS.....                              | 12        |
| <b>6 SPECIFIC ABSORPTION RATE (SAR).....</b>                           | <b>13</b> |
| 6.1 INTRODUCTION.....                                                  | 13        |
| 6.2 SAR DEFINITION .....                                               | 13        |
| <b>7 TISSUE SIMULATING LIQUIDS .....</b>                               | <b>14</b> |
| 7.1 TARGETS FOR TISSUE SIMULATING LIQUID .....                         | 14        |
| 7.2 DIELECTRIC PERFORMANCE .....                                       | 15        |
| <b>8 SYSTEM VERIFICATION .....</b>                                     | <b>21</b> |
| 8.1 SYSTEM SETUP.....                                                  | 21        |
| 8.2 SYSTEM VERIFICATION.....                                           | 22        |
| <b>9 MEASUREMENT PROCEDURES .....</b>                                  | <b>23</b> |
| 9.1 TESTS TO BE PERFORMED .....                                        | 23        |
| 9.2 GENERAL MEASUREMENT PROCEDURE.....                                 | 24        |
| 9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR .....                         | 25        |
| 9.4 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR.....              | 26        |
| 9.5 SAR MEASUREMENT FOR LTE .....                                      | 26        |
| 9.6 POWER DRIFT.....                                                   | 27        |
| <b>10 AREA SCAN BASED 1-G SAR.....</b>                                 | <b>28</b> |
| 10.1 REQUIREMENT OF KDB.....                                           | 28        |
| 10.2 FAST SAR ALGORITHMS .....                                         | 28        |
| <b>11 CONDUCTED OUTPUT POWER.....</b>                                  | <b>29</b> |

|                                                                                 |            |
|---------------------------------------------------------------------------------|------------|
| 11.1 MANUFACTURING TOLERANCE .....                                              | 29         |
| 11.2 GSM MEASUREMENT RESULT .....                                               | 33         |
| 11.3 WCDMA MEASUREMENT RESULT .....                                             | 34         |
| 11.4 LTE_FDD MEASUREMENT RESULT .....                                           | 36         |
| 11.5 Wi-Fi AND BT MEASUREMENT RESULT .....                                      | 44         |
| <b>12 SIMULTANEOUS TX SAR CONSIDERATIONS .....</b>                              | <b>45</b>  |
| 12.1 INTRODUCTION .....                                                         | 45         |
| 12.2 TRANSMIT ANTENNA SEPARATION DISTANCES .....                                | 45         |
| 12.3 SAR MEASUREMENT POSITIONS .....                                            | 45         |
| 12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....                         | 46         |
| <b>13 EVALUATION OF SIMULTANEOUS .....</b>                                      | <b>47</b>  |
| <b>14 SAR TEST RESULT .....</b>                                                 | <b>48</b>  |
| 14.1 SAR RESULTS FOR FAST SAR .....                                             | 49         |
| 14.2 SAR RESULTS FOR STANDARD PROCEDURE .....                                   | 63         |
| <b>15 SAR MEASUREMENT VARIABILITY .....</b>                                     | <b>68</b>  |
| <b>16 MEASUREMENT UNCERTAINTY .....</b>                                         | <b>69</b>  |
| 16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz) .....           | 69         |
| 16.2 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz) .....             | 70         |
| <b>17 MAIN TEST INSTRUMENTS .....</b>                                           | <b>71</b>  |
| <b>ANNEX A GRAPH RESULTS .....</b>                                              | <b>72</b>  |
| <b>ANNEX B SYSTEM VERIFICATION RESULTS .....</b>                                | <b>108</b> |
| <b>ANNEX C SAR MEASUREMENT SETUP .....</b>                                      | <b>130</b> |
| C.1 MEASUREMENT SET-UP .....                                                    | 130        |
| C.2 DASY5 E-FIELD PROBE SYSTEM .....                                            | 131        |
| C.3 E-FIELD PROBE CALIBRATION .....                                             | 131        |
| C.4 OTHER TEST EQUIPMENT .....                                                  | 132        |
| C.4.1 DATA ACQUISITION ELECTRONICS (DAE) .....                                  | 132        |
| C.4.2 ROBOT .....                                                               | 133        |
| C.4.3 MEASUREMENT SERVER .....                                                  | 133        |
| C.4.4 DEVICE HOLDER FOR PHANTOM .....                                           | 134        |
| C.4.5 PHANTOM .....                                                             | 134        |
| <b>ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM .....</b> | <b>136</b> |
| D.1 GENERAL CONSIDERATIONS .....                                                | 136        |
| D.2 BODY-WORN DEVICE .....                                                      | 137        |
| D.3 DESKTOP DEVICE .....                                                        | 137        |
| D.4 DUT SETUP PHOTOS .....                                                      | 138        |
| <b>ANNEX E EQUIVALENT MEDIA RECIPES .....</b>                                   | <b>139</b> |
| <b>ANNEX F SYSTEM VALIDATION .....</b>                                          | <b>140</b> |



|                                                                          |            |
|--------------------------------------------------------------------------|------------|
| <b>ANNEX G DAE CALIBRATION CERTIFICATE.....</b>                          | <b>141</b> |
| <b>ANNEX H PROBE CALIBRATION CERTIFICATE.....</b>                        | <b>144</b> |
| <b>ANNEX I DIPOLE CALIBRATION CERTIFICATE.....</b>                       | <b>155</b> |
| <b>ANNEX J SPOT CHECK TEST.....</b>                                      | <b>196</b> |
| J.1 INTERNAL IDENTIFICATION OF EUT USED DURING THE SPOT CHECK TEST ..... | 196        |
| J.2 MEASUREMENT RESULTS .....                                            | 196        |

## 1 Test Laboratory

### 1.1 Testing Location

|               |                                                                                                               |
|---------------|---------------------------------------------------------------------------------------------------------------|
| Company Name: | CTTL(Shenzhen)                                                                                                |
| Address:      | TCL International E City No.1001 Zhongshanyuan Road, Nanshan District, Shenzhen, Guangdong Province P.R.China |

### 1.2 Testing Environment

|                             |              |
|-----------------------------|--------------|
| Temperature:                | 18°C~25 °C,  |
| Relative humidity:          | 30%~ 70%     |
| Ground system resistance:   | <4Ω          |
| Ambient noise & Reflection: | < 0.012 W/kg |


### 1.3 Project Data

|                     |                 |
|---------------------|-----------------|
| Project Leader:     | Cao Junfei      |
| Test Engineer:      | Zhang Yunzhuan  |
| Testing Start Date: | January5, 2016  |
| Testing End Date:   | November9, 2016 |

### 1.4 Signature



Zhang Yunzhuan  
(Prepared this test report)



Cao Junfei  
(Reviewed this test report)



Zhang Bojun  
Director of the laboratory  
(Approved this test report)

## 2 Statement of Compliance

This EUT is a variant product and the report of original sample is No.I15N01419-SAR.

According to the client request, we perform the spot check for head and body of each band respectively. The results of spot check are presented in annex J.

The maximum results of Specific Absorption Rate (SAR) found during testing for Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd Smartphone Coolpad 3622A are as follows:

**Table 2.1: Highest Reported SAR (1g)**

| Exposure Configuration                | Technology Band | Highest Reported SAR<br>1g(W/Kg) | Equipment Class |
|---------------------------------------|-----------------|----------------------------------|-----------------|
| Head<br>(Separation Distance 0mm)     | GSM850          | <b>0.13</b>                      | PCE             |
|                                       | PCS1900         | <b>0.34</b>                      |                 |
|                                       | UMTSFDD 5       | <b>0.12</b>                      |                 |
|                                       | UMTSFDD 2       | <b>0.45</b>                      |                 |
|                                       | UMTSFDD 4       | <b>0.58</b>                      |                 |
|                                       | LTEBand2        | <b>0.45</b>                      |                 |
|                                       | LTEBand4        | <b>0.42</b>                      |                 |
|                                       | LTEBand12       | <b>0.28</b>                      |                 |
|                                       | WLAN2.4GHz      | <b>0.83</b>                      | DTS             |
| Hotspot<br>(Separation Distance 10mm) | GSM850          | <b>0.29</b>                      | PCE             |
|                                       | PCS1900         | <b>1.03</b>                      |                 |
|                                       | UMTSFDD 5       | <b>0.18</b>                      |                 |
|                                       | UMTSFDD 2       | <b>1.10</b>                      |                 |
|                                       | UMTSFDD 4       | <b>1.00</b>                      |                 |
|                                       | LTEBand2        | <b>1.10</b>                      |                 |
|                                       | LTEBand4        | <b>0.64</b>                      |                 |
|                                       | LTEBand12       | <b>0.77</b>                      |                 |
|                                       | WLAN2.4GHz      | <b>0.29</b>                      | DTS             |

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm for hotspot on and 10mm for hotspot off between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.10W/kg(1g)**.

**Table 2.2: The sum of reported SAR values for main antenna and WiFi**

|                                     | Position   | Main antenna | WiFi | Sum         |
|-------------------------------------|------------|--------------|------|-------------|
| Highest reported SAR value for Head | Left Cheek | 0.58         | 0.83 | <b>1.41</b> |
| Highest reported SAR value for Body | Rear       | 0.77         | 0.29 | <b>1.06</b> |
|                                     | Bottom     | 1.10         | /    | <b>1.10</b> |

**Table 2.3: The sum of reported SAR values for main antenna and BT**

|                                     | Position   | Main antenna | BT*  | Sum         |
|-------------------------------------|------------|--------------|------|-------------|
| Highest reported SAR value for Head | Left Cheek | 0.58         | 0.06 | <b>0.64</b> |
| Highest reported SAR value for Body | Rear       | 0.77         | 0.03 | <b>0.80</b> |
|                                     | Bottom     | 1.10         | /    | <b>1.10</b> |

BT\*-Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.41 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

### 3 Client Information

#### 3.1 Applicant Information

|                |                                                                                                                |
|----------------|----------------------------------------------------------------------------------------------------------------|
| Company Name:  | Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd                                               |
| Address /Post: | Coolpad Information Harbor, 2nd Mengxi Road, Hi-Tech Industrial Park(North), Nanshan district, Shenzhen, P.R.C |
| Contact:       | Li Amei                                                                                                        |
| Email:         | liamei@yulong.com                                                                                              |
| Telephone:     | +86 13410415799                                                                                                |
| Fax:           | /                                                                                                              |

#### 3.2 Manufacturer Information

|                |                                                                                                                |
|----------------|----------------------------------------------------------------------------------------------------------------|
| Company Name:  | Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd                                               |
| Address /Post: | Coolpad Information Harbor, 2nd Mengxi Road, Hi-Tech Industrial Park(North), Nanshan district, Shenzhen, P.R.C |
| Contact:       | Li Amei                                                                                                        |
| Email:         | liamei@yulong.com                                                                                              |
| Telephone:     | +86 13410415799                                                                                                |
| Fax:           | /                                                                                                              |

## 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

|                                       |                                                                            |
|---------------------------------------|----------------------------------------------------------------------------|
| Description:                          | Smartphone                                                                 |
| Model Name:                           | Coolpad 3622A                                                              |
| Operating mode(s):                    | GSM 850/900/1800/1900, WCDMA 850/1700/1900, LTE_FDD Band 2/4/12, BT, Wi-Fi |
| Tested Tx Frequency:                  | 825 – 848.8 MHz (GSM 850)                                                  |
|                                       | 1850.2 – 1910 MHz (GSM 1900)                                               |
|                                       | 826.4–846.6 MHz (WCDMA850 Band V)                                          |
|                                       | 1712.4–1752.6 MHz (WCDMA1700 Band IV)                                      |
|                                       | 1852.4–1907.6 MHz (WCDMA1900 Band II)                                      |
|                                       | 1860–1900 MHz (LTE_FDD Band II)                                            |
|                                       | 1720–1745 MHz (LTE_FDD Band IV)                                            |
|                                       | 704–711MHz (LTE_FDD Band XII)                                              |
|                                       | 2412 – 2462 MHz (Wi-Fi 2.4G)                                               |
| GPRS&EGPRS Multislot Class:           | 12                                                                         |
| GPRS capability Class:                | B                                                                          |
| WCDMA Category:                       | USAT: 6                                                                    |
|                                       | HSDPA: 10                                                                  |
|                                       | HSUPA: 6                                                                   |
|                                       | HSPA: 14                                                                   |
|                                       | DC-HSDPA: 24                                                               |
| Release Version:                      | GSM: Rel8                                                                  |
|                                       | GPRS: Rel8                                                                 |
|                                       | UMTS: Rel8                                                                 |
| Test device Production information:   | Production unit                                                            |
| Device type:                          | Portable device                                                            |
| Antenna type:                         | Integrated antenna                                                         |
| Accessories/Body-worn configurations: | /                                                                          |
| Hotspot mode:                         | Support simultaneous transmission of hotspot and voice(or data)            |
| Form factor:                          | 144mm × 71 mm                                                              |

**4.2 Internal Identification of EUT used during the test**

| EUT ID* | SN or IMEI            | HW Version | SW Version    |
|---------|-----------------------|------------|---------------|
| EUT1    | IMEI: 008600250911822 | P2         | 091.00.160130 |
| EUT2    | IMEI:869630020000893  | P2         | 091.00.160130 |
| EUT3    | IMEI:861325036797859  | P2         | 091.00.160130 |

\*EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test SAR with the EUT1& EUT3 and conducted power with the EUT 2

**4.3 Internal Identification of AE used during the test**

| AE ID* | Description | Model    | SN | Manufacturer                      |
|--------|-------------|----------|----|-----------------------------------|
| AE1    | Battery     | CPLD-390 | /  | ZHUHAI COSLIGHT BATTERY CO., LTD. |

\*AE ID: is used to identify the test sample in the lab internally.

## 5 TEST METHODOLOGY

### 5.1 Applicable Limit Regulations

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IEEE 1528–2013:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Experimental Techniques.

**KDB 447498 D01 General RF Exposure Guidance v06:** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

**KDB648474 D04 Handset SAR v01r03:** SAR Evaluation Considerations for Wireless Handsets.

**KDB941225 D01 SAR test for 3G devices v03r01:** SAR Measurement Procedures for 3G Devices

**KDB941225 D05 SAR for LTE Devices v02r05:** SAR Evaluation Considerations for LTE Devices

**KDB 941225 D06 Hot Spot SAR v02r01:** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

**KDB 248227 D01 802.11 Wi-Fi SAR v02r02:** SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters.

**KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04:** SAR Measurement Requirements for 100 MHz to 6 GHz.

**KDB 865664 D02 RF Exposure Reporting v01r02:** RF Exposure Compliance Reporting and Documentation Considerations

## 6 Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7 Tissue Simulating Liquids

### 7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


| Frequency<br>(MHz) | Liquid Type | Conductivity<br>( $\sigma$ ) | $\pm 5\%$ Range | Permittivity<br>( $\epsilon$ ) | $\pm 5\%$ Range |
|--------------------|-------------|------------------------------|-----------------|--------------------------------|-----------------|
| 750                | Head        | 0.89                         | 0.85~0.93       | 41.94                          | 39.84~44.04     |
| 750                | Body        | 0.96                         | 0.91~1.01       | 55.5                           | 52.73~58.28     |
| 835                | Head        | 0.90                         | 0.86~0.95       | 41.5                           | 39.4~43.6       |
| 835                | Body        | 0.97                         | 0.92~1.02       | 55.2                           | 52.4~58.0       |
| 1800               | Head        | 1.4                          | 1.33~1.47       | 40.00                          | 38.0~42.0       |
| 1800               | Body        | 1.52                         | 1.40~1.60       | 53.50                          | 50.8~56.2       |
| 1900               | Head        | 1.40                         | 1.33~1.47       | 40.0                           | 38.0~42.0       |
| 1900               | Body        | 1.52                         | 1.44~1.60       | 53.3                           | 50.6~56.0       |
| 2450               | Head        | 1.80                         | 1.71~1.89       | 39.2                           | 37.2~41.2       |
| 2450               | Body        | 1.95                         | 1.85~2.05       | 52.7                           | 50.1~55.3       |

## 7.2 Dielectric Performance


**Table 7.2: Dielectric Performance of Tissue Simulating Liquid**

| Measurement Date<br>(yyyy-mm-dd) | Type | Frequency | Permittivity<br>$\epsilon$ | Drift<br>(%) | Conductivity<br>$\sigma$ (S/m) | Drift<br>(%) |
|----------------------------------|------|-----------|----------------------------|--------------|--------------------------------|--------------|
| 2016-1-6                         | Head | 750 MHz   | 42.20                      | 0.62         | 0.88                           | -1.12        |
| 2016-1-6                         | Body | 750 MHz   | 56.68                      | 2.13         | 0.94                           | -2.08        |
| 2016-1-5                         | Head | 835 MHz   | 40.18                      | -3.18        | 0.92                           | 2.22         |
| 2016-1-6                         | Body | 835 MHz   | 53.49                      | -3.10        | 0.97                           | 0.00         |
| 2016-1-6                         | Head | 1800 MHz  | 38.36                      | -4.10        | 1.43                           | 2.14         |
| 2016-1-7                         | Body | 1800 MHz  | 51.02                      | -4.64        | 1.47                           | -3.29        |
| 2016-1-12                        | Head | 1900 MHz  | 41.07                      | 2.68         | 1.44                           | 2.86         |
| 2016-1-31                        | Body | 1900 MHz  | 50.79                      | -4.71        | 1.54                           | 1.32         |
| 2016-1-31                        | Head | 2450 MHz  | 37.71                      | -3.80        | 1.83                           | 1.67         |
| 2016-1-31                        | Body | 2450 MHz  | 50.22                      | -4.71        | 1.98                           | 1.54         |
| 2016-11-08                       | Head | 750 MHz   | 40.64                      | -3.10        | 0.873                          | -1.91        |
| 2016-11-08                       | Body | 750 MHz   | 53.80                      | -3.06        | 0.929                          | -3.23        |
| 2016-11-08                       | Head | 835 MHz   | 40.95                      | -1.33        | 0.906                          | 0.67         |
| 2016-11-08                       | Body | 835 MHz   | 53.67                      | -2.77        | 0.962                          | -0.82        |
| 2016-11-06                       | Head | 1800 MHz  | 38.96                      | -2.60        | 1.371                          | -2.07        |
| 2016-11-06                       | Body | 1800 MHz  | 52.58                      | -1.72        | 1.496                          | -1.58        |
| 2016-11-07                       | Head | 1900 MHz  | 38.55                      | -3.63        | 1.431                          | 2.21         |
| 2016-11-07                       | Body | 1900 MHz  | 52.24                      | -1.99        | 1.562                          | 2.76         |
| 2016-11-09                       | Head | 2450 MHz  | 38.22                      | -2.50        | 1.841                          | 2.28         |
| 2016-11-09                       | Body | 2450 MHz  | 53.15                      | 0.85         | 1.972                          | 1.13         |


Note: The liquid temperature is 22.0°C

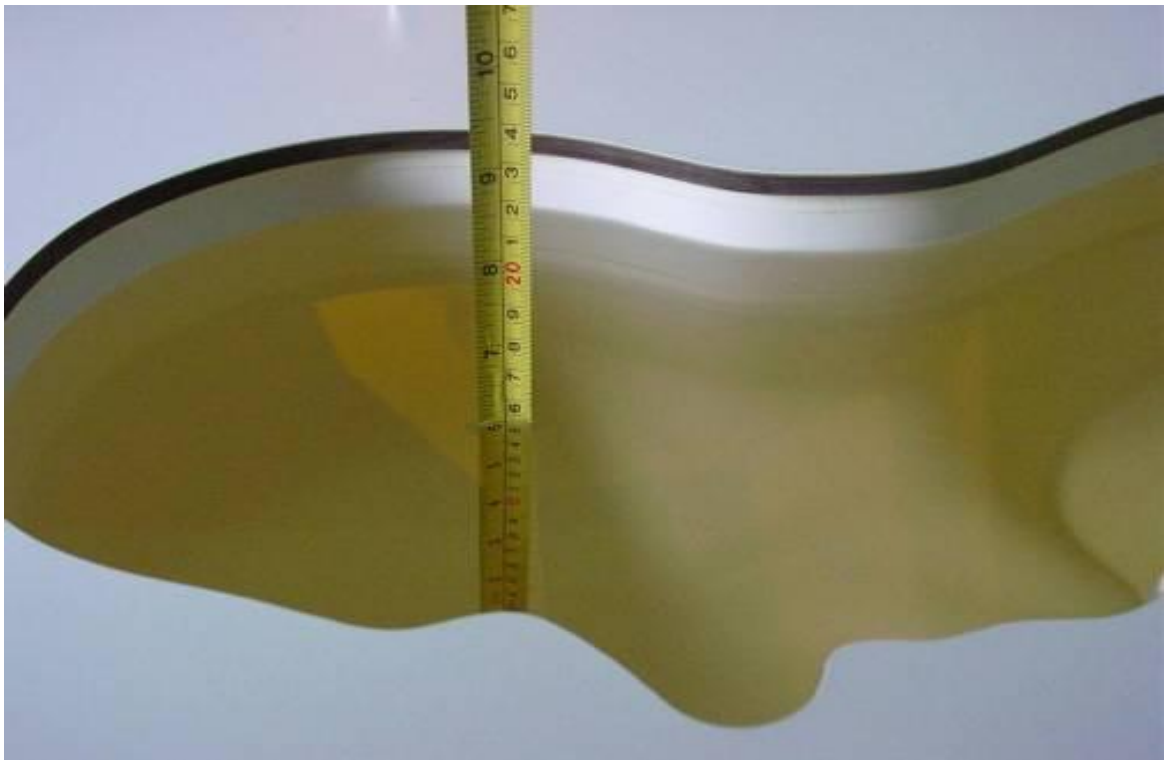


**Picture 7-1: Liquid depth in the Head Phantom (750 MHz)**

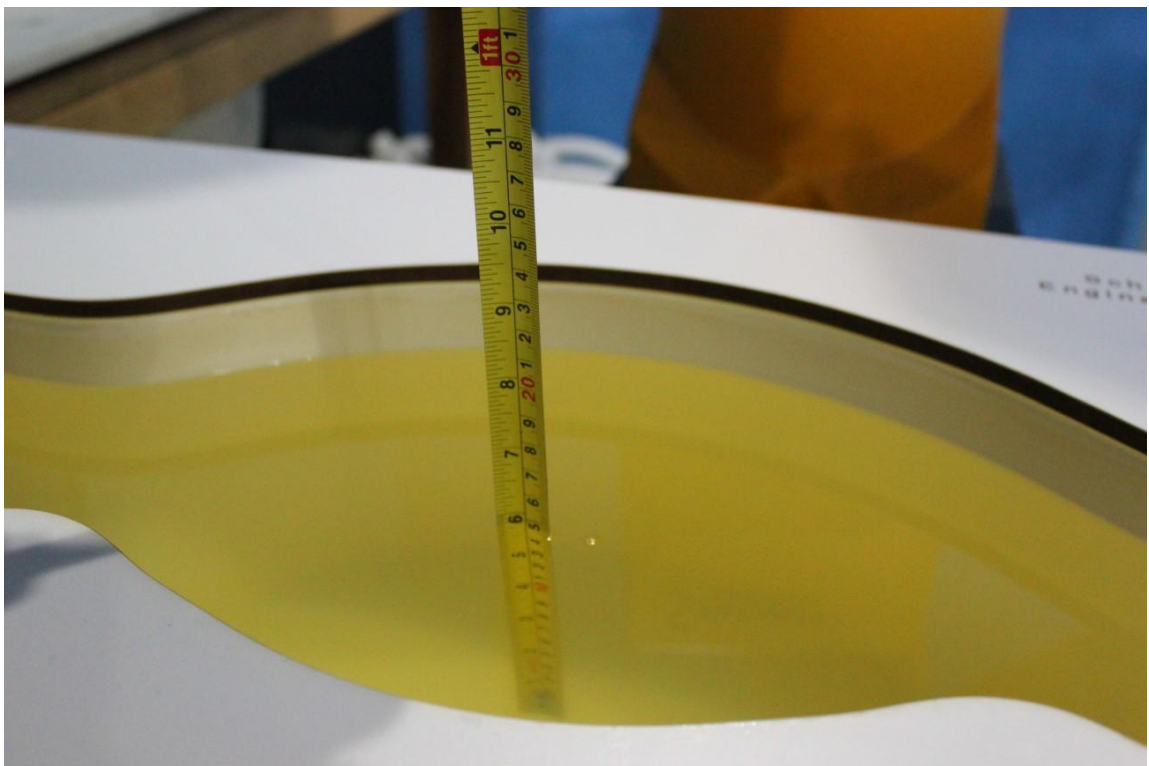

**Picture 7-2: Liquid depth in the Flat Phantom (750 MHz)**

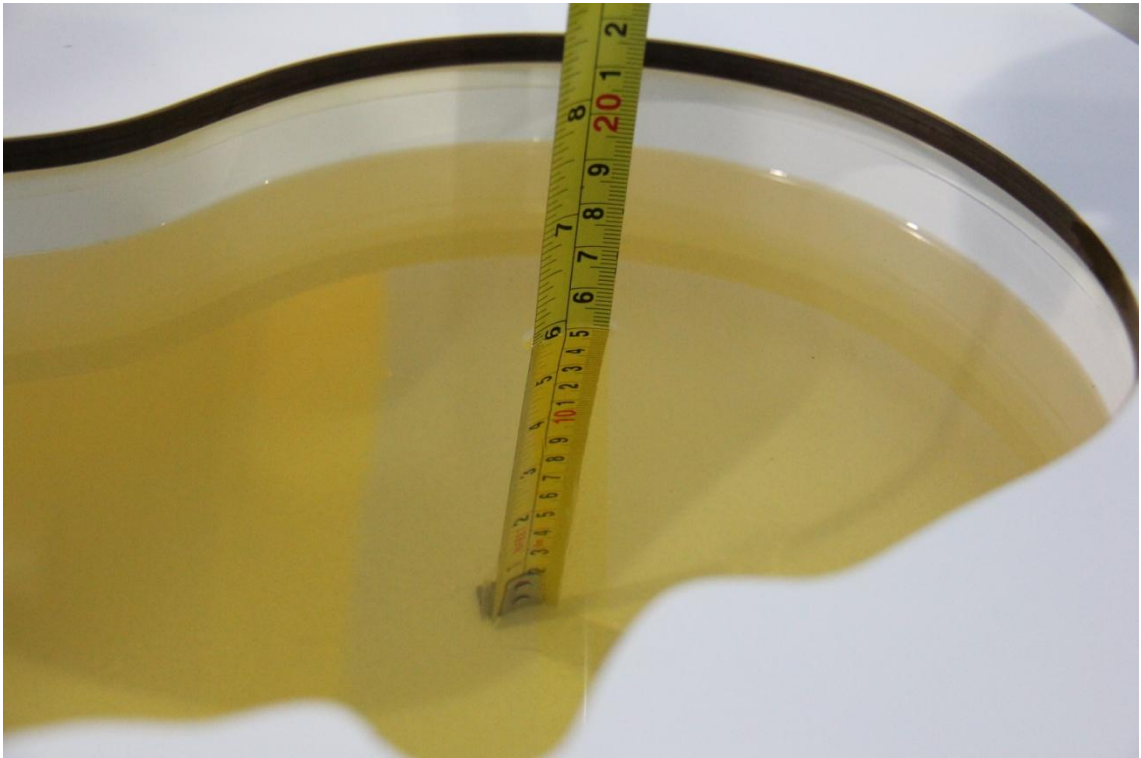

**Picture 7-3: Liquid depth in the Head Phantom (835 MHz)**

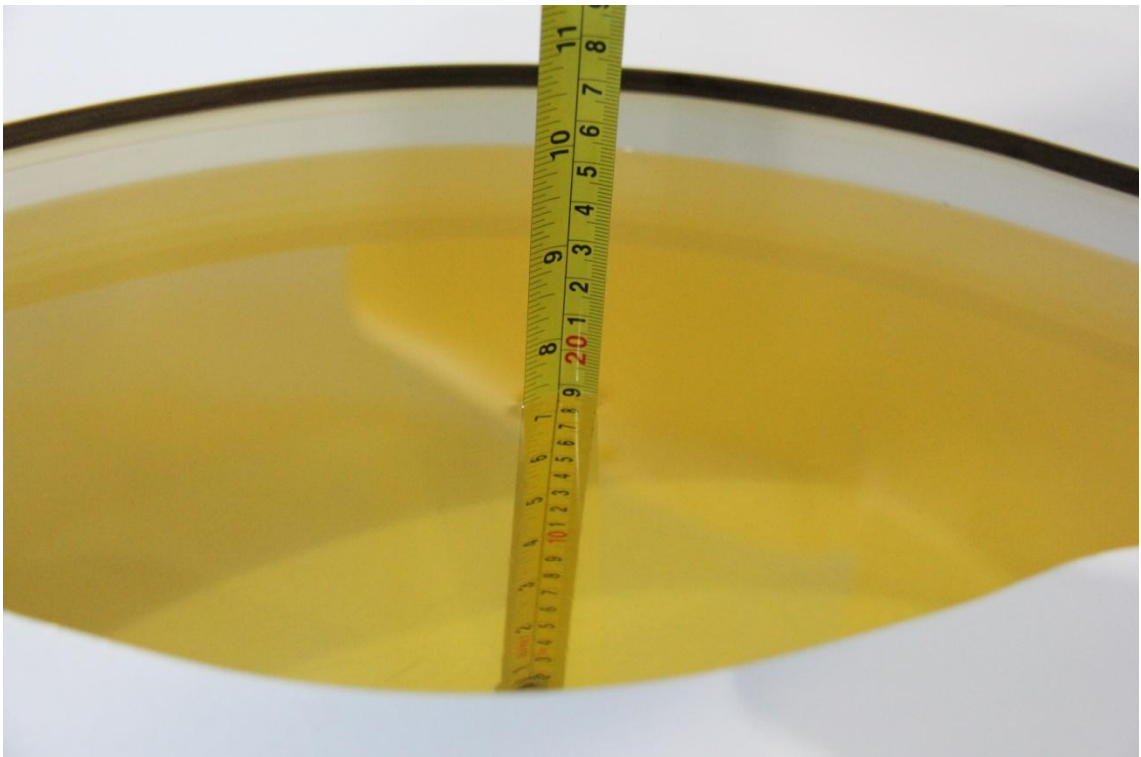


**Picture 7-4: Liquid depth in the Flat Phantom (835 MHz)**




**Picture 7-5: Liquid depth in the Head Phantom (1800 MHz)**




**Picture 7-6: Liquid depth in the Flat Phantom (1800MHz)**

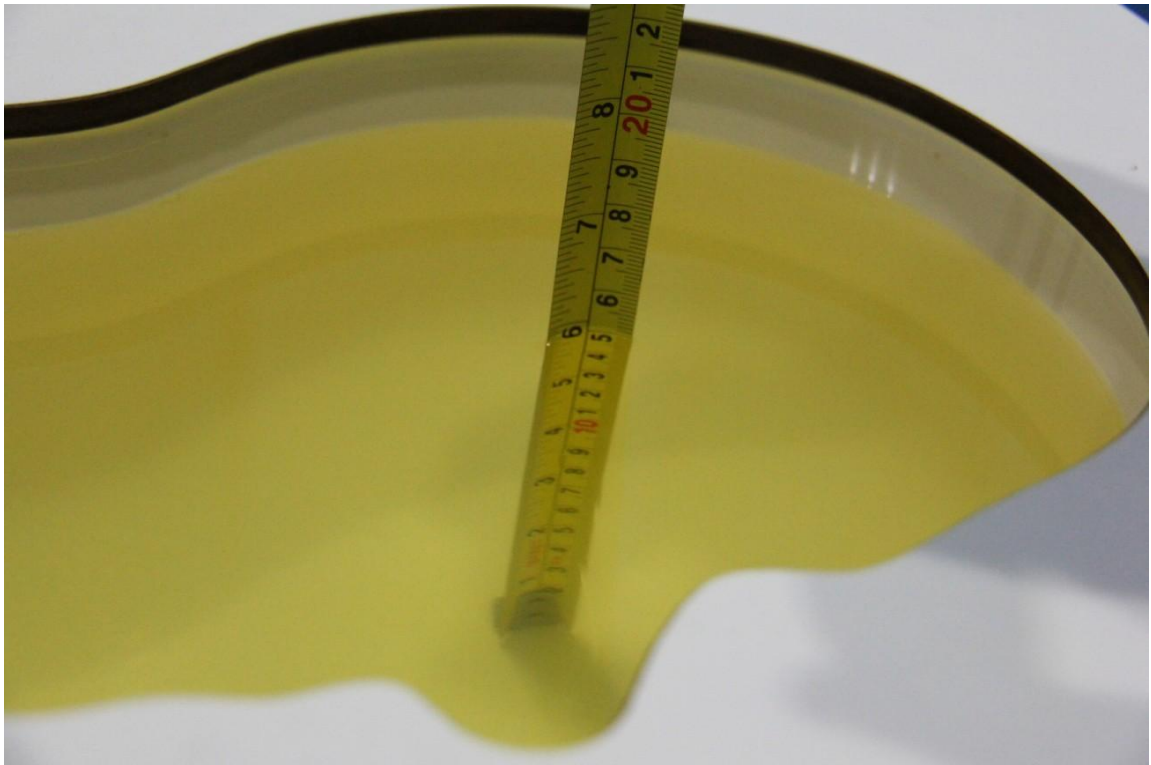

**Picture 7-7: Liquid depth in the Head Phantom (1900 MHz)**

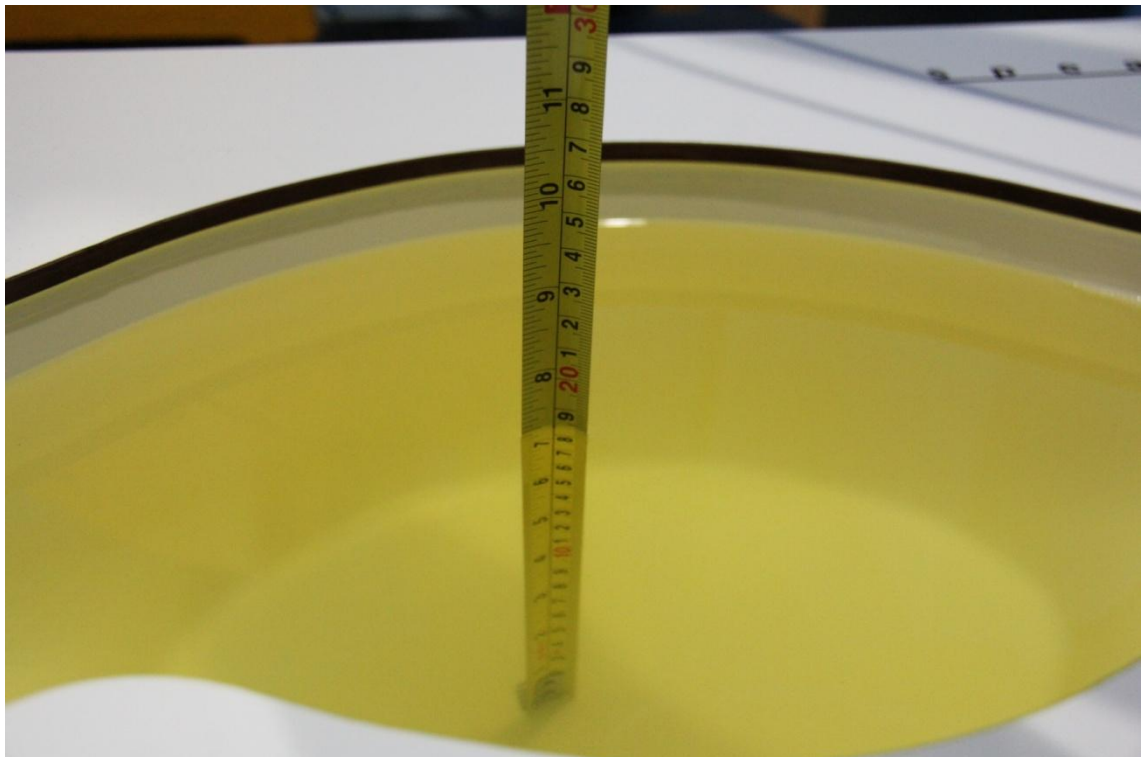

**Picture 7-8: Liquid depth in the Flat Phantom (1900MHz)**

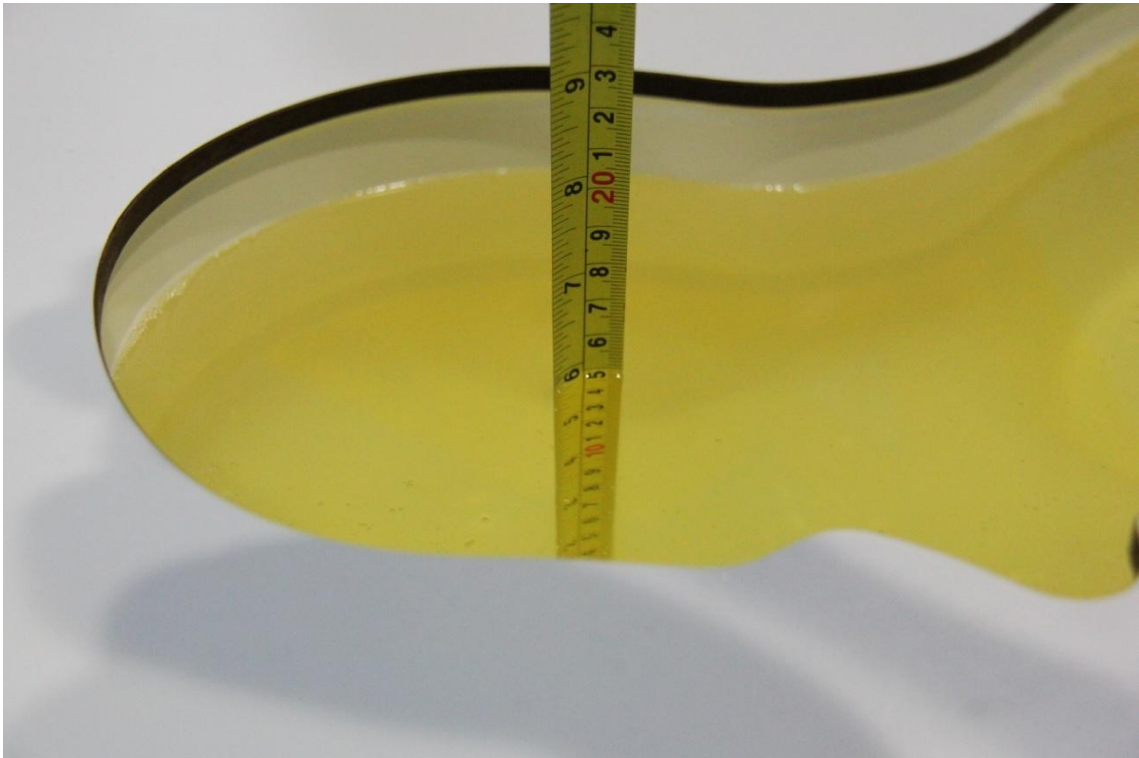

Picture 7-9: Liquid depth in the Head Phantom (2450MHz)




Picture 7-10: Liquid depth in the Head Phantom (2450MHz)


## 8System verification

### 8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

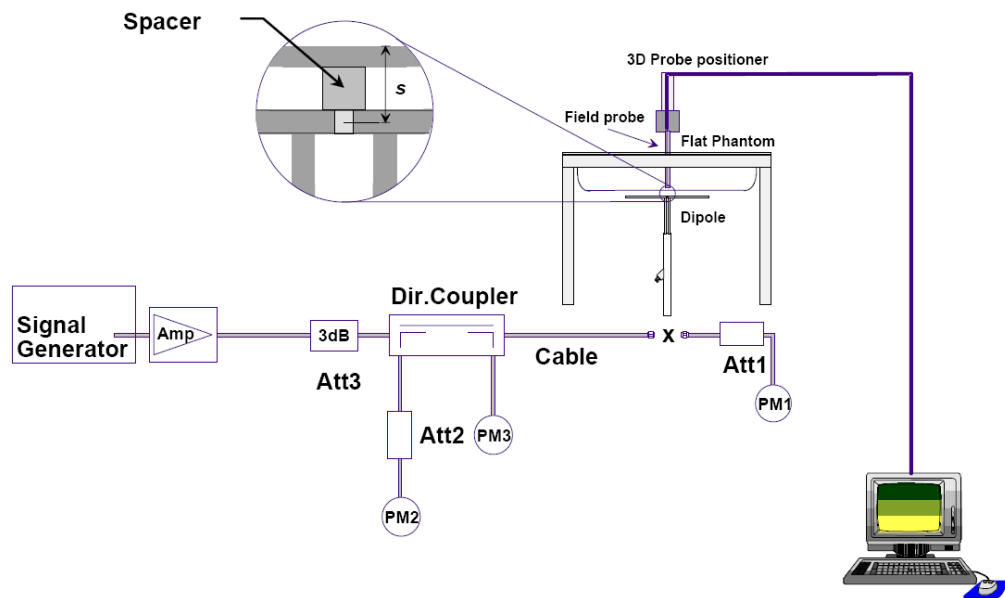

Picture 8.1 System Setup for System Evaluation

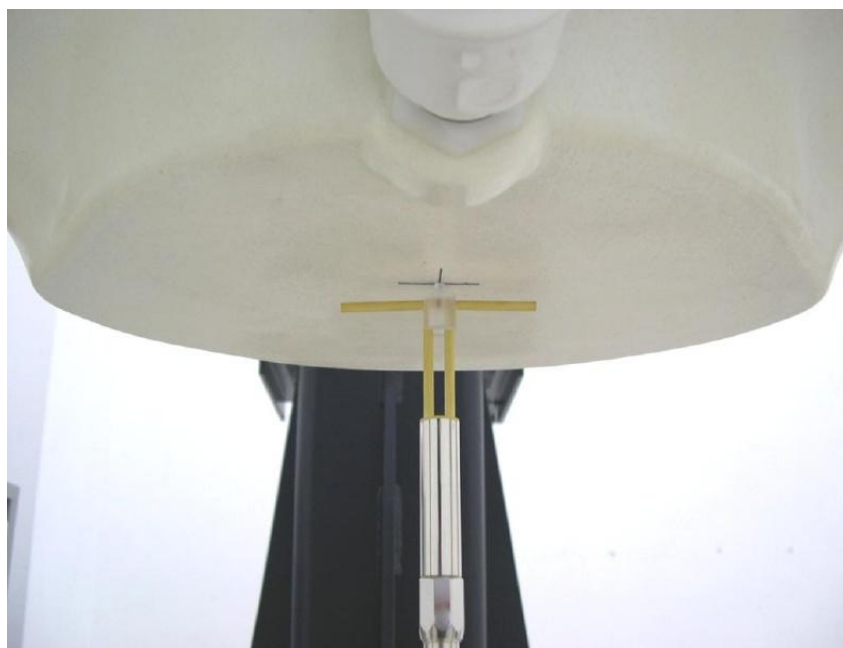

Picture 8.2 Photo of Dipole Setup

## 8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

**Table 8.1: System Verification of Head**

| Measurement Date<br>(yyyy-mm-dd) | Frequency | Target value (W/kg) |                | Measured value (W/kg) |                | Deviation (%)   |                |
|----------------------------------|-----------|---------------------|----------------|-----------------------|----------------|-----------------|----------------|
|                                  |           | 10 g<br>Average     | 1 g<br>Average | 10 g<br>Average       | 1 g<br>Average | 10 g<br>Average | 1 g<br>Average |
| 2016-1-6                         | 750 MHz   | 5.49                | 8.31           | 5.52                  | 8.48           | 0.55            | 2.05           |
| 2016-1-5                         | 835 MHz   | 6.03                | 9.22           | 6.00                  | 9.44           | -0.50           | 2.39           |
| 2016-1-6                         | 1800 MHz  | 20.6                | 38.8           | 20.20                 | 39.08          | -1.94           | 0.72           |
| 2016-1-12                        | 1900 MHz  | 21.0                | 40.8           | 21.00                 | 40.80          | 0.00            | 0.00           |
| 2016-1-31                        | 2450 MHz  | 24.1                | 52.5           | 24.12                 | 52.40          | 0.08            | -0.19          |
| 2016-11-08                       | 750 MHz   | 5.46                | 8.33           | 5.60                  | 8.56           | 2.56            | 2.76           |
| 2016-11-08                       | 835 MHz   | 6.03                | 9.22           | 5.84                  | 9.00           | -3.15           | -2.39          |
| 2016-11-06                       | 1800 MHz  | 20.6                | 38.8           | 20.28                 | 37.44          | -1.55           | -3.51          |
| 2016-11-07                       | 1900 MHz  | 21.0                | 40.8           | 21.40                 | 41.60          | 1.90            | 1.96           |
| 2016-11-09                       | 2450 MHz  | 24.1                | 52.5           | 23.72                 | 51.60          | -1.58           | -1.71          |

**Table 8.2: System Verification of Body**

| Measurement Date<br>(yyyy-mm-dd) | Frequency | Target value (W/kg) |                | Measured value (W/kg) |                | Deviation(%)    |                |
|----------------------------------|-----------|---------------------|----------------|-----------------------|----------------|-----------------|----------------|
|                                  |           | 10 g<br>Average     | 1 g<br>Average | 10 g<br>Average       | 1 g<br>Average | 10 g<br>Average | 1 g<br>Average |
| 2016-1-6                         | 750 MHz   | 5.85                | 8.75           | 5.96                  | 9.00           | 1.88            | 2.86           |
| 2016-1-6                         | 835 MHz   | 6.20                | 9.44           | 6.36                  | 9.68           | 2.58            | 2.54           |
| 2016-1-7                         | 1800 MHz  | 21.1                | 39.6           | 21.08                 | 39.68          | -0.09           | 0.20           |
| 2016-1-31                        | 1900 MHz  | 21.3                | 41.1           | 20.88                 | 40.0           | -1.97           | -2.68          |
| 2016-1-31                        | 2450 MHz  | 24.4                | 52.3           | 25.16                 | 53.68          | 3.11            | 2.64           |
| 2016-11-08                       | 750 MHz   | 5.76                | 8.78           | 5.64                  | 8.60           | -2.08           | -2.05          |
| 2016-11-08                       | 835 MHz   | 6.20                | 9.44           | 6.04                  | 9.08           | -2.58           | -3.81          |
| 2016-11-06                       | 1800 MHz  | 21.1                | 39.6           | 21.16                 | 39.72          | 0.28            | 0.30           |
| 2016-11-07                       | 1900 MHz  | 21.3                | 41.1           | 21.80                 | 42.00          | 2.35            | 2.19           |
| 2016-11-09                       | 2450 MHz  | 24.4                | 52.3           | 23.52                 | 50.40          | -3.61           | -3.63          |

## 9 Measurement Procedures

### 9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


**Step 1:** The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

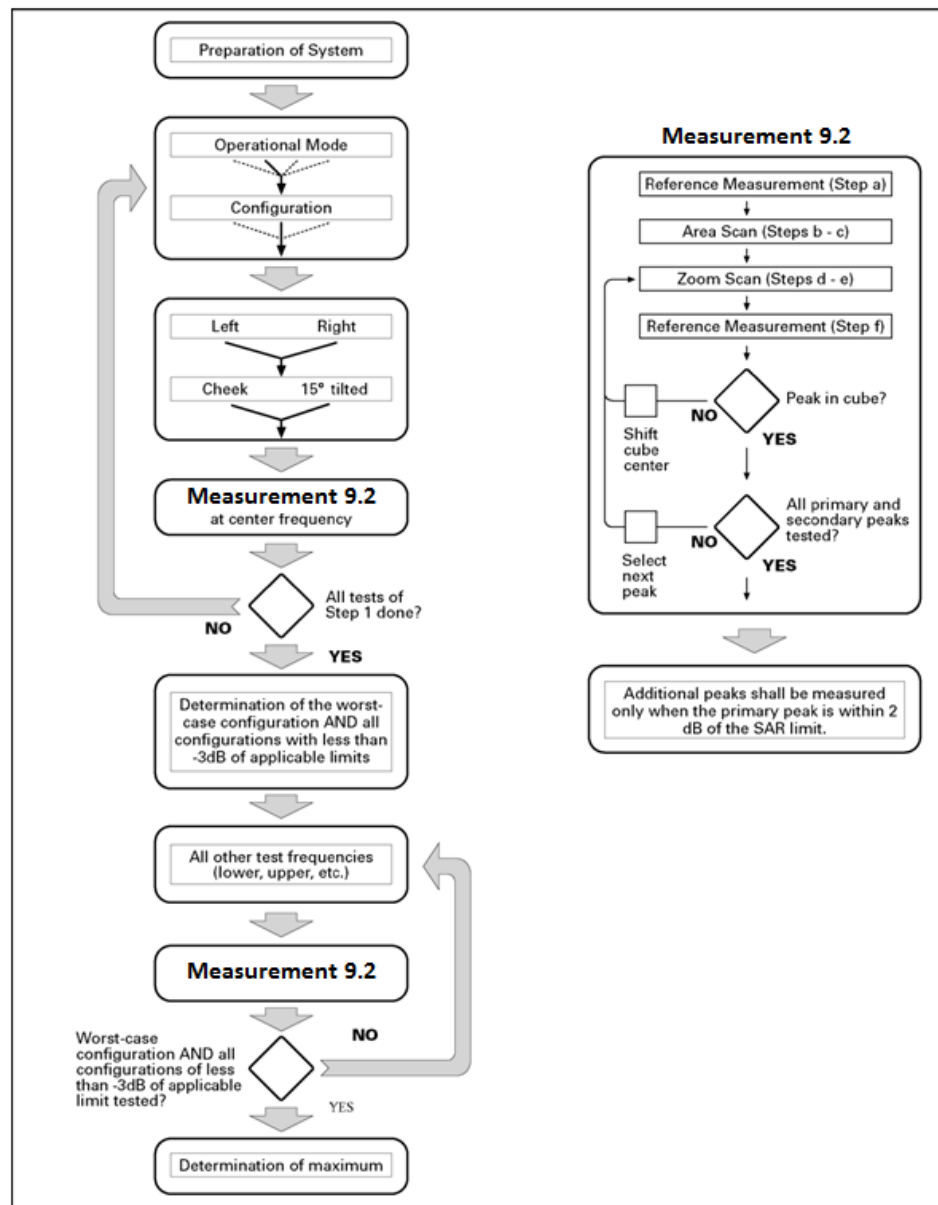

Picture 9.1 Block diagram of the tests to be performed

## 9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results

when all the measurement parameters in the following table are not satisfied.

|                                                                                                                                                                                                                                                                                                             |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                             |                                    |                                                                                      | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                                                     |
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface                                                                                                                                                                                                      |                                    |                                                                                      | $5 \pm 1$ mm                                                                                                                                                                                                                                                           | $\frac{1}{4} \cdot \delta \cdot \ln(2) \pm 0.5$ mm                            |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location                                                                                                                                                                                                                   |                                    |                                                                                      | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                                        |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                                                                                                                                                                                                                                 |                                    |                                                                                      | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm                                                                                                                                                                                                                  | 3 – 4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm                            |
|                                                                                                                                                                                                                                                                                                             |                                    |                                                                                      | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                               |
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$                                                                                                                                                                                                                                 |                                    |                                                                                      | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*                                                                                                                                                                                                                   | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                             | uniform grid: $\Delta z_{Zoom}(n)$ |                                                                                      | $\leq 5$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|                                                                                                                                                                                                                                                                                                             | graded grid                        | $\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|                                                                                                                                                                                                                                                                                                             |                                    | $\Delta z_{Zoom}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$                                                                                                                                                                                                                                  |                                                                               |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                                    | x, y, z                            |                                                                                      | $\geq 30$ mm                                                                                                                                                                                                                                                           | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                                                           |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |
| * When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>I-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |

### 9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

**For Release 5 HSDPA Data Devices:**

| Sub-test | $\beta_c$ | $\beta_d$ | $\beta_d$ (SF) | $\beta_c / \beta_d$ | $\beta_{hs}$ | CM/dB |
|----------|-----------|-----------|----------------|---------------------|--------------|-------|
| 1        | 2/15      | 15/15     | 64             | 2/15                | 4/15         | 0.0   |
| 2        | 12/15     | 15/15     | 64             | 12/15               | 24/25        | 1.0   |
| 3        | 15/15     | 8/15      | 64             | 15/8                | 30/15        | 1.5   |
| 4        | 15/15     | 4/15      | 64             | 15/4                | 30/15        | 1.5   |

**For Release 6 HSPA Data Devices**

| Sub-test | $\beta_c$ | $\beta_d$ | $\beta_d$ (SF) | $\beta_c / \beta_d$ | $\beta_{hs}$ | $\beta_{ec}$ | $\beta_{ed}$                               | $\beta_{ed}$ (SF) | $\beta_{ed}$ (codes) | CM (dB) | MPR (dB) | AG Index | E-TFCI |
|----------|-----------|-----------|----------------|---------------------|--------------|--------------|--------------------------------------------|-------------------|----------------------|---------|----------|----------|--------|
| 1        | 11/15     | 15/15     | 64             | 11/15               | 22/15        | 209/225      | 1039/225                                   | 4                 | 1                    | 1.0     | 0.0      | 20       | 75     |
| 2        | 6/15      | 15/15     | 64             | 6/15                | 12/15        | 12/15        | 12/15                                      | 4                 | 1                    | 3.0     | 2.0      | 12       | 67     |
| 3        | 15/15     | 9/15      | 64             | 15/9                | 30/15        | 30/15        | $\beta_{ed1}:47/15$<br>$\beta_{ed2}:47/15$ | 4                 | 2                    | 2.0     | 1.0      | 15       | 92     |
| 4        | 2/15      | 15/15     | 64             | 2/15                | 4/15         | 4/15         | 56/75                                      | 4                 | 1                    | 3.0     | 2.0      | 17       | 71     |
| 5        | 15/15     | 15/15     | 64             | 15/15               | 24/15        | 30/15        | 134/15                                     | 4                 | 1                    | 1.0     | 0.0      | 21       | 81     |

## 9.4 Bluetooth &WI-FI Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

## 9.5 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Anristu MT8820C. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the Anristu MT8820C. It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The

procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

## 9.6 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## 10 Area Scan Based 1-g SAR

### 10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bio electromagnetics Society meeting (2007) and the estimated 1-gSAR is  $\leq 1.2$  W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

### 10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

## 11 Conducted Output Power

### 11.1 Manufacturing tolerance

**Table 11.1: GSM Speech**

| GSM 850              |             |             |             |
|----------------------|-------------|-------------|-------------|
| Channel              | Channel 251 | Channel 190 | Channel 128 |
| Target (dBm)         | 32.5        | 32.5        | 32.5        |
| Tolerance $\pm$ (dB) | 1           | 1           | 1           |
| GSM 1900             |             |             |             |
| Channel              | Channel 810 | Channel 661 | Channel 512 |
| Target (dBm)         | 29          | 29          | 29          |
| Tolerance $\pm$ (dB) | 1           | 1           | 1           |

**Table 11.2: GPRS & EGPRS& 8PSK**

| GSM 850 GPRS&EGPRS (GMSK)  |                      |            |            |            |
|----------------------------|----------------------|------------|------------|------------|
| Channel                    |                      | <b>251</b> | <b>190</b> | <b>128</b> |
| 1 Txslot                   | Target (dBm)         | 32.5       | 32.5       | 32.5       |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |
| 2 Txslots                  | Target (dBm)         | 31         | 31         | 31         |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |
| 3Txslots                   | Target (dBm)         | 29         | 29         | 29         |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |
| 4 Txslots                  | Target (dBm)         | 28         | 28         | 28         |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |
| GSM 1900 GPRS&EGPRS (GMSK) |                      |            |            |            |
| Channel                    |                      | <b>810</b> | <b>661</b> | <b>512</b> |
| 1 Txslot                   | Target (dBm)         | 29         | 29         | 29         |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |
| 2 Txslots                  | Target (dBm)         | 28         | 28         | 28         |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |
| 3Txslots                   | Target (dBm)         | 26         | 26         | 26         |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |
| 4 Txslots                  | Target (dBm)         | 25         | 25         | 25         |
|                            | Tolerance $\pm$ (dB) | 1          | 1          | 1          |

**Table 11.3: WCDMA**

| UMTS Band V           |                      | Conducted Power (dBm) |              |              |
|-----------------------|----------------------|-----------------------|--------------|--------------|
|                       |                      | Channel 4233          | Channel 4183 | Channel 4132 |
| CS                    | Target (dBm)         | 23                    | 23           | 23           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 1      | Target (dBm)         | 22                    | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 2      | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 3      | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 4      | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 5      | Target (dBm)         | 22                    | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSDPA sub-test 1-4    | Target (dBm)         | 22                    | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| DC-HSDPA sub-test 1-4 | Target (dBm)         | 22                    | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| UMTS Band IV          |                      | Conducted Power(dBm)  |              |              |
|                       |                      | Channel 1513          | Channel 1413 | Channel 1312 |
| CS                    | Target (dBm)         | 22                    | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 1      | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 2      | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 3      | Target (dBm)         | 20                    | 20           | 20           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 4      | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSUPA sub-test 5      | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSDPA sub-test 1-2    | Target (dBm)         | 22                    | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| HSDPA sub-test 3-4    | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |
| DC-HSDPA sub-test 1-4 | Target (dBm)         | 21                    | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                     | 1            | 1            |

| UMTS Band II          |                      | Conducted Power(dBm) |              |              |
|-----------------------|----------------------|----------------------|--------------|--------------|
|                       |                      | Channel 9538         | Channel 9400 | Channel 9262 |
| CS                    | Target (dBm)         | 22                   | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| HSUPA sub-test 1      | Target (dBm)         | 21                   | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| HSUPA sub-test 2      | Target (dBm)         | 21                   | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| HSUPA sub-test 3      | Target (dBm)         | 21                   | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| HSUPA sub-test 4      | Target (dBm)         | 21                   | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| HSUPA sub-test 5      | Target (dBm)         | 22                   | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| HSDPA sub-test 1-2    | Target (dBm)         | 22                   | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| HSDPA sub-test 3-4    | Target (dBm)         | 21                   | 21           | 21           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |
| DC-HSDPA sub-test 1-4 | Target (dBm)         | 22                   | 22           | 22           |
|                       | Tolerance $\pm$ (dB) | 1                    | 1            | 1            |

**Table 11.4: LTE**

| LTE Band 2           |               |               |               |
|----------------------|---------------|---------------|---------------|
| Channel              | Channel 19100 | Channel 18900 | Channel 18700 |
| Target (dBm)         | 23            | 23            | 23            |
| Tolerance $\pm$ (dB) | 1             | 1             | 1             |
| LTE Band 4           |               |               |               |
| Channel              | Channel 20300 | Channel 20175 | Channel 20050 |
| Target (dBm)         | 23            | 23            | 23            |
| Tolerance $\pm$ (dB) | 1             | 1             | 1             |
| LTE Band 17          |               |               |               |
| Channel              | Channel 23800 | Channel 23790 | Channel 23780 |
| Target (dBm)         | 23.5          | 23.5          | 23.5          |
| Tolerance $\pm$ (dB) | 1             | 1             | 1             |

**LTE MPR will follow up 3GPP settings as below:**

| Modulation | Channel bandwidth / Transmission bandwidth (NRB) |          |          |           |           |           | MPR (dB) |
|------------|--------------------------------------------------|----------|----------|-----------|-----------|-----------|----------|
|            | 1.4MHz                                           | 3.0MHz   | 5MHz     | 10MHz     | 15MHz     | 20MHz     |          |
| QPSK       | > 5                                              | > 4      | > 8      | > 12      | > 16      | > 18      | 1        |
| 16 QAM     | $\leq$ 5                                         | $\leq$ 4 | $\leq$ 8 | $\leq$ 12 | $\leq$ 16 | $\leq$ 18 | 1        |
| 64 QAM     | > 5                                              | > 4      | > 8      | > 12      | > 16      | > 18      | 2        |

**Table 11.5: Bluetooth**

| Mode |                      | Channel 1 | Channel 39 | Channel 78 |
|------|----------------------|-----------|------------|------------|
| GFSK | Target (dBm)         | 0.5       | 0.5        | 0.5        |
|      | Tolerance $\pm$ (dB) | 1         | 1          | 1          |

**Table 11.6: WiFi**

| Mode                   | Channel/Data rate | Target (dBm) | Tolerance $\pm$ (dB) |
|------------------------|-------------------|--------------|----------------------|
| 802.11 b (2.4GHz)      | 1Mbps             | 17           | 1                    |
|                        | 2Mbps             | 17           | 1                    |
|                        | 5.5Mbps           | 17           | 1                    |
|                        | 11Mbps            | 17           | 1                    |
| 802.11 g (2.4GHz)      | 6-18Mbps          | 17           | 1                    |
|                        | 24-36Mbps         | 17           | 1                    |
|                        | 48-54Mbps         | 17           | 1                    |
| 802.11 n (2.4GHz HT20) | MCS0-7            | 17           | 1                    |

## 11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

**Table 11.7: The conducted power measurement results for GSM850/1900**

| GSM<br>850MHz  | Conducted Power (dBm)  |                       |                        |
|----------------|------------------------|-----------------------|------------------------|
|                | Channel 251(848.8MHz)  | Channel 190(836.6MHz) | Channel 128(824.2MHz)  |
|                | 32.76                  | 32.97                 | 32.78                  |
| GSM<br>1900MHz | Conducted Power(dBm)   |                       |                        |
|                | Channel 810(1909.8MHz) | Channel 661(1880MHz)  | Channel 512(1850.2MHz) |
|                | 29.82                  | 29.67                 | 29.66                  |

**Table 11.8: The conducted power measurement results for GPRS and EGPRS**

| GSM 850         |          | Measured Power (dBm) |       |       | calculation | Average Power (dBm) |       |       |
|-----------------|----------|----------------------|-------|-------|-------------|---------------------|-------|-------|
|                 |          | 251                  | 190   | 128   |             | 251                 | 190   | 128   |
| GPRS            | 1Txslots | 32.76                | 32.97 | 32.78 | -9.03dB     | 23.73               | 23.94 | 23.75 |
|                 | 2Txslots | 30.51                | 30.70 | 30.69 | -6.02dB     | 24.49               | 24.68 | 24.67 |
|                 | 3Txslots | 28.96                | 29.06 | 28.96 | -4.26dB     | 24.70               | 24.80 | 24.70 |
|                 | 4Txslots | 27.80                | 28.05 | 27.84 | -3.01dB     | 24.79               | 25.04 | 24.83 |
| EGPRS<br>(GMSK) | 1Txslots | 32.73                | 32.95 | 32.77 | -9.03dB     | 23.70               | 23.92 | 23.74 |
|                 | 2Txslots | 30.51                | 30.68 | 30.67 | -6.02dB     | 24.49               | 24.66 | 24.65 |
|                 | 3Txslots | 28.94                | 29.05 | 28.95 | -4.26dB     | 24.68               | 24.79 | 24.69 |
|                 | 4Txslots | 27.80                | 28.03 | 27.83 | -3.01dB     | 24.79               | 25.02 | 24.82 |
| GSM 1900        |          | Measured Power (dBm) |       |       | calculation | Average Power (dBm) |       |       |
|                 |          | 810                  | 661   | 512   |             | 810                 | 661   | 512   |
| GPRS            | 1Txslots | 29.82                | 29.67 | 29.66 | -9.03dB     | 20.79               | 20.64 | 20.63 |
|                 | 2Txslots | 27.86                | 27.86 | 27.90 | -6.02dB     | 21.84               | 21.84 | 21.88 |
|                 | 3Txslots | 26.65                | 26.58 | 26.70 | -4.26dB     | 22.39               | 22.32 | 22.44 |
|                 | 4Txslots | 25.42                | 25.41 | 25.52 | -3.01dB     | 22.41               | 22.40 | 22.51 |
| EGPRS<br>(GMSK) | 1Txslots | 29.81                | 29.66 | 29.64 | -9.03dB     | 20.78               | 20.63 | 20.61 |
|                 | 2Txslots | 27.83                | 27.85 | 27.90 | -6.02dB     | 21.81               | 21.83 | 21.88 |
|                 | 3Txslots | 26.64                | 26.56 | 26.70 | -4.26dB     | 22.38               | 22.30 | 22.44 |
|                 | 4Txslots | 25.41                | 25.41 | 25.51 | -3.01dB     | 22.40               | 22.40 | 22.50 |

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**According to the conducted power as above, the body measurements are performed with 4Txslots for GSM 850andGSM 1900.**

### 11.3 WCDMA Measurement result

Table 11.9: The conducted Power for WCDMA850/1700/1900

| Item     | band  | FDDV result      |                 |                  |
|----------|-------|------------------|-----------------|------------------|
|          | ARFCN | 4233 (846.6MHz)  | 4182(836.4MHz)  | 4133 (826.4MHz)  |
| WCDMA    | 1     | 23.5             | 23.5            | 23.5             |
| HSUPA    | 1     | 22.4             | 21.9            | 22.5             |
|          | 2     | 21.5             | 21.5            | 21.6             |
|          | 3     | 21.5             | 21.6            | 21.7             |
|          | 4     | 21.8             | 21.9            | 21.9             |
|          | 5     | 22.5             | 22.5            | 22.6             |
| HSDPA    | 1     | 22.4             | 22.6            | 22.5             |
|          | 2     | 22.5             | 22.4            | 22.5             |
|          | 3     | 22.1             | 22              | 22.1             |
|          | 4     | 22.1             | 22              | 22.1             |
| DC-HSDPA | 1     | 22.69            | 22.51           | 22.63            |
|          | 2     | 22.65            | 22.62           | 22.61            |
|          | 3     | 22.61            | 22.61           | 22.55            |
|          | 4     | 22.68            | 22.57           | 22.57            |
| Item     | band  | FDDIV result     |                 |                  |
|          | ARFCN | 1513 (1752.6MHz) | 1413(1732.6MHz) | 1312 (1712.4MHz) |
| WCDMA    | 1     | 22.2             | 22.1            | 22.2             |
| HSUPA    | 1     | 20.7             | 20.5            | 21.4             |
|          | 2     | 20.3             | 20.1            | 20               |
|          | 3     | 20.1             | 19.9            | 19.7             |
|          | 4     | 20.2             | 20.7            | 20.8             |
|          | 5     | 21.4             | 21.2            | 21.3             |
| HSDPA    | 1     | 21.3             | 21.1            | 21.2             |
|          | 2     | 21.4             | 21.2            | 21.4             |
|          | 3     | 20.9             | 20.6            | 20.9             |
|          | 4     | 20.9             | 20.6            | 20.8             |
| DC-HSDPA | 1     | 21.76            | 21.66           | 21.63            |
|          | 2     | 21.72            | 21.64           | 21.65            |
|          | 3     | 21.7             | 21.61           | 21.61            |
|          | 4     | 21.75            | 21.67           | 21.58            |

| Item     | band  | FDDII result     |                |                  |
|----------|-------|------------------|----------------|------------------|
|          | ARFCN | 9538 (1907.6MHz) | 9400 (1880MHz) | 9262 (1852.4MHz) |
| WCDMA    | 1     | 22.3             | 22.2           | 22.4             |
| HSUPA    | 1     | 21.3             | 20.8           | 21.5             |
|          | 2     | 20.3             | 20.2           | 20.4             |
|          | 3     | 20               | 20             | 20.1             |
|          | 4     | 20.2             | 20.9           | 20.9             |
|          | 5     | 21.3             | 21.4           | 21.5             |
| HSDPA    | 1     | 21.3             | 21.3           | 21.5             |
|          | 2     | 21.3             | 21.4           | 21.5             |
|          | 3     | 20.8             | 20.9           | 21               |
|          | 4     | 20.8             | 20.8           | 21.1             |
| DC-HSDPA | 1     | 22.14            | 22.01          | 21.96            |
|          | 2     | 22.1             | 22.07          | 21.92            |
|          | 3     | 22.09            | 22.05          | 21.95            |
|          | 4     | 22.12            | 22.08          | 21.97            |

## 11.4LTE\_FDD Measurement result

Table 11.10: The conducted Power for LTE-FDD

| LTE-FDD Band 2 |              |          |            | Actual output Power (dBm) |         |           |
|----------------|--------------|----------|------------|---------------------------|---------|-----------|
| Bandwidth      | RBallocation | RBoffset | Modulation | High                      | Middle  | Low       |
| 1.4 MHz        |              |          |            | 1909.3MHz                 | 1880MHz | 1850.7MHz |
|                | 1RB          | High     | QPSK       | 23.22                     | 23.22   | 23.26     |
|                |              |          | 16QAM      | 22.27                     | 22.31   | 22.30     |
|                |              | Middle   | QPSK       | 23.20                     | 23.23   | 23.28     |
|                |              |          | 16QAM      | 22.23                     | 22.24   | 22.28     |
|                |              | Low      | QPSK       | 23.23                     | 23.24   | 23.27     |
|                |              |          | 16QAM      | 22.28                     | 22.31   | 22.34     |
|                | 3RB          | High     | QPSK       | 23.18                     | 23.19   | 23.21     |
|                |              |          | 16QAM      | 22.13                     | 22.28   | 22.17     |
|                |              | Middle   | QPSK       | 23.18                     | 23.20   | 23.23     |
|                |              |          | 16QAM      | 22.13                     | 22.31   | 22.19     |
|                |              | Low      | QPSK       | 23.20                     | 23.20   | 23.22     |
|                |              |          | 16QAM      | 22.21                     | 22.20   | 22.24     |
|                | 6RB          | /        | QPSK       | 22.04                     | 22.06   | 22.08     |
|                |              |          | 16QAM      | 21.16                     | 21.17   | 21.16     |
| 3 MHz          |              |          |            | 1908.5MHz                 | 1880MHz | 1851.5MHz |
|                | 1RB          | High     | QPSK       | 23.18                     | 23.18   | 23.21     |
|                |              |          | 16QAM      | 22.30                     | 22.29   | 22.31     |
|                |              | Middle   | QPSK       | 23.20                     | 23.25   | 23.26     |
|                |              |          | 16QAM      | 22.29                     | 22.30   | 22.30     |
|                |              | Low      | QPSK       | 23.20                     | 23.21   | 23.26     |
|                |              |          | 16QAM      | 22.29                     | 22.31   | 22.34     |
|                | 8RB          | High     | QPSK       | 22.19                     | 22.18   | 22.16     |
|                |              |          | 16QAM      | 21.23                     | 21.23   | 21.24     |
|                |              | Middle   | QPSK       | 22.15                     | 22.24   | 22.22     |
|                |              |          | 16QAM      | 21.27                     | 21.25   | 21.24     |
|                |              | Low      | QPSK       | 22.19                     | 22.21   | 22.23     |
|                |              |          | 16QAM      | 21.30                     | 21.29   | 21.30     |
|                | 15RB         | /        | QPSK       | 22.09                     | 22.11   | 22.13     |
|                |              |          | 16QAM      | 21.16                     | 21.17   | 21.16     |

| 5 MHz  |      |        |       | 1907.5MHz | 1880MHz | 1852.5MHz |
|--------|------|--------|-------|-----------|---------|-----------|
|        | 1RB  | High   | QPSK  | 23.23     | 23.22   | 23.24     |
|        |      |        | 16QAM | 22.28     | 22.31   | 22.31     |
|        |      | Middle | QPSK  | 23.20     | 23.20   | 23.24     |
|        |      |        | 16QAM | 22.29     | 22.29   | 22.31     |
|        |      | Low    | QPSK  | 23.24     | 23.22   | 23.27     |
|        |      |        | 16QAM | 22.31     | 22.31   | 22.34     |
|        | 12RB | High   | QPSK  | 22.14     | 22.18   | 22.21     |
|        |      |        | 16QAM | 21.25     | 21.24   | 21.27     |
|        |      | Middle | QPSK  | 22.19     | 22.18   | 22.17     |
|        |      |        | 16QAM | 21.32     | 21.23   | 21.32     |
|        |      | Low    | QPSK  | 22.18     | 22.20   | 22.22     |
|        |      |        | 16QAM | 21.26     | 21.25   | 21.29     |
|        | 25RB |        | QPSK  | 22.11     | 22.13   | 22.15     |
| 16QAM  |      |        | 21.16 | 21.15     | 21.19   |           |
| 10 MHz |      |        |       | 1905MHz   | 1880MHz | 1855MHz   |
|        | 1RB  | High   | QPSK  | 23.23     | 23.22   | 23.24     |
|        |      |        | 16QAM | 22.31     | 22.30   | 22.31     |
|        |      | Middle | QPSK  | 23.24     | 23.20   | 23.25     |
|        |      |        | 16QAM | 22.28     | 22.27   | 22.27     |
|        |      | Low    | QPSK  | 23.23     | 23.23   | 23.27     |
|        |      |        | 16QAM | 22.30     | 22.30   | 22.33     |
|        | 25RB | High   | QPSK  | 22.18     | 22.20   | 22.22     |
|        |      |        | 16QAM | 21.28     | 21.33   | 21.30     |
|        |      | Middle | QPSK  | 22.18     | 22.19   | 22.21     |
|        |      |        | 16QAM | 21.28     | 21.34   | 21.34     |
|        |      | Low    | QPSK  | 22.18     | 22.20   | 22.22     |
|        |      |        | 16QAM | 21.26     | 21.26   | 21.30     |
|        | 50RB | /      | QPSK  | 22.09     | 22.11   | 22.13     |
| 16QAM  |      |        | 21.17 | 21.20     | 21.22   |           |

| 15 MHz |       |        |       | 1902.5MHz | 1880MHz | 1857.5MHz |
|--------|-------|--------|-------|-----------|---------|-----------|
|        | 1RB   | High   | QPSK  | 23.21     | 23.22   | 23.24     |
|        |       |        | 16QAM | 22.30     | 22.27   | 22.30     |
|        |       | Middle | QPSK  | 23.21     | 23.23   | 23.24     |
|        |       |        | 16QAM | 22.32     | 22.26   | 22.29     |
|        |       | Low    | QPSK  | 23.22     | 23.24   | 23.28     |
|        |       |        | 16QAM | 22.29     | 22.30   | 22.34     |
|        | 36RB  | High   | QPSK  | 22.19     | 22.20   | 22.22     |
|        |       |        | 16QAM | 21.25     | 21.33   | 21.30     |
|        |       | Middle | QPSK  | 22.21     | 22.20   | 22.25     |
|        |       |        | 16QAM | 21.28     | 21.24   | 21.24     |
|        |       | Low    | QPSK  | 22.18     | 22.20   | 22.23     |
| 16QAM  |       |        | 21.25 | 21.29     | 21.27   |           |
| 75RB   | /     | QPSK   | 22.13 | 22.14     | 22.16   |           |
|        |       | 16QAM  | 21.16 | 21.17     | 21.22   |           |
| 20 MHz |       |        |       | 1900MHz   | 1880MHz | 1860MHz   |
|        | 1RB   | High   | QPSK  | 23.24     | 23.25   | 23.28     |
|        |       |        | 16QAM | 22.29     | 22.28   | 22.31     |
|        |       | Middle | QPSK  | 23.24     | 23.26   | 23.29     |
|        |       |        | 16QAM | 22.32     | 22.29   | 22.33     |
|        |       | Low    | QPSK  | 23.25     | 23.28   | 23.30     |
|        |       |        | 16QAM | 22.31     | 22.32   | 22.36     |
|        | 50RB  | High   | QPSK  | 22.18     | 22.20   | 22.22     |
|        |       |        | 16QAM | 21.26     | 21.25   | 21.27     |
|        |       | Middle | QPSK  | 22.18     | 22.20   | 22.19     |
|        |       |        | 16QAM | 21.25     | 21.27   | 21.30     |
|        |       | Low    | QPSK  | 22.20     | 22.22   | 22.23     |
|        |       |        | 16QAM | 21.28     | 21.27   | 21.30     |
|        | 100RB | /      | QPSK  | 22.14     | 22.15   | 22.18     |
|        |       |        | 16QAM | 21.18     | 21.19   | 21.22     |

| LTE-FDD Band 4 |              |          |            | Actual output Power (dBm) |           |           |
|----------------|--------------|----------|------------|---------------------------|-----------|-----------|
| Bandwidth      | RBallocation | RBoffset | Modulation | High                      | Middle    | Low       |
| 1.4 MHz        |              |          |            | 1754.3MHz                 | 1732.5MHz | 1710.7MHz |
|                | 1RB          | High     | QPSK       | 23.87                     | 23.86     | 23.85     |
|                |              |          | 16QAM      | 22.95                     | 22.92     | 22.94     |
|                |              | Middle   | QPSK       | 23.87                     | 23.85     | 23.81     |
|                |              |          | 16QAM      | 22.98                     | 22.96     | 22.97     |
|                |              | Low      | QPSK       | 23.85                     | 23.82     | 23.83     |
|                |              |          | 16QAM      | 22.98                     | 22.94     | 22.94     |
|                | 3RB          | High     | QPSK       | 23.85                     | 23.84     | 23.83     |
|                |              |          | 16QAM      | 22.78                     | 22.81     | 22.77     |
|                |              | Middle   | QPSK       | 23.85                     | 23.83     | 23.85     |
|                |              |          | 16QAM      | 22.76                     | 22.78     | 22.79     |
|                |              | Low      | QPSK       | 23.88                     | 23.84     | 23.87     |
|                |              |          | 16QAM      | 22.85                     | 22.76     | 22.86     |
|                | 6RB          | /        | QPSK       | 22.70                     | 22.68     | 22.67     |
|                |              |          | 16QAM      | 21.77                     | 21.71     | 21.72     |
| 3 MHz          |              |          |            | 1753.5MHz                 | 1732.5MHz | 1711.5MHz |
|                | 1RB          | High     | QPSK       | 23.84                     | 23.83     | 23.84     |
|                |              |          | 16QAM      | 22.99                     | 22.96     | 22.93     |
|                |              | Middle   | QPSK       | 23.88                     | 23.84     | 23.83     |
|                |              |          | 16QAM      | 22.97                     | 22.96     | 22.95     |
|                |              | Low      | QPSK       | 23.81                     | 23.82     | 23.83     |
|                |              |          | 16QAM      | 22.96                     | 22.97     | 22.96     |
|                | 8RB          | High     | QPSK       | 22.75                     | 22.76     | 22.77     |
|                |              |          | 16QAM      | 21.76                     | 21.74     | 21.74     |
|                |              | Middle   | QPSK       | 22.75                     | 22.73     | 22.70     |
|                |              |          | 16QAM      | 21.69                     | 21.68     | 21.68     |
|                |              | Low      | QPSK       | 22.71                     | 22.79     | 22.76     |
|                |              |          | 16QAM      | 21.77                     | 21.76     | 21.74     |
|                | 15RB         | /        | QPSK       | 22.73                     | 22.73     | 22.66     |
|                |              |          | 16QAM      | 21.78                     | 21.78     | 21.75     |

| 5 MHz  |      |        |       | 1752.5MHz | 1732.5MHz | 1712.5MHz |
|--------|------|--------|-------|-----------|-----------|-----------|
|        | 1RB  | High   | QPSK  | 23.89     | 23.82     | 23.85     |
|        |      |        | 16QAM | 22.99     | 22.94     | 22.95     |
|        |      | Middle | QPSK  | 23.86     | 23.84     | 23.83     |
|        |      |        | 16QAM | 22.98     | 22.99     | 22.96     |
|        |      | Low    | QPSK  | 23.86     | 23.87     | 23.83     |
|        |      |        | 16QAM | 22.96     | 22.95     | 22.98     |
|        | 12RB | High   | QPSK  | 22.75     | 22.74     | 22.76     |
|        |      |        | 16QAM | 21.70     | 21.72     | 21.73     |
|        |      | Middle | QPSK  | 22.73     | 22.70     | 22.75     |
|        |      |        | 16QAM | 21.73     | 21.71     | 21.69     |
|        |      | Low    | QPSK  | 22.71     | 22.75     | 22.73     |
|        |      |        | 16QAM | 21.79     | 21.78     | 21.68     |
|        | 25RB | /      | QPSK  | 22.69     | 22.68     | 22.66     |
| 16QAM  |      |        | 21.71 | 21.73     | 21.72     |           |
| 10 MHz |      |        |       | 1750MHz   | 1732.5MHz | 1715MHz   |
|        | 1RB  | High   | QPSK  | 23.85     | 23.83     | 23.84     |
|        |      |        | 16QAM | 22.96     | 22.90     | 22.93     |
|        |      | Middle | QPSK  | 23.88     | 23.87     | 23.83     |
|        |      |        | 16QAM | 22.95     | 22.92     | 22.94     |
|        |      | Low    | QPSK  | 23.89     | 23.86     | 23.85     |
|        |      |        | 16QAM | 22.98     | 22.96     | 22.97     |
|        | 25RB | High   | QPSK  | 22.76     | 22.75     | 22.74     |
|        |      |        | 16QAM | 21.74     | 21.71     | 21.72     |
|        |      | Middle | QPSK  | 22.76     | 22.75     | 22.74     |
|        |      |        | 16QAM | 21.74     | 21.78     | 21.74     |
|        |      | Low    | QPSK  | 22.75     | 22.74     | 22.74     |
|        |      |        | 16QAM | 21.78     | 21.79     | 21.74     |
|        | 50RB | /      | QPSK  | 22.74     | 22.72     | 22.71     |
|        |      |        | 16QAM | 21.78     | 21.75     | 21.74     |

| 15 MHz |       |        |       | 1747.5MHz | 1732.5MHz | 1717.5MHz |
|--------|-------|--------|-------|-----------|-----------|-----------|
|        | 1RB   | High   | QPSK  | 23.83     | 23.89     | 23.87     |
|        |       |        | 16QAM | 22.97     | 22.96     | 22.96     |
|        |       | Middle | QPSK  | 23.85     | 23.86     | 23.86     |
|        |       |        | 16QAM | 22.99     | 22.94     | 22.93     |
|        |       | Low    | QPSK  | 23.87     | 23.82     | 23.85     |
|        |       |        | 16QAM | 22.97     | 22.95     | 22.94     |
|        | 36RB  | High   | QPSK  | 22.75     | 22.77     | 22.74     |
|        |       |        | 16QAM | 21.74     | 21.71     | 21.71     |
|        |       | Middle | QPSK  | 22.75     | 22.76     | 22.75     |
|        |       |        | 16QAM | 21.78     | 21.74     | 21.71     |
|        |       | Low    | QPSK  | 22.75     | 22.79     | 22.77     |
| 16QAM  |       |        | 21.69 | 21.68     | 21.74     |           |
| 75RB   | /     | QPSK   | 22.69 | 22.68     | 22.66     |           |
|        |       | 16QAM  | 21.77 | 21.76     | 21.73     |           |
| 20 MHz |       |        |       | 1745MHz   | 1732.5MHz | 1720MHz   |
|        | 1RB   | High   | QPSK  | 23.95     | 23.91     | 23.92     |
|        |       |        | 16QAM | 22.98     | 22.96     | 22.93     |
|        |       | Middle | QPSK  | 23.89     | 23.92     | 23.83     |
|        |       |        | 16QAM | 22.95     | 22.92     | 22.92     |
|        |       | Low    | QPSK  | 23.91     | 23.90     | 23.88     |
|        |       |        | 16QAM | 22.97     | 22.96     | 22.96     |
|        | 50RB  | High   | QPSK  | 22.79     | 22.77     | 22.76     |
|        |       |        | 16QAM | 21.74     | 21.72     | 21.74     |
|        |       | Middle | QPSK  | 22.74     | 22.75     | 22.77     |
|        |       |        | 16QAM | 21.72     | 21.69     | 21.74     |
|        |       | Low    | QPSK  | 22.74     | 22.73     | 22.71     |
|        |       |        | 16QAM | 21.74     | 21.72     | 21.68     |
|        | 100RB | /      | QPSK  | 22.72     | 22.70     | 22.71     |
|        |       |        | 16QAM | 21.77     | 21.72     | 21.73     |

| LTE-FDD Band 12 |              |          |            | Actual output Power (dBm) |          |          |
|-----------------|--------------|----------|------------|---------------------------|----------|----------|
| Bandwidth       | RBallocation | RBoffset | Modulation | High                      | Middle   | Low      |
| 1.4 MHz         |              |          |            | 715.3MHz                  | 707.5MHz | 699.7MHz |
|                 | 1RB          | High     | QPSK       | 24.09                     | 24.05    | 24.01    |
|                 |              |          | 16QAM      | 23.01                     | 22.99    | 22.93    |
|                 |              | Middle   | QPSK       | 24.11                     | 24.06    | 24.04    |
|                 |              |          | 16QAM      | 23.01                     | 23.01    | 22.97    |
|                 |              | Low      | QPSK       | 24.08                     | 24.06    | 24.05    |
|                 |              |          | 16QAM      | 23.00                     | 22.97    | 22.96    |
|                 | 3RB          | High     | QPSK       | 23.92                     | 23.84    | 23.83    |
|                 |              |          | 16QAM      | 22.70                     | 22.68    | 22.70    |
|                 |              | Middle   | QPSK       | 23.92                     | 23.84    | 23.83    |
|                 |              |          | 16QAM      | 22.70                     | 22.68    | 22.70    |
|                 |              | Low      | QPSK       | 23.89                     | 23.84    | 23.84    |
|                 |              |          | 16QAM      | 22.76                     | 22.73    | 22.69    |
|                 | 6RB          | /        | QPSK       | 23.01                     | 23.01    | 23.00    |
|                 |              |          | 16QAM      | 22.04                     | 22.02    | 22.00    |
| 3 MHz           |              |          |            | 714.5MHz                  | 707.5MHz | 700.5MHz |
|                 | 1RB          | High     | QPSK       | 24.08                     | 24.05    | 24.01    |
|                 |              |          | 16QAM      | 23.01                     | 22.97    | 22.97    |
|                 |              | Middle   | QPSK       | 24.11                     | 24.08    | 24.04    |
|                 |              |          | 16QAM      | 23.00                     | 22.98    | 22.98    |
|                 |              | Low      | QPSK       | 24.07                     | 24.07    | 24.04    |
|                 |              |          | 16QAM      | 23.00                     | 23.00    | 22.95    |
|                 | 8RB          | High     | QPSK       | 23.03                     | 22.99    | 23.01    |
|                 |              |          | 16QAM      | 22.00                     | 21.98    | 22.04    |
|                 |              | Middle   | QPSK       | 23.01                     | 23.00    | 23.01    |
|                 |              |          | 16QAM      | 22.04                     | 22.00    | 22.03    |
|                 |              | Low      | QPSK       | 23.00                     | 23.02    | 22.99    |
|                 |              |          | 16QAM      | 21.98                     | 22.02    | 21.97    |
|                 | 15RB         | /        | QPSK       | 23.02                     | 22.98    | 22.99    |
|                 |              |          | 16QAM      | 22.00                     | 21.99    | 21.98    |

| 5 MHz  |      |        |       | 713.5MHz | 707.5MHz | 701.5MHz |
|--------|------|--------|-------|----------|----------|----------|
|        | 1RB  | High   | QPSK  | 24.04    | 23.99    | 24.00    |
|        |      |        | 16QAM | 22.99    | 22.95    | 22.95    |
|        |      | Middle | QPSK  | 24.10    | 24.05    | 24.01    |
|        |      |        | 16QAM | 22.99    | 22.97    | 22.99    |
|        |      | Low    | QPSK  | 24.10    | 24.06    | 24.05    |
|        |      |        | 16QAM | 23.02    | 22.97    | 22.98    |
|        | 12RB | High   | QPSK  | 23.07    | 23.02    | 23.06    |
|        |      |        | 16QAM | 22.06    | 22.00    | 22.07    |
|        |      | Middle | QPSK  | 23.08    | 23.07    | 23.05    |
|        |      |        | 16QAM | 22.01    | 22.02    | 22.06    |
|        |      | Low    | QPSK  | 23.11    | 23.10    | 23.08    |
| 16QAM  |      |        | 22.05 | 22.03    | 22.00    |          |
| 25RB   | /    | QPSK   | 23.07 | 23.03    | 23.01    |          |
|        |      | 16QAM  | 22.06 | 22.04    | 22.03    |          |
| 10 MHz |      |        |       | 711MHz   | 707.5MHz | 704MHz   |
|        | 1RB  | High   | QPSK  | 24.14    | 24.06    | 24.02    |
|        |      |        | 16QAM | 23.04    | 23.01    | 22.99    |
|        |      | Middle | QPSK  | 24.12    | 24.09    | 24.06    |
|        |      |        | 16QAM | 23.01    | 22.99    | 22.96    |
|        |      | Low    | QPSK  | 24.11    | 24.06    | 24.04    |
|        |      |        | 16QAM | 23.01    | 23.01    | 22.97    |
|        | 25RB | High   | QPSK  | 23.10    | 23.08    | 23.06    |
|        |      |        | 16QAM | 22.00    | 21.99    | 21.98    |
|        |      | Middle | QPSK  | 23.08    | 23.07    | 23.06    |
|        |      |        | 16QAM | 22.04    | 22.06    | 22.04    |
|        |      | Low    | QPSK  | 23.07    | 23.08    | 23.07    |
|        |      |        | 16QAM | 22.07    | 22.01    | 22.02    |
|        | 50RB | /      | QPSK  | 23.12    | 23.05    | 23.01    |
| 16QAM  |      |        | 22.07 | 22.06    | 22.04    |          |

### 11.5 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

| Mode | Conducted Power (dBm) |                      |                      |
|------|-----------------------|----------------------|----------------------|
|      | Channel 0 (2402MHz)   | Channel 39 (2441MHz) | Channel 78 (2480MHz) |
| GFSK | 0.28                  | 1.45                 | 0.06                 |

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

| Channel\data rate | 1Mbps | 2Mbps | 5.5Mbps | 11Mbps |
|-------------------|-------|-------|---------|--------|
| 1(2412MHz)        | 17.77 | 17.5  | 17.57   | 17.64  |
| 6(2437MHz)        | 17.61 | 17.4  | 17.42   | 17.46  |
| 11(2462MHz)       | 17.36 | 17.57 | 17.64   | 17.66  |

802.11g (dBm)

| Channel\data rate | 6Mbps | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
|-------------------|-------|-------|--------|--------|--------|--------|--------|--------|
| 1(2412MHz)        | 17.44 | 17.35 | 17.38  | 17.47  | 17.5   | 17.63  | 17.72  | 17.74  |
| 6(2437MHz)        | 17.39 | 17.49 | 17.54  | 17.63  | 17.67  | 17.56  | 17.57  | 17.62  |
| 11(2462MHz)       | 17.24 | 17.22 | 17.27  | 17.37  | 17.39  | 17.52  | 17.6   | 17.63  |

802.11n (dBm) - HT20 (2.4G)


| Channel\data rate | MCS0  | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1(2412MHz)        | 16.83 | 16.74 | 16.8  | 16.92 | 17.05 | 17.13 | 17.19 | 17.21 |
| 6(2437MHz)        | 16.75 | 16.69 | 16.77 | 16.82 | 16.78 | 16.9  | 17.00 | 17.03 |
| 11(2462MHz)       | 16.61 | 16.45 | 16.54 | 16.55 | 16.64 | 16.73 | 16.76 | 16.81 |

## 12 Simultaneous TX SAR Considerations

### 12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

### 12.2 Transmit Antenna Separation Distances

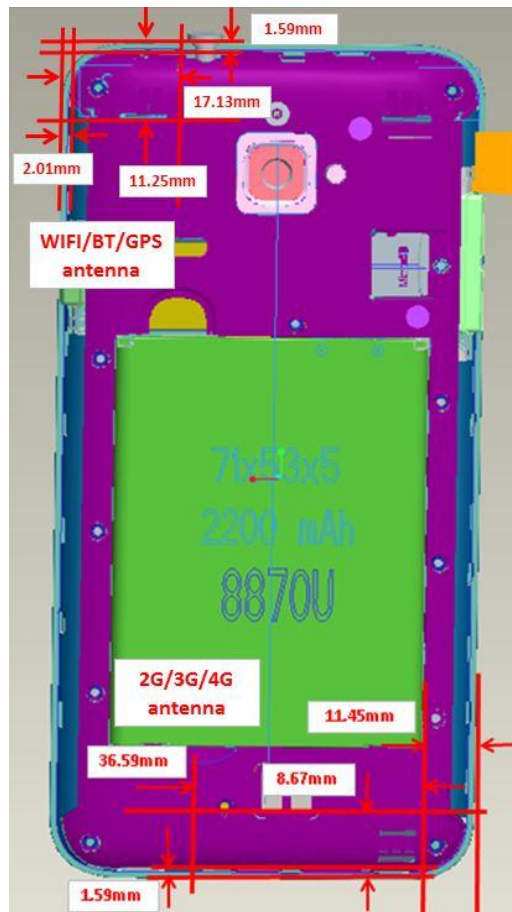

Picture 12.1 Antenna Locations

### 12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

| SAR measurement positions |       |      |           |            |          |             |
|---------------------------|-------|------|-----------|------------|----------|-------------|
| Mode                      | Front | Rear | Left edge | Right edge | Top edge | Bottom edge |
| Main antenna              | Yes   | Yes  | Yes       | Yes        | No       | Yes         |
| WLAN                      | Yes   | Yes  | No        | Yes        | Yes      | No          |

## 12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{\text{max. power of channel, including tune-up tolerance, mW}}{(\text{min. test separation distance, mm})} \right] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

**Table 12.1: Standalone SAR test exclusion considerations**

| Band/Mode            | F(GHz) | Position | SAR test exclusion threshold (mW) | RF output power |       | SAR test exclusion |
|----------------------|--------|----------|-----------------------------------|-----------------|-------|--------------------|
|                      |        |          |                                   | dBm             | mW    |                    |
| Bluetooth            | 2.441  | Head     | 9.60                              | 1.5             | 1.41  | Yes                |
|                      |        | Body     | 19.20                             | 1.5             | 1.41  | Yes                |
| 2.4GHz WLAN 802.11 b | 2.45   | Head     | 9.58                              | 18              | 63.10 | No                 |
|                      |        | Body     | 19.17                             | 18              | 63.10 | No                 |

### 13 Evaluation of Simultaneous

**Table 13.1: The sum of reported SAR values for main antenna and WiFi**

|                                     | Position  | Main antenna | WiFi | Sum         |
|-------------------------------------|-----------|--------------|------|-------------|
| Highest reported SAR value for Head | LeftCheek | 0.58         | 0.83 | <b>1.41</b> |
| Highest reported SAR value for Body | Rear      | 0.77         | 0.29 | <b>1.06</b> |
|                                     | Bottom    | 1.10         | /    | <b>1.10</b> |

**Table 13.2: The sum of reported SAR values for main antenna and Bluetooth**

|                                     | Position  | Main antenna | BT*  | Sum         |
|-------------------------------------|-----------|--------------|------|-------------|
| Highest reported SAR value for Head | LeftCheek | 0.58         | 0.06 | <b>0.64</b> |
| Highest reported SAR value for Body | Rear      | 0.77         | 0.03 | <b>0.80</b> |
|                                     | Bottom    | 1.10         | /    | <b>1.10</b> |

BT\* - Estimated SAR for Bluetooth (see the table 13.3)

**Table 13.3: Estimated SAR for Bluetooth**

| Position | F (GHz) | Distance (mm) | Upper limit of power * |      | Estimated <sub>1g</sub><br>(W/kg) |
|----------|---------|---------------|------------------------|------|-----------------------------------|
|          |         |               | dBm                    | mW   |                                   |
| Head     | 2.441   | 5             | 1.5                    | 1.41 | 0.06                              |
| Body     | 2.441   | 10            | 1.5                    | 1.41 | 0.03                              |

\* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

#### Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

## 14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or >1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where  $P_{\text{Target}}$  is the power of manufacturing upper limit;

$P_{\text{Measured}}$  is the measured power in chapter 11.

**Table 14.1: Duty Cycle**

| Mode                          | Duty Cycle |
|-------------------------------|------------|
| Speech for GSM850/1900        | 1:8.3      |
| GPRS&EGPRS for GSM850/GSM1900 | 1:2        |
| WCDMA850/1700/1900            | 1:1        |
| FDD_LTE Band 2/4/12           | 1:1        |

## 14.1 SAR results for Fast SAR

According to the client request, we perform the spot check for head and body of each band respectively. If the spot check value is larger than the original value and doesnot exceed half of the SAR limit, the same configuration is tested to replace the original values and others are quoted. Otherwise, all the original values are quoted directly. The original values are marked with “Original” in the right column of below tables and the new tested values are marked with “New”.

**Table 14.2: SAR Values (GSM 850 MHz Band - Head)**

| Ambient Temperature: 23.7°C |     |       |               |            |                       | Liquid Temperature: 23.2°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-----|-------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |     | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch. |       |               |            |                       |                            |                          |                          |                         |                         |                  |          |
| 836.6                       | 190 | Left  | Touch         | /          | 32.97                 | 33.5                       | 0.048                    | <b>0.05</b>              | 0.069                   | <b>0.08</b>             | 0.10             | original |
| 836.6                       | 190 | Left  | Tilt          | /          | 32.97                 | 33.5                       | 0.033                    | <b>0.04</b>              | 0.047                   | <b>0.05</b>             | 0.18             | original |
| 836.6                       | 190 | Right | Touch         | /          | 32.97                 | 33.5                       | 0.054                    | <b>0.06</b>              | 0.079                   | <b>0.09</b>             | 0.09             | original |
| 836.6                       | 190 | Right | Tilt          | /          | 32.97                 | 33.5                       | 0.034                    | <b>0.04</b>              | 0.049                   | <b>0.06</b>             | 0.12             | original |
| 848.8                       | 251 | Right | Touch         | /          | 32.76                 | 33.5                       | 0.041                    | <b>0.05</b>              | 0.06                    | <b>0.07</b>             | 0.11             | original |
| 824.2                       | 128 | Right | Touch         | Fig.1      | 32.78                 | 33.5                       | 0.085                    | <b>0.10</b>              | 0.112                   | <b>0.13</b>             | 0.06             | original |
| 824.2                       | 128 | Right | Touch         |            | 32.78                 | 33.5                       | 0.035                    | <b>0.04</b>              | 0.045                   | <b>0.05</b>             | -0.12            | new      |

**Table 14.3: SAR Values (GSM 850 MHz Band-Body) -AP OFF**

| Ambient Temperature: 23.0°C |     |               |            |                       |                          | Liquid Temperature: 22.5°C |                          |                         |                         |                  |          |
|-----------------------------|-----|---------------|------------|-----------------------|--------------------------|----------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |     | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch. |               |            |                       |                          |                            |                          |                         |                         |                  |          |
| 836.6                       | 190 | Front         | /          | 28.05                 | 29                       | 0.046                      | <b>0.06</b>              | 0.086                   | <b>0.11</b>             | 0.12             | original |
| 848.8                       | 251 | Rear          | /          | 27.80                 | 29                       | 0.073                      | <b>0.10</b>              | 0.103                   | <b>0.14</b>             | 0.13             | original |
| 836.6                       | 190 | Rear          | /          | 28.05                 | 29                       | 0.105                      | <b>0.13</b>              | 0.149                   | <b>0.19</b>             | 0.02             | original |
| 824.2                       | 128 | Rear          | /          | 27.84                 | 29                       | 0.169                      | <b>0.22</b>              | 0.221                   | <b>0.29</b>             | 0.06             | original |
| 824.2                       | 128 | Rear EGPRS    | /          | 27.83                 | 29                       | 0.153                      | <b>0.20</b>              | 0.213                   | <b>0.28</b>             | 0.08             | original |
| 824.2                       | 128 | Rear          | /          | 27.84                 | 29                       | 0.054                      | <b>0.07</b>              | 0.114                   | <b>0.15</b>             | -0.13            | new      |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.4: SAR Values (GSM 850 MHz Band-Body) -AP ON**

| Ambient Temperature: 23.0°C |     |               |            |                       |                          | Liquid Temperature: 22.5°C |                         |                         |                        |                  |          |
|-----------------------------|-----|---------------|------------|-----------------------|--------------------------|----------------------------|-------------------------|-------------------------|------------------------|------------------|----------|
| Frequency                   |     | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)(W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch. |               |            |                       |                          |                            |                         |                         |                        |                  |          |
| 836.6                       | 190 | Front         | /          | 28.05                 | 29                       | 0.046                      | <b>0.06</b>             | 0.086                   | <b>0.11</b>            | 0.12             | original |
| 848.8                       | 251 | Rear          | /          | 27.80                 | 29                       | 0.073                      | <b>0.10</b>             | 0.103                   | <b>0.14</b>            | 0.13             | original |
| 836.6                       | 190 | Rear          | /          | 28.05                 | 29                       | 0.105                      | <b>0.13</b>             | 0.149                   | <b>0.19</b>            | 0.02             | original |
| 824.2                       | 128 | Rear          | Fig.2      | 27.84                 | 29                       | 0.169                      | <b>0.22</b>             | 0.221                   | <b>0.29</b>            | 0.06             | original |
| 836.6                       | 190 | Left          | /          | 28.05                 | 29                       | 0.027                      | <b>0.03</b>             | 0.041                   | <b>0.05</b>            | 0.12             | original |
| 836.6                       | 190 | Right         | /          | 28.05                 | 29                       | 0.033                      | <b>0.04</b>             | 0.049                   | <b>0.06</b>            | 0.15             | original |
| 836.6                       | 190 | Bottom        | /          | 28.05                 | 29                       | 0.023                      | <b>0.03</b>             | 0.036                   | <b>0.04</b>            | 0.10             | original |
| 824.2                       | 128 | Rear EGPRS    | /          | 27.83                 | 29                       | 0.153                      | <b>0.20</b>             | 0.213                   | <b>0.28</b>            | 0.08             | original |
| 824.2                       | 128 | Rear          | /          | 27.84                 | 29                       | 0.054                      | <b>0.07</b>             | 0.114                   | <b>0.15</b>            | -0.13            | new      |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.5: SAR Values (GSM 1900 MHz Band - Head)**

| Ambient Temperature: 23.3°C |     |       |               |            |                       | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-----|-------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |     | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch. |       |               |            |                       |                            |                          |                          |                         |                         |                  |          |
| 1880                        | 661 | Left  | Touch         | Fig.3      | 29.67                 | 30                         | 0.187                    | 0.20                     | 0.311                   | 0.34                    | 0.05             | original |
| 1880                        | 661 | Left  | Tilt          | /          | 29.67                 | 30                         | 0.077                    | 0.08                     | 0.143                   | 0.15                    | 0.17             | original |
| 1880                        | 661 | Right | Touch         | /          | 29.67                 | 30                         | 0.115                    | 0.12                     | 0.195                   | 0.21                    | -0.14            | original |
| 1880                        | 661 | Right | Tilt          | /          | 29.67                 | 30                         | 0.057                    | 0.06                     | 0.101                   | 0.11                    | 0.15             | original |
| 1909.8                      | 810 | Left  | Touch         | /          | 29.82                 | 30                         | 0.166                    | 0.17                     | 0.293                   | 0.31                    | -0.10            | original |
| 1850.2                      | 512 | Left  | Touch         | /          | 29.66                 | 30                         | 0.136                    | 0.15                     | 0.237                   | 0.26                    | 0.13             | original |
| 1880                        | 661 | Left  | Touch         | /          | 29.67                 | 30                         | 0.094                    | 0.10                     | 0.149                   | 0.16                    | -0.06            | new      |

**Table 14.6: SAR Values (GSM 1900 MHz Band-Body) -AP OFF**

| Ambient Temperature: 23.0°C |     |               |            |                       |                         | Liquid Temperature: 22.5°C |                         |                         |                        |                  |          |
|-----------------------------|-----|---------------|------------|-----------------------|-------------------------|----------------------------|-------------------------|-------------------------|------------------------|------------------|----------|
| Frequency                   |     | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)(W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch. |               |            |                       |                         |                            |                         |                         |                        |                  |          |
| 1880                        | 661 | Front         | /          | 25.41                 | 26                      | 0.396                      | <b>0.45</b>             | 0.697                   | <b>0.80</b>            | -0.10            | original |
| 1909.8                      | 810 | Rear          | /          | 25.42                 | 26                      | 0.364                      | <b>0.42</b>             | 0.735                   | <b>0.84</b>            | 0.10             | original |
| 1880                        | 661 | Rear          | /          | 25.41                 | 26                      | 0.382                      | <b>0.44</b>             | 0.748                   | <b>0.86</b>            | 0.07             | original |
| 1850.2                      | 512 | Rear          | /          | 25.52                 | 26                      | 0.360                      | <b>0.40</b>             | 0.719                   | <b>0.80</b>            | 0.11             | original |
| 1880                        | 661 | RearEGPRS     | /          | 25.41                 | 26                      | 0.348                      | <b>0.40</b>             | 0.686                   | <b>0.79</b>            | 0.06             | original |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.7: SAR Values (GSM 1900 MHz Band-Body) -AP ON**

| Ambient Temperature: 23.0°C |     |               |            |                       |                         | Liquid Temperature: 22.5°C |                         |                         |                        |                  |          |
|-----------------------------|-----|---------------|------------|-----------------------|-------------------------|----------------------------|-------------------------|-------------------------|------------------------|------------------|----------|
| Frequency                   |     | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)(W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch. |               |            |                       |                         |                            |                         |                         |                        |                  |          |
| 1880                        | 661 | Front         | /          | 25.41                 | 26                      | 0.396                      | <b>0.45</b>             | 0.697                   | <b>0.80</b>            | -0.10            | original |
| 1909.8                      | 810 | Rear          | /          | 25.42                 | 26                      | 0.364                      | <b>0.42</b>             | 0.735                   | <b>0.84</b>            | 0.10             | original |
| 1880                        | 661 | Rear          | /          | 25.41                 | 26                      | 0.382                      | <b>0.44</b>             | 0.748                   | <b>0.86</b>            | 0.07             | original |
| 1850.2                      | 512 | Rear          | /          | 25.52                 | 26                      | 0.360                      | <b>0.40</b>             | 0.719                   | <b>0.80</b>            | 0.11             | original |
| 1880                        | 661 | Left          | /          | 25.41                 | 26                      | 0.116                      | <b>0.13</b>             | 0.209                   | <b>0.24</b>            | 0.02             | original |
| 1880                        | 661 | Right         | /          | 25.41                 | 26                      | 0.062                      | <b>0.07</b>             | 0.106                   | <b>0.12</b>            | 0.17             | original |
| 1909.8                      | 810 | Bottom        | /          | 25.42                 | 26                      | 0.453                      | <b>0.52</b>             | 0.88                    | <b>1.01</b>            | 0.09             | original |
| 1880                        | 661 | Bottom        | Fig.4      | 25.41                 | 26                      | 0.476                      | <b>0.55</b>             | 0.895                   | <b>1.03</b>            | 0.07             | original |
| 1850.2                      | 512 | Bottom        | /          | 25.52                 | 26                      | 0.449                      | <b>0.50</b>             | 0.86                    | <b>0.96</b>            | 0.02             | original |
| 1880                        | 661 | Bottom EGPRS  | /          | 25.41                 | 26                      | 0.444                      | <b>0.51</b>             | 0.88                    | <b>1.01</b>            | 0.06             | original |
| 1880                        | 661 | Bottom        | /          | 25.41                 | 26                      | 0.134                      | <b>0.15</b>             | 0.246                   | <b>0.28</b>            | -0.11            | new      |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.8: SAR Values (WCDMA 850 MHz Band - Head)**

| Ambient Temperature: 23.7°C |      |       |               |            |                       | Liquid Temperature: 23.2°C |                          |                          |                         |                         |                  |          |
|-----------------------------|------|-------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |      | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |       |               |            |                       |                            |                          |                          |                         |                         |                  |          |
| 836.4                       | 4182 | Left  | Touch         | /          | 23.5                  | 24                         | 0.052                    | <b>0.06</b>              | 0.075                   | <b>0.08</b>             | 0.11             | original |
| 836.4                       | 4182 | Left  | Tilt          | /          | 23.5                  | 24                         | 0.038                    | <b>0.04</b>              | 0.054                   | <b>0.06</b>             | 0.14             | original |
| 836.4                       | 4182 | Right | Touch         | /          | 23.5                  | 24                         | 0.066                    | <b>0.07</b>              | 0.096                   | <b>0.11</b>             | -0.07            | original |
| 836.4                       | 4182 | Right | Tilt          | /          | 23.5                  | 24                         | 0.042                    | <b>0.05</b>              | 0.06                    | <b>0.07</b>             | 0.10             | original |
| 846.6                       | 4233 | Right | Touch         | /          | 23.5                  | 24                         | 0.056                    | <b>0.06</b>              | 0.082                   | <b>0.09</b>             | -0.16            | original |
| 826.4                       | 4132 | Right | Touch         | Fig.5      | 23.5                  | 24                         | 0.078                    | <b>0.09</b>              | 0.103                   | <b>0.12</b>             | 0.05             | original |
| 826.4                       | 4132 | Right | Touch         | /          | 23.5                  | 24                         | 0.018                    | <b>0.02</b>              | 0.024                   | <b>0.03</b>             | 0.17             | new      |

**Table 14.9: SAR Values (WCDMA 850 MHz Band-Body) -AP OFF**

| Ambient Temperature: 23.0°C |      |                  |               |                             |                                   | Liquid Temperature: 22.5°C     |                                |                               |                               |                        |          |
|-----------------------------|------|------------------|---------------|-----------------------------|-----------------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------|----------|
| Frequency                   |      | Test<br>Position | Figure<br>No. | Conducted<br>Power<br>(dBm) | Max.<br>tune-up<br>Power<br>(dBm) | Measured<br>SAR(10g)<br>(W/kg) | Reported<br>SAR(10g)<br>(W/kg) | Measured<br>SAR(1g)<br>(W/kg) | Reported<br>SAR(1g)<br>(W/kg) | Power<br>Drift<br>(dB) | Note     |
| MHz                         | Ch.  |                  |               |                             |                                   |                                |                                |                               |                               |                        |          |
| 836.4                       | 4182 | Front            | /             | 23.5                        | 24                                | 0.061                          | 0.07                           | 0.086                         | 0.10                          | 0.13                   | original |
| 846.6                       | 4233 | Rear             | /             | 23.5                        | 24                                | 0.079                          | 0.09                           | 0.113                         | 0.13                          | 0.05                   | original |
| 836.4                       | 4182 | Rear             | /             | 23.5                        | 24                                | 0.094                          | 0.11                           | 0.134                         | 0.15                          | 0.02                   | original |
| 826.4                       | 4132 | Rear             | /             | 23.5                        | 24                                | 0.122                          | 0.14                           | 0.159                         | 0.18                          | 0.06                   | original |
| 826.4                       | 4132 | Rear             | /             | 23.5                        | 24                                | 0.043                          | 0.05                           | 0.056                         | 0.06                          | 0.06                   | new      |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.10: SAR Values (WCDMA 850 MHz Band-Body) -AP ON**

| Ambient Temperature: 23.0°C |      |               |            |                       |                          | Liquid Temperature: 22.5°C |                         |                         |                        |                  |          |
|-----------------------------|------|---------------|------------|-----------------------|--------------------------|----------------------------|-------------------------|-------------------------|------------------------|------------------|----------|
| Frequency                   |      | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)(W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |               |            |                       |                          |                            |                         |                         |                        |                  |          |
| 836.4                       | 4182 | Front         | /          | 23.5                  | 24                       | 0.061                      | <b>0.07</b>             | 0.086                   | <b>0.10</b>            | 0.13             | original |
| 846.6                       | 4233 | Rear          | /          | 23.5                  | 24                       | 0.079                      | <b>0.09</b>             | 0.113                   | <b>0.13</b>            | 0.05             | original |
| 836.4                       | 4182 | Rear          | /          | 23.5                  | 24                       | 0.094                      | <b>0.11</b>             | 0.134                   | <b>0.15</b>            | 0.02             | original |
| 826.4                       | 4132 | Rear          | Fig.6      | 23.5                  | 24                       | 0.122                      | <b>0.14</b>             | 0.159                   | <b>0.18</b>            | 0.06             | original |
| 836.4                       | 4182 | Left          | /          | 23.5                  | 24                       | 0.038                      | <b>0.04</b>             | 0.055                   | <b>0.06</b>            | 0.13             | original |
| 836.4                       | 4182 | Right         | /          | 23.5                  | 24                       | 0.045                      | <b>0.05</b>             | 0.066                   | <b>0.07</b>            | 0.15             | original |
| 836.4                       | 4182 | Bottom        | /          | 23.5                  | 24                       | 0.020                      | <b>0.02</b>             | 0.031                   | <b>0.03</b>            | 0.14             | original |
| 826.4                       | 4132 | Rear          | /          | 23.5                  | 24                       | 0.043                      | <b>0.05</b>             | 0.056                   | <b>0.06</b>            | 0.06             | new      |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.11: SAR Values (WCDMA1900 MHz Band - Head)**

| Ambient Temperature: 23.3°C |      |       |               |            |                       |                          | Liquid Temperature: 22.8°C |                          |                         |                         |                  |          |
|-----------------------------|------|-------|---------------|------------|-----------------------|--------------------------|----------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |      | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |       |               |            |                       |                          |                            |                          |                         |                         |                  |          |
| 1880                        | 9400 | Left  | Touch         | /          | 22.2                  | 23                       | 0.218                      | <b>0.26</b>              | 0.369                   | <b>0.44</b>             | 0.08             | original |
| 1880                        | 9400 | Left  | Tilt          | /          | 22.2                  | 23                       | 0.060                      | <b>0.07</b>              | 0.108                   | <b>0.13</b>             | 0.13             | original |
| 1880                        | 9400 | Right | Touch         | /          | 22.2                  | 23                       | 0.190                      | <b>0.23</b>              | 0.325                   | <b>0.39</b>             | 0.17             | original |
| 1880                        | 9400 | Right | Tilt          | /          | 22.2                  | 23                       | 0.117                      | <b>0.14</b>              | 0.200                   | <b>0.24</b>             | 0.17             | original |
| 1907.6                      | 9538 | Left  | Touch         | Fig.7      | 22.3                  | 23                       | 0.228                      | <b>0.27</b>              | 0.379                   | <b>0.45</b>             | -0.19            | original |
| 1852.4                      | 9262 | Left  | Touch         | /          | 22.4                  | 23                       | 0.195                      | <b>0.22</b>              | 0.337                   | <b>0.39</b>             | 0.05             | original |
| 1907.6                      | 9538 | Left  | Touch         | /          | 22.3                  | 23                       | 0.171                      | <b>0.20</b>              | 0.269                   | <b>0.32</b>             | -0.09            | new      |

**Table 14.12: SAR Values (WCDMA1900 MHz Band-Body)–APOFF**

| Ambient Temperature: 23.0°C |      |               |            |                       |                         | Liquid Temperature: 22.5°C |                         |                         |                        |                  |          |
|-----------------------------|------|---------------|------------|-----------------------|-------------------------|----------------------------|-------------------------|-------------------------|------------------------|------------------|----------|
| Frequency                   |      | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)(W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |               |            |                       |                         |                            |                         |                         |                        |                  |          |
| 1880                        | 9400 | Front         | /          | 22.2                  | 23                      | 0.329                      | <b>0.40</b>             | 0.612                   | <b>0.74</b>            | 0.04             | original |
| 1907.6                      | 9538 | Rear          | /          | 22.3                  | 23                      | 0.454                      | <b>0.53</b>             | 0.857                   | <b>1.01</b>            | 0.02             | original |
| 1880                        | 9400 | Rear          | /          | 22.2                  | 23                      | 0.388                      | <b>0.47</b>             | 0.729                   | <b>0.88</b>            | 0.07             | original |
| 1852.4                      | 9262 | Rear          | /          | 22.4                  | 23                      | 0.367                      | <b>0.42</b>             | 0.708                   | <b>0.81</b>            | 0.09             | original |

Note1: The distance between the EUT and the phantom bottom is 10 mm.

**Table 14.13: SAR Values (WCDMA1900 MHz Band-Body) –APON**

| Ambient Temperature: 22.5°C |      |               |            |                       |                         | Liquid Temperature: 22.0°C |                         |                         |                        |                  |          |
|-----------------------------|------|---------------|------------|-----------------------|-------------------------|----------------------------|-------------------------|-------------------------|------------------------|------------------|----------|
| Frequency                   |      | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)(W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |               |            |                       |                         |                            |                         |                         |                        |                  |          |
| 1880                        | 9400 | Front         | /          | 22.2                  | 23                      | 0.329                      | <b>0.40</b>             | 0.612                   | <b>0.74</b>            | 0.04             | original |
| 1907.6                      | 9538 | Rear          | /          | 22.3                  | 23                      | 0.454                      | <b>0.53</b>             | 0.857                   | <b>1.01</b>            | 0.02             | original |
| 1880                        | 9400 | Rear          | /          | 22.2                  | 23                      | 0.388                      | <b>0.47</b>             | 0.729                   | <b>0.88</b>            | 0.07             | original |
| 1852.4                      | 9262 | Rear          | /          | 22.4                  | 23                      | 0.367                      | <b>0.42</b>             | 0.708                   | <b>0.81</b>            | 0.09             | original |
| 1880                        | 9400 | Left          | /          | 22.2                  | 23                      | 0.190                      | <b>0.23</b>             | 0.34                    | <b>0.41</b>            | 0.10             | original |
| 1880                        | 9400 | Right         | /          | 22.2                  | 23                      | 0.122                      | <b>0.15</b>             | 0.204                   | <b>0.25</b>            | 0.11             | original |
| 1907.6                      | 9538 | Bottom        | Fig.8      | 22.3                  | 23                      | 0.492                      | <b>0.58</b>             | 0.935                   | <b>1.10</b>            | -0.09            | original |
| 1880                        | 9400 | Bottom        | /          | 22.2                  | 23                      | 0.387                      | <b>0.47</b>             | 0.736                   | <b>0.88</b>            | -0.02            | original |
| 1852.4                      | 9262 | Bottom        | /          | 22.4                  | 23                      | 0.378                      | <b>0.43</b>             | 0.724                   | <b>0.83</b>            | -0.01            | original |
| 1907.6                      | 9538 | Bottom        | /          | 22.3                  | 23                      | 0.359                      | <b>0.42</b>             | 0.672                   | <b>0.79</b>            | -0.14            | new      |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.14: SAR Values (WCDMA1700 MHz Band - Head)**

| Ambient Temperature: 23.3°C |      |       |               |            |                       | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |          |
|-----------------------------|------|-------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |      | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |       |               |            |                       |                            |                          |                          |                         |                         |                  |          |
| 1752.6                      | 1513 | Left  | Touch         | Fig.9      | 22.2                  | 23                         | 0.301                    | <b>0.36</b>              | 0.483                   | <b>0.58</b>             | 0.06             | original |
| 1732.6                      | 1413 | Left  | Touch         | /          | 22.1                  | 23                         | 0.284                    | <b>0.35</b>              | 0.462                   | <b>0.57</b>             | 0.08             | original |
| 1712.4                      | 1312 | Left  | Touch         | /          | 22.2                  | 23                         | 0.225                    | <b>0.27</b>              | 0.379                   | <b>0.46</b>             | 0.06             | original |
| 1732.6                      | 1413 | Left  | Tilt          | /          | 22.1                  | 23                         | 0.066                    | <b>0.08</b>              | 0.115                   | <b>0.14</b>             | 0.13             | original |
| 1732.6                      | 1413 | Right | Touch         | /          | 22.1                  | 23                         | 0.200                    | <b>0.25</b>              | 0.329                   | <b>0.40</b>             | -0.03            | original |
| 1732.6                      | 1413 | Right | Tilt          | /          | 22.1                  | 23                         | 0.084                    | <b>0.10</b>              | 0.144                   | <b>0.18</b>             | 0.02             | original |
| 1752.6                      | 1513 | Left  | Touch         | /          | 22.2                  | 23                         | 0.249                    | <b>0.30</b>              | 0.378                   | <b>0.45</b>             | 0.04             | new      |

**Table 14.15: SAR Values (WCDMA1700 MHz Band-Body)–APOFF**

| Ambient Temperature: 22.5°C |      |               |            |                       |                          | Liquid Temperature: 22.0°C |                          |                         |                         |                  |          |
|-----------------------------|------|---------------|------------|-----------------------|--------------------------|----------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |      | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg)   | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |               |            |                       |                          |                            |                          |                         |                         |                  |          |
| 1732.6                      | 1413 | Front         | /          | 22.1                  | 23                       | 0.335                      | <b>0.41</b>              | 0.541                   | <b>0.67</b>             | 0.04             | original |
| 1752.6                      | 1513 | Rear          | /          | 22.2                  | 23                       | 0.443                      | <b>0.53</b>              | 0.819                   | <b>0.98</b>             | 0.03             | original |
| 1732.6                      | 1413 | Rear          | /          | 22.1                  | 23                       | 0.359                      | <b>0.44</b>              | 0.639                   | <b>0.79</b>             | -0.01            | original |
| 1712.4                      | 1312 | Rear          | /          | 22.2                  | 23                       | 0.326                      | <b>0.39</b>              | 0.569                   | <b>0.68</b>             | 0.08             | original |

Note1: The distance between the EUT and the phantom bottom is 10 mm.

**Table 14.16: SAR Values (WCDMA1700 MHz Band-Body) –APON**

| Ambient Temperature: 22.5°C |      |               |            | Liquid Temperature: 22.0°C |                         |                          |                         |                         |                        |                  |          |
|-----------------------------|------|---------------|------------|----------------------------|-------------------------|--------------------------|-------------------------|-------------------------|------------------------|------------------|----------|
| Frequency                   |      | Test Position | Figure No. | Conducted Power (dBm)      | Max. tune-upPower (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)(W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.  |               |            |                            |                         |                          |                         |                         |                        |                  |          |
| 1732.6                      | 1413 | Front         | /          | 22.1                       | 23                      | 0.335                    | <b>0.41</b>             | 0.541                   | <b>0.67</b>            | 0.04             | original |
| 1752.6                      | 1513 | Rear          | /          | 22.2                       | 23                      | 0.443                    | <b>0.53</b>             | 0.819                   | <b>0.98</b>            | 0.03             | original |
| 1732.6                      | 1413 | Rear          | /          | 22.1                       | 23                      | 0.359                    | <b>0.44</b>             | 0.639                   | <b>0.79</b>            | -0.01            | original |
| 1712.4                      | 1312 | Rear          | /          | 22.2                       | 23                      | 0.326                    | <b>0.39</b>             | 0.569                   | <b>0.68</b>            | 0.08             | original |
| 1732.6                      | 1413 | Left          | /          | 22.1                       | 23                      | 0.153                    | <b>0.19</b>             | 0.268                   | <b>0.33</b>            | 0.10             | original |
| 1732.6                      | 1413 | Right         | /          | 22.1                       | 23                      | 0.078                    | <b>0.10</b>             | 0.134                   | <b>0.16</b>            | 0.11             | original |
| 1752.6                      | 1513 | Bottom        | Fig.10     | 22.2                       | 23                      | 0.456                    | <b>0.55</b>             | 0.833                   | <b>1.00</b>            | 0.13             | original |
| 1732.6                      | 1413 | Bottom        | /          | 22.1                       | 23                      | 0.339                    | <b>0.42</b>             | 0.65                    | <b>0.80</b>            | -0.02            | original |
| 1712.4                      | 1312 | Bottom        | /          | 22.2                       | 23                      | 0.308                    | <b>0.37</b>             | 0.579                   | <b>0.70</b>            | 0.08             | original |
| 1752.6                      | 1513 | Bottom        | /          | 22.2                       | 23                      | 0.372                    | <b>0.45</b>             | 0.665                   | <b>0.80</b>            | 0.13             | new      |

**Table 14.17: SAR Values (LTE Band 2-Head)**

| Ambient Temperature: 23.3°C |       |                     |               |                       |                          | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|---------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration       | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                     |               |                       |                          |                            |                          |                          |                         |                         |                  |          |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low  | Left Touch    | 23.30                 | 24                       | Fig.11                     | 0.225                    | <b>0.26</b>              | 0.383                   | <b>0.45</b>             | 0.04             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low  | Left Tilt     | 23.30                 | 24                       | /                          | 0.103                    | <b>0.12</b>              | 0.19                    | <b>0.22</b>             | 0.11             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low | Left Touch    | 22.23                 | 23                       | /                          | 0.205                    | <b>0.24</b>              | 0.358                   | <b>0.43</b>             | 0.10             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low | Left Tilt     | 22.23                 | 23                       | /                          | 0.091                    | <b>0.11</b>              | 0.17                    | <b>0.20</b>             | -0.07            | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low  | Right Touch   | 23.30                 | 24                       | /                          | 0.186                    | <b>0.22</b>              | 0.31                    | <b>0.36</b>             | 0.13             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low  | Right Tilt    | 23.30                 | 24                       | /                          | .0120                    | <b>0.01</b>              | 0.212                   | <b>0.25</b>             | 0.18             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low | Right Touch   | 22.23                 | 23                       | /                          | 0.152                    | <b>0.18</b>              | 0.255                   | <b>0.30</b>             | 0.08             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low | Right Tilt    | 22.23                 | 23                       | /                          | 0.099                    | <b>0.12</b>              | 0.175                   | <b>0.21</b>             | 0.17             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low  | Left Touch    | 23.30                 | 24                       | /                          | 0.227                    | <b>0.27</b>              | 0.350                   | <b>0.41</b>             | 0.07             | new      |

**Table 14.18: SAR Values (LTE Band 2-Body) –APOFF**

| Ambient Temperature: 23.4°C |       |                     |               |                       |                          | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|---------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration       | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                     |               |                       |                          |                            |                          |                          |                         |                         |                  |          |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low  | Front         | 23.30                 | 24                       | /                          | 0.301                    | <b>0.35</b>              | 0.513                   | <b>0.60</b>             | 0.05             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low | Front         | 22.23                 | 23                       | /                          | 0.229                    | <b>0.27</b>              | 0.407                   | <b>0.49</b>             | 0.10             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low  | Rear          | 23.30                 | 24                       | /                          | 0.373                    | <b>0.44</b>              | 0.699                   | <b>0.82</b>             | 0.11             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low | Rear          | 22.23                 | 23                       | /                          | 0.300                    | <b>0.36</b>              | 0.589                   | <b>0.70</b>             | 0.14             | original |

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.19: SAR Values (LTE Band 2-Body)–APON**

| Ambient Temperature: 23.4°C |       |                      |               |                        |                          | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|----------------------|---------------|------------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration        | Test Position | Conduct ed Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                      |               |                        |                          |                            |                          |                          |                         |                         |                  |          |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low   | Front         | 23.30                  | 24                       | /                          | 0.301                    | <b>0.35</b>              | 0.513                   | <b>0.60</b>             | 0.05             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low  | Front         | 22.23                  | 23                       | /                          | 0.229                    | <b>0.27</b>              | 0.407                   | <b>0.49</b>             | 0.10             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low   | Rear          | 23.30                  | 24                       | /                          | 0.373                    | <b>0.44</b>              | 0.699                   | <b>0.82</b>             | 0.11             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low  | Rear          | 22.23                  | 23                       | /                          | 0.300                    | <b>0.36</b>              | 0.589                   | <b>0.70</b>             | 0.14             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low   | Right         | 23.30                  | 24                       | /                          | 0.139                    | <b>0.16</b>              | 0.244                   | <b>0.29</b>             | 0.15             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low  | Right         | 22.23                  | 23                       | /                          | 0.110                    | <b>0.13</b>              | 0.184                   | <b>0.22</b>             | 0.19             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low   | Left          | 23.30                  | 24                       | /                          | 0.168                    | <b>0.20</b>              | 0.332                   | <b>0.39</b>             | -0.12            | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low  | Left          | 22.23                  | 23                       | /                          | 0.142                    | <b>0.17</b>              | 0.295                   | <b>0.35</b>             | -0.08            | original |
| 1900                        | 19100 | QPSK_20MHz_1RB_Low   | Bottom        | 23.25                  | 24                       | /                          | 0.444                    | <b>0.53</b>              | 0.855                   | <b>1.02</b>             | 0.04             | original |
| 1880                        | 18900 | QPSK_20MHz_1RB_Low   | Bottom        | 23.28                  | 24                       | /                          | 0.483                    | <b>0.57</b>              | 0.899                   | <b>1.06</b>             | 0.02             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low   | Bottom        | 23.30                  | 24                       | Fig.12                     | 0.497                    | <b>0.58</b>              | 0.933                   | <b>1.10</b>             | 0.07             | original |
| 1860                        | 18700 | QPSK_20MHz_50RB_Low  | Bottom        | 22.23                  | 23                       | /                          | 0.360                    | <b>0.43</b>              | 0.676                   | <b>0.81</b>             | -0.06            | original |
| 1860                        | 18700 | QPSK_20MHz_100RB_Low | Bottom        | 22.18                  | 23                       | /                          | 0.360                    | <b>0.43</b>              | 0.691                   | <b>0.83</b>             | 0.10             | original |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low   | Bottom        | 23.30                  | 24                       | /                          | 0.332                    | <b>0.39</b>              | 0.622                   | <b>0.73</b>             | -0.12            | new      |

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.20: SAR Values (LTE Band 4-Head)**

| Ambient Temperature: 23.3°C |       |                     |               |                       |                          | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|---------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration       | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                     |               |                       |                          |                            |                          |                          |                         |                         |                  |          |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Left Touch    | 23.95                 | 24                       | Fig.13                     | 0.260                    | <b>0.26</b>              | 0.418                   | <b>0.42</b>             | 0.08             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Left Tilt     | 23.95                 | 24                       | /                          | 0.049                    | <b>0.05</b>              | 0.094                   | <b>0.10</b>             | 0.12             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Right Touch   | 23.95                 | 24                       | /                          | 0.183                    | <b>0.19</b>              | 0.299                   | <b>0.30</b>             | 0.07             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Right Tilt    | 23.95                 | 24                       | /                          | 0.039                    | <b>0.04</b>              | 0.074                   | <b>0.07</b>             | 0.13             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Left Touch    | 22.79                 | 23                       | /                          | 0.191                    | <b>0.20</b>              | 0.32                    | <b>0.34</b>             | 0.08             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Left Tilt     | 22.79                 | 23                       | /                          | 0.080                    | <b>0.08</b>              | 0.136                   | <b>0.14</b>             | 0.15             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Right Touch   | 22.79                 | 23                       | /                          | 0.143                    | <b>0.15</b>              | 0.24                    | <b>0.25</b>             | 0.09             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Right Tilt    | 22.79                 | 23                       | /                          | 0.061                    | <b>0.06</b>              | 0.105                   | <b>0.11</b>             | 0.18             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Left Touch    | 23.95                 | 24                       | /                          | 0.238                    | <b>0.24</b>              | 0.355                   | <b>0.36</b>             | -0.08            | new      |

**Table 14.21: SAR Values (LTE Band 4-Body) –APOFF**

| Ambient Temperature: 23.4°C |       |                      |               |                       |                          | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|----------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration        | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                      |               |                       |                          |                            |                          |                          |                         |                         |                  |          |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Front         | 23.95                 | 24                       | /                          | 0.311                    | <b>0.31</b>              | 0.426                   | <b>0.43</b>             | 0.06             | original |
| 1745                        | 20300 | QPSK_20MHz_50RB_High | Front         | 22.79                 | 23                       | /                          | 0.166                    | <b>0.17</b>              | 0.239                   | <b>0.25</b>             | 0.05             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Rear          | 23.95                 | 24                       | /                          | 0.276                    | <b>0.28</b>              | 0.511                   | <b>0.52</b>             | 0.01             | original |
| 1745                        | 20300 | QPSK_20MHz_50RB_High | Rear          | 22.79                 | 23                       | /                          | 0.215                    | <b>0.23</b>              | 0.400                   | <b>0.42</b>             | 0.07             | original |

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.22: SAR Values (LTE Band 4-Body)–APON**

| Ambient Temperature: 23.4°C |       |                      |               |                        |                          | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|----------------------|---------------|------------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration        | Test Position | Conduct ed Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                      |               |                        |                          |                            |                          |                          |                         |                         |                  |          |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Front         | 23.95                  | 24                       | /                          | 0.311                    | <b>0.31</b>              | 0.426                   | <b>0.43</b>             | 0.06             | original |
| 1745                        | 20300 | QPSK_20MHz_50RB_High | Front         | 22.79                  | 23                       | /                          | 0.166                    | <b>0.17</b>              | 0.239                   | <b>0.25</b>             | 0.05             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Rear          | 23.95                  | 24                       | /                          | 0.276                    | <b>0.28</b>              | 0.511                   | <b>0.52</b>             | 0.01             | original |
| 1745                        | 20300 | QPSK_20MHz_50RB_High | Rear          | 22.79                  | 23                       | /                          | 0.215                    | <b>0.23</b>              | 0.400                   | <b>0.42</b>             | 0.07             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Bottom        | 23.95                  | 24                       | Fig.14                     | 0.354                    | <b>0.36</b>              | 0.628                   | <b>0.64</b>             | 0.01             | original |
| 1745                        | 20300 | QPSK_20MHz_50RB_High | Bottom        | 22.79                  | 23                       | /                          | 0.257                    | <b>0.27</b>              | 0.469                   | <b>0.49</b>             | 0.13             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Right         | 23.95                  | 24                       | /                          | 0.086                    | <b>0.09</b>              | 0.195                   | <b>0.20</b>             | -0.16            | original |
| 1745                        | 20300 | QPSK_20MHz_50RB_High | Right         | 22.79                  | 23                       | /                          | 0.044                    | <b>0.05</b>              | 0.09                    | <b>0.09</b>             | -0.18            | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Left          | 23.95                  | 24                       | /                          | 0.143                    | <b>0.14</b>              | 0.255                   | <b>0.26</b>             | 0.19             | original |
| 1745                        | 20300 | QPSK_20MHz_50RB_High | Left          | 22.79                  | 23                       | /                          | 0.114                    | <b>0.12</b>              | 0.204                   | <b>0.21</b>             | 0.12             | original |
| 1745                        | 20300 | QPSK_20MHz_1RB_High  | Bottom        | 23.95                  | 24                       | /                          | 0.311                    | <b>0.31</b>              | 0.555                   | <b>0.56</b>             | 0.13             | new      |

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.23: SAR Values (LTE Band 12-Head)**

| Ambient Temperature: 23.3°C |       |                      |               |                       |                          | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|----------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration        | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                      |               |                       |                          |                            |                          |                          |                         |                         |                  |          |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Left Touch    | 24.14                 | 24.5                     | /                          | 0.178                    | <b>0.19</b>              | 0.253                   | <b>0.27</b>             | -0.06            | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Left Touch    | 23.10                 | 23.5                     | /                          | 0.164                    | <b>0.18</b>              | 0.233                   | <b>0.26</b>             | 0.03             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Left Tilt     | 24.14                 | 24.5                     | /                          | 0.048                    | <b>0.05</b>              | 0.068                   | <b>0.07</b>             | 0.12             | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Left Tilt     | 23.10                 | 23.5                     | /                          | 0.041                    | <b>0.04</b>              | 0.058                   | <b>0.06</b>             | 0.10             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Right Touch   | 24.14                 | 24.5                     | Fig.15                     | 0.204                    | <b>0.22</b>              | 0.261                   | <b>0.28</b>             | 0.07             | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Right Touch   | 23.10                 | 23.5                     | /                          | 0.169                    | <b>0.19</b>              | 0.243                   | <b>0.27</b>             | 0.10             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Right Tilt    | 24.14                 | 24.5                     | /                          | 0.049                    | <b>0.05</b>              | 0.07                    | <b>0.08</b>             | 0.17             | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Right Tilt    | 23.10                 | 23.5                     | /                          | 0.043                    | <b>0.05</b>              | 0.061                   | <b>0.07</b>             | 0.13             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Right Touch   | 24.14                 | 24.5                     | /                          | 0.186                    | <b>0.20</b>              | 0.229                   | <b>0.25</b>             | -0.04            | new      |

**Table 14.24: SAR Values (LTE Band 12-Body) –APOFF**

| Ambient Temperature: 23.4°C |       |                      |               |                       |                          | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|----------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration        | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                      |               |                       |                          |                            |                          |                          |                         |                         |                  |          |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Front         | 24.14                 | 24.5                     | /                          | 0.344                    | <b>0.37</b>              | 0.493                   | <b>0.54</b>             | -0.04            | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Front         | 23.10                 | 23.5                     | /                          | 0.257                    | <b>0.28</b>              | 0.369                   | <b>0.40</b>             | 0.01             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Rear          | 24.14                 | 24.5                     | Fig.16                     | 0.432                    | <b>0.47</b>              | 0.706                   | <b>0.77</b>             | 0.09             | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Rear          | 23.10                 | 23.5                     | /                          | 0.328                    | <b>0.36</b>              | 0.527                   | <b>0.58</b>             | 0.00             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Rear          | 24.14                 | 24.5                     | /                          | 0.221                    | <b>0.24</b>              | 0.404                   | <b>0.44</b>             | 0.11             | new      |

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.25: SAR Values (LTE Band 12-Body) –APON**

| Ambient Temperature: 23.4°C |       |                      |               |                        |                          | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-------|----------------------|---------------|------------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |       | Configuration        | Test Position | Conduct ed Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch.   |                      |               |                        |                          |                            |                          |                          |                         |                         |                  |          |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Front         | 24.14                  | 24.5                     | /                          | 0.344                    | <b>0.37</b>              | 0.493                   | <b>0.54</b>             | -0.04            | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Front         | 23.10                  | 23.5                     | /                          | 0.257                    | <b>0.28</b>              | 0.369                   | <b>0.40</b>             | 0.01             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Rear          | 24.14                  | 24.5                     | Fig.17                     | 0.432                    | <b>0.47</b>              | 0.706                   | <b>0.77</b>             | 0.09             | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Rear          | 23.10                  | 23.5                     | /                          | 0.328                    | <b>0.36</b>              | 0.527                   | <b>0.58</b>             | 0.00             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Bottom        | 24.14                  | 24.5                     | /                          | 0.133                    | <b>0.14</b>              | 0.204                   | <b>0.22</b>             | 0.02             | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Bottom        | 23.10                  | 23.5                     | /                          | 0.108                    | <b>0.12</b>              | 0.167                   | <b>0.18</b>             | -0.12            | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Right         | 24.14                  | 24.5                     | /                          | 0.136                    | <b>0.15</b>              | 0.201                   | <b>0.22</b>             | -0.02            | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Right         | 23.10                  | 23.5                     | /                          | 0.110                    | <b>0.12</b>              | 0.161                   | <b>0.18</b>             | 0.00             | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Left          | 24.14                  | 24.5                     | /                          | 0.144                    | <b>0.16</b>              | 0.263                   | <b>0.29</b>             | 0.07             | original |
| 711                         | 23130 | QPSK_10MHz_25RB_High | Left          | 23.10                  | 23.5                     | /                          | 0.120                    | <b>0.13</b>              | 0.202                   | <b>0.22</b>             | -0.01            | original |
| 711                         | 23130 | QPSK_10MHz_1RB_High  | Rear          | 24.14                  | 24.5                     | /                          | 0.221                    | <b>0.24</b>              | 0.404                   | <b>0.44</b>             | 0.11             | new      |

Note: The distance between the EUT and the phantom bottom is 10mm.

## 14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

**Table 14.26: SAR Values (GSM 850 MHz Band - Head)**

| Ambient Temperature: 23.7°C |     |       |               |            |                       | Liquid Temperature: 23.2°C |                          |                          |                         |                         |                  |
|-----------------------------|-----|-------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |     | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch. |       |               |            |                       |                            |                          |                          |                         |                         |                  |
| 824.2                       | 128 | Right | Touch         | Fig.1      | 32.78                 | 33.5                       | 0.085                    | <b>0.10</b>              | 0.112                   | <b>0.13</b>             | 0.06             |

**Table 14.27: SAR Values (GSM 850 MHz Band-Body) –APON**

| Ambient Temperature: 23.0°C |     |               |            |                       | Liquid Temperature: 22.5°C |                          |                          |                         |                         |                  |
|-----------------------------|-----|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |     | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm)    | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)( W/kg) | Power Drift (dB) |
| MHz                         | Ch. |               |            |                       |                            |                          |                          |                         |                         |                  |
| 824.2                       | 128 | Rear          | Fig.2      | 27.84                 | 29                         | 0.169                    | 0.22                     | 0.221                   | 0.29                    | 0.06             |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.28: SAR Values (GSM 1900 MHz Band - Head)**

| Ambient Temperature: 23.3°C |     |      |               |            |                       | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |
|-----------------------------|-----|------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |     | Side | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch. |      |               |            |                       |                            |                          |                          |                         |                         |                  |
| 1880                        | 661 | Left | Touch         | Fig.3      | 29.67                 | 30                         | 0.187                    | <b>0.20</b>              | 0.311                   | <b>0.34</b>             | 0.05             |

**Table 14.29: SAR Values (GSM 1900 MHz Band-Body) –APON**

| Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C |     |               |            |                       |                          |                          |                          |                         |                         |                  |
|-------------------------------------------------------------|-----|---------------|------------|-----------------------|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                                                   |     | Test Position | Figure No. | Conducted Power(dB m) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)( W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)( W/kg) | Power Drift (dB) |
| MHz                                                         | Ch. |               |            |                       |                          |                          |                          |                         |                         |                  |
| 1880                                                        | 661 | Bottom        | Fig.4      | 25.41                 | 26                       | 0.476                    | 0.55                     | 0.895                   | 1.03                    | 0.07             |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.30: SAR Values (WCDMA 850 MHz Band - Head)**

| Ambient Temperature: 23.7°C |      |       |               |            |                       | Liquid Temperature: 23.2°C |                          |                          |                         |                         |                  |
|-----------------------------|------|-------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |      | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.  |       |               |            |                       |                            |                          |                          |                         |                         |                  |
| 826.4                       | 4132 | Right | 826.4         | Fig.5      | 23.5                  | 24                         | 0.078                    | <b>0.09</b>              | 0.103                   | <b>0.12</b>             | 0.05             |

**Table 14.31: SAR Values (WCDMA 850 MHz Band-Body) –APON**

| Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C |      |               |            |                       |                          |                          |                          |                         |                         |                  |
|--------------------------------------------------------|------|---------------|------------|-----------------------|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                                              |      | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                                                    | Ch.  |               |            |                       |                          |                          |                          |                         |                         |                  |
| 826.4                                                  | 4132 | Rear          | Fig.6      | 23.5                  | 24                       | 0.122                    | 0.14                     | 0.159                   | 0.18                    | 0.06             |

Note1: The distance between the EUT and the phantom bottom is 10mm

**Table 14.32: SAR Values (WCDMA1900 MHz Band - Head)**

| Ambient Temperature: 23.3°C |      |      |               |            |                       | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |
|-----------------------------|------|------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |      | Side | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm)    | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.  |      |               |            |                       |                            |                          |                          |                         |                         |                  |
| 1907.6                      | 9538 | Left | Touch         | Fig.7      | 22.3                  | 23                         | 0.228                    | <b>0.27</b>              | 0.379                   | <b>0.45</b>             | -0.19            |

**Table 14.33: SAR Values (WCDMA1900 MHz Band-Body) –APON**

| Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C |      |               |            |                       |                         |                          |                          |                         |                         |                  |
|-------------------------------------------------------------|------|---------------|------------|-----------------------|-------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                                                   |      | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)( W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)( W/kg) | Power Drift (dB) |
| MHz                                                         | Ch.  |               |            |                       |                         |                          |                          |                         |                         |                  |
| 1907.6                                                      | 9538 | Bottom        | Fig.8      | 22.3                  | 23                      | 0.492                    | <b>0.58</b>              | 0.935                   | <b>1.10</b>             | -0.09            |

Note1: The distance between the EUT and the phantom bottom is 10mm

**Table 14.34: SAR Values (WCDMA1700 MHz Band - Head)**

| Ambient Temperature: 23.3°C |      |      |               |            |                       | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |
|-----------------------------|------|------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |      | Side | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm)    | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.  |      |               |            |                       |                            |                          |                          |                         |                         |                  |
| 1752.6                      | 1513 | Left | Touch         | Fig.9      | 22.2                  | 23                         | 0.301                    | <b>0.36</b>              | 0.483                   | <b>0.58</b>             | 0.06             |

**Table 14.35: SAR Values (WCDMA1700 MHz Band-Body)–APON**

| Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C |      |               |            |                       |                         |                          |                          |                         |                         |                  |
|-------------------------------------------------------------|------|---------------|------------|-----------------------|-------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                                                   |      | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-upPower (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g)( W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)( W/kg) | Power Drift (dB) |
| MHz                                                         | Ch.  |               |            |                       |                         |                          |                          |                         |                         |                  |
| 1752.6                                                      | 1513 | Bottom        | Fig.10     | 22.2                  | 23                      | 0.456                    | <b>0.55</b>              | 0.833                   | <b>1.00</b>             | 0.13             |

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.36: SAR Values (LTE Band 2-Head)**

| Ambient Temperature: 23.3°C |       |                    |               |                       |                         | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |
|-----------------------------|-------|--------------------|---------------|-----------------------|-------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |       | Configuration      | Test Position | Conducted Power (dBm) | Max. tune-upPower (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.   |                    |               |                       |                         |                            |                          |                          |                         |                         |                  |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low | Left Touch    | 23.30                 | 24                      | Fig.11                     | 0.225                    | <b>0.26</b>              | 0.383                   | <b>0.45</b>             | 0.04             |

**Table 14.37: SAR Values (LTE Band 2-Body) –APON**

| Ambient Temperature: 23.4°C |       |                    |               |                       |                         | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |
|-----------------------------|-------|--------------------|---------------|-----------------------|-------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |       | Configuration      | Test Position | Conducted Power (dBm) | Max. tune-upPower (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.   |                    |               |                       |                         |                            |                          |                          |                         |                         |                  |
| 1860                        | 18700 | QPSK_20MHz_1RB_Low | Bottom        | 23.30                 | 24                      | Fig.12                     | 0.497                    | <b>0.58</b>              | 0.933                   | <b>1.10</b>             | 0.07             |

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.38: SAR Values (LTE Band 4-Head)**

| Ambient Temperature: 23.3°C |       |                     |               |                       |                          | Liquid Temperature: 22.8°C |                          |                          |                         |                         |                  |
|-----------------------------|-------|---------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |       | Configuration       | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.   |                     |               |                       |                          |                            |                          |                          |                         |                         |                  |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Left Touch    | 23.95                 | 24                       | Fig.13                     | 0.260                    | <b>0.26</b>              | 0.418                   | <b>0.42</b>             | 0.08             |

**Table 14.39: SAR Values (LTE Band 4-Body)–APON**

| Ambient Temperature: 23.4°C |       |                     |               |                       |                          | Liquid Temperature: 22.9°C |                          |                          |                         |                         |                  |
|-----------------------------|-------|---------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |       | Configuration       | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.   |                     |               |                       |                          |                            |                          |                          |                         |                         |                  |
| 1745                        | 20300 | QPSK_20MHz_1RB_High | Bottom        | 23.95                 | 24                       | Fig.14                     | 0.354                    | <b>0.36</b>              | 0.628                   | <b>0.64</b>             | 0.01             |

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.44: SAR Values (LTE Band 12-Head)**

| Ambient Temperature: 23.7°C |       |                     |               |                       |                          | Liquid Temperature: 23.2°C |                          |                          |                         |                         |                  |
|-----------------------------|-------|---------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |       | Configuration       | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.   |                     |               |                       |                          |                            |                          |                          |                         |                         |                  |
| 711                         | 23130 | QPSK_10MHz_1RB_High | Right Touch   | 24.14                 | 24.5                     | Fig.15                     | 0.204                    | <b>0.22</b>              | 0.261                   | <b>0.28</b>             | 0.07             |

**Table 14.45: SAR Values (LTE Band 12-Body)–APON**

| Ambient Temperature: 24.8°C |       |                     |               |                       |                          | Liquid Temperature: 24.3°C |                          |                          |                         |                         |                  |
|-----------------------------|-------|---------------------|---------------|-----------------------|--------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |       | Configuration       | Test Position | Conducted Power (dBm) | Max. tune-up Power (dBm) | Figure No.                 | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch.   |                     |               |                       |                          |                            |                          |                          |                         |                         |                  |
| 711                         | 23130 | QPSK_10MHz_1RB_High | Rear          | 24.14                 | 24.5                     | Fig.16                     | 0.432                    | <b>0.47</b>              | 0.706                   | <b>0.77</b>             | 0.09             |

Note: The distance between the EUT and the phantom bottom is 10mm

### 14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

#### Head Evaluation

**Table 14.46: SAR Values (Wi-Fi 802.11b - Head)**

| Ambient Temperature: 23.0°C |     |       |               |            |                       | Liquid Temperature: 22.5°C |                          |                          |                         |                         |                  |
|-----------------------------|-----|-------|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |     | Side  | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch. |       |               |            |                       |                            |                          |                          |                         |                         |                  |
| 2412                        | 1   | Left  | Touch         | /          | 17.77                 | 18                         | 0.351                    | <b>0.37</b>              | 0.765                   | <b>0.81</b>             | 0.13             |
| 2412                        | 1   | Left  | Tilt          | /          | 17.77                 | 18                         | 0.212                    | <b>0.22</b>              | 0.421                   | <b>0.44</b>             | 0.12             |
| 2412                        | 1   | Right | Touch         | /          | 17.77                 | 18                         | 0.193                    | <b>0.20</b>              | 0.353                   | <b>0.37</b>             | 0.13             |
| 2412                        | 1   | Right | Tilt          | /          | 17.77                 | 18                         | 0.130                    | <b>0.14</b>              | 0.243                   | <b>0.26</b>             | 0.18             |

As shown above table, the initial test position for head is “Left Touch”. So the head SAR of WLAN is presented as below:

**Table 14.47: SAR Values (WLAN - Head) – 802.11b 1Mbps (Full SAR)**

| Ambient Temperature: 22.5°C |     |       |               |            |                        | Liquid Temperature: 22.0°C |                          |                          |                         |                         |                  |          |
|-----------------------------|-----|-------|---------------|------------|------------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|----------|
| Frequency                   |     | Side  | Test Position | Figure No. | Conduct ed Power (dBm) | Max. tune-upP ower (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g )(W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g)( W/kg) | Power Drift (dB) | Note     |
| MHz                         | Ch. |       |               |            |                        |                            |                          |                          |                         |                         |                  |          |
| 2412                        | 1   | Left  | Touch         | Fig.17     | 17.77                  | 18                         | 0.354                    | <b>0.37</b>              | 0.768                   | <b>0.81</b>             | 0.13             | original |
| 2412                        | 1   | Right | Touch         | /          | 17.77                  | 18                         | 0.190                    | <b>0.20</b>              | 0.349                   | <b>0.37</b>             | 0.13             | original |
| 2437                        | 6   | Left  | Touch         | /          | 17.61                  | 18                         | 0.328                    | <b>0.36</b>              | 0.735                   | <b>0.80</b>             | 0.07             | original |
| 2412                        | 1   | Left  | Touch         | /          | 17.77                  | 18                         | 0.282                    | <b>0.30</b>              | 0.587                   | <b>0.62</b>             | 0.06             | new      |

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 97.7% is achievable for WLAN in this project and the scaled reported SAR is presented as below.

**Table 14.48: SAR Values (WLAN - Head) – 802.11b 1Mbps (Scaled Reported SAR)**

| Ambient Temperature: 22.5°C |     |       |               |                    | Liquid Temperature: 22.0°C |                         |                                |
|-----------------------------|-----|-------|---------------|--------------------|----------------------------|-------------------------|--------------------------------|
| Frequency                   |     | Side  | Test Position | Actual duty factor | maximum duty factor        | Reported SAR (1g)(W/kg) | Scaled reported SAR (1g)(W/kg) |
| MHz                         | Ch. |       |               |                    |                            |                         |                                |
| 2412                        | 1   | Left  | Touch         | 97.7%              | 100%                       | <b>0.81</b>             | <b>0.83</b>                    |
| 2412                        | 1   | Right | Touch         | 97.7%              | 100%                       | <b>0.37</b>             | <b>0.38</b>                    |

SAR is not required for OFDM because the 802.11b adjusted SAR  $\leq$  1.2 W/kg.

### Body Evaluation

**Table 14.49: SAR Values (WLAN - Body)– 802.11b 1Mbps (Fast SAR)**

| Ambient Temperature: 23.0°C |     |               |            |                       | Liquid Temperature: 22.5°C |                          |                          |                         |                         |                  |
|-----------------------------|-----|---------------|------------|-----------------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency                   |     | Test Position | Figure No. | Conducted Power (dBm) | Max. tune-up Power (dBm)   | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz                         | Ch. |               |            |                       |                            |                          |                          |                         |                         |                  |
| 2412                        | 1   | Front         | /          | 17.77                 | 18                         | 0.104                    | <b>0.11</b>              | 0.193                   | <b>0.20</b>             | 0.07             |
| 2412                        | 1   | Rear          | /          | 17.77                 | 18                         | 0.133                    | <b>0.14</b>              | 0.270                   | <b>0.28</b>             | 0.04             |
| 2412                        | 1   | Right         | /          | 17.77                 | 18                         | 0.083                    | <b>0.09</b>              | 0.160                   | <b>0.17</b>             | 0.02             |
| 2412                        | 1   | Top           | /          | 17.77                 | 18                         | 0.069                    | <b>0.07</b>              | 0.132                   | <b>0.14</b>             | 0.15             |

Note1: The distance between the EUT and the phantom bottom is 10mm.

As shown above table, the initial test position for body is “Rear”. So the body SAR of WLAN is presented as below:

**Table 14.50: SAR Values (WLAN - Body) – 802.11b 1Mbps (Full SAR)**

| Ambient Temperature: 23.0°C |     |                  |               |                             |                                | Liquid Temperature: 22.5°C     |                                |                               |                               |                        |          |
|-----------------------------|-----|------------------|---------------|-----------------------------|--------------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------|----------|
| Frequency                   |     | Test<br>Position | Figure<br>No. | Conducted<br>Power<br>(dBm) | Max.<br>tune-up Power<br>(dBm) | Measured<br>SAR(10g)<br>(W/kg) | Reported<br>SAR(10g)<br>(W/kg) | Measured<br>SAR(1g)<br>(W/kg) | Reported<br>SAR(1g)(<br>W/kg) | Power<br>Drift<br>(dB) | Note     |
| MHz                         | Ch. |                  |               |                             |                                |                                |                                |                               |                               |                        |          |
| 2412                        | 1   | Rear             | Fig.18        | 17.77                       | 18                             | 0.129                          | <b>0.14</b>                    | 0.266                         | <b>0.28</b>                   | 0.04                   | original |
| 2412                        | 1   | Rear             | /             | 17.77                       | 18                             | 0.056                          | <b>0.06</b>                    | 0.117                         | <b>0.12</b>                   | 0.13                   | new      |

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 97.7% is achievable for WLAN in this project and the scaled reported SAR is presented as below.

**Table 14.51: SAR Values (WLAN - Body) – 802.11b 1Mbps (Scaled Reported SAR)**

| Ambient Temperature: 22.5°C |     |               |                    | Liquid Temperature: 22.0°C |                         |                                |
|-----------------------------|-----|---------------|--------------------|----------------------------|-------------------------|--------------------------------|
| Frequency                   |     | Test Position | Actual duty factor | maximum duty factor        | Reported SAR (1g)(W/kg) | Scaled reported SAR (1g)(W/kg) |
| MHz                         | Ch. |               |                    |                            |                         |                                |
| 2437                        | 6   | Rear          | 97.7%              | 100%                       | <b>0.28</b>             | <b>0.29</b>                    |

SAR is not required for OFDM because the 802.11b adjusted SAR  $\leq 1.2$  W/kg.

## 15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

**Table 15.1: SAR Measurement Variability for Body GSM 1900 (1g)**

| Frequency |     | Test Position | Spacing (mm) | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio | Second Repeated SAR (W/kg) |
|-----------|-----|---------------|--------------|---------------------|---------------------------|-----------|----------------------------|
| MHz       | Ch. |               |              |                     |                           |           |                            |
| 1880      | 661 | Bottom        | 10           | 0.895               | 0.887                     | 1.01      | /                          |

**Table 15.2: SAR Measurement Variability for Body WCDMA 1900 (1g)**

| Frequency |      | Test Position | Spacing (mm) | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio | Second Repeated SAR (W/kg) |
|-----------|------|---------------|--------------|---------------------|---------------------------|-----------|----------------------------|
| MHz       | Ch.  |               |              |                     |                           |           |                            |
| 1907.6    | 9538 | Bottom        | 10           | 0.935               | 0.921                     | 1.02      | /                          |

**Table 15.3: SAR Measurement Variability for Body WCDMA 1700 (1g)**

| Frequency |      | Test Position | Spacing (mm) | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio | Second Repeated SAR (W/kg) |
|-----------|------|---------------|--------------|---------------------|---------------------------|-----------|----------------------------|
| MHz       | Ch.  |               |              |                     |                           |           |                            |
| 1752.6    | 1513 | Bottom        | 10           | 0.833               | 0.819                     | 1.02      | /                          |

**Table 15.4: SAR Measurement Variability for Body LTE Band 2 (1g)**

| Frequency |       | Test Position | Spacing (mm) | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio | Second Repeated SAR (W/kg) |
|-----------|-------|---------------|--------------|---------------------|---------------------------|-----------|----------------------------|
| MHz       | Ch.   |               |              |                     |                           |           |                            |
| 1860      | 18700 | Bottom        | 10           | 0.933               | 0.927                     | 1.01      | /                          |

## 16 Measurement Uncertainty

### 16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

| No.                                                | Error Description                               | Type                                        | Uncertainty value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------------------------------|-------------------------------------------------|---------------------------------------------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| Measurement system                                 |                                                 |                                             |                   |                       |            |         |          |                |                 |                   |
| 1                                                  | Probe calibration                               | B                                           | 6                 | N                     | 1          | 1       | 1        | 6              | 6               | ∞                 |
| 2                                                  | Isotropy                                        | B                                           | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 1.6            | 1.6             | ∞                 |
| 3                                                  | Boundary effect                                 | B                                           | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 6.4            | 6.4             | ∞                 |
| 4                                                  | Linearity                                       | B                                           | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | ∞                 |
| 5                                                  | Detection limit                                 | B                                           | 1.0               | N                     | 1          | 1       | 1        | 1              | 1               | ∞                 |
| 6                                                  | Readout electronics                             | B                                           | 0.3               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | ∞                 |
| 7                                                  | Response time                                   | B                                           | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.0            | 0.0             | ∞                 |
| 8                                                  | Integration time                                | B                                           | 2.6               | R                     | $\sqrt{3}$ | 1       | 1        | 1.0            | 1.0             | ∞                 |
| 9                                                  | RF ambient conditions-noise                     | B                                           | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | ∞                 |
| 10                                                 | RF ambient conditions-reflection                | B                                           | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | ∞                 |
| 11                                                 | Probe positioned mech. restrictions             | B                                           | 0.4               | R                     | $\sqrt{3}$ | 1       | 1        | 0.2            | 0.2             | ∞                 |
| 12                                                 | Probe positioning with respect to phantom shell | B                                           | 2.9               | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | ∞                 |
| 13                                                 | Post-processing                                 | B                                           | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 1.2            | 1.2             | ∞                 |
| Test sample related                                |                                                 |                                             |                   |                       |            |         |          |                |                 |                   |
| 14                                                 | Test sample positioning                         | A                                           | 3.3               | N                     | 1          | 1       | 1        | 3.3            | 3.3             | 5                 |
| 15                                                 | Device holder uncertainty                       | A                                           | 3.4               | N                     | 1          | 1       | 1        | 3.4            | 3.4             | 5                 |
| 16                                                 | Drift of output power                           | B                                           | 5.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.9            | 2.9             | ∞                 |
| Phantom and set-up                                 |                                                 |                                             |                   |                       |            |         |          |                |                 |                   |
| 17                                                 | Phantom uncertainty                             | B                                           | 4.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.3            | 2.3             | ∞                 |
| 18                                                 | Liquid conductivity (target)                    | B                                           | 5.0               | R                     | $\sqrt{3}$ | 0.64    | 0.43     | 1.8            | 1.2             | ∞                 |
| 19                                                 | Liquid conductivity (meas.)                     | A                                           | 2.06              | N                     | 1          | 0.64    | 0.43     | 1              | 0.28            | 9                 |
| 20                                                 | Liquid permittivity (target)                    | B                                           | 5.0               | R                     | $\sqrt{3}$ | 0.6     | 0.49     | 1.7            | 1.4             | ∞                 |
| 21                                                 | Liquid permittivity (meas.)                     | A                                           | 1.6               | N                     | 1          | 0.6     | 0.49     | 0.31           | 0.25            | 9                 |
| Combined standard uncertainty                      |                                                 | $u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ |                   |                       |            |         |          | 11.5           | 11.4            | 95.5              |
| Expanded uncertainty (Confidence interval of 95 %) |                                                 | $u_e = 2u_c$                                |                   |                       |            |         |          | 22.9           | 22.7            |                   |

## 16.2 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

| No.                                                | Error Description                               | Type                                       | Uncertainty value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------------------------------|-------------------------------------------------|--------------------------------------------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| Measurement system                                 |                                                 |                                            |                   |                       |            |         |          |                |                 |                   |
| 1                                                  | Probe calibration                               | B                                          | 6                 | N                     | 1          | 1       | 1        | 6              | 6               | $\infty$          |
| 2                                                  | Isotropy                                        | B                                          | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 1.6            | 1.6             | $\infty$          |
| 3                                                  | Boundary effect                                 | B                                          | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 6.4            | 6.4             | $\infty$          |
| 4                                                  | Linearity                                       | B                                          | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | $\infty$          |
| 5                                                  | Detection limit                                 | B                                          | 1.0               | R                     | 1          | 1       | 1        | 1              | 1               | $\infty$          |
| 6                                                  | Readout electronics                             | B                                          | 0.3               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 7                                                  | Response time                                   | B                                          | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.0            | 0.0             | $\infty$          |
| 8                                                  | Integration time                                | B                                          | 2.6               | R                     | $\sqrt{3}$ | 1       | 1        | 1.0            | 1.0             | $\infty$          |
| 9                                                  | RF ambient conditions-noise                     | B                                          | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | $\infty$          |
| 10                                                 | RF ambient conditions-reflection                | B                                          | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | $\infty$          |
| 11                                                 | Probe positioned mech. Restrictions             | B                                          | 0.4               | R                     | $\sqrt{3}$ | 1       | 1        | 0.2            | 0.2             | $\infty$          |
| 12                                                 | Probe positioning with respect to phantom shell | B                                          | 2.9               | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | $\infty$          |
| 13                                                 | Post-processing                                 | B                                          | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 1.2            | 1.2             | $\infty$          |
| 14                                                 | Fast SAR z-Approximation                        | B                                          | 7.0               | R                     | $\sqrt{3}$ | 1       | 1        | 4.0            | 4.0             | $\infty$          |
| Test sample related                                |                                                 |                                            |                   |                       |            |         |          |                |                 |                   |
| 15                                                 | Test sample positioning                         | A                                          | 3.3               | N                     | 1          | 1       | 1        | 3.3            | 3.3             | 5                 |
| 16                                                 | Device holder uncertainty                       | A                                          | 3.4               | N                     | 1          | 1       | 1        | 3.4            | 3.4             | 5                 |
| 17                                                 | Drift of output power                           | B                                          | 5.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.9            | 2.9             | $\infty$          |
| Phantom and set-up                                 |                                                 |                                            |                   |                       |            |         |          |                |                 |                   |
| 18                                                 | Phantom uncertainty                             | B                                          | 4.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.3            | 2.3             | $\infty$          |
| 19                                                 | Liquid conductivity (target)                    | B                                          | 5.0               | R                     | $\sqrt{3}$ | 0.64    | 0.43     | 1.8            | 1.2             | $\infty$          |
| 20                                                 | Liquid conductivity (meas.)                     | A                                          | 2.06              | N                     | 1          | 0.64    | 0.43     | 1              | 0.28            | 9                 |
| 21                                                 | Liquid permittivity (target)                    | B                                          | 5.0               | R                     | $\sqrt{3}$ | 0.6     | 0.49     | 1.7            | 1.4             | $\infty$          |
| 22                                                 | Liquid permittivity (meas.)                     | A                                          | 1.6               | N                     | 1          | 0.6     | 0.49     | 0.31           | 0.25            | 9                 |
| Combined standard uncertainty                      |                                                 | $u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$ |                   |                       |            |         |          | 12.1           | 12.0            | 95.5              |
| Expanded uncertainty (Confidence interval of 95 %) |                                                 | $u_e = 2u_c$                               |                   |                       |            |         |          | 24.3           | 24.1            |                   |

## 17MAIN TEST INSTRUMENTS

**Table 17.1: List of Main Instruments**

| No. | Name                         | Type            | Serial Number | Calibration Date  | Valid Period |
|-----|------------------------------|-----------------|---------------|-------------------|--------------|
| 01  | Network analyzer             | Agilent E5071C  | MY46103759    | November20,2015   | One year     |
| 02  | Dielectricprobe              | 85070E          | MY44300317    | /                 |              |
| 03  | Power meter                  | NRVD            | 101253        | March 5,2015      | One year     |
| 04  | Power sensor                 | NRV-Z5          | 100333        |                   |              |
| 05  | Signal Generator             | E8257D          | MY47461211    | June15, 2016      | One year     |
| 06  | Amplifier                    | VTL5400         | 0404          | /                 |              |
| 07  | BTS                          | E5515C          | GB46110723    | May19, 2016       | One year     |
| 08  | Radio Communication Analyzer | Anristu MT8820C | 6201341853    | March27, 2015     | One year     |
| 09  | E-field Probe                | SPEAG ES3DV3    | 3151          | October30, 2015   | One year     |
| 10  | DAE                          | SPEAG DAE4      | 786           | November 16, 2015 | One year     |
| 11  | Dipole Validation Kit        | SPEAG D750V3    | 1017          | July 20, 2016     | One year     |
| 12  | Dipole Validation Kit        | SPEAG D835V2    | 4d057         | October22, 2015   | Three year   |
| 13  | Dipole Validation Kit        | SPEAG D1800V2   | 2d147         | November 3, 2015  | Three year   |
| 14  | Dipole Validation Kit        | SPEAG D1900V2   | 5d088         | November 4, 2015  | Three year   |
| 15  | Dipole Validation Kit        | SPEAG D2450V2   | 873           | October 30, 2015  | Three year   |
| 16  | E-field Probe                | SPEAG EX3DV4    | 3633          | June21, 2016      | One year     |
| 17  | Power meter                  | NRP             | 102603        | January 10,2016   | One year     |
| 18  | Power sensor                 | NRP-Z51         | 102211        |                   |              |
| 19  | Radio Communication Analyzer | Anristu MT8820C | 6201563767    | February3, 2016   | One year     |

\*\*\*END OF REPORT BODY\*\*\*

## ANNEX A Graph Results

### GSM 850 Right Cheek Low

Date/Time: 2016-1-5

Electronics: DAE4 Sn786

Medium: Head 900 MHz

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.911$  S/m;  $\epsilon_r = 40.162$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C      Liquid Temperature: 21.5°C

Communication System: GSM Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3151 ConvF(6, 6, 6);

**Right Cheek Low/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

**Right Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.296 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.142 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.117 W/kg

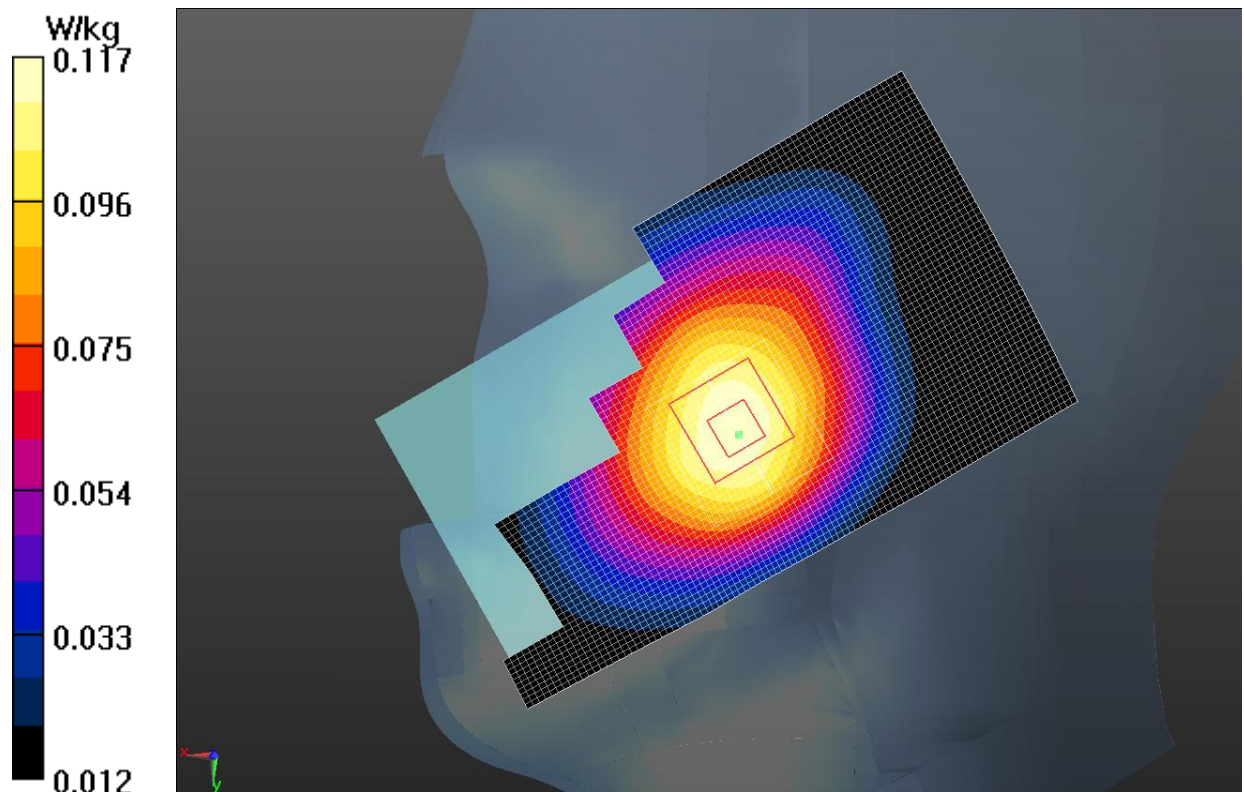
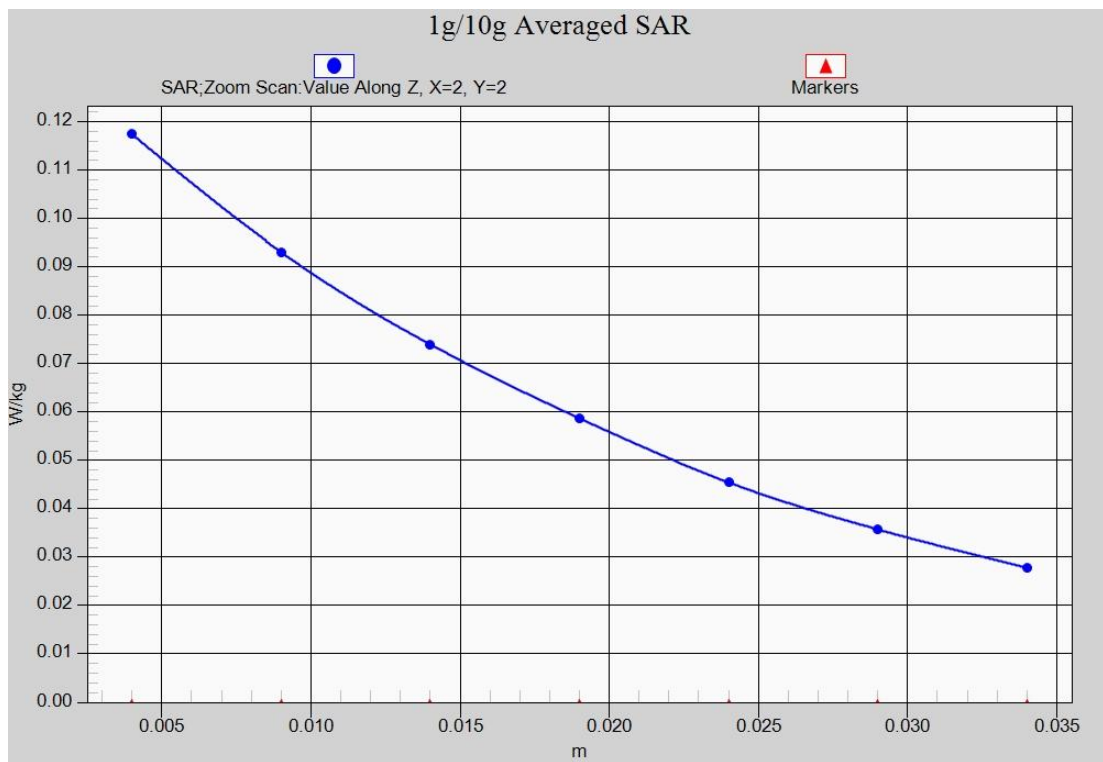


Fig.1 GSM 850MHz CH128



**Fig.1-1 Z-Scan at power reference point (GSM 850 MHz CH128)**

## GSM 850 Body RearLow

Date/Time: 2016-1-6

Electronics: DAE4 Sn786

Medium: 850Body MHz

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.959$  S/m;  $\epsilon_r = 53.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: 4 slot GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3151 ConvF(6.13, 6.13, 6.13);

**Rear side Low/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.234 W/kg

**Rear side Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.609 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.276 W/kg

**SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.169 W/kg**

Maximum value of SAR (measured) = 0.231 W/kg

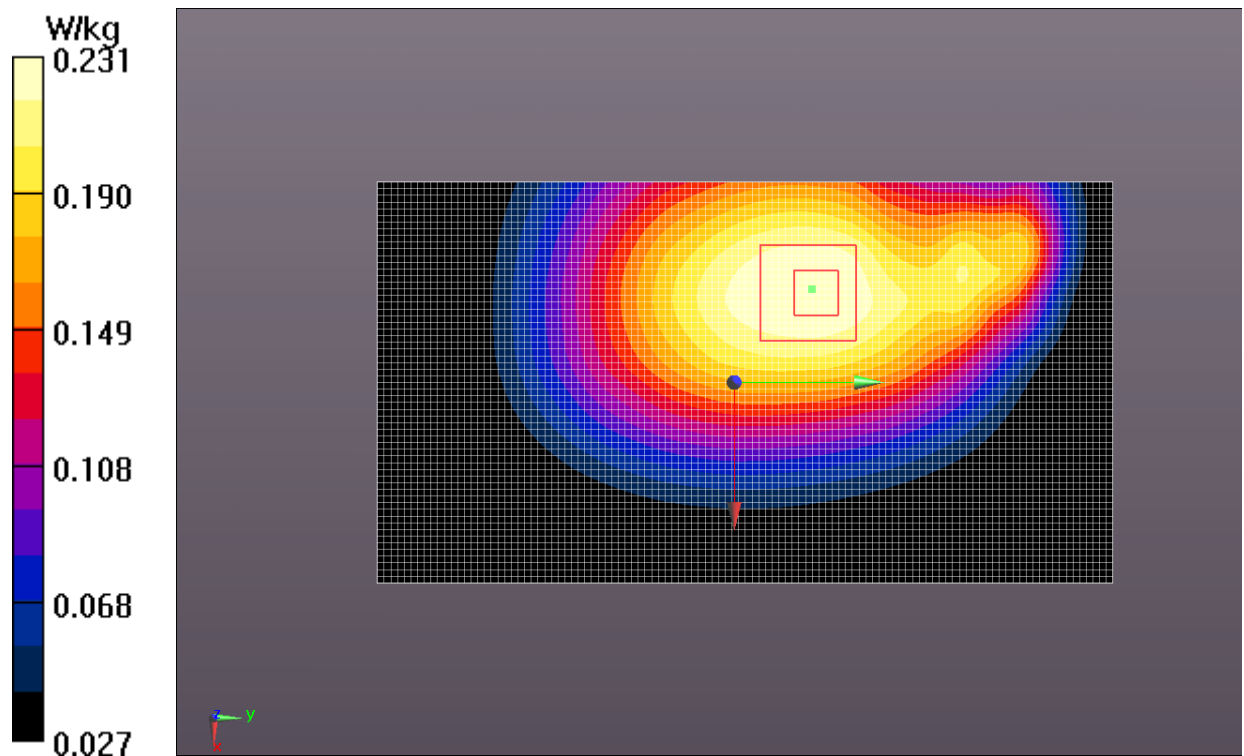
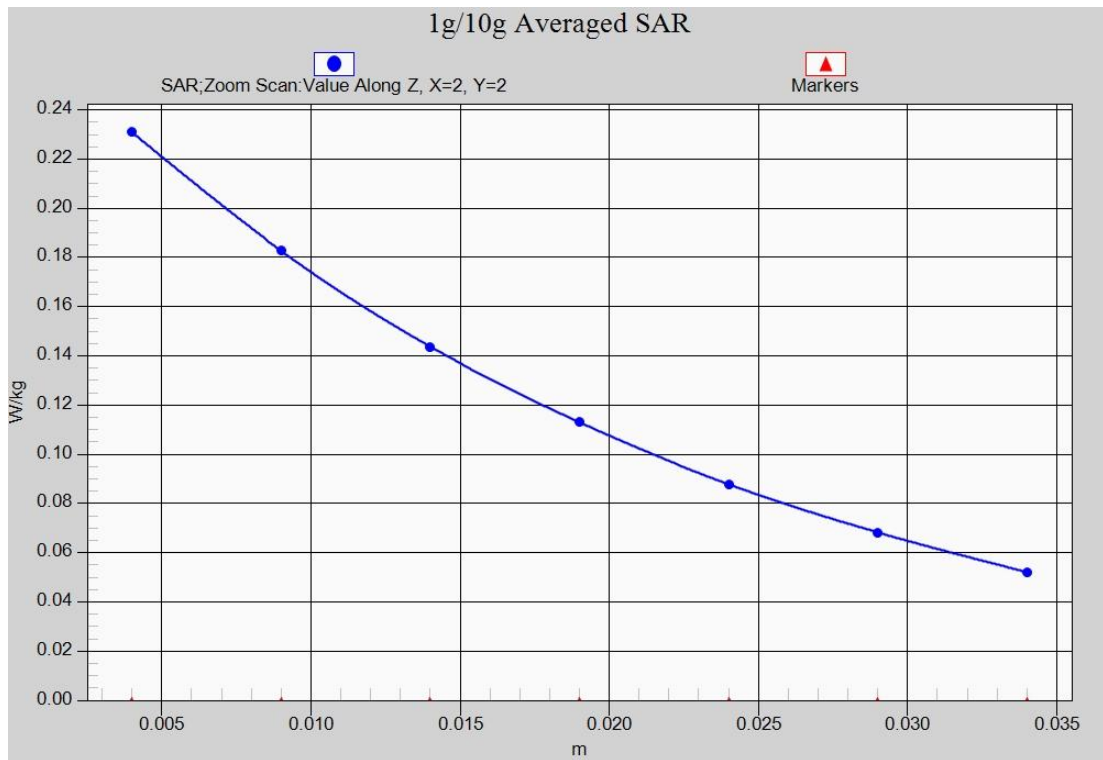


Fig.2 GSM 850 MHz CH128



**Fig.2-1 Z-Scan at power reference point (GSM 850 MHz CH128)**

## GSM1900 Left Cheek Middle

Date/Time: 2016-1-12

Electronics: DAE4 Sn786

Medium: 1900 Head

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.394$  S/m;  $\epsilon_r = 38.388$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: GSM Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96);

**Left Cheek Middle/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.339 W/kg

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.326 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.484 W/kg

**SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.187 W/kg**

Maximum value of SAR (measured) = 0.314 W/kg

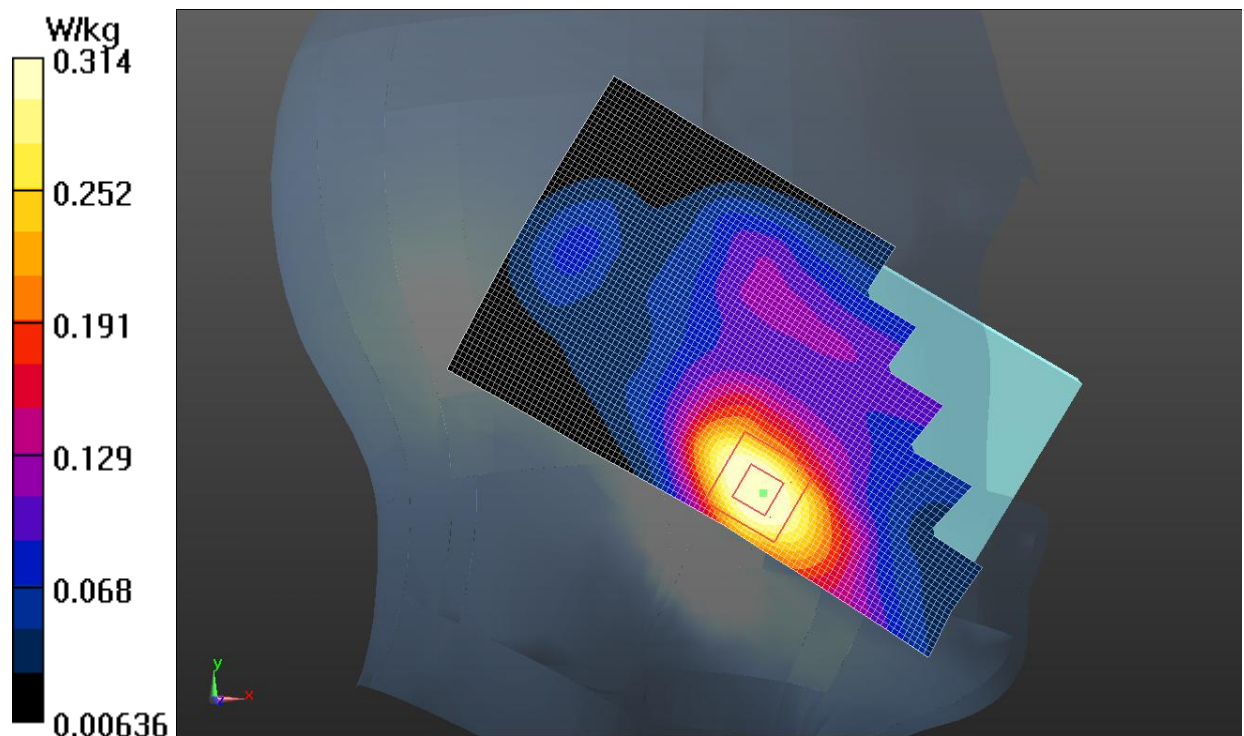
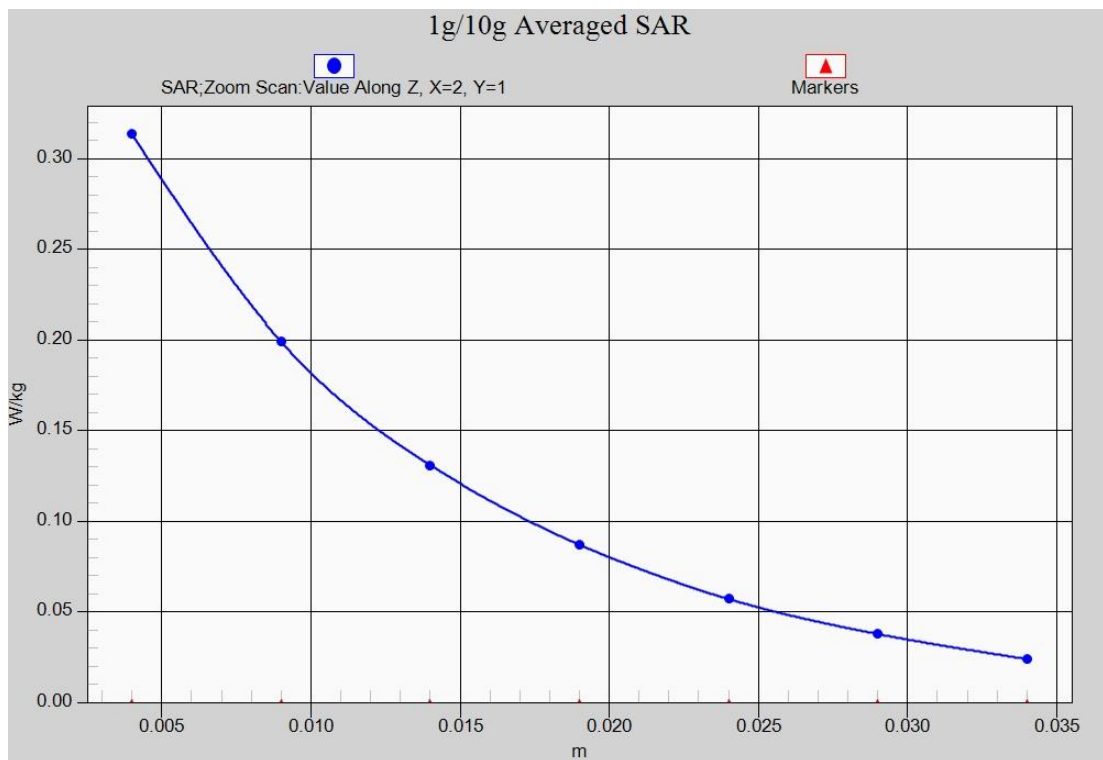


Fig.3 GSM 1900 MHz CH661



**Fig.3-1 Z-Scan at power reference point (GSM 1900 MHz CH661)**

## GSM1900 Body BottomMiddle

Date/Time: 2016-1-31

Electronics: DAE4 Sn786

Medium: 1900Body MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.539$  S/m;  $\epsilon_r = 50.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: 4 slot GPRS Frequency: 1880 MHz Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3151 ConvF(4.5, 4.5, 4.5);

**Bottom side Middle/Area Scan (41x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.04 W/kg

**Bottom side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 24.230 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.476 W/kg**

Maximum value of SAR (measured) = 1.00 W/kg

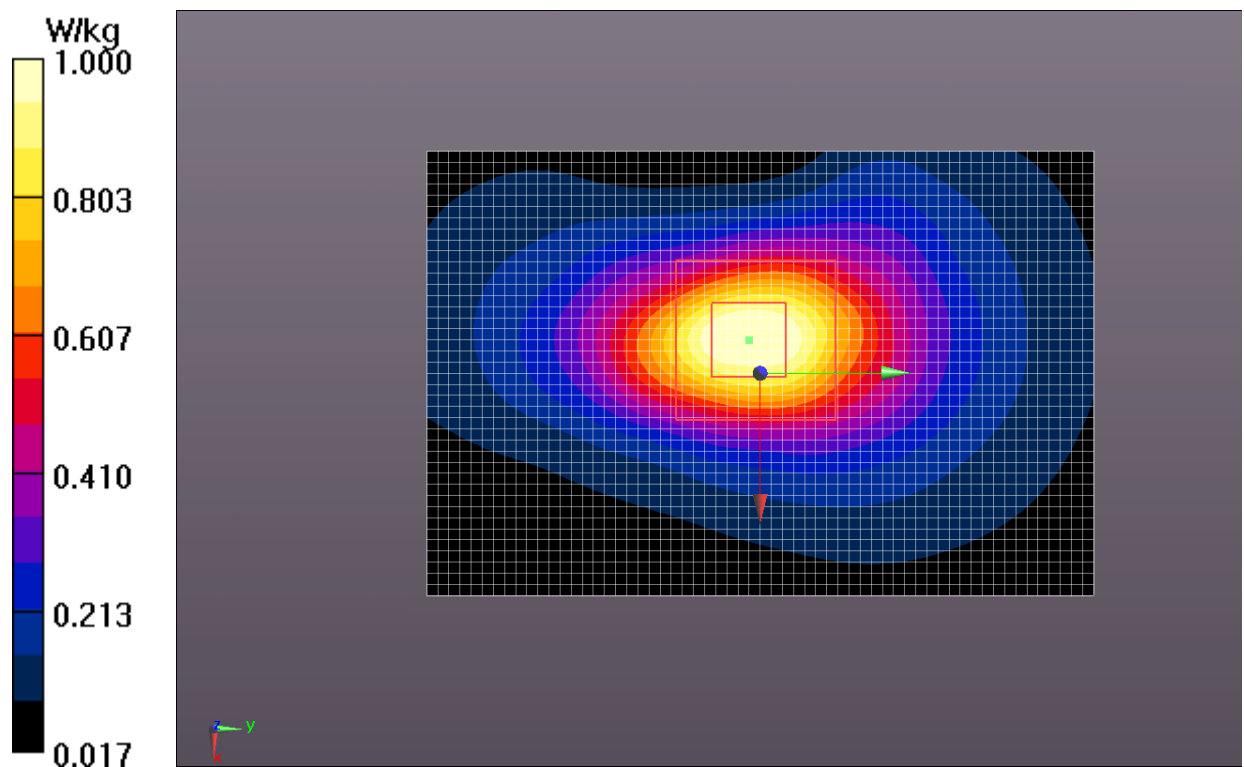
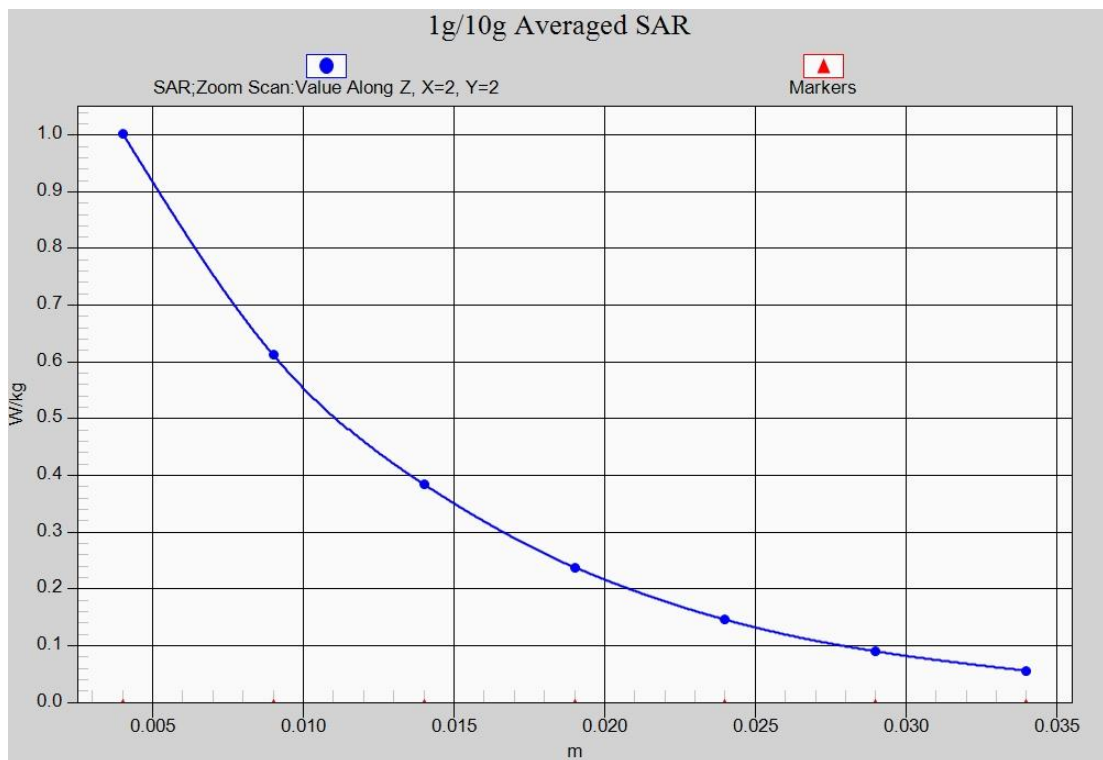


Fig.4 GSM 1900 MHz CH661



**Fig.4-1 Z-Scan at power reference point (GSM 1900 MHz CH661)**

## WCDMA 850 Right Cheek Low

Date/Time: 2016-1-5

Electronics: DAE4 Sn786

Medium: Head 900 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.914$  S/m;  $\epsilon_r = 40.166$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C      Liquid Temperature: 21.5°C

Communication System: WCDMA Frequency: 826.4 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(6, 6, 6);

**Right Cheek Low/Area Scan (61x111x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.109 W/kg

**Right Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.126 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.131 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.109 W/kg

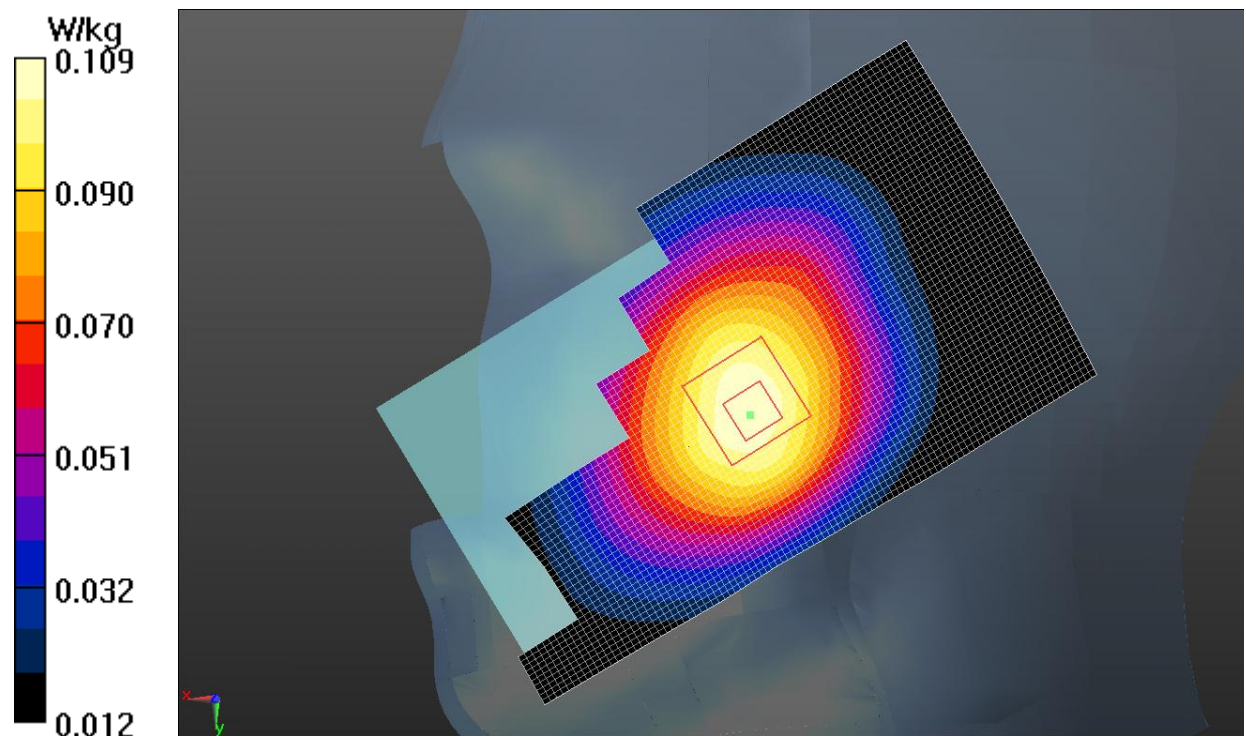
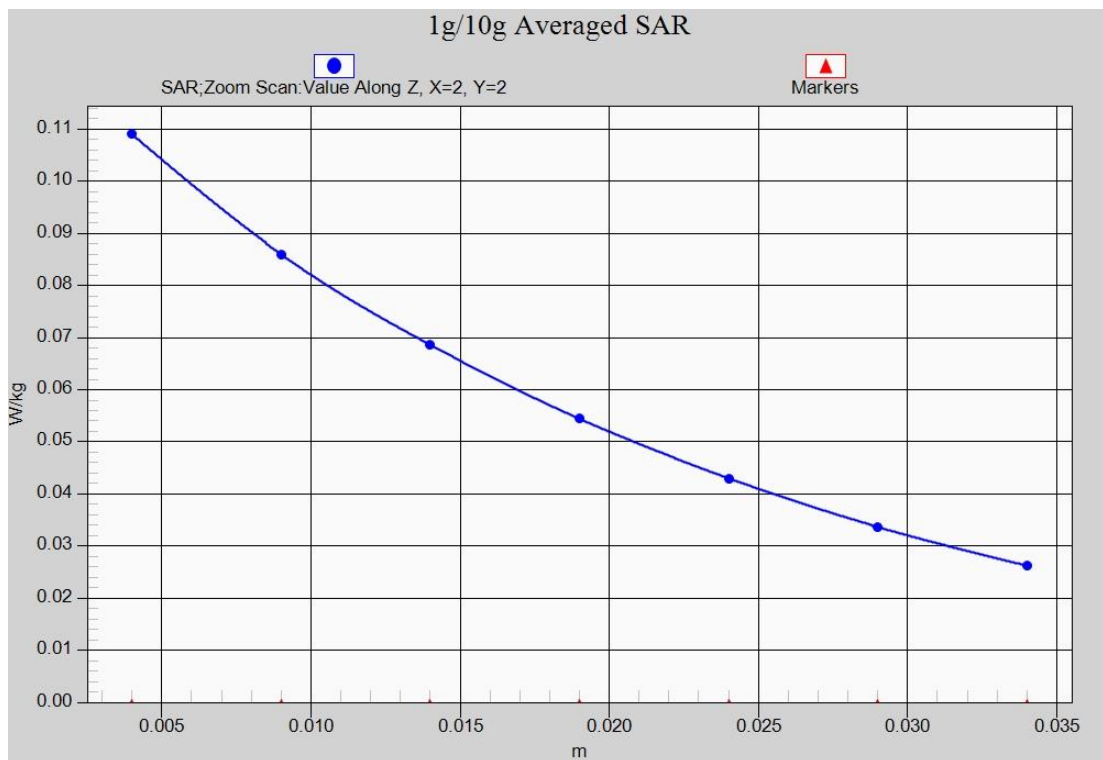


Fig.5 WCDMA 850 CH4132



**Fig.5-1 Z-Scan at power reference point (WCDMA 850 CH4132)**

## WCDMA 850 Body RearLow

Date/Time: 2016-1-6

Electronics: DAE4 Sn786

Medium: 850Body MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.961$  S/m;  $\epsilon_r = 53.553$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: WCDMA Frequency: 826.4 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(6.13, 6.13, 6.13);

**Rear side Low/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.171 W/kg

**Rear side Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.988 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.167 W/kg

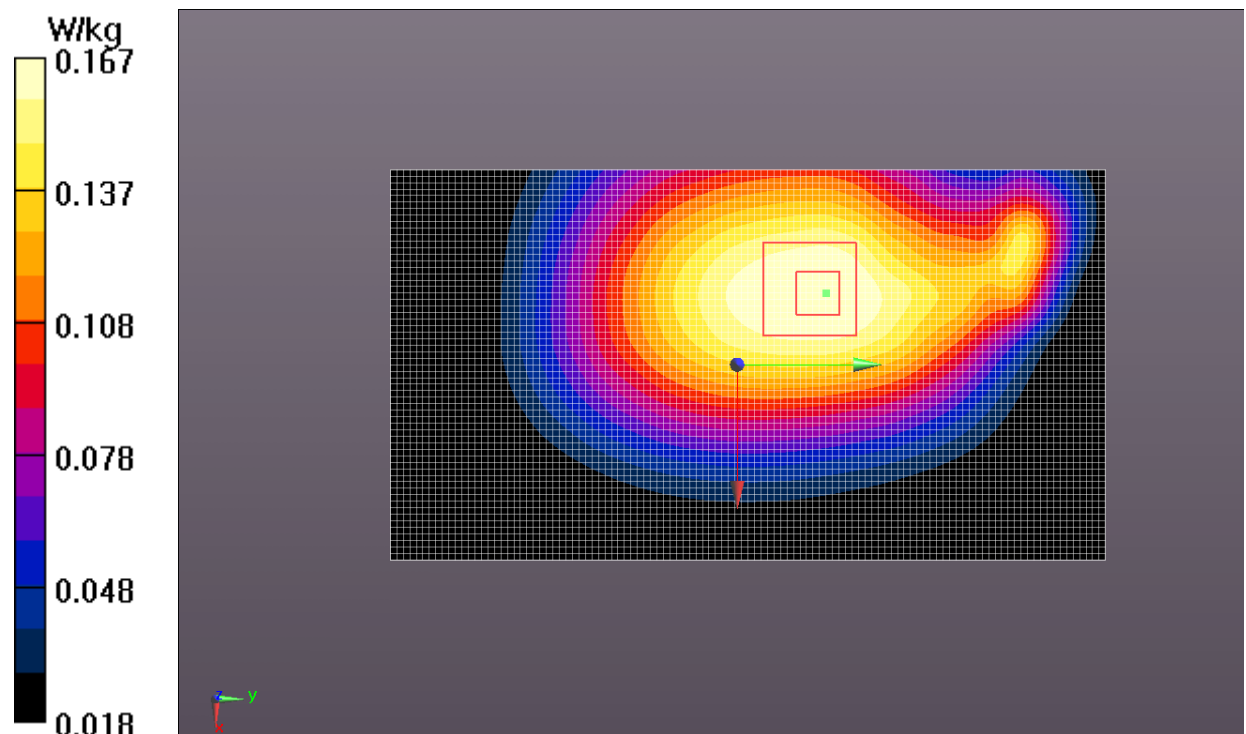
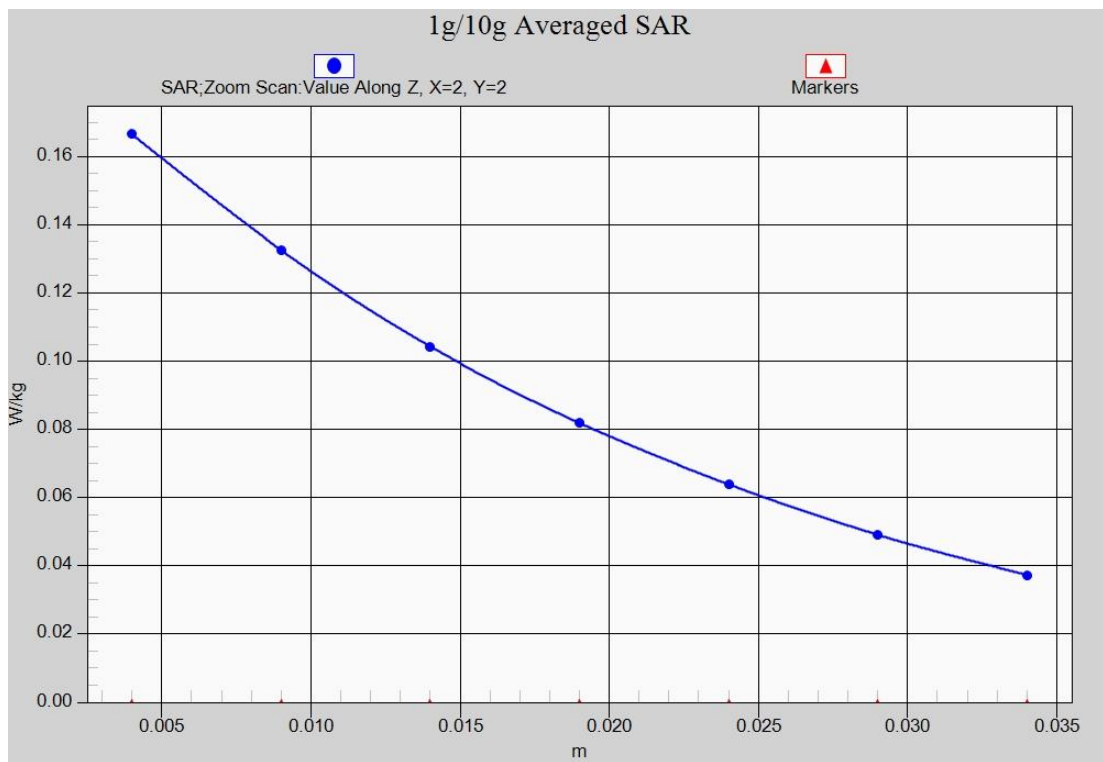


Fig.6 WCDMA 850 CH4128



**Fig.6-1 Z-Scan at power reference point (WCDMA850 CH4132)**

## WCDMA 1900 Left Cheek High

Date/Time: 2016-1-12

Electronics: DAE4 Sn786

Medium: 1900 Head

Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.414 \text{ S/m}$ ;  $\epsilon_r = 38.304$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: WCDMA Frequency: 1908 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96); Calibrated: 2015-10-30

**Left Cheek High/Area Scan (61x111x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.425 \text{ W/kg}$

**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.336 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$

Peak SAR (extrapolated) =  $0.600 \text{ W/kg}$

**SAR(1 g) =  $0.379 \text{ W/kg}$ ; SAR(10 g) =  $0.228 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.411 \text{ W/kg}$

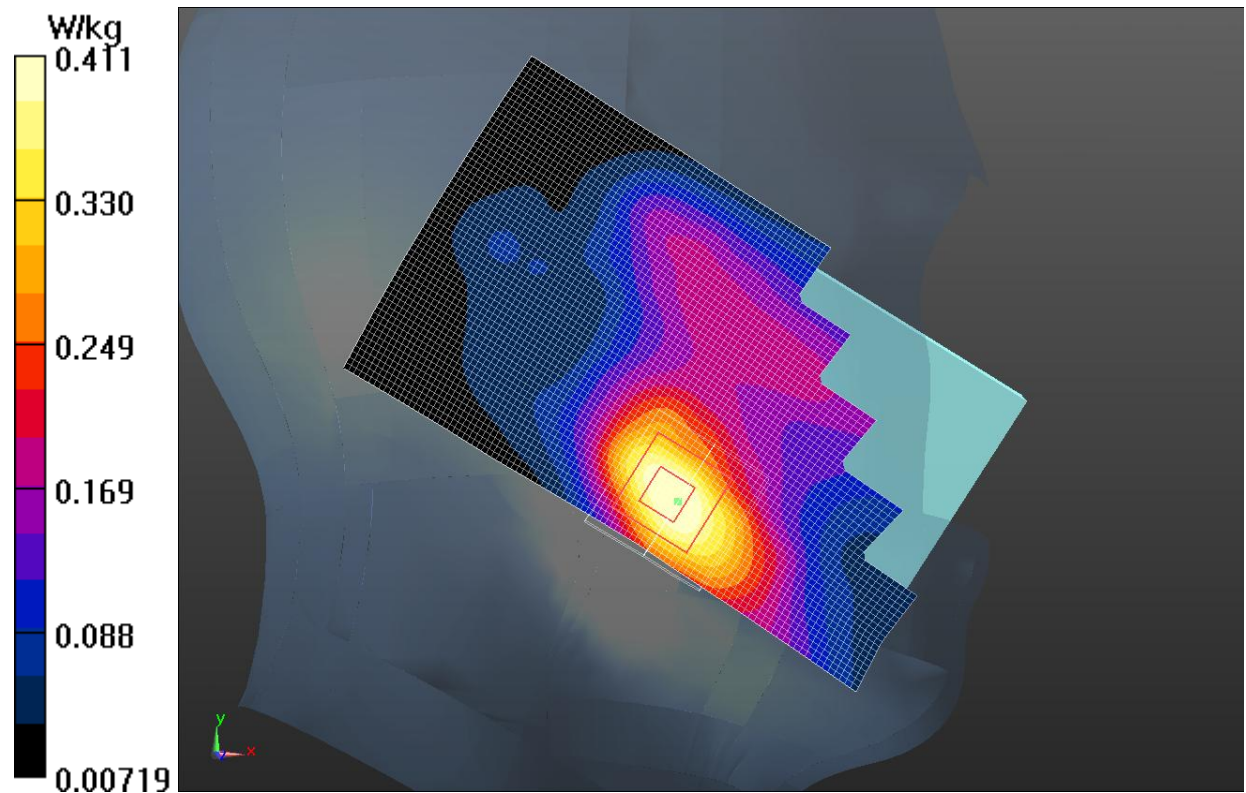
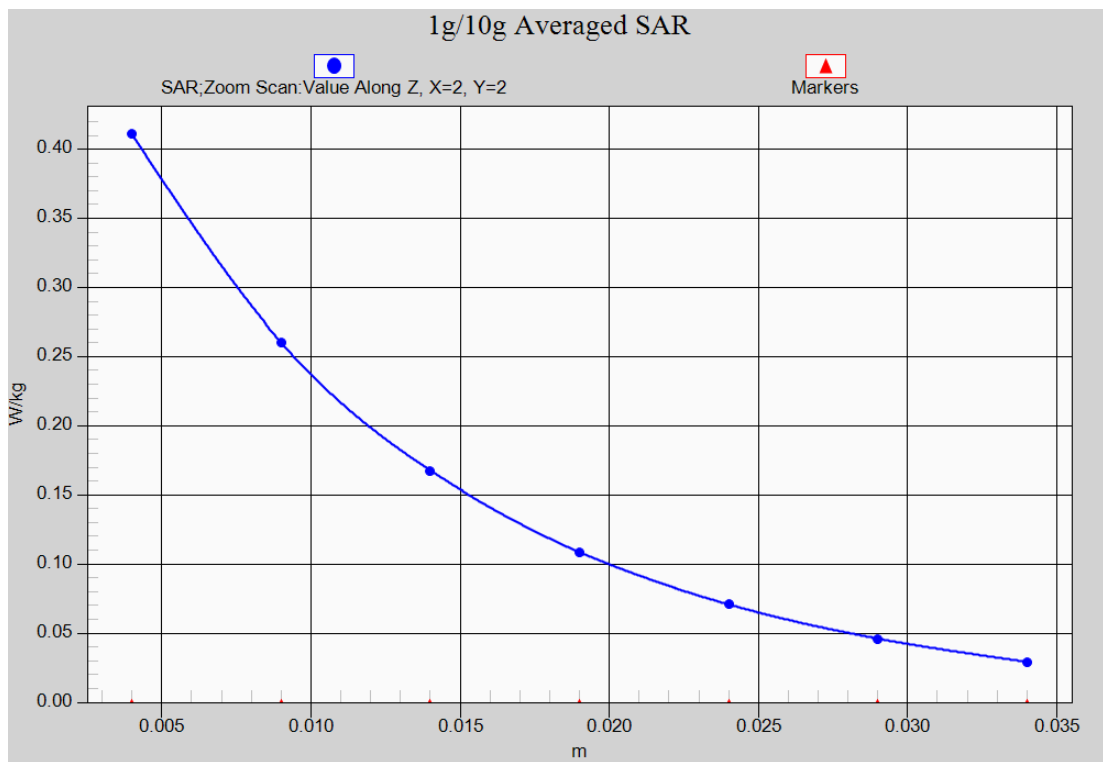


Fig.7 WCDMA1900 CH9538



**Fig.7-1 Z-Scan at power reference point (WCDMA1900 CH9538)**

## WCDMA 1900 Body BottomHigh

Date/Time: 2016-1-31

Electronics: DAE4 Sn786

Medium: 1900Body MHz

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.593$  S/m;  $\epsilon_r = 52.14$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: WCDMA Frequency: 1908 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.5, 4.5, 4.5);

**Bottom side High/Area Scan (51x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.03 W/kg

**Bottom side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 25.599 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.492 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

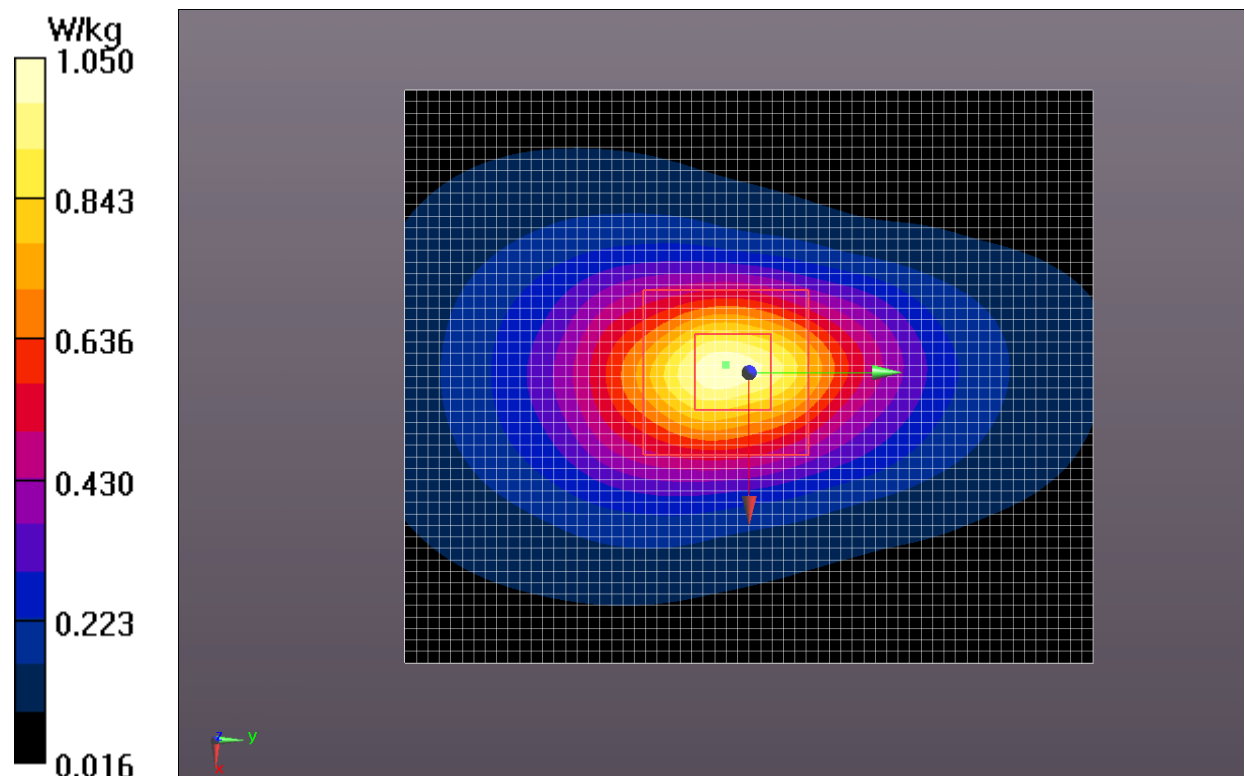
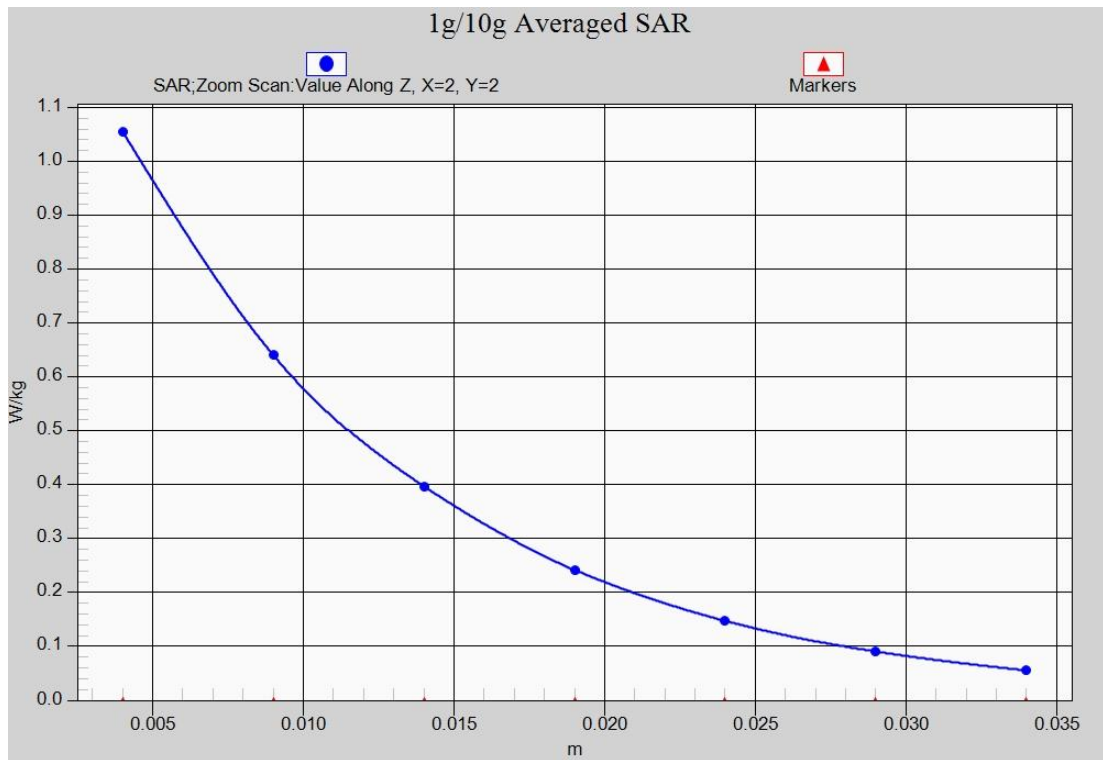


Fig.8 WCDMA1900 CH9538



**Fig.8-1 Z-Scan at power reference point (WCDMA1900 CH9538)**

## WCDMA 1700 Left Cheek High

Date/Time: 2016-1-6

Electronics: DAE4 Sn786

Medium: Head 1800 MHz

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 37.485$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C      Liquid Temperature: 21.5°C

Communication System: WCDMA Frequency: 1752.6 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(5.06, 5.06, 5.06);

**Left Cheek High/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.540 W/kg

**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.614 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.726 W/kg

**SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.301 W/kg**

Maximum value of SAR (measured) = 0.529 W/kg

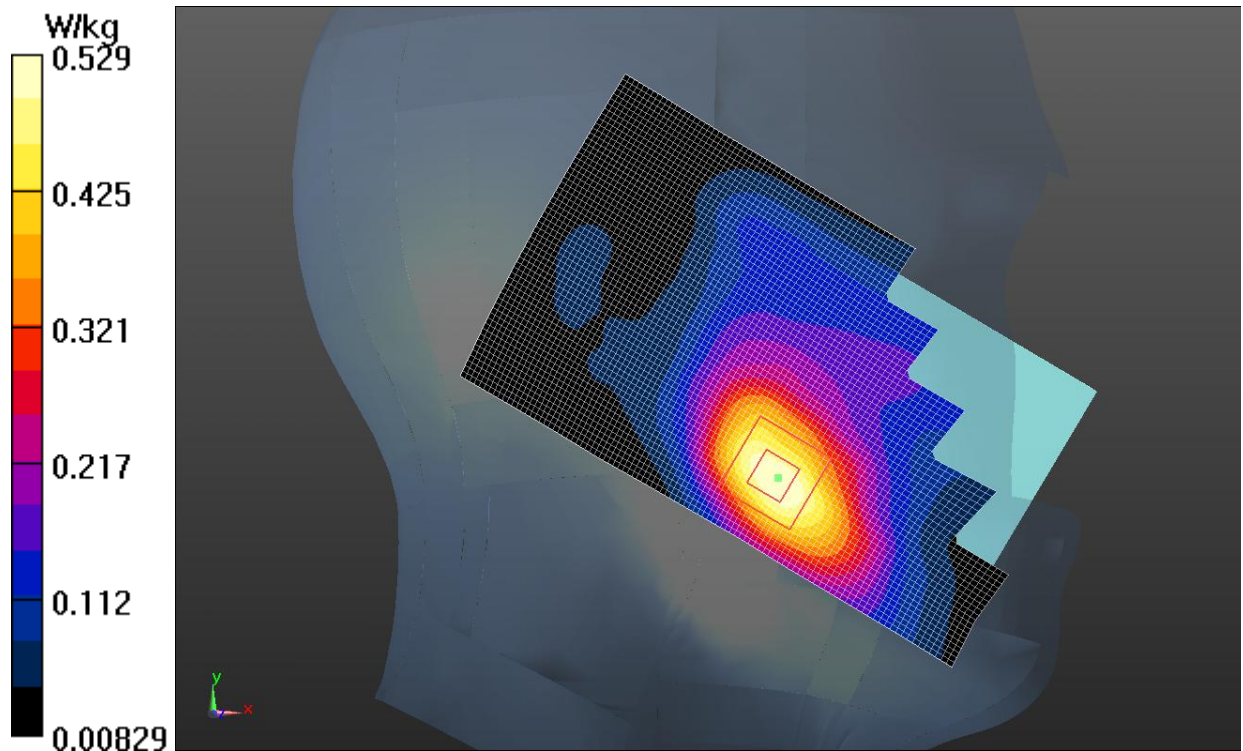
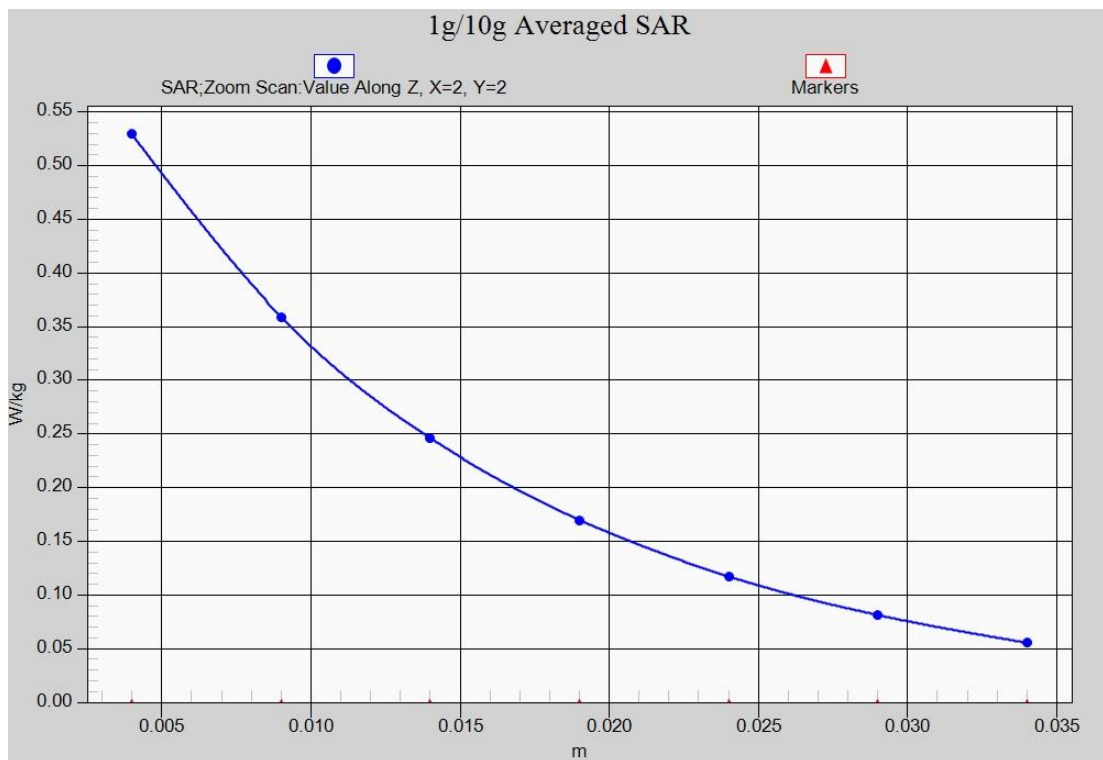


Fig.9 WCDMA1700



**Fig.9-1 Z-Scan at power reference point (WCDMA1700)**

## WCDMA 1700 Body BottomHigh

Date/Time: 2016-1-7

Electronics: DAE4 Sn786

Medium: 1800Body

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.441$  S/m;  $\epsilon_r = 52.405$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C      Liquid Temperature: 21.5°C

Communication System: WCDMA Frequency: 1752.6 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.75, 4.75, 4.75);

**Bottom side High/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.905 W/kg

**Bottom side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.437 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.456 W/kg**

Maximum value of SAR (measured) = 0.948 W/kg

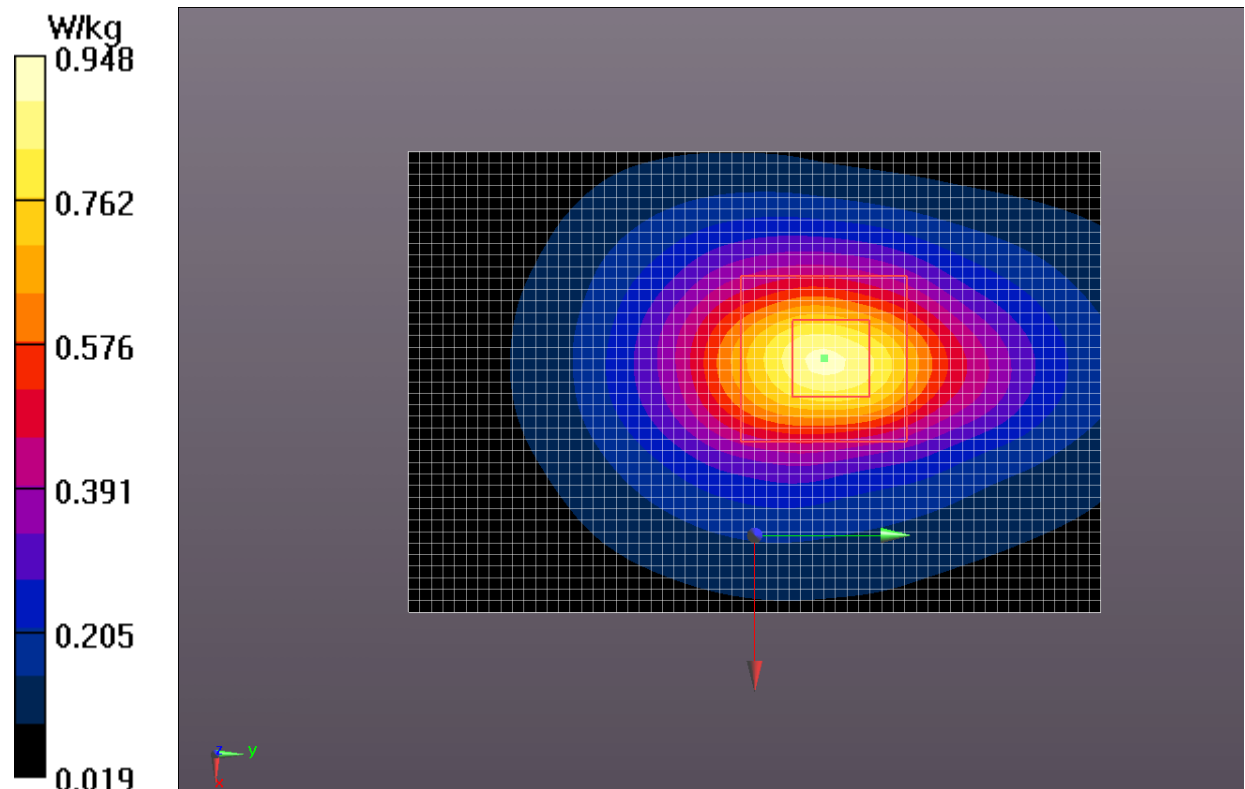
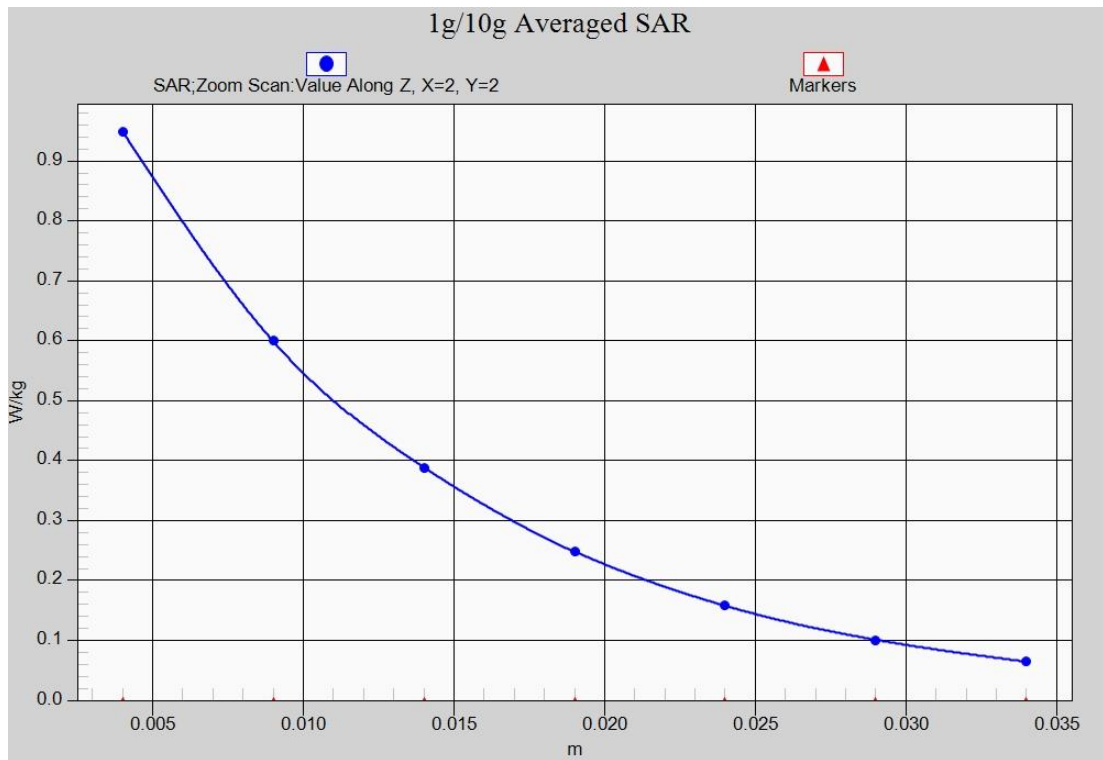


Fig.10 WCDMA1700



**Fig.10-1 Z-Scan at power reference point (WCDMA1700)**

## LTE Band 2Left Cheek Low with QPSK\_20MHz\_1RB\_Low

Date/Time: 2016-1-12

Electronics: DAE4 Sn786

Medium: 1900 Head

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.425$  S/m;  $\epsilon_r = 40.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: LTE\_FDD Frequency: 1860 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96);

**Left Cheek Low\_1RB\_Low/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.448 W/kg

**Left Cheek Low\_1RB\_Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.885 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.643 W/kg

**SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 0.480 W/kg

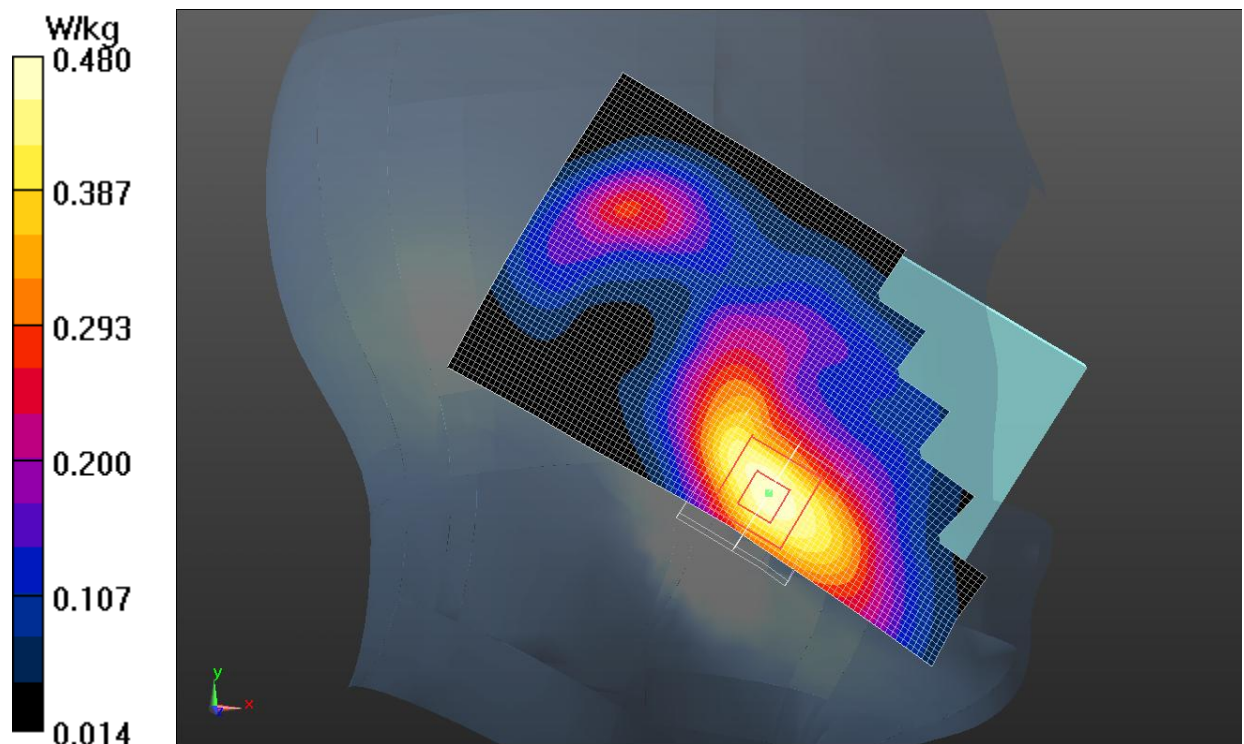
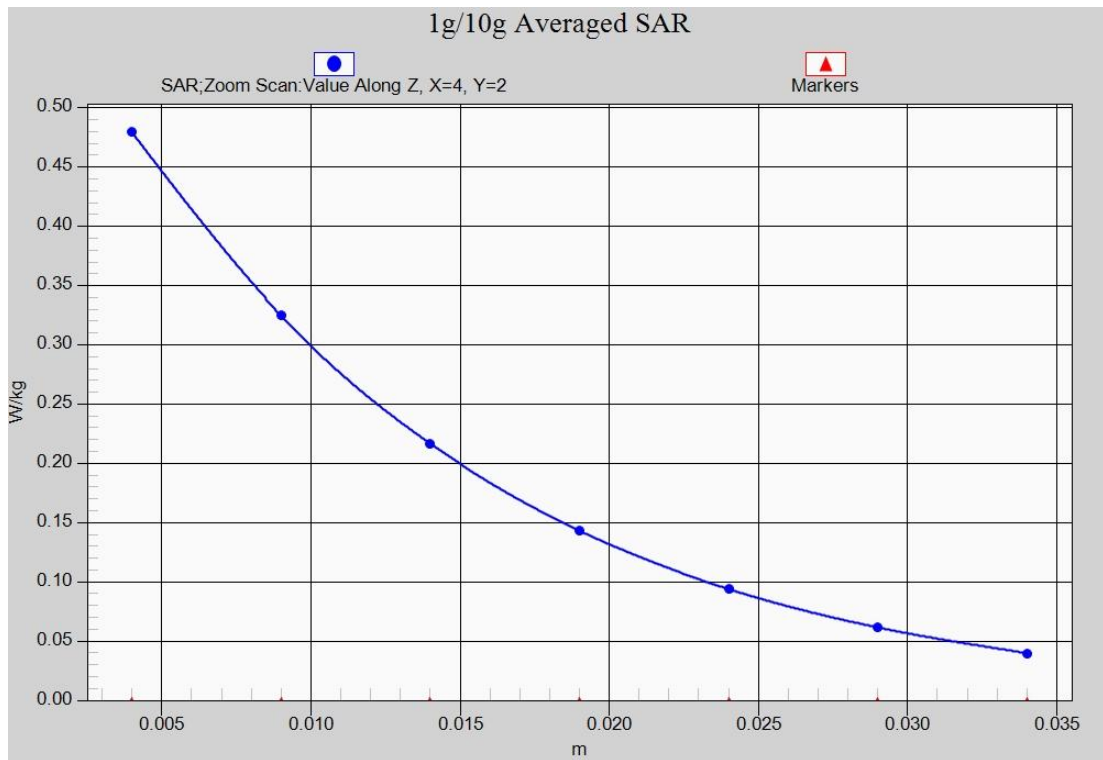


Fig.11 LTE Band 2 CH18700



**Fig.11-1 Z-Scan at power reference point (Band 2CH18700)**