



FCC RF Test Report

APPLICANT : Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.
EQUIPMENT : Smartphone
BRAND NAME : Coolpad
MODEL NAME : Coolpad 5560S
FCC ID : R38YL5560S
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 27, 2014 and testing was completed on Jul. 21, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards. The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.
No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard.....	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	7
1.8 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	11
2.4 Measurement Results Explanation Example	11
3 TEST RESULT.....	12
3.1 Conducted Output Power Measurement.....	12
3.2 Peak-to-Average Ratio	14
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	19
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	23
3.5 Band Edge Measurement.....	31
3.6 Conducted Spurious Emission Measurement.....	37
3.7 Field Strength of Spurious Radiation Measurement	44
3.8 Frequency Stability Measurement.....	52
4 LIST OF MEASURING EQUIPMENT	56
5 UNCERTAINTY OF EVALUATION.....	57

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< $43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission	< $43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< $43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 29.8 dB at 2544.930 MHz
3.8	§2.1055 §22.355 §24.235	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.

Hi-Tech Industry Park(North), Nanshan District, Shenzhen City, Guangdong Province, P.R.C.

1.2 Manufacturer

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.

Hi-Tech Industry Park(North), Nanshan District, Shenzhen City, Guangdong Province, P.R.C.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	Coolpad
Model Name	Coolpad 5560S
FCC ID	R38YL5560S
EUT supports Radios application	CDMA/EV-DO/WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	P1
SW Version	5560S.SP005
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna	CDMA2000 BC0 : 23.72 dBm CDMA2000 BC1 : 23.32 dBm
Antenna Type	PIFA Antenna
Type of Modulation	CDMA2000 1xRTT : QPSK CDMA2000 1xEV-DO : 8PSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	CDMA2000 BC0 1xRTT	QPSK	0.1030	0.006 ppm	1M28F9W
Part 24	CDMA2000 BC1 1xRTT	QPSK	0.2531	0.006 ppm	1M28F9W

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-3320-2398		
Test Site No.	Sporton Site No.	FCC Registration No.	
	TH01-SZ	03CH01-SZ	831040

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.		
	OTA01-SZ		



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for CDMA2000 BC0.
2. 30 MHz to 19000 MHz for CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC0	■ 1xRTT Link Mode	■ 1xRTT Link Mode
CDMA2000 BC1	■ 1xRTT Link Mode	■ 1xRTT Link Mode


Note: The maximum RF output power levels are 1xRTT RC3+SO55 mode for CDMA2000 BC0 and CDMA2000 BC1 on QPSK Link, only these modes were used for all tests

Conducted Power Measurement Results:


Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	23.52	23.62	23.63	23.07	22.92	22.75
1xRTT RC3 SO55	23.69	23.65	23.72	23.32	22.98	22.94
1xRTT RC3 SO32(+ F-SCH)	23.56	23.59	23.61	23.28	22.95	22.79
1xRTT RC3 SO32(+SCH)	23.48	23.62	23.63	23.31	22.92	22.74
1xEV-DO RTAP 153.6kbps	23.54	23.64	23.65	23.29	22.89	22.80
1xEV-DO RETAP 4096Bits	23.53	23.61	23.70	23.27	22.88	22.72

2.2 Connection Diagram of Test System

,<22H Tx Mode>

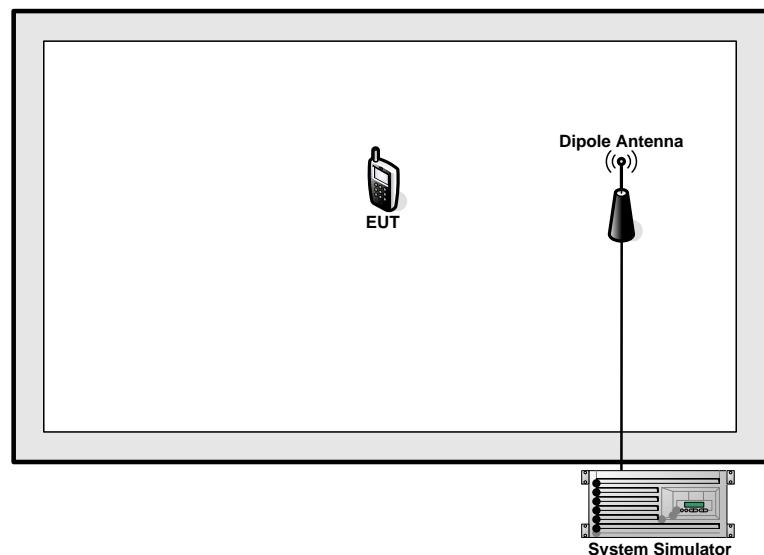

<24E Tx Mode>

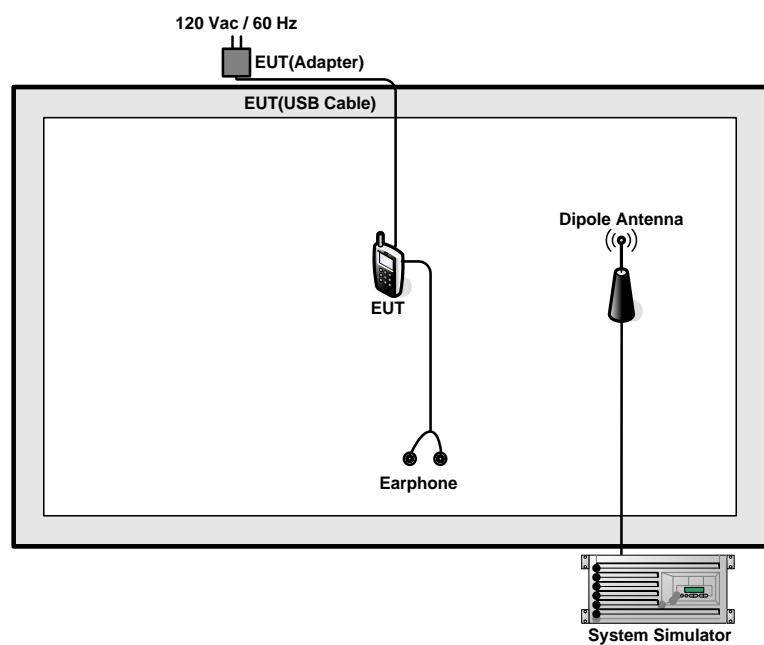



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Ipod Earphone	Apple	MC690ZP/A	FCC DoC	Shielded, 1.6 m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 7.0 dB and a 10 dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.0 + 10 = 17.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

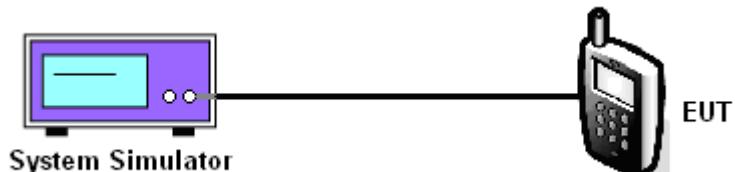



3.1.5 Test Result of Conducted Output Power

CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power (dBm)	23.69	23.65	23.72
Conducted Power(Watts)	0.23	0.23	0.24

CDMA2000 BC1			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Conducted Power (dBm)	23.32	22.98	22.94
Conducted Power(Watts)	0.21	0.20	0.20

Note: and maximum average power CDMA2000.



3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

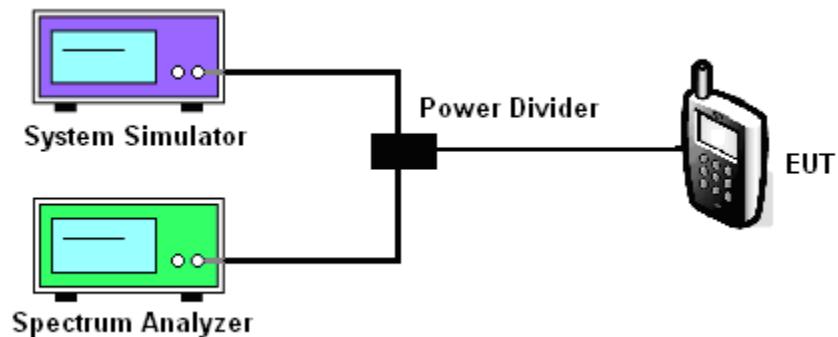




3.2.5 Test Result of Peak-to-Average Ratio

CDMA2000 BC1			
Modes	CDMA 2000 1xRTT		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Peak-to-Average Ratio (dB)	3.88	3.60	3.56

3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	CDMA2000 BC1	Test Mode :	1xRTT Link (QPSK)
--------	--------------	-------------	-------------------

Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

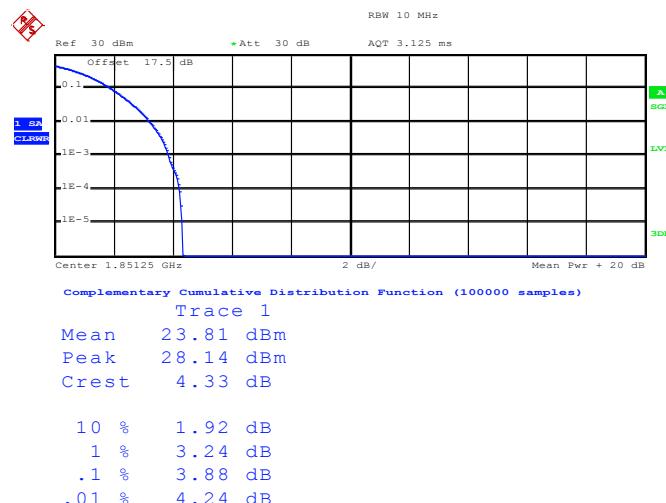

Date: 2.JUL.2014 14:31:44


Peak-to-Average Ratio on Channel 600 (1880 MHz)

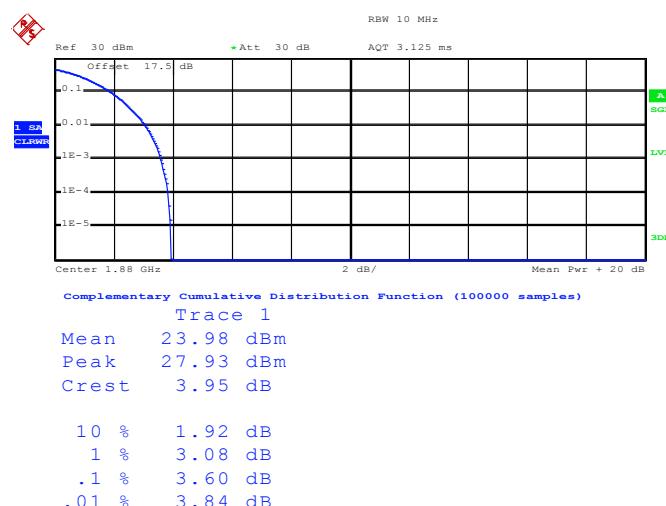

Date: 2.JUL.2014 14:31:16



Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

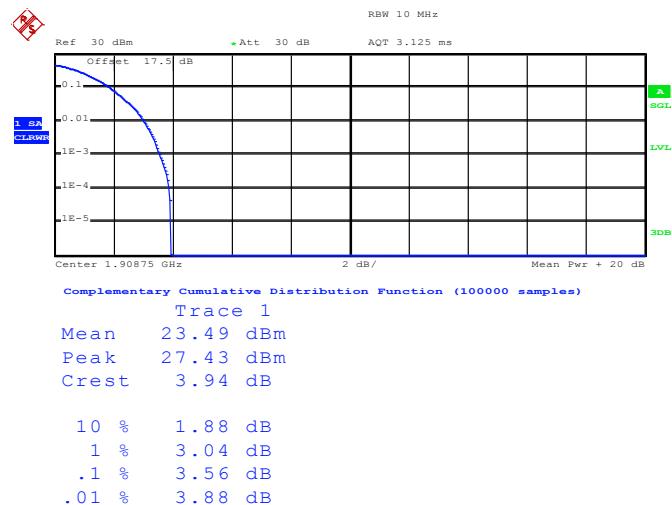

Date: 2.JUL.2014 14:30:35



3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed on a turntable 1.5 meters high in a fully anechoic chamber.
2. The EUT was placed 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10. $ERP/EIRP = Ps + Et - Es + Gs = Ps + Rt - Rs + Gs$

Ps (dBm) : Input power to substitution antenna.

Gs (dBi or dBd) : Substitution antenna Gain.

$Et = Rt + AF$


$Es = Rs + AF$

AF (dB/m) : Receive antenna factor

Rt : The highest received signal in spectrum analyzer for EUT.

Rs : The highest received signal in spectrum analyzer for substitution antenna.

3.3.4 Test Setup

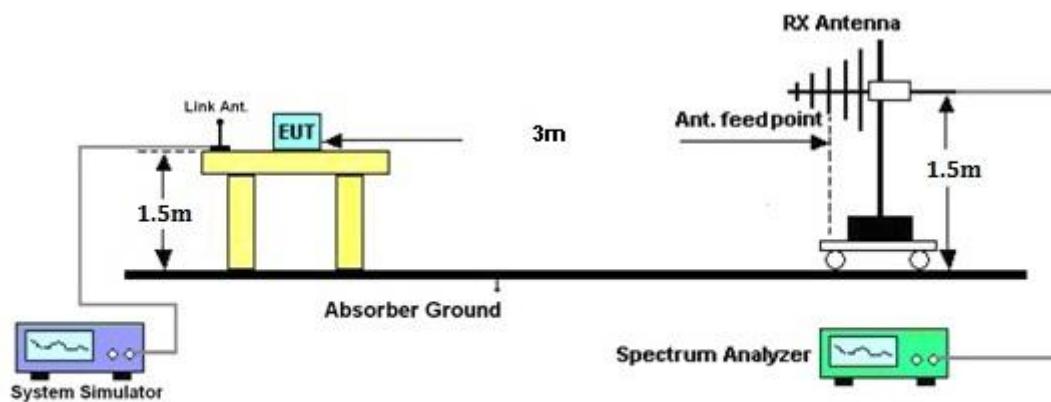



3.3.5 Test Result of ERP

CDMA2000 BC0 1xRTT_RC3+SO55 Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-27.67	-48.12	0.00	-1.08	19.37	0.0864
836.52	-27.22	-48.28	0.00	-0.93	20.13	0.1030
848.31	-27.58	-48.35	0.00	-0.76	20.01	0.1001

Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-41.48	-47.97	0.00	-1.08	5.41	0.0035
836.52	-40.28	-48.01	0.00	-0.93	6.80	0.0048
848.31	-41.10	-48.05	0.00	-0.76	6.19	0.0042



3.3.6 Test Result of EIRP

CDMA2000 BC1 1xRTT_RC3+SO55 Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-30.85	-51.88	0.00	1.96	22.99	0.1993
1880.00	-31.43	-52.99	0.00	2.00	23.56	0.2270
1908.75	-32.23	-54.28	0.00	1.98	24.03	0.2531

Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-31.24	-52.13	0.00	1.96	22.85	0.1929
1880.00	-31.69	-53.17	0.00	2.00	23.48	0.2230
1908.75	-32.15	-54.13	0.00	1.98	23.96	0.2489

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

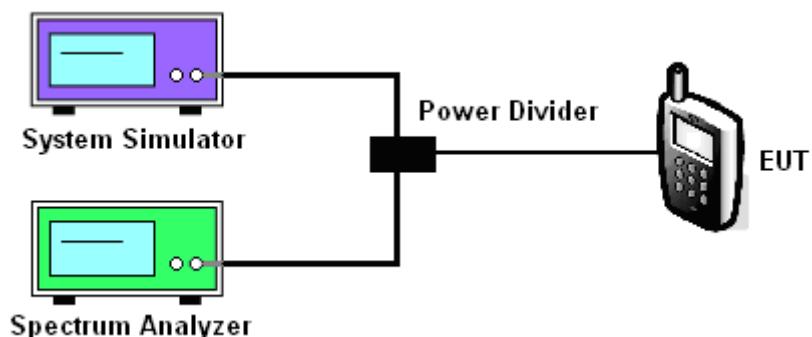



3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth


CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
99% OBW (MHz)	1.280	1.272	1.276
26dB BW (MHz)	1.428	1.428	1.436

CDMA2000 BC1			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
99% OBW (MHz)	1.280	1.276	1.276
26dB BW (MHz)	1.424	1.428	1.432

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO55 (QPSK)
--------	--------------	-------------	-----------------------

99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

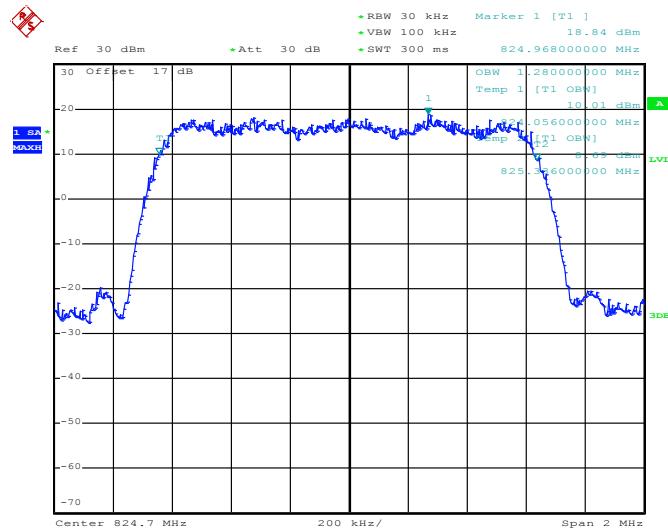


Date: 1.JUL.2014 16:11:56

26dB Bandwidth Plot on Channel 1013 (824.7 MHz)

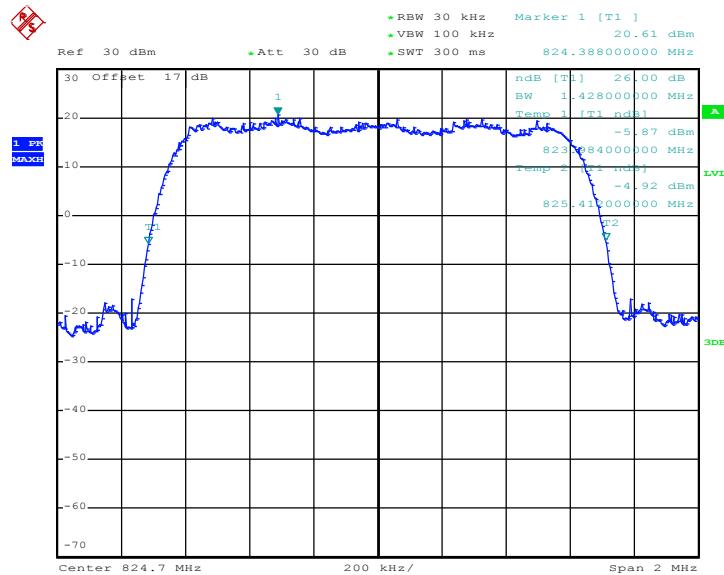


Date: 1.JUL.2014 16:00:56

99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)

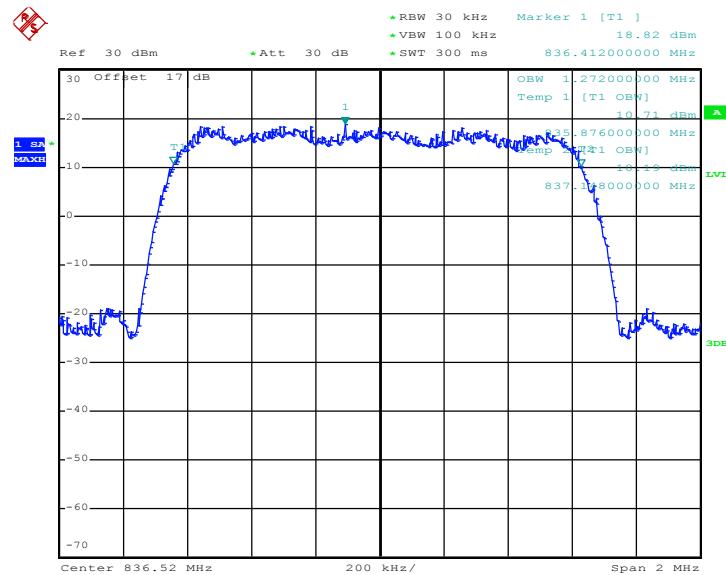


Date: 1.JUL.2014 16:09:32

26dB Bandwidth Plot on Channel 384 (836.52 MHz)

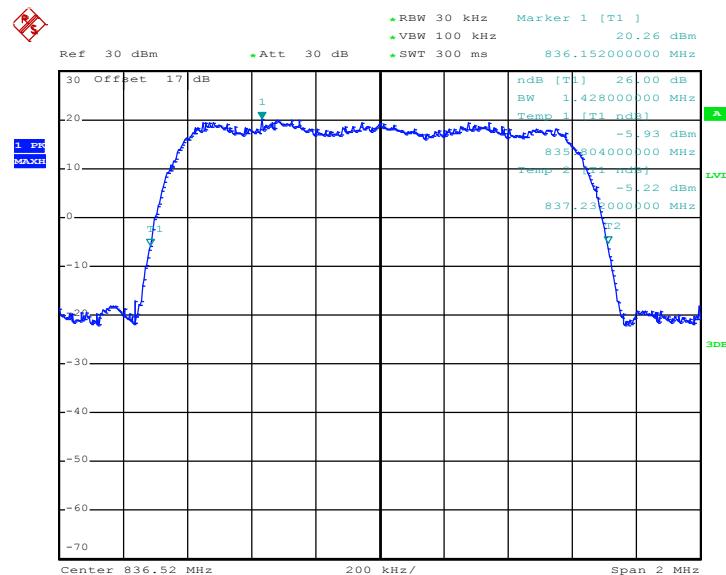


Date: 1.JUL.2014 16:02:53

99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)

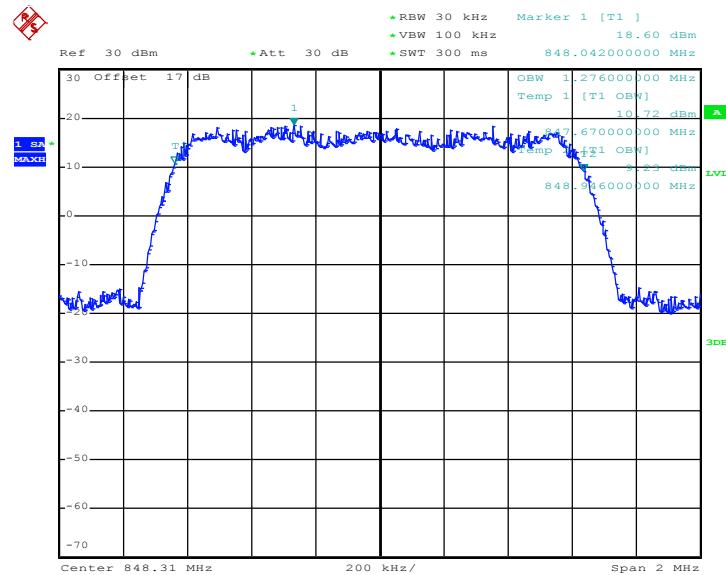

Date: 1.JUL.2014 16:06:35

26dB Bandwidth Plot on Channel 777 (848.31 MHz)

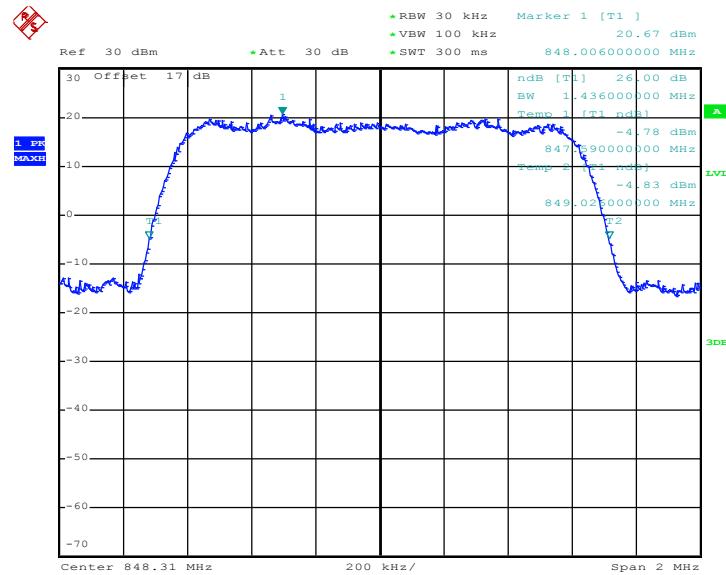


Date: 1.JUL.2014 16:04:52




Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC3+SO55 (QPSK)
--------	--------------	-------------	-----------------------

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

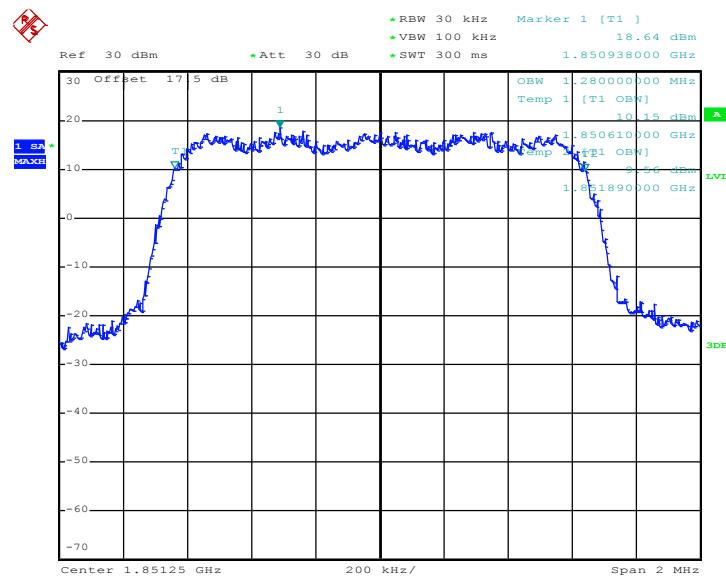


Date: 2.JUL.2014 14:24:21

26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

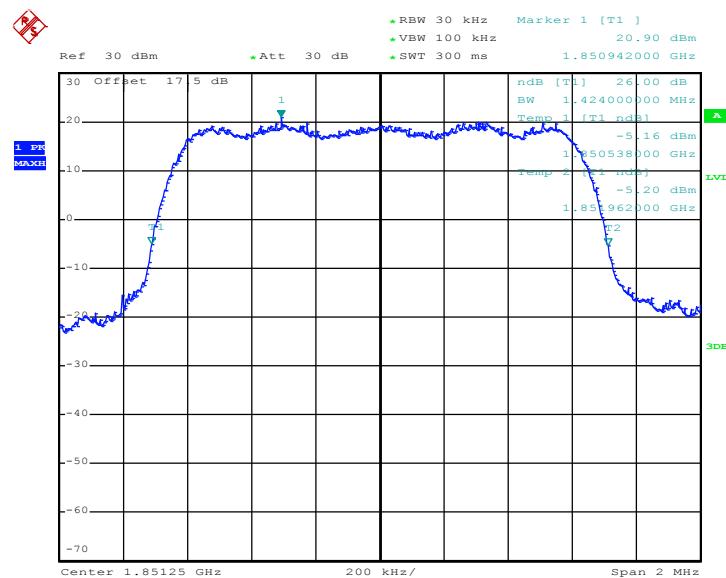


Date: 2.JUL.2014 14:15:34

99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

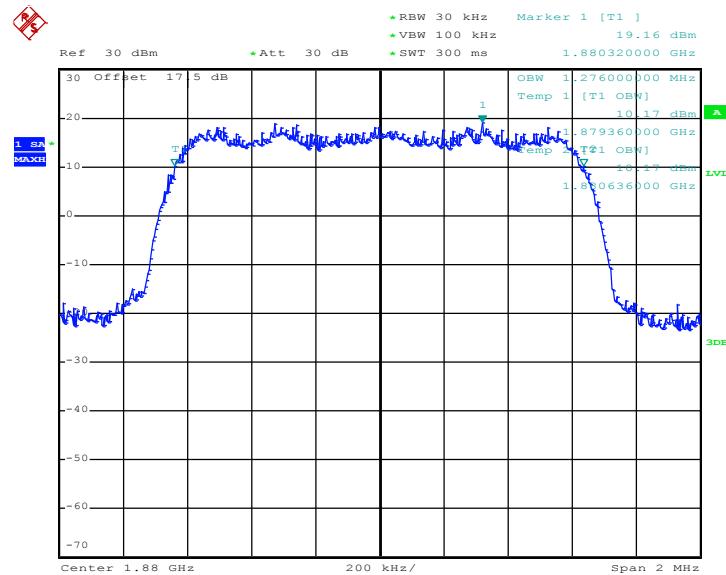


Date: 2.JUL.2014 14:22:56

26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

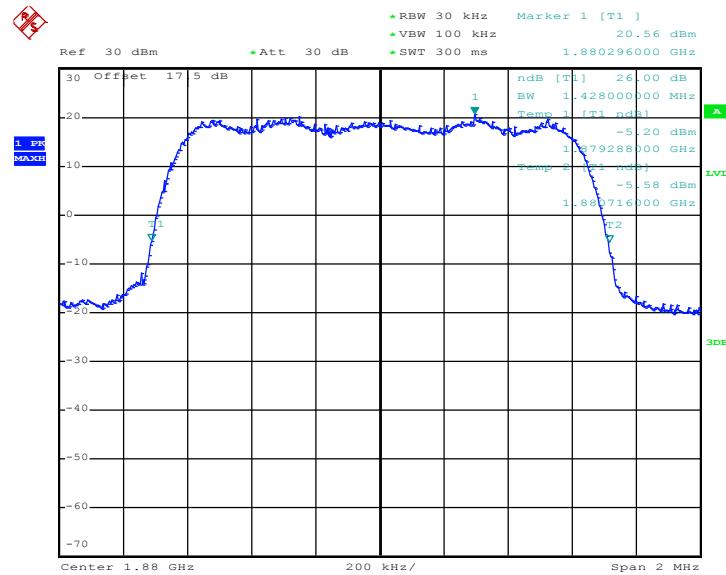


Date: 2.JUL.2014 14:17:18

99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)

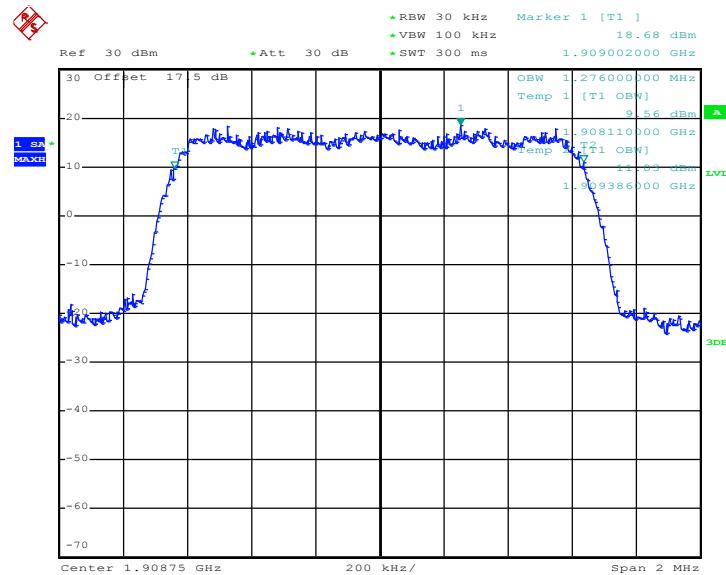

Date: 2.JUL.2014 14:21:32

26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)

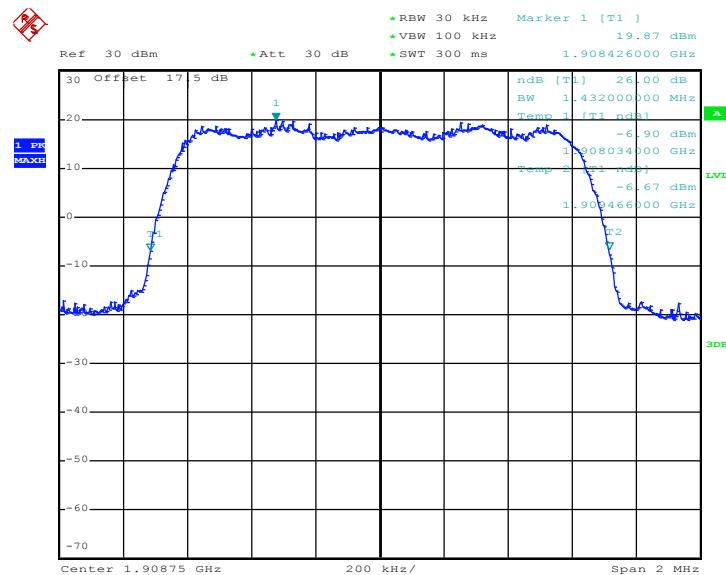

Date: 2.JUL.2014 14:18:57



3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RBW was replaced by 10 kHz, slightly smaller than the value in (2), due to the spectrum analyzer limitation to set the exact value. A worst case correction factor of $10^* \log (1\% \text{ emission-BW}/\text{measurement RBW})$ was compensated.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}.$

3.5.4 Test Setup

<Conducted Band Edge >

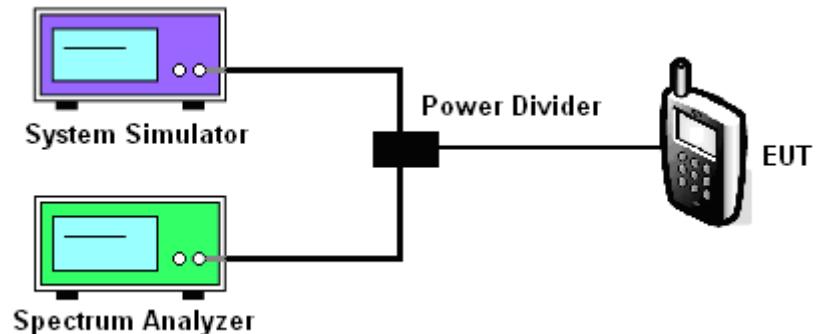




3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO55 (QPSK)
Correction Factor :	1.57dB	Maximum 26dB Bandwidth :	1.436MHz
Band Edge :	-16.46dBm	Measurement Value :	-18.03dBm


Lower Band Edge Plot on Channel 1013 (824.7 MHz)

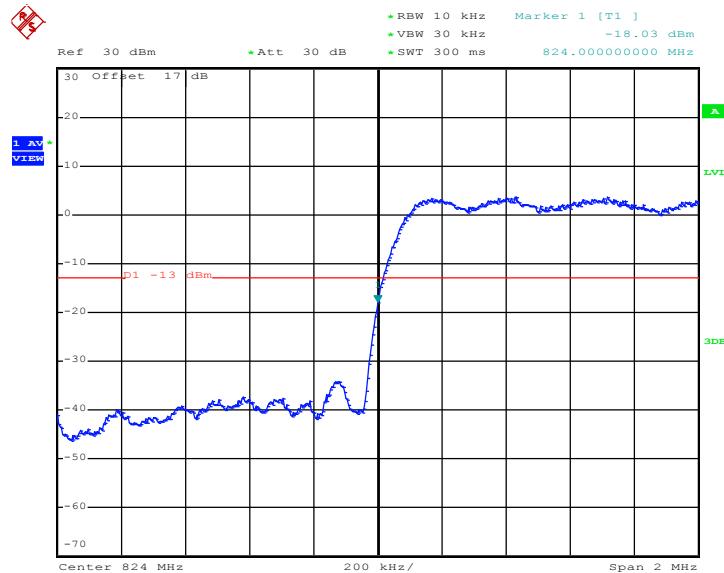

Date: 1.JUL.2014 16:18:57

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW}/\text{RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO55(QPSK)
Correction Factor :	1.57dB	Maximum 26dB Bandwidth :	1.436MHz
Band Edge :	-13.75dBm	Measurement Value :	-15.32dBm

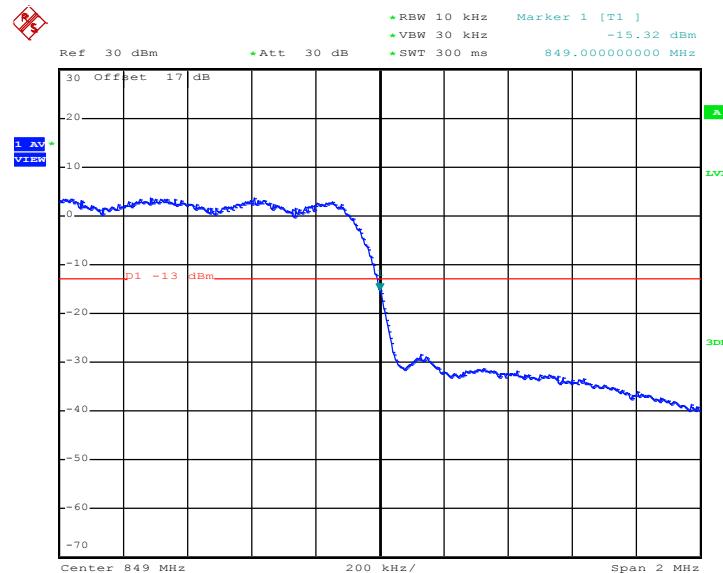
Higher Band Edge Plot on Channel 777 (848.31 MHz)

Date: 1.JUL.2014 16:18:11

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW}/\text{RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)




Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC3+SO55 (QPSK)
Correction Factor :	1.56dB	Maximum 26dB Bandwidth :	1.432MHz
Band Edge :	-37.45dBm	Measurement Value :	-39.01dBm

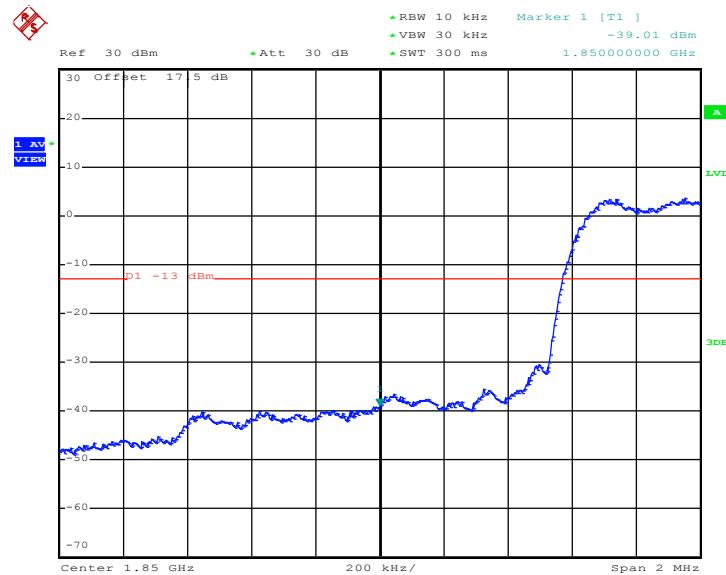Lower Band Edge Plot on Channel 25 (1851.25 MHz)

Date: 2.JUL.2014 14:27:39

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW}/\text{RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC3+SO55 (QPSK)
Correction Factor :	1.56dB	Maximum 26dB Bandwidth :	1.432MHz
Band Edge :	-35.03dBm	Measurement Value :	-36.59dBm

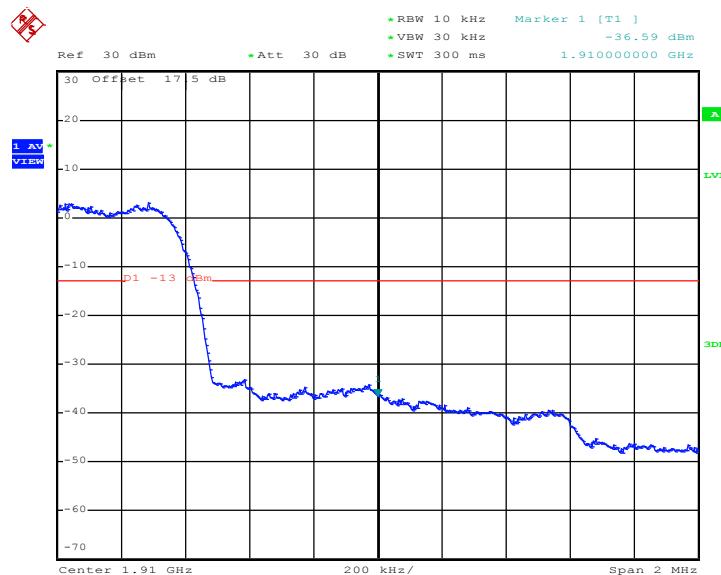Higher Band Edge Plot on Channel 1175 (1908.75 MHz)

Date: 2.JUL.2014 14:28:52

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW}/\text{RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.


3.6.4 Test Setup

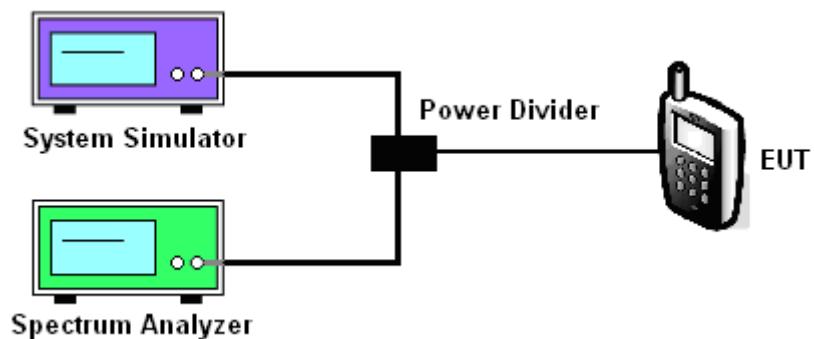

3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	CDMA2000 BC0	Channel :	CH384
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	836.52 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

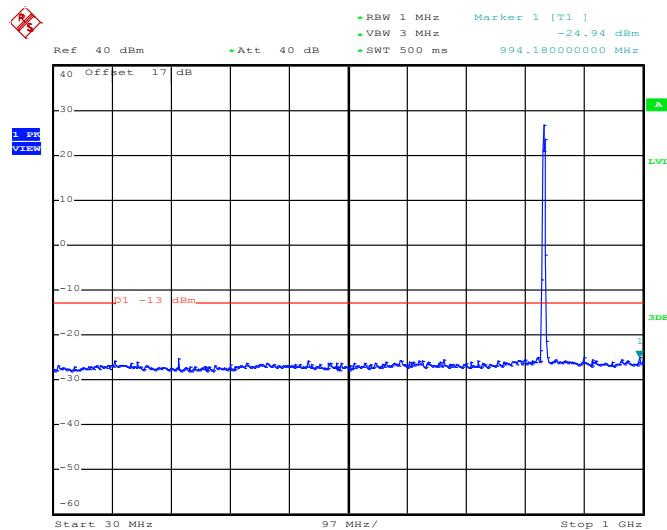

Date: 1.JUL.2014 17:12:41


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

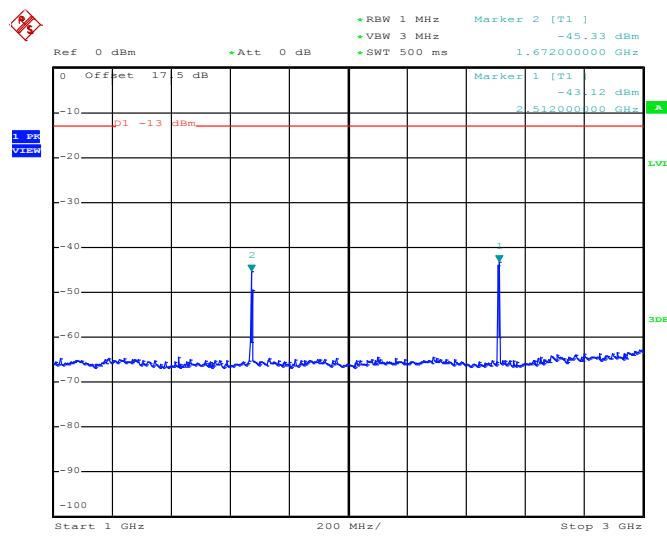

Date: 1.JUL.2014 17:46:37




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

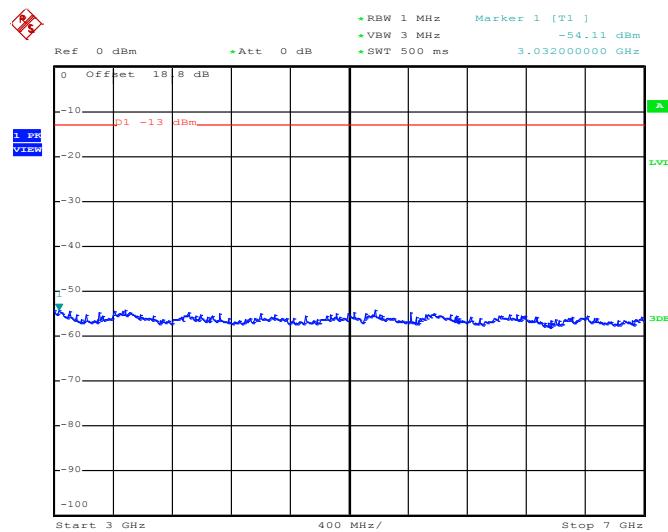


Date: 1.JUL.2014 17:47:40

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

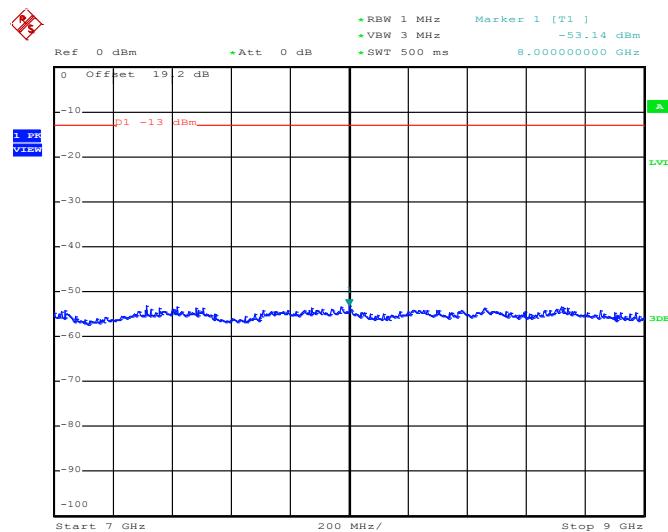


Date: 1.JUL.2014 17:48:41

Band :	CDMA2000 BC1	Channel :	CH600
Test Mode :	1xRTT_RC3+SO55 (QPSK)	Frequency :	1880.0 MHz

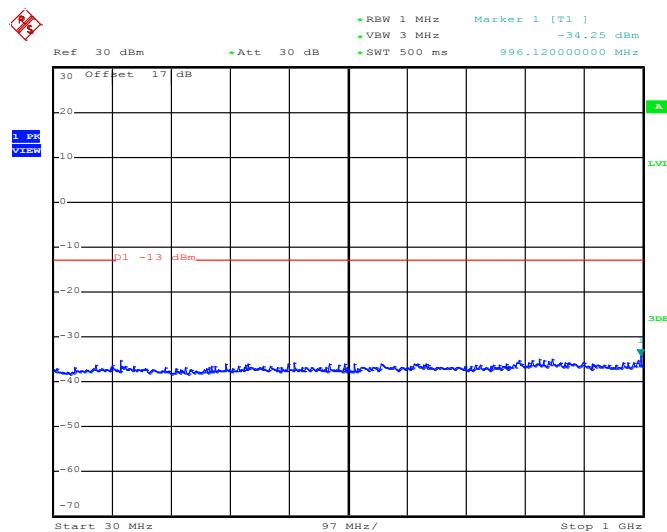
Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 1.JUL.2014 18:13:26

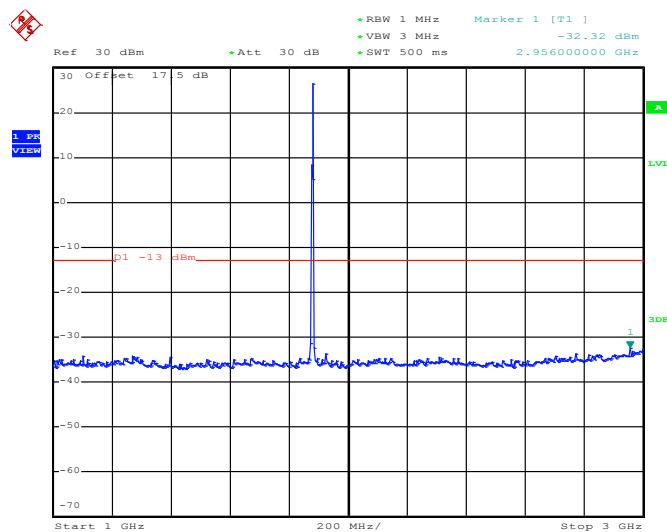Conducted Spurious Emission Plot between 1GHz ~ 3GHz


Date: 1.JUL.2014 18:14:34

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

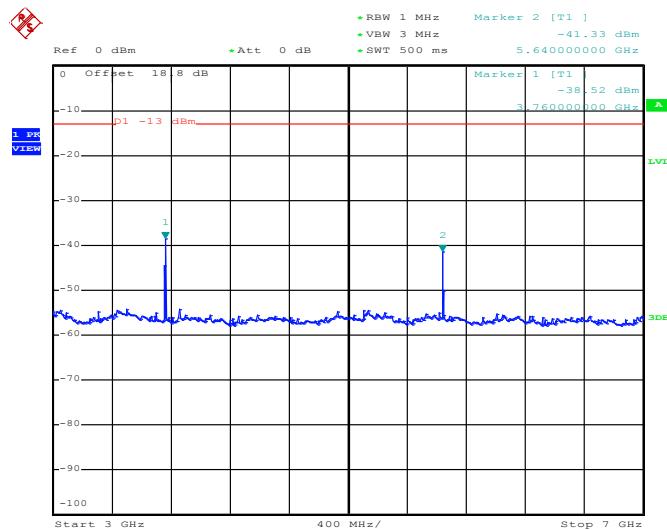

Date: 1.JUL.2014 18:07:06


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

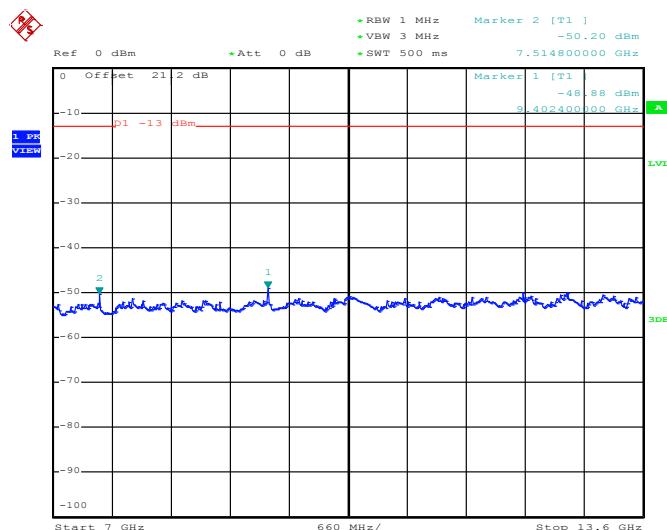

Date: 1.JUL.2014 18:09:03



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

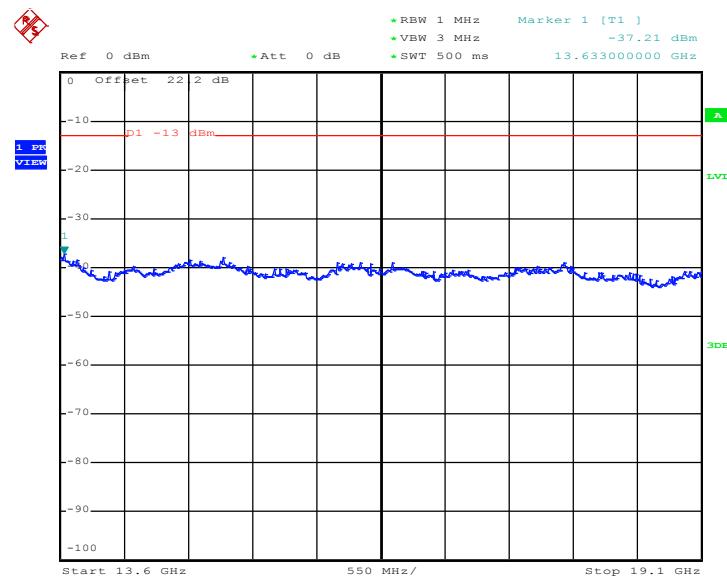

Date: 1.JUL.2014 18:10:31



3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13 \text{ dBm.} \end{aligned}$$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

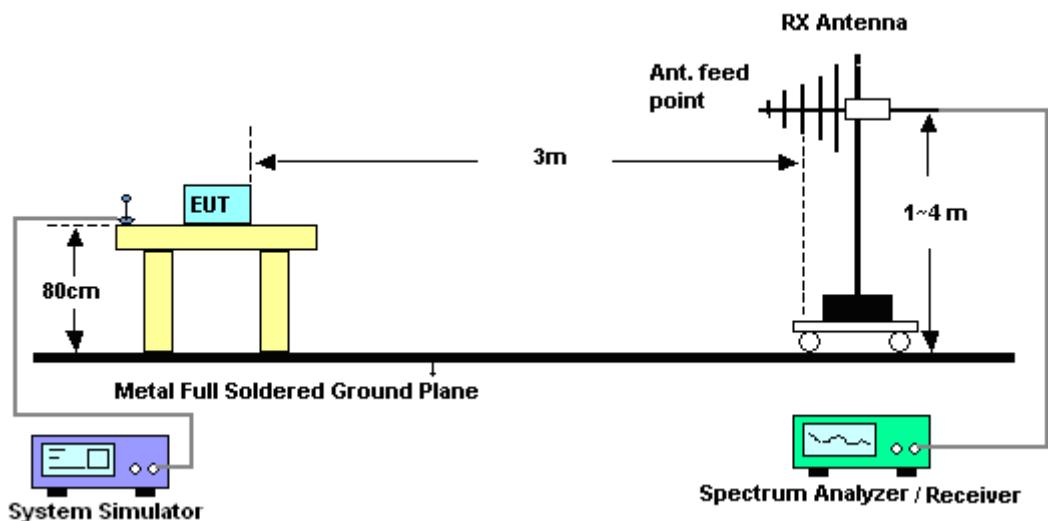

For radiated emissions above 1GHz

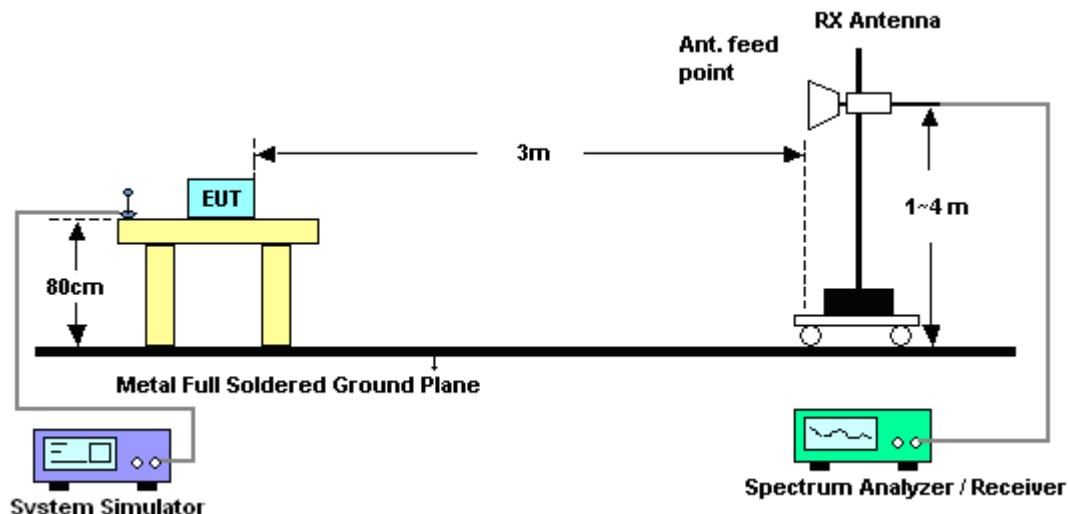



3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	CDMA2000 BC0 for CH1013				Temperature :	24~25°C		
Test Mode :	1xRTT_RC3+SO55 (QPSK)				Relative Humidity :	48~49%		
Test Engineer :	Leo Liang				Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1649.4	-45.01	-13	-32.01	-60.45	-48.26	0.92	6.32	H Pass
2474.1	-45.87	-13	-32.87	-68.71	-48.42	1.2	5.90	H Pass
3298.8	-60.31	-13	-47.31	-71.51	-64.76	1.2	7.80	H Pass

Band :	CDMA2000 BC0 for CH1013				Temperature :	24~25°C		
Test Mode :	1xRTT_RC3+SO55 (QPSK)				Relative Humidity :	48~49%		
Test Engineer :	Leo Liang				Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1649.4	-55.20	-13	-42.20	-65.33	-58.45	0.92	6.32	V Pass
2474.1	-44.98	-13	-31.98	-66.36	-47.53	1.20	5.90	V Pass
3298.8	-58.86	-13	-45.86	-71.29	-63.31	1.20	7.80	V Pass



Band :	CDMA2000 BC0 for CH384					Temperature :	24~25°C	
Test Mode :	1xRTT_RC3+SO55 (QPSK)					Relative Humidity :	48~49%	
Test Engineer :	Leo Liang					Polarization :	Horizontal	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1673.04	-50.42	-13	-37.42	-65.03	-53.39	0.88	6.00	H Pass
2509.56	-48.96	-13	-35.96	-70.41	-51.57	1.08	5.84	H Pass
3346.08	-62.23	-13	-49.23	-72.83	-66.60	1.14	7.66	H Pass

Band :	CDMA2000 BC0 for CH384					Temperature :	24~25°C	
Test Mode :	1xRTT_RC3+SO55 (QPSK)					Relative Humidity :	48~49%	
Test Engineer :	Leo Liang					Polarization :	Vertical	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1673.04	-56.20	-13	-43.20	-66.83	-59.17	0.88	6.00	V Pass
2509.56	-48.47	-13	-35.47	-68.87	-51.08	1.08	5.84	V Pass
3346.08	-60.43	-13	-47.43	-72.26	-64.80	1.14	7.66	V Pass



Band :	CDMA2000 BC0 for CH777					Temperature :	24~25°C	
Test Mode :	1xRTT_RC3+SO55 (QPSK)					Relative Humidity :	48~49%	
Test Engineer :	Leo Liang					Polarization :	Horizontal	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1696.62	-48.31	-13	-35.31	-63.94	-51.46	0.9	6.20	H Pass
2544.93	-45.40	-13	-32.40	-67.86	-48.00	1.15	5.90	H Pass
3393.24	-61.73	-13	-48.73	-71.53	-66.07	1.22	7.71	H Pass

Band :	CDMA2000 BC0 for CH777					Temperature :	24~25°C	
Test Mode :	1xRTT_RC3+SO55 (QPSK)					Relative Humidity :	48~49%	
Test Engineer :	Leo Liang					Polarization :	Vertical	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
1696.62	-50.20	-13	-37.20	-63.17	-53.35	0.90	6.20	V Pass
2544.93	-42.80	-13	-29.80	-63.90	-45.40	1.15	5.90	V Pass
3393.24	-61.20	-13	-48.20	-72.23	-65.54	1.22	7.71	V Pass



Band :	CDMA2000 BC1 for CH25				Temperature :	24~25°C			
Test Mode :	1xRTT_RC3+SO55 (QPSK)				Relative Humidity :	48~49%			
Test Engineer :	Leo Liang				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3702.5	-43.26	-13	-30.26	-59.44	-50.21	1.4	8.35	H	Pass
5553.75	-52.29	-13	-39.29	-70.02	-60.79	1.7	10.20	H	Pass
7405	-48.55	-13	-35.55	-70.29	-58.89	1.8	12.14	H	Pass
9256.25	-48.54	-13	-35.54	-71.23	-59.40	2.24	13.10	H	Pass

Band :	CDMA2000 BC1 for CH25				Temperature :	24~25°C			
Test Mode :	1xRTT_RC3+SO55 (QPSK)				Relative Humidity :	48~49%			
Test Engineer :	Leo Liang				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3702.5	-50.43	-13	-37.43	-65.98	-57.38	1.4	8.35	V	Pass
5553.75	-53.95	-13	-40.95	-70.77	-62.45	1.7	10.2	V	Pass
7405	-44.64	-13	-31.64	-66.69	-54.98	1.8	12.14	V	Pass
9256.25	-43.02	-13	-30.02	-67.21	-53.88	2.24	13.1	V	Pass



Band :	CDMA2000 BC1 for CH600					Temperature :	24~25°C	
Test Mode :	1xRTT_RC3+SO55 (QPSK)					Relative Humidity :	48~49%	
Test Engineer :	Leo Liang					Polarization :	Horizontal	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3760	-47.82	-13	-34.82	-62.10	-54.56	1.28	8.02	H
5640	-54.96	-13	-41.96	-72.95	-63.38	1.58	10.00	H
7520	-51.43	-13	-38.43	-73.37	-61.75	1.78	12.10	H
9400	-51.23	-13	-38.23	-73.35	-62.01	2.22	13.00	H

Band :	CDMA2000 BC1 for CH600					Temperature :	24~25°C	
Test Mode :	1xRTT_RC3+SO55 (QPSK)					Relative Humidity :	48~49%	
Test Engineer :	Leo Liang					Polarization :	Vertical	
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3760	-53.11	-13	-40.11	-68.14	-59.85	1.28	8.02	V
5640	-56.15	-13	-43.15	-73.23	-64.57	1.58	10	V
7520	-47.84	-13	-34.84	-70.09	-58.16	1.78	12.1	V
9400	-48.31	-13	-35.31	-71.93	-59.09	2.22	13	V



Band :	CDMA2000 BC1 for CH1175				Temperature :	24~25°C		
Test Mode :	1xRTT_RC3+SO55 (QPSK)				Relative Humidity :	48~49%		
Test Engineer :	Leo Liang				Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3817.5	-45.31	-13	-32.31	-60.19	-52.01	1.3	8.00	H
5726.25	-53.94	-13	-40.94	-71.93	-62.55	1.6	10.21	H
7635	-50.49	-13	-37.49	-72.43	-60.69	1.8	12.00	H
9543.75	-54.24	-13	-41.24	-76.36	-64.89	2.2	12.85	H

Band :	CDMA2000 BC1 for CH1175				Temperature :	24~25°C		
Test Mode :	1xRTT_RC3+SO55 (QPSK)				Relative Humidity :	48~49%		
Test Engineer :	Leo Liang				Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.							
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
3817.50	-50.61	-13	-37.61	-65.64	-57.31	1.3	8	V
5726.25	-53.65	-13	-40.65	-70.73	-62.26	1.6	10.21	V
7635.00	-47.89	-13	-34.89	-70.14	-58.09	1.8	12	V
9543.75	-50.01	-13	-37.01	-73.63	-60.66	2.2	12.85	V



3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^\circ\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

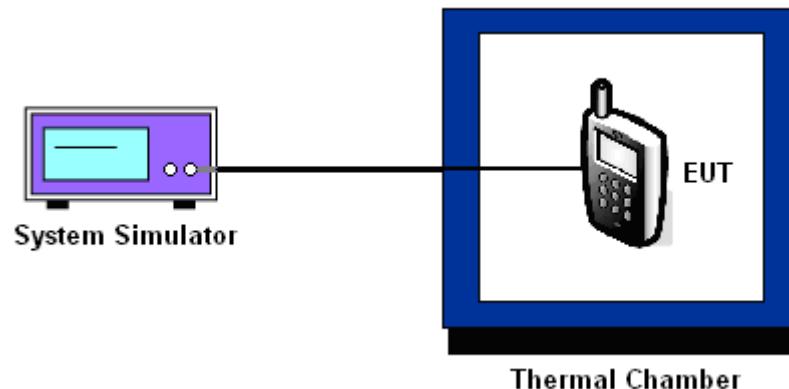



3.8.6 Test Result of Temperature Variation

Band :	CDMA2000 BC0 1xRTT_RC3+SO55	Channel :	384
Limit (ppm) :	2.5	Frequency :	836.52 MHz

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	5	+0.006	PASS
-20	4	+0.005	
-10	5	+0.006	
0	3	+0.004	
10	4	+0.005	
20(Ref.)	2	+0.002	
30	3	+0.004	
40	3	+0.004	
50	5	+0.006	

Band :	CDMA2000 BC1 1xRTT_RC3+SO55	Channel :	600
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	9	+0.005	PASS
-20	11	+0.006	
-10	10	+0.005	
0	9	+0.005	
10	7	+0.004	
20(Ref.)	9	+0.005	
30	10	+0.005	
40	12	+0.006	
50	11	+0.006	



3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
CDMA2000 BC0 CH384	1xRTT RC3+SO55	3.7	2	+0.002	2.5	Pass
		BEP	3	+0.004		
		4.2	4	+0.005		
CDMA2000 BC1 CH600	1xRTT RC3+SO55	3.7	9	+0.005	2.5	Pass
		BEP	8	+0.004		
		4.2	10	+0.005		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.6 V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 03, 2014	Jul. 01, 2014~ Jul. 03, 2014	Mar. 02, 2015	Conducted (TH01-SZ)
Power Sensor	Dare	RPR3006W	TH01SZ0001 8	0.3GHz~6GHz	Mar. 14, 2014	Jul. 01, 2014~ Jul. 03, 2014	Mar. 13, 2015	Conducted (TH01-SZ)
Power Sensor	Dare	RPR3006W	TH01SZ0001 9	0.3GHz~6GHz	Mar. 14, 2014	Jul. 01, 2014~ Jul. 03, 2014	Mar. 13, 2015	Conducted (TH01-SZ)
Thermal Chamber	Hongzhangroup	LP-150U	HD20120425	-40°C~150°C	Feb. 21, 2014	Jul. 01, 2014~ Jul. 03, 2014	Feb 20, 2015	Conducted (TH01-SZ)
ESCIO TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Feb. 21, 2014	Jun. 16, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2014	Jun. 16, 2014	May 25, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TESEQ	CBL 6112D	23188	30MHz~2GHz	Oct. 26, 2013	Jun. 16, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 26, 2013	Jun. 16, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Double Ridged Horn Antenna	COM-POWER	AH-840	101073	18GHz~40GHz	Jan. 27, 2014	Jun. 16, 2014	Jan. 26, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz	Feb. 21, 2014	Jun. 16, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 08, 2014	Jun. 16, 2014	May 07, 2015	Radiation (03CH01-SZ)
AC Source(AVR)	Chroma	61601	61601000198 5	100Vac~250Vac	Mar. 25, 2014	Jun. 16, 2014	Mar. 24, 2015	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Jun. 16, 2014	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Jun. 16, 2014	NCR	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP 7	100818	9kHz~7GHz	Sep. 03, 2013	Jul. 21, 2014	Sep. 02, 2014	ERP/EIRP (OTA01-SZ)
Quad-Ridged Horn	ETS-Lindgren	3164-08	00102954	700MHz~10000MHz	N/A	Jul. 21, 2014	N/A	ERP/EIRP (OTA01-SZ)
Multi-Devices Controller	ETS-Lindgren	2090-OPT1	00108147	N/A	N/A	Jul. 21, 2014	N/A	ERP/EIRP (OTA01-SZ)
Switch Control Mainframe	Agilent	3499A	MY42005451	N/A	N/A	Jul. 21, 2014	N/A	ERP/EIRP (OTA01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9
---	-----