



TEST REPORT

No.I19Z61038-WMD02

for

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

smartphone

Model Name: cp3648A

FCC ID: R38YLC3648A

with

Hardware Version: P1

Software Version: 9.0.002.P1.190609.cp3648A

Issued Date: 2019-07-12



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government..

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z61038-WMD02	Rev.0	1st edition	2019-07-12

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION.....	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. NORMAL ACCESSORY SETTING.....	8
3.5. GENERAL DESCRIPTION	8
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS	10
7. TEST EQUIPMENTS UTILIZED	11
ANNEX A: MEASUREMENT RESULTS.....	12
A.1 OUTPUT POWER	12
A.2 FREQUENCY STABILITY	14
A.3 OCCUPIED BANDWIDTH	16
A.4 EMISSION BANDWIDTH.....	18
A.5 CONDUCTED SPURIOUS EMISSION	20
ANNEX B: ACCREDITATION CERTIFICATE.....	27

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-80%

1.4. Project data

Testing Start Date: 2019-07-10
Testing End Date: 2019-07-12

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhang Yufeng
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan
District, Shenzhen
Contact Person: Yentl Chen
Contact Email: chenyanting@yulong.com
Telephone: +86 15927320221
Fax: NA

2.2. Manufacturer Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan
District, Shenzhen
Contact Person: Yentl Chen
Contact Email: chenyanting@yulong.com
Telephone: +86 15927320221
Fax: NA



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	smartphone
Model	cp3648A
FCC ID	R38YLCP3648A
Frequency	CDMA2ND800MHz(BC10)
Antenna	Embedded
Extreme vol. Limits	3.7VDC to 4.4VDC (nominal: 3.85VDC)
Extreme temp. Tolerance	-15°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT01a	990013500007179	P1	9.0.002.P1.190609.cp3 648A	2019-06-10

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Battery

AE1

Model	Li-ion Polymer
Manufacturer	Tianjin Lishen
Capacitance	2450mAh
Nominal Voltage	3.85V

AE2

Model	Li-ion Polymer
Manufacturer	Zhuhai Coslight
Capacitance	2450mAh
Nominal Voltage	3.85V

*AE ID: is used to identify the test sample in the lab internally.



3.4. Normal Accessory setting

Fully charged battery was used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of smartphone with embedded antenna. It consists of Hand Telephone Set and normal options: lithium battery, charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-18 Edition
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01



5. LABORATORY ENVIRONMENT

Shielding chamber did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %



6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	90.635	Pass
2	Frequency Stability	2.1055/90.213	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	90.1215	Pass
5	Conducted Spurious Emission	90.691	Pass



7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALIBRATION INTERVAL	CAL DUE DATE
1	Spectrum Analyzer	FSV30	101576	R&S	1 Year	2020-05-03
2	Wireless Communications Test Set	8960(E5515C)	MY483609 50	Agilent	2 Years	2020-08-29
3	Climatic chamber	SH-641	92009050	ESPEC	2 Years	2019-12-21

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Agilent Wireless Communications Test Set (8960(E5515C)) to ensure max power transmission and proper modulation.

This result is peak output power conducted measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSV30 (average).

These measurements were done at 2 frequencies of CDMA BC10 (bottom and top of operational frequency range) for 1x RTT and 1xEVDO.

The measurement method is from KDB 971168 D01 5.2.1:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.



A.1.3 Measurement results

CDMA BC10

Measurement result

Channel	Frequency(MHz)	Channel power(dBm)		
		1xRTT	1xEVDO	
			Rel0	RevA
476	817.9	24.35	24.25	24.23
684	823.1	24.37	24.27	24.31

A.2 FREQUENCY STABILITY

A.2.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of Agilent 8960(E5515C) Wireless Communications Test Set.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on mid channel of CDMA BC10, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C decrements from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.2.2 Measurement Limit

A.2.2.1 For Hand carried battery powered equipment

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.7VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.2.2.2 For equipment powered by primary supply voltage

For Part 90.213, the frequency stability of the transmitter shall be maintained within ± 2.5 ppm of the center frequency. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.2.3 Measurement results**CDMA BC 10****Frequency Error vs Voltage**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.7	3.99	0.0048
3.85	3.44	0.0042
4.4	3.35	0.0041

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	3.35	0.0041
0	3.81	0.0046
10	5.00	0.0061
20	4.29	0.0052
30	3.21	0.0039
40	2.79	0.0034
50	2.86	0.0035

A.3 OCCUPIED BANDWIDTH

A.3.1 Occupied Bandwidth Results

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

Test Condition

RBW	VBW	Span	Sweptime	Detector	Trace Mode
20KHz	100KHz	5MHz	40ms	Peak	Max Hold


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 99% bandwidth.

CDMA BC10 (99% BW)

Channel	Occupied Bandwidth (99% BW)(MHz)
476	1.267
684	1.267


CDMA BC10

Channel 476-Occupied Bandwidth (99% BW)

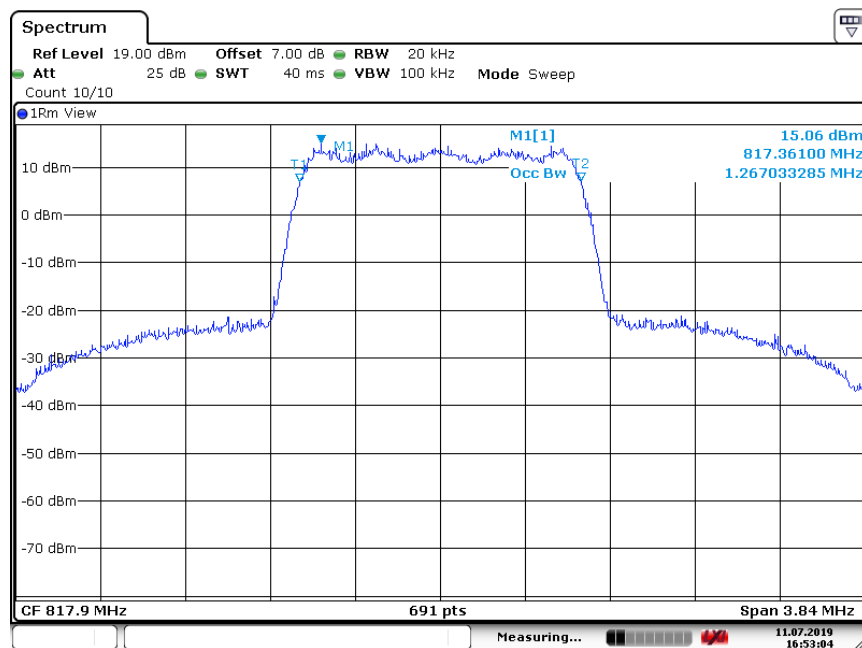

Date: 11. JUL. 2019 16:53:04

Channel 684-Occupied Bandwidth (99% BW)

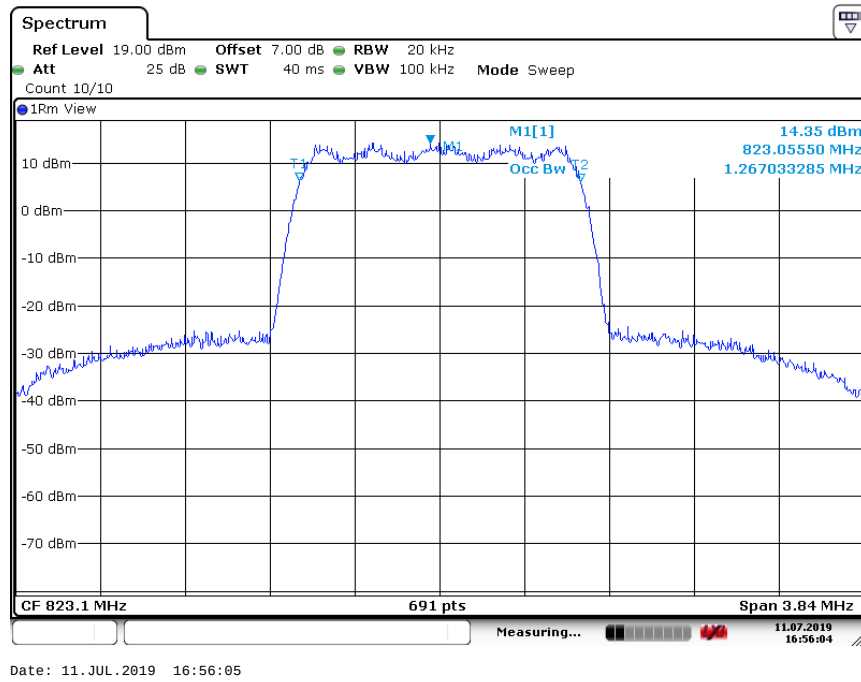

A.4 EMISSION BANDWIDTH

A.4.1 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

Test Condition

RBW	VBW	Span	Sweptime	Detector	Trace Mode
20KHz	100KHz	3.84MHz	40ms	Peak	Max Hold


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 26dBc bandwidth.

CDMA BC10 (-26dBc BW)


Channel	Emission Bandwidth (-26dBc BW) (MHz)
476	1.434
684	1.434

CDMA BC10

Channel 476- Emission Bandwidth (-26dBc BW)

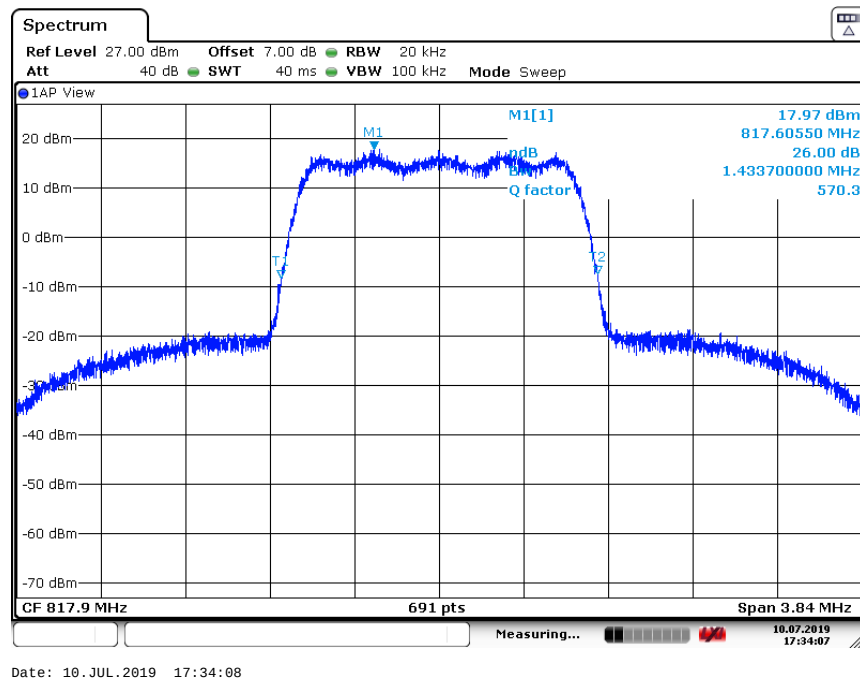

Channel 684- Emission Bandwidth (-26dBc BW)

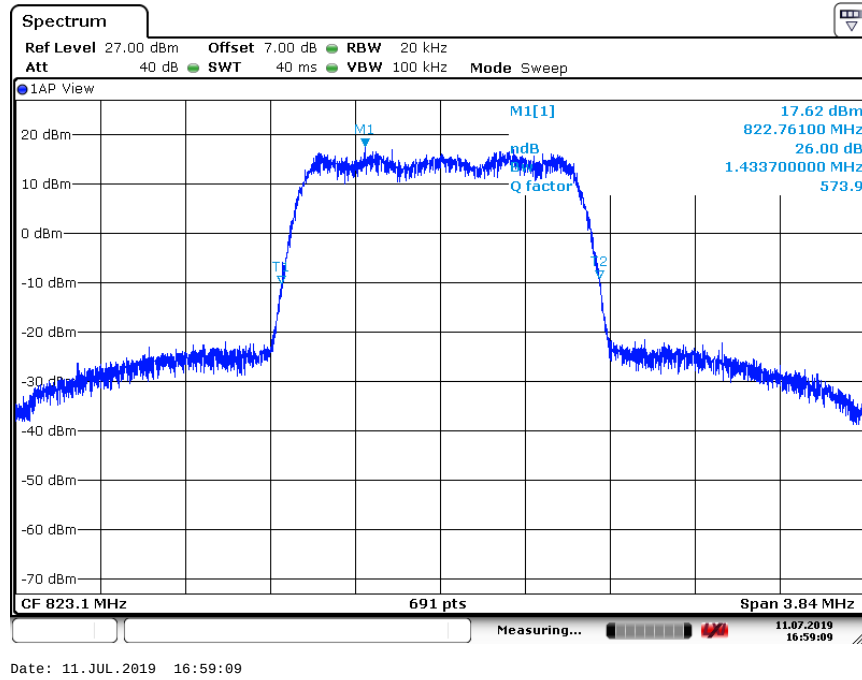



A.5 CONDUCTED SPURIOUS EMISSION

A.5.1 Measurement Method

The spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For CDMA BC10, data taken from 30 MHz to 10GHz.

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116\log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee’s frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

CDMA BC10 Transmitter

Channel	Frequency (MHz)
476	817.9
684	823.1


A.5.2 Measurement result

CDMA BC10

A. 5.2.1 Channel 476: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

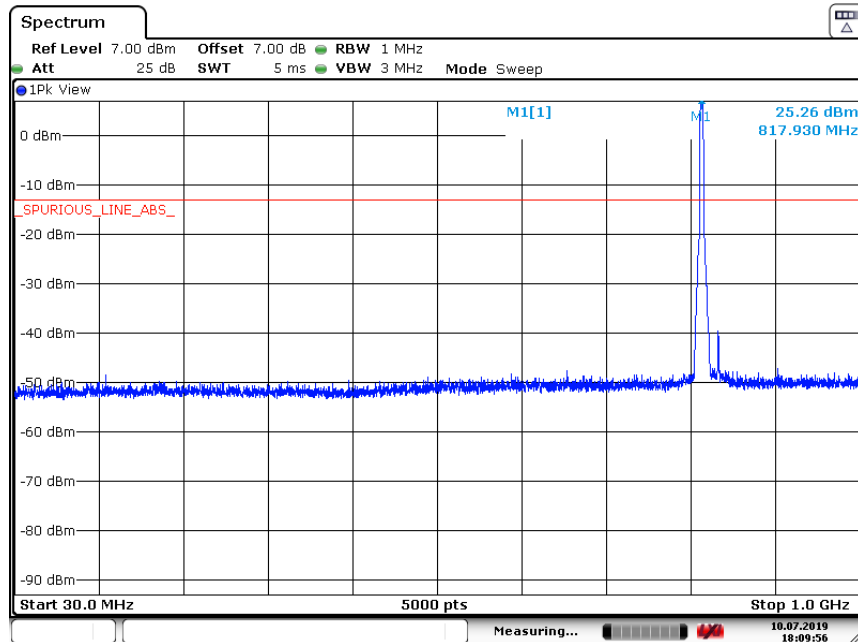

Date: 10. JUL.2019 18:09:56

A.5.2.2 Channel 476: 1GHz –2.5GHz


Spurious emission limit –13dBm.

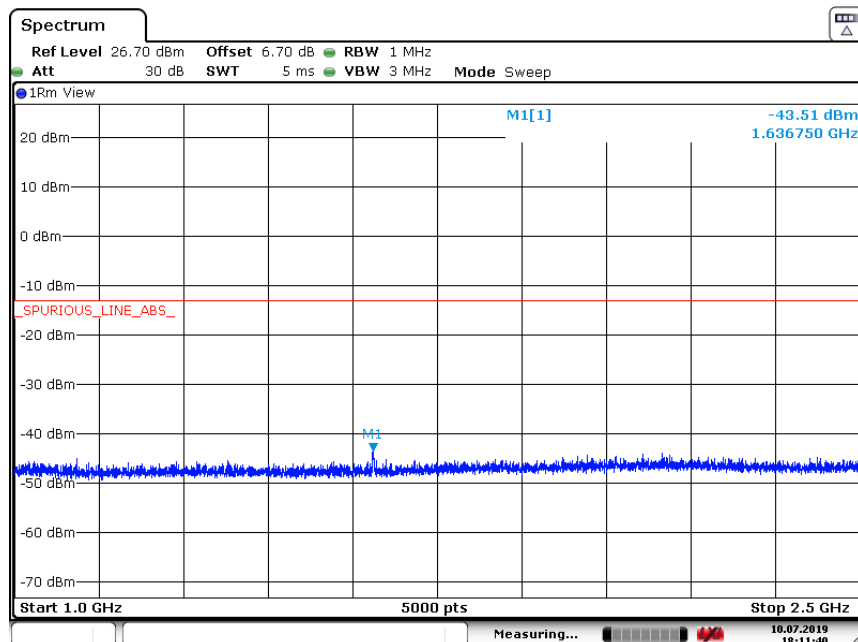

Date: 10. JUL.2019 18:11:41


A.5.2.3 Channel 476: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.

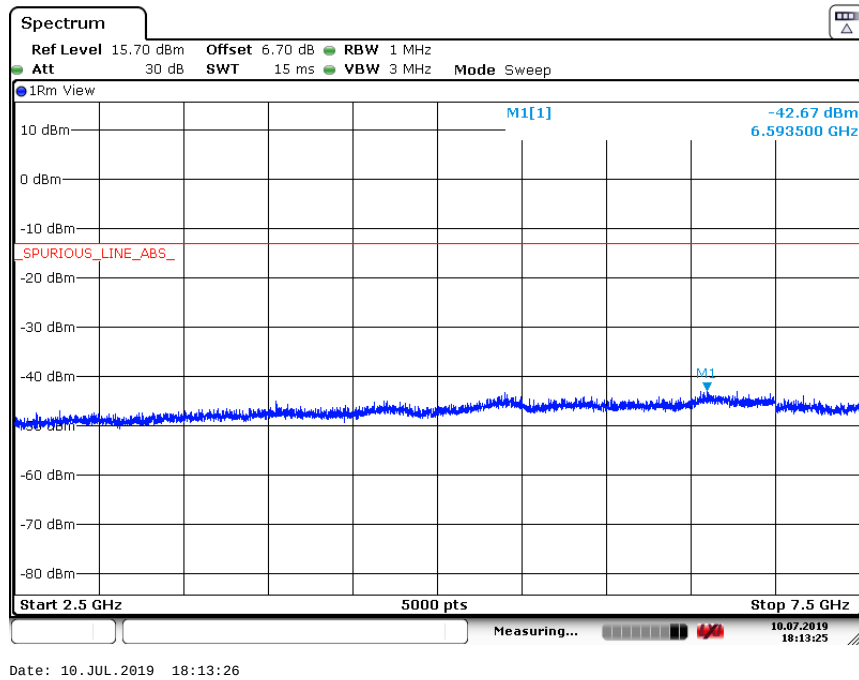


A.5.2.4 Channel 476: 7.5GHz –10GHz

Spurious emission limit –13dBm.

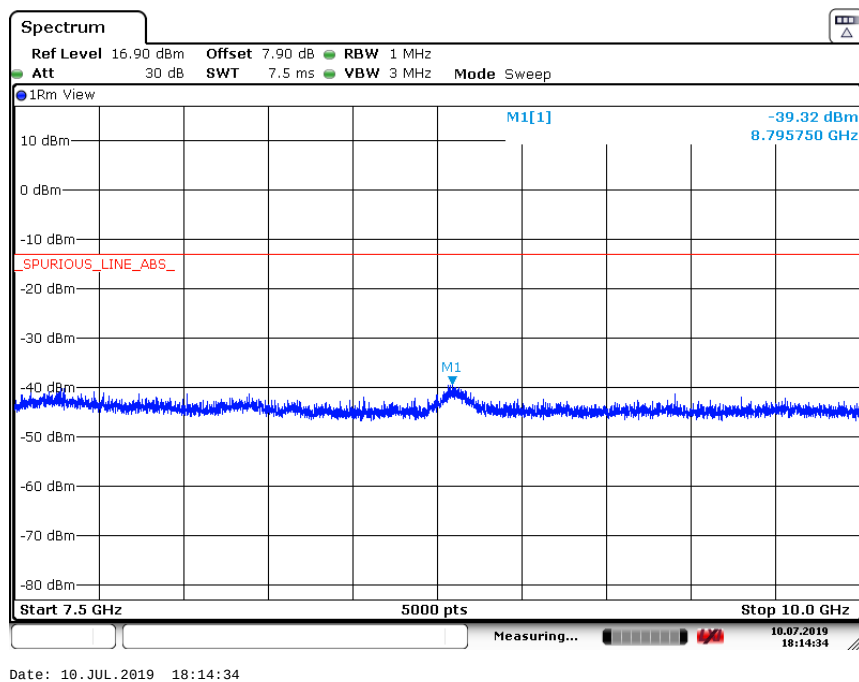


A.5.2.5 Channel 476: Band Edge

Spurious emission limit –20dBm.

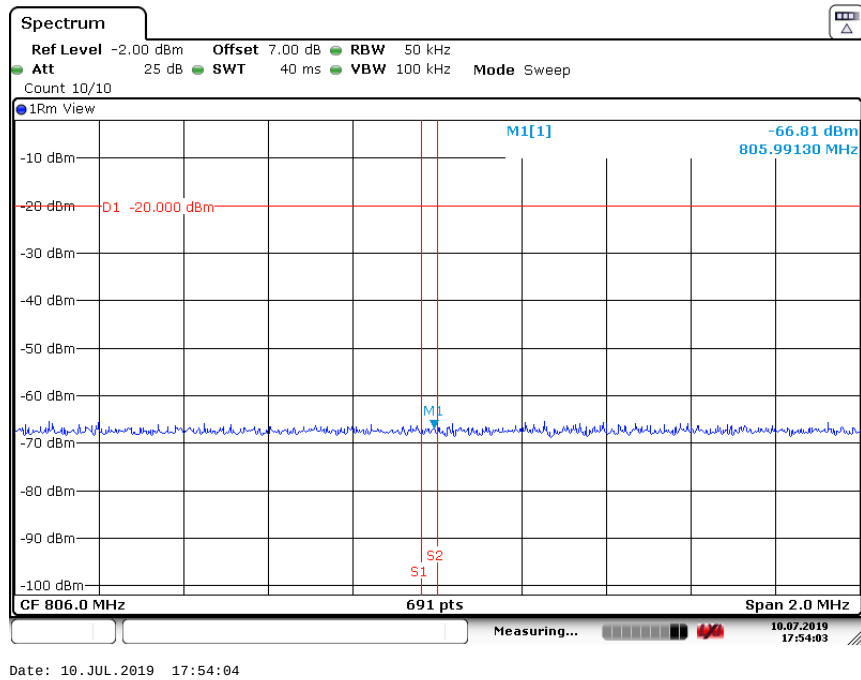

A.5.2.6 Channel 476: Outer Extended Band Edge


Spurious emission limit –13dBm.

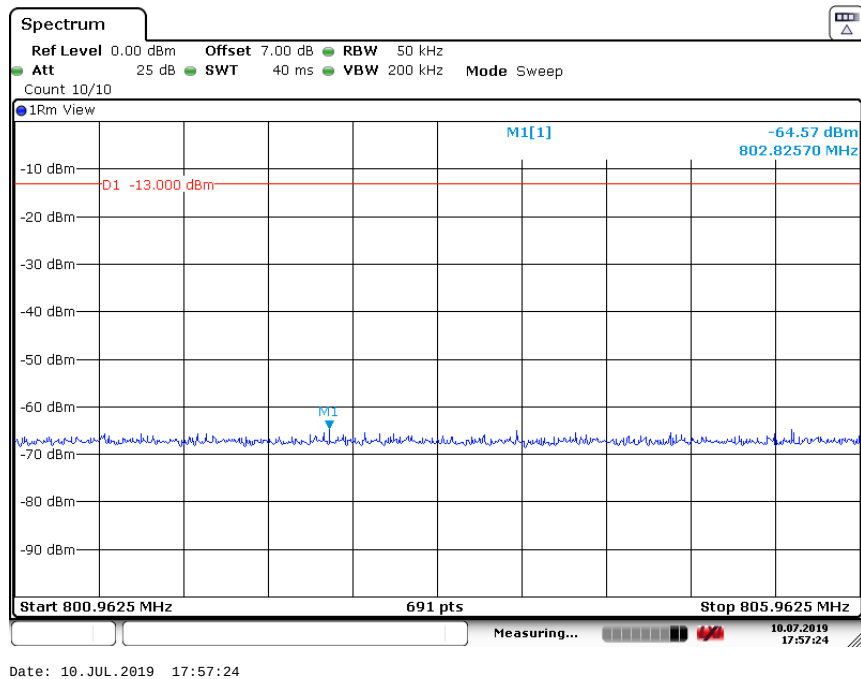

A. 5.2.7 Channel 684: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

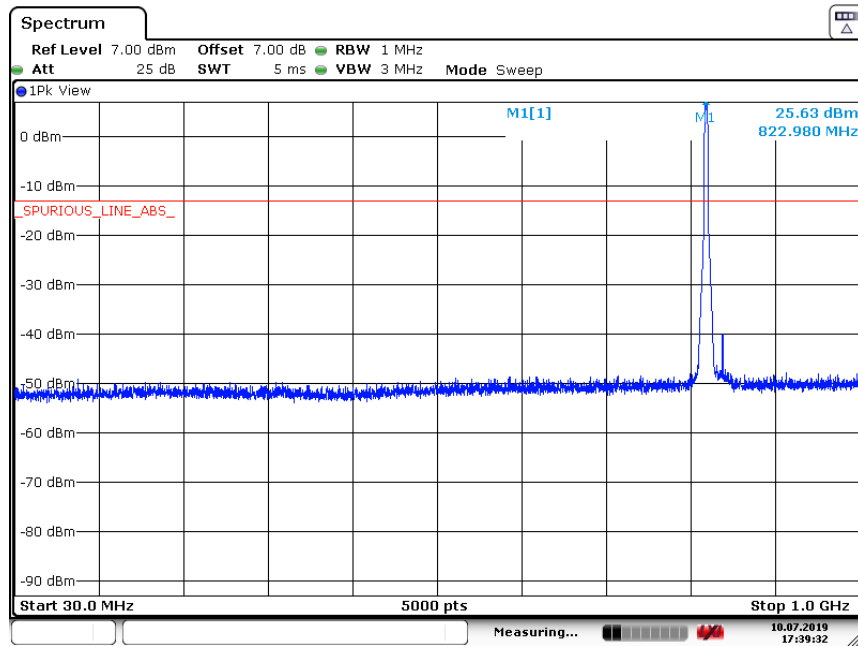

Date: 10. JUL. 2019 17:39:33

A.5.2.8 Channel 684: 1GHz –2.5GHz


Spurious emission limit –13dBm.

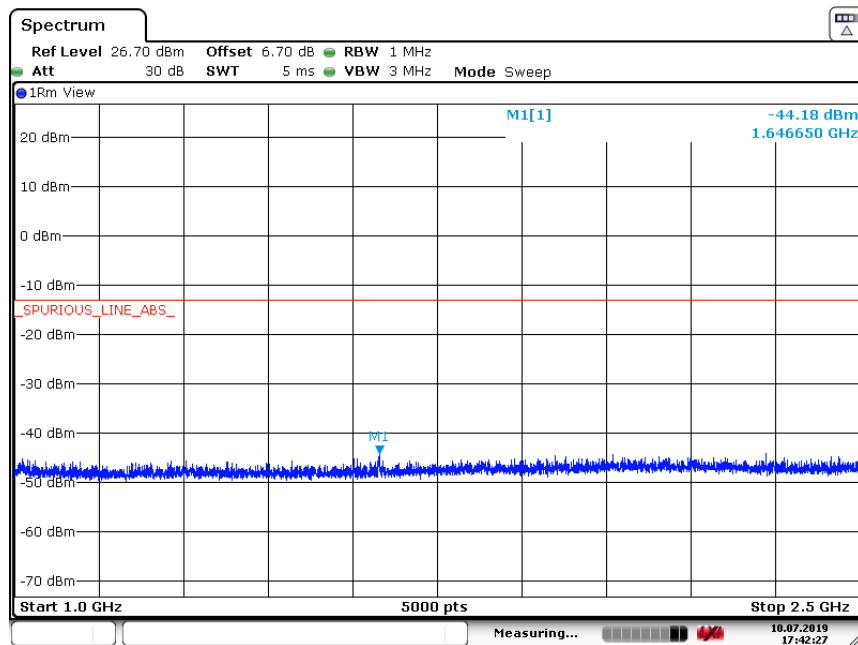

Date: 10. JUL. 2019 17:42:27


A.5.2.9 Channel 684: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.

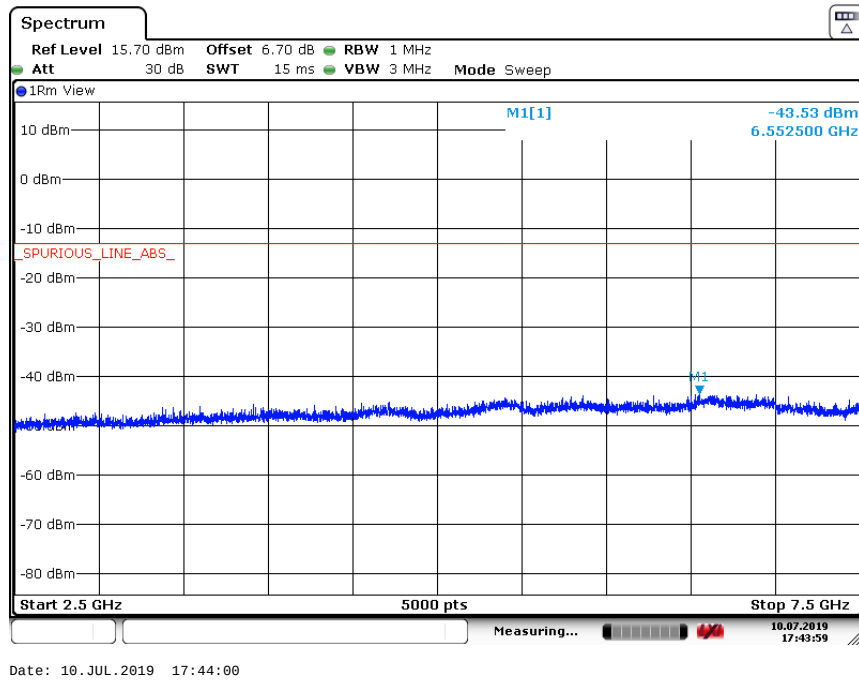


A.5.2.10 Channel 684: 7.5GHz –10GHz

Spurious emission limit –13dBm.

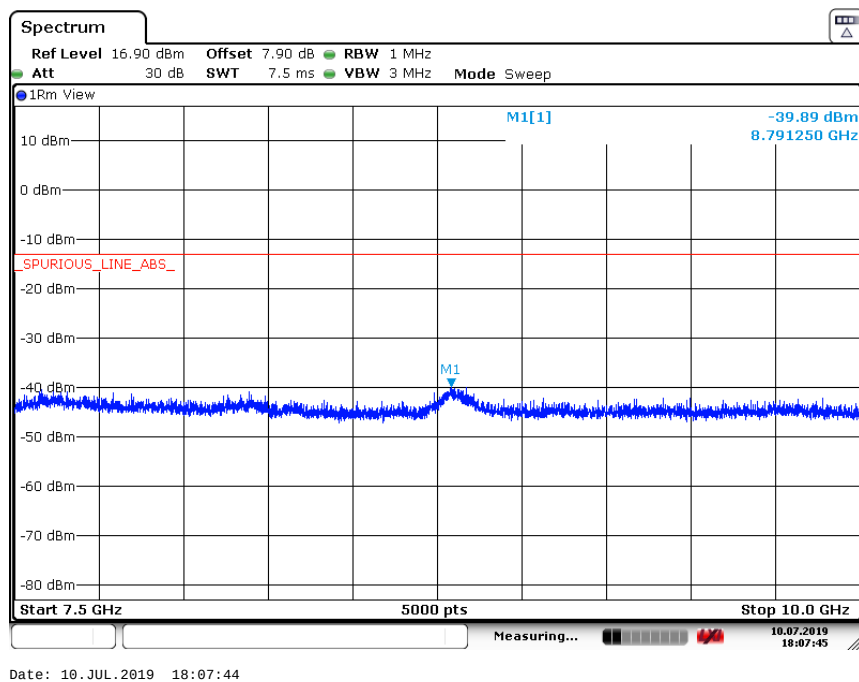


A.5.2.11 Channel 684: Band Edge

Spurious emission limit –20dBm.

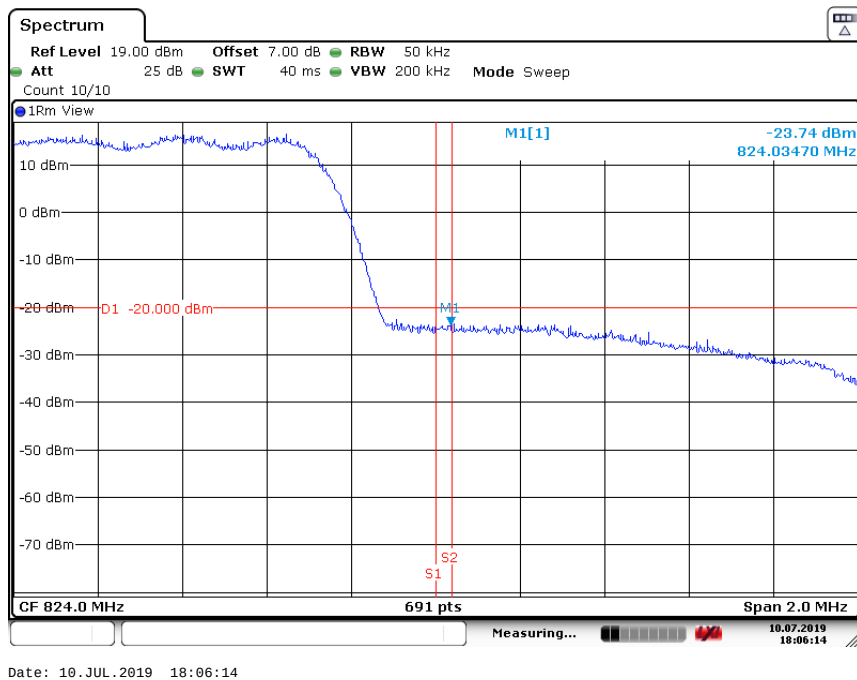


A.5.2.12 Channel 684: Outer Extended Band Edge

Spurious emission limit –13dBm.

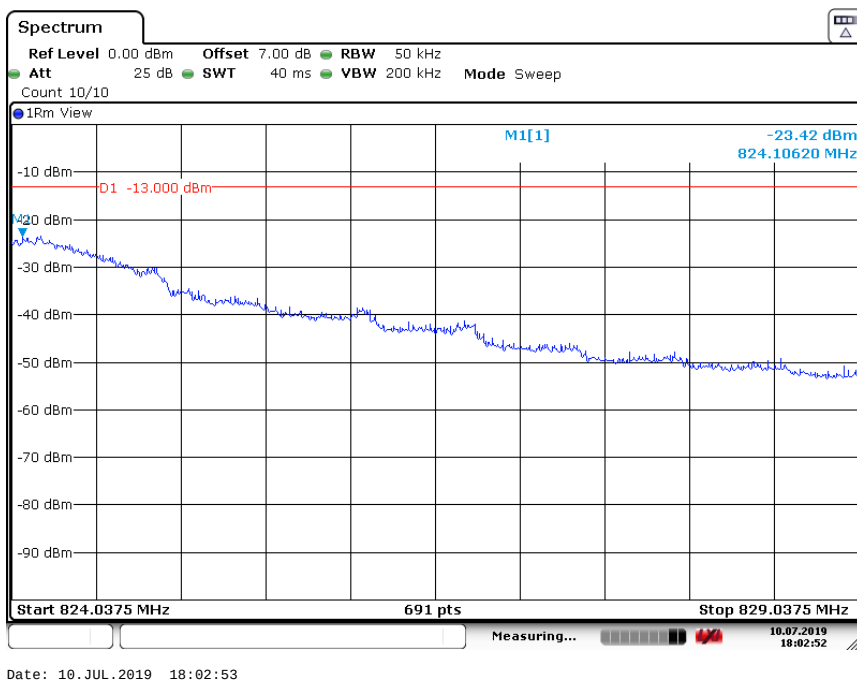

ANNEX B: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology NVLAP[®] Certificate of Accreditation to ISO/IEC 17025:2005	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2018-09-28 through 2019-09-30 <i>Effective Dates</i>	 <i>For the National Voluntary Laboratory Accreditation Program</i>

END OF REPORT