



# InterLab®

## Final Report on

### RTX3371 Telehealth Monitor

### HW: Version 3 revision A

### SW: Version 4.3 (SV 04)

**Report Reference:** MDE RTX\_0801\_FCCc  
FCC Part 15b, FCC ID: R3ZRTX3371

**Date:** May 20, 2009

#### Test Laboratory:

7 layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



DAT-P-192/99-01

#### Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Markus Becker  
Vorstand • Board:  
Dr. Hans-Jürgen Meckelburg  
René Schildknecht

Registergericht • registered in:  
Düsseldorf, HRB 44096  
UST-IdNr • VAT No:  
DE 203159652  
TAX No. 147/5869/0385

## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Carsten Steinröder  
*Date Of Test Report:* 2009/05/20  
*Date of first test:* 2009/01/29  
*Date of last test:* 2009/02/03

### 1.2 Applicant Data

*Company Name:* Tunstall Healthcare A/S

*Street:* Stroemmen 6  
*City:* 9400 Noerresundby  
*Country:* Danmark

*Contact Person:* Mr. Søren Vester

*Function:* Project Engineer  
*Phone:* +4541953906  
*Fax:* +45 7210 0164  
*E-Mail:* sve@tunstallhealthcare.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE

---

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01

### 1.4 Signature of the Testing Responsible




Carsten Steinröder  
responsible for tests performed in: Lab 1, Lab 2



7 layers AG, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

## 1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person  
responsible for Lab 1, Lab 2



7 layers AG, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: RTX3371

Type / Model / Family:	RTX3371 Telehealth Monitor HW: Version 3 revision A SW: Version 4.3 (SV 04)
Product Category:	Mobile Computer
Manufacturer:	please see applicant data
Company Name:	please see applicant data
Contact Person:	please see applicant data
Parameter List:	
Parameter name	Value
Parameter for Scope FCC_v2:	
AC Power Supply	120 (V)
Antenna gain	The maximum gain of the used Bluetooth antenna is g=5.0 (dBi)
Antenna gain 1900 band	1.0 (dBi)
Antenna gain 850 band	2.0 (dBi)
highest channel	251 (848.8MHz) for GSM850 810 (1909.8MHz) for GSM1900
lowest channel	128 (824.2MHz) for GSM850 512 (1850.2MHz) for GSM1900
mid channel	190 (836.6MHz) for GSM850 661 (1880.0MHz) for GSM1900

## 2.2 Detailed Description of OUT Samples

### Sample : e01

<i>OUT Identifier</i>	RTX3371
<i>Sample Description</i>	Sample in Normal Mode
<i>Serial No.</i>	RTX33710000033
<i>HW Status</i>	Version 2 revision A
<i>SW Status</i>	Version 4.3
<i>Date of Receipt</i>	2008/12/09

### Sample : q03

<i>OUT Identifier</i>	RTX3371
<i>Sample Description</i>	radiated sample
<i>Serial No.</i>	RTX33710000038
<i>HW Status</i>	Version 3 revision A
<i>SW Status</i>	Version 4.3
<i>Date of Receipt</i>	2008/12/09

## 2.3 OUT Features

### Features for OUT: RTX3371

Designation	Description	Allowed Values	Supported Value(s)
<b>Features for scope: FCC_v2</b>			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		

## 2.4 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
<b>E01</b>			
	Sample: e01		Sample in Normal Mode
<b>G03</b>			
	Sample: g03		radiated sample

## 3 Results

### 3.1 General

<b>Documentation of tested devices:</b>	Available at the test laboratory.
<b>Interpretation of the test results:</b>	The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.
	In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.
	In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.
<b>Note:</b>	This Test Report replaces the test report with the following reference: MDE RTX_0801_FCCb

### 3.2 List of the Applicable Body

(Body for Scope: FCC\_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15bRADIO FREQUENCY DEVICES	Part 15, Subpart B - Unintentional Radiators

### 3.3 List of Test Specification

<i>Test Specification:</i>	<b>FCC part 2 and 15</b>
<i>Date / Version</i>	2009/03/26 Version: 10-1-08 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES



---

Reference: MDE\_RTX\_0801\_FCCc  
FCC Part 15b

### 3.4 Summary

*Test Case Identifier / Name*

<i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>15b.1 Conducted Emissions (AC Power Line) §15.107</b>				
15b.1; Mode = transmit	Passed	2009/02/03	Lab 1	G03
<b>15b.2 Spurious Radiated Emissions §15.109</b>				
15b.2; Mode = transmit	Passed	2009/01/29	Lab 2	E01

### 3.5 Detailed Results

#### 3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107

##### Test: 15b.1; Mode = transmit

Result: Passed  
 Setup No.: G03  
 Date of Test: 2009/02/03 14:40  
 Body: FCC47CFRChIPART15bRADIO FREQUENCY DEVICES  
 Test Specification: FCC part 2 and 15


##### Test Equipment Environmental Conditions

Temperature: 23°C  
 Air Pressure: 1000hPa  
 Rel. Humidity: 29%

##### Detailed Results:

**AC MAINS CONDUCTED**  
 EUT: RTX3371 (26060g01) / 03.02.2009  
 Manufacturer: Tunstall Healthcare  
 Operating Condition: BT and GSM Co-Location  
 Test Site: 7 layers Ratingen  
 Operator: Suna  
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207  
 Comment:  
 Start of Test: 03.02.2009 / 14:37:58

**SCAN TABLE: "FCC Voltage"**  
 Short Description: FCC Voltage  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 5.0 kHz MaxPeak 20.0 ms 9 kHz ESH3-Z5  
 Average

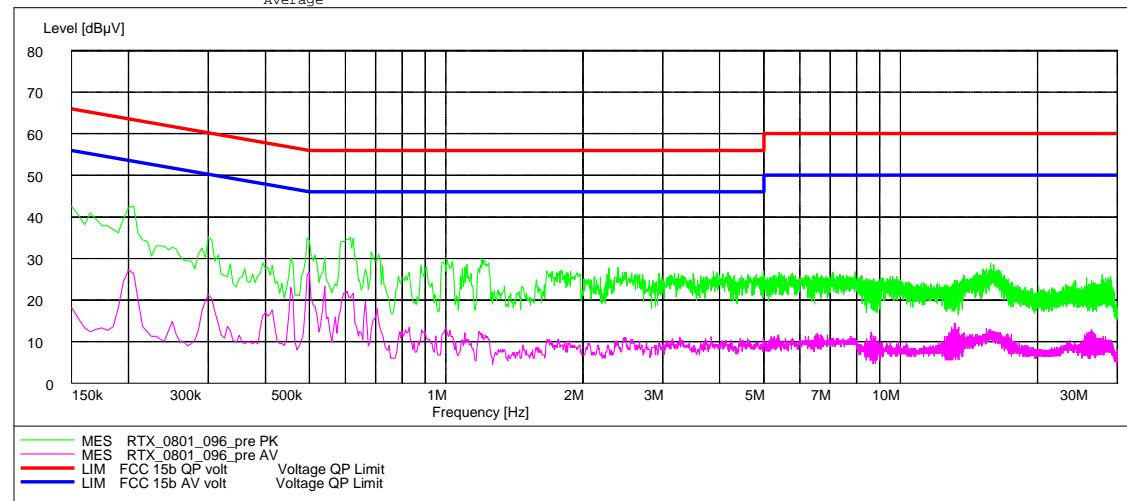



---

Reference: MDE\_RTX\_0801\_FCCc  
FCC Part 15b

### **3.5.2 15b.2 Spurious Radiated Emissions §15.109**

#### **Test: 15b.2; Mode = transmit**

*Result:* Passed

*Setup No.:* E01

*Date of Test:* 2009/01/29 18:06

*Body:* FCC47CFRChIPART15bRADIO FREQUENCY DEVICES

*Test Specification:* FCC part 2 and 15

#### *Test Equipment Environmental Conditions*

*Temperature:* 25°C

*Air Pressure:* 1022hPa


*Rel. Humidity:* 30%

**Detailed Results:**
**EMI RADIATED TEST**

EUT: RTX3371 (26060)  
 Manufacturer: Tunstall Healthcare  
 Operating Condition: GSM 1900 TCH 661, BT TX on 2441 MHz  
 Test Site: 7 layers, Ratingen  
 Operator: Mom  
 Test Specification: FCC part 15 b  
 Comment: Horizontal EUT position  
 Start of Test: 29.01.2009 / 16:11:10

**SCAN TABLE: "FCC part 15 b"**

Short Description:		FCC part 15 b				
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

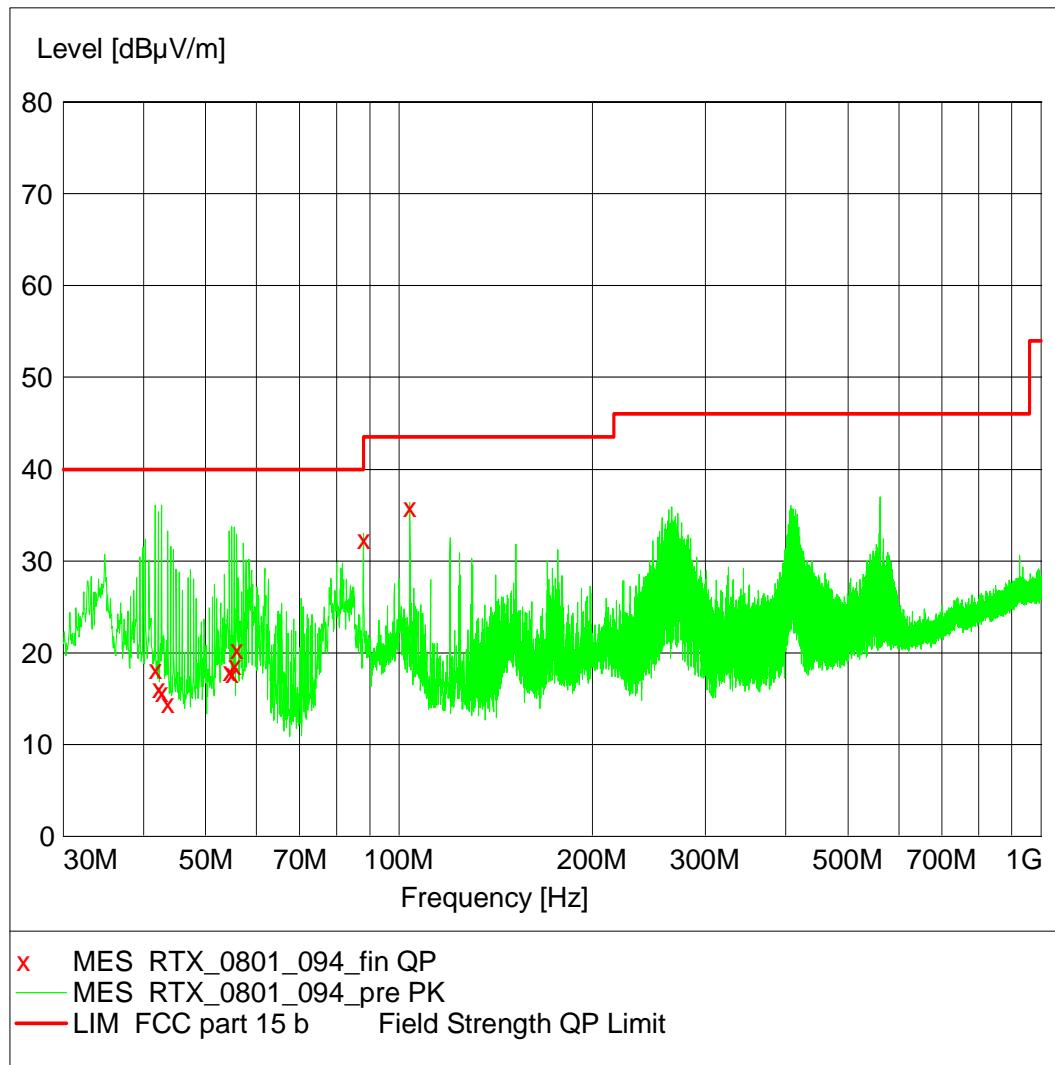



Reference: MDE\_RTX\_0801\_FCCc  
FCC Part 15b


**MEASUREMENT RESULT: "RTX\_0801\_094\_fin\_QP"**

29.01.2009 17:15


Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
41.700000	18.20	13.7	40.0	21.8	104.0	0.00	VERTICAL
42.180000	16.10	13.4	40.0	23.9	100.0	157.00	VERTICAL
42.660000	15.70	13.1	40.0	24.3	125.0	247.00	VERTICAL
43.620000	14.50	12.5	40.0	25.5	119.0	9.00	VERTICAL
54.420000	18.00	5.6	40.0	22.0	100.0	338.00	VERTICAL
54.900000	17.70	5.3	40.0	22.3	100.0	157.00	VERTICAL
55.380000	18.60	5.0	40.0	21.4	277.0	0.00	VERTICAL
55.860000	20.40	4.8	40.0	19.6	257.0	23.00	VERTICAL
87.960000	32.40	9.5	40.0	7.6	125.0	345.00	VERTICAL
103.980000	35.90	10.3	43.5	7.6	102.0	292.00	VERTICAL

## 4 Annex

### 4.1 Additional Information for Report

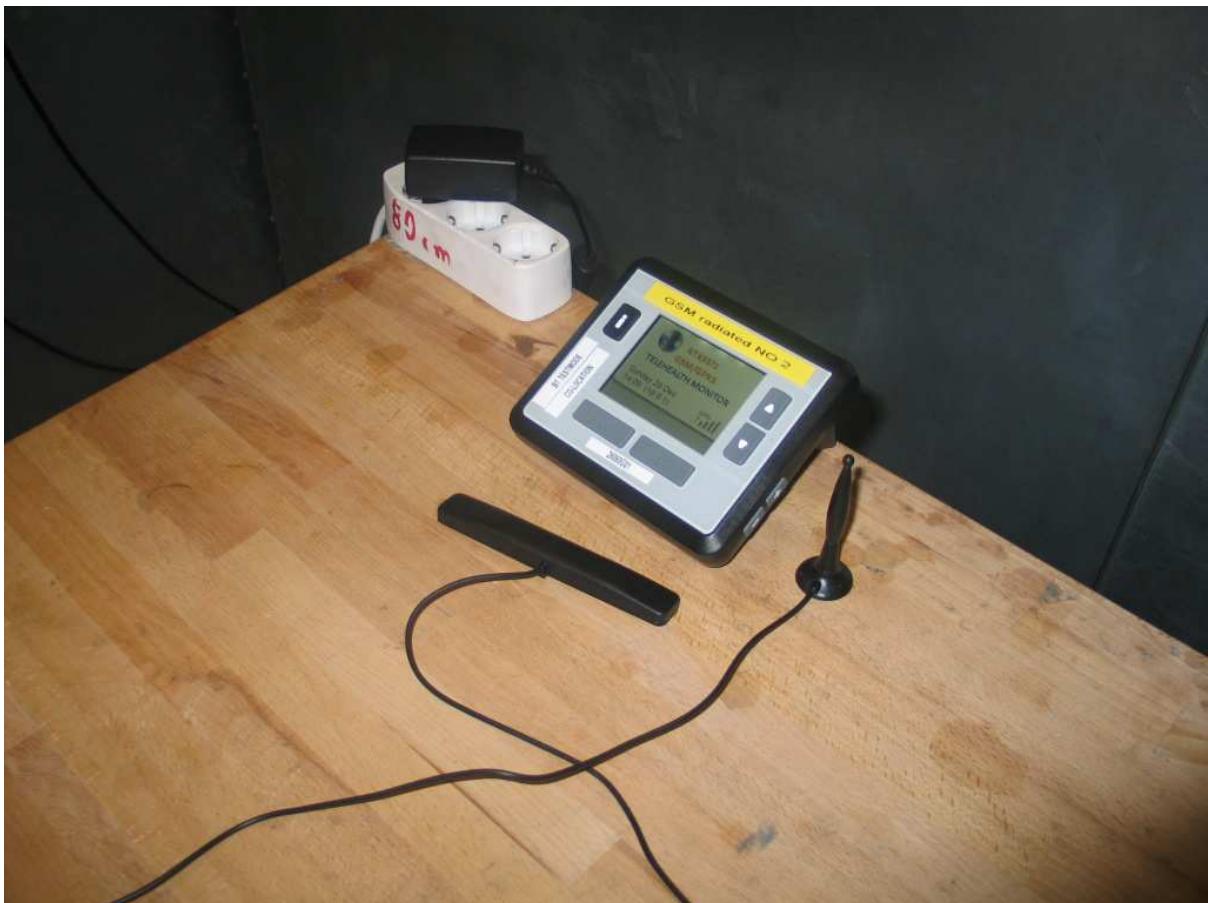

Test Setup: conducted measurements

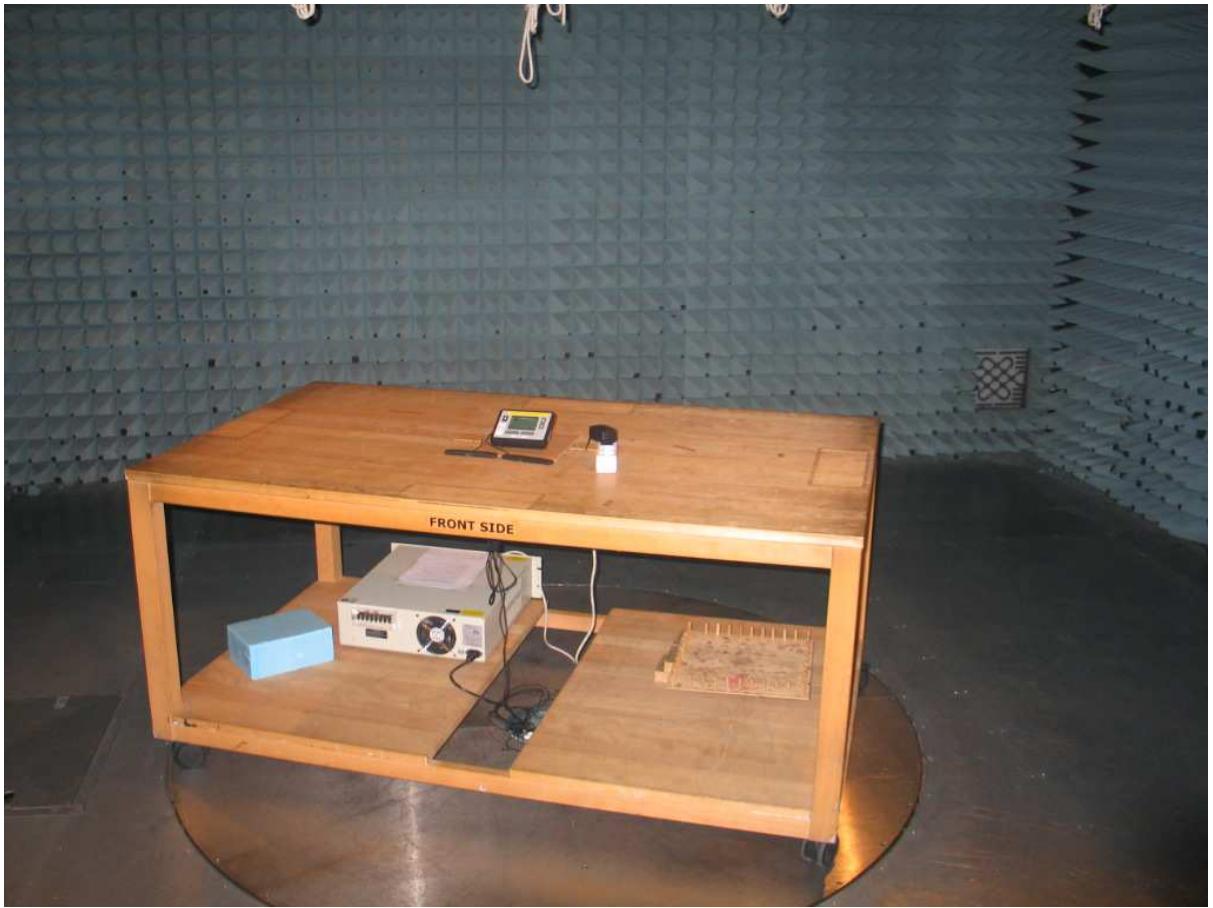

Test Setup: radiated measurements



Test Description

---

---

---

Conducted emissions (AC power line)

---

Standard      FCC Part 15, 10-1-08  
Subpart B

The test was performed according to: ANSI C 63.4, 2003

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from  $50\mu\text{H} \parallel 50 \text{ Ohm}$  Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.107, Class B Limit

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

## FCC Part 15, Subpart B, §15.107, Class A Limit

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 - 0.5	79	66
0.5 - 30	73	60

Used conversion factor: Limit (dB $\mu$ V) = 20 log (Limit ( $\mu$ V)/1 $\mu$ V).

NOTE: a missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

---

 Spurious radiated emissions
 

---

Standard FCC Part 15, 10-1-08, Subpart B

The test was performed according to: ANSI C 63.4, 2003

Test Description

Measurement below 1 GHz:

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)  
 Intention of this step is, to determine the radiated EMI-profile of the EUT.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s
- Turntable angle range: -180° to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2:

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to

find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to + 22.5 ° around the determined value
- Height variation range: -0.25m to + 0.25m around the determined value

#### Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)

RBW = VBW = 1 MHz; above 7 GHz 100 kHz

#### Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits  
 Frequency Range (MHz): Class B Limit (dB $\mu$ V/m)

Frequency Range (MHz)	Class B Limit (dB $\mu$ V/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Frequency Range (MHz)	Class A Limit (dB $\mu$ V/m) / @ 3m !
30 - 88	49.5
88 - 216	54.0
216 - 960	56.9
above 960	60.0

#### §15.35(b)


..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....  
 Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

NOTE: a missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

---

## Setup Drawings

---

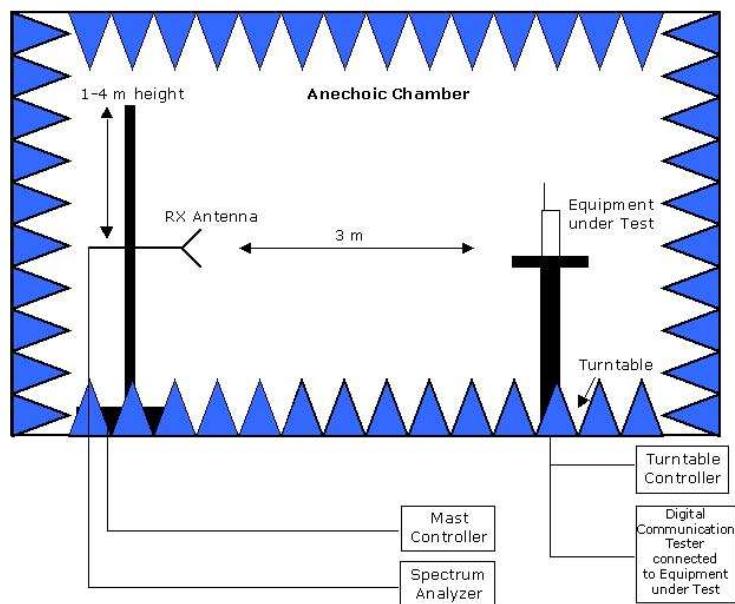

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

## Test Equipment

## EUT Digital Signalling System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz	07.10.08	07.10.11
Signalling Unit for Bluetooth	PTW60	100004	Rohde & Schwarz	-	N/A *)
Universal Radio Communication Tester	CMU200	102366	Rohde & Schwarz	16.02.09	16.02.11
Universal Radio Communication Tester	CMU200	837983/052	Rohde & Schwarz	01.12.08	01.12.11
Signalling Unit for Bluetooth	CBT	100589	Rohde & Schwarz	14.08.08	N/A *)
Signalling Unit for GPS	SMU200	100912	Rohde & Schwarz	28.10.08	N/A *)
*) N/A - only used for signalling					

## EMI Test System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz	06.12.07	06.12.09
Signal Generator	SMR 20	846834/008	Rohde & Schwarz	05.12.07	05.12.09
AC Power Source	6404	64040000B04	Croma ATE INC.	01.06.08	01.06.11

## EMI Radiated Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel	-	-
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	27.10.08	27.10.13
Broadband Amplifier	JS4-18MHz-26GHz	849785	Miteq	12.11.08	12.05.09
Broadband Amplifier	JS4-30MHz-18GHz	896037	Miteq	12.11.08	12.05.09
Broadband Amplifier	JS4-45MHz-27GHz	619368	Miteq	12.11.08	12.05.09
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2 W38.01-2	Kabel Kusch	12.11.08	12.05.09
Cable "ESI to Horn Antenna"	UFB311A UFB293C	W18.02-2 W38.02-2	Rosenberger-Microcoax	12.11.08	12.05.09
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz	12.05.06	12.05.09
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz	20.01.04	N/A - spare antenna
High Pass Filter	5HC3500/127 50-1.2-KK	200035008	Trilithic	12.11.08	12.05.09
High Pass Filter	5HC2700/127 50-1.5-KK	9942012	Trilithic	12.11.08	12.05.09
High Pass Filter	4HC1600/127 50-1.5-KK	9942011	Trilithic	12.11.08	12.05.09
High Pass Filter	WHKX 7.0/18G-8SS	9	Wainwright	12.11.08	12.05.09
KUEP pre amplifier	Kuep 00304000	001	7 layers AG	-	N/A - spare antenna
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz	17.05.06	17.05.09
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz	19.08.02	N/A - only used for pre-testing
Pyramidal Horn Antenna 26.5 GHz	Model 3160-09	9910-1184	EMCO	28.02.08	N/A (Stand. Gain Horn)
Pyramidal Horn Antenna 40 GHz	Model 3160-10	00086675	EMCO	18.12.07	N/A (Stand. Gain Horn)

*EMI Conducted Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>	<b>Cal. data</b>	<b>Next cal.</b>
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner	12.11.08	12.05.09
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz	13.10.08	13.10.11
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz	-	-
Four-Line Network	ENY41	838119/004	Rohde & Schwarz	06.03.08	05.03.11

*Auxiliary Test Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>	<b>Cal. data</b>	<b>Next cal.</b>
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel	-	-
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel	-	-
Digital Multimeter	177	86670383	Fluke	01.08.08	31.07.10
Digital Oscilloscope	TDS 784C	B021311	Tektronix	-	-
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis	-	-
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis	-	-
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz	-	-
Notch Filter ultra stable -6E	WRCA800/960	24	Wainwright	-	-
Temperature Chamber	VT 4002	58566002150010	Vötsch	29.02.08	28.02.09
Temperature Chamber	KWP 120/70	59226012190010	Weiss	29.02.08	28.02.09
ThermoHygro Datalogger 03	Opus10 THI (8152.00)	7482	Luft Mess- und Regeltechnik GmbH	22.01.09	21.01.10
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	838164/004	Rohde & Schwarz	06.10.08	06.10.11
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	836722/011	Rohde & Schwarz	06.10.08	05.10.11
Signal Analyzer 20 Hz to 26.5 GHz	FSIQ26	840061/005	Rohde & Schwarz	02.10.08	02.10.11

*Anechoic Chamber*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>	<b>Cal. data</b>	<b>Next cal.</b>
Air Compressor (pneumatic)			Atlas Copco	-	-
Controller	MCU	1520506	Maturo GmbH	-	-
EMC Camera	CE-CAM/1		CE-SYS	-	-
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi	-	-
Filter ISDN	B84312-C110- E1		Siemens & Matsushita	-	-
Filter telephone systems / modem	B84312-C40- B1		Siemens & Matsushita	-	-
Filter Universal 1A	B84312-C30- H3		Siemens & Matsushita	-	-
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia	-	-
Turntable	DS 420S	420/573/99	HD GmbH, H.Deisel	-	-
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H.Deisel	-	-
ThermoHygro Datalogger 12	Opus10 THI (8152.00)	12482	Luft Mess- und Regeltechnik GmbH	05.08.08	04.08.09
ThermoAirpressure Datalogger 13	Opus10 TPR (8253.00)	13936	Luft Mess- und Regeltechnik GmbH	22.01.09	21.01.10



---

Reference: MDE\_RTX\_0801\_FCCc  
FCC Part 15b

7 layers InterLab Bluetooth RF Test Solution - Setup C – Bluetooth BDR and EDR RF Conformance Test System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Power Meter	NRVD	832025/059	Rohde & Schwarz	17.06.08	15.06.09
Power Sensor A	NRV-Z1	832279/013	Rohde & Schwarz	18.06.08	17.06.09
Power Supply	E3632A	MY40003776	Agilent	-	-
Power Supply	PS-2403D	-	Conrad	-	-
Power Supply	NGSM 32/10	2725	Rohde & Schwarz	28.04.08	27.04.09
Rubidium Frequency Normal	MFS	002	Datum GmbH	18.06.08	17.06.09
Signal Analyzer FSIQ26	FSIQ26	832695/007	Rohde & Schwarz	23.08.07	23.08.09
Signal Generator	SMP 03	833680/003	Rohde & Schwarz	04.07.06	04.07.09
Signal Generator	SMIQ03B	832870/017	Rohde & Schwarz	24.05.07	24.05.10
Signal Switching Unit	TOCT	030106	7 layers Inc.	-	-
Signalling Unit	CBT	100302	Rohde & Schwarz	07.05.08	06.05.09
ThermoHygro Datalogger 04	Opus10 THI (8152.00)	7481	Luftt Mess- und Regeltechnik GmbH	22.01.09	21.01.10
Temperature Chamber	KWP 120/70	59226012190010	Weiss	29.02.08	28.02.09



## 5 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	4
2.4	Setups used for Testing	5
3	Results	5
3.1	General	5
3.2	List of the Applicable Body	5
3.3	List of Test Specification	5
3.4	Summary	6
3.5	Detailed Results	7
3.5.1	15b.1 Conducted Emissions (AC Power Line) §15.107	7
3.5.2	15b.2 Spurious Radiated Emissions §15.109	8
4	Annex	11
4.1	Additional Information for Report	11
5	Index	20