



FCC TEST REPORT

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant : Amtek system Co., Ltd.

Address : 14F-11, No.79, Sec.1, Hsin Tai Wu Rd.,
His Chih City, Taipei, Taiwan

Equipment : Gaming Tablet

Model No. : X210ARM

FCC ID : R4RT10GX210ARM

Trade Name : X2 Computing

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **CerpPASS Technology Corp.**, the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test	7
2.1 Feature of Equipment under Test	7
2.2 Carrier Frequency of Channels	8
2.3 Test Mode and Test Software	9
2.4 Description of Test System	9
2.5 General Information of Test	10
2.6 Measurement Uncertainty	10
3. Antenna Requirements	11
3.1 Standard Applicable	11
3.2 Antenna Construction and Directional Gain	11
4. Test of Conducted Emission	12
4.1 Test Limit	12
4.2 Test Procedures	12
4.3 Typical Test Setup	13
4.4 Measurement Equipment	13
4.5 Test Result and Data	14
4.6 Test Photographs	20
5. Test of Radiated Emission	21
5.1 Test Limit	21
5.2 Test Procedures	21
5.3 Typical Test Setup	22
5.4 Measurement Equipment	22
5.5 Test Result and Data (9kHz ~ 30MHz)	22
5.6 Test Result and Data	23
5.7 Test Photographs (30MHz~1GHz)	59
5.8 Test Photographs (1GHz~25GHz)	60
6. 6dB Bandwidth Measurement Data	61
6.1 Test Limit	61
6.2 Test Procedures	61
6.3 Test Setup Layout	61
6.4 Measurement Equipment	61
6.5 Test Result and Data	61
7. Maximum Peak and Average Output Power	68
7.1 Test Limit	68
7.2 Test Procedures	68
7.3 Test Setup Layout	68
7.4 Measurement Equipment	68
7.5 Test Result and Data	69
8. Power Spectral Density	70
8.1 Test Limit	70
8.2 Test Procedures	70



8.3	Test Setup Layout	70
8.4	Measurement Equipment	70
8.5	Test Result and Data	70
9.	Band Edges Measurement	77
9.1	Test Limit	77
9.2	Test Procedure	77
9.3	Test Setup Layout	77
9.4	Measurement Equipment	77
9.5	Test Result and Data	77
9.6	Restrict Band Emission Measurement Data	86
10.	Restricted Bands of Operation	88
10.1	Labeling Requirement	88
Appendix A. Photographs of EUT		A1 ~ A12

History of this test report

■ ORIGINAL.

☐ Additional attachment as following record:

[illegible]



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant : Amtek system Co., Ltd.

Address : 14F-11, No.79, Sec.1, Hsin Tai Wu Rd.,
His Chih City, Taipei, Taiwan

Equipment : Gaming Tablet

Model No. : X210ARM

FCC ID : R4RT10GX210ARM

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 2009, KDB558074 & KDB662911**.

The equipment was ***passed*** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2010)**.

The test was carried out on Nov. 02, 2012 at CerpPASS Technology Corp.

Approved by:

Tested by:

Hill Chen
EMC/RF B.U. Assistant Manager

Ben Lu
Engineer



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209 15.247(d)	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(d)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operating System	Windows XP Home , Windows 7 , Android 2.2
CPU	Intel Diamondville platform Atom N270 533MHz FSB, 512KB, L2 Cache (1.6G)
Chipsets	Core Logic: 945GSE + ICH7-M VGA: 945GSE ultra low power integrated 3D graphics Audio: High Definition Audio
Memory	1x DDRII SODIMM 533/667MHz
Maximum Memory	2GB
BIOS	Insyde UEFI BIOS, Boot from USB, Plug & Play, APM 1.2, ACPI 2.0
HDD	2.5 inch SATA HDD 80GB default, max 160GB (option) SATA to CF card type II (option)
Video	Intel 945 GSE, resolution 1024x600 as default
LCD Display	10.2", 1024x600 WXGA LCD
Card Reader	Support SD/MMC card slot
CMOS Camera	Built-in 1.3M pixel camera
Audio	Realtek ALC268Q-GR
Communication	Wireless 802.11 b/g (Mini PCIe) Qcom Ralink solution Touch panel 4 wires resistive (80 gram) + control board (USB)
AC/DC Adapter	Miniature size compact adapter type AC 100~240Volt / DC 12V 3A 36W
Battery Pack	1 removable battery pack
Power Management	Support For ACPI 2.0

RF Spec.	
Protocol and standard	IEEE 802.11N, IEEE 802.11G IEEE 802.11B
Frequency Range	2412~2462MHz
Working Channels	11
Data Modulation	OFDM/DBPSK/DQPSK/CCK
Working Mode	Infrastructure, Ad-Hoc
Transmitting rate	135/54/48/36/24/18/12/9/6/1M (self-adapting)
Spread Spectrum technology	DSSS (Direct Sequence Spread Spectrum)
Sensitivity@PER	54/135M:-72dBm@10%PER, 11M:-85dBm@8%PER, 6M: -88dBm@10%PER, 1M: -90dBm@8%PER, TX Power 135M:15.1DBM, 54M:15.26DBM, 11M:19.18DBM
Antenna gain	1.38dBi



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n, HT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	08	2447
---	---	09	2452
03	2422	---	---
04	2427	---	---
05	2432	---	---
06	2437	---	---
07	2442	---	---



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included Notebook and EUT for the test.
- An executive program, "Hyper terminal" under WIN XP was executed to transmit and receive data to the notebook through WLAN.
- The following test modes were performed for test:

- 802.11b/g/n HT20: CH01: 2412MHz, CH06: 2437MHz, CH11: 2462MHz
- 802.11n HT40: CH03: 2422MHz, CH06: 2437MHz, CH09: 2452MHz

* Power output of data rate:

802.11b		802.11g		802.11n HT20		802.11n HT40	
Data Rate (Mbps)	Power output (dBm)	Data Rate (Mbps)	Power output (dBm)	Data Rate (Mbps)	Power output (dBm)	Data Rate (Mbps)	Power output (dBm)
11	19.18	54	15.26	130/15	---	270/15	---
5.5	19.12	48	15.22	117/14	---	243/14	---
2	19.13	36	15.21	104/13	---	216/13	---
1	19.14	24	15.22	78/12	---	162/12	---
---	---	18	15.20	52/11	---	108/11	---
---	---	12	15.19	39/10	---	81/10	---
---	---	9	15.21	26/9	---	54/9	---
---	---	6	15.23	13/8	---	27/8	---
---	---	---	---	65/7	15.00	135/7	15.09
---	---	---	---	58.5/6	14.93	121.5/6	15.02
---	---	---	---	52/5	14.90	108/5	14.99
---	---	---	---	39/4	14.92	81/4	14.97
---	---	---	---	26/3	14.93	54/3	14.96
---	---	---	---	19.5/2	14.90	40.5/2	14.97
---	---	---	---	13/1	14.92	27/1	15.00
---	---	---	---	6.5/0	14.95	13.5/0	15.03

2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Notebook	DELL	INSPIRON 510m	Power Cable, Unshielding 1.8m



2.5 General Information of Test

Test Site :	CerpPASS Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number:	TW1049, TW1061, 390316, 488071
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number:	T-1173 for Telecommunication Test C-4139 for Conducted emission test R-3428 for Radiated emission test G-97 for Radiated emission test above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30MHz Radiation: from 30MHz to 25,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.
Laboratory Accreditation	

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated emission	±4.11dB
Peak Output Power(conducted)	±1.38dB
Peak Output Power(Radiated)	±1.70dB
Power Spectral Density	±1.39dB
Radiated emission(3m)	±4.11dB
Radiated emission(10m)	±3.89dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna Type: PCB Antenna

Antenna Gain: 1.38 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



4.3 Typical Test Setup

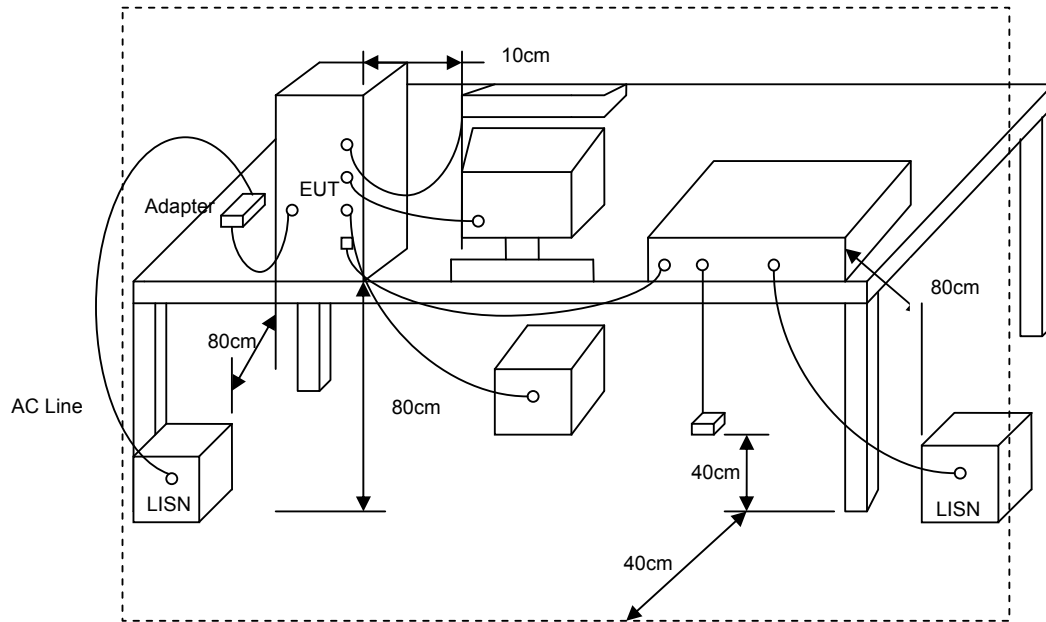


4.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	100443	2012/01/12	2013/01/11
LISN	Schwarzbeck	NSLK 8127	8127-516	2012/03/08	2013/03/07
LISN	Schwarzbeck	NSLK 8127	8127-568	2012/08/22	2013/08/21



4.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 1	: 802.11g, CH1	Temperature	: 22 °C
Test Date	: Nov. 01, 2012	Humidity	: 59 %

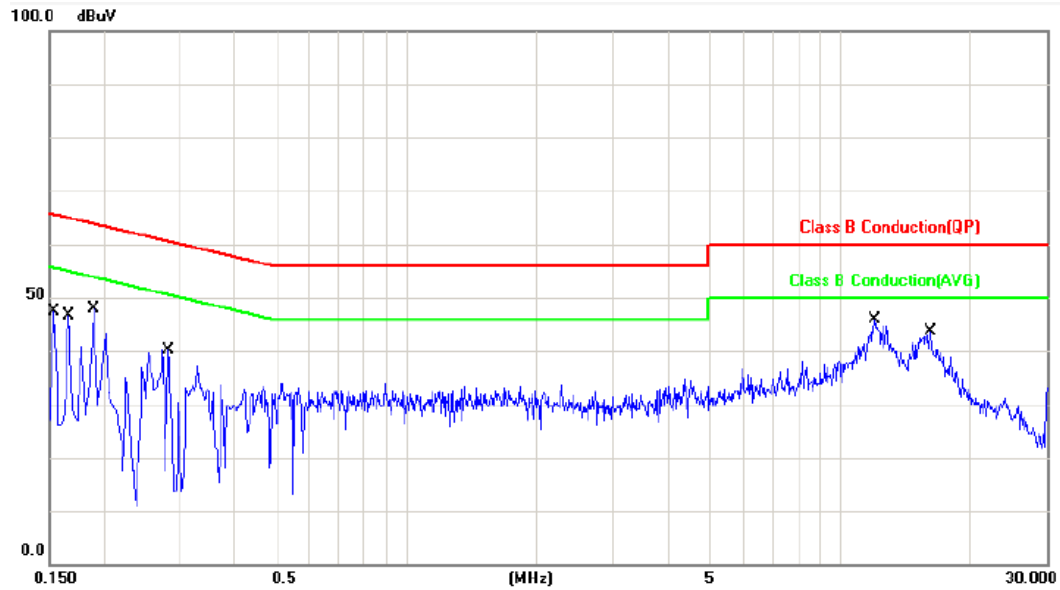


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	0.22	39.50	39.72	65.78	-26.06	QP	P
2	0.1539	0.22	26.78	27.00	55.78	-28.78	AVG	P
3	0.1660	0.22	37.93	38.15	65.15	-27.00	QP	P
4	0.1660	0.22	26.51	26.73	55.15	-28.42	AVG	P
5	0.1900	0.22	45.12	45.34	64.03	-18.69	QP	P
6	0.1900	0.22	29.25	29.47	54.03	-24.56	AVG	P
7	0.2819	0.22	36.33	36.55	60.76	-24.21	QP	P
8	0.2819	0.22	20.14	20.36	50.76	-30.40	AVG	P
9	12.0060	0.87	39.54	40.41	60.00	-19.59	QP	P
10	12.0060	0.87	32.92	33.79	50.00	-16.21	AVG	P
11	16.1940	1.12	36.73	37.85	60.00	-22.15	QP	P
12	16.1940	1.12	30.03	31.15	50.00	-18.85	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 1	: 802.11g, CH1	Temperature	: 22 °C
Test Date	: Nov. 01, 2012	Humidity	: 59 %

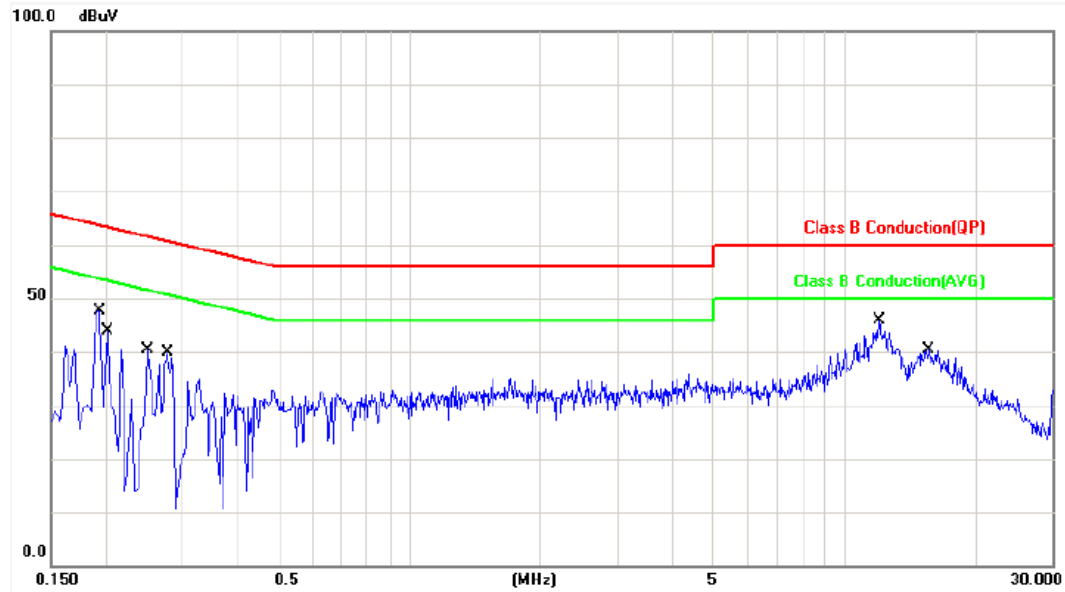


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	0.18	44.87	45.05	63.86	-18.81	QP	P
2	0.1940	0.18	29.26	29.44	53.86	-24.42	AVG	P
3	0.2020	0.18	43.53	43.71	63.52	-19.81	QP	P
4	0.2020	0.18	27.69	27.87	53.52	-25.65	AVG	P
5	0.2500	0.18	38.86	39.04	61.75	-22.71	QP	P
6	0.2500	0.18	21.58	21.76	51.75	-29.99	AVG	P
7	0.2779	0.18	36.84	37.02	60.88	-23.86	QP	P
8	0.2779	0.18	20.98	21.16	50.88	-29.72	AVG	P
9	12.0500	0.76	38.16	38.92	60.00	-21.08	QP	P
10	12.0500	0.76	30.46	31.22	50.00	-18.78	AVG	P
11	15.6460	0.90	31.80	32.70	60.00	-27.30	QP	P
12	15.6460	0.90	23.41	24.31	50.00	-25.69	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: LINE
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 22 °C
Test Date	: Nov. 01, 2012	Humidity	: 59 %

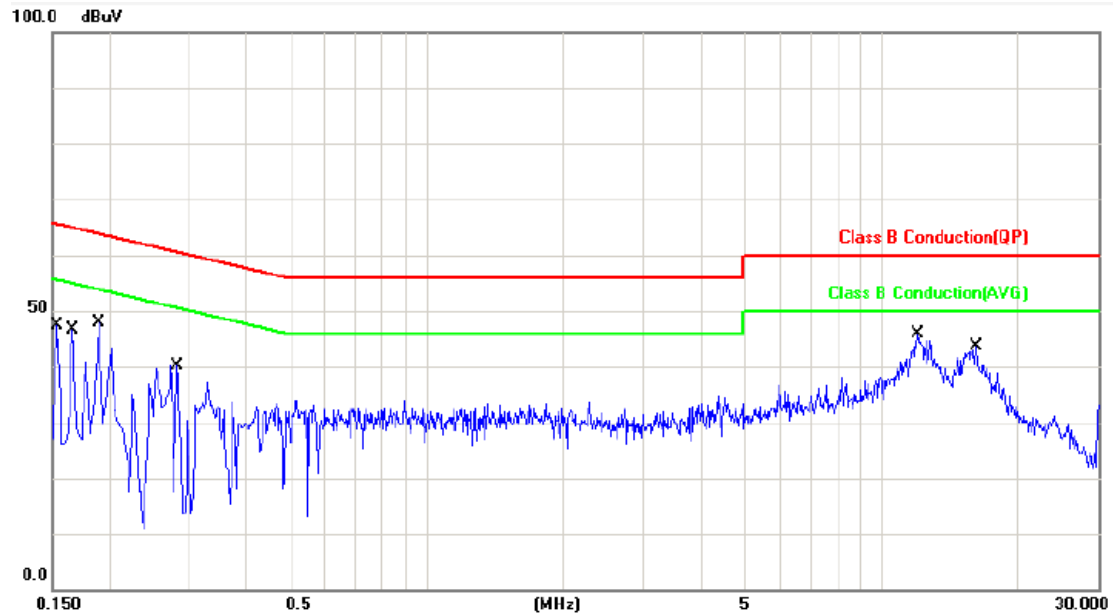


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	0.19	39.37	39.56	65.78	-26.22	QP	P
2	0.1539	0.19	27.27	27.46	55.78	-28.32	AVG	P
3	0.1660	0.19	38.39	38.58	65.15	-26.57	QP	P
4	0.1660	0.19	25.97	26.16	55.15	-28.99	AVG	P
5	0.1900	0.18	45.80	45.98	64.03	-18.05	QP	P
6	0.1900	0.18	29.45	29.63	54.03	-24.40	AVG	P
7	0.2819	0.18	36.00	36.18	60.76	-24.58	QP	P
8	0.2819	0.18	20.56	20.74	50.76	-30.02	AVG	P
9	12.0060	0.59	39.74	40.33	60.00	-19.67	QP	P
10	12.0060	0.59	33.00	33.59	50.00	-16.41	AVG	P
11	16.1940	0.81	36.84	37.65	60.00	-22.35	QP	P
12	16.1940	0.81	30.96	31.77	50.00	-18.23	AVG	P

Note: Level = Reading + Factor
Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 22 °C
Test Date	: Nov. 01, 2012	Humidity	: 59 %

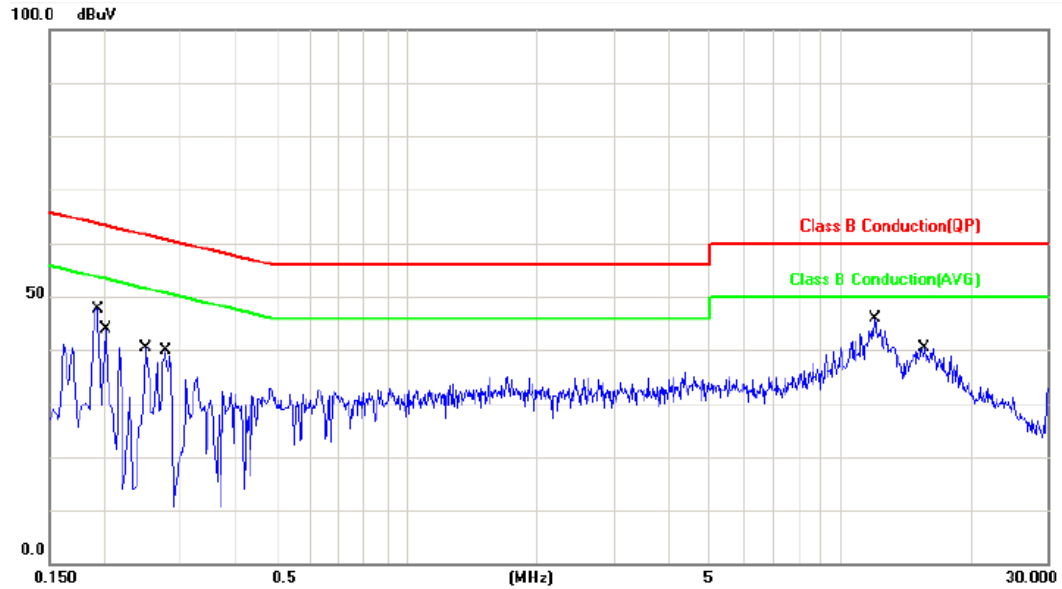


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	0.14	45.55	45.69	63.86	-18.17	QP	P
2	0.1940	0.14	29.68	29.82	53.86	-24.04	AVG	P
3	0.2020	0.14	43.49	43.63	63.52	-19.89	QP	P
4	0.2020	0.14	27.01	27.15	53.52	-26.37	AVG	P
5	0.2500	0.14	39.38	39.52	61.75	-22.23	QP	P
6	0.2500	0.14	21.27	21.41	51.75	-30.34	AVG	P
7	0.2779	0.14	37.49	37.63	60.88	-23.25	QP	P
8	0.2779	0.14	21.38	21.52	50.88	-29.36	AVG	P
9	12.0500	0.48	37.68	38.16	60.00	-21.84	QP	P
10	12.0500	0.48	31.02	31.50	50.00	-18.50	AVG	P
11	15.6460	0.60	31.76	32.36	60.00	-27.64	QP	P
12	15.6460	0.60	23.88	24.48	50.00	-25.52	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: LINE
Test Mode 3	: 802.11n HT40, CH3	Temperature	: 22 °C
Test Date	: Nov. 01, 2012	Humidity	: 59 %

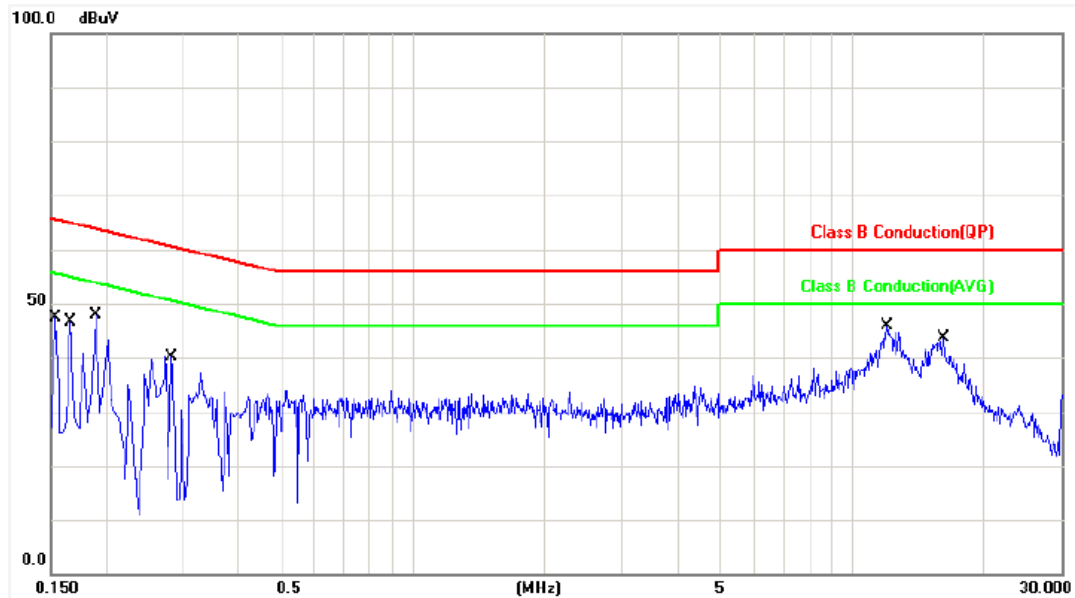


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	0.19	39.47	39.66	65.78	-26.12	QP	P
2	0.1539	0.19	27.10	27.29	55.78	-28.49	AVG	P
3	0.1660	0.19	37.91	38.10	65.15	-27.05	QP	P
4	0.1660	0.19	26.60	26.79	55.15	-28.36	AVG	P
5	0.1900	0.18	45.29	45.47	64.03	-18.56	QP	P
6	0.1900	0.18	29.33	29.51	54.03	-24.52	AVG	P
7	0.2819	0.18	35.88	36.06	60.76	-24.70	QP	P
8	0.2819	0.18	20.48	20.66	50.76	-30.10	AVG	P
9	12.0060	0.59	40.37	40.96	60.00	-19.04	QP	P
10	12.0060	0.59	32.57	33.16	50.00	-16.84	AVG	P
11	16.1940	0.81	36.71	37.52	60.00	-22.48	QP	P
12	16.1940	0.81	30.19	31.00	50.00	-19.00	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 3	: 802.11n HT40, CH3	Temperature	: 22 °C
Test Date	: Nov. 01, 2012	Humidity	: 59 %

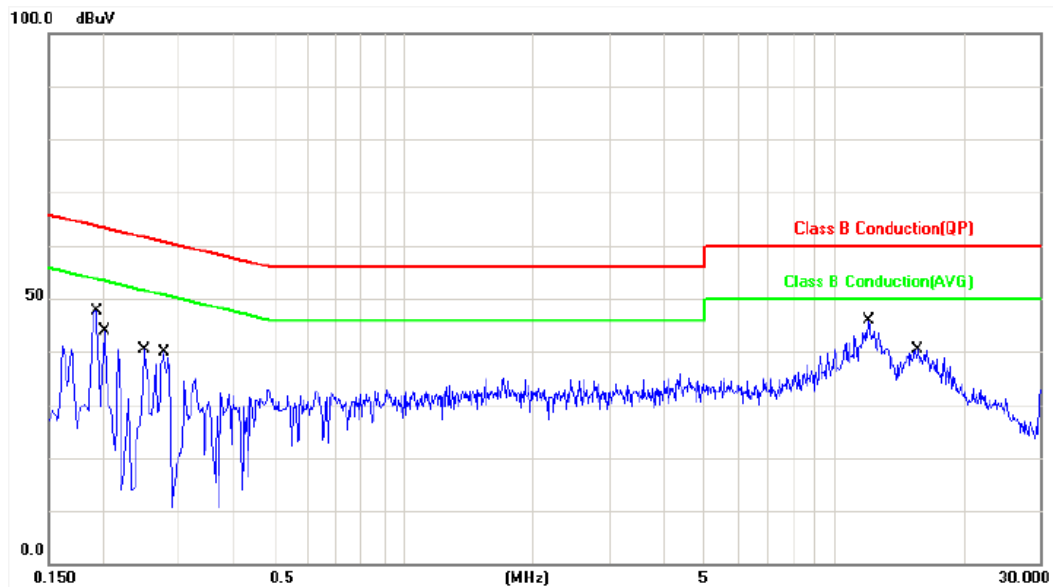

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	0.14	45.49	45.63	63.86	-18.23	QP	P
2	0.1940	0.14	29.60	29.74	53.86	-24.12	AVG	P
3	0.2020	0.14	43.59	43.73	63.52	-19.79	QP	P
4	0.2020	0.14	27.08	27.22	53.52	-26.30	AVG	P
5	0.2500	0.14	39.03	39.17	61.75	-22.58	QP	P
6	0.2500	0.14	21.69	21.83	51.75	-29.92	AVG	P
7	0.2779	0.14	37.49	37.63	60.88	-23.25	QP	P
8	0.2779	0.14	21.37	21.51	50.88	-29.37	AVG	P
9	12.0500	0.48	37.85	38.33	60.00	-21.67	QP	P
10	12.0500	0.48	31.14	31.62	50.00	-18.38	AVG	P
11	15.6460	0.60	31.87	32.47	60.00	-27.53	QP	P
12	15.6460	0.60	24.28	24.88	50.00	-25.12	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit



5. Test of Radiated Emission

5.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




5.3 Typical Test Setup

For radiated emissions below 30MHz

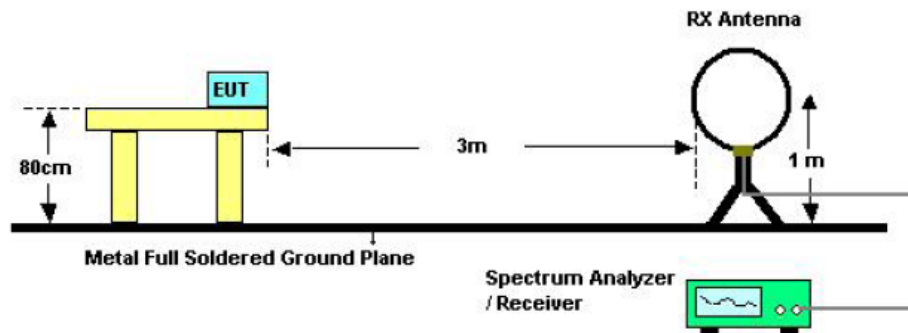

For radiated emissions above 30MHz

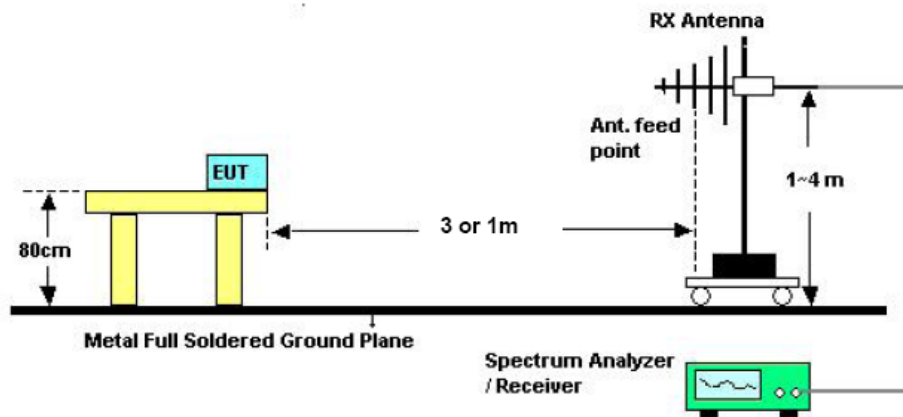

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

5.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	100821	2012/01/31	2013/01/30
Amplifier	QuieTek	AP/0100A	CHM0906075	2012/01/13	2013/01/12
Signal Generator	HP	8648B	3629U00612	2012/01/11	2013/01/10
Bilog Antenna	Schwarzbeck	VULB 9168	275	2012/03/23	2013/03/22
Spectrum Analyzer	R&S	FSP40	100047	2012/03/01	2013/02/28
Horn Antenna	EMCO	3115	31589	2012/03/01	2013/02/28
Preamplifier	Agilent	8449B	3008A01954	2012/02/29	2013/02/28
Loop Antenna	EMCO	6507	40855	2012/02/29	2013/02/28


5.5 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.



5.6 Test Result and Data

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

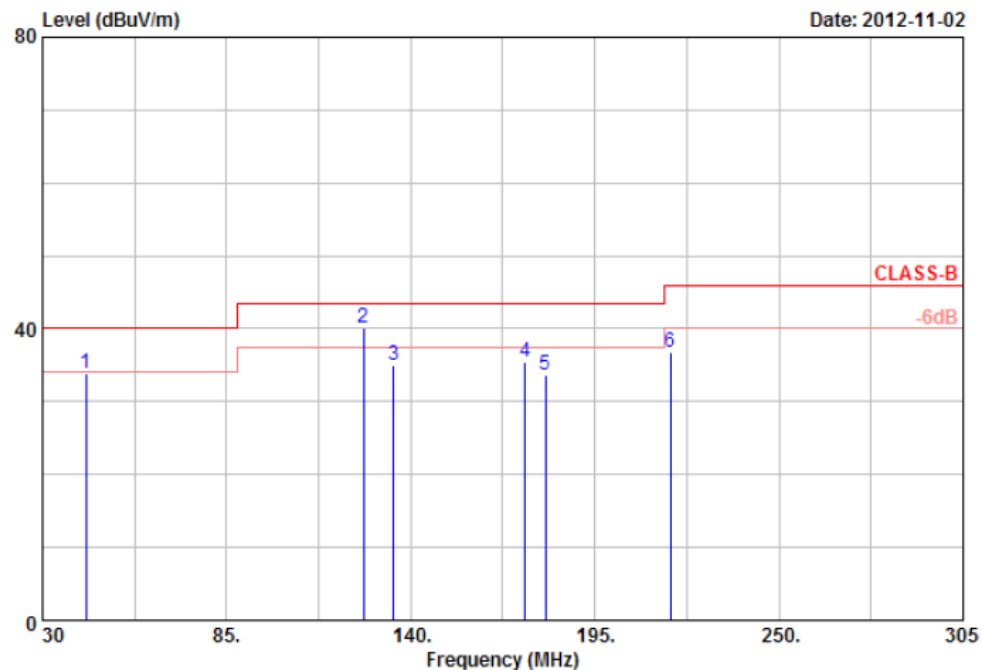


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	42.93	35.24	-1.29	33.95	40.00	-6.05	Peak	100	360
2	126.00	45.72	-5.57	40.15	43.50	-3.35	QP	100	360
3	135.00	41.05	-6.13	34.92	43.50	-8.58	Peak	100	360
4	174.20	48.14	-12.67	35.47	43.50	-8.03	Peak	100	360
5	180.20	38.96	-5.24	33.72	43.50	-9.78	Peak	100	360
6	217.50	43.11	-6.41	36.70	46.00	-9.30	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

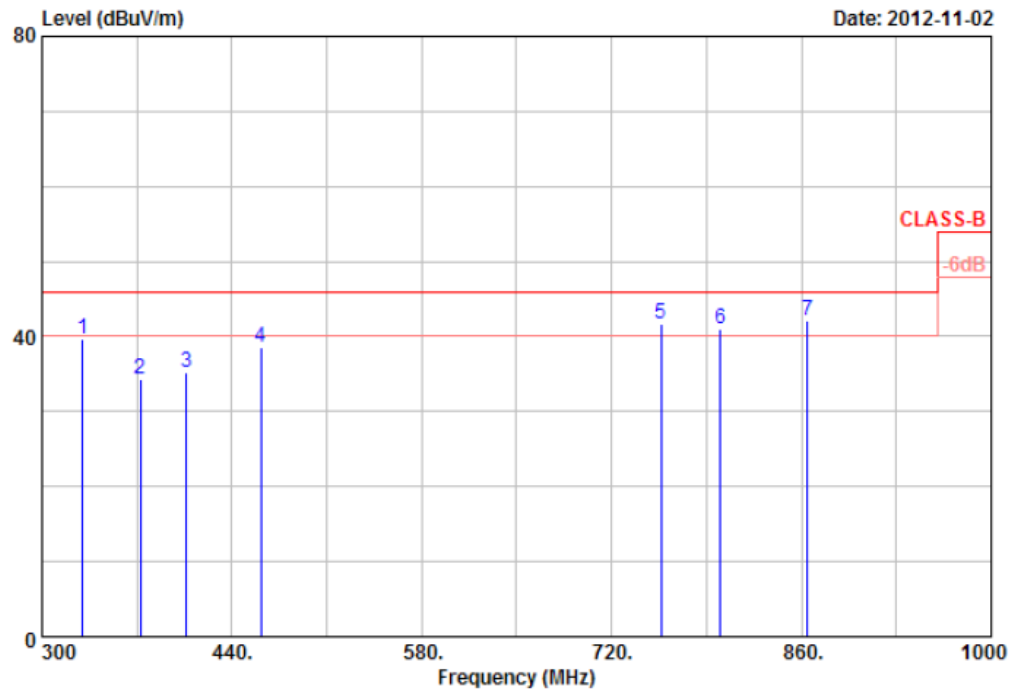


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	330.15	47.24	-7.62	39.62	46.00	-6.38	Peak	100	0
2	372.75	42.83	-8.61	34.22	46.00	-11.78	Peak	100	0
3	406.50	41.14	-5.92	35.22	46.00	-10.78	Peak	100	0
4	461.70	45.87	-7.37	38.50	46.00	-7.50	Peak	100	0
5	756.40	38.77	3.00	41.77	46.00	-4.23	QP	100	0
6	800.50	35.44	5.56	41.00	46.00	-5.00	QP	100	0
7	864.25	33.52	8.64	42.16	46.00	-3.84	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

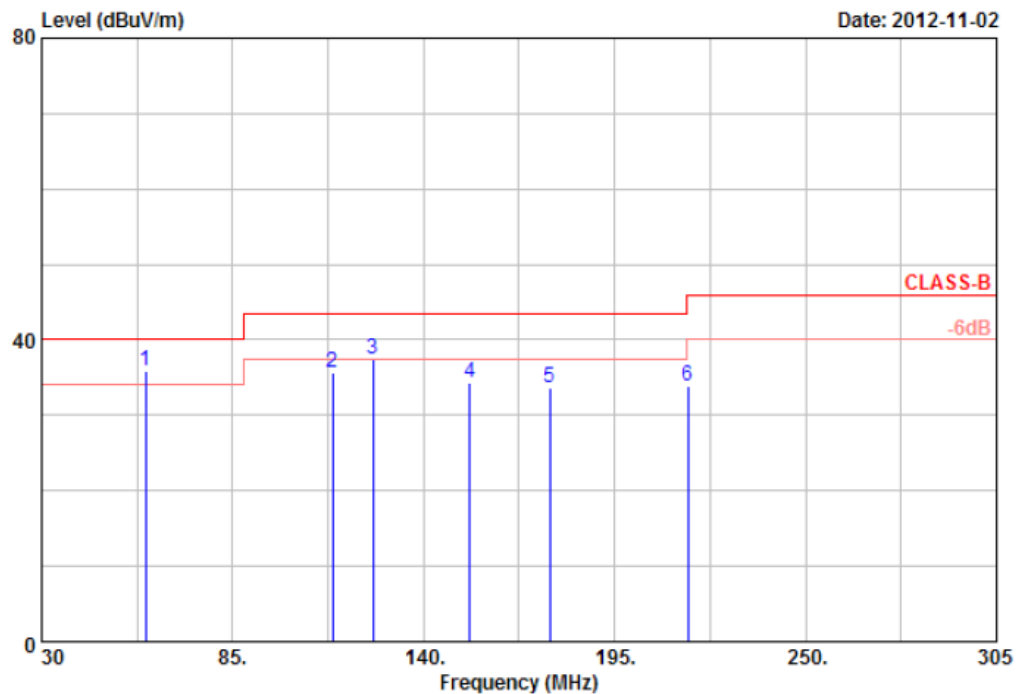


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	59.98	53.25	-17.29	35.96	40.00	-4.04	QP	100	360
2	113.88	54.63	-19.01	35.62	43.50	-7.88	Peak	100	360
3	125.50	55.19	-17.83	37.36	43.50	-6.14	Peak	100	360
4	153.20	49.55	-15.27	34.28	43.50	-9.22	Peak	100	360
5	176.30	52.45	-18.80	33.65	43.50	-9.85	Peak	100	360
6	216.18	50.09	-16.23	33.86	46.00	-12.14	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

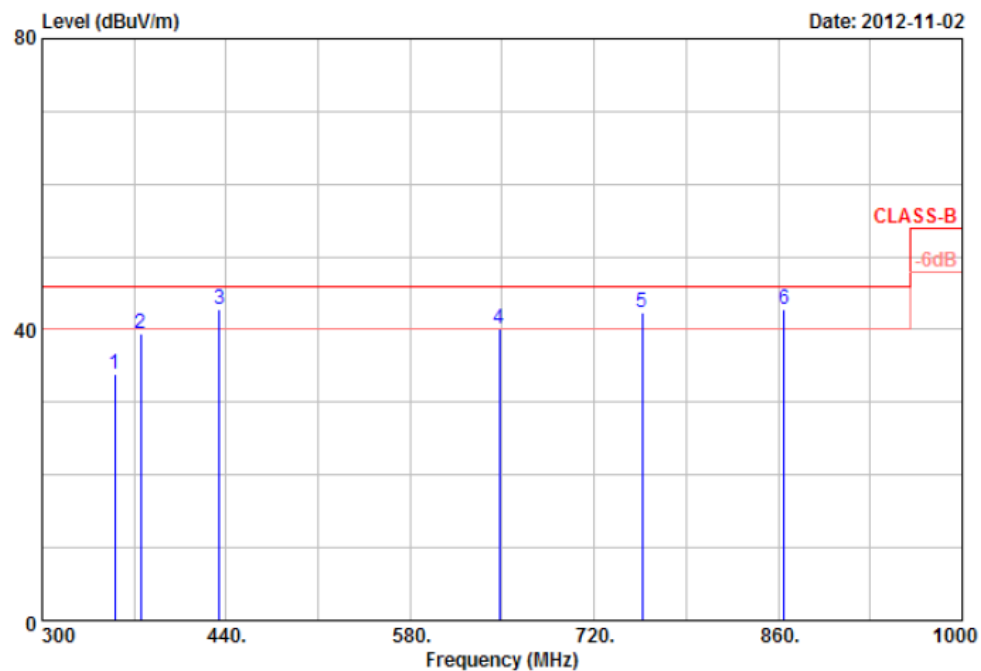


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	355.30	44.43	-10.47	33.96	46.00	-12.04	Peak	100	0
2	374.90	51.19	-11.64	39.55	46.00	-6.45	Peak	100	0
3	435.10	49.38	-6.64	42.74	46.00	-3.26	QP	100	0
4	647.90	39.97	0.25	40.22	46.00	-5.78	QP	100	0
5	756.40	39.34	3.05	42.39	46.00	-3.61	QP	100	0
6	864.20	37.64	5.06	42.70	46.00	-3.30	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11b, CH1	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

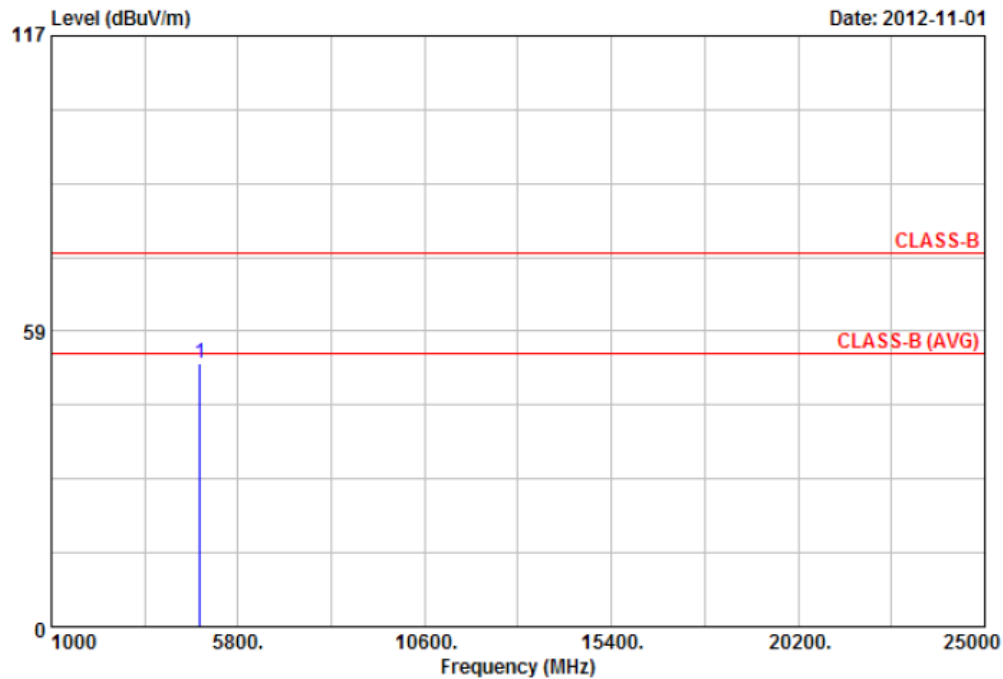


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.38	46.50	5.61	52.11	74.00	-21.89	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11b, CH1	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

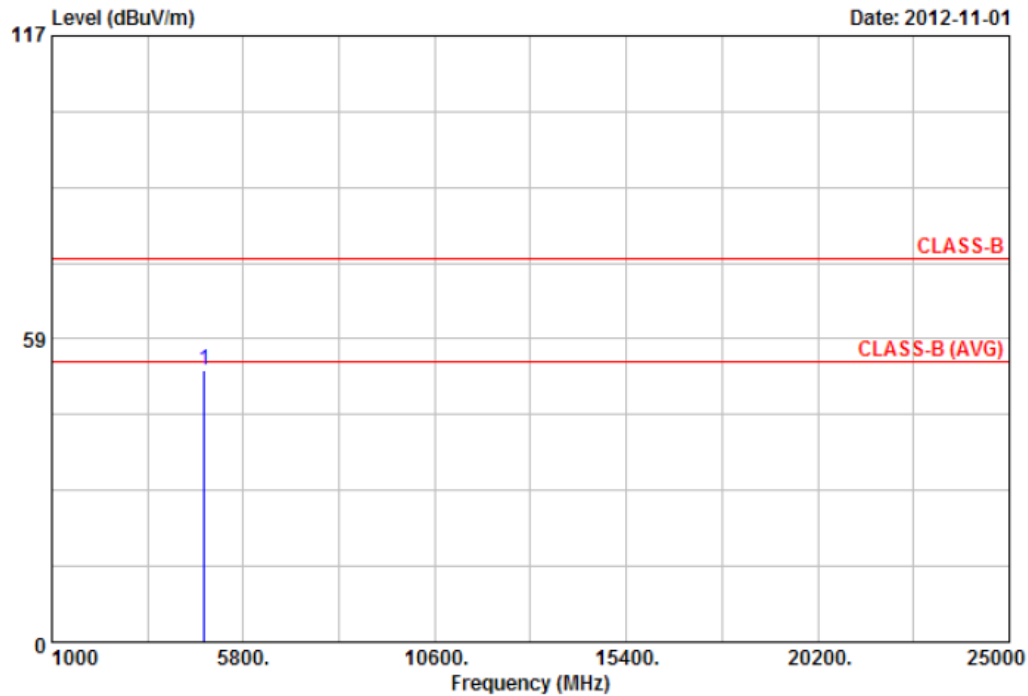


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.75	48.50	3.94	52.44	74.00	-21.56	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11b, CH6	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

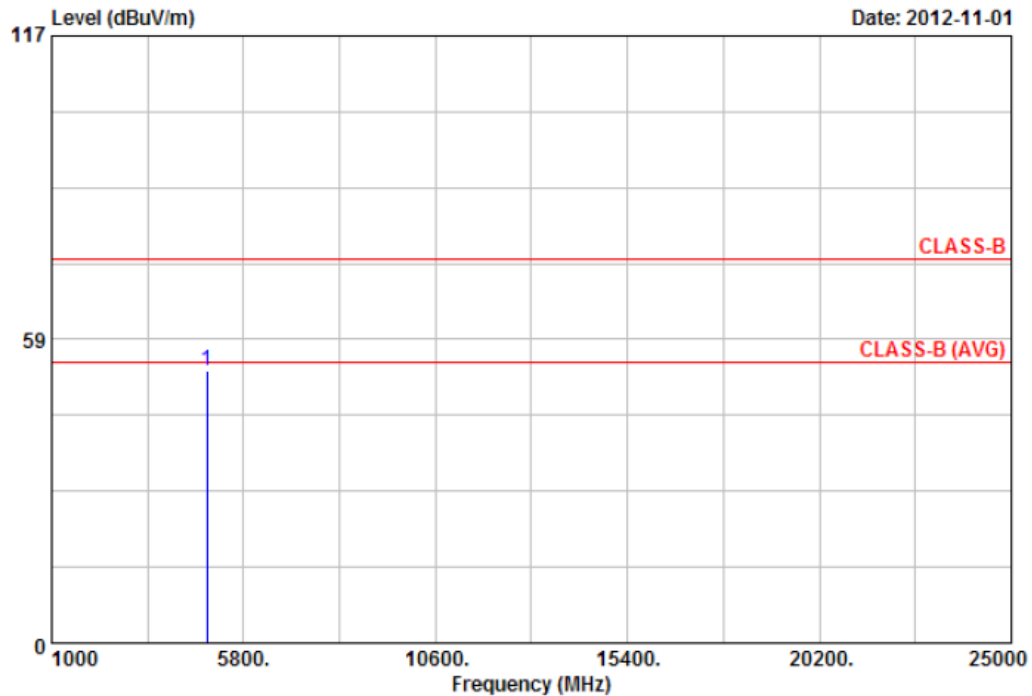


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.95	46.01	6.59	52.60	74.00	-21.40	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11b, CH6	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

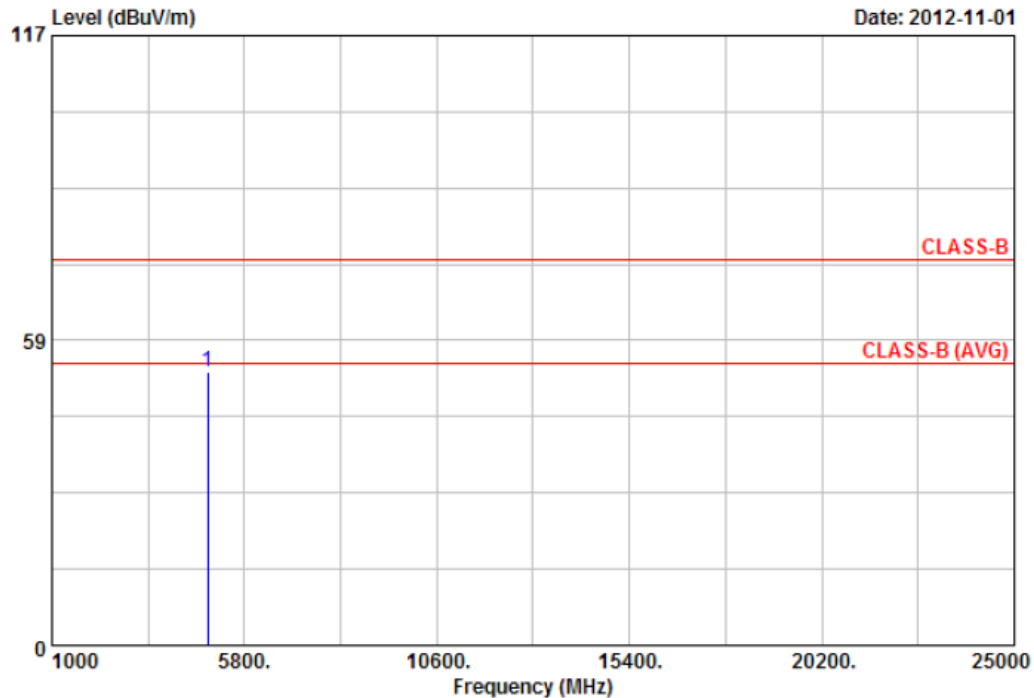


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.95	47.89	4.73	52.62	74.00	-21.38	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11b, CH11	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

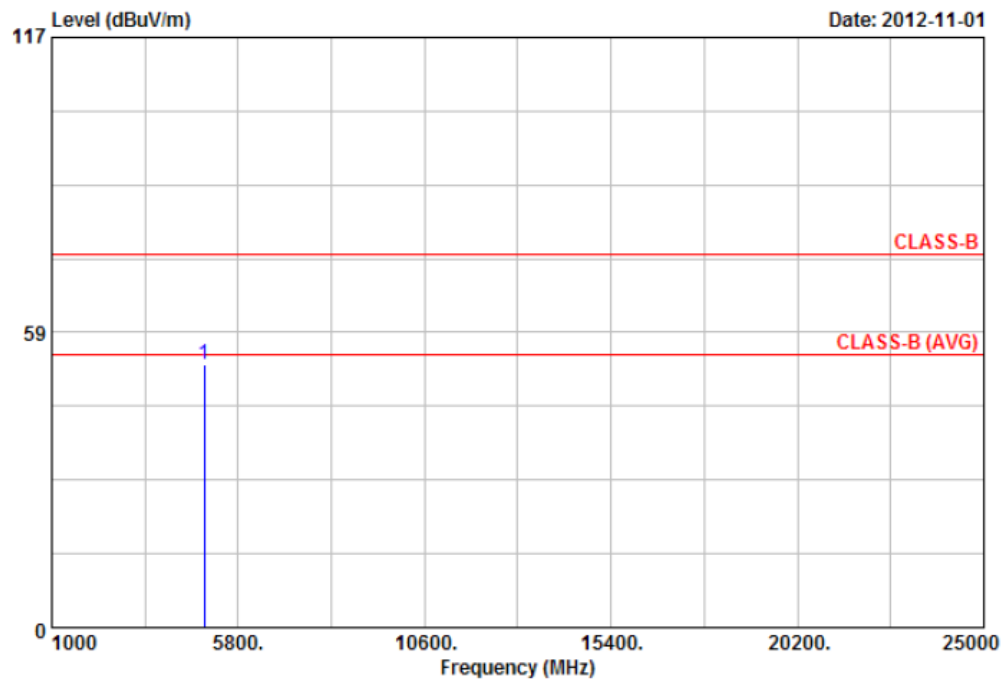


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.10	44.91	7.16	52.07	74.00	-21.93	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11b, CH11	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

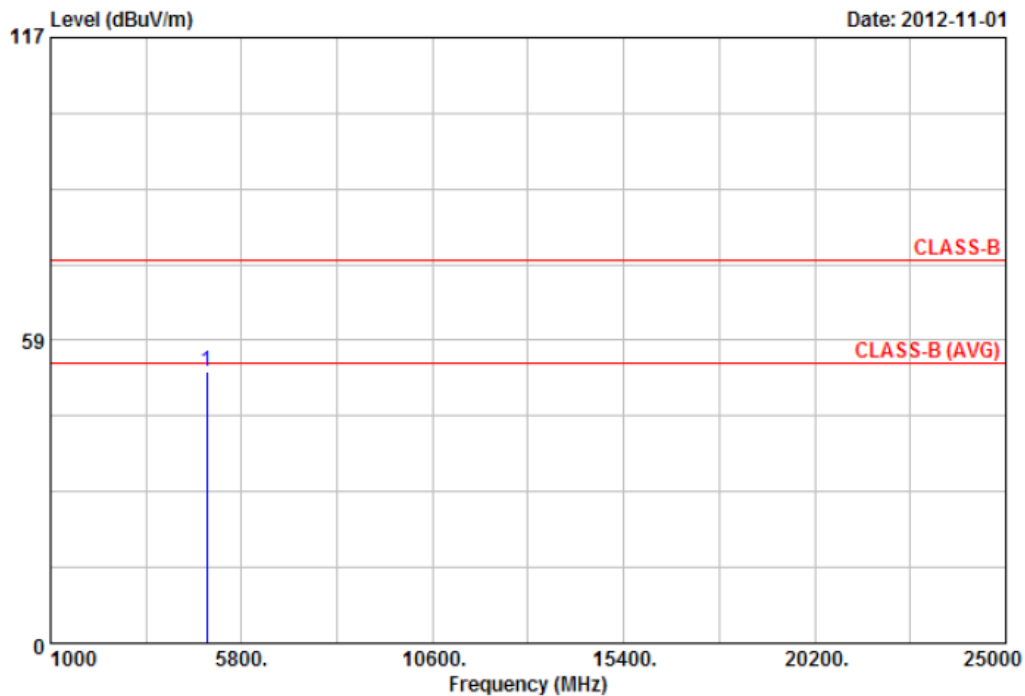


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.18	47.38	5.15	52.53	74.00	-21.47	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH1	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

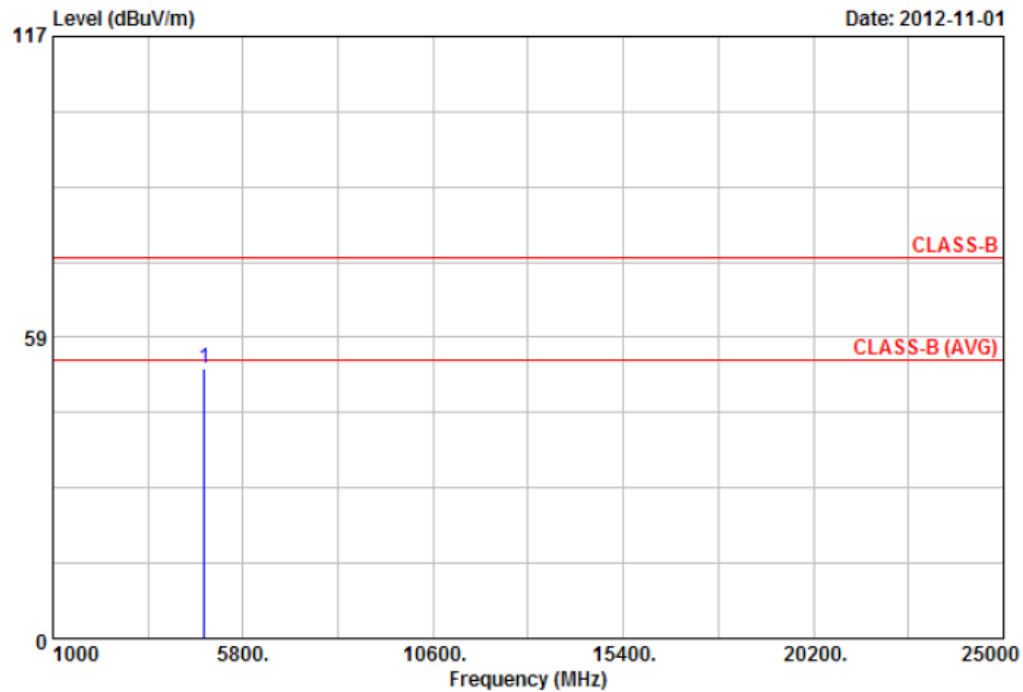


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.40	46.98	5.62	52.60	74.00	-21.40	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH1	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

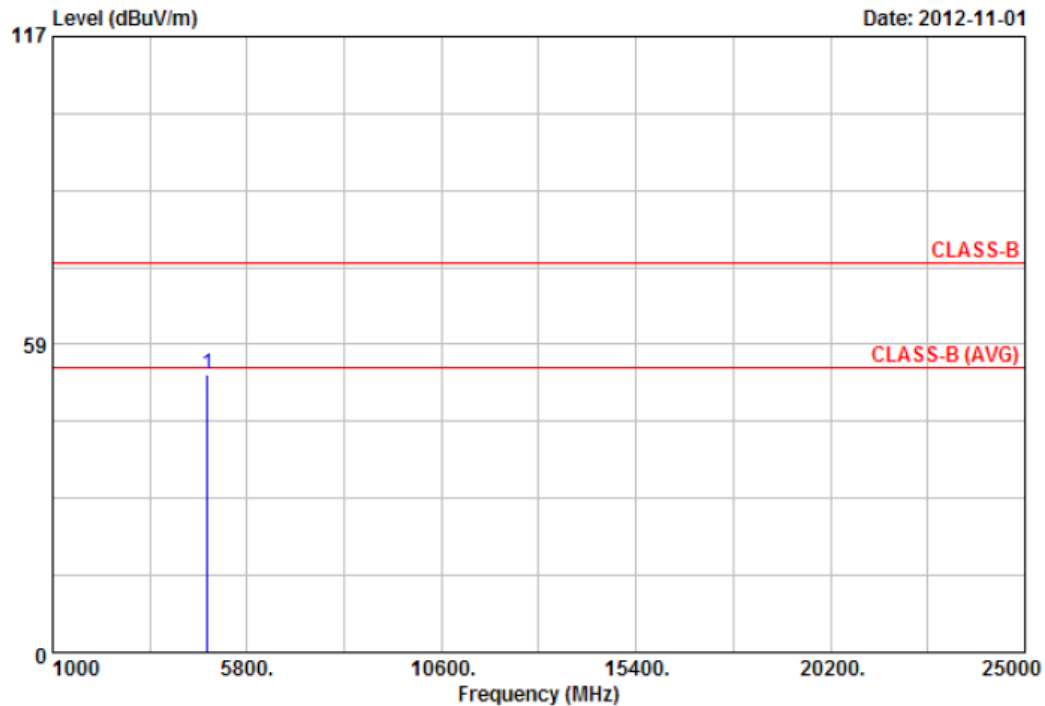


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.05	48.99	3.93	52.92	74.00	-21.08	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH6	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

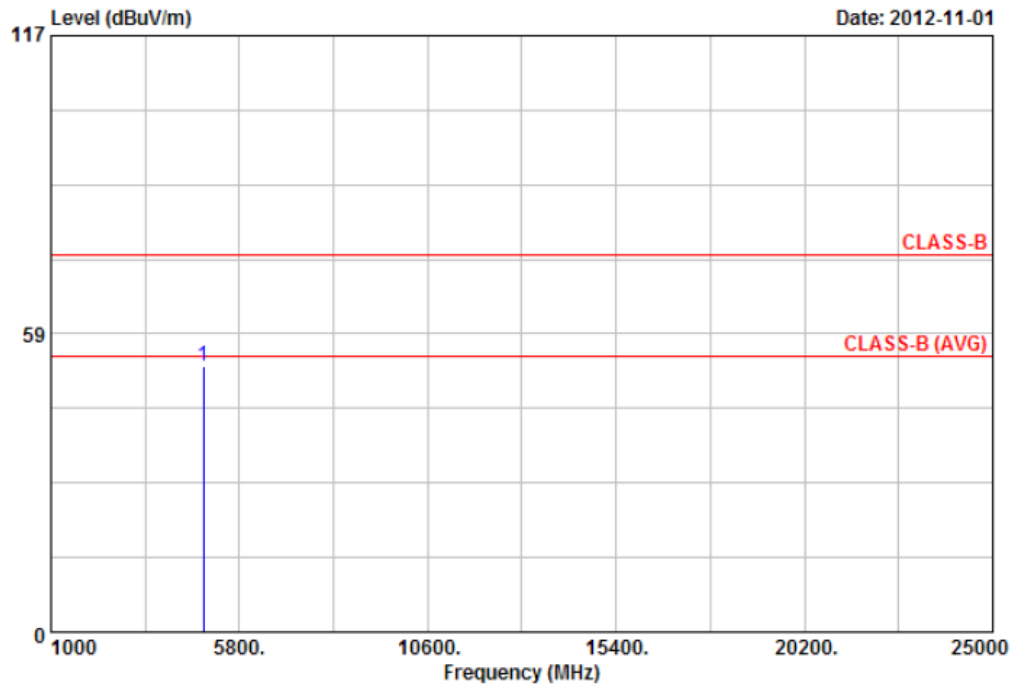


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.40	45.61	6.58	52.19	74.00	-21.81	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH6	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

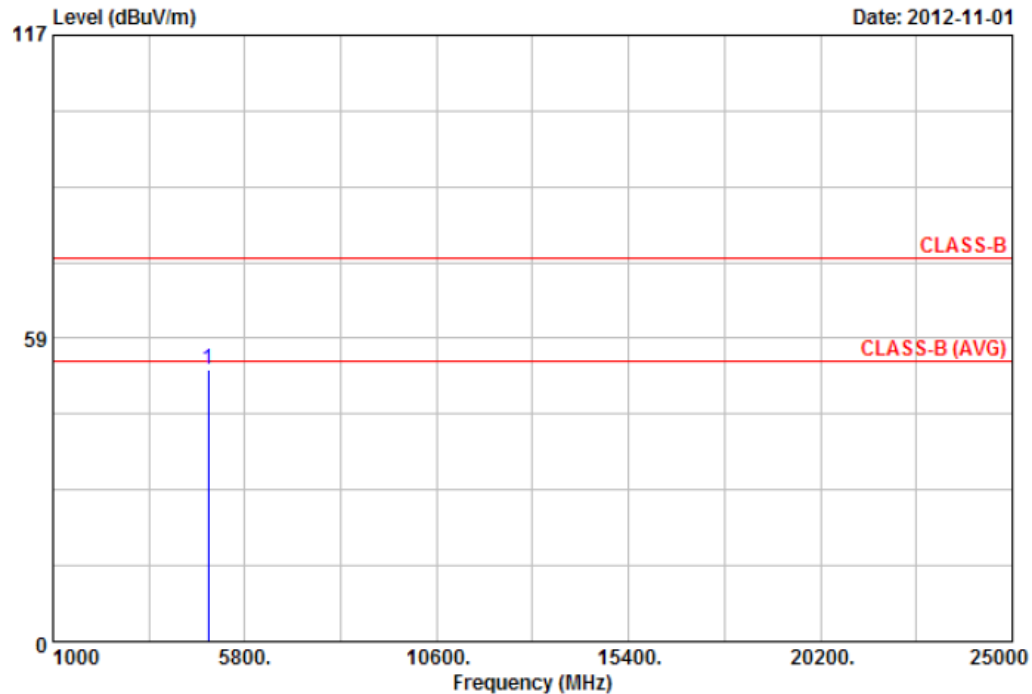


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.28	47.66	4.72	52.38	74.00	-21.62	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH11	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

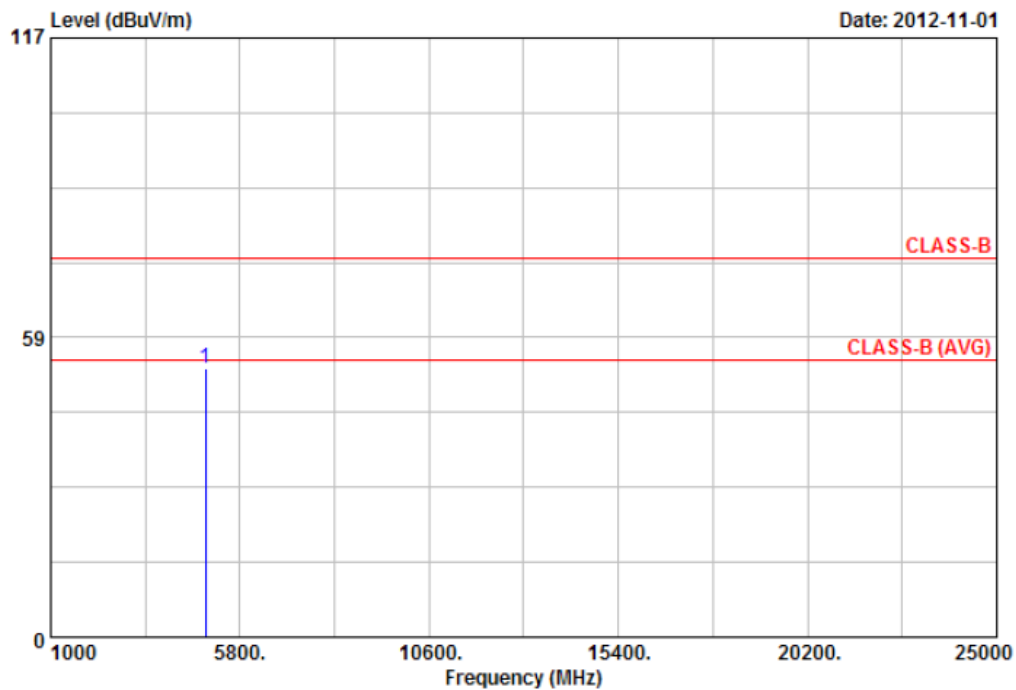


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4922.10	45.34	7.15	52.49	74.00	-21.51	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH11	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

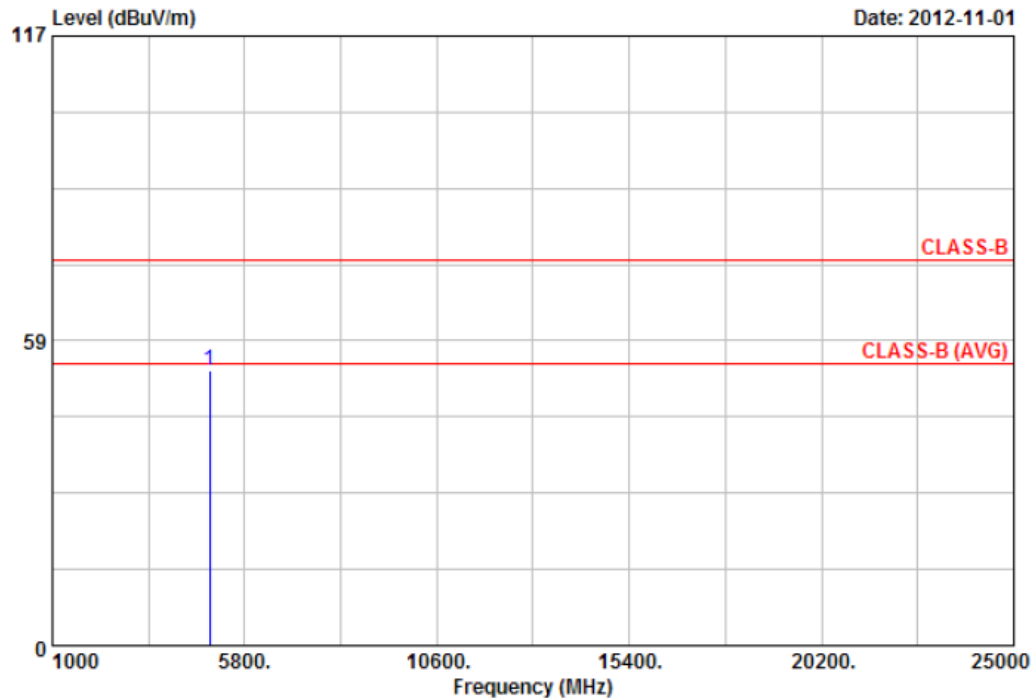


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4922.75	47.49	5.15	52.64	74.00	-21.36	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

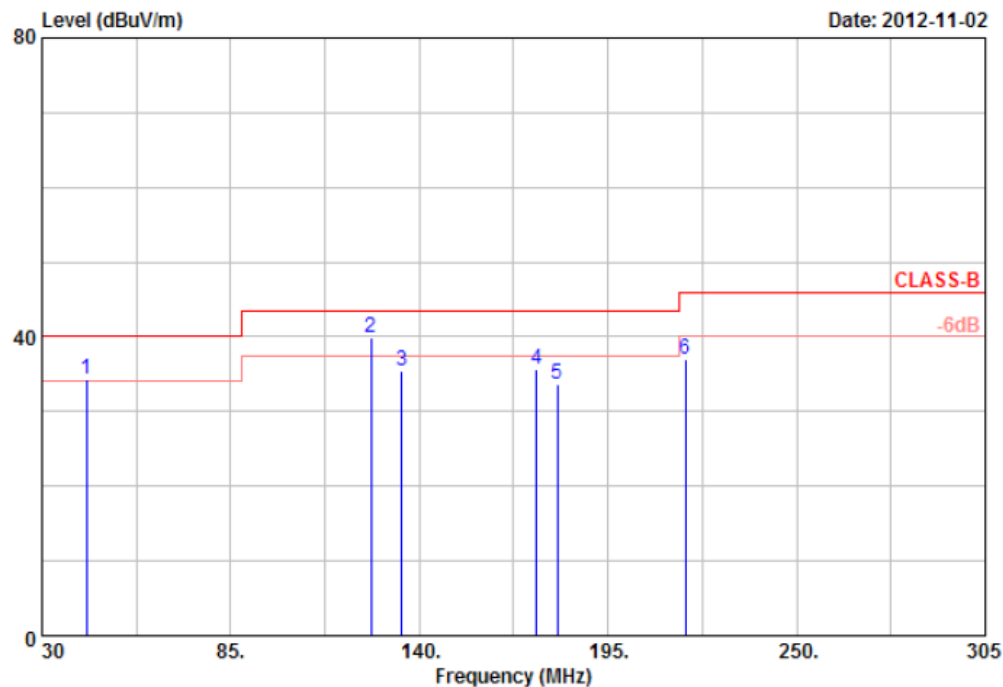


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	42.93	35.65	-1.29	34.36	40.00	-5.64	QP	100	360
2	126.00	45.54	-5.57	39.97	43.50	-3.53	QP	100	360
3	135.00	41.66	-6.13	35.53	43.50	-7.97	Peak	100	360
4	174.20	48.34	-12.67	35.67	43.50	-7.83	Peak	100	360
5	180.20	38.78	-5.24	33.54	43.50	-9.96	Peak	100	360
6	217.50	43.49	-6.41	37.08	46.00	-8.92	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

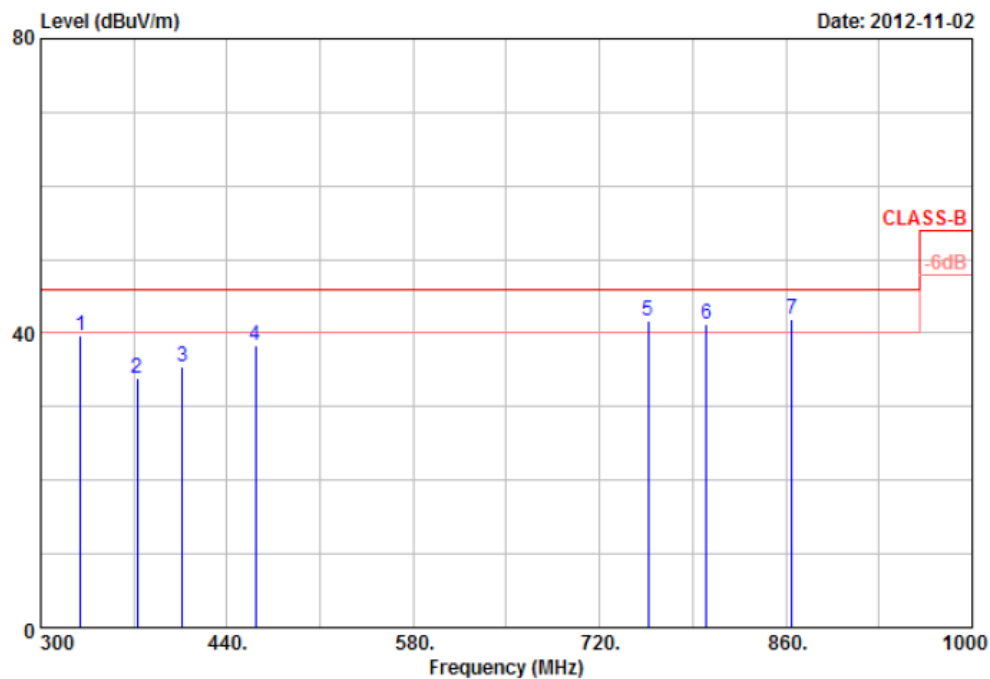


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	330.15	47.22	-7.62	39.60	46.00	-6.40	Peak	100	0
2	372.75	42.57	-8.61	33.96	46.00	-12.04	Peak	100	0
3	406.50	41.26	-5.92	35.34	46.00	-10.66	Peak	100	0
4	461.70	45.64	-7.37	38.27	46.00	-7.73	Peak	100	0
5	756.40	38.66	3.00	41.66	46.00	-4.34	QP	100	0
6	800.50	35.56	5.56	41.12	46.00	-4.88	QP	100	0
7	864.25	33.34	8.64	41.98	46.00	-4.02	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

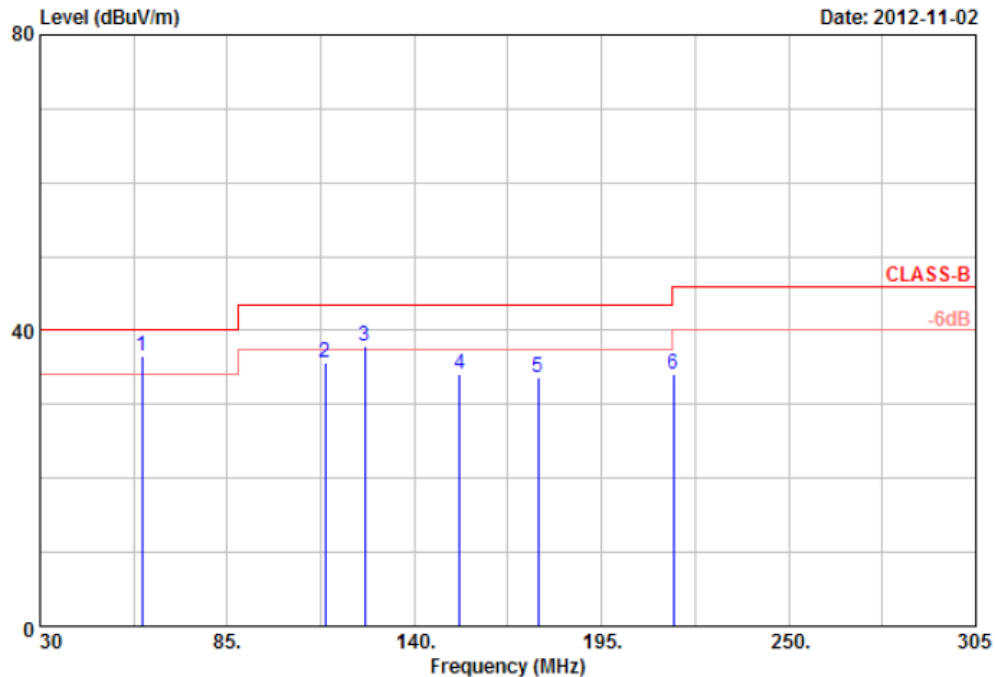


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	59.98	53.77	-17.29	36.48	40.00	-3.52	QP	100	360
2	113.88	54.70	-19.01	35.69	43.50	-7.81	Peak	100	360
3	125.50	55.65	-17.83	37.82	43.50	-5.68	QP	100	360
4	153.20	49.47	-15.27	34.20	43.50	-9.30	Peak	100	360
5	176.30	52.54	-18.80	33.74	43.50	-9.76	Peak	100	360
6	216.18	50.30	-16.23	34.07	46.00	-11.93	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

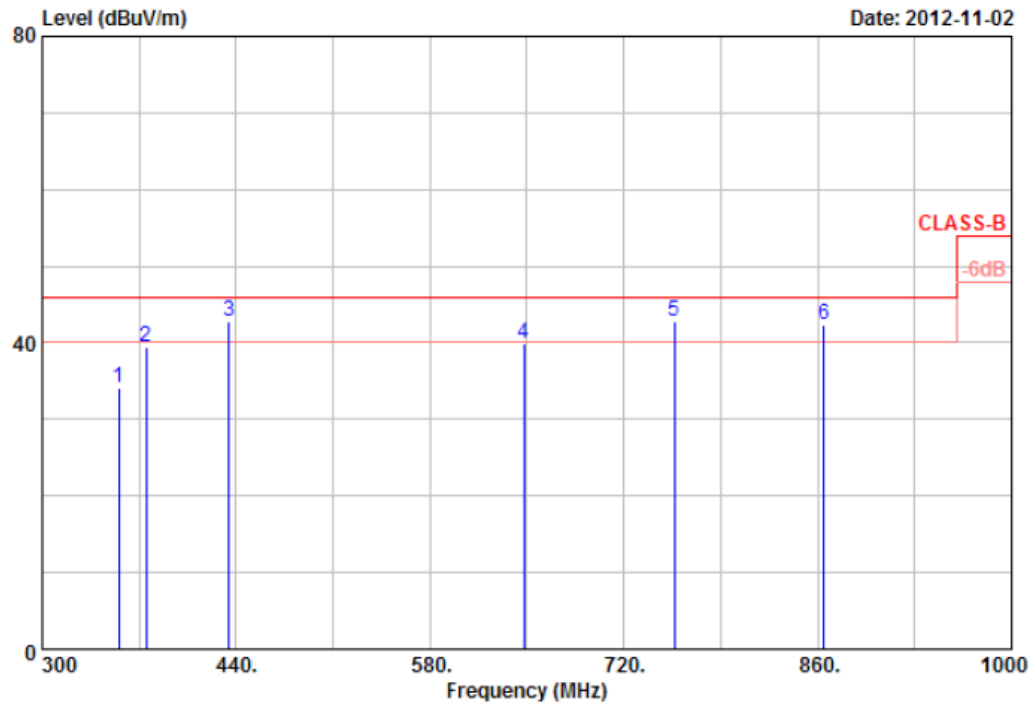


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	355.30	44.52	-10.47	34.05	46.00	-11.95	Peak	100	0
2	374.90	51.12	-11.64	39.48	46.00	-6.52	Peak	100	0
3	435.10	49.40	-6.64	42.76	46.00	-3.24	QP	100	0
4	647.90	39.69	0.25	39.94	46.00	-6.06	QP	100	0
5	756.40	39.64	3.05	42.69	46.00	-3.31	QP	100	0
6	864.20	37.39	5.06	42.45	46.00	-3.55	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

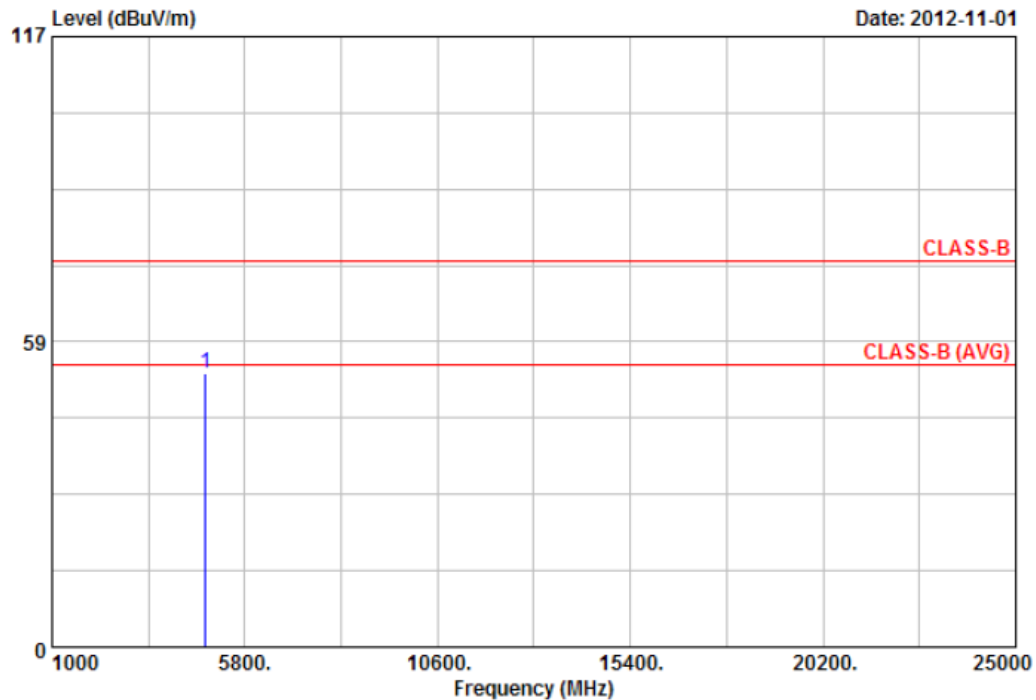


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.10	46.77	5.61	52.38	74.00	-21.62	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

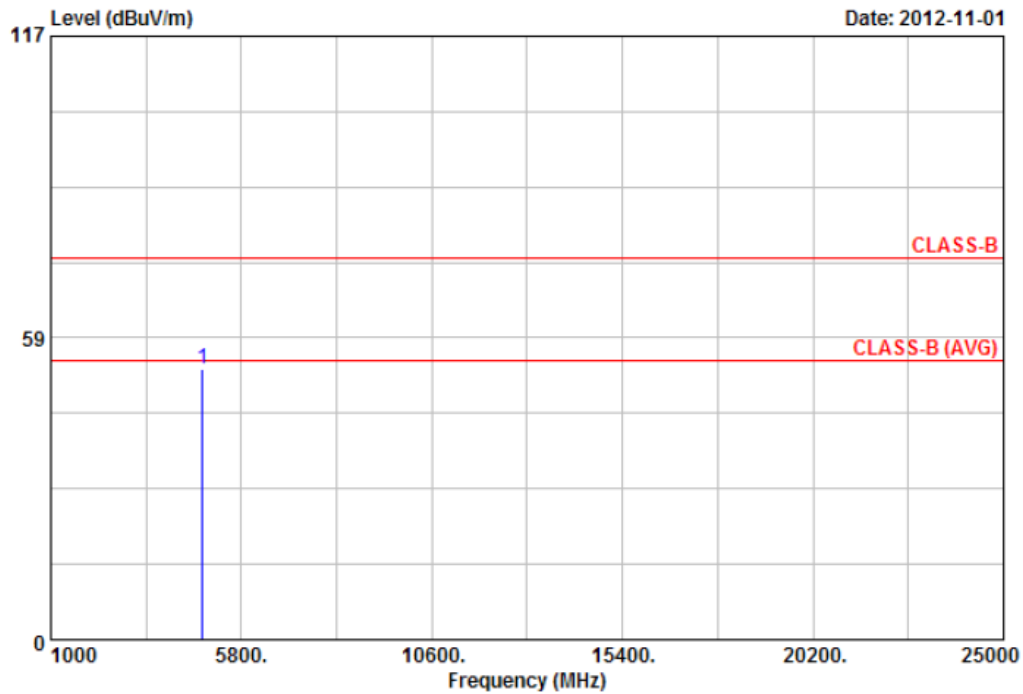


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4822.80	48.67	3.93	52.60	74.00	-21.40	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11n HT20, CH6	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

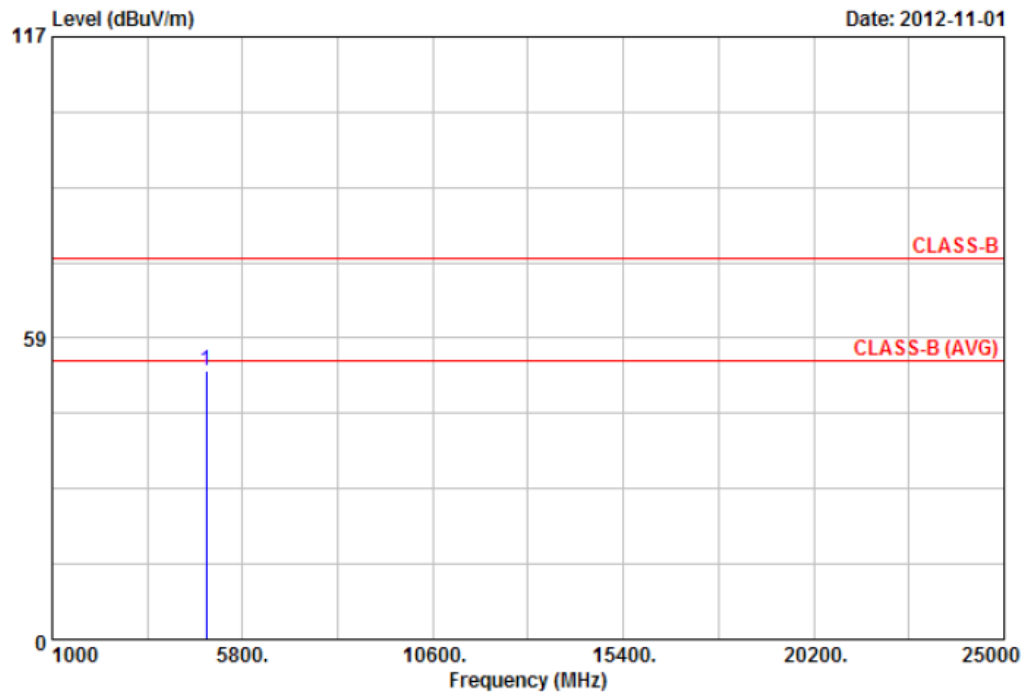


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.70	45.60	6.60	52.20	74.00	-21.80	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11n HT20, CH6	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

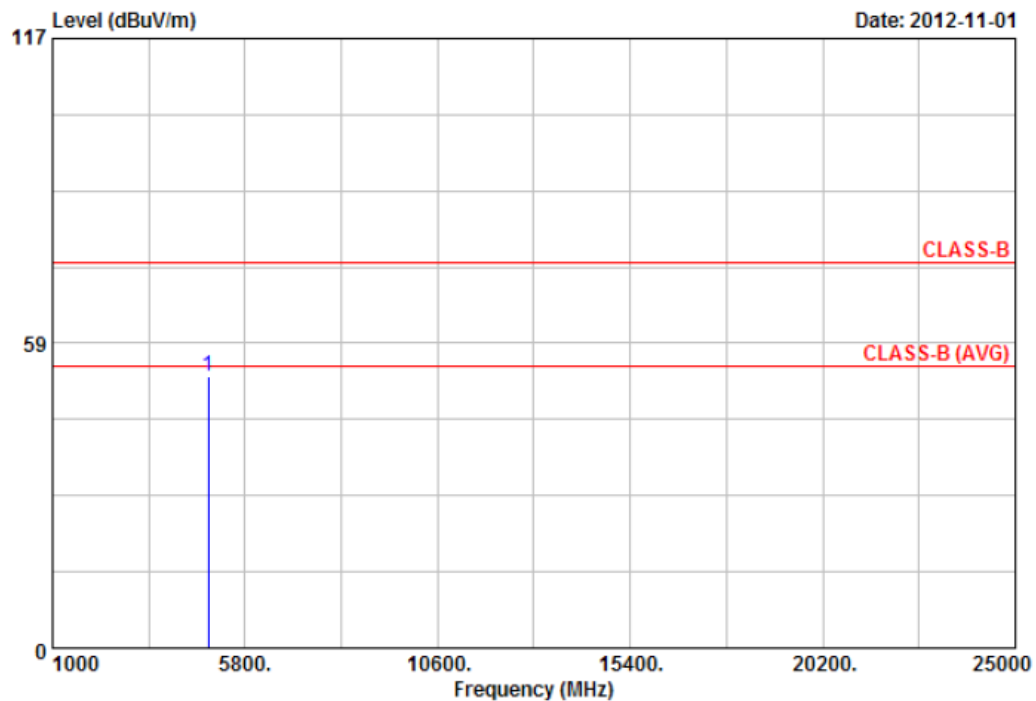


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4875.45	47.54	4.76	52.30	74.00	-21.70	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 2	: 802.11n HT20, CH11	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

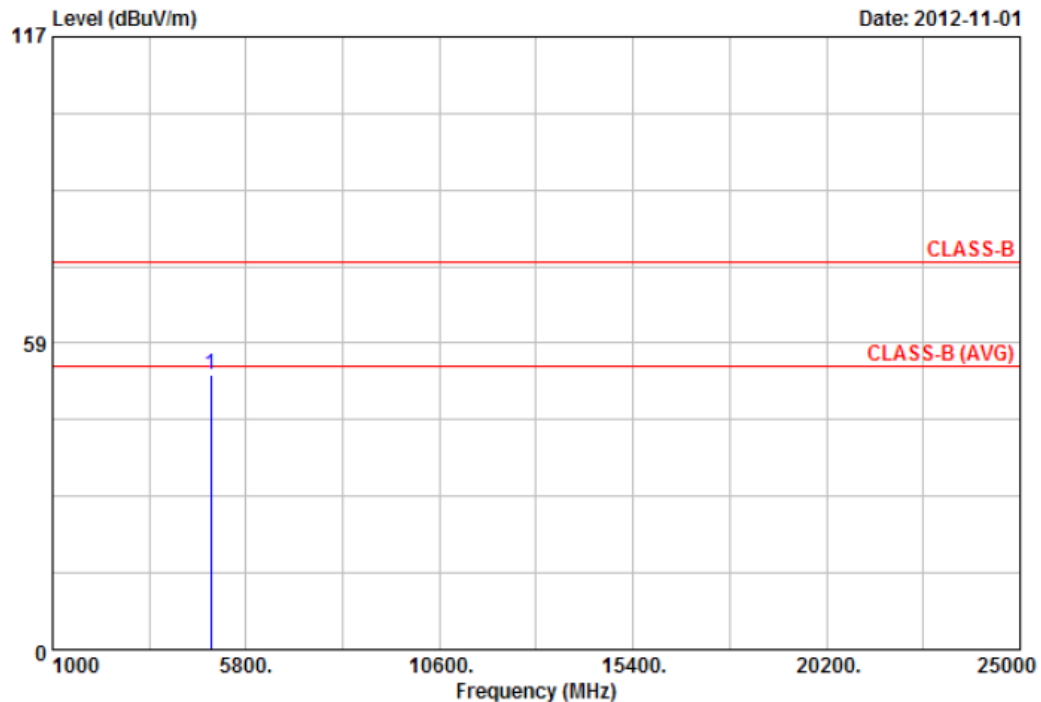


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.80	45.23	7.16	52.39	74.00	-21.61	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11n HT20, CH11	Temperature	: 25 °C
Test Date	: Nov. 01, 2012	Humidity	: 51 %

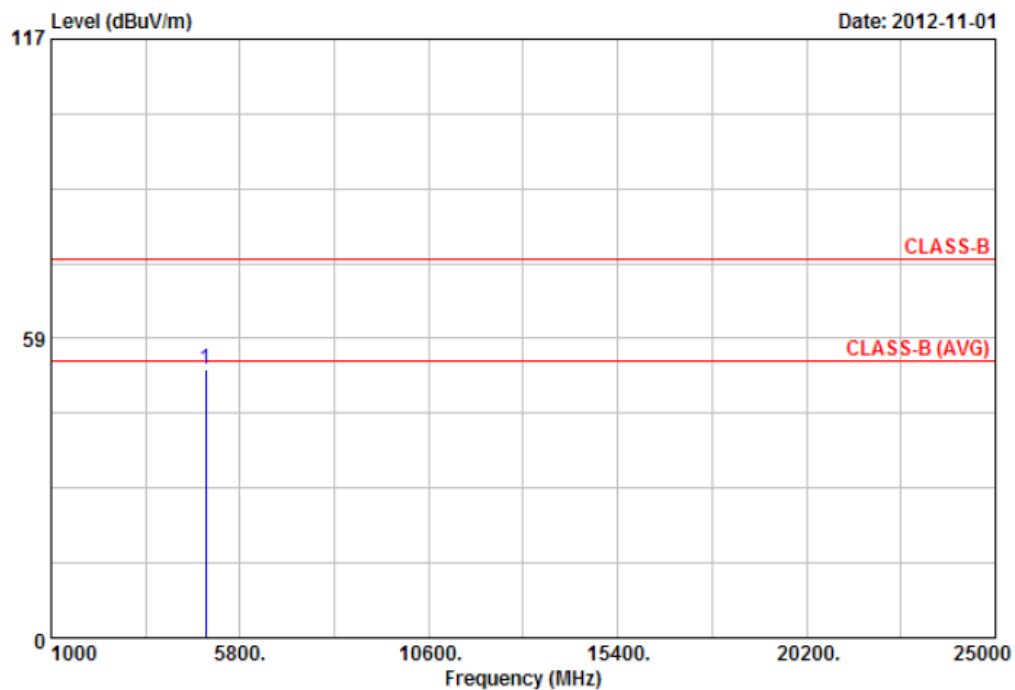


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.38	47.42	5.15	52.57	74.00	-21.43	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured. (The worst case noise floor measurements value is 47.93 dBuV at 16.10GHz)
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 3	: 802.11n HT40, CH3	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

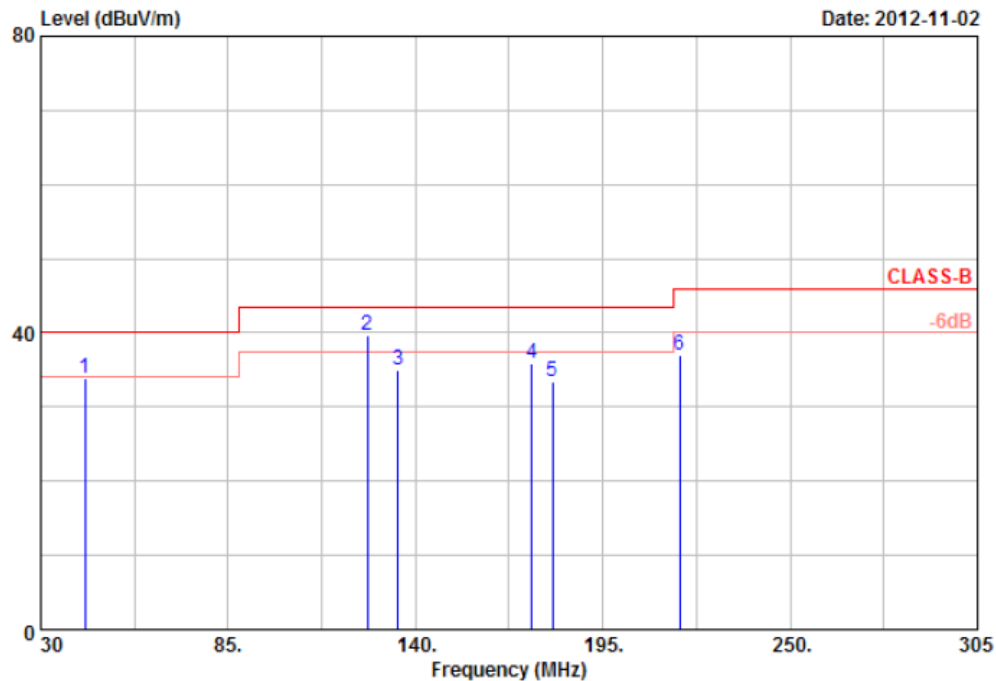


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	42.93	35.23	-1.29	33.94	40.00	-6.06	Peak	100	360
2	126.00	45.24	-5.57	39.67	43.50	-3.83	QP	100	360
3	135.00	41.16	-6.13	35.03	43.50	-8.47	Peak	100	360
4	174.20	48.54	-12.67	35.87	43.50	-7.63	Peak	100	360
5	180.20	38.58	-5.24	33.34	43.50	-10.16	Peak	100	360
6	217.50	43.49	-6.41	37.08	46.00	-8.92	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 3	: 802.11n HT40, CH3	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

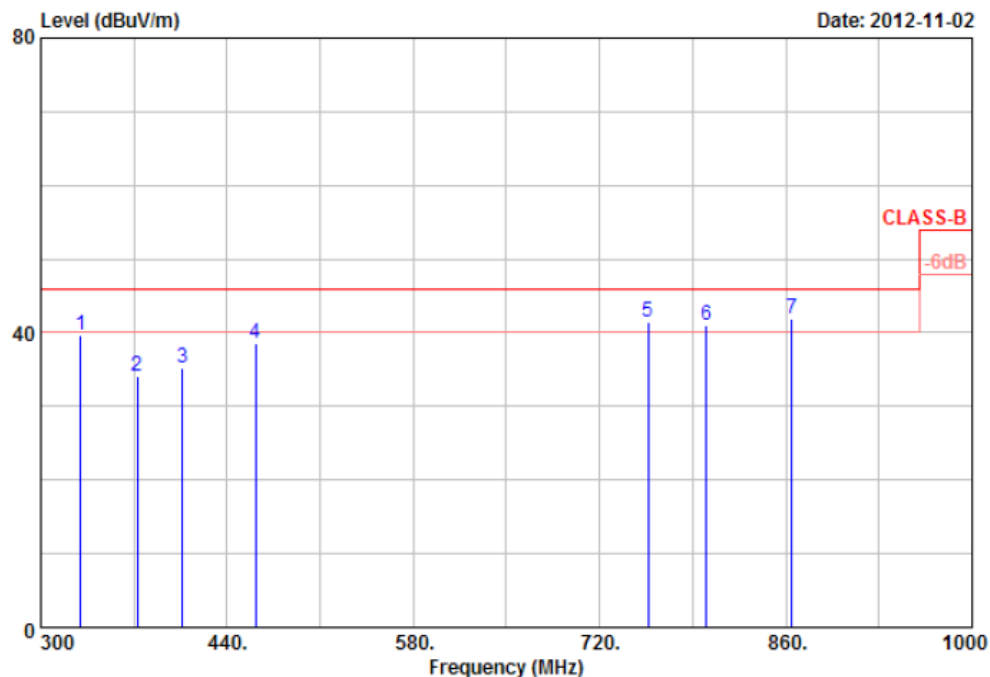


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	330.15	47.22	-7.62	39.60	46.00	-6.40	Peak	100	0
2	372.75	42.67	-8.61	34.06	46.00	-11.94	Peak	100	0
3	406.50	41.16	-5.92	35.24	46.00	-10.76	Peak	100	0
4	461.70	45.84	-7.37	38.47	46.00	-7.53	Peak	100	0
5	756.40	38.52	3.00	41.52	46.00	-4.48	QP	100	0
6	800.50	35.46	5.56	41.02	46.00	-4.98	QP	100	0
7	864.25	33.24	8.64	41.88	46.00	-4.12	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 3	: 802.11n HT40, CH3	Temperature	: 25 °C
Test Date	: Nov. 02, 2012	Humidity	: 65 %

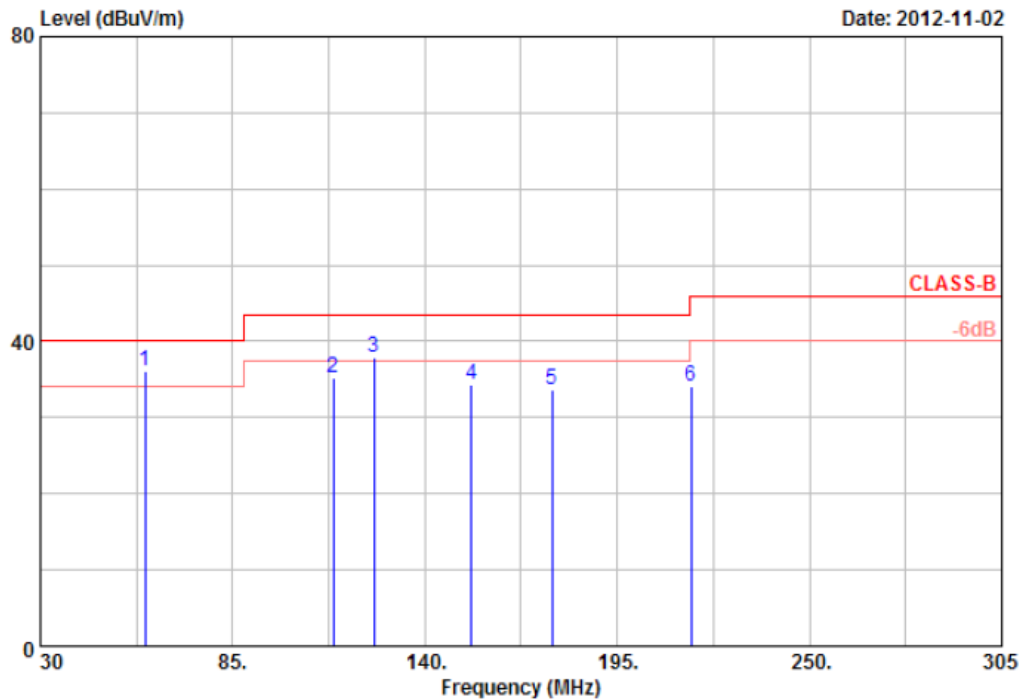

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	59.98	53.28	-17.29	35.99	40.00	-4.01	QP	100	360
2	113.88	54.30	-19.01	35.29	43.50	-8.21	Peak	100	360
3	125.50	55.66	-17.83	37.83	43.50	-5.67	QP	100	360
4	153.20	49.57	-15.27	34.30	43.50	-9.20	Peak	100	360
5	176.30	52.54	-18.80	33.74	43.50	-9.76	Peak	100	360
6	216.18	50.30	-16.23	34.07	46.00	-11.93	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.