



**AEGIS LABS INC.**



Portable Approval  
Test Report  
And Application for Grant of Equipment Authorization

Pertaining To:

<b>EUT</b>	<b>FCC ID:</b>
<b>Wireless Device Server, Model: WBX2100</b>	<b>R68WIBATT</b>

<b>Configuration</b>
<b>With a 2.15dBi Wanshah Antenna</b>

*MEASUREMENTS PERFORMED IN ACCORDANCE WITH*

**Regulatory Standard(s)**

**47 CFR Part 15, Subpart C Section 15.247**

**Test Method:**

ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

**APPLICANT:**

Lantronix, Inc.  
15353 Barranca Parkway  
Irvine, California 92618

Contact(s): Daryl Miller

**PREPARED BY:**

Aegis Labs, Inc.  
22431 Antonio Parkway B160-417  
Rancho S. Margarita, CA 92688

Agent(s): Mr. Steve Kuiper  
Mr. Rick Candelas  
Mr. Ralph Jimenez

	REPORT BODY	APPENDICES	TOTAL PAGES
		A 31	47
PAGES	16		

Test Report #: LANTR-050818F  
Test Report Revision: None

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.

*Page 1 of 16  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT*



AEGIS LABS INC.

## TABLE OF CONTENTS

SECTION	TITLE	PAGE
	<b>COVER SHEET.....</b>	<b>01</b>
	<b>TABLE OF CONTENTS.....</b>	<b>02</b>
<b>1.0</b>	<b>CERTIFICATION OF TEST DATA.....</b>	<b>03</b>
<b>2.0</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>04</b>
<b>3.0</b>	<b>ADMINISTRATIVE DATA AND TEST DESCRIPTION.....</b>	<b>05</b>
<b>4.0</b>	<b>DESCRIPTION OF EUT.....</b>	<b>06</b>
4.1	EUT Description.....	06
4.1.1	Channel Number and Frequencies.....	07
4.2	EUT Configuration.....	08
4.3	List of EUT Sub-Assemblies and Host Equipment.....	09
4.4	I/O Cabling Diagram and Description.....	10
<b>5.0</b>	<b>TEST EQUIPMENT AND TEST SETUPS.....</b>	<b>11</b>
5.1	AC Power Line Conducted Emissions.....	11
5.2	Spurious Radiated Emissions.....	12
5.3	Conducted Emissions At The Antenna Port.....	12
5.4	Test and Measurement Equipment Used.....	13
<b>6.0</b>	<b>SAMPLE CALCULATIONS.....</b>	<b>14</b>
<b>7.0</b>	<b>MODIFICATIONS AND RECOMMENDATIONS.....</b>	<b>16</b>

### APPENDICES

A

Test Data

Page 2 of 16  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## 1.0 CERTIFICATION OF TEST DATA

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual.

Testing and engineering functions provided by Aegis Labs are furnished through the use of part-time, full-time or consulting engineers with the appropriate qualifications to carry out their duties. The intended purpose of this test report is to describe the measurement procedure and to determine whether the equipment under test "EUT" complies with both the conducted and radiated limits. Limits for emissions testing are described under Subpart C of Part 15 of the FCC rules.

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the Equipment Under Test (EUT) under the requirements specified in the emissions standard as described below. The test results contained in this report are only representative of the test sample tested as described in Section 3.0 of this report. Certification of the EUT is required as a prerequisite to marketing as defined in Part 2 of the FCC Rules.

### Report Prepared By:

12/13/05

**Rick Candelas**  
Lab Manager  
Aegis Labs, Inc.

### Report Approved By:

12/13/05

**Steve J. Kuiper**  
Quality Assurance Manager  
Aegis Labs, Inc.



AEGIS LABS INC.

## 2.0 SUMMARY OF TEST RESULTS

The test results provided within this report, indicate that the EUT has been found to be in **COMPLIANCE** with the test specifications based upon the following RF compliance standards:

Pass/Fail determination is based upon the nominal values of the test data.

### 802.11b Mode (2400-2483.5 MHz)

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 9.92 MHz 2437 MHz = 10.17 MHz 2462 MHz = 10.08 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt.	PASSED	2412 MHz = 13.57 dBm = 22.75 mW 2437 MHz = 13.52 dBm = 22.49 mW 2462 MHz = 13.50 dBm = 22.39 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to SAR Test Report
15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets
15.247(c)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets
15.247(d)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -12.00 dB 2437 MHz = -12.33 dB 2462 MHz = -12.83 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets
15.209	Radiated Emissions (30-1000 MHz)	PASSED	See Data Sheets



AEGIS LABS INC.

### 3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

<b>DEVICE TESTED:</b>	ITE Type: Wireless Device Server Model Number(s): WBX2100 Serial Number: ENG002 FCC ID: R68WIBATT
<b>TEST DATE(S):</b>	September 19-24, 2005
<b>DATE EUT RECEIVED:</b>	September 16, 2005
<b>ORIGIN OF TEST SAMPLE(S):</b>	Production Unit
<b>RESPONSIBLE PARTY:</b>	Lantronix, Inc. 15353 Barranca Parkway Irvine, California 92618
<b>CLIENT CONTACT:</b>	Daryl Miller
<b>MANUFACTURER:</b>	Lantronix, Inc.
<b>TEST LOCATION:</b>	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Conducted Site #1 Radiated Site #1
<b>A2LA CERTIFICATE:</b>	1111.01, Valid through February 28, 2006
<b>PURPOSE OF TEST:</b>	To demonstrate compliance with the relevant standards described in Section 2.0 of this report.
<b>TEST(S) PERFORMED:</b>	Refer to Table in Section 2.0 of this report.

All calibration vendors were responsible for certifying Aegis Labs, Inc. test equipment as per the manufacturer's specifications and that the equipment is calibrated using instruments and standards where the accuracy is traceable to the National Institute of Standards and Technology (NIST). Calibration of all test equipment conforms to ANSI/NCSL Z540-1 and ISO 10012-1 and/or ISO/IEC Guide 17025 compliance (Additionally, other pertinent test equipment will carry MIL-STD-45662A). All calibration documents are on file with Aegis Labs, Inc., with copies provided upon request.

Page 5 of 16  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## 4.0 DESCRIPTION OF EUT

### 4.1 EUT Description

<b>Equipment Under Test (EUT)</b>	
<b>Trade Name:</b>	Wireless Device Server
<b>Model Number:</b>	WBX2100
<b>Frequency Range:</b>	802.11b = 2400 – 2483.5 MHz
<b>Type of Transmission:</b>	Direct Sequence Spread Spectrum
<b>Transfer Rate:</b>	1/5.5/11 Mbps for 802.11b mode
<b>Number of Channels:</b>	802.11b mode (2400-2483.5 MHz) = 11
<b>Modulation Type:</b>	DBPSK, DQPSK, CCK
<b>Antenna Type:</b>	External Antenna with Reverse SMA connector
<b>Antenna Gain (See Note 2):</b>	2.4 GHz = 2.15 dBi
<b>Transmit Output Power:</b>	13 dBm (Typical) for 802.11b mode Please see Appendix A (Data Sheets) for actual output power.
<b>Power Supply:</b>	12VDC input from external 120VAC Adapter
<b>Number of External Test Ports Exercised:</b>	1 Antenna Port, 1 Setup Ports, 1 Meter Port

The Wireless Device Server provides a network-enabling solution based on the IEEE 802.11b wireless standard. WBX2100 allows Original Equipment Manufacturers (OEMs) to add wireless connectivity to their products by incorporating it onto a circuit board.

It was tested as a standalone device with a Wanshah (PN: WSS002) antenna continuously transmitting and receiving from the antenna port. The end use will allow the EUT to transfer data from a meter to a workstation via a network enabled through wireless access. The meter plugs into a wireless unit located in a meter tote. Data is transmitted through access points installed on the network. The EUT was not tested in the tote because it can possibly be taken out while in operation.

**NOTE 1:** For a more detailed description, please refer to the manufacturer's specifications or User's Manual.

**NOTE 2:** The EUT was tested with a set of antennas (Wanshah). (Refer to the antenna specifications exhibits).



AEGIS LABS INC.

#### 4.1.1 Channel Number and Frequencies

802.11b Mode	
Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

Page 7 of 16  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

#### 4.2 EUT Configuration

The EUT was tested as a standalone device connected to a remotely located Dell computer via its setup port. The Dell computer was then connected to a Kogi monitor, a Dell keyboard and mouse via its video, keyboard and mouse ports respectively. A Wanshih external antenna was connected to the EUT's antenna port via its reverse SMA antenna connector. Data for the Wanshih antenna can be found in Appendix A (Data Sheets).

The low, middle, and high channels were tested in 802.11b mode. The EUT was placed in either continuous transmit or continuous receive mode by a program provided by the manufacturer (*RTS Ver. 2\_3*).

Page 8 of 16  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

#### 4.3 List of EUT, Sub-Assemblies, and Host Equipment

<b>LIST OF EUT AND SUB-ASSEMBLIES</b>			
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>
Wireless Device Server	Lantronix, Inc.	WBX2100	ENG002
<b>EUT Sub-Assemblies</b>			
External Antenna	Wanshih	WSS002	N/A
AC Adaptor	Hon-Kwang	D12-10-1000	N/A

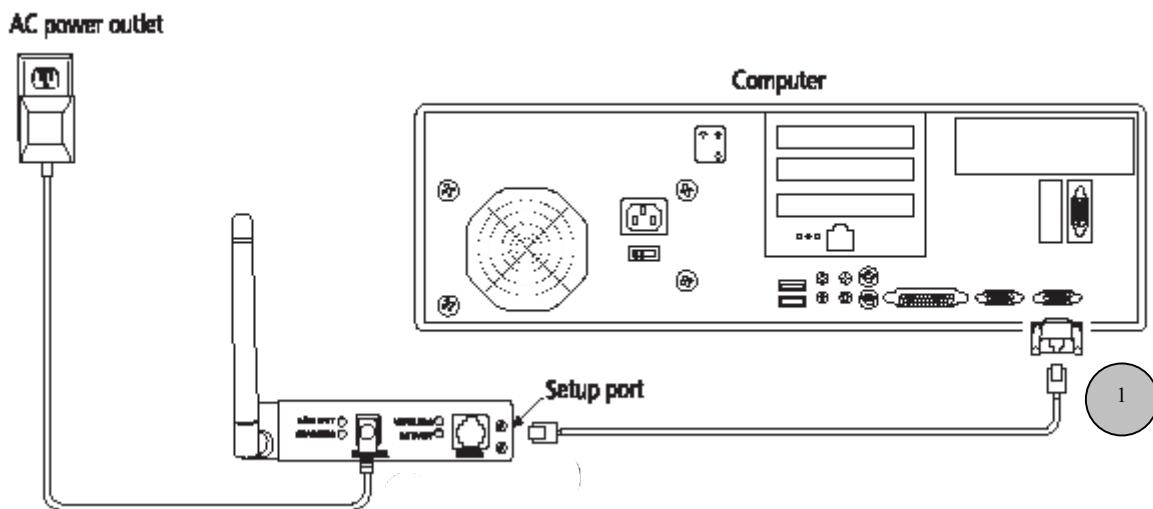
<b>HOST EQUIPMENT LIST</b>			
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>
Computer	Dell	MMS	2V9N10B
LCD Monitor	Kogi	L7CH	G7NX33800158
Keyboard	Dell	KB-9908	1358924A13400720B
Mouse	Dell	SAGM002	133771SYS1440074

NOTE: All the power cords of the above support equipment are standard non-shielded, 1.8 meters long.



AEGIS LABS INC.

#### 4.4 I/O Cabling Diagram and Description



Cable 1: This is a 25-foot unshielded cable connecting the EUT's setup port to the Dell computer. It has a plastic RJ-11 type connector at the EUT end and is connected to the computer via a DB-9 to RJ-11 adapter.

Cable 2: This is a 6-foot braid and foil shielded round cable connecting the Dell computer to the Kogi LCD monitor. It has metallic DB-15 type connector at the computer end and is hardwired to the monitor. The cable is bundled to a length of one meter and the shield of the cable is grounded to the chassis of both devices via the connector shells.

Cable 3: This is a 6-foot braid and foil shielded round cable connecting the Dell computer to the Dell keyboard. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the keyboard. The shield of the cable is grounded to the chassis of the computer via the connector shell.

Cable 4: This is a 6-foot braid and foil shielded round cable connecting the Dell computer to the Dell mouse. It has a metallic 6-pin mini din type connector at the computer end and is hardwired to the mouse. The shield of the cable is grounded to the chassis of the computer via the connector shell.



AEGIS LABS INC.

## 5.0 TEST EQUIPMENT AND TEST SETUPS

The test equipment settings and functions are selected using the guidance of ANSI C63.4-2003. All test equipment setups and operations during conducted and radiated emissions testing are in accordance with this reference document.

### 5.1 AC Power Line Conducted Emissions

During conducted emissions measurements, a spectrum analyzer was used as the measuring instrument along with a preselector and quasi-peak detector. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage. The conducted emissions from the EUT in the frequency range from 150 kHz to 30 MHz were captured for graphical display through the use of automated LABVIEW EMI measurement software. All graphical readings were measured in the “Peak” mode only to reduce testing time. Upon completion of the graphical scan, the test lab personnel performed the conducted measurement scan manually using the spectrum analyzer front panel keys. All peak measurements coming within 3 dB of the limit line were “Averaged” and/or “Quasi-Peaked” and denoted appropriately in the EXCEL spreadsheet.

The Equipment Under Test (EUT) was configured as a system with peripherals connected, so that at least one interface port of each type is connected to one external peripheral when tested for conducted emissions according to ANSI C63.4: 2003. Excess power cord length was wrapped in a bundle 30 to 40 centimeters in length near the center of the cord. The EUT was tested in a tabletop configuration.

The emission readings for Line 1 and Line 2 are highlighted on the data sheets in Appendix A. The graphical scans only reflects peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak readings which ever applies.



AEGIS LABS INC.

## 5.2 Spurious Radiated Emissions

A spectrum analyzer was used as the measuring instrumentation along with a preselector and quasi-peak-detector. The pre-amplifiers were used to increase the sensitivity of the instrument. The spectrum analyzer was used in the peak detector mode with the “max-hold” feature activated and in Positive Peak mode. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak detector was used only for those readings, which are marked accordingly in the data sheet. The effective measurement bandwidth used for the radiated emissions test was 120 kHz for (30 MHz- 1000 MHz). The spectrum analyzer operated such that the modulation of the signal was filtered out to set the analyzer in linear mode. For testing beyond 1000 MHz a spectrum analyzer capable of taking reading above 1000 MHz was connected to the high frequency amplifier, where these measurement readings were taken with the transducer placed at a 3-meter test distance from the EUT.

The Open Area Test Sites (OATS) was used for radiated emission testing. These test sites are designed according to ANSI C63.4: 2003 and ANSI C63.7: 1992 guidelines. The Measurements were conducted in accordance with ANSI C63.4: 2003 and ANSI C63.7: 1992 requirements.

Broadband biconical, log periodic, and horn antennas were used as transducers during the measurement reading phase. The frequency spans were wide (30 MHz-88 MHz, 88 MHz- 216 MHz, 216 MHz- 300 MHz, and 300 MHz- 1000 MHz). After 1000 MHz the horn antenna was used to measure emissions. The emission readings in both horizontal and vertical polarities are highlighted on the data sheets in Appendix A.

## 5.3 Conducted Emissions at the Antenna Port

A spectrum analyzer or power meter was used as the measuring instrumentation along with an attenuator and/or filter connected to the EUT antenna port. The attenuator and filters are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission. The instruments recorded the measured readings with the bandwidths (video and resolution) set in accordance with the FCC Rules and regulations.

For the power out measurements in 802.11b and 802.11g modes a peak power meter was used along with a peak power sensor with a wide enough bandwidth to capture the entire fundamental transmission. For 802.11a mode a spectrum analyzer with “Channel Power Measurement” function was used to measure the peak output power.

The measured readings are on the data sheets in Appendix A.



AEGIS LABS INC.

## 5.4 Test and Measurement Equipment Used

TEST EQUIPMENT USED					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Calibration Cycle
EMI Receiver - RF Section	Hewlett Packard	85462A	3737A00407	09/02/06	1 Year
EMI Receiver – RF Filter Section	Hewlett Packard	85460A	3704A00399	09/02/06	1 Year
10dB Attenuator	Radiall	R412710000	Lot: 9624	07/09/06	1 Year
LISN (EUT)	Solar Electronics	9252-50-R-24-BNC	961025	04/01/06	1 Year
LISN (Access)	Solar Electronics	9252-50-R-24-BNC	961024	07/05/06	1 Year
Spectrum Analyzer	Agilent	8565EC	3946A00245	07/29/06	1 Years
1-18 GHz Preamplifier	Miteq	Aegis-Oats1-1-18	001	07/27/06	1 Years
1-18 GHz Horn Antenna	ETS	3117	00029614	07/23/06	1 Years
2400-2483.5 MHz Notch Filter	Micro-Tronics	BRM50702-02	003	04/21/06	1 Years
Antenna - Biconical	ETS	3110B	3383	03/18/06	1 Year
Antenna - Log Periodic	ETS	3148	00047943	05/23/06	1 Year
18-26.5 GHz Preamplified Antenna – Horn	Custom Microwave	H042	001	11/04/06	1 Year
Power Meter	Anritsu	ML2487A	6K00001785	04/05/06	1 Years
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	04/05/06	1 Years



AEGIS LABS INC.

## 6.0 SAMPLE CALCULATIONS

If a preamplifier is used during the Radiated Emissions Testing, it is required that the amplifier gain be subtracted from the Spectrum Analyzer (Meter) Reading. In addition, a correction factor for the antenna, cable and a distance factor, if any, must be applied to the Meter Reading before a true field strength reading can be obtained. In the Automatic Mode of A.R.M.S. measurements, these considerations are automatically presented as a part of the printout. In the case of manual measurements and for greater efficiency and convenience, usage of the calibration correction factors in the Appendices is necessary to calculate the Corrected Meter Reading. These correlation factors for each meter reading, shall be modified to reflect these correlation factors at each frequency value so that the meter readings can be compared directly to the modified specification limit. This modified specification limit is referred to as the "Corrected Meter Reading Limit" (CML).

The equation shall be derived in the following manner:

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - G - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + G + D$$

For the manual mode of measurement, a table of corrected meter reading limits shall be used to permit immediate comparison of the meter reading to determine if the measured emission amplitude exceeded the specification limit at that specific frequency. There shall be two calculation sheets done, one for three meter and one for ten-meter measurement distances, where applicable. The correction factors for the antenna and the amplifier gain are attached in the Appendices.



AEGIS LABS INC.

## 6.0 Sample Calculations (Continued)

Peak Transmit Power Output:

A correction factor for the cable must be applied to the Conducted Power before a true power reading can be obtained. This is referred to as the “Corrected Power” (CP).

The equation shall be derived in the following manner:

Corrected Power Reading = Conducted Power Reading + C

Where, C = Cable Factor

The conducted power is taken in units of dBm. To obtain units of mW the following equation is used:

$$mW = 10^{(dBm/10)}$$



*AEGIS LABS INC.*

## **7.0 MODIFICATIONS AND RECOMMENDATIONS**

No modifications were made to the EUT.

*Page 16 of 16  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT*



**AEGIS LABS INC.**

## **APPENDIX A**

### ***TEST DATA***

*Page 1 of 31 (Appendix A)*  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## AC POWER LINE CONDUCTED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Lantronix, Inc.	<b>DATE:</b>	09/21/05
<b>EUT:</b>	Wireless Device Server	<b>PROJECT NUMBER:</b>	LANTR-040324-03
<b>MODEL NUMBER:</b>	WBX2100	<b>TEST ENGINEER:</b>	RJ
<b>SERIAL NUMBER:</b>	ENG002	<b>SITE #:</b>	1
<b>CONFIGURATION:</b>	Tested in wireless mode with the Wanshuih Antenna.	<b>TEMPERATURE:</b>	32 C
		<b>HUMIDITY:</b>	29% RH
		<b>TIME:</b>	3:15 PM

<b>Standard:</b>	FCC CFR 47, Part 15.207
<b>Description:</b>	AC Power Line Conducted Emissions
<b>Results:</b>	Passes the conducted limits

Conducted Limits		
Frequency (MHz)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

NOTE: During preliminary scans, there wasn't any difference which mode, channel, or data rate was used with the EUT; therefore only 802.11b mode at Channel 1 with a data rate of 1 Mbps was used for final testing.

Page 2 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT

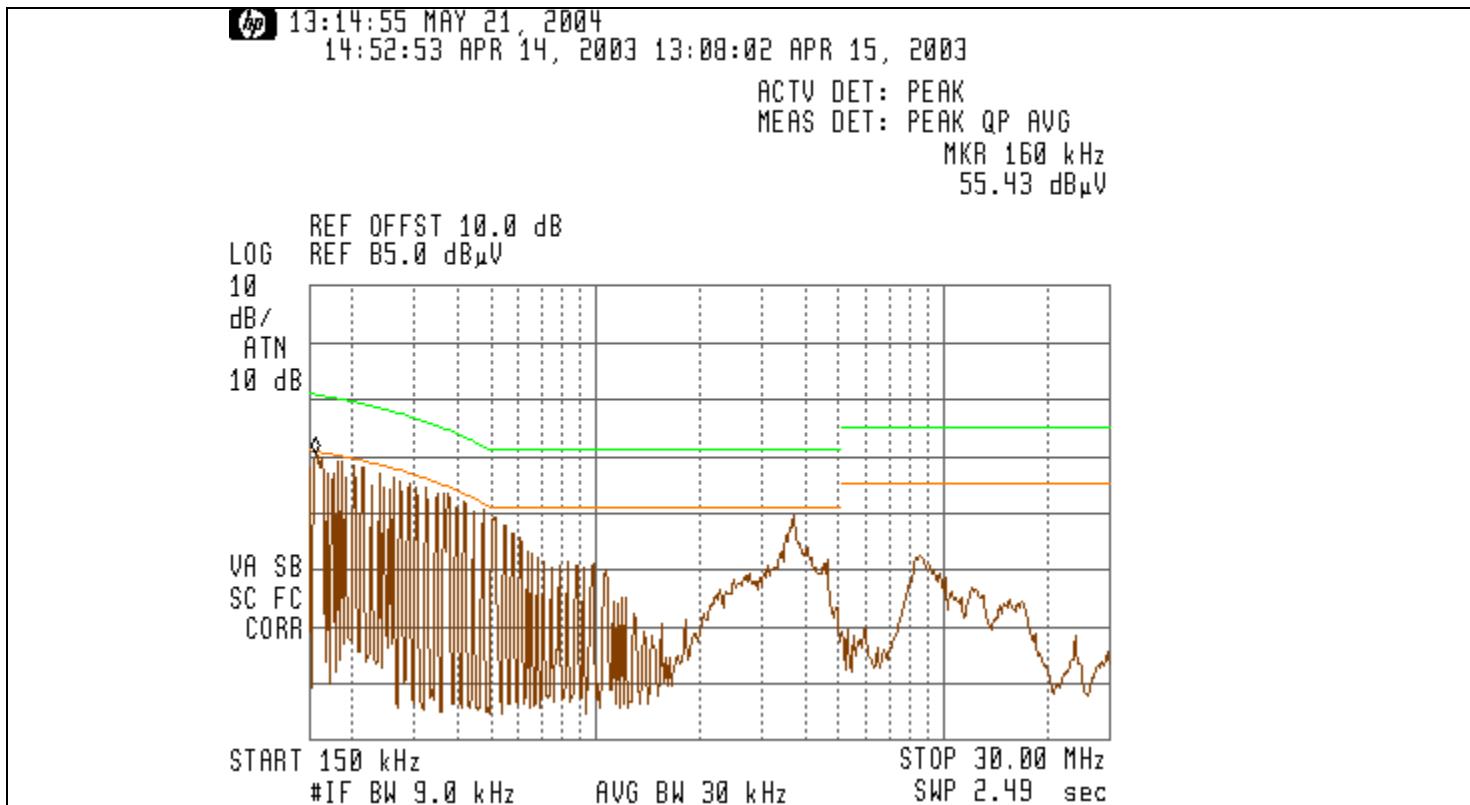


AEGIS LABS INC.

## AC Power Line Conducted Emissions Test Results (Continued)

## CONDUCTED EMISSIONS – LINE 1

Freq. (MHz)	Meter Reading (dB <sub>u</sub> V)	Detector (PK/QP/AV)	Average Limit (dB <sub>u</sub> V)	Average Delta(dB)	Quasi-Peak Limit (dB <sub>u</sub> V)	Quasi-Peak Delta(dB)
0.1500	18.28	AV	56.00	-37.72	66.00	-47.72
0.1600	18.17	AV	55.71	-37.54	65.71	-47.54
0.1700	18.15	AV	55.43	-37.28	65.43	-47.28
0.1800	16.54	AV	55.14	-38.60	65.14	-48.60
0.2000	17.96	AV	54.57	-36.61	64.57	-46.61
0.2100	17.16	AV	54.29	-37.13	64.29	-47.13



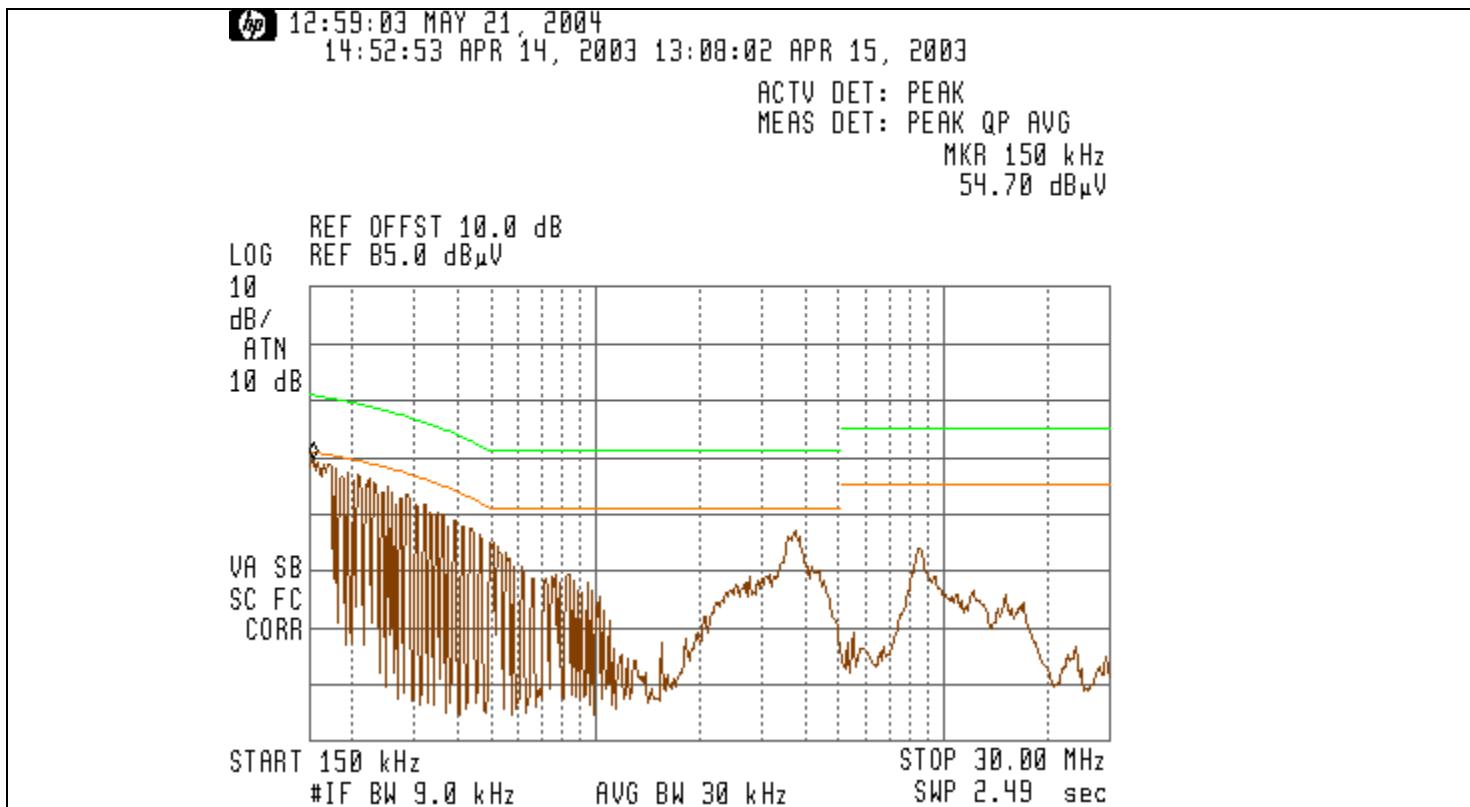
Page 3 of 31 (Appendix A)  
 Report Number: LANTR-050818F  
 FCC ID: R68WIBATT



AEGIS LABS INC.

## AC Power Line Conducted Emissions Test Results (Continued)

CONDUCTED EMISSIONS - LINE 2						
Freq. (MHz)	Meter Reading (dBuV)	Detector (PK/QP/AV)	Average Limit (dBuV)	Average Delta(dB)	Quasi-Peak Limit (dBuV)	Quasi-Peak Delta(dB)
0.1500	17.00	AV	56.00	-39.00	66.00	-49.00
0.1800	15.73	AV	55.14	-39.41	65.14	-49.41
0.1900	17.35	AV	54.86	-37.51	64.86	-47.51
0.2000	17.71	AV	54.57	-36.86	64.57	-46.86
0.2100	16.36	AV	54.29	-37.93	64.29	-47.93
0.2300	14.80	AV	53.71	-38.91	63.71	-48.91



Page 4 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## SPURIOUS RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Lantronix, Inc.	<b>DATE:</b>	09/21/05
<b>EUT:</b>	Wireless Device Server	<b>PROJECT NUMBER:</b>	LANTR-040324-01
<b>MODEL NUMBER:</b>	WBX2100	<b>TEST ENGINEER:</b>	RJ
<b>SERIAL NUMBER:</b>	ENG002	<b>SITE #:</b>	1
<b>CONFIGURATION:</b>	Tested in wireless mode with the Wanshih Antenna.	<b>TEMPERATURE:</b>	31 C
		<b>HUMIDITY:</b>	33% RH
		<b>TIME:</b>	10:00 AM

<b>Standard:</b>	FCC Pt. 15.209
<b>Description:</b>	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Sec. 15.209.
<b>Results:</b>	Passes the radiated limits

<b>Radiated Limits</b>	
<b>Frequency (MHz)</b>	<b>Quasi-Peak Limit (dBuV)</b>
30-88	40
88-216	43.52
216-960	46.02
960-1000	54

NOTE: During preliminary scans, there wasn't any difference which mode, channel, or data rate was used with the EUT; therefore only 802.11b mode at Channel 1 with a data rate of 1 Mbps was used for final testing.

Page 5 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)			Cable Factor (dB)	Ant. Factor (dB)	10 Meter Distance Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL
179.97	7.88	400	225				2.30	16.40	10.46	37.04	43.50	-6.46
209.97	9.87	400	180				2.48	17.16	10.46	39.97	43.50	-3.53
250.01	12.22	400	135				2.70	17.70	10.46	43.08	46.00	-2.92
314.56	6.96	400	0				3.09	14.30	10.46	27.85	46.00	-18.15
352.00	11.82	300	270				3.31	15.19	10.46	28.96	46.00	-17.04
374.98	3.96	300	270				3.40	15.05	10.46	32.87	46.00	-13.13
399.96	9.54	250	270				3.50	15.20	10.46	38.70	46.00	-7.30
499.99	7.42	250	270				4.00	18.80	10.46	40.68	46.00	-5.32

NOTE: The measurements were taken at 10 meters and extrapolated to 3 meters.

Page 6 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

### RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	10 Meter Distance Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL
52.61	14.32	100	180			1.13	10.40	10.46	36.31	40.00	-3.69
61.78	21.08	100	0	16.83	Q	1.24	8.34	10.46	36.87	40.00	-3.13
176.00	10.58	100	0			2.28	15.64	10.46	38.96	43.50	-4.54
249.99	13.11	100	0			2.70	19.10	10.46	32.26	46.00	-13.74
314.56	8.68	100	0			3.09	14.88	10.46	28.42	46.00	-17.58
351.99	11.04	100	315			3.31	15.39	10.46	40.20	46.00	-5.80
374.99	10.77	100	90			3.40	15.30	10.46	39.93	46.00	-6.07
499.98	10.30	100	90			4.00	18.70	10.46	43.46	46.00	-2.54
625.01	8.85	100	90			4.55	19.95	10.46	43.81	46.00	-2.19

NOTE: The measurements were taken at 10 meters and extrapolated to 3 meters.

Page 7 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

<b>CLIENT:</b>	Lantronix, Inc.	<b>DATE:</b>	9/19/05
<b>EUT:</b>	Wireless Device Server	<b>PROJECT NUMBER:</b>	LANTR-041213
<b>MODEL NUMBER:</b>	WBX2100	<b>TEST ENGINEER:</b>	RJ
<b>SERIAL NUMBER:</b>	ENG002	<b>SITE #:</b>	1
<b>CONFIGURATION:</b>	Tested in wireless mode with the Wanshih Antenna.	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	65% RH
		<b>TIME:</b>	12:10 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(c)
<b>Description:</b>	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.
<b>Results:</b>	Passes (See Data Sheets)

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Page 8 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)**  
**Channels 1, 6, & 11**  
**Continuous TX at MAIN Antenna port with Wanshih Antennas**  
**Aegis Labs, Inc. File #: LANTR-041213-02**

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL
2412.00	63.33	100	135			2.01	32.25	97.59		
2412.00				59.90	A	2.01	32.25	94.16		
2437.00	63.67	125	135			2.02	32.35	98.04		
2437.00				60.00	A	2.02	32.35	94.37		
2462.00	62.17	125	135			2.03	32.45	96.65		
2462.00				58.86	A	2.03	32.45	93.34		

### RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL
2412.00	70.33	100	135			2.01	31.97	104.31		
2412.00				67.28	A	2.01	31.97	101.26		
2437.00	71.83	100	135			2.02	32.12	105.97		
2437.00				68.36	A	2.02	32.12	102.50		
2462.00	71.67	100	135			2.03	32.27	105.98		
2462.00				67.84	A	2.03	32.27	102.15		

Page 9 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)**

**Channels 1, 6, & 11**

**Continuous TX at MAIN Antenna port with Wanshih Antennas**

**Aegis Labs, Inc. File #: LANTR-041213-02**

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL
2390.00								42.76	74.00	-31.24
2390.00								33.66	54.00	-20.34
2400.00	33.67	100	135			2.01	32.20	67.88	77.59	-9.71
2483.50								44.32	74.00	-29.68
2483.50								37.34	54.00	-16.66

### RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL
2390.00								49.48	74.00	-24.52
2390.00								40.76	54.00	-13.24
2400.00	36.00	100	135			2.01	31.90	69.91	84.31	-14.41
2483.50								53.65	74.00	-20.35
2483.50								46.15	54.00	-7.85

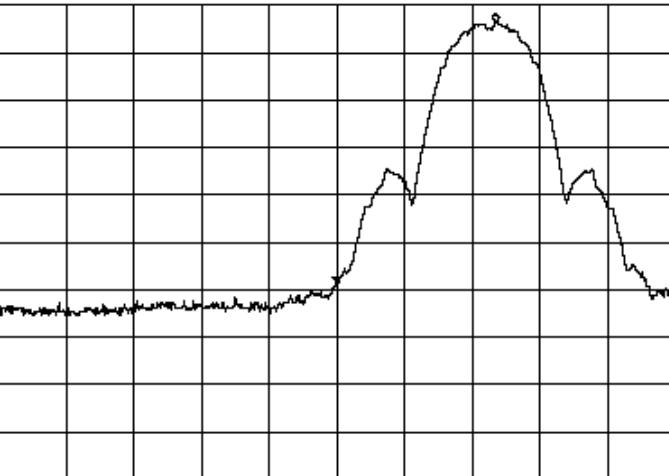
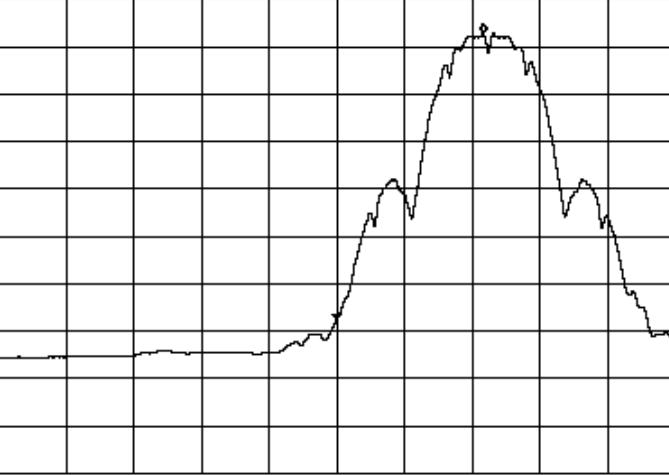
Page 10 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
09/23/05	2.412 GHz band edge <b>PEAK DELTA</b> (LANTR-040324-10a01)	RC
	<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>△MKR 54. 83dB 23. 5MHz</p>  <p>CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>	
Test Date	Data	Test Eng.
09/23/05	2.412 GHz band edge <b>AVERAGE DELTA</b> (LANTR-040324-10a02)	RC
	<p>*ATTEN 20dB RL 10. 0dBm 10dB/</p> <p>△MKR 60. 50dB 21. 7MHz</p>  <p>CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 10Hz SWP 25.0sec</p>	

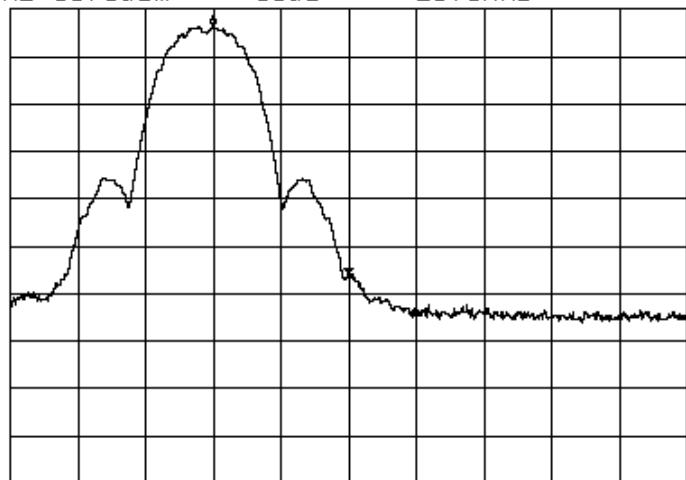
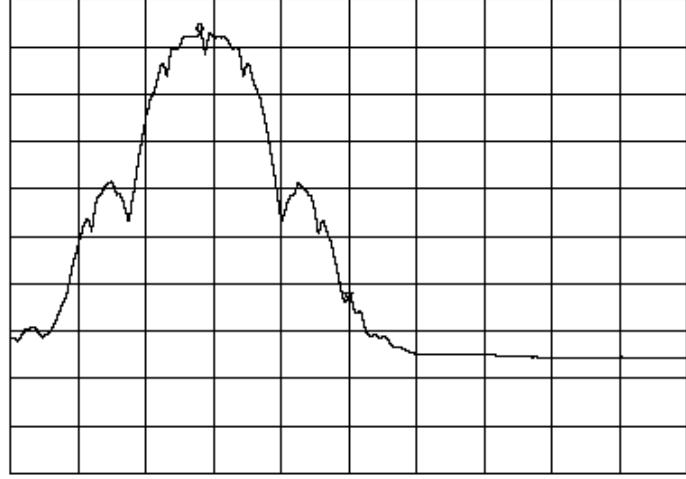
Page 11 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
09/23/05	2.462 GHz band edge <b>PEAK DELTA</b> (LANTR-040324-10a03)	RC
	<p>*ATTEN 20dB RL 10. 00 dBm 10dB/</p> <p>△MKR 52. 33dB -20. 0MHz</p>  <p>CENTER 2.4835GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>	
Test Date	Data	Test Eng.
09/23/05	2.462 GHz band edge <b>AVERAGE DELTA</b> (LANTR-040324-10a04)	RC
	<p>*ATTEN 20dB RL 10. 00 dBm 10dB/</p> <p>△MKR 56. 00dB -22. 0MHz</p>  <p>CENTER 2.4835GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 10Hz SWP 25.0sec</p>	

Page 12 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)*

*Channels 1, 6, & 11*

**Continuous TX at MAIN Antenna port with Wanshah Antennas**

*Aegis Labs, Inc. File #: LANTR-041213-03*

### RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL
----------------	----------------------------	---------------------------	----------------------	---------------------------	--------------------------	-------------------------	------------------------	--------------------------------	------------------	---------------------

#### EUT in Continuous Transmit Mode on Channel 1 (2.412 GHz)

1000.01	52.67	100	135		50.86	1.28	27.80	30.89	74.00	-43.11	
1000.01				42.00	A	50.86	1.28	27.80	20.22	54.00	-33.78
4824.00	51.83	100	180		50.78	2.88	34.78	38.71	74.00	-35.29	
4824.00				38.00	A	50.78	2.88	34.78	24.88	54.00	-29.12

#### EUT in Continuous Transmit Mode on Channel 6 (2.437 GHz)

1000.04	55.50	100	180		50.86	1.28	27.80	33.72	74.00	-40.28	
1000.04				42.83	A	50.86	1.28	27.80	21.05	54.00	-32.95
4873.86	50.83	100	180		50.82	2.90	34.73	37.64	74.00	-36.36	
4873.86				37.83	A	50.82	2.90	34.73	24.64	54.00	-29.36

#### EUT in Continuous Transmit Mode on Channel 11 (2.462 GHz)

1000.00	55.33	100	135		50.86	1.28	27.80	33.55	74.00	-40.45	
1000.00				43.00	A	50.86	1.28	27.80	21.22	54.00	-32.78
4924.00	50.83	100	225		50.84	2.92	34.65	37.56	74.00	-36.44	
4924.00				38.17	A	50.84	2.92	34.65	24.90	54.00	-29.10

Page 13 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	
<b>EUT in Continuous Transmit Mode on Channel 1 (2.412 GHz)</b>											
1000.10	59.33	100	180		50.86	1.28	27.30	37.05	74.00	-36.95	
1000.10				46.33	A	50.86	1.28	27.30	24.05	54.00	-29.95
4823.96	51.50	100	180		50.78	2.88	34.50	38.10	74.00	-35.90	
4823.96				40.33	A	50.78	2.88	34.50	26.93	54.00	-27.07
<b>EUT in Continuous Transmit Mode on Channel 6 (2.437 GHz)</b>											
1000.17	55.67	100	180		50.86	1.28	27.30	33.39	74.00	-40.61	
1000.17				47.50	A	50.86	1.28	27.30	25.22	54.00	-28.78
4874.01	52.17	100	180		50.82	2.90	34.50	38.75	74.00	-35.25	
4874.01				40.83	A	50.82	2.90	34.50	27.41	54.00	-26.59
<b>EUT in Continuous Transmit Mode on Channel 11 (2.462 GHz)</b>											
1000.30	57.50	100	180		50.86	1.28	27.30	35.22	74.00	-38.78	
1000.30				47.33	A	50.86	1.28	27.30	25.05	54.00	-28.95
4924.00	50.83	100	180		50.84	2.92	34.50	37.41	74.00	-36.59	
4924.00				40.00	A	50.84	2.92	34.50	26.58	54.00	-27.42

Page 14 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)*

*Channels 1, 6, & 11*

*Continuous RX at MAIN Antenna port with Wanshih Antennas*

*Aegis Labs, Inc. File #: LANTR-041213-03*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	
<b>EUT in Continuous Receive Mode on Channel 1 (2.412 GHz)</b>											
1000.30	57.50	100	180		50.86	1.28	27.30	35.22	74.00	-38.78	
1000.30				47.33	A	50.86	1.28	27.30	25.05	54.00	-28.95
4924.00	50.83	100	180		50.84	2.92	34.50	37.41	74.00	-36.59	
4924.00				40.00	A	50.84	2.92	34.50	26.58	54.00	-27.42
<b>EUT in Continuous Receive Mode on Channel 6 (2.437 GHz)</b>											
1000.00	55.33	100	135		50.86	1.28	27.80	33.55	80.00	-46.45	
1000.00				42.67	A	50.86	1.28	27.80	20.89	60.00	-39.11
4873.79	51.33	100	225		50.82	2.90	34.73	38.14	80.00	-41.86	
4873.79				37.33	A	50.82	2.90	34.73	24.14	60.00	-35.86
<b>EUT in Continuous Receive Mode on Channel 11 (2.462 GHz)</b>											
1000.00	55.83	100	135		50.86	1.28	27.80	34.05	80.00	-45.95	
1000.00				43.33	A	50.86	1.28	27.80	21.55	60.00	-38.45
4924.00	50.83	100	180		50.84	2.92	34.65	37.56	80.00	-42.44	
4924.00				37.50	A	50.84	2.92	34.65	24.23	60.00	-35.77

Page 15 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Spurious Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	
<b>EUT in Continuous Receive Mode on Channel 1 (2.412 GHz)</b>											
1000.01	59.33	100	180		50.86	1.28	27.30	37.05	80.00	-42.95	
1000.01				43.83	A	50.86	1.28	27.30	21.55	60.00	-38.45
4824.04	52.33	150	180		50.78	2.88	34.50	38.93	80.00	-41.07	
4824.04				42.33	A	50.78	2.88	34.50	28.93	60.00	-31.07
<b>EUT in Continuous Receive Mode on Channel 6 (2.437 GHz)</b>											
1000.22	60.00	100	225		50.86	1.28	27.30	37.72	80.00	-42.28	
1000.22				48.37	A	50.86	1.28	27.30	26.09	60.00	-33.91
4874.07	51.83	100	180		50.82	2.90	34.50	38.41	80.00	-41.59	
4874.07				40.50	A	50.82	2.90	34.50	27.08	60.00	-32.92
<b>EUT in Continuous Receive Mode on Channel 11 (2.462 GHz)</b>											
1000.16	57.33	100	225		50.86	1.28	27.30	35.05	80.00	-44.95	
1000.16				49.33	A	50.86	1.28	27.30	27.05	60.00	-32.95
4924.00	50.00	100	180		50.84	2.92	34.50	36.58	80.00	-43.42	
4924.00				39.67	A	50.84	2.92	34.50	26.25	60.00	-33.75

Page 16 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## PEAK TRANSMIT POWER

<b>CLIENT:</b>	Lantronix, Inc.	<b>DATE:</b>	09/24/05
<b>EUT:</b>	Wireless Device Server	<b>PROJECT NUMBER:</b>	LANTR-050818-05
<b>MODEL NUMBER:</b>	WBX2100	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	ENG002	<b>SITE #:</b>	1
<b>CONFIGURATION:</b>	Tested in wireless mode with the Wanshih Antenna.	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	54% RH
		<b>TIME:</b>	12:30 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(b)(1)
<b>Description:</b>	The maximum peak output power of the intentional radiator shall not exceed 1 watt.
<b>Results:</b>	See Data Sheet

### Peak Transmit Power Limits

Frequency (MHz)	Output Power (W)
2412-2462	1

Page 17 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Rate (Mbps)	Average Power (dBm)	Average Power (mW)	Peak Power (dBm)	Peak Power (mW)
<b>802.11b</b>	1	2412	1	12.26	16.83	16.41	43.75
<b>802.11b</b>	1	2412	5.5	12.03	15.96	15.84	38.37
<b>802.11b</b>	1	2412	11	12.27	16.87	16.40	43.65
<b>802.11b</b>	6	2437	1	12.37	17.26	16.14	41.11
<b>802.11b</b>	6	2437	5.5	12.40	17.38	15.56	35.97
<b>802.11b</b>	6	2437	11	12.37	17.26	16.15	41.21
<b>802.11b</b>	11	2462	1	12.79	19.01	15.79	37.93
<b>802.11b</b>	11	2462	5.5	12.85	19.28	15.50	35.48
<b>802.11b</b>	11	2462	11	12.90	19.50	16.17	41.40

NOTE: The output power measurement is conducted.

Page 18 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## 6 dB EMISSIONS BANDWIDTH

<b>CLIENT:</b>	Lantronix, Inc.	<b>DATE:</b>	09/23/05
<b>EUT:</b>	Wireless Device Server	<b>PROJECT NUMBER:</b>	LANTR-050818-06
<b>MODEL NUMBER:</b>	WBX2100	<b>TEST ENGINEER:</b>	RJ/JC
<b>SERIAL NUMBER:</b>	ENG002	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested in wireless mode with the Wanshih Antenna.	<b>TEMPERATURE:</b>	22 C
		<b>HUMIDITY:</b>	50% RH
		<b>TIME:</b>	2:30 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(a)(2)
<b>Description:</b>	The minimum 6 dB bandwidth shall be at least 500 kHz.
<b>Results:</b>	See Data Sheets

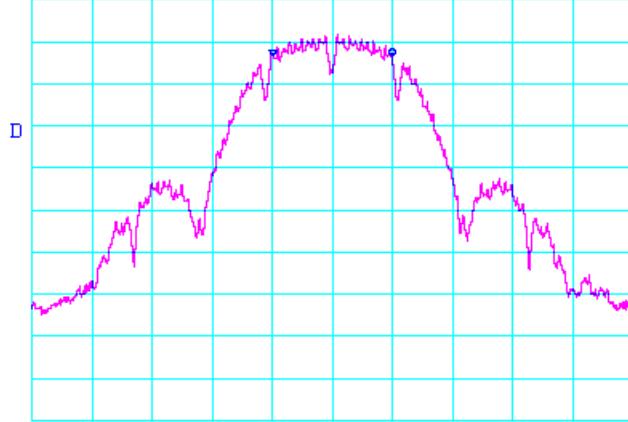
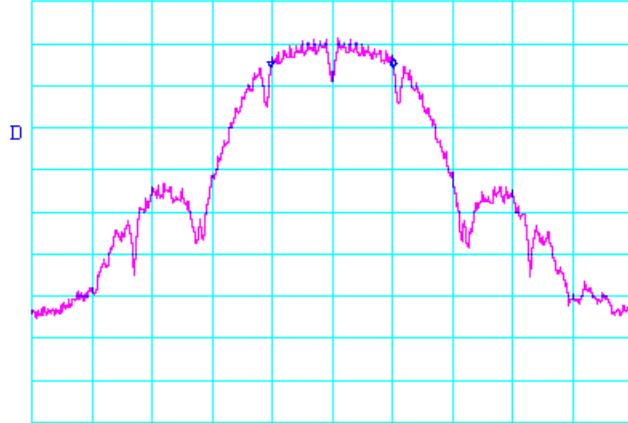
Page 19 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## 6 dB Emissions Bandwidth (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.412 GHz (LANTR-050818-06b1)	RJ/JC
<b>*ATTEN 20dB</b> <b>RL 10.0dBm</b>	<b>10dB/</b> <b>△MKR -.17dB</b> <b>9.92MHz</b>	
 <p>D</p> <p>CENTER 2.41200GHz SPAN 50.00MHz *RBW 100kHz *UWB 300kHz SWP 50.0ms</p>		
Test Date	Data	Test Eng.
09/23/05	2.437 GHz (LANTR-050818-06b2)	RJ/JC
<b>*ATTEN 20dB</b> <b>RL 10.0dBm</b>	<b>10dB/</b> <b>△MKR -.17dB</b> <b>10.17MHz</b>	
 <p>D</p> <p>CENTER 2.43700GHz SPAN 50.00MHz *RBW 100kHz *UWB 300kHz SWP 50.0ms</p>		

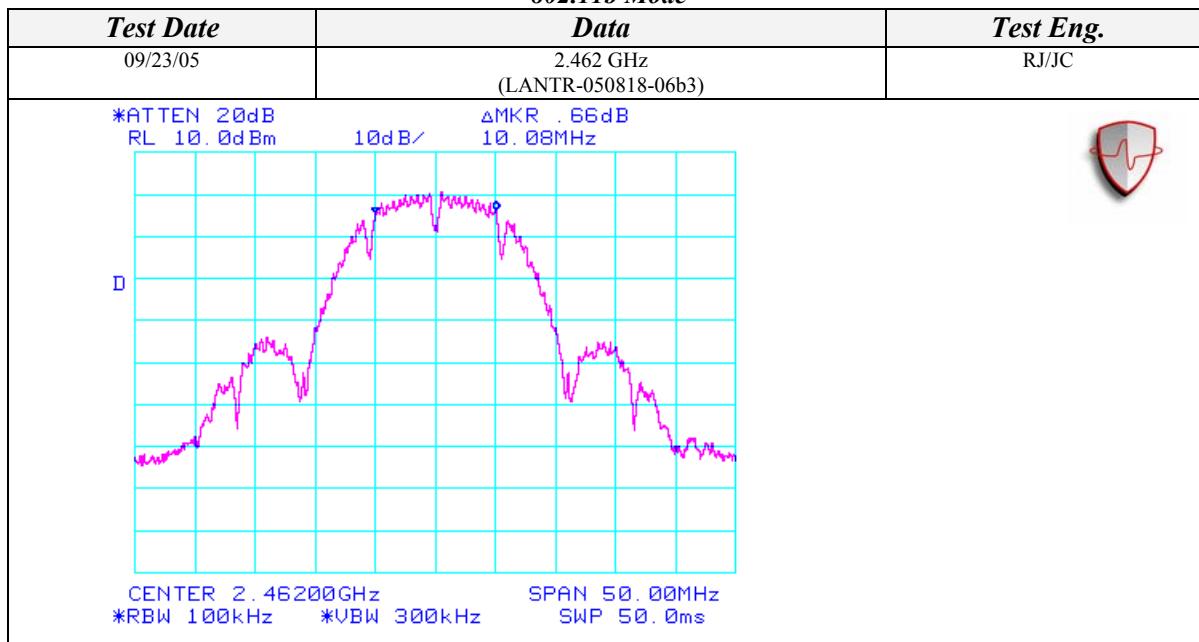
Page 20 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



## 6 dB Emissions Bandwidth (Continued)

AEGIS LABS INC.

### 802.11b Mode



Page 21 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## PEAK POWER SPECTRAL DENSITY

<b>CLIENT:</b>	Lantronix, Inc.	<b>DATE:</b>	09/23/05
<b>EUT:</b>	Wireless Device Server	<b>PROJECT NUMBER:</b>	LANTR-040324
<b>MODEL NUMBER:</b>	WBX2100	<b>TEST ENGINEER:</b>	RJ/JC
<b>SERIAL NUMBER:</b>	ENG002	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested in wireless mode with the Wanshih Antenna.	<b>TEMPERATURE:</b>	22 C
		<b>HUMIDITY:</b>	50% RH
		<b>TIME:</b>	2:30 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(d)
<b>Description:</b>	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
<b>Results:</b>	See Data Sheets

Peak Power Spectral Density Limits	
Frequency (MHz)	Limit (dBm)
2412-2462	8

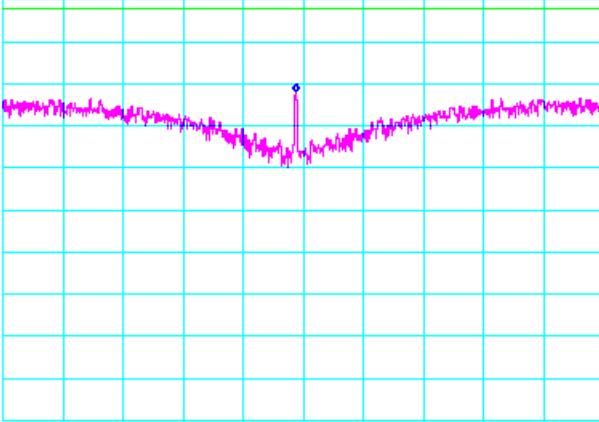
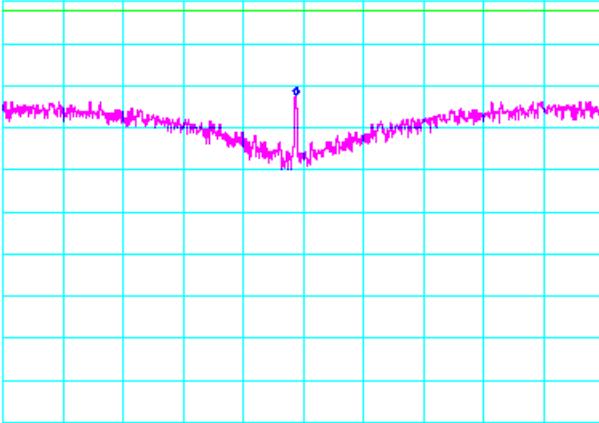
Page 22 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Peak Power Spectral Density (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.412 GHz (LANTR-050818-06d1)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -12.00dBm 2.411983GHz	
		
CENTER 2.412000GHz SPAN 1.500MHz *RBW 3.0kHz *UBW 3.0kHz *SWP 500sec		
Test Date	Data	Test Eng.
09/23/05	2.437 GHz (LANTR-050818-06d2)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -12.33dBm 2.436983GHz	
		
CENTER 2.437000GHz SPAN 1.500MHz *RBW 3.0kHz *UBW 3.0kHz *SWP 500sec		

Page 23 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Peak Power Spectral Density (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.462 GHz (LANTR-050818-06d3)	RJ/JC
*ATTEN 20dB RL 10.0dBm	MKR -12.83dBm 2.461983GHz	

**D**

Page 24 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## CONDUCTED OUT OF BAND EMISSIONS

<b>CLIENT:</b>	Lantronix, Inc.	<b>DATE:</b>	09/23/05
<b>EUT:</b>	Wireless Device Server	<b>PROJECT NUMBER:</b>	LANTR-040324
<b>MODEL NUMBER:</b>	WBX2100	<b>TEST ENGINEER:</b>	RJ/JC
<b>SERIAL NUMBER:</b>	ENG002	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested in wireless mode with the Wanshih Antenna.	<b>TEMPERATURE:</b>	22 C
		<b>HUMIDITY:</b>	50% RH
		<b>TIME:</b>	2:30 PM

<b>Standard:</b>	FCC CFR 47, Part 15.247(c)
<b>Description:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

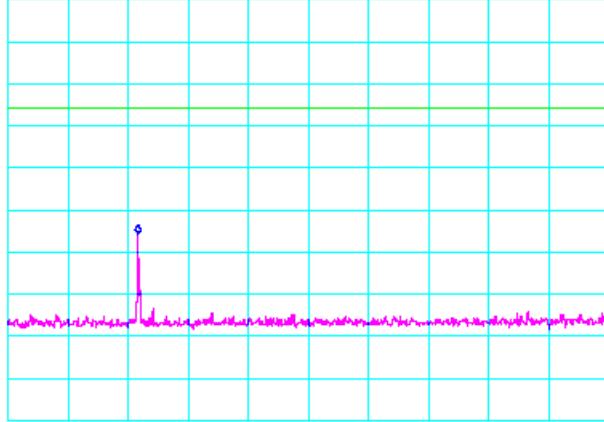
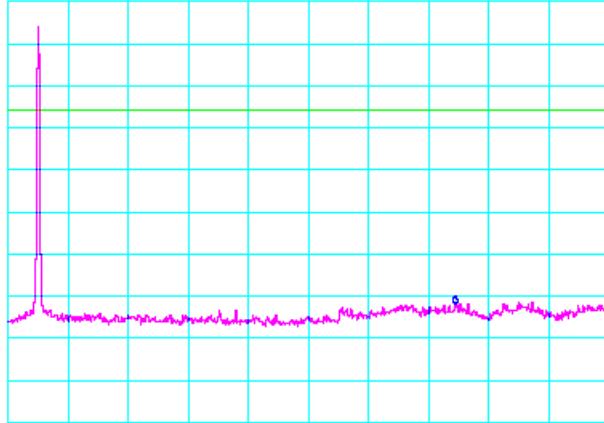
Page 25 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.412 GHz (LANTR-050818-06e01)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -45.67dBm 457MHz	
		
	START 30MHz *RBW 100kHz	STOP 2.000GHz *UBW 300kHz
		SWP 1.10sec
Test Date	Data	Test Eng.
09/23/05	2.412 GHz (LANTR-050818-06e02)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -62.00dBm 7.960GHz	
		
	START 2.000GHz *RBW 100kHz	STOP 10.000GHz *UBW 300kHz
		SWP 4.40sec

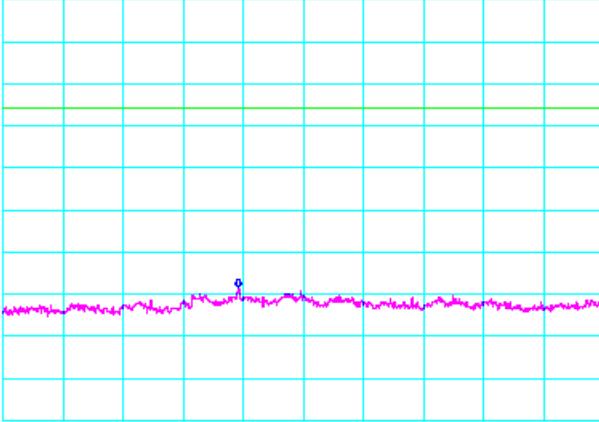
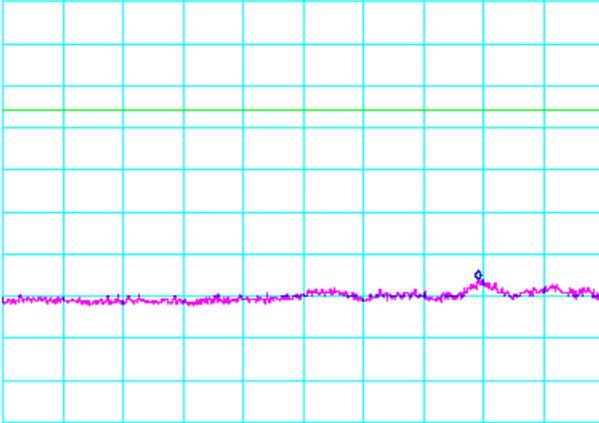
Page 26 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.412 GHz (LANTR-050818-06e03)	RJ/JC
*ATTEN 20dB RL 10.0dBm	MKR -58.50dBm 13.92GHz	
D		
START 10.00GHz *RBW 100kHz	STOP 20.00GHz *UWB 300kHz	SWP 5.50sec
Test Date	Data	Test Eng.
09/23/05	2.412 GHz (LANTR-050818-06e04)	RJ/JC
*ATTEN 20dB RL 10.0dBm	MKR -58.00dBm 24.750GHz	
D		
START 20.000GHz *RBW 100kHz	STOP 26.000GHz *UWB 300kHz	SWP 3.30sec

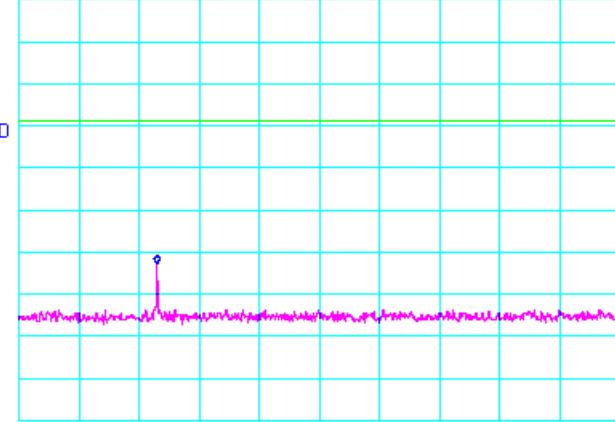
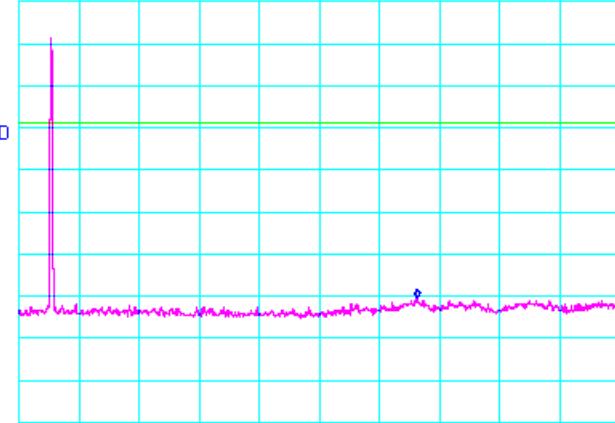
Page 27 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.437 GHz (LANTR-050818-06e05)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -52.67dBm 483MHz	
		
START 30MHz *RBW 100kHz	STOP 2.000GHz *UBW 300kHz SWP 1.10sec	
Test Date	Data	Test Eng.
09/23/05	2.437 GHz (LANTR-050818-06e06)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ MKR -60.33dBm 7.307GHz	
		
START 2.000GHz *RBW 100kHz	STOP 10.000GHz *UBW 300kHz SWP 4.40sec	

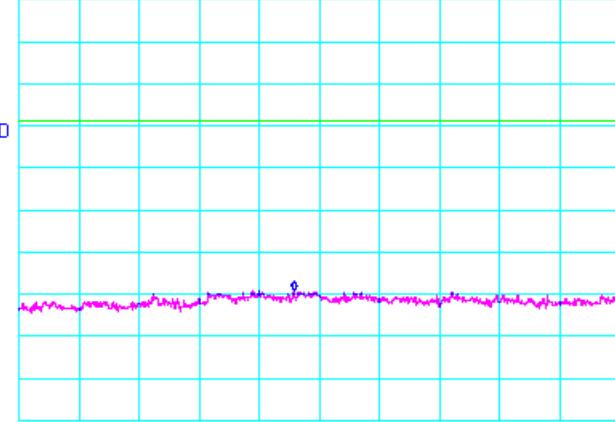
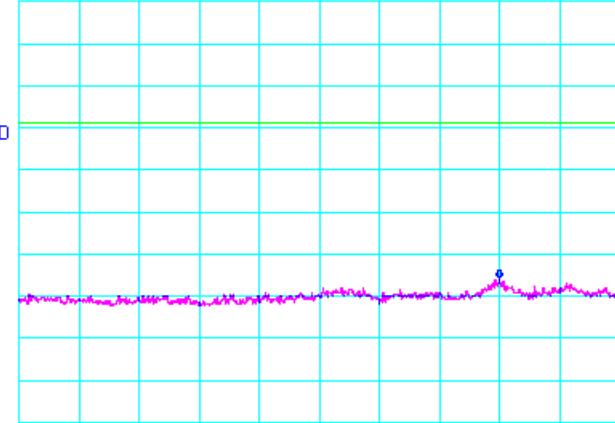
Page 28 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.437 GHz (LANTR-050818-06e07)	RJ/JC
*ATTEN 20dB RL 10.0dBm	MKR -59.00dBm 14.58GHz	
		
	START 10.00GHz *RBW 100kHz	
	STOP 20.00GHz *UWB 300kHz	
	SWP 5.50sec	
Test Date	Data	Test Eng.
09/23/05	2.437 GHz (LANTR-050818-06e08)	RJ/JC
*ATTEN 20dB RL 10.0dBm	MKR -55.83dBm 24.800GHz	
		
	START 20.000GHz *RBW 100kHz	
	STOP 26.000GHz *UWB 300kHz	
	SWP 3.30sec	

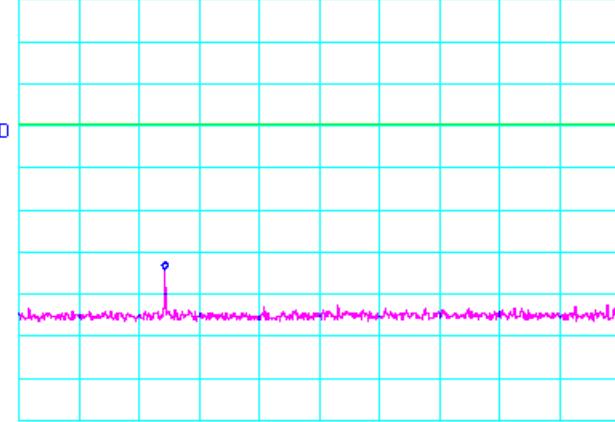
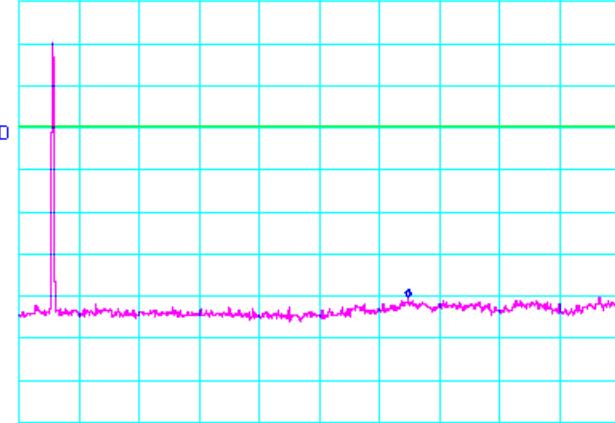
Page 29 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



AEGIS LABS INC.

## Conducted Out Of Band Emissions (Continued)

### 802.11b Mode

Test Date	Data	Test Eng.
09/23/05	2.462 GHz (LANTR-050818-06e09)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ 509MHz	MKR -54.17dBm
		D
START 30MHz *RBW 100kHz	STOP 2.000GHz *UBW 300kHz	SWP 1.10sec
Test Date	Data	Test Eng.
09/23/05	2.462 GHz (LANTR-050818-06e10)	RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/ 7.187GHz	MKR -60.33dBm
		D
START 2.000GHz *RBW 100kHz	STOP 10.000GHz *UBW 300kHz	SWP 4.40sec

Page 30 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT



## Conducted Out Of Band Emissions (Continued)

AEGIS LABS INC.

### 802.11b Mode

Test Date	Data		Test Eng.
09/23/05	2.462 GHz (LANTR-050818-06e11)		RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/	MKR -58.50dBm 13.37GHz	
START 10.00GHz *RBW 100kHz	STOP 20.00GHz *UVW 300kHz	SWP 5.50sec	
Test Date	Data		Test Eng.
09/23/05	2.462 GHz (LANTR-050818-06e12)		RJ/JC
*ATTEN 20dB RL 10.0dBm	10dB/	MKR -58.17dBm 24.780GHz	
START 20.00GHz *RBW 100kHz	STOP 26.00GHz *UVW 300kHz	SWP 3.30sec	

Page 31 of 31 (Appendix A)  
Report Number: LANTR-050818F  
FCC ID: R68WIBATT